


Plot 7-61. Conducted Spurious Plot Antenna WF2b (802.11ax OFDMA – RU242 – Ch. 1)

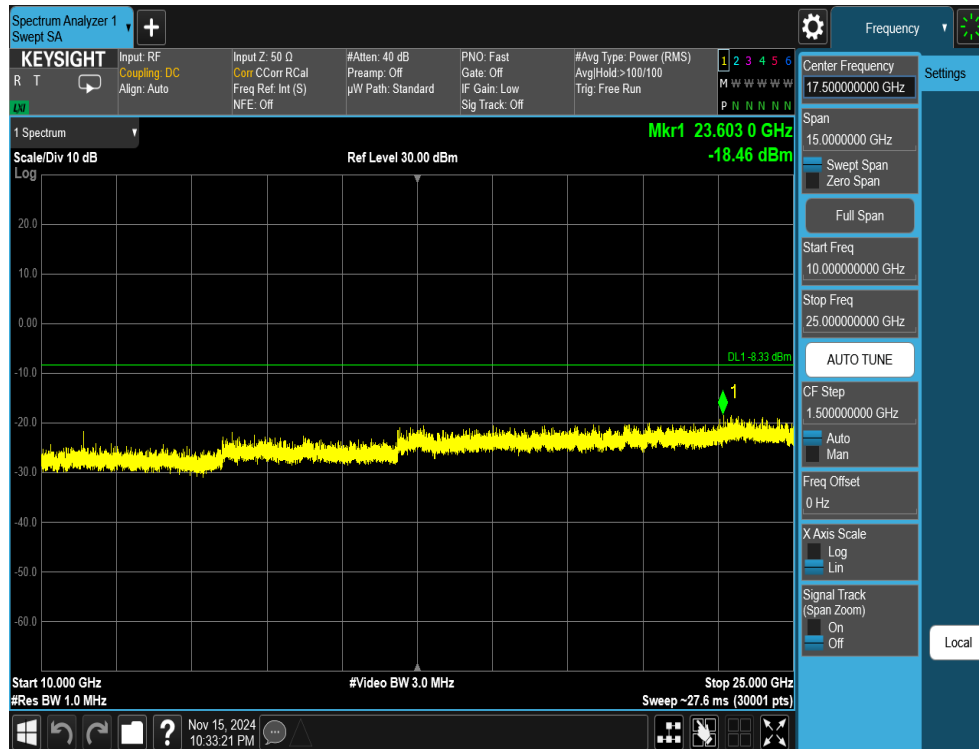


Plot 7-62. Conducted Spurious Plot Antenna WF2b (802.11ax OFDMA – RU242 – Ch. 1)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 63 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

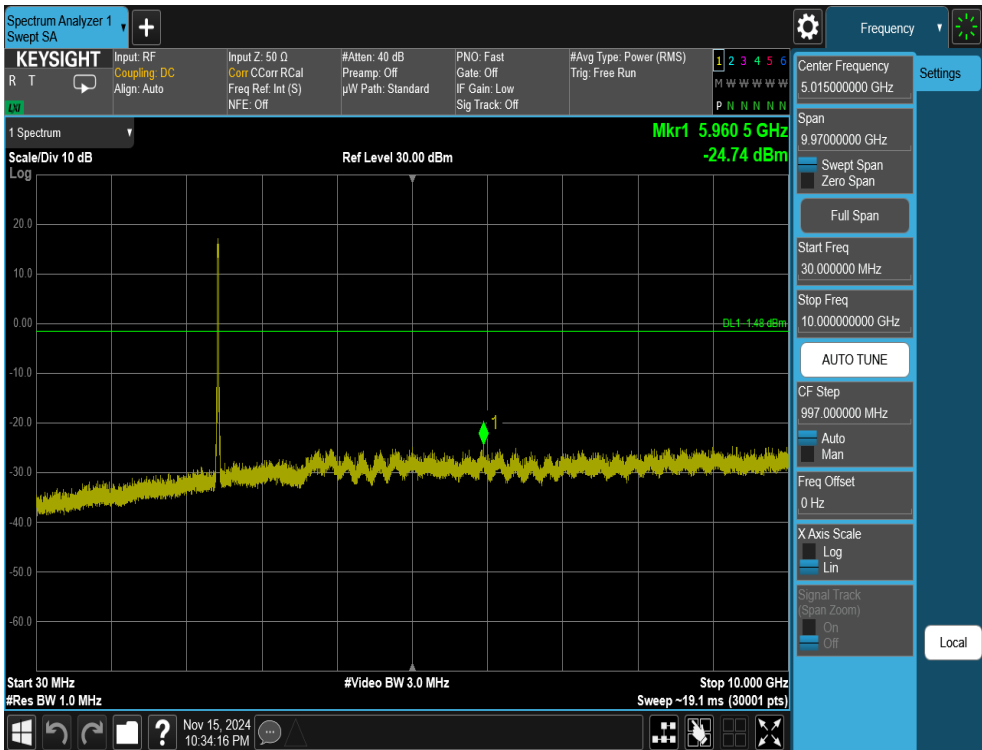


Plot 7-63. Conducted Spurious Plot Antenna WF2b (802.11ax OFDMA – RU242 – Ch. 6)

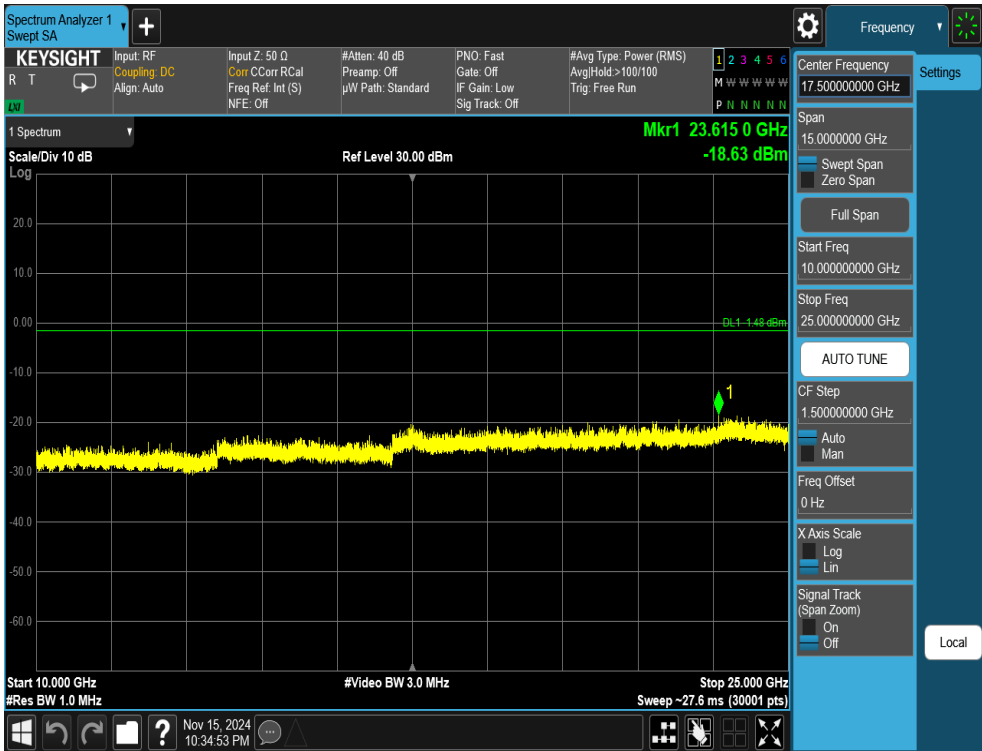


Plot 7-64. Conducted Spurious Plot Antenna WF2b (802.11ax OFDMA – RU242 – Ch. 6)

FCC ID: BCGA3268 IC: 579C-A3268	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 64 of 112

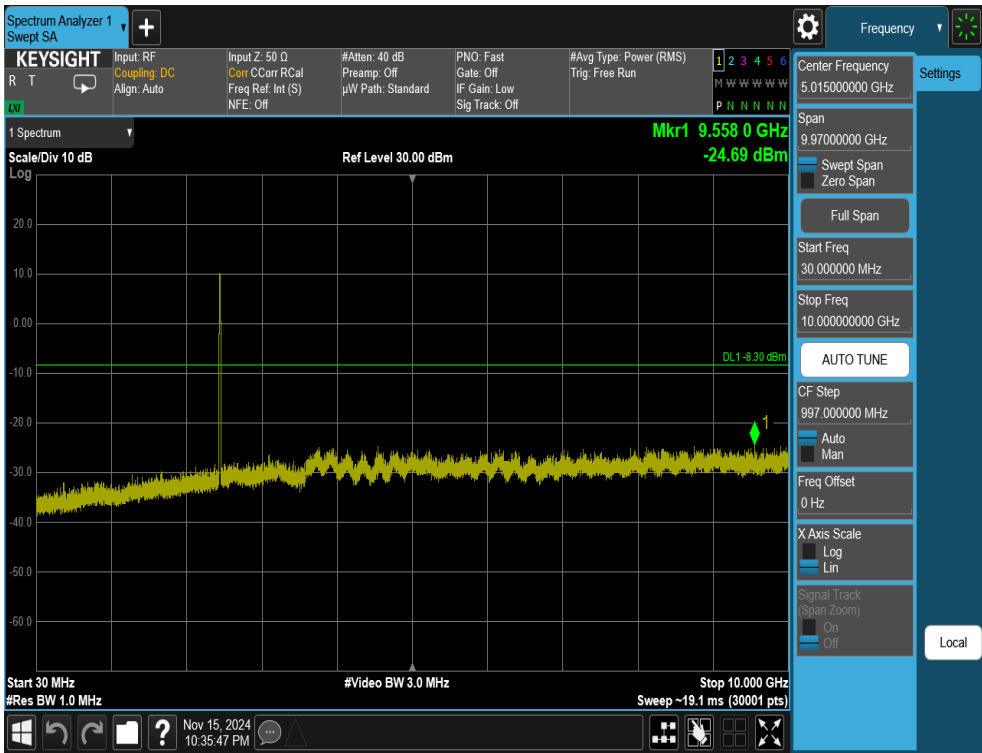

Plot 7-65. Conducted Spurious Plot Antenna WF2b (802.11ax OFDMA – RU242 – Ch. 11)

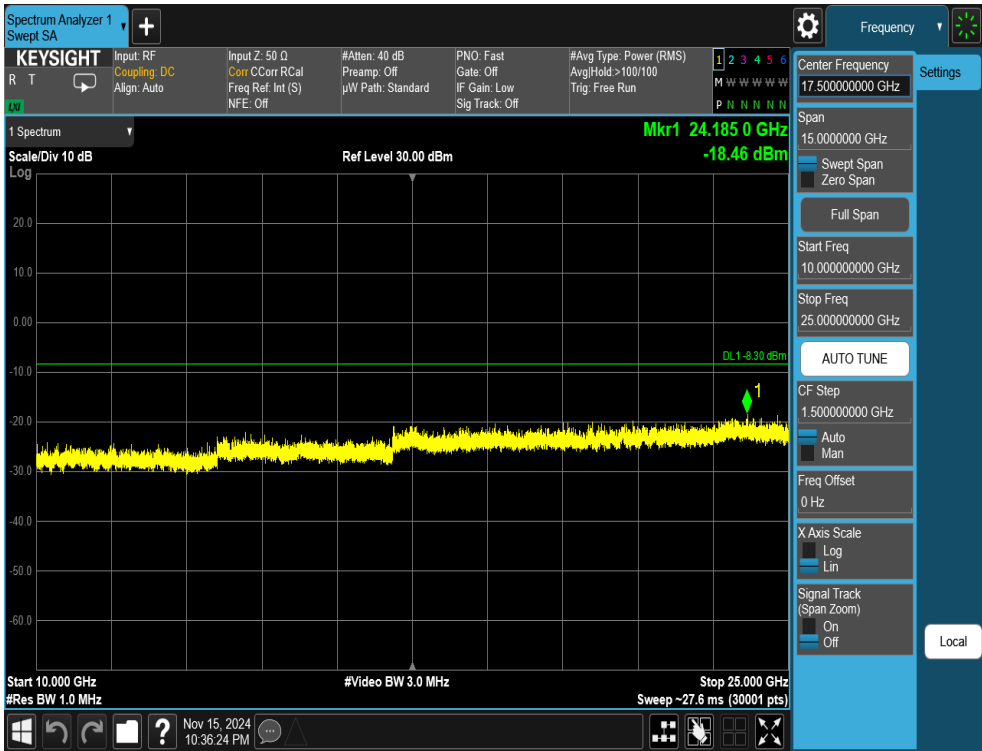

Plot 7-66. Conducted Spurious Plot Antenna WF2b (802.11ax OFDMA – RU242 – Ch. 11)

FCC ID: BCGA3268 IC: 579C-A3268	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 65 of 112

## 7.7 Radiated Spurious Emissions – Above 1 GHz

**§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]**

### **Test Overview and Limit**

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-24 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 7-24. Radiated Limits**

### **Test Procedures Used**

ANSI C63.10-2020 – Subclause 6.6.4.3  
KDB 558074 D01 v05r02 – Sections 8.6, 8.7

### **Test Settings**

#### **Average Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of Measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

#### **Peak Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 66 of 112

V 10.6 10/27/2023

## Test Setup

The EUT and Measurement equipment were set up as shown in the diagram below.

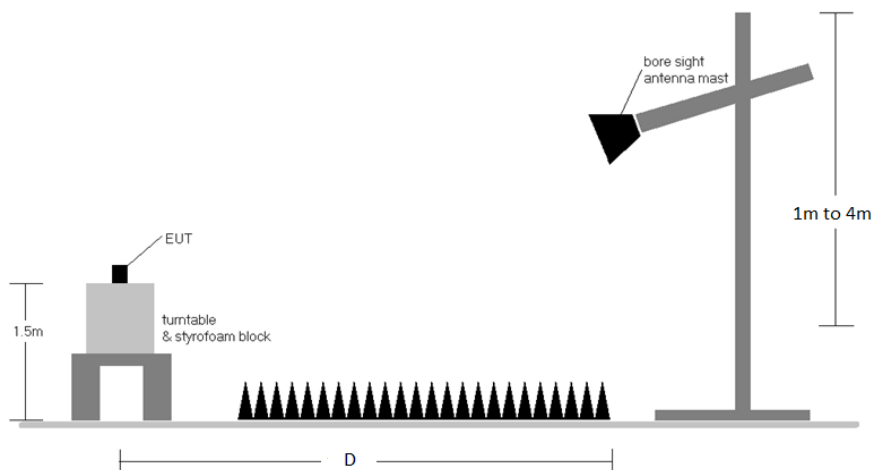

**Figure 7-6. Radiated Measurement Setup**

## Test Notes

1. The optional test procedures for antenna port conducted Measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All Radiated Spurious Emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-24.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak Measurements were taken using linearly polarized horn antennas.
6. D is the Measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor Measurement.
9. All data rates were investigated and only the worst case is reported.
10. For radiated Measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-04-R1.BCG	<b>Test Dates:</b> 10/25/2024 - 1/4/2025	<b>EUT Type:</b> Tablet Device	Page 67 of 112

V 10.6 10/27/2023

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

### Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.2 - 7.7.4 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-04-R1.BCG	<b>Test Dates:</b> 10/25/2024 - 1/4/2025	<b>EUT Type:</b> Tablet Device	Page 68 of 112

V 10.6 10/27/2023

## 7.7.1 CDD Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

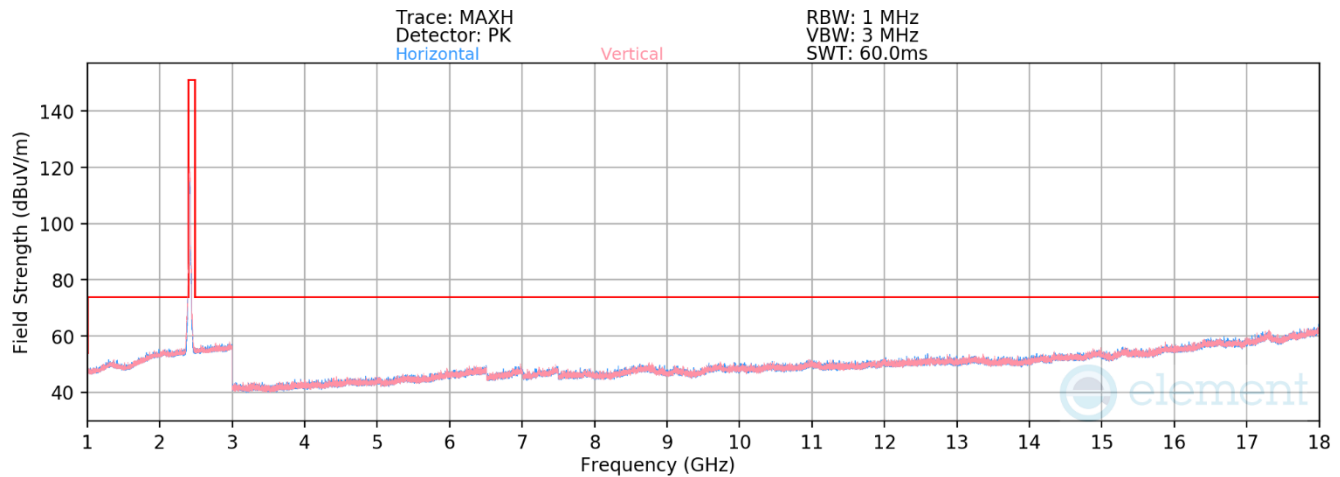

**Plot 7-67. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 1)**

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4824.00	Average	H	-	-	-78.84	5.37	33.53	53.98	-20.45
4824.00	Peak	H	-	-	-67.26	5.35	45.09	73.98	-28.89
12060.00	Average	V	-	-	-80.76	14.66	40.90	53.98	-13.08
12060.00	Peak	V	-	-	-70.30	14.68	51.37	73.98	-22.61

**Table 7-25. Radiated Measurements CDD (RU26)**


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 69 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

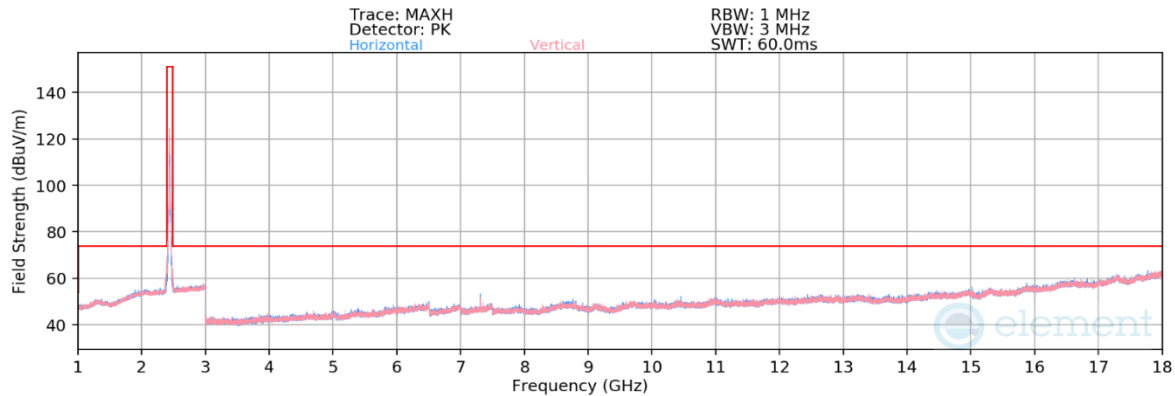

**Plot 7-68. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 6)**

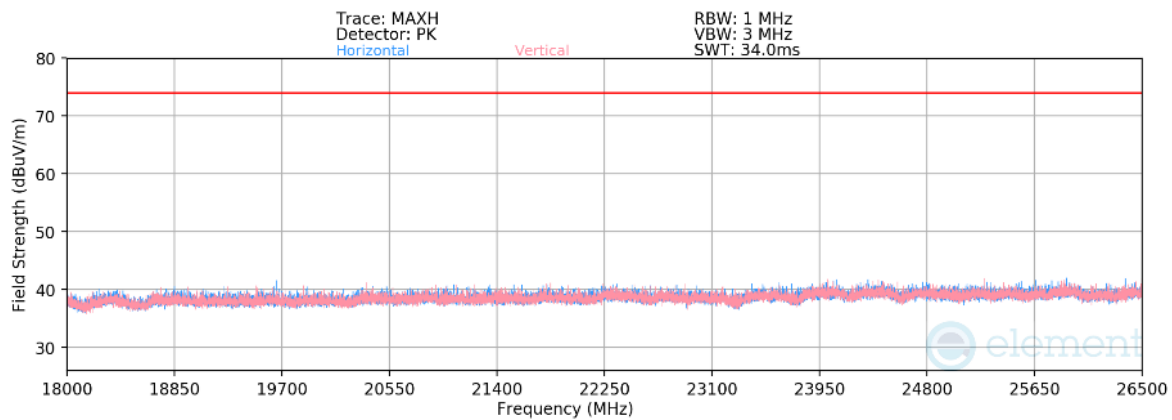

**Plot 7-69. Radiated Spurious Emissions above 18GHz CDD (802.11ax OFDMA – RU26 – Ch. 6)**


Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Average	V	165	188	-74.92	5.32	37.39	53.98	-16.59
4874.00	Peak	V	165	188	-64.83	5.32	47.48	73.98	-26.50
7311.00	Average	H	259	143	-71.35	9.82	45.47	53.98	-8.51
7311.00	Peak	H	259	143	-60.34	9.82	56.48	73.98	-17.50
12185.00	Average	H	-	-	-81.29	14.84	40.54	53.98	-13.44
12185.00	Peak	H	-	-	-71.16	15.07	50.91	73.98	-23.07

**Table 7-26. Radiated Measurements CDD (RU26)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 70 of 112



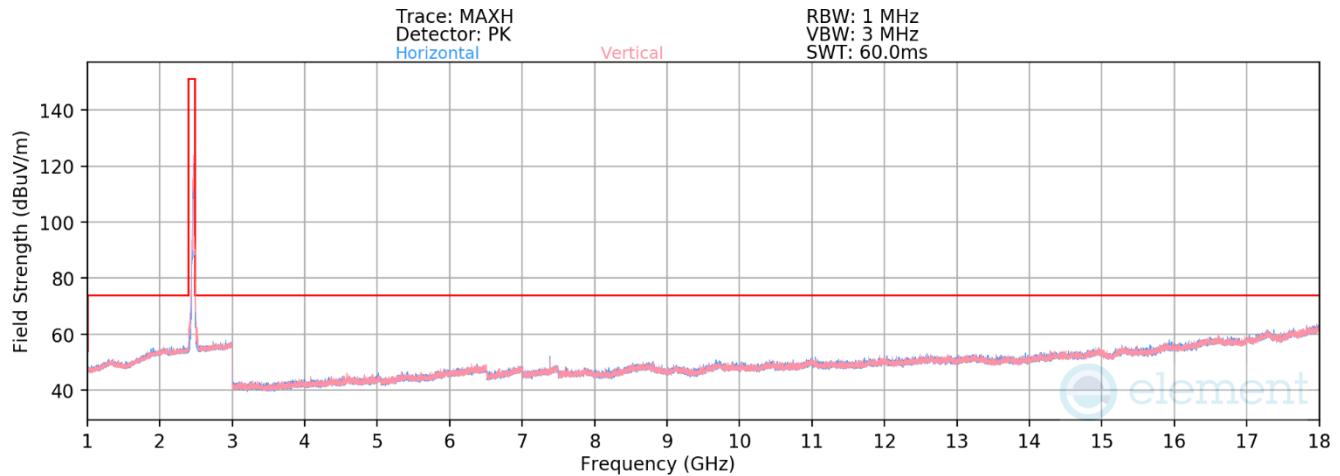

**Plot 7-70. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 11)**


Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Average	V	271	192	-75.65	5.26	36.61	53.98	-17.37
4924.00	Peak	V	271	192	-65.36	5.26	46.90	73.98	-27.08
7386.00	Average	H	263	146	-70.34	9.56	46.21	53.98	-7.77
7386.00	Peak	H	263	146	-59.33	9.56	57.23	73.98	-16.75
12310.00	Average	H	-	-	-82.04	15.60	40.56	53.98	-13.42
12310.00	Peak	H	-	-	-71.65	15.60	50.96	73.98	-23.02

**Table 7-27. Radiated Measurements CDD (RU26)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 71 of 112

V 10.6 10/27/2023

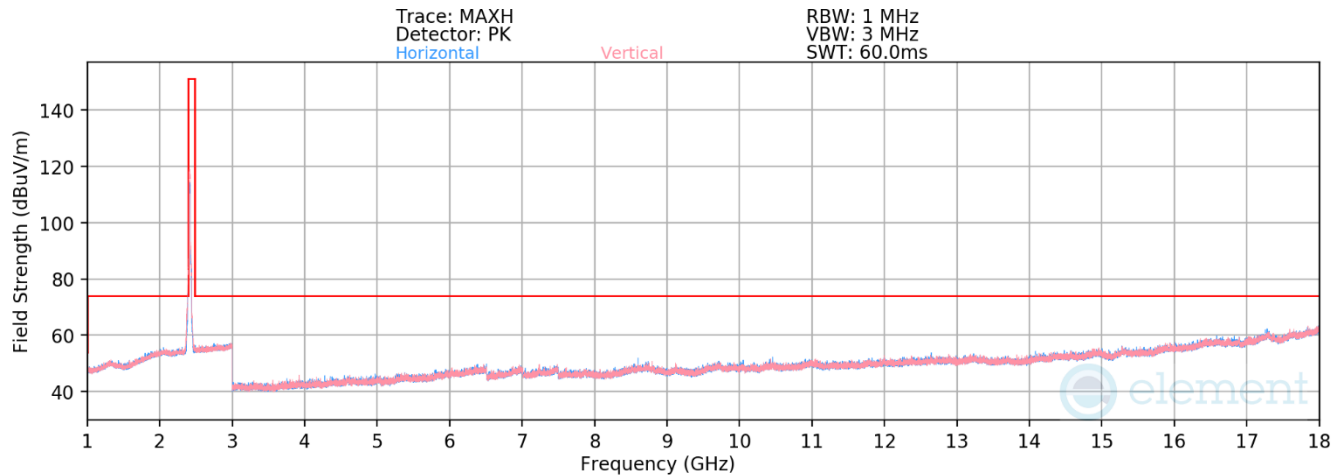

**Plot 7-71. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU242 – Ch. 1)**


Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4824.00	Average	V	-	-	-78.90	5.42	33.51	53.98	-20.47
4824.00	Peak	V	-	-	-67.02	5.20	45.18	73.98	-28.80
12060.00	Average	V	-	-	-80.96	14.68	40.72	53.98	-13.26
12060.00	Peak	V	-	-	-70.06	14.80	51.74	73.98	-22.24


**Table 7-28. Radiated Measurements CDD (RU242)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 72 of 112

V 10.6 10/27/2023

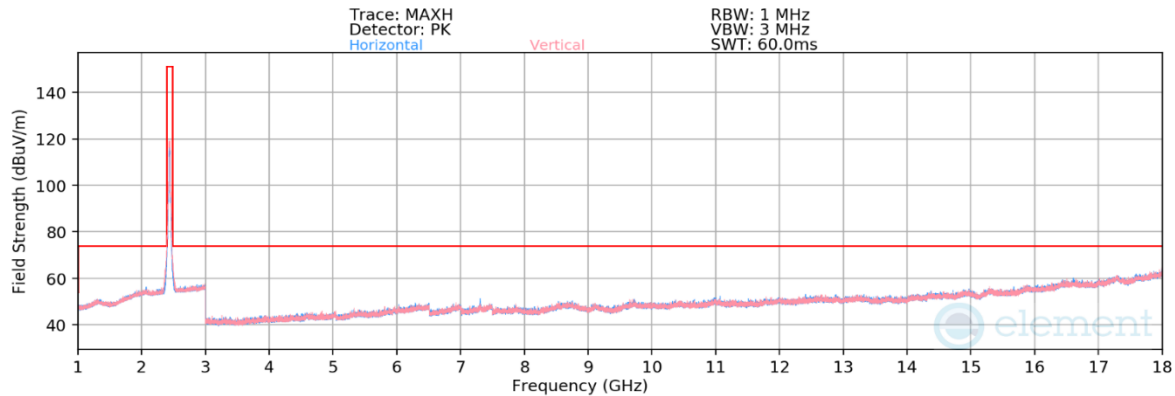

**Plot 7-72. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU242 – Ch. 6)**

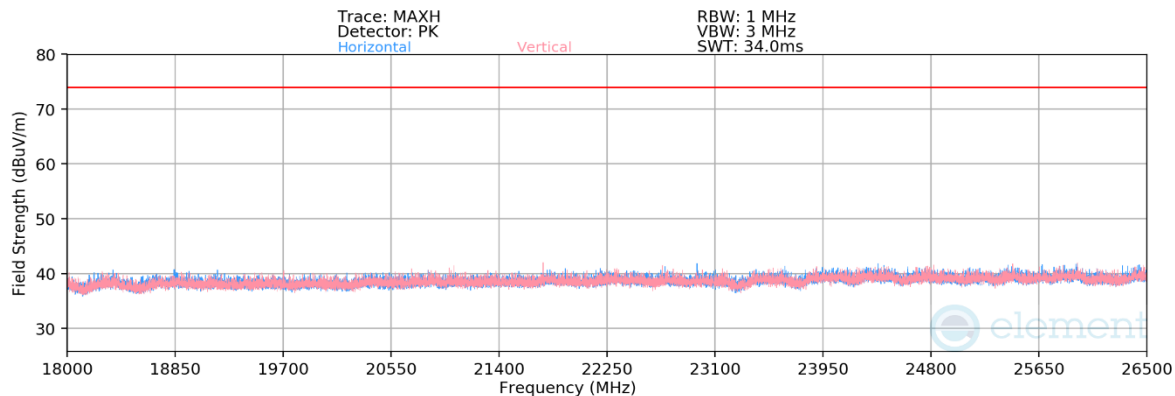


**Plot 7-73. Radiated Spurious Emissions above 18GHz CDD (802.11ax OFDMA – RU242 – Ch. 6)**

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4874.00	Average	V	-	-	-79.31	5.50	33.20	53.98	-20.78
4874.00	Peak	V	-	-	-67.45	5.32	44.87	73.98	-29.11
7311.00	Average	H	354	143	-76.71	9.82	40.11	53.98	-13.87
7311.00	Peak	H	354	143	-65.06	9.77	51.70	73.98	-22.28
12185.00	Average	V	-	-	-81.45	15.07	40.62	53.98	-13.36
12185.00	Peak	V	-	-	-70.84	15.02	51.18	73.98	-22.80

**Table 7-29. Radiated Measurements CDD (RU242)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 73 of 112

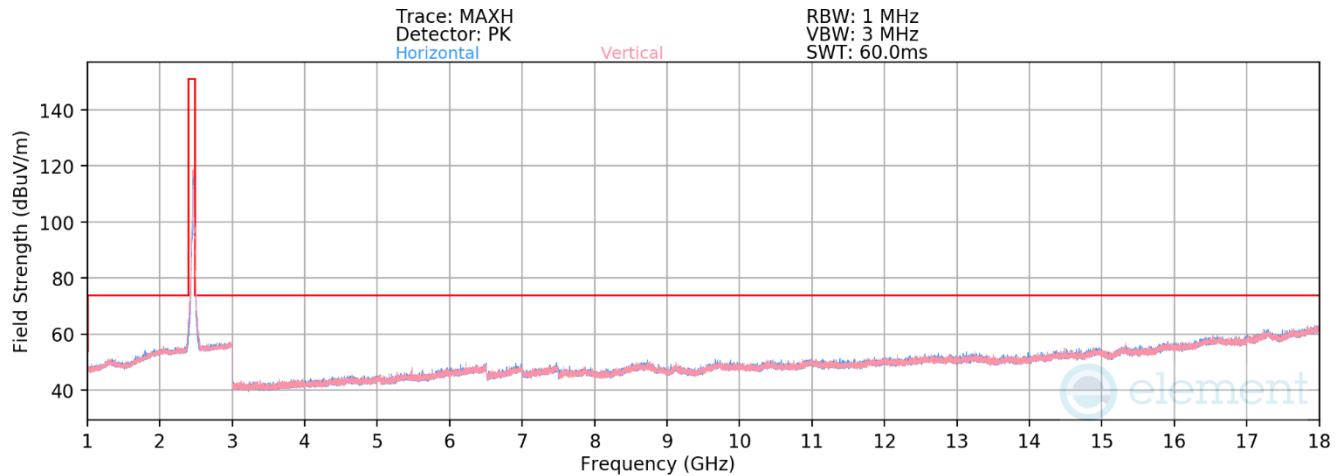

**Plot 7-74. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU242 – Ch. 11)**

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4924.00	Average	V	-	-	-79.39	5.62	33.23	53.98	-20.75
4924.00	Peak	V	-	-	-67.91	5.26	44.35	73.98	-29.63
7386.00	Average	H	101	131	-76.46	9.56	40.10	53.98	-13.88
7386.00	Peak	H	101	131	-64.60	9.56	51.96	73.98	-22.02
12310.00	Average	V	-	-	-81.82	15.23	40.41	53.98	-13.57
12310.00	Peak	V	-	-	-70.89	15.60	51.71	73.98	-22.27

**Table 7-30. Radiated Measurements CDD (RU242)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 74 of 112


V 10.6 10/27/2023

## 7.7.2 Antenna WF7b Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]


### RU26

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

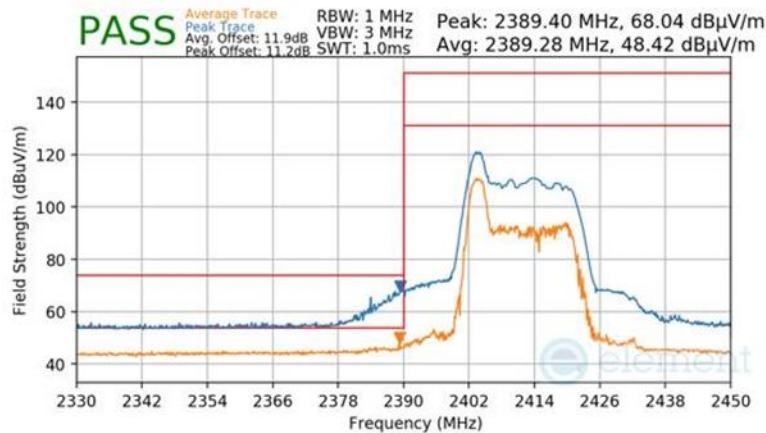

Plot 7-75 Radiated Restricted Lower Band Edge Measurement Antenna WF7b (Peak & Average – RU26)

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

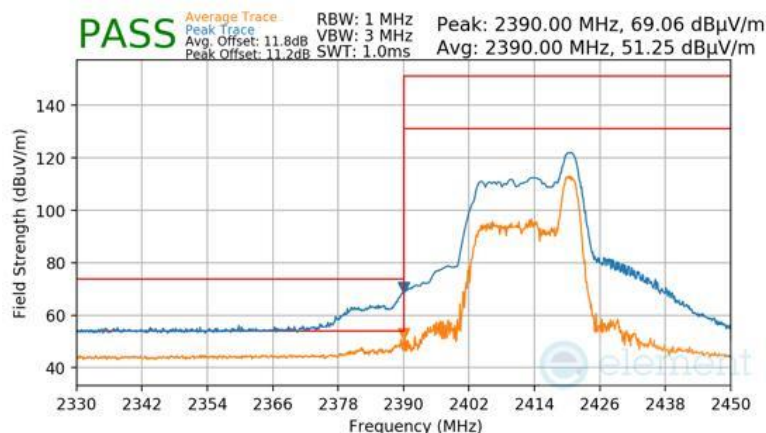


Plot 7-76 Radiated Restricted Lower Band Edge Measurement Antenna WF7b (Peak & Average – RU26)

FCC ID: BCGA3268 IC: 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 75 of 112


V 10.6 10/27/2023

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

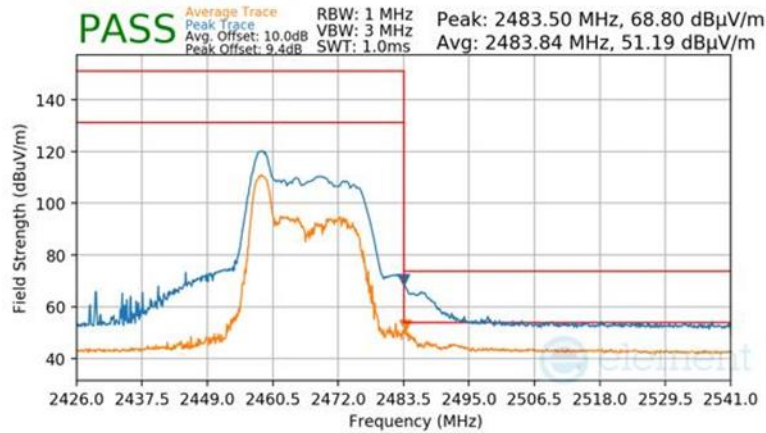

Plot 7-77 Radiated Restricted Upper Band Edge Measurement Antenna WF7b (Peak & Average – RU26)

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

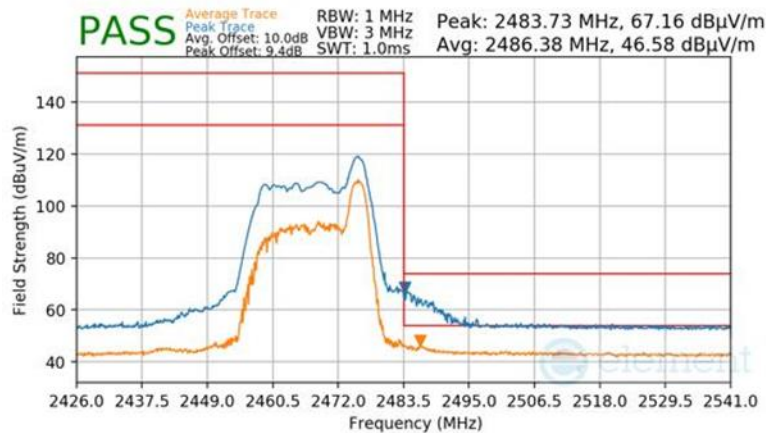


Plot 7-78 Radiated Restricted Upper Band Edge Measurement Antenna WF7b (Peak & Average – RU26)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 76 of 112


## RU242

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

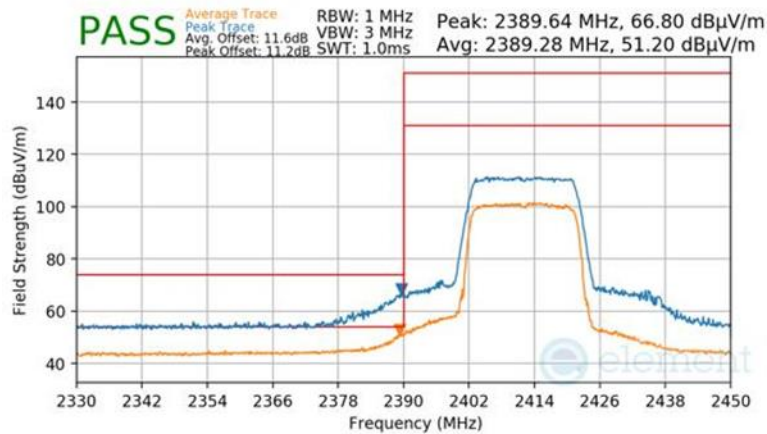

Plot 7-79 Radiated Restricted Lower Band Edge Measurement Antenna WF7b (Peak & Average – RU242)

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2417MHz  
 Channel: 2

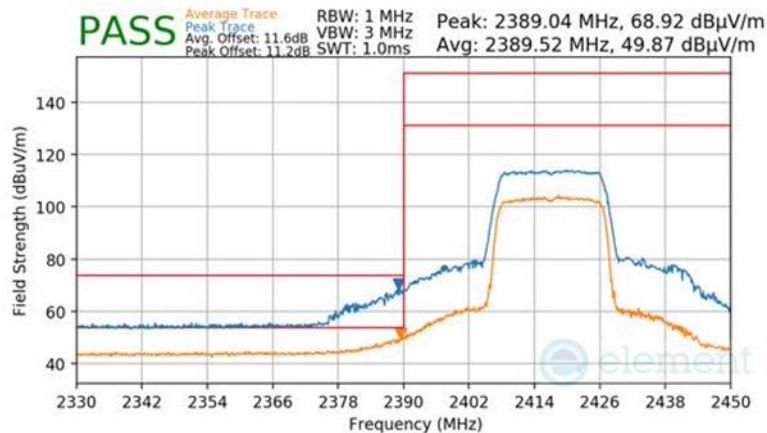


Plot 7-80 Radiated Restricted Lower Band Edge Measurement Antenna WF7b (Peak & Average – RU242)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 77 of 112

V 10.6 10/27/2023




Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

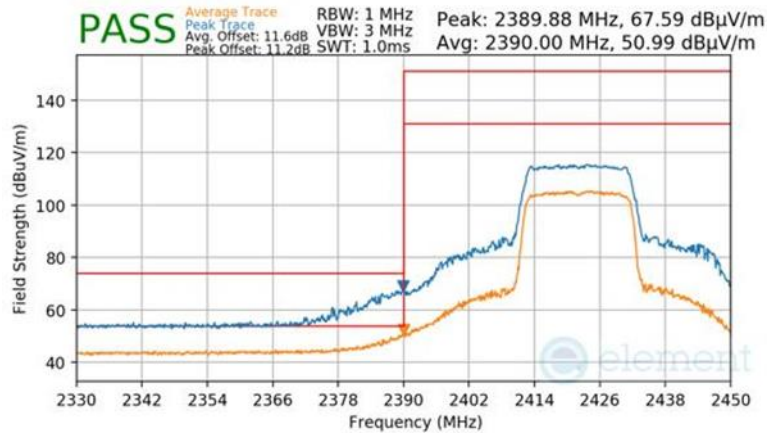

Plot 7-81 Radiated Restricted Lower Band Edge Measurement Antenna WF7b (Peak & Average – RU242)

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2427MHz  
 Channel: 4

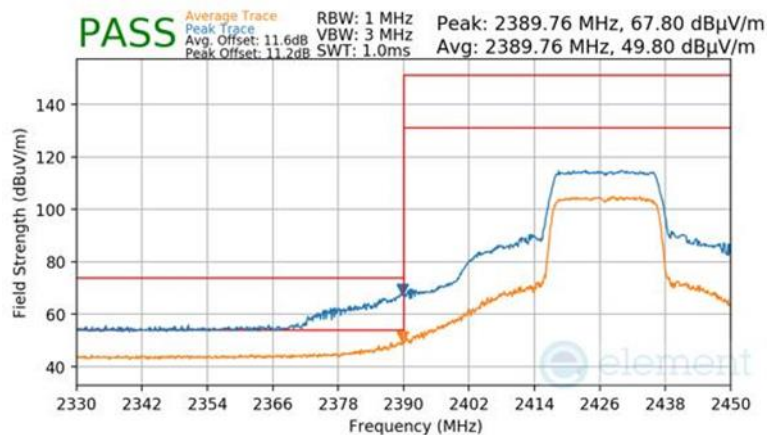


Plot 7-82 Radiated Restricted Lower Band Edge Measurement Antenna WF7b (Peak & Average – RU242)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 78 of 112




Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2432MHz  
 Channel: 5

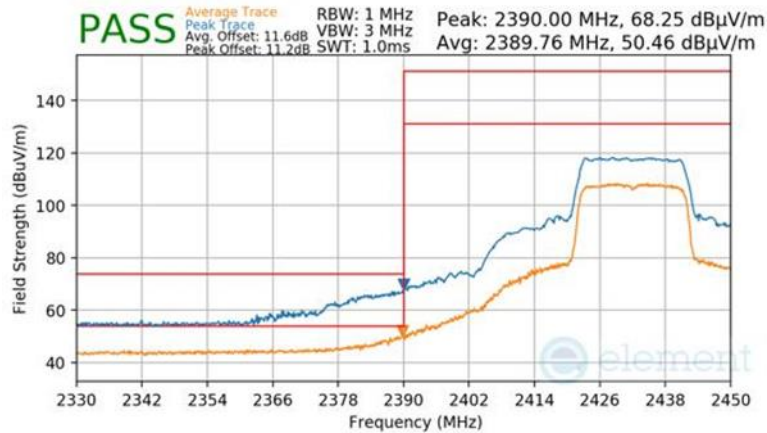

Plot 7-83 Radiated Restricted Lower Band Edge Measurement Antenna WF7b (Peak & Average – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6 Low

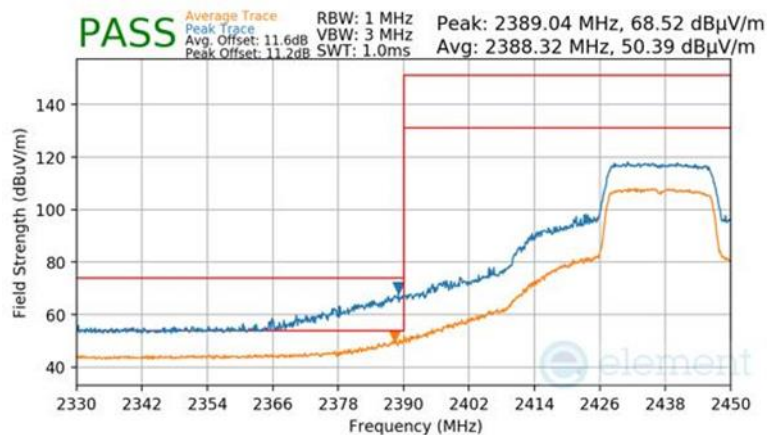

Plot 7-84 Radiated Restricted Lower Band Edge Measurement Antenna WF7b (Peak & Average – RU242)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 79 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6 High

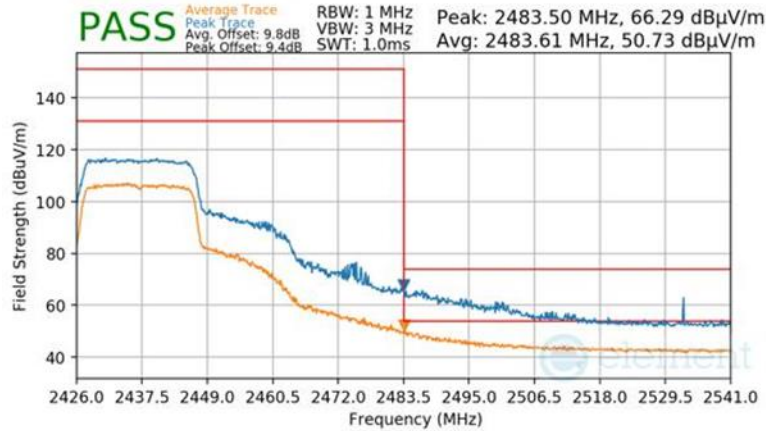

Plot 7-85 Radiated Restricted Upper Band Edge Measurement Antenna WF7b (Peak & Average – RU242)

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2442MHz  
 Channel: 7

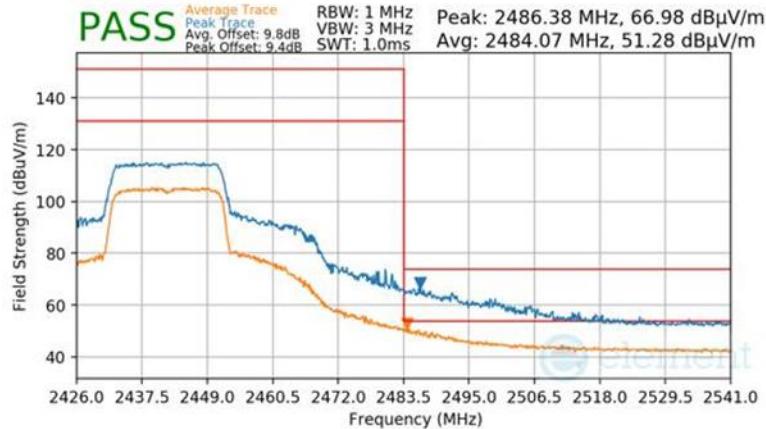


Plot 7-86 Radiated Restricted Upper Band Edge Measurement Antenna WF7b (Peak & Average – RU242)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 80 of 112


V 10.6 10/27/2023

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2447MHz  
 Channel: 8

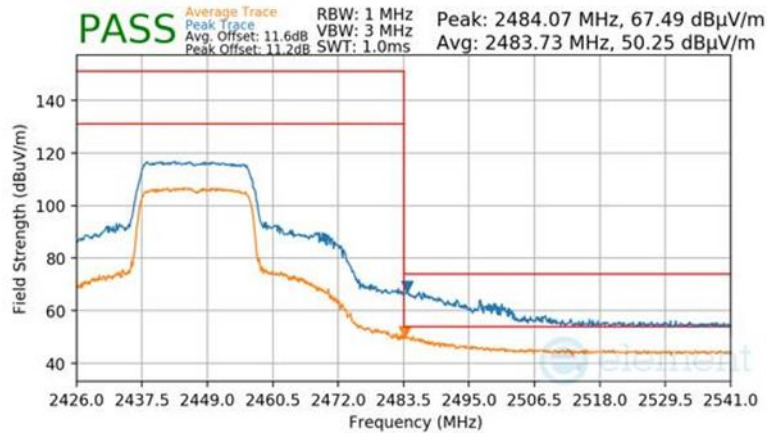

**Plot 7-87 Radiated Restricted Upper Band Edge Measurement Antenna WF7b (Peak & Average – RU242)**


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

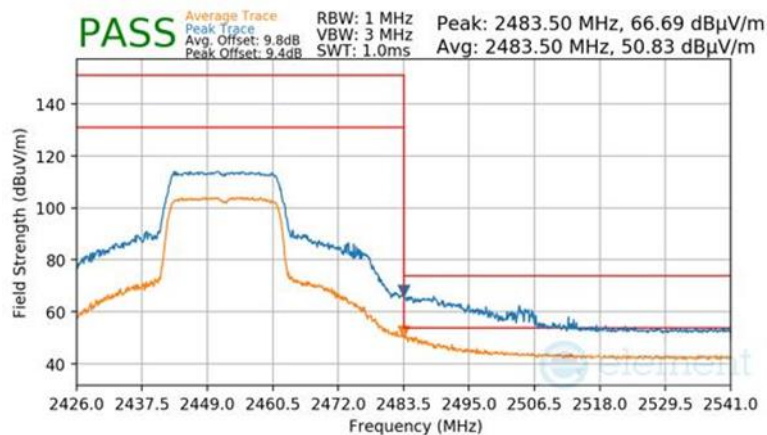

**Plot 7-88 Radiated Restricted Upper Band Edge Measurement Antenna WF7b (Peak & Average – RU242)**


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 81 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

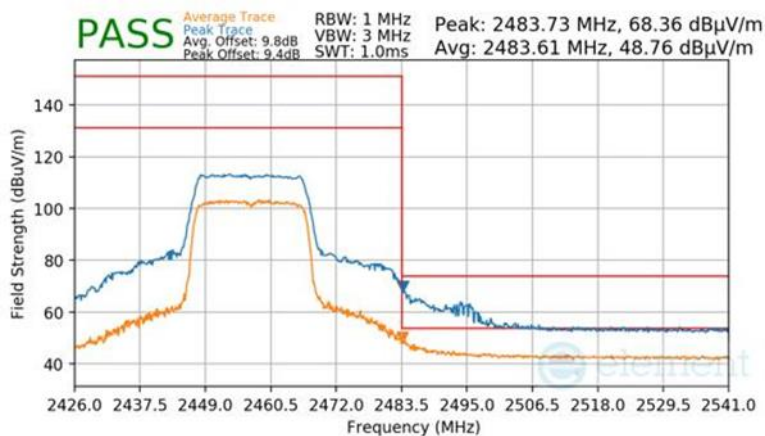

Plot 7-89 Radiated Restricted Upper Band Edge Measurement Antenna WF7b (Peak & Average – RU242)

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

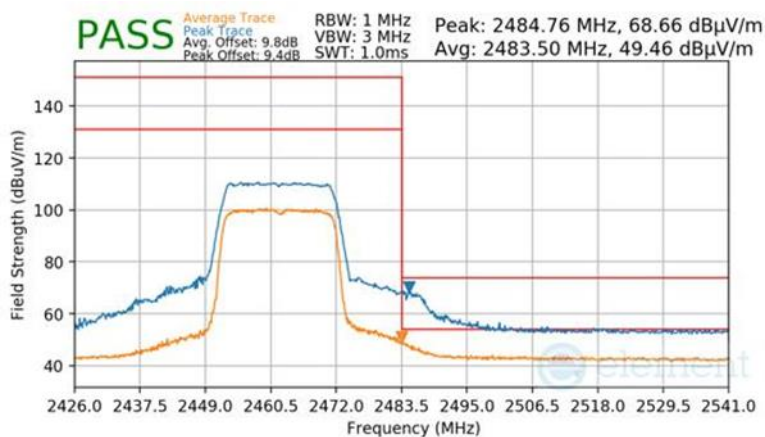


Plot 7-90 Radiated Restricted Upper Band Edge Measurement Antenna WF7b (Peak & Average – RU242)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 82 of 112

V 10.6 10/27/2023

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

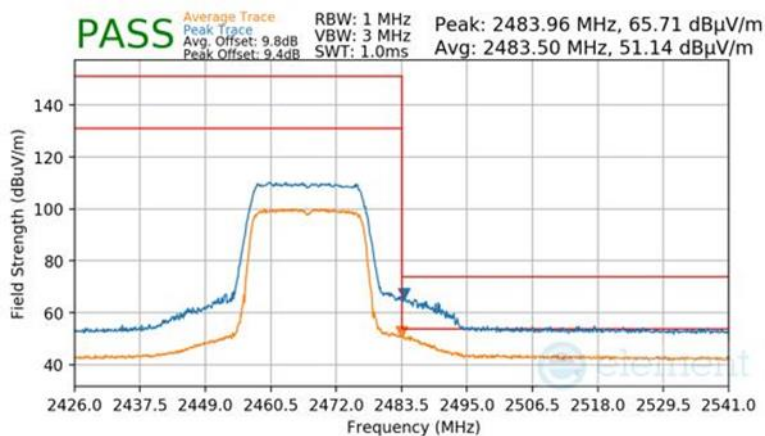

Plot 7-91 Radiated Restricted Upper Band Edge Measurement Antenna WF7b (Peak & Average – RU242)

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268	 <b>MEASUREMENT REPORT</b> <b>(CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-04-R1.BCG	<b>Test Dates:</b> 10/25/2024 - 1/4/2025	<b>EUT Type:</b> Tablet Device	Page 83 of 112


V 10.6 10/27/2023

### 7.7.3 Antenna WF2b Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]


#### RU26

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

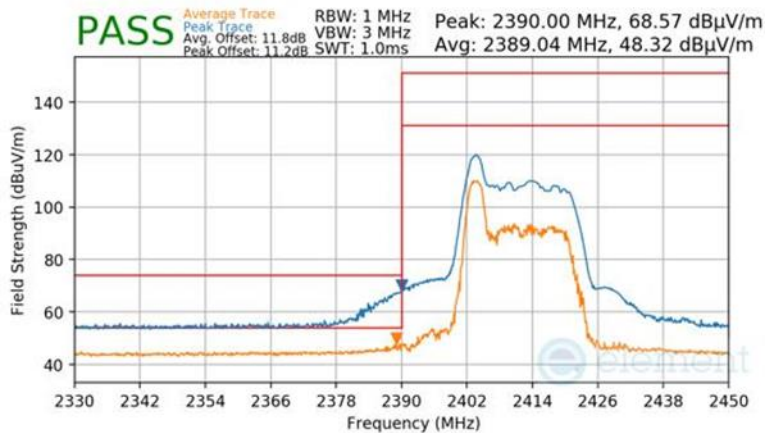

Plot 7-92 Radiated Restricted Lower Band Edge Measurement Antenna WF2b (Peak & Average – RU26)

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

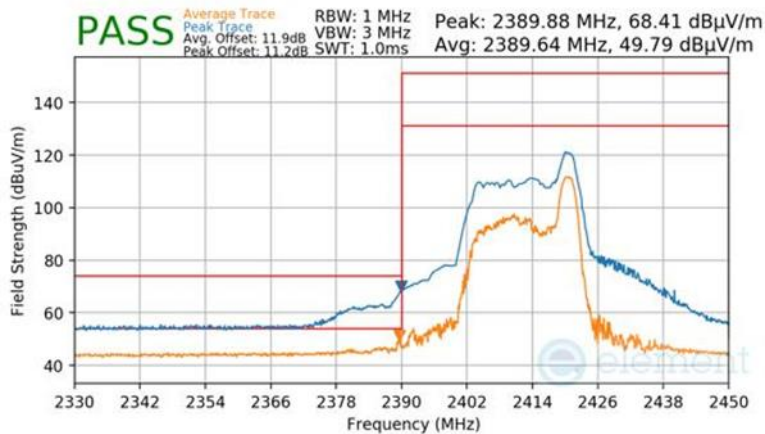


Plot 7-93 Radiated Restricted Lower Band Edge Measurement Antenna WF2b (Peak & Average – RU26)

FCC ID: BCGA3268 IC: 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 84 of 112

V 10.6 10/27/2023




Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

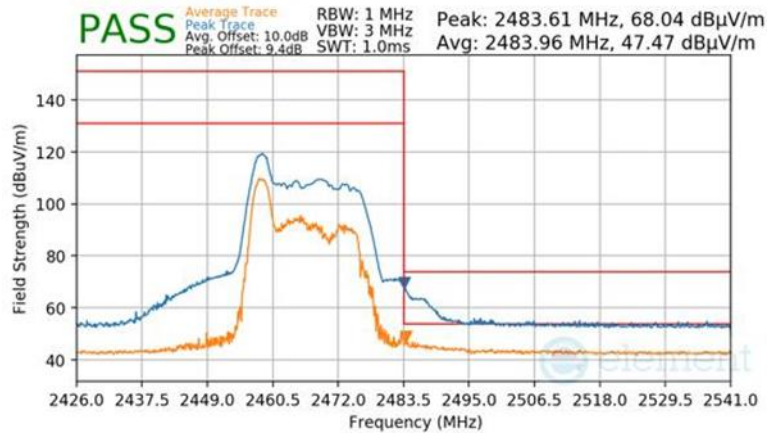

Plot 7-94 Radiated Restricted Upper Band Edge Measurement Antenna WF2b (Peak & Average – RU26)

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

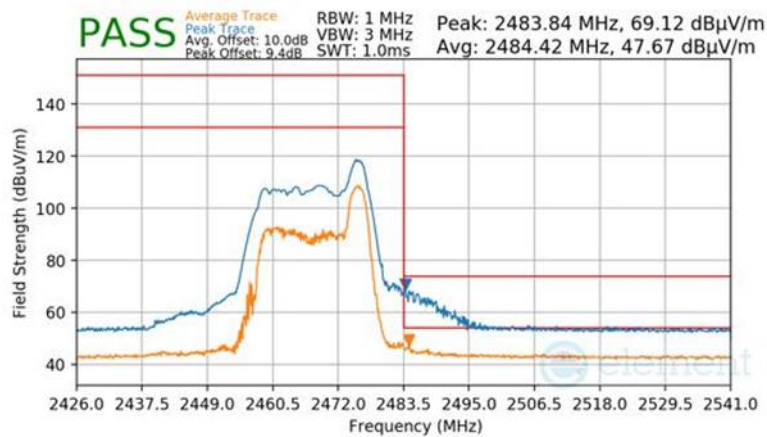


Plot 7-95 Radiated Restricted Upper Band Edge Measurement Antenna WF2b (Peak & Average – RU26)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 85 of 112


## RU242

Mode: 802.11ax OFDMA  
Transfer Rate: MCS9  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 2412MHz  
Channel: 1

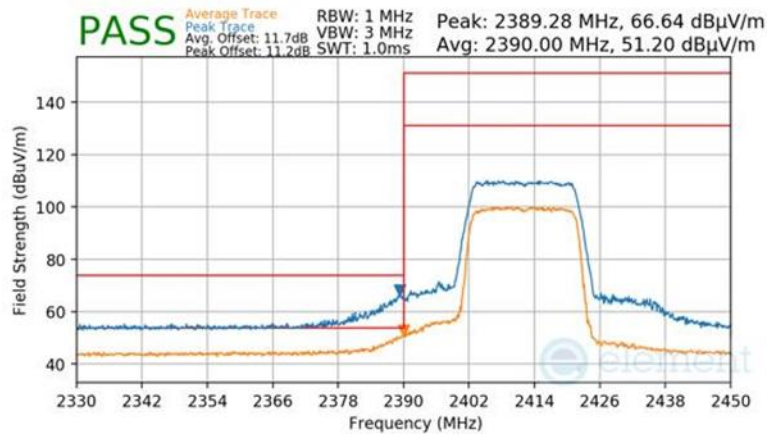

Plot 7-96 Radiated Restricted Lower Band Edge Measurement Antenna WF2b (Peak & Average – RU242)

Mode: 802.11ax OFDMA  
Transfer Rate: MCS9  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 2417MHz  
Channel: 2

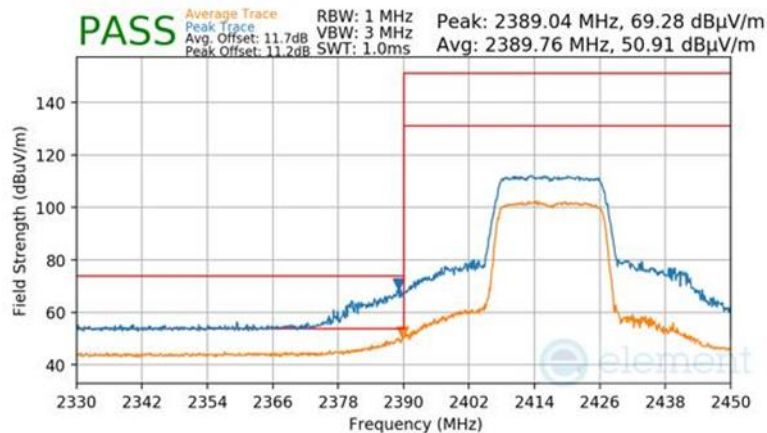


Plot 7-97 Radiated Restricted Lower Band Edge Measurement Antenna WF2b (Peak & Average – RU242)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 86 of 112

V 10.6 10/27/2023




Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

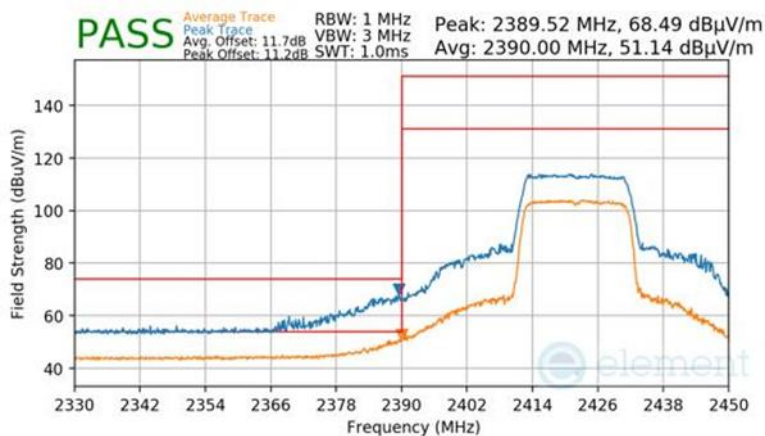

Plot 7-98 Radiated Restricted Lower Band Edge Measurement Antenna WF2b (Peak & Average – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2427MHz  
 Channel: 4

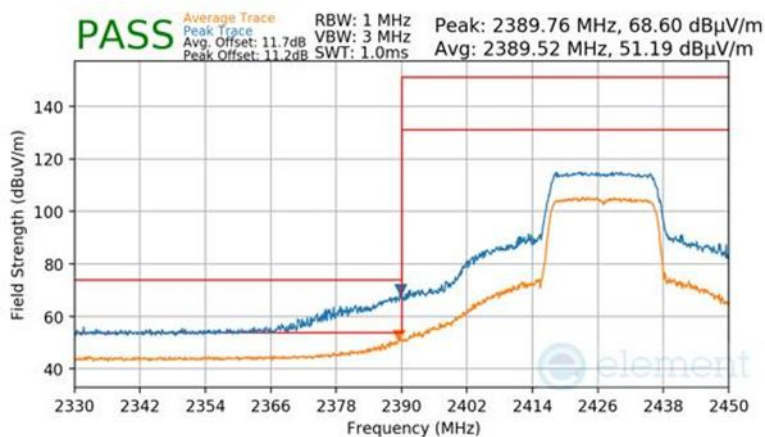

Plot 7-99 Radiated Restricted Lower Band Edge Measurement Antenna WF2b (Peak & Average – RU242)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 87 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2432MHz  
 Channel: 5

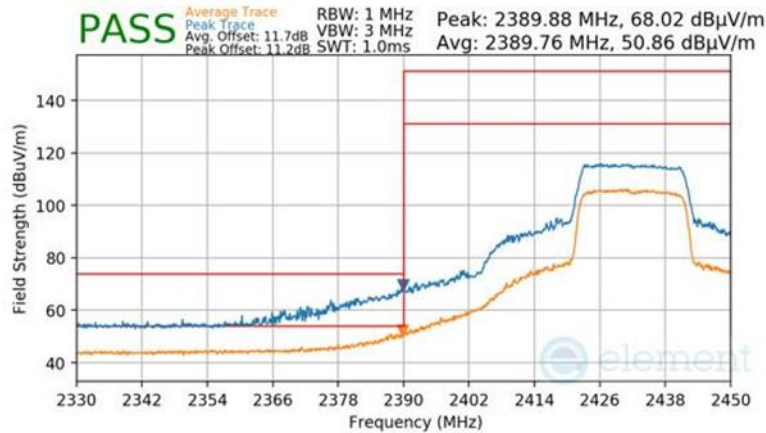

**Plot 7-100 Radiated Restricted Lower Band Edge Measurement Antenna WF2b (Peak & Average – RU242)**


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6 Low

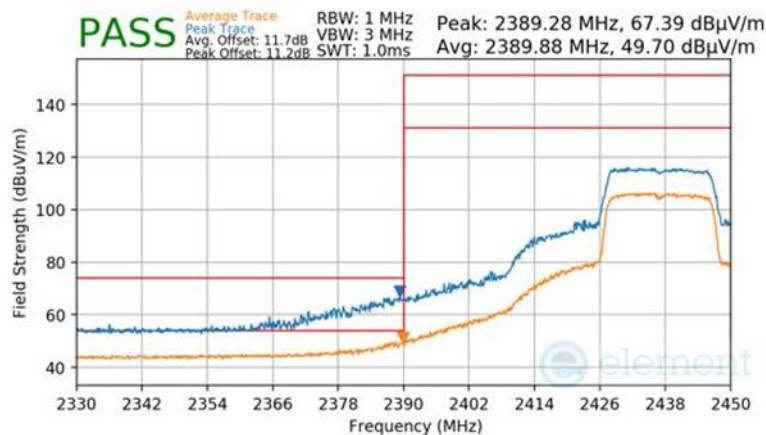

**Plot 7-101 Radiated Restricted Lower Band Edge Measurement Antenna WF2b (Peak & Average – RU242)**


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 88 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6 High

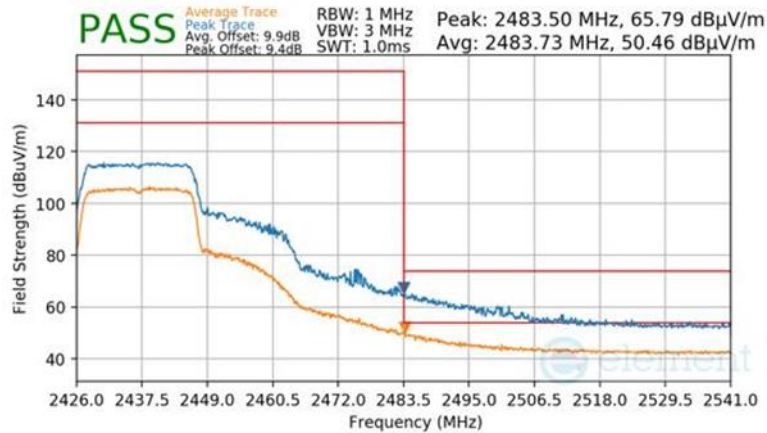

**Plot 7-102 Radiated Restricted Upper Band Edge Measurement Antenna WF2b (Peak & Average – RU242)**


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2442MHz  
 Channel: 7

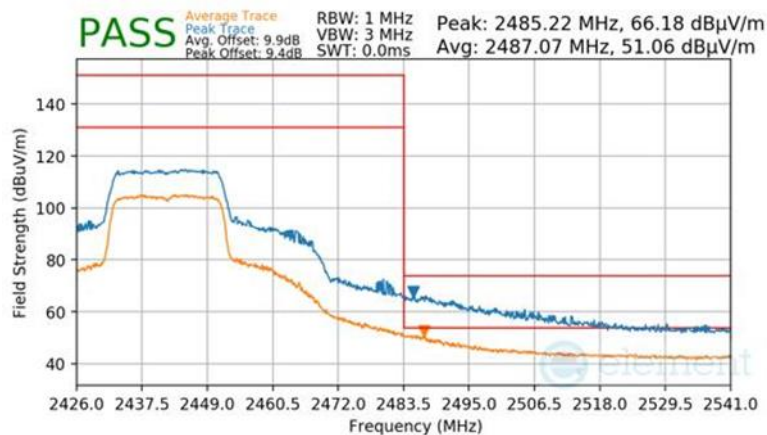

**Plot 7-103 Radiated Restricted Upper Band Edge Measurement Antenna WF2b (Peak & Average – RU242)**


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 89 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2447MHz  
 Channel: 8

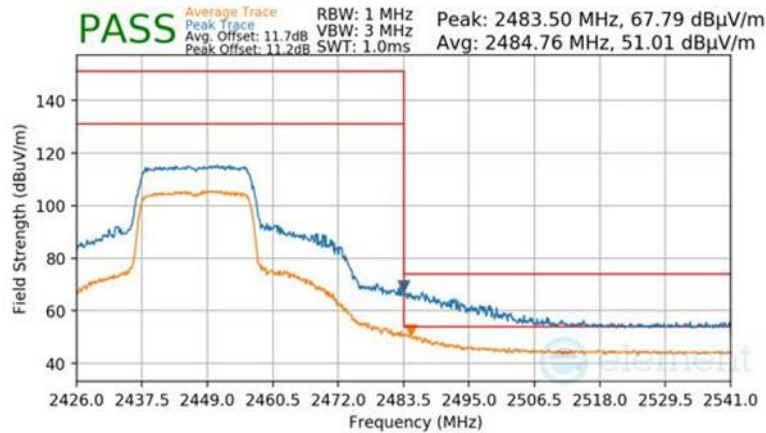

**Plot 7-104 Radiated Restricted Upper Band Edge Measurement Antenna WF2b (Peak & Average – RU242)**


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

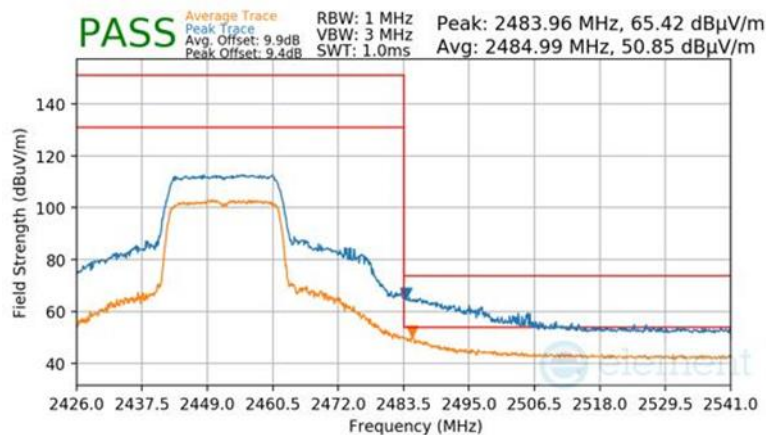

**Plot 7-105 Radiated Restricted Upper Band Edge Measurement Antenna WF2b (Peak & Average – RU242)**


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 90 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

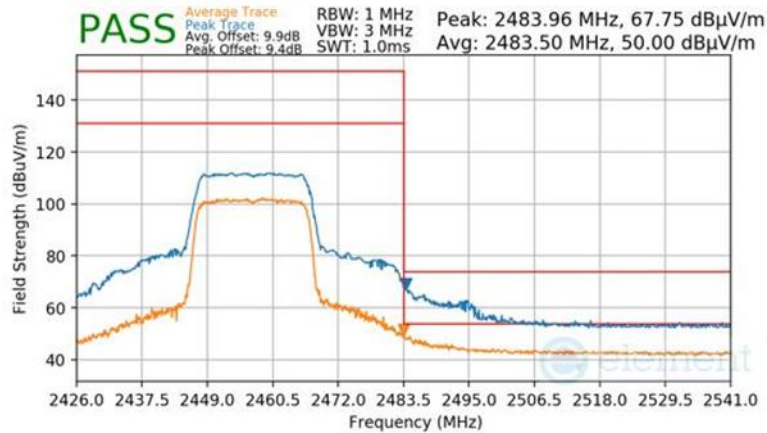

Plot 7-106 Radiated Restricted Upper Band Edge Measurement Antenna WF2b (Peak & Average – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

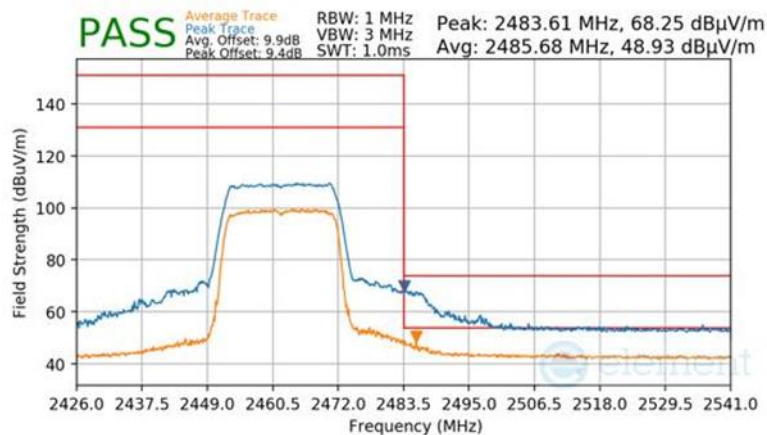

Plot 7-107 Radiated Restricted Upper Band Edge Measurement Antenna WF2b (Peak & Average – RU242)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 91 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

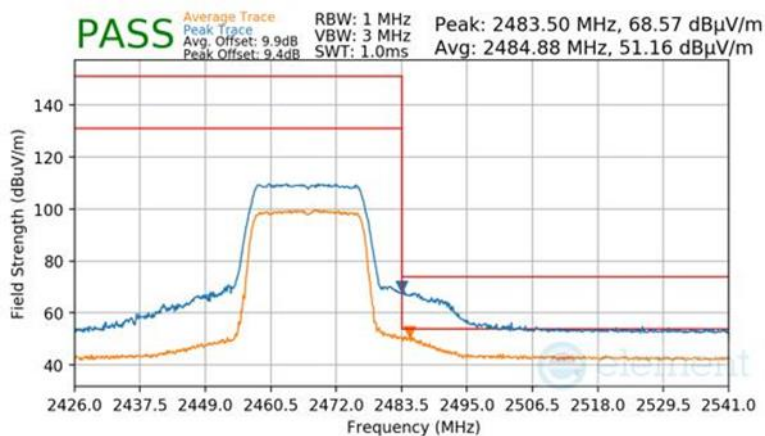

**Plot 7-108 Radiated Restricted Upper Band Edge Measurement Antenna WF2b (Peak & Average – RU242)**

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-04-R1.BCG	<b>Test Dates:</b> 10/25/2024 - 1/4/2025	<b>EUT Type:</b> Tablet Device	Page 92 of 112

V 10.6 10/27/2023




## 7.7.4 CDD Radiated Restricted Band Edge Measurements

**§15.205 §15.209; RSS-Gen [8.9]**


### RU26

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

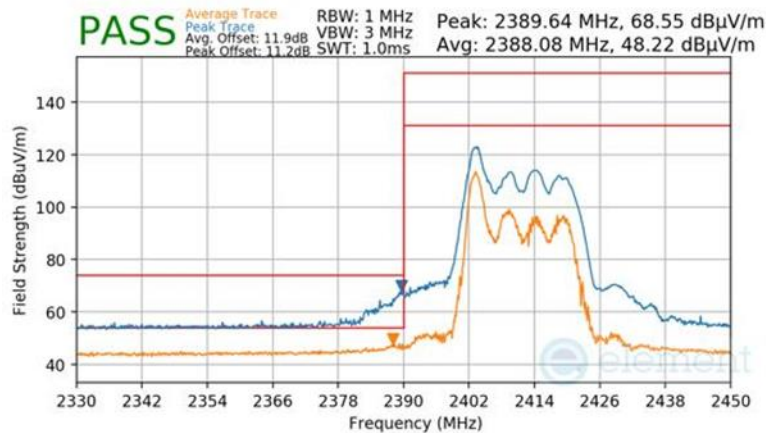

Plot 7-109 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU26)

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

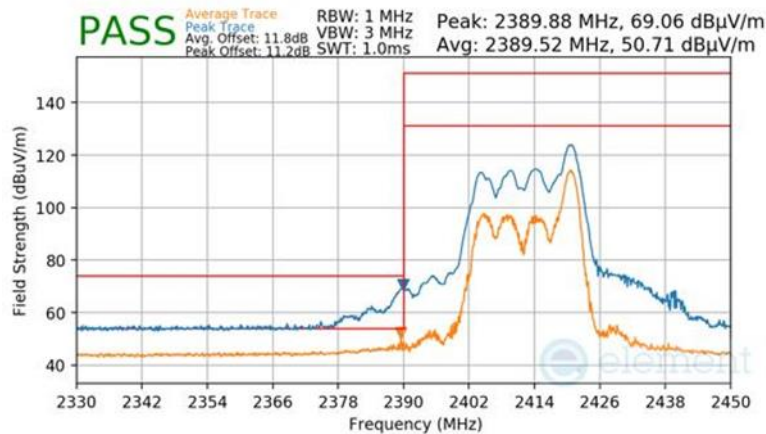


Plot 7-110 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU26)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 93 of 112


V 10.6 10/27/2023

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

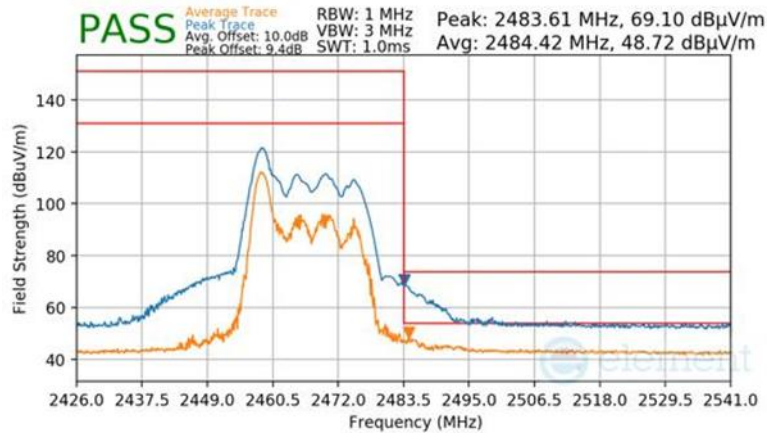

Plot 7-111 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

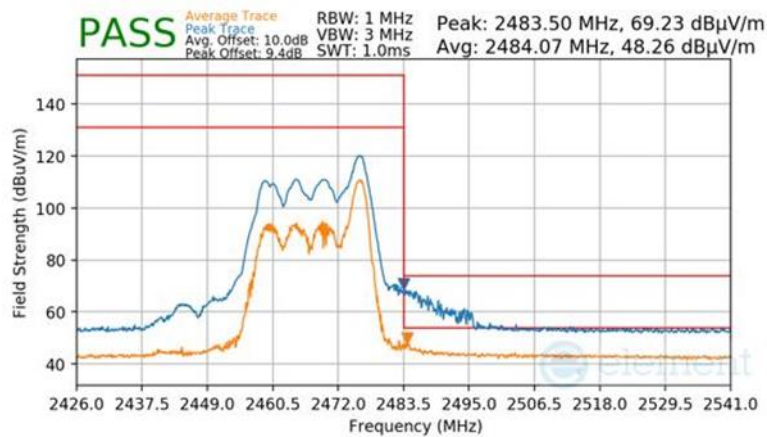


Plot 7-112 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 94 of 112




## RU242

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

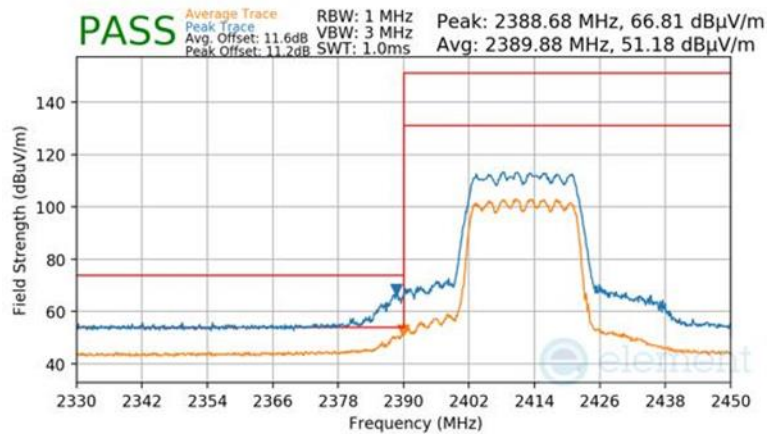

Plot 7-113 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2417MHz  
 Channel: 2

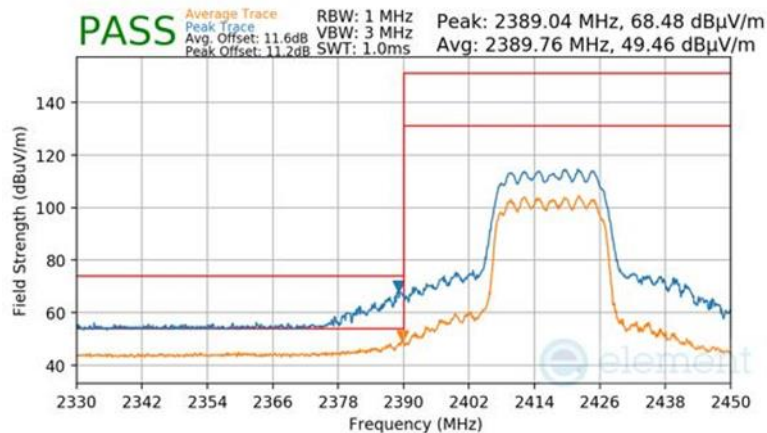

Plot 7-114 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 95 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

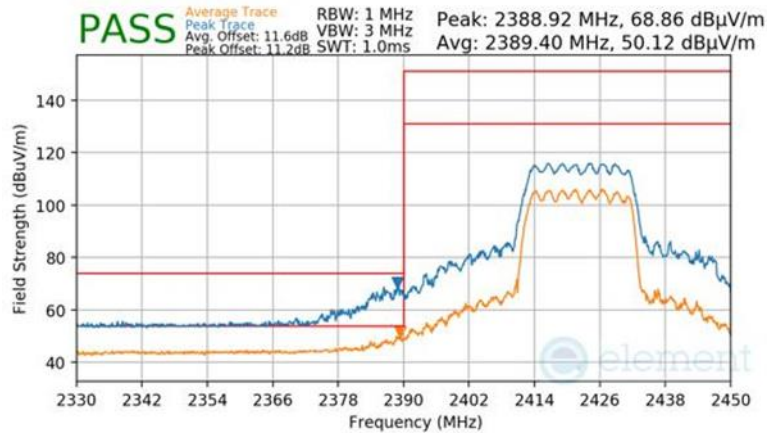

Plot 7-115 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2427MHz  
 Channel: 4

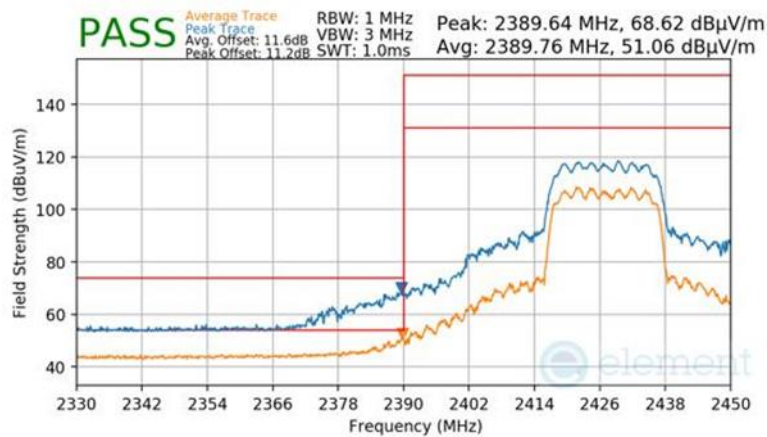

Plot 7-116 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 96 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2432MHz  
 Channel: 5

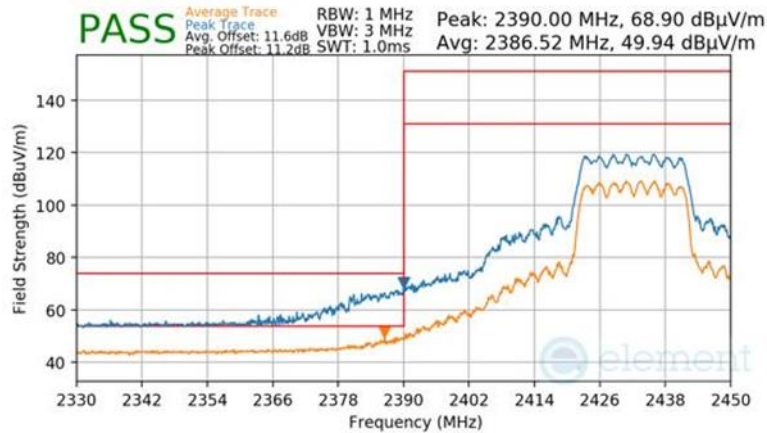

Plot 7-117 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6 Low

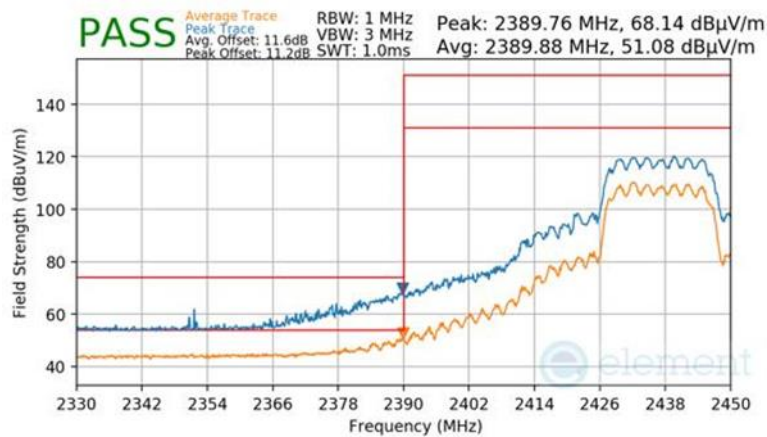

Plot 7-118 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 97 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2442MHz  
 Channel: 7

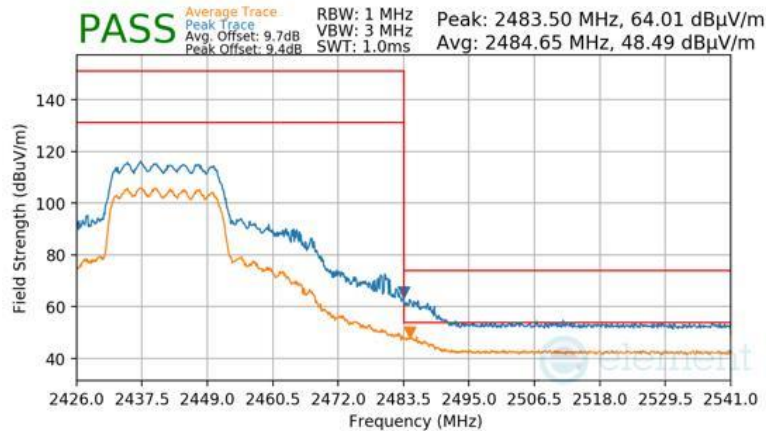

Plot 7-119 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2447MHz  
 Channel: 8

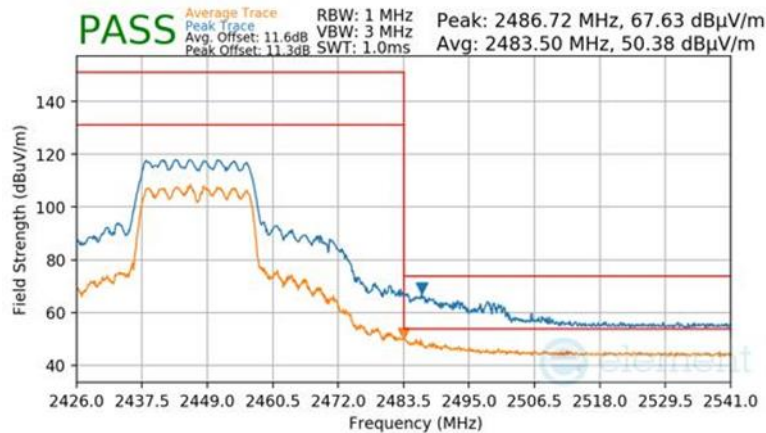

Plot 7-120 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 98 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

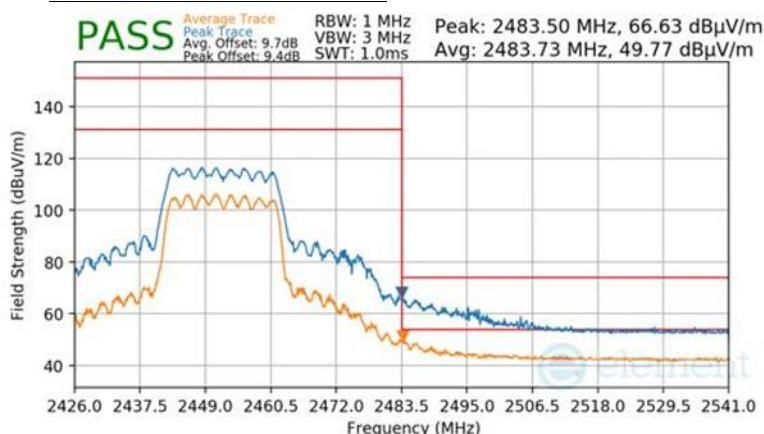

Plot 7-121 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

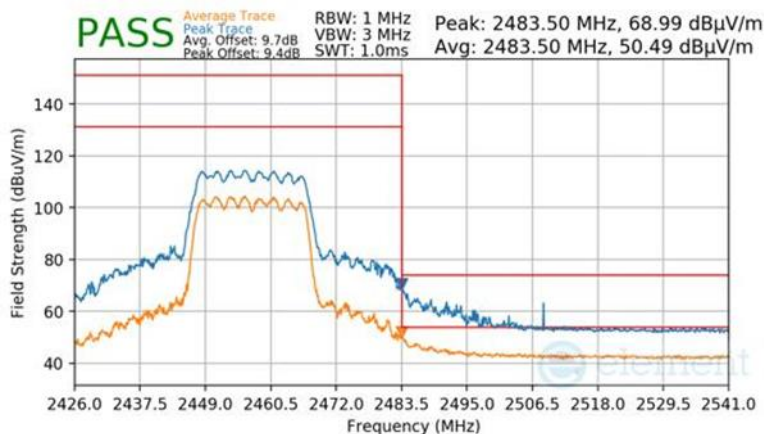

Plot 7-122 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 99 of 112

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

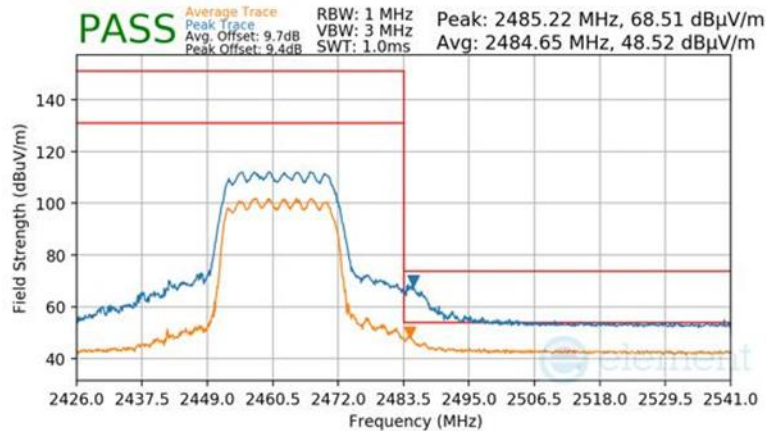

Plot 7-123 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

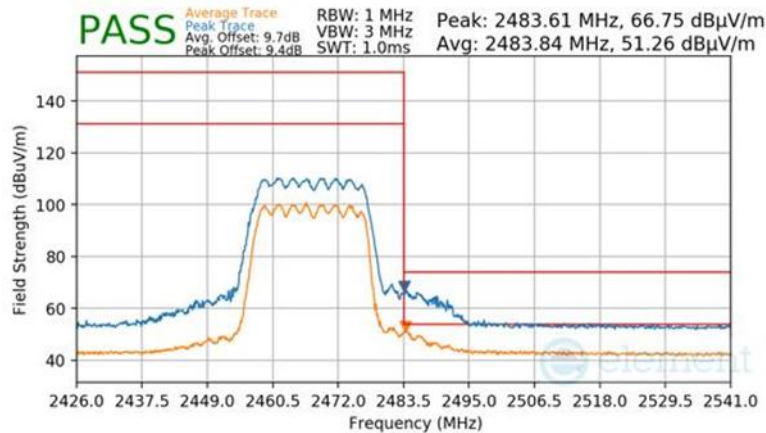

Plot 7-124 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 100 of 112

V 10.6 10/27/2023



## 7.8 Radiated Spurious Emissions – Below 1GHz

**§15.209; RSS-Gen [8.9]**

### **Test Overview and Limit**

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-31 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-31. Radiated Limits**

### **Test Procedures Used**

ANSI C63.10-2020

### **Test Settings**

#### **Quasi-Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### **Peak Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 101 of 112


V 10.6 10/27/2023

## Test Setup

The EUT and Measurement equipment were set up as shown in the diagrams below.

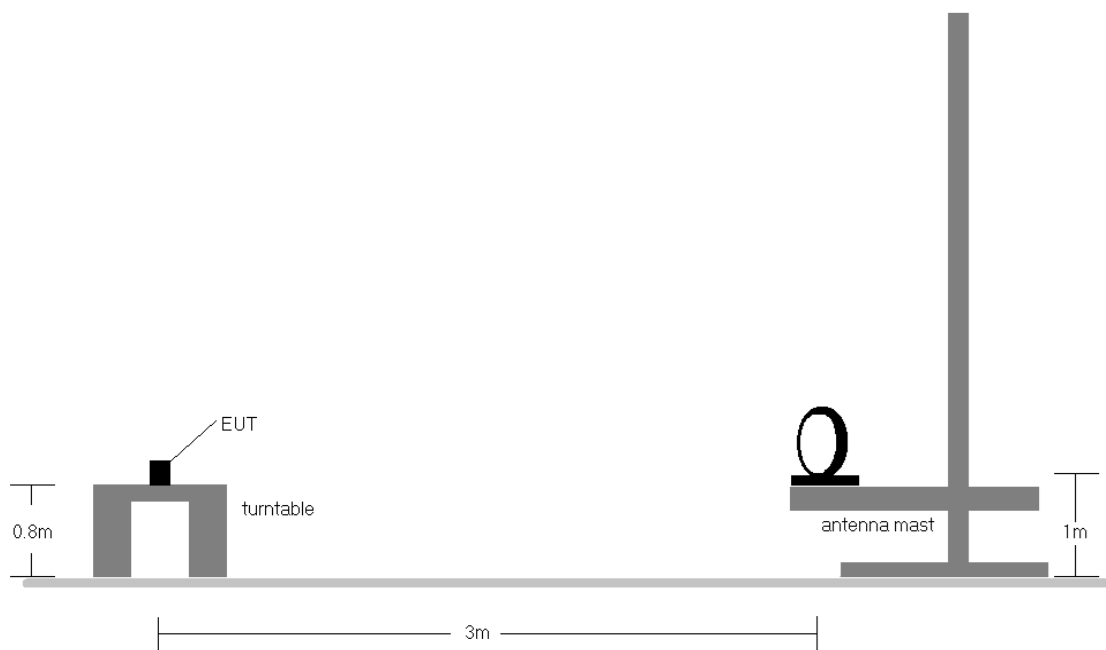

**Figure 7-7. Radiated Test Setup < 30MHz**

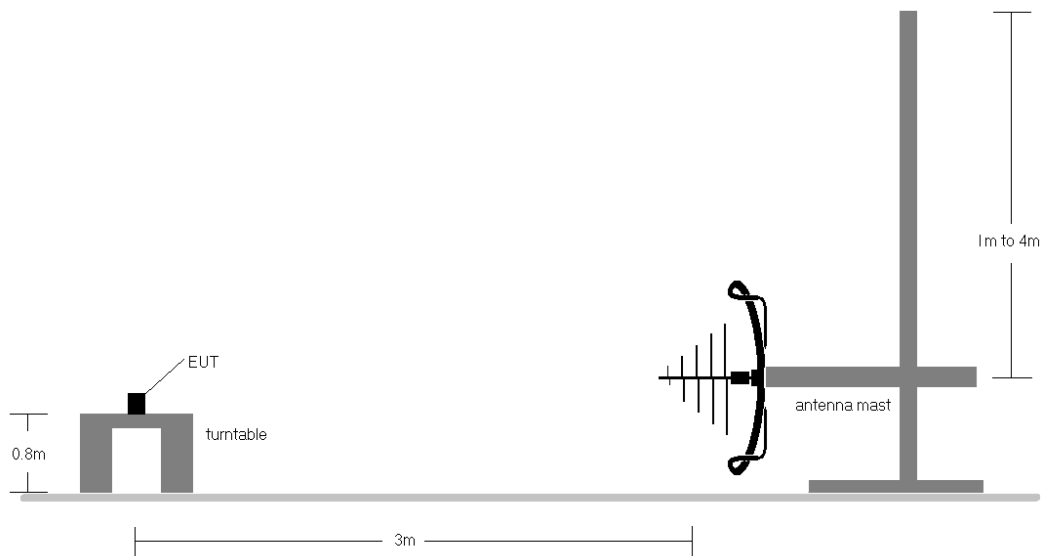

**Figure 7-8. Radiated Test Setup < 1GHz**

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268		<b>MEASUREMENT REPORT</b> <b>(CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-04-R1.BCG	<b>Test Dates:</b> 10/25/2024 - 1/4/2025	<b>EUT Type:</b> Tablet Device	Page 102 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-31.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final Measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the Measurement antenna was found to be less than 2:1.
9. All antenna configurations and data rates were investigated and only the worst case are reported.
10. For radiated Measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.
11. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger

## Sample Calculations

### Determining Spurious Emissions Levels


- Field Strength Level  $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 103 of 112

V 10.6 10/27/2023

## CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

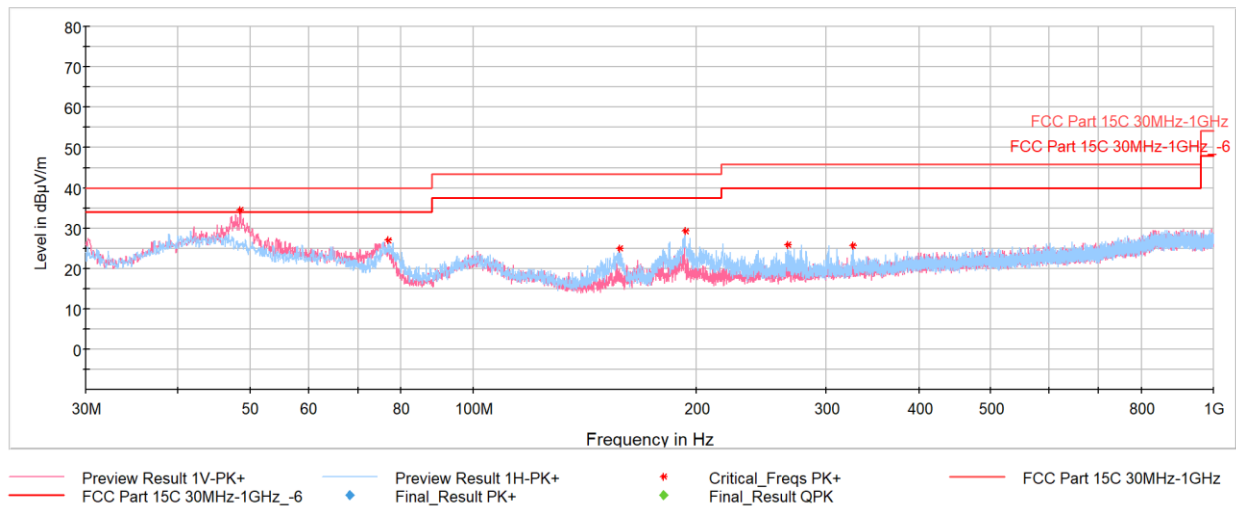

Plot 7-125. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
48.53	Quasi-Peak	V	100	25	-63.00	-14.35	29.65	40.00	-10.35
76.95	Max-Peak	H	300	261	-58.55	-21.35	27.10	40.00	-12.90
157.56	Max-Peak	H	200	136	-62.89	-19.07	25.04	43.52	-18.48
193.40	Max-Peak	H	100	188	-61.49	-16.12	29.39	43.52	-14.13
265.71	Max-Peak	H	100	268	-66.89	-14.15	25.96	46.02	-20.06
325.90	Max-Peak	H	100	256	-68.77	-12.48	25.75	46.02	-20.27

Table 7-32. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 104 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

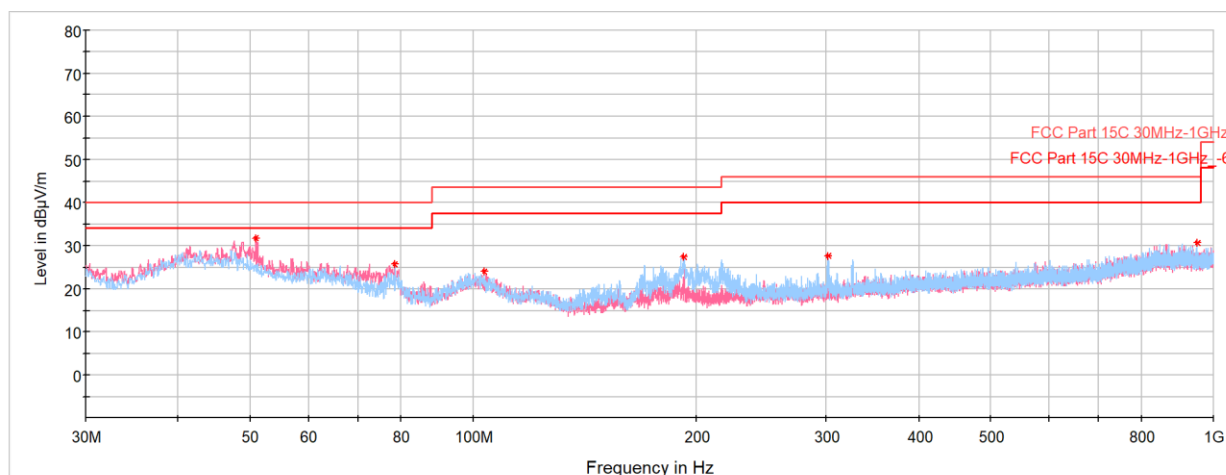

**Plot 7-126. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
50.90	Max-Peak	V	100	180	-61.10	-14.21	31.69	40.00	-8.31
78.40	Max-Peak	V	200	82	-59.68	-21.57	25.75	40.00	-14.25
103.58	Max-Peak	H	200	316	-66.67	-16.33	24.00	43.52	-19.52
192.57	Max-Peak	H	100	355	-63.36	-16.21	27.43	43.52	-16.09
301.75	Max-Peak	H	100	244	-66.10	-13.25	27.65	46.02	-18.37
951.11	Max-Peak	H	100	15	-74.58	-1.70	30.72	46.02	-15.30

**Table 7-33. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 105 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).**

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-34. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 106 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Test Setup

The EUT and Measurement equipment were set up as shown in the diagram below.

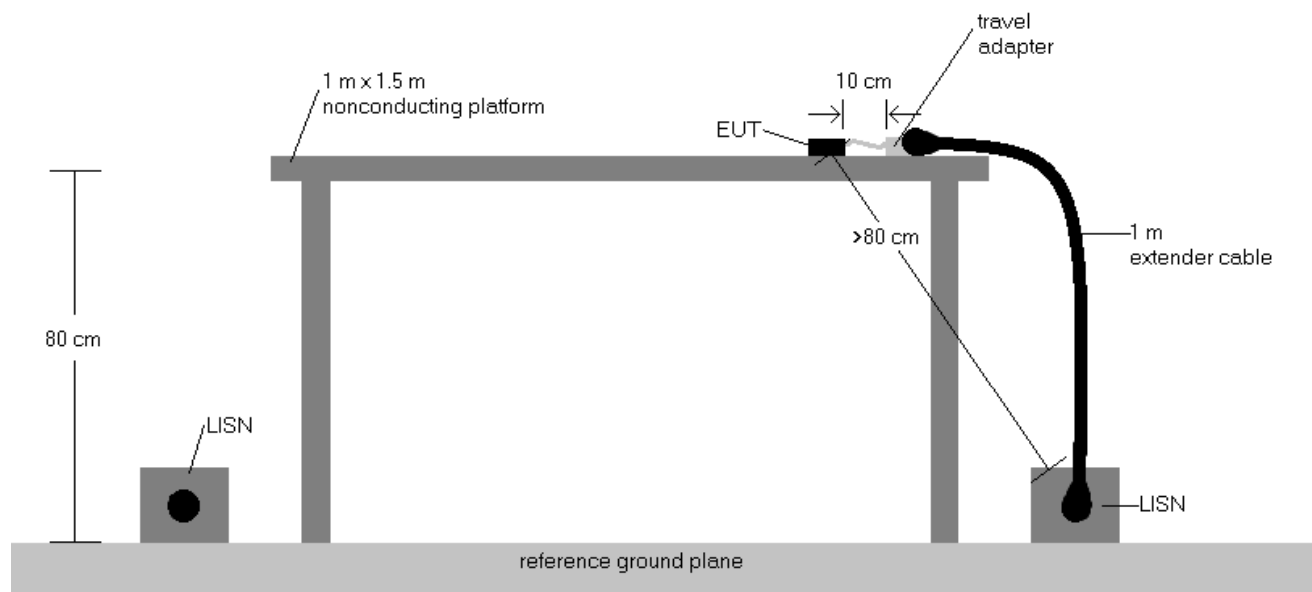


**Figure 7-9. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6.  $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.
9. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 107 of 112

V 10.6 10/27/2023

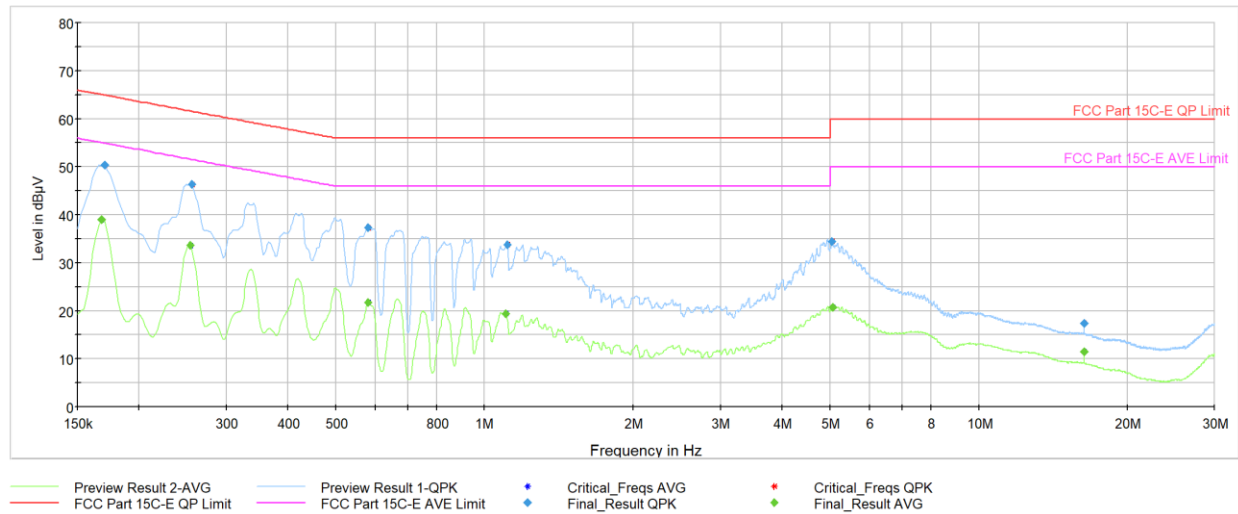

**Plot 7-127. AC Line Conducted Emissions with 802.11ax (RU26) Ch.6 (L1, with AC/DC Adapter)**


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	—	38.93	55.06	-16.13	L1	GND
0.170	FINAL	50.3	—	64.95	-14.61	L1	GND
0.254	FINAL	—	33.64	51.64	-18.00	L1	GND
0.256	FINAL	46.3	—	61.57	-15.22	L1	GND
0.582	FINAL	—	21.83	46.00	-24.17	L1	GND
0.582	FINAL	37.4	—	56.00	-18.60	L1	GND
1.104	FINAL	—	19.44	46.00	-26.56	L1	GND
1.113	FINAL	33.8	—	56.00	-22.25	L1	GND
5.039	FINAL	34.5	—	60.00	-25.55	L1	GND
5.053	FINAL	—	20.78	50.00	-29.22	L1	GND
16.323	FINAL	—	11.60	50.00	-38.40	L1	GND
16.323	FINAL	17.4	—	60.00	-42.63	L1	GND

**Table 7-35. AC Line Conducted Data with 802.11ax (RU26) Ch.6 (L1, with AC/DC Adapter)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 108 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

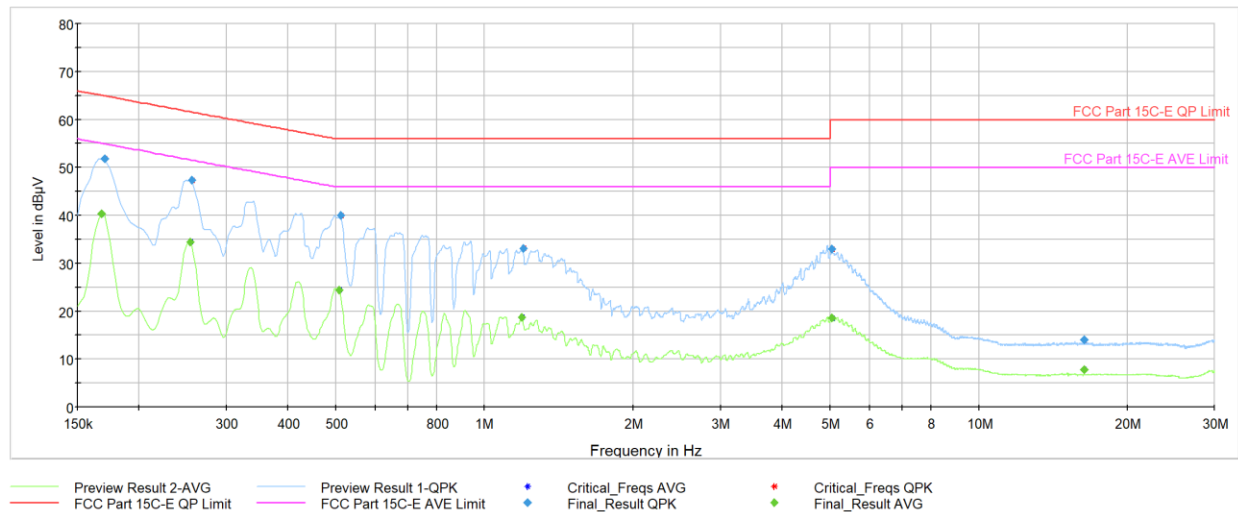

**Plot 7-128. AC Line Conducted Emissions with 802.11ax (RU26) Ch.6 (N, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	—	40.38	55.06	-14.68	N	GND
0.170	FINAL	51.9	—	64.95	-13.10	N	GND
0.254	FINAL	—	34.52	51.64	-17.12	N	GND
0.256	FINAL	47.4	—	61.57	-14.17	N	GND
0.508	FINAL	—	24.49	46.00	-21.51	N	GND
0.512	FINAL	39.9	—	56.00	-16.06	N	GND
1.192	FINAL	—	18.78	46.00	-27.22	N	GND
1.199	FINAL	33.1	—	56.00	-22.86	N	GND
5.037	FINAL	33.0	—	60.00	-27.05	N	GND
5.046	FINAL	—	18.59	50.00	-31.41	N	GND
16.330	FINAL	—	7.89	50.00	-42.11	N	GND
16.332	FINAL	14.1	—	60.00	-45.95	N	GND


**Table 7-36. AC Line Conducted Data with 802.11ax (RU26) Ch.6 (N, with AC/DC Adapter)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 109 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



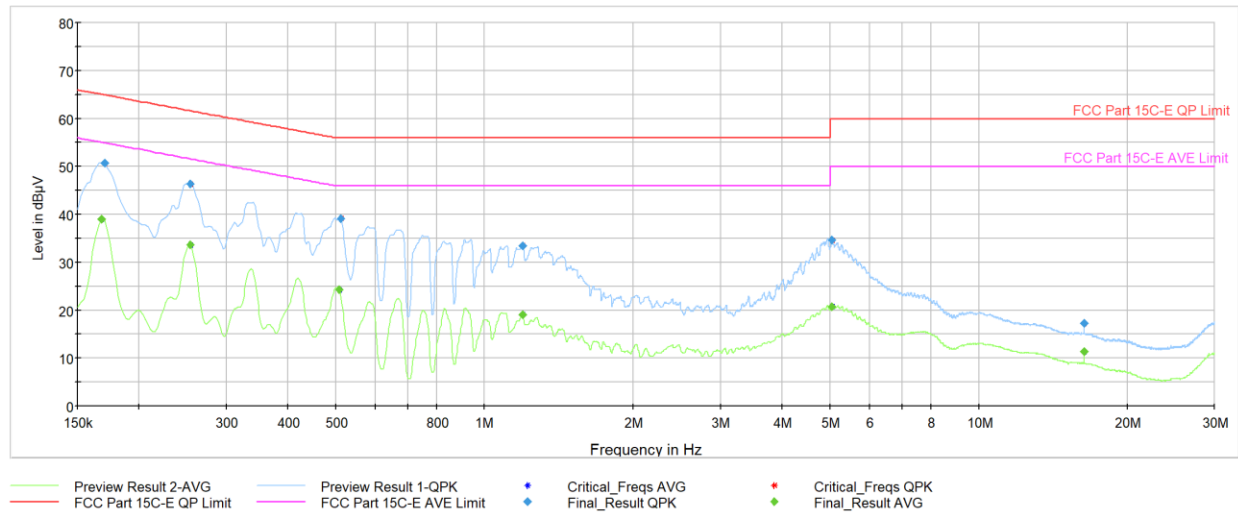

**Plot 7-129. AC Line Conducted Emissions with 802.11ax (RU242) Ch.6 (L1, with AC/DC Adapter)**


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	—	39.01	55.06	-16.05	L1	GND
0.170	FINAL	50.7	—	64.95	-14.23	L1	GND
0.254	FINAL	—	33.71	51.64	-17.94	L1	GND
0.254	FINAL	46.4	—	61.64	-15.23	L1	GND
0.508	FINAL	—	24.20	46.00	-21.80	L1	GND
0.512	FINAL	39.2	—	56.00	-16.85	L1	GND
1.194	FINAL	—	19.01	46.00	-26.99	L1	GND
1.196	FINAL	33.5	—	56.00	-22.54	L1	GND
5.035	FINAL	34.6	—	60.00	-25.44	L1	GND
5.046	FINAL	—	20.82	50.00	-29.18	L1	GND
16.330	FINAL	—	11.43	50.00	-38.57	L1	GND
16.330	FINAL	17.2	—	60.00	-42.79	L1	GND

**Table 7-37. AC Line Conducted Data with 802.11ax (RU242) Ch.6 (L1, with AC/DC Adapter)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 110 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

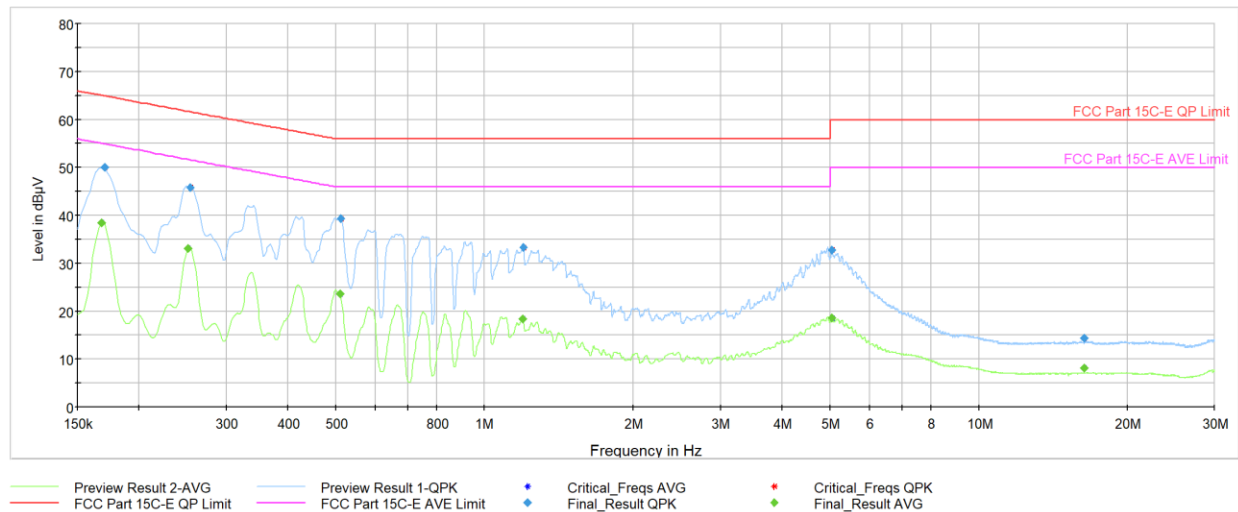

**Plot 7-130. AC Line Conducted Emissions with 802.11ax (RU242) Ch.6 (N, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	—	38.46	55.06	-16.60	N	GND
0.170	FINAL	50.0	—	64.95	-14.97	N	GND
0.251	FINAL	—	33.06	51.72	-18.66	N	GND
0.254	FINAL	45.9	—	61.64	-15.75	N	GND
0.510	FINAL	—	23.59	46.00	-22.41	N	GND
0.512	FINAL	39.4	—	56.00	-16.60	N	GND
1.196	FINAL	—	18.43	46.00	-27.57	N	GND
1.199	FINAL	33.3	—	56.00	-22.74	N	GND
5.042	FINAL	—	18.53	50.00	-31.47	N	GND
5.048	FINAL	32.8	—	60.00	-27.19	N	GND
16.332	FINAL	—	8.17	50.00	-41.83	N	GND
16.332	FINAL	14.5	—	60.00	-45.54	N	GND

**Table 7-38. AC Line Conducted Data with 802.11ax (RU242) Ch.6 (N, with AC/DC Adapter)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-04-R1.BCG	Test Dates: 10/25/2024 - 1/4/2025	EUT Type: Tablet Device	Page 111 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3268, IC: 579C-A3268** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-04-R1.BCG	<b>Test Dates:</b> 10/25/2024 - 1/4/2025	<b>EUT Type:</b> Tablet Device	Page 112 of 112

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).