

United States

Element Materials Technology

(formerly PCTEST) 18855 Adams Court, Morgan Hill, CA 95037 USA Tel. 408.538.5600 http://www.element.com



PART 24 MEASUREMENT REPORT

Applicant Name: Date of Testing:

7/1/2024 - 12/28/2024 Apple Inc.

One Apple Park Way **Test Report Issue Date:** Cupertino, CA 95014

1/20/2025

Test Site/Location:

Element Materials Technology Morgan Hill, CA, USA

Test Report Serial No.: 1C2410210077-08-R1.BCG

FCC ID: **BCGA3355**

Applicant Name: Apple Inc.

Application Type: Certification Model: A3355, A3356 **EUT Type: Tablet Device**

FCC Classification: PCS Licensed Transmitter (PCB)

FCC Rule Part:

Test Procedure(s): ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01

v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2410210077-08-R1.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RI Ortanez

Executive Vice President





FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 1 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	rage 1 01 220
			\/2 2 00/07/2022



TABLE OF CONTENTS

1.0	INTF	RODUCTION	5
	1.1	Scope	5
	1.2	Element Materials Technology Test Location	5
	1.3	Test Facility / Accreditations	5
2.0	PRO	DUCT INFORMATION	6
	2.1	Equipment Description	6
	2.2	Device Capabilities	6
	2.3	Antenna Description	7
	2.4	Test Support Equipment	7
	2.5	Test Configuration	7
	2.6	Software and Firmware	7
	2.7	EMI Suppression Device(s)/Modifications	7
3.0	DES	CRIPTION OF TESTS	8
	3.1	Evaluation Procedure	8
	3.2	Radiated Spurious Emissions	8
4.0	MEA	SUREMENT UNCERTAINTY	9
5.0	TES	T EQUIPMENT CALIBRATION DATA	10
6.0	SAM	IPLE CALCULATIONS	11
7.0	TES	T RESULTS	12
	7.1	Summary	12
	7.2	Occupied Bandwidth	14
	7.3	Spurious and Harmonic Emissions at Antenna Terminal	49
	7.4	Band Edge Emissions at Antenna Terminal	66
	7.5	Peak-Average Ratio	118
	7.6	Radiated Power (EIRP)	175
	7.7	Radiated Spurious Emissions	197
	7.8	Frequency Stability / Temperature Variation	215
8.0	CON	ICLUSION	220

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 2 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 2 01 220





PART 24 MEASUREMENT REPORT



		Ty Francisco			DAD -4.0.40/	EIRP		Fi.a.i.a.i
Mode	Bandwidth	Modulation	Modulation Tx Frequency Range [MHz] OBW [MHz]	OBW [MHz]	PAR at 0.1% [dB]	Max. Power Max. Power		Emission
						[W]	[dBm]	Designator
WCDMA1900	5 MHz	Spread Spectrum	1852.4 - 1907.6	4.1722	2.79	0.585	27.67	4M17F9W
WCDMAT900		QPSK	1850.7 - 1909.3	1.1086	4.98	0.579	27.63	1M11G7W
	4 4 MII-	16QAM	1850.7 - 1909.3	1.1143	5.78	0.467	26.69	1M11D7W
	1.4 MHz	64QAM	1850.7 - 1909.3	1.1101	6.35	0.372	25.70	1M11D7W
		256QAM	1850.7 - 1909.3	1.1050	6.69	0.191	22.81	1M11D7W
		QPSK	1851.5 - 1908.5	2.7328	4.66	0.585	27.67	2M73G7W
	O MILI-	16QAM	1851.5 - 1908.5	2.7290	5.69	0.468	26.70	2M73D7W
	3 MHz	64QAM	1851.5 - 1908.5	2.7337	6.38	0.369	25.67	2M73D7W
		256QAM	1851.5 - 1908.5	2.7367	6.63	0.190	22.78	2M74D7W
		QPSK	1852.5 - 1907.5	4.5559	4.92	0.582	27.65	4M56G7W
	5.44.1	16QAM	1852.5 - 1907.5	4.5465	5.86	0.463	26.66	4M55D7W
	5 MHz	64QAM	1852.5 - 1907.5	4.5716	6.41	0.366	25.64	4M57D7W
D. 10		256QAM	1852.5 - 1907.5	4.5527	6.55	0.190	22.79	4M55D7W
Band 2		QPSK	1855 - 1905	9.0678	5.02	0.589	27.70	9M07G7W
	40141-	16QAM	1856 - 1905	9.0648	5.89	0.463	26.66	9M06D7W
	10MHz	64QAM	1857 - 1905	9.0545	6.45	0.368	25.66	9M05D7W
		256QAM	1858 - 1905	9.0450	6.59	0.189	22.77	9M05D7W
	15 MHz	QPSK	1857.5 - 1902.5	13.6155	5.02	0.586	27.68	13M6G7W
		16QAM	1857.5 - 1902.5	13.6200	5.92	0.457	26.60	13M6D7W
		64QAM	1857.5 - 1902.5	13.5899	6.42	0.360	25.56	13M6D7W
		256QAM	1857.5 - 1902.5	13.5909	6.65	0.190	22.78	13M6D7W
	20 MHz	QPSK	1860 - 1900	18.1238	4.97	0.582	27.65	18M1G7W
		16QAM	1860 - 1900	18.1177	5.89	0.454	26.57	18M1D7W
		64QAM	1860 - 1900	18.1018	6.43	0.372	25.70	18M1D7W
		256QAM	1860 - 1900	18.0618	6.63	0.190	22.78	18M1D7W
	1.4 MHz	QPSK	1850.7 - 1914.3	1.1086	4.95	0.586	27.68	1M11G7W
		16QAM	1850.7 - 1914.3	1.1143	5.73	0.495	26.95	1M11D7W
		64QAM	1850.7 - 1914.3	1.1101	6.37	0.378	25.77	1M11D7W
		256QAM	1850.7 - 1914.3	1.1050	6.80	0.189	22.77	1M11D7W
		QPSK	1851.5 - 1913.5	2.7328	4.63	0.577	27.61	2M73G7W
		16QAM	1851.5 - 1913.5	2.7290	5.65	0.493	26.93	2M73D7W
	3 MHz	64QAM	1851.5 - 1913.5	2.7337	6.40	0.392	25.93	2M73D7W
		256QAM	1851.5 - 1913.5	2.7367	6.58	0.194	22.88	2M74D7W
		QPSK	1852.5 - 1912.5	4.5559	4.89	0.589	27.70	4M56G7W
		16QAM	1852.5 - 1912.5	4.5465	5.81	0.514	27.11	4M55D7W
	5 MHz	64QAM	1852.5 - 1912.5	4.5716	6.42	0.387	25.88	4M57D7W
D 105		256QAM	1852.5 - 1912.5	4.5527	7.04	0.190	22.78	4M55D7W
Band 25		QPSK	1855 - 1910	9.0678	5.00	0.577	27.61	9M07G7W
		16QAM	1855 - 1910	9.0648	5.87	0.482	26.83	9M06D7W
	10 MHz	64QAM	1855 - 1910	9.0545	7.97	0.383	25.83	9M05D7W
		256QAM	1855 - 1910	9.0450	6.59	0.189	22.77	9M05D7W
		QPSK	1857.5 - 1907.5	13.6155	5.03	0.546	27.37	13M6G7W
	4=	16QAM	1857.5 - 1907.5	13.6200	5.89	0.482	26.83	13M6D7W
	15 MHz	64QAM	1857.5 - 1907.5	13.5899	6.42	0.366	25.63	13M6D7W
		256QAM	1857.5 - 1907.5	13.5909	6.60	0.182	22.61	13M6D7W
		QPSK	1860 - 1905	18.1238	4.97	0.555	27.44	18M1G7W
		16QAM	1860 - 1905	18.1177	5.84	0.506	27.04	18M1D7W
	20 MHz	64QAM	1860 - 1905	18.1018	6.39	0.372	25.71	18M1D7W
		256QAM	1860 - 1905	18.0618	6.59	0.185	22.67	18M1D7W

EUT Overview

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Ü
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 3 of 220



			Tv Francisco		DAD -1 0 40/	EIRP		
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	Max. Power [W]	Max. Power [dBm]	Emission Designator
		π/2 BPSK	1852.5 - 1907.5	4.4937	4.04	0.582	27.65	4M49G7W
		QPSK	1852.5 - 1907.5	4.4824	5.36	0.589	27.70	4M48G7W
	5 MHz	16QAM	1852.5 - 1907.5	4.4731	6.24	0.469	26.71	4M47D7W
		64QAM	1852.5 - 1907.5	4.4830	6.40	0.372	25.71	4M48D7W
		256QAM	1852.5 - 1907.5	4.4819	6.46	0.189	22.77	4M48D7W
		π/2 BPSK	1855 - 1905	8.9456	4.38	0.578	27.62	8M95G7W
		QPSK	1855 - 1905	9.3259	5.54	0.589	27.70	9M33G7W
	10 MHz	16QAM	1855 - 1905	9.2982	6.18	0.474	26.76	9M30D7W
		64QAM	1855 - 1905	9.3255	6.54	0.372	25.71	9M33D7W
NR Band n2		256QAM	1855 - 1905	9.3354	6.72	0.192	22.84	9M34D7W
24.14.12		π/2 BPSK	1857.5 - 1902.5	13.3670	4.37	0.589	27.70	13M4G7W
		QPSK	1857.5 - 1902.5	14.0920	5.39	0.587	27.69	14M1G7W
	15 MHz	16QAM	1857.5 - 1902.5	13.9990	6.30	0.462	26.65	14M0D7W
		64QAM	1857.5 - 1902.5	14.1070	6.51	0.361	25.57	14M1D7W
		256QAM	1857.5 - 1902.5	14.1010	6.63	0.191	22.80	14M1D7W
		π/2 BPSK	1860 - 1900	17.9090	4.46	0.586	27.68	17M9G7W
		QPSK	1860 - 1900	19.0140	5.47	0.589	27.70	19M0G7W
	20 MHz	16QAM	1860 - 1900	19.0530	6.29	0.466	26.68	19M1D7W
		64QAM	1860 - 1900	19.0220	6.42	0.370	25.68	19M0D7W
		256QAM	1860 - 1900	18.9810	6.56	0.190	22.79	19M0D7W
		π/2 BPSK	1852.5 - 1912.5	4.4937	4.10	0.589	27.70	4M49G7W
		QPSK	1852.5 - 1912.5	4.4824	5.43	0.589	27.70	4M48G7W
	5 MHz	16QAM	1852.5 - 1912.5	4.4731	6.31	0.472	26.74	4M47D7W
		64QAM	1852.5 - 1912.5	4.4830	6.60	0.366	25.64	4M48D7W
		256QAM	1852.5 - 1912.5	4.4819	6.65	0.188	22.75	4M48D7W
	10 MHz	π/2 BPSK	1855 - 1910	8.9456	4.40	0.589	27.70	8M95G7W
		QPSK	1855 - 1910	9.3259	5.64	0.578	27.62	9M33G7W
		16QAM	1855 - 1910	9.2982	6.33	0.465	26.67	9M30D7W
		64QAM	1855 - 1910	9.3255	6.73	0.371	25.69	9M33D7W
		256QAM	1855 - 1910	9.3354	6.92	0.190	22.79	9M34D7W
	15 MHz	π/2 BPSK	1857.5 - 1907.5	13.3670	4.37	0.589	27.70	13M4G7W
		QPSK	1857.5 - 1907.5	14.0920	5.55	0.581	27.64	14M1G7W
		16QAM	1857.5 - 1907.5	13.9990	6.40	0.471	26.73	14M0D7W
		64QAM	1857.5 - 1907.5	14.1070	6.50	0.370	25.68	14M1D7W
		256QAM	1857.5 - 1907.5	14.1010	6.70	0.191	22.81	14M1D7W
	20 MHz	π/2 BPSK	1860 - 1905	17.9090	4.47	0.589	27.70	17M9G7W
		QPSK	1860 - 1905	19.0140	5.69	0.586	27.68	19M0G7W
		16QAM	1860 - 1905	19.0530	6.37	0.452	26.55	19M1D7W
		64QAM	1860 - 1905	19.0220	6.79	0.376	25.75	19M0D7W
NR Band n25		256QAM	1860 - 1905	18.9810	6.76	0.192	22.83	19M0D7W
		π/2 BPSK	1862.5 - 1902.5	22.9410	4.34	0.589	27.70	22M9G7W
	05.841.	QPSK	1862.5 - 1902.5	23.8510	5.49	0.577	27.61	23M9G7W
	25 MHz	16QAM	1862.5 - 1902.5	23.8740	6.43	0.463	26.66	23M9D7W
		64QAM	1862.5 - 1902.5	23.8380	6.77	0.373	25.72	23M8D7W
		256QAM	1862.5 - 1902.5	23.8690	6.69	0.186	22.70	23M9D7W
		π/2 BPSK	1865 - 1900	28.6270	4.58	0.586	27.68	28M6G7W
	20 MIL-	QPSK	1865 - 1900	28.5460	5.70	0.589	27.70	28M5G7W
	30 MHz	16QAM	1865 - 1900	28.6400	6.53	0.460	26.63	28M6D7W
		64QAM	1865 - 1900	28.6240	6.61	0.372	25.70	28M6D7W
		256QAM	1865 - 1900	28.6200	6.68	0.190	22.78	28M6D7W
		π/2 BPSK	1867.5 - 1897.5	32.2610	4.63	0.589	27.70	32M3G7W
	OF MILE	QPSK	1867.5 - 1897.5	33.7000	5.79	0.460	26.63	33M7G7W
	35 MHz	16QAM	1867.5 - 1897.5	33.6730	6.49	0.372	25.70	33M7D7W
		64QAM	1867.5 - 1897.5	33.6540	6.73	0.586	27.68	33M7D7W
		256QAM	1867.5 - 1897.5	33.6460	6.75	0.587	27.69	33M6D7W
		π/2 BPSK	1870 - 1895	38.6060	4.59	0.589	27.70	38M6G7W
	40.5	QPSK	1870 - 1895	38.5890	5.70	0.581	27.64	38M6G7W
	40 MHz	16QAM	1870 - 1895	38.5510	6.45	0.467	26.69	38M6D7W
		64QAM	1870 - 1895	38.7070	6.70	0.370	25.68	38M7D7W
		256QAM	1870 - 1895	38.6320	6.66	0.189	22.76	38M6D7W

EUT Overview

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 4 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 4 of 220



1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Agreements (MRAs).

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 5 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Faye 3 01 220



2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID:BCGA3355**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: M323DRYF34, G52L73WFXX, LN9DXV6D7V, H9HHAF0006K0000VYP, H9HH8N0000N0000VYR

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8)

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

	Simultaneous	Bluetooth 2.4GHz	WLAN	WIFI 5GHz		LTE / FR1 NR	
Antenna	Tx Config	BDR, EDR, HDR4/8, LE1/2M	802.11 b/g/n/ax	802.11 a/n/ac/ax	LB	МВ/НВ	Ultra High Band
Ant 3a	Config 1	✓	×	✓	×	✓	×
Ant 3a	Config 2	✓	*	✓	*	×	×
Ant 3a	Config 3	*	✓	*	*	✓	*
Ant 1a	Config 4	✓	*	*	*	×	✓
Ant 1a	Config 5	*	✓	*	*	*	√
Ant 1b	Config 6	×	×	✓	×	✓	×

Table 2-1. Simultaneous Transmission Configurations

✓ = Support; × = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 1 and reported in RF Bluetooth, RF UNII OFDM, and RF FCC Part 27b test reports.

Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz), in both connected and disconnected modes, and Wi-Fi (2.4GHz) - Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5 GHz on separate antenna.

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 6 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	raye u ui 220



2.3 Antenna Description

The following antenna gains provided by the manufacturer were used for testing.

Band	Antenna Gain [dBi]						
Dallu	Antenna 4	Antenna 2b	Antenna 3a	Antenna 1b			
WCDMA 1900							
LTE Band 2/25	2.0	0.3	0.2	-0.3			
NR Band n2/n25							

Table 2-2. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNPM0WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
	w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
4	DC Power Supply	Model:	KPS3010D	S/N:	N/A

Table 2-3. Test Support Equipment

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version 22D8 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 7 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	raye / 01 220



3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the documents titled "American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services" (ANSI C63.26-2015 and TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure......None

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

 $E_{[dB\mu V/m]} = Measured \ amplitude \ level_{[dBm]} + 107 + Cable \ Loss_{[dB]} + Antenna \ Factor_{[dB/m]} \ And$ $EIRP_{[dBm]} = E_{[dB\mu V/m]} + 20loqD - 104.8; \ where \ D \ is the \ measurement \ distance \ in \ meters.$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 8 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 6 01 220



4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of k=2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	2.07
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz-1GHz)	4.85
Radiated Disturbance (1-18GHz)	5.08
Radiated Disturbance (>18GHz)	5.22

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 9 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 9 01 220



5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/14/2024	Annual	3/14/2025	T058701-01
ESPEC	SU-241	Tabletop Temperature Chamber	10/24/2024	Annual	10/24/2025	92009574
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/9/2024	Annual	4/9/2025	00218555
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2024	Annual	6/10/2025	-
Fairview Microwave	M2CP1122-10	RF Directional Coupler *	6/10/2024	Annual	6/10/2025	1946
Keysight Technology	N9040B	UXA Signal Analyzer	5/28/2024	Annual	5/28/2025	MY57212015
Rohde & Schwarz	FSW67	Signal and Spectrum Analyzer (2Hz-67GHz)	7/5/2024	Annual	7/5/2025	101366
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	3/1/2024	Annual	3/1/2025	102143
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/29/2024	Annual	5/29/2025	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/1/2024	Annual	5/1/2025	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	7/3/2024	Annual	7/3/2025	102356
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	12/27/2023	Annual	12/27/2024	164715
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/21/2024	Annual	10/21/2025	187423
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/10/2024	Annual	6/10/2025	100057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/21/2024	Annual	6/21/2025	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2024	Annual	4/24/2025	101364
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/29/2024	Annual	4/29/2025	00304

Table 5-1. Test Equipment

Notes:

- 1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- 2. * denotes passive equipment that has been internally verified/calibrated.

Test Report S/N: Test Dates: EUT Type: 1C2410210077-08-R1 BCG 7/1/2024 - 12/28/2024 Tablet Device	FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
1C2410210077-08-R1 RCG 7/1/2024 - 12/28/2024 Tablet Device	Test Report S/N:	Test Dates:	EUT Type:	Dogo 10 of 220
102410210071 00 K1.50C 17/1/2024 12/20/2024 1dblot 50/10C	1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 10 01 220



6.0 SAMPLE CALCULATIONS

Emission Designator

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

π/2 BPSK / QPSK Modulation

Emission Designator = 8M62G7W

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

QAM Modulation

Emission Designator = 8M45D7W

BW = 8.45 MHz

D = Amplitude/Angle Modulated

7 = Quantized/Digital Info

W = Combination of Any

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 11 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 11 of 220



7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
FCC ID: BCGA3355

FCC Classification: PCS Licensed Transmitter (PCB)

Mode(s): WCDMA/LTE/NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	-13 dBm at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Peak-Average Ratio	24.232(d)	< 13 dB	PASS	Section 7.5
CONDUCTED	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Frequency Stability		Fundamental emissions stay within authorized frequency block over the temperature and voltage range as tested	PASS	Section 7.8
	Effective Radiated Power / Equivalent Isotropic Radiated Power	24.232(c)	< 2 Watts max. EIRP	PASS	Section 7.6
RADIATED	Radiated Spurious Emissions	2.1053, 24.238(a)	-13 dBm for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 12 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Faye 12 01 220



Notes:

- 1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3. All antenna ports conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool EMC Software Tool v1.1.
- 5. For radiated spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 3.1.0.

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 13 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 13 01 220



7.2 Occupied Bandwidth §2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 - Section 4.2

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth
 and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the
 fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW \geq 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within 1 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 14 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 14 01 220



Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

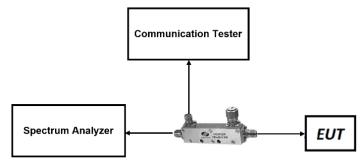


Figure 7-1. LTE Test Instrument & Measurement Setup




Figure 7-2. FR1 Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 15 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 13 01 220



LTE Band 25/2




Plot 7-1. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB Configuration)

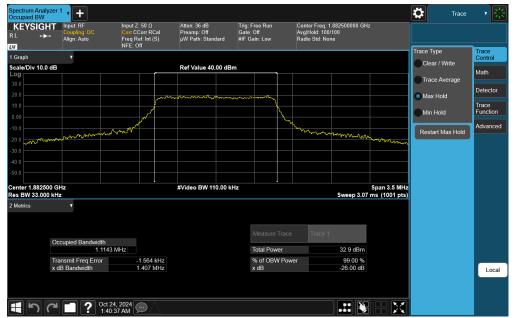


Plot 7-2. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 16 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 10 01 220



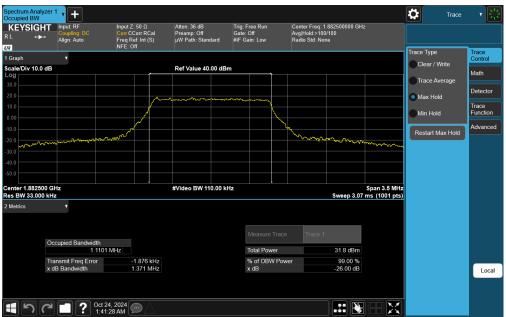


Plot 7-3. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 64-QAM - Full RB Configuration)

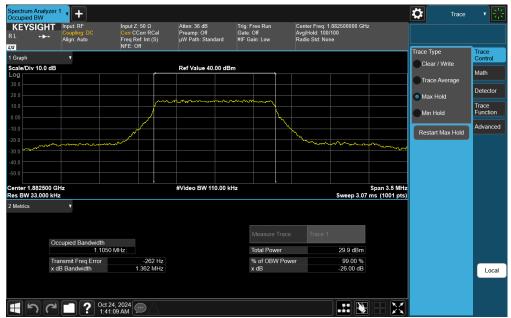


P6.lot 7-4. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	element Part 24 Measurement report	
Test Report S/N:	Test Dates:	EUT Type:	Page 17 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	rage 17 of 220



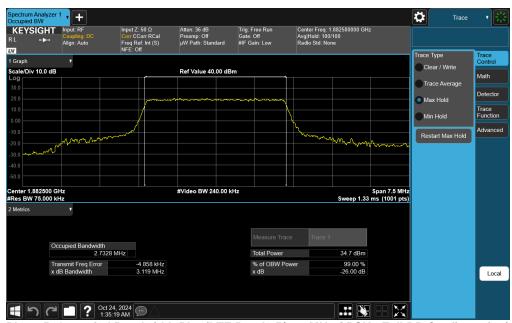

Plot 7-5. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz QPSK - Full RB Configuration)

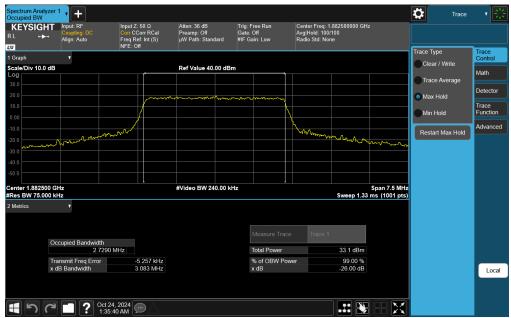


Plot 7-6. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	element Part 24 Measurement report	
Test Report S/N:	Test Dates:	EUT Type:	Page 18 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 18 01 220






Plot 7-7. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 64-QAM - Full RB Configuration)

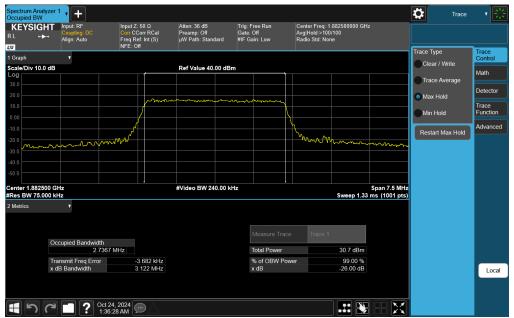


Plot 7-8. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 19 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 19 01 220



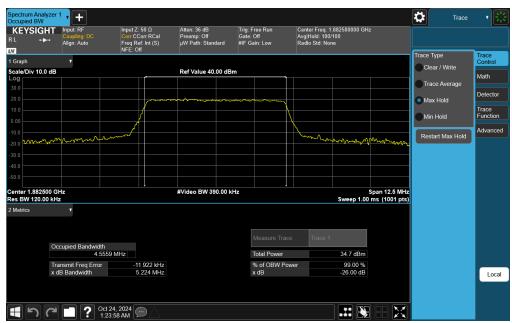


Plot 7-9. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz QPSK - Full RB Configuration)

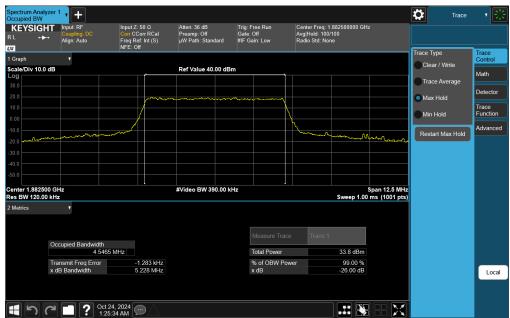


Plot 7-10. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 20 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 20 01 220



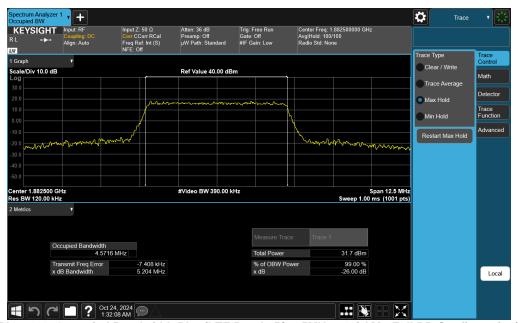


Plot 7-11. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 64-QAM - Full RB Configuration)

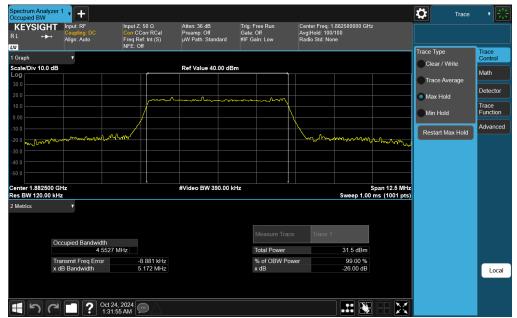


Plot 7-12. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 21 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 21 01 220



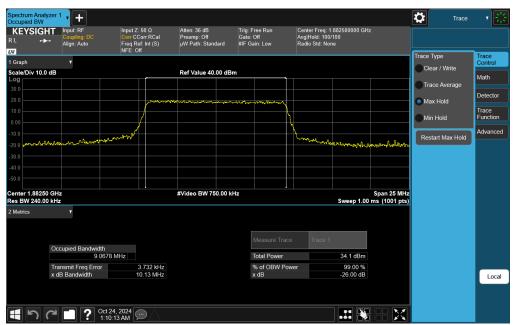


Plot 7-13. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz QPSK - Full RB Configuration)

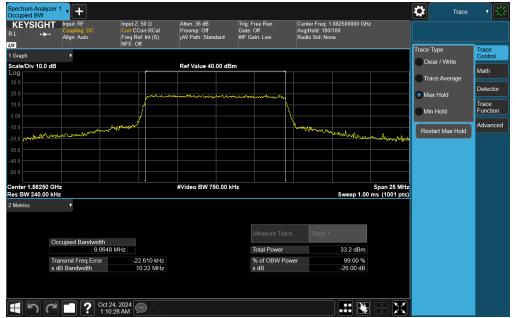


Plot 7-14. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 22 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Faye 22 01 220



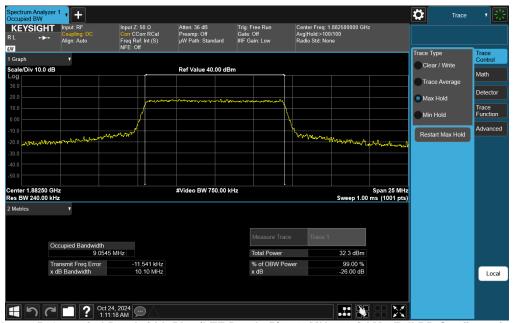

Plot 7-15. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 64-QAM - Full RB Configuration)

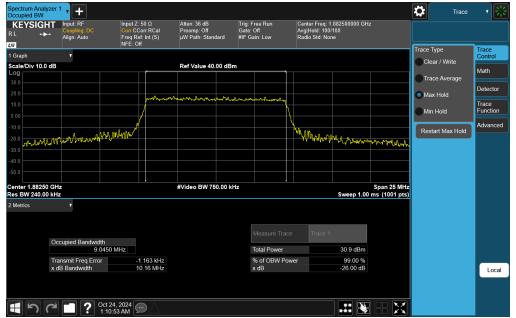


Plot 7-16. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 23 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Faye 23 01 220






Plot 7-17. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz QPSK - Full RB Configuration)

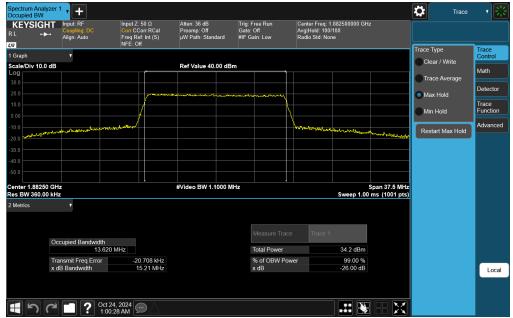


Plot 7-18. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 24 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Faye 24 01 220



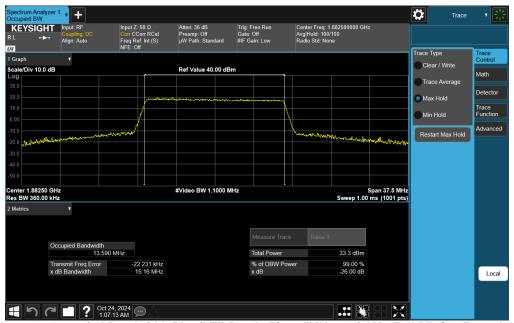


Plot 7-19. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 64-QAM - Full RB Configuration)

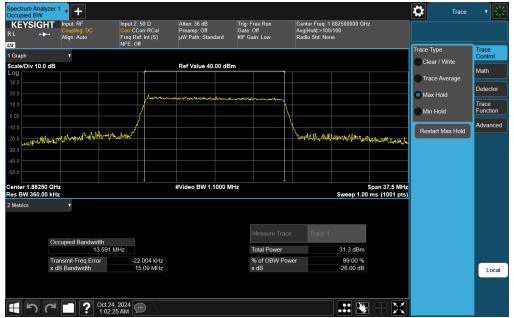


Plot 7-20. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	element Part 24 Measurement report	
Test Report S/N:	Test Dates:	EUT Type:	Page 25 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 23 01 220



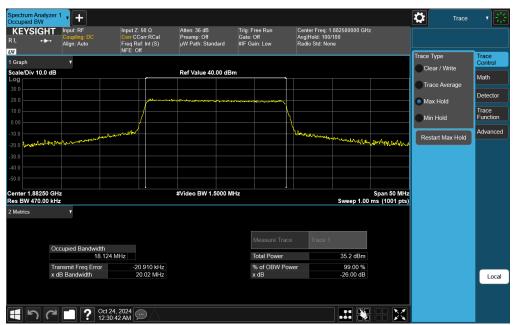

Plot 7-21. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB Configuration)

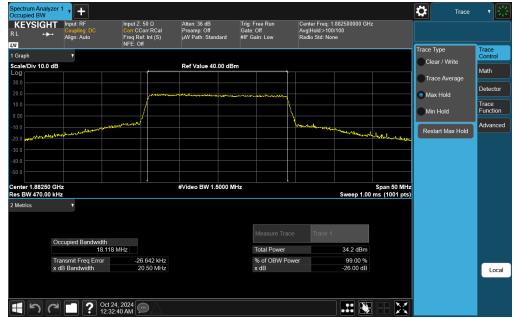


Plot 7-22. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA3355	element	element Part 24 Measurement Report	
Test Report S/N:	Test Dates:	EUT Type:	Page 26 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 20 01 220





Plot 7-23. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 64-QAM - Full RB Configuration)

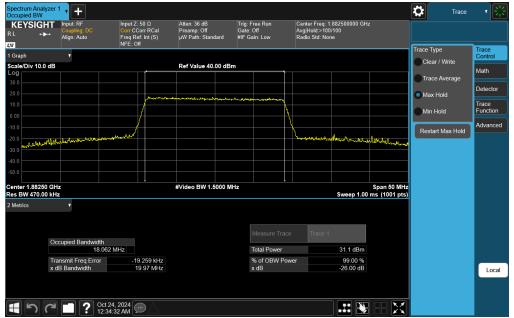


Plot 7-24. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 256-QAM - Full RB Configuration)


FCC ID: BCGA3355	element	element Part 24 Measurement report	
Test Report S/N:	Test Dates:	EUT Type:	Page 27 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 27 01 220



NR Band n25/n2

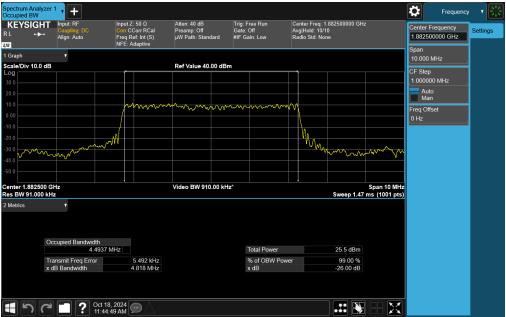

Plot 7-25. Occupied Bandwidth Plot (NR Band n25/n2 - 5MHz DFT-s-OFDM π/2 BPSK - Full RB)

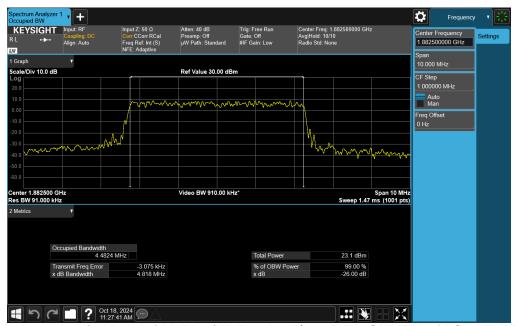


Plot 7-26. Occupied Bandwidth Plot (NR Band n25/n2 - 5MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 28 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	






Plot 7-27. Occupied Bandwidth Plot (NR Band n25/n2 - 5MHz CP-OFDM 16QAM - Full RB)

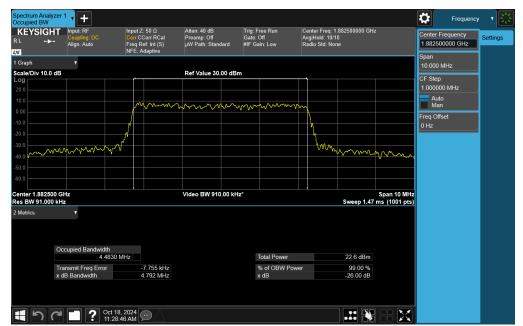


Plot 7-28. Occupied Bandwidth Plot (NR Band n25/n2 - 5MHz CP-OFDM 64QAM - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 29 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 29 01 220



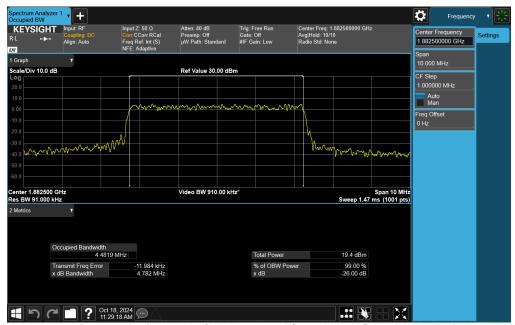


Plot 7-29. Occupied Bandwidth Plot (NR Band n25/n2 - 5MHz CP-OFDM 256QAM - Full RB)

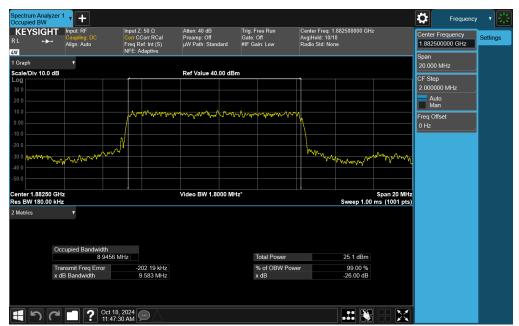


Plot 7-30. Occupied Bandwidth Plot (NR Band n25/n2 - 10MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 30 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	



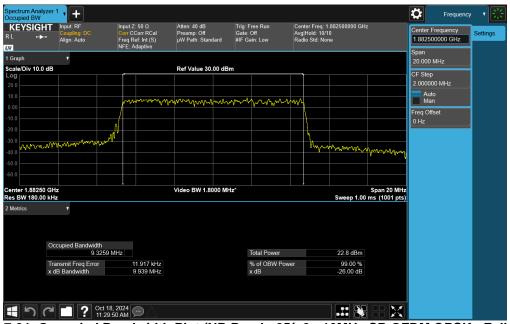

Plot 7-31. Occupied Bandwidth Plot (NR Band n25/n2 - 10MHz CP-OFDM QPSK - Full RB)

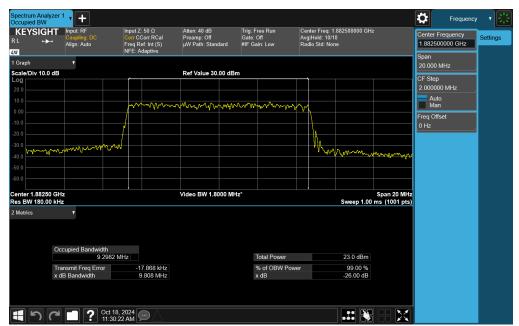


Plot 7-32. Occupied Bandwidth Plot (NR Band n25/n2 - 10MHz CP-OFDM 16QAM - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 31 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	






Plot 7-33. Occupied Bandwidth Plot (NR Band n25/n2 - 10MHz CP-OFDM 64QAM - Full RB)

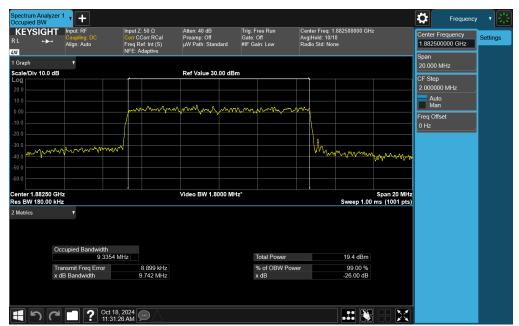


Plot 7-34. Occupied Bandwidth Plot (NR Band n25/n2 - 10MHz CP-OFDM 256QAM - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 32 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	



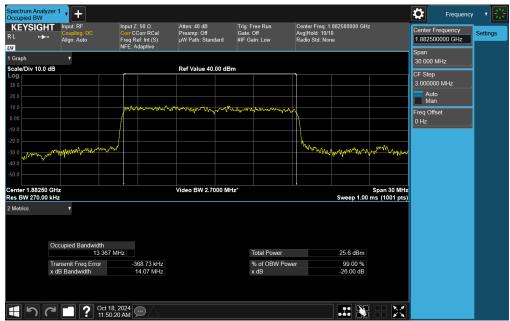

Plot 7-35. Occupied Bandwidth Plot (NR Band n25/n2 - 15MHz DFT-s-OFDM π/2 BPSK - Full RB)

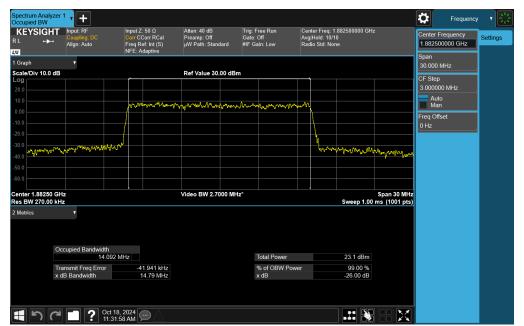


Plot 7-36. Occupied Bandwidth Plot (NR Band n25/n2 - 15MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 33 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Faye 33 01 220






Plot 7-37. Occupied Bandwidth Plot (NR Band n25/n2 - 15MHz CP-OFDM 16QAM - Full RB)

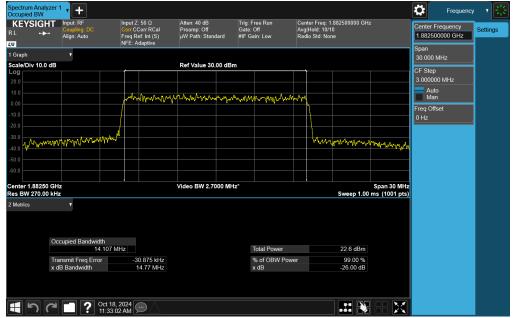


Plot 7-38. Occupied Bandwidth Plot (NR Band n25/n2 - 15MHz CP-OFDM 64QAM - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 34 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	raye 34 01 220



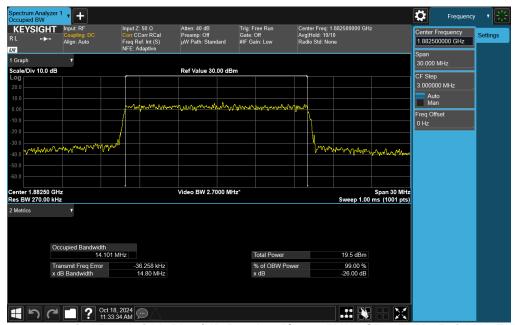


Plot 7-39. Occupied Bandwidth Plot (NR Band n25/n2 - 15MHz CP-OFDM 256QAM - Full RB)

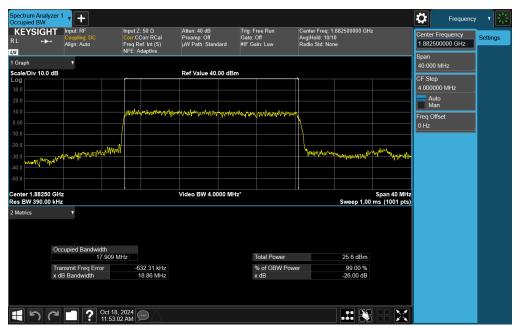

Plot 7-40. Occupied Bandwidth Plot (NR Band n25/n2 - 20MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 35 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	raye 33 01 220



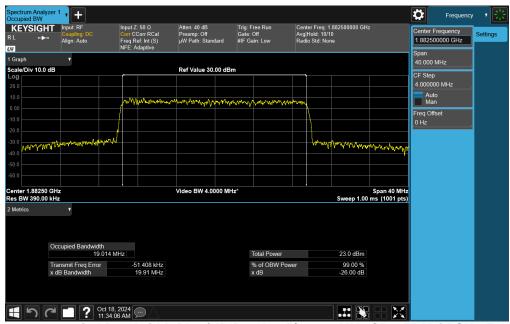


Plot 7-41. Occupied Bandwidth Plot (NR Band n25/n2 - 20MHz CP-OFDM QPSK - Full RB)



Plot 7-42. Occupied Bandwidth Plot (NR Band n25/n2 - 20MHz CP-OFDM 16QAM - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 36 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 30 01 220



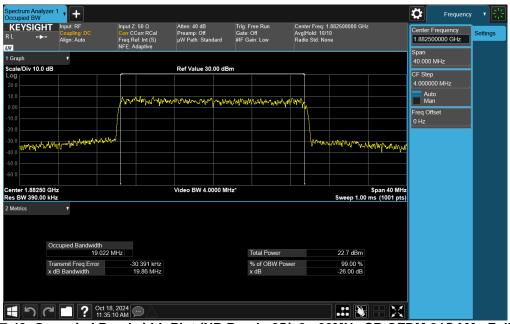


Plot 7-43. Occupied Bandwidth Plot (NR Band n25/n2 - 20MHz CP-OFDM 64QAM - Full RB)




Plot 7-44. Occupied Bandwidth Plot (NR Band n25/n2 - 20MHz CP-OFDM 256QAM - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 27 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 37 of 220



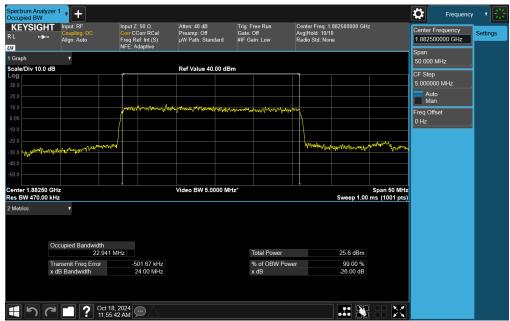


Plot 7-45. Occupied Bandwidth Plot (NR Band n25 - 25MHz DFT-s-OFDM π/2 BPSK - Full RB)

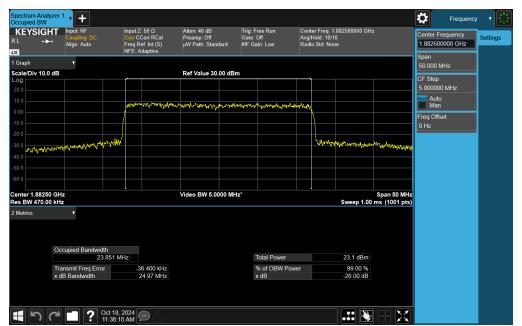


Plot 7-46. Occupied Bandwidth Plot (NR Band n25 - 25MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 38 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 38 of 220



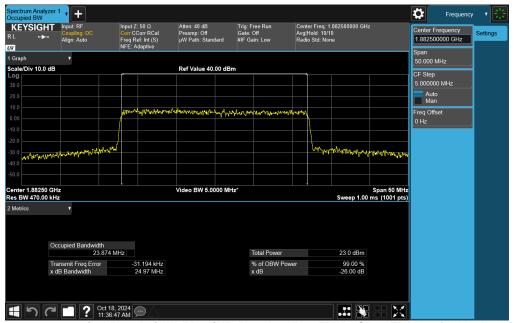


Plot 7-47. Occupied Bandwidth Plot (NR Band n25 - 25MHz CP-OFDM 16QAM - Full RB)

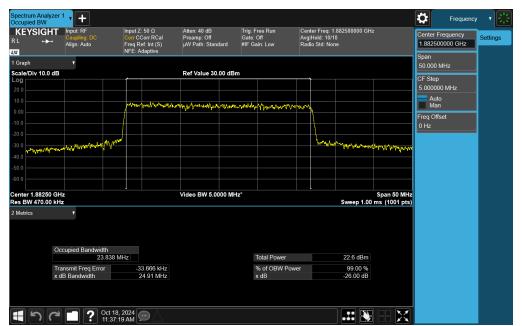


Plot 7-48. Occupied Bandwidth Plot (NR Band n25 - 25MHz CP-OFDM 64QAM - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 30 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 39 of 220



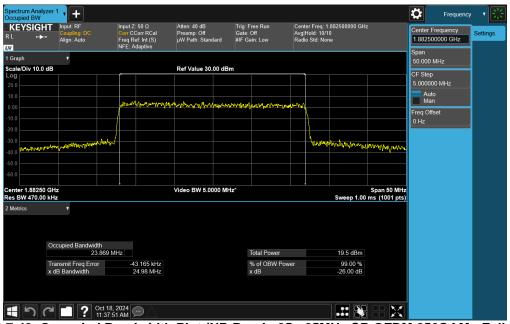


Plot 7-49. Occupied Bandwidth Plot (NR Band n25 - 25MHz CP-OFDM 256QAM - Full RB)

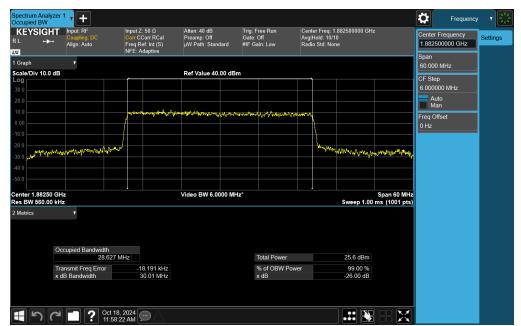


Plot 7-50. Occupied Bandwidth Plot (NR Band n25 - 30MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 40 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 40 of 220



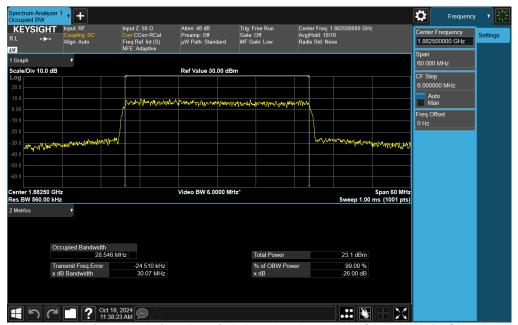

Plot 7-51. Occupied Bandwidth Plot (NR Band n25 - 30MHz CP-OFDM QPSK - Full RB)

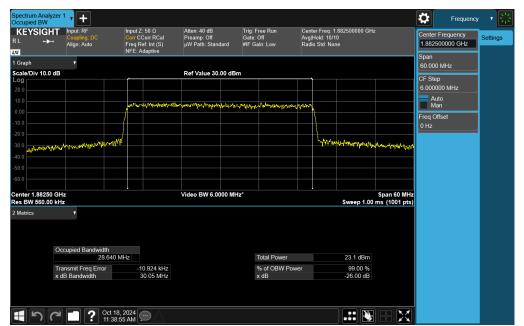


Plot 7-52. Occupied Bandwidth Plot (NR Band n25 - 30MHz CP-OFDM 16QAM - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 41 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	raye 41 01 220






Plot 7-53. Occupied Bandwidth Plot (NR Band n25 - 30MHz CP-OFDM 64QAM - Full RB)

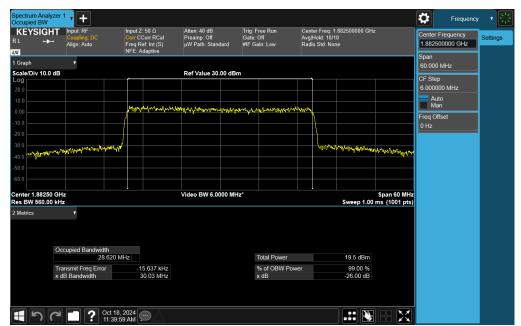


Plot 7-54. Occupied Bandwidth Plot (NR Band n25 - 30MHz CP-OFDM 256QAM - Full RB)

FCC ID: BCGA3355	element	element Part 24 Measurement report	
Test Report S/N:	Test Dates:	EUT Type:	Page 42 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 42 01 220



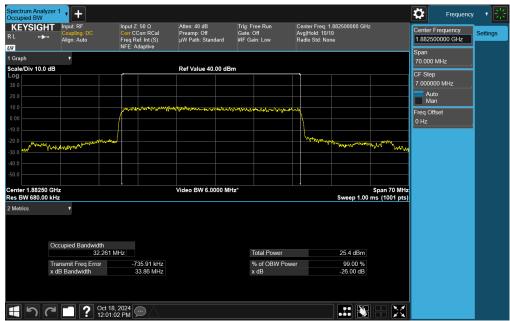


Plot 7-55. Occupied Bandwidth Plot (NR Band n25 - 35MHz DFT-s-OFDM π/2 BPSK - Full RB)

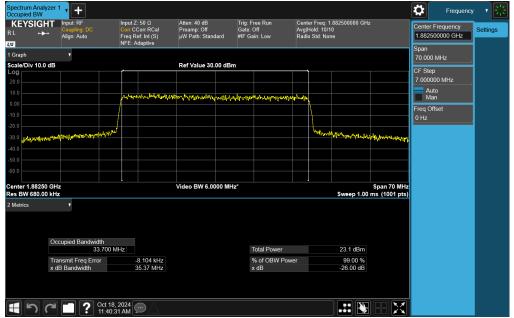


Plot 7-56. Occupied Bandwidth Plot (NR Band n25 - 35MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 43 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 43 of 220



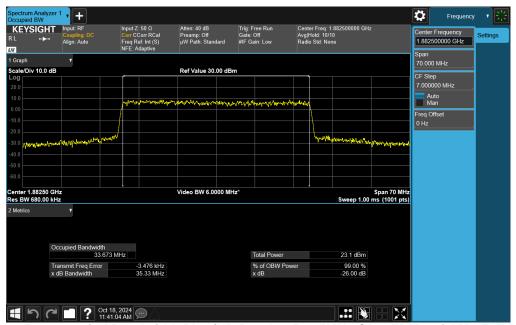

Plot 7-57. Occupied Bandwidth Plot (NR Band n25 - 35MHz CP-OFDM 16QAM - Full RB)

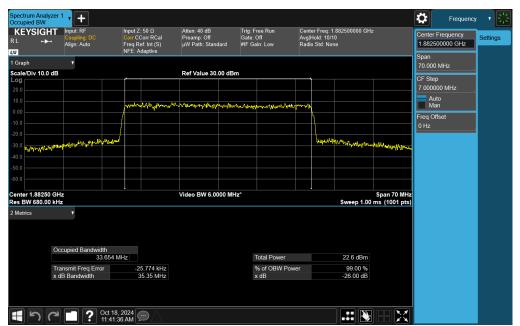


Plot 7-58. Occupied Bandwidth Plot (NR Band n25 - 35MHz CP-OFDM 64QAM - Full RB)

FCC ID: BCGA3355	element	element Part 24 Measurement report	
Test Report S/N:	Test Dates:	EUT Type:	Page 44 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 44 01 220





Plot 7-59. Occupied Bandwidth Plot (NR Band n25 - 35MHz CP-OFDM 256QAM - Full RB)

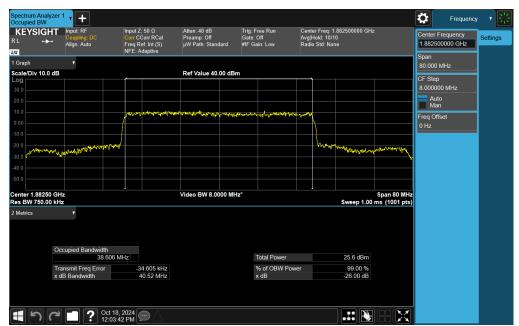


Plot 7-60. Occupied Bandwidth Plot (NR Band n25 - 40MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 45 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	raye 45 01 220






Plot 7-61. Occupied Bandwidth Plot (NR Band n25 - 40MHz CP-OFDM QPSK - Full RB)

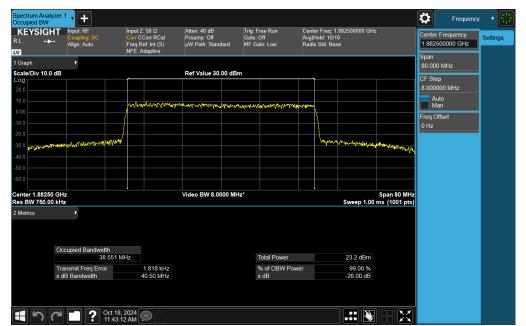


Plot 7-62. Occupied Bandwidth Plot (NR Band n25 - 40MHz CP-OFDM 16QAM - Full RB)

FCC ID: BCGA3355	element	element Part 24 Measurement report	
Test Report S/N:	Test Dates:	EUT Type:	Page 46 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 40 01 220



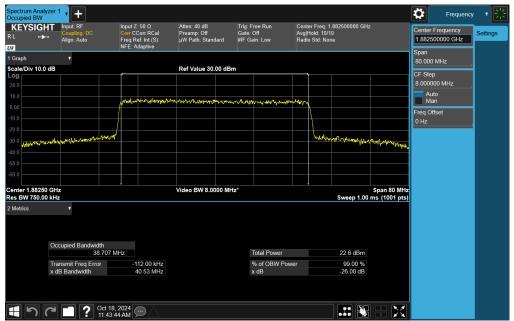

Plot 7-63. Occupied Bandwidth Plot (NR Band n25 - 40MHz CP-OFDM 64QAM - Full RB)

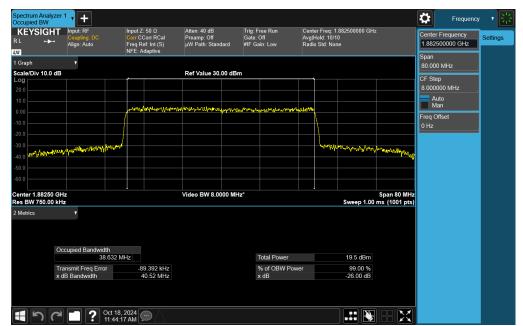


Plot 7-64. Occupied Bandwidth Plot (NR Band n25 - 40MHz CP-OFDM 256QAM - Full RB)

FCC ID: BCGA3355	element	element Part 24 Measurement report	
Test Report S/N:	Test Dates:	EUT Type:	Page 47 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 47 01 220



WCDMA PCS

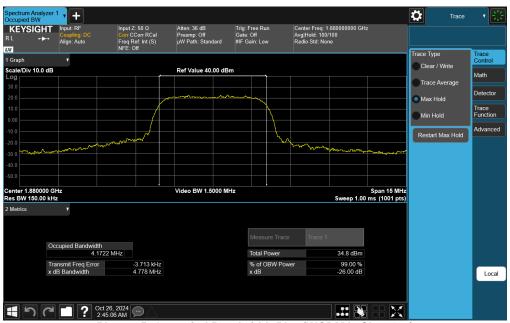

Plot 7-65. Occupied Bandwidth Plot (WCDMA, Ch. 9400)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 48 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 40 01 220



7.3 Spurious and Harmonic Emissions at Antenna Terminal §2.1051, §24.238(a)

Test Overview and Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

The minimum permissible attenuation level of any spurious emission is 43 + 10 $log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 - Section 6.0

Test Settings

- 1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
- Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

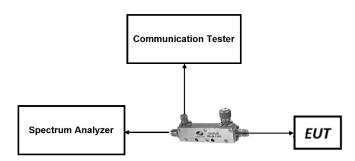


Figure 7-3. LTE Test Instrument & Measurement Setup




Figure 7-4. FR1 Test Instrument & Measurement Setup

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 40 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 49 of 220




Test Notes

- 1. Per Part 24, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- 2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
- 3. NR band n25 overlaps the entire frequency range of NR band 2. Therefore, the conducted emissions data of NR band n25 provided in this report covers NR band n2.


FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 50 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 30 01 220



LTE Band 25/2

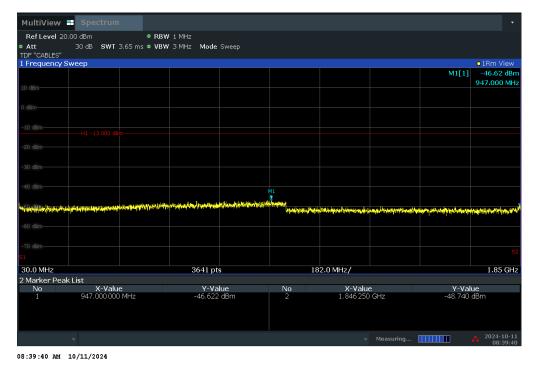


Plot 7-66. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

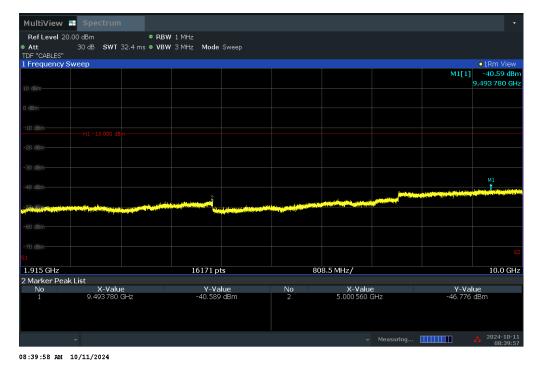

Plot 7-67. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)


FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 51 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 51 of 220



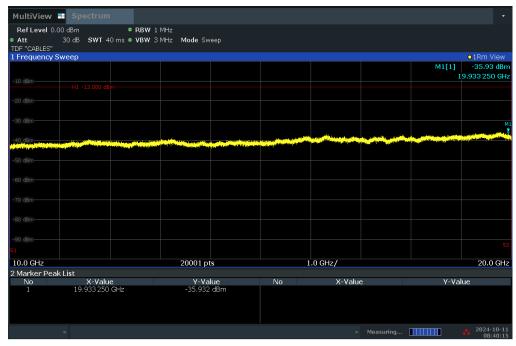

08:40:15 AM 10/11/2024


Plot 7-68. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

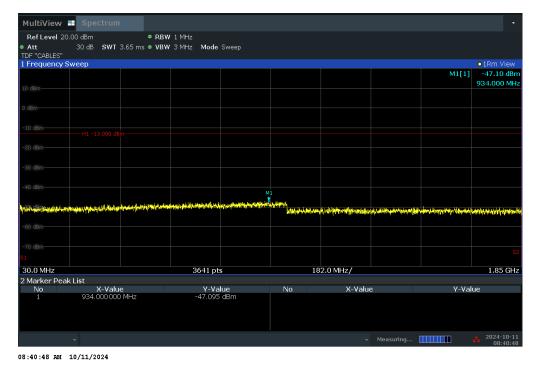

Plot 7-69. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)


FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 52 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	raye 32 01 220



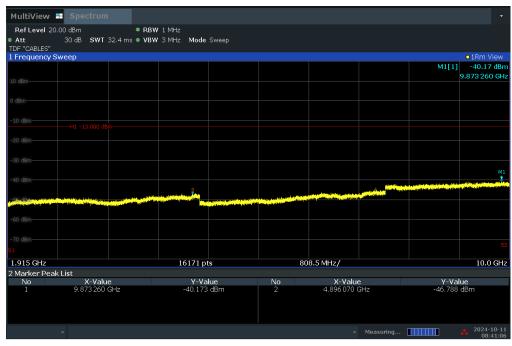

08:41:06 AM 10/11/2024

Plot 7-70. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

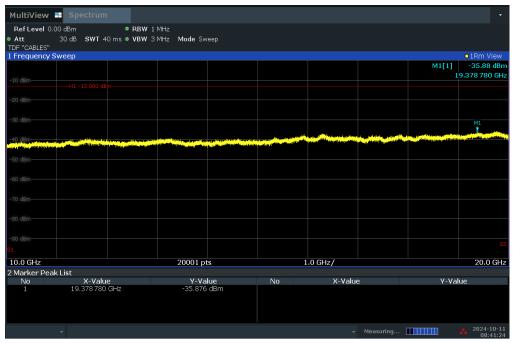


08:41:24 AM 10/11/2024

Plot 7-71. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA3355	element	element Part 24 Measurement report	
Test Report S/N:	Test Dates:	EUT Type:	Page 53 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 33 01 220


V2.2 09/07/2023



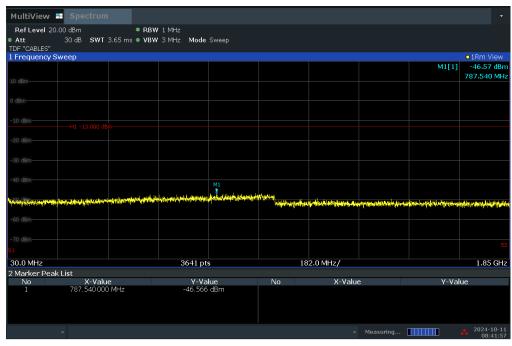

08:41:57 AM 10/11/2024


Plot 7-72. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

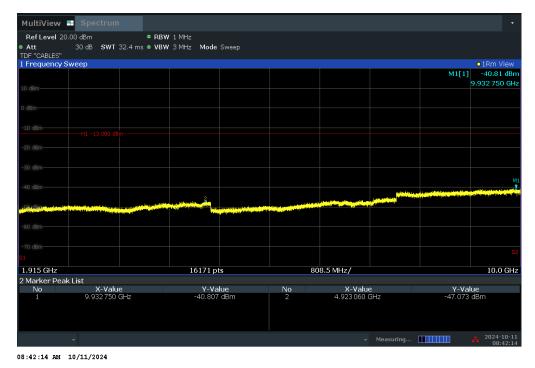

Plot 7-73. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 54 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 54 of 220



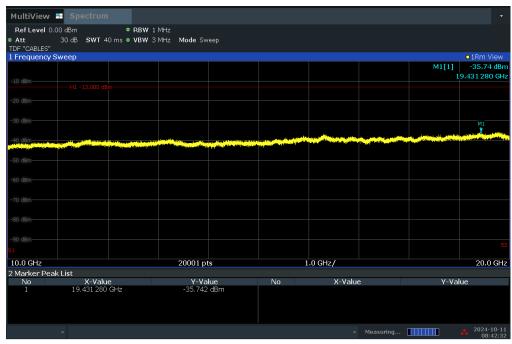

08:42:32 AM 10/11/2024

Plot 7-74. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 55 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 55 01 220



NR Band n25/n2



Plot 7-75. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Low Channel)



Plot 7-76. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 56 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Page 56 of 220






Plot 7-77. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Low Channel)



Plot 7-78. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 57 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 31 01 220



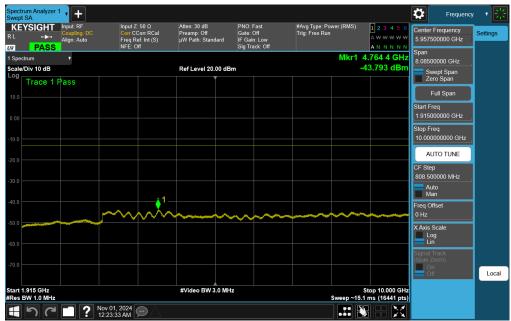


Plot 7-79. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Mid Channel)



Plot 7-80. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 58 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 30 01 220



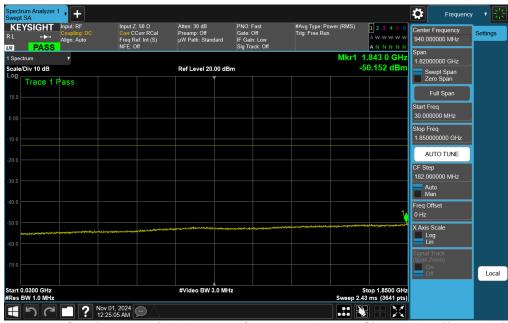

Plot 7-81. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - High Channel)



Plot 7-82. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 59 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	raye 39 01 220






Plot 7-83. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA3355	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 60 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	rage ou oi 220



WCDMA PCS

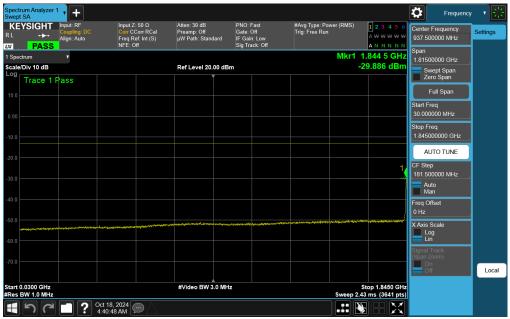

Plot 7-84. Conducted Spurious Plot (WCDMA Ch. 9262)



Plot 7-85. Conducted Spurious Plot (WCDMA Ch. 9262)

FCC ID: BCGA3355	element)	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 61 of 220
1C2410210077-08-R1.BCG	7/1/2024 - 12/28/2024	Tablet Device	Fage 01 01 220