Element Materials Technology
(formerly PCTEST)
18855 Adams Court, Morgan Hill, CA 95037 USA
Tel. 408.538.5600
http://www.element.com



MEASUREMENT REPORT
PART 27

Applicant Name:
Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:
7/1/2024 - 12/28/2024
Test Report Issue Date:
1/25/2025
Test Site/Location:
Element Materials Technology, Morgan Hill, CA, USA
Test Report Serial No.:
1C2410210077-10-R1.BCG

FCC ID:	**BCGA3355**
Applicant Name:	**Apple Inc.**

Application Type:	Certification
Model:	A3355, A3356
EUT Type:	Tablet Device
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part:	27
Test Procedure(s):	ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2410210077-10-R1.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President

ACCREDITED
CERT #2041.02

TABLE OF CONTENTS



PART 27 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	EIRP		Emission Designator
					Max. Power [W]	Max. Power [dBm]	
LTE Band 30	5 MHz	QPSK	2307.5 - 2312.5	4.5499	0.223	23.48	4M55G7W
		16QAM	2307.5 - 2312.5	4.5540	0.176	22.47	4M55D7W
		64QAM	2307.5 - 2312.5	4.5477	0.141	21.50	4M55D7W
		256QAM	2307.5 - 2312.5	4.5518	0.071	18.50	4M55D7W
	10MHz	QPSK	2310	9.0733	0.222	23.47	9M07G7W
		16QAM	2310	9.0785	0.177	22.48	9M08D7W
		64QAM	2310	9.0576	0.141	21.50	9M06D7W
		256QAM	2310	9.0349	0.071	18.50	9M03D7W
LTE Band 7	5 MHz	QPSK	2502.5 - 2567.5	4.5556	0.676	28.30	4M56G7W
		16QAM	2502.5 - 2567.5	4.5636	0.532	27.26	4M56D7W
		64QAM	2502.5 - 2567.5	4.5611	0.423	26.26	4M56D7W
		256QAM	2502.5 - 2567.5	4.5584	0.210	23.22	4M56D7W
	10 MHz	QPSK	2505 - 2565	9.0642	0.676	28.30	9M06G7W
		16QAM	2505 - 2565	9.0670	0.535	27.28	9M07D7W
		64QAM	2505 - 2565	9.0590	0.425	26.28	9M06D7W
		256QAM	2505 - 2565	9.0504	0.218	23.39	9M05D7W
	15 MHz	QPSK	2507.5 - 2562.5	13.5253	0.676	28.30	13M5G7W
		16QAM	2507.5 - 2562.5	13.5894	0.536	27.29	13M6D7W
		64QAM	2507.5 - 2562.5	13.5717	0.429	26.32	13M6D7W
		256QAM	2507.5 - 2562.5	13.5597	0.220	23.42	13M6D7W
	20 MHz	QPSK	2510 - 2560	18.1104	0.676	28.30	18M1G7W
		16QAM	2510 - 2560	18.0976	0.533	27.27	18M1D7W
		64QAM	2510 - 2560	18.0935	0.427	26.30	18M1D7W
		256QAM	2510 - 2560	18.0871	0.218	23.38	18M1D7W
LTE Band 41 (PC2)	5 MHz	QPSK	2498.5 - 2687.5	4.5477	1.020	30.09	4M55G7W
		16QAM	2498.5 - 2687.5	4.5346	0.801	29.04	4M53D7W
		64QAM	2498.5 - 2687.5	4.5125	0.641	28.07	4M51D7W
		256QAM	2498.5 - 2687.5	4.5429	0.322	25.07	4M54D7W
	10 MHz	QPSK	2501 - 2685	9.0553	1.021	30.09	9M06G7W
		16QAM	2501 - 2685	9.0383	0.809	29.08	9M04D7W
		64QAM	2501 - 2685	9.0272	0.635	28.03	9M03D7W
		256QAM	2501 - 2685	9.0382	0.315	24.99	9M04D7W
	15 MHz	QPSK	2503.5 - 2682.5	13.5262	1.014	30.06	13M5G7W
		16QAM	2503.5 - 2682.5	13.5422	0.808	29.08	13M5D7W
		64QAM	2503.5 - 2682.5	13.5268	0.641	28.07	13M5D7W
		256QAM	2503.5 - 2682.5	13.5391	0.319	25.03	13M5D7W
	20 MHz	QPSK	2506 - 2680	18.0180	1.022	30.09	18M0G7W
		16QAM	2506 - 2680	18.0544	0.795	29.00	18M1D7W
		64QAM	2506 - 2680	18.0343	0.644	28.09	18M0D7W
		256QAM	2506 - 2680	18.0304	0.323	25.09	18M0D7W
LTE Band 41(PC3)	5 MHz	QPSK	2498.5 - 2687.5	4.5477	0.660	28.20	4M55G7W
		16QAM	2498.5 - 2687.5	4.5346	0.523	27.18	4M53D7W
		64QAM	2498.5 - 2687.5	4.5125	0.409	26.12	4M51D7W
		256QAM	2498.5 - 2687.5	4.5429	0.208	23.19	4M54D7W
	10 MHz	QPSK	2501 - 2685	9.0553	0.658	28.18	9M06G7W
		16QAM	2501 - 2685	9.0383	0.523	27.18	9M04D7W
		64QAM	2501 - 2685	9.0272	0.416	26.19	9M03D7W
		256QAM	2501 - 2685	9.0382	0.209	23.20	9M04D7W
	15 MHz	QPSK	2503.5 - 2682.5	13.5262	0.655	28.16	13M5G7W
		16QAM	2503.5 - 2682.5	13.5422	0.523	27.18	13M5D7W
		64QAM	2503.5 - 2682.5	13.5268	0.415	26.18	13M5D7W
		256QAM	2503.5 - 2682.5	13.5391	0.207	23.16	13M5D7W
	20 MHz	QPSK	2506 - 2680	18.0180	0.658	28.18	18M0G7W
		16QAM	2506 - 2680	18.0544	0.521	27.17	18M1D7W
		64QAM	2506 - 2680	18.0343	0.410	26.13	18M0D7W
		256QAM	2506 - 2680	18.0304	0.204	23.10	18M0D7W
ULCA LTE Band 7	20 + 20 MHz	QPSK	2520 - 2550	37.5438	0.676	28.30	37M5G7W
		16QAM	2520 - 2550	37.5519	0.405	26.07	37M6D7W
		64QAM	2520 - 2550	37.5108	0.311	24.93	37M5D7W
		256QAM	2520 - 2550	37.5290	0.218	23.38	37M5D7W
ULCA LTE Band 41(PC2)	20 + 20 MHz	QPSK	2516 - 2670	37.5902	1.010	30.04	37M6G7W
		16QAM	2516 - 2670	37.5863	0.599	27.77	37M6D7W
		64QAM	2516 - 2670	37.5791	0.527	27.22	37M6D7W
		256QAM	2516 - 2670	37.5952	0.356	25.51	37M6D7W
ULCA LTE Band 41(PC3)	20 + 20 MHz	QPSK	2516 - 2670	37.5902	0.646	28.10	37M6G7W
		16QAM	2516 - 2670	37.5863	0.423	26.27	37M6D7W
		64QAM	2516 - 2670	37.5791	0.375	25.74	37M6D7W
		256QAM	2516 - 2670	37.5952	0.259	24.14	37M6D7W

EUT Overview

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	EIRP		Emission Designator
					Max. Power [W]	Max. Power [dBm]	
NR Band n30	5 MHz	π/2 BPSK	2307.5 - 2312.5	4.4649	0.208	23.19	4M46G7W
		QPSK	2307.5 - 2312.5	4.4859	0.209	23.19	4M49G7W
		16QAM	2307.5 - 2312.5	4.4743	0.132	21.19	4M47D7W
		64QAM	2307.5 - 2312.5	4.4925	0.117	20.67	4M49D7W
		256QAM	2307.5 - 2312.5	4.4515	0.073	18.63	4M45D7W
	10MHz	π/2 BPSK	2310	9.0044	0.208	23.19	9M00G7W
		QPSK	2310	9.3034	0.202	23.05	9M30G7W
		16QAM	2310	9.3227	0.128	21.09	9M32D7W
		64QAM	2310	9.3138	0.116	20.65	9M31D7W
		256QAM	2310	9.3134	0.073	18.62	9M31D7W
NR Band n7	5 MHz	π/2 BPSK	2502.5 - 2567.5	4.4893	0.671	28.27	4M49G7W
		QPSK	2502.5 - 2567.5	4.4567	0.676	28.30	4M46G7W
		16QAM	2502.5 - 2567.5	4.4861	0.520	27.16	4M49D7W
		64QAM	2502.5 - 2567.5	4.5071	0.407	26.10	4M51D7W
		256QAM	2502.5 - 2567.5	4.4883	0.216	23.35	4M49D7W
	10MHz	π/2 BPSK	2505 - 2565	8.9655	0.676	28.30	8M97G7W
		QPSK	2505 - 2565	9.2911	0.653	28.15	9M29G7W
		16QAM	2505 - 2565	9.2534	0.537	27.30	9M25D7W
		64QAM	2505 - 2565	9.2976	0.421	26.24	9M30D7W
		256QAM	2505 - 2565	9.2726	0.219	23.40	9M27D7W
	15 MHz	π/2 BPSK	2507.5 - 2562.5	13.4075	0.676	28.30	13M4G7W
		QPSK	2507.5 - 2562.5	14.1661	0.659	28.19	14M2G7W
		16QAM	2507.5 - 2562.5	14.1882	0.528	27.23	14M2D7W
		64QAM	2507.5 - 2562.5	14.1205	0.426	26.29	14M1D7W
		256QAM	2507.5 - 2562.5	14.1671	0.214	23.31	14M2D7W
	20MHz	π/2 BPSK	2510 - 2560	17.8674	0.676	28.30	17M9G7W
		QPSK	2510 - 2560	19.0233	0.668	28.25	19M0G7W
		16QAM	2510 - 2560	18.9586	0.536	27.29	19M0D7W
		64QAM	2510 - 2560	18.9713	0.427	26.30	19M0D7W
		256QAM	2510 - 2560	18.9877	0.214	23.31	19M0D7W
	25MHz	π/2 BPSK	2512.5 - 2557.5	22.9009	0.676	28.30	22M9G7W
		QPSK	2512.5 - 2557.5	23.8444	0.655	28.16	23M8G7W
		16QAM	2512.5 - 2557.5	23.8112	0.537	27.30	23M8D7W
		64QAM	2512.5 - 2557.5	23.7521	0.427	26.30	23M8D7W
		256QAM	2512.5 - 2557.5	23.7713	0.216	23.34	23M8D7W
	30MHz	π/2 BPSK	2515 - 2555	28.7301	0.676	28.30	28M7G7W
		QPSK	2515 - 2555	28.6323	0.652	28.14	28M6G7W
		16QAM	2515 - 2555	28.7529	0.538	27.31	28M8D7W
		64QAM	2515 - 2555	28.7815	0.428	26.31	28M8D7W
		256QAM	2515 - 2555	28.6218	0.220	23.43	28M6D7W
	35MHz	π/2 BPSK	2517.5 - 2552.5	32.1514	0.652	28.14	32M2G7W
		QPSK	2517.5 - 2552.5	33.6320	0.538	27.31	33M6G7W
		16QAM	2517.5 - 2552.5	33.6943	0.422	26.25	33M7D7W
		64QAM	2517.5 - 2552.5	33.6896	0.676	28.30	33M7D7W
		256QAM	2517.5 - 2552.5	33.6897	0.668	28.25	33M7D7W
	40MHz	π/2 BPSK	2520 - 2550	38.5826	0.676	28.30	38M6G7W
		QPSK	2520 - 2550	38.5842	0.668	28.25	38M6G7W
		16QAM	2520 - 2550	38.6229	0.540	27.32	38M6D7W
		64QAM	2520 - 2550	38.6394	0.432	26.35	38M6D7W
		256QAM	2520 - 2550	38.6763	0.219	23.40	38M7D7W

EUT Overview

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	EIRP		Emission Designator
					Max. Power [W]	Max. Power [dBm]	
NR Band n41 (PC2)	10 MHz	π/2 BPSK	2496 - 2690	8.5824	1.009	30.04	8M58G7W
		QPSK	2496 - 2690	8.6232	1.023	30.10	8M62G7W
		16QAM	2496 - 2690	8.5956	0.800	29.03	8M60D7W
		64QAM	2496 - 2690	8.5920	0.622	27.94	8M59D7W
		256QAM	2496 - 2690	8.5983	0.331	25.20	8M60D7W
	15 MHz	π/2 BPSK	2501 - 2685	12.9111	1.009	30.04	12M9G7W
		QPSK	2501 - 2685	13.5883	0.800	29.03	13M6G7W
		16QAM	2501 - 2685	13.6188	0.622	27.94	13M6D7W
		64QAM	2501 - 2685	13.5882	1.023	30.10	13M6D7W
		256QAM	2501 - 2685	13.6078	1.023	30.10	13M6D7W
	20 MHz	π/2 BPSK	2506 - 2680	17.8748	0.800	29.03	17M9G7W
		QPSK	2506 - 2680	18.2913	0.622	27.94	18M3G7W
		16QAM	2506 - 2680	18.3103	1.023	30.10	18M3D7W
		64QAM	2506 - 2680	18.2726	1.023	30.10	18M3D7W
		256QAM	2506 - 2680	18.2915	1.007	30.03	18M3D7W
	30MHz	π/2 BPSK	2511 - 2675	26.8482	0.995	29.98	26M8G7W
		QPSK	2511 - 2675	27.9629	1.023	30.10	28M0G7W
		16QAM	2511 - 2675	27.9552	0.815	29.11	28M0D7W
		64QAM	2511 - 2675	27.9437	0.643	28.08	27M9D7W
		256QAM	2511 - 2675	27.9566	0.332	25.21	28M0D7W
	40 MHz	π/2 BPSK	2516 - 2670	35.8681	1.019	30.08	35M9G7W
		QPSK	2516 - 2670	37.9359	1.023	30.10	37M9G7W
		16QAM	2516 - 2670	37.8771	0.800	29.03	37M9D7W
		64QAM	2516 - 2670	37.9085	0.640	28.06	37M9D7W
		256QAM	2516 - 2670	37.9599	0.330	25.18	38M0D7W
	50 MHz	π/2 BPSK	2521 - 2665	45.7754	1.023	30.10	45M8G7W
		QPSK	2521 - 2665	47.7096	1.012	30.05	47M7G7W
		16QAM	2521 - 2665	47.6464	0.830	29.19	47M6D7W
		64QAM	2521 - 2665	47.6601	0.649	28.12	47M7D7W
		256QAM	2521 - 2665	47.4451	0.332	25.21	47M4D7W
	60 MHz	π/2 BPSK	2526 - 2660	57.9445	1.009	30.04	57M9G7W
		QPSK	2526 - 2660	57.8658	1.023	30.10	57M9G7W
		16QAM	2526 - 2660	57.9510	0.800	29.03	58M0D7W
		64QAM	2526 - 2660	57.9602	0.646	28.10	58M0D7W
		256QAM	2526 - 2660	57.8939	0.331	25.20	57M9D7W
	70 MHz	π/2 BPSK	2531 - 2655	64.3531	0.646	28.10	64M4G7W
		QPSK	2531 - 2655	67.5394	1.023	30.10	67M5G7W
		16QAM	2531 - 2655	67.8060	1.019	30.08	67M8D7W
		64QAM	2531 - 2655	67.5138	1.014	30.06	67M5D7W
		256QAM	2531 - 2655	67.4509	0.813	29.10	67M5D7W
	80 MHz	π/2 BPSK	2536 - 2650	77.1828	1.023	30.10	77M2G7W
		QPSK	2536 - 2650	77.6545	1.014	30.06	77M7G7W
		16QAM	2536 - 2650	77.5757	0.813	29.10	77M6D7W
		64QAM	2536 - 2650	77.6417	0.643	28.08	77M6D7W
		256QAM	2536 - 2650	77.6106	0.330	25.18	77M6D7W
	90 MHz	π/2 BPSK	2541 - 2645	87.0449	1.023	30.10	87M0G7W
		QPSK	2541 - 2645	87.8124	1.009	30.04	87M8G7W
		16QAM	2541 - 2645	87.6496	0.811	29.09	87M6D7W
		64QAM	2541 - 2645	87.6692	0.627	27.97	87M7D7W
		256QAM	2541 - 2645	87.5248	0.319	25.04	87M5D7W
	100 MHz	π/2 BPSK	2546 - 2640	96.6065	1.007	30.03	96M6G7W
		QPSK	2546 - 2640	97.4605	1.023	30.10	97M5G7W
		16QAM	2546 - 2640	97.6981	0.798	29.02	97M7D7W
		64QAM	2546 - 2640	97.4401	0.637	28.04	97M4D7W
		256QAM	2546 - 2640	97.5029	0.332	25.21	97M5D7W

EUT Overview

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	EIRP		Emission Designator
					Max. Power [W]	Max. Power [dBm]	
NR Band n41 (PC3)	10 MHz	π/2 BPSK	2496 - 2690	8.5824	0.661	28.20	8M58G7W
		QPSK	2496 - 2690	8.6232	0.650	28.13	8M62G7W
		16QAM	2496 - 2690	8.5956	0.515	27.12	8M60D7W
		64QAM	2496 - 2690	8.5920	0.412	26.15	8M59D7W
		256QAM	2496 - 2690	8.5983	0.209	23.20	8M60D7W
	15 MHz	π/2 BPSK	2501 - 2685	12.9111	0.661	28.20	12M9G7W
		QPSK	2501 - 2685	13.5883	0.650	28.13	13M6G7W
		16QAM	2501 - 2685	13.6188	0.515	27.12	13M6D7W
		64QAM	2501 - 2685	13.5882	0.412	26.15	13M6D7W
		256QAM	2501 - 2685	13.6078	0.209	23.20	13M6D7W
	20 MHz	π/2 BPSK	2506 - 2680	17.8748	0.644	28.09	17M9G7W
		QPSK	2506 - 2680	18.2913	0.515	27.12	18M3G7W
		16QAM	2506 - 2680	18.3103	0.405	26.07	18M3D7W
		64QAM	2506 - 2680	18.2726	0.661	28.20	18M3D7W
		256QAM	2506 - 2680	18.2915	0.646	28.10	18M3D7W
	30MHz	π/2 BPSK	2511 - 2675	26.8482	0.658	28.18	26M8G7W
		QPSK	2511 - 2675	27.9629	0.661	28.20	28M0G7W
		16QAM	2511 - 2675	27.9552	0.518	27.14	28M0D7W
		64QAM	2511 - 2675	27.9437	0.407	26.10	27M9D7W
		256QAM	2511 - 2675	27.9566	0.213	23.28	28M0D7W
	40 MHz	π/2 BPSK	2516 - 2670	35.8681	0.661	28.20	35M9G7W
		QPSK	2516 - 2670	37.9359	0.643	28.08	37M9G7W
		16QAM	2516 - 2670	37.8771	0.525	27.20	37M9D7W
		64QAM	2516 - 2670	37.9085	0.413	26.16	37M9D7W
		256QAM	2516 - 2670	37.9599	0.210	23.23	38M0D7W
	50 MHz	π/2 BPSK	2521 - 2665	45.7754	0.659	28.19	45M8G7W
		QPSK	2521 - 2665	47.7096	0.661	28.20	47M7G7W
		16QAM	2521 - 2665	47.6464	0.528	27.23	47M6D7W
		64QAM	2521 - 2665	47.6601	0.418	26.21	47M7D7W
		256QAM	2521 - 2665	47.4451	0.215	23.32	47M4D7W
	60 MHz	π/2 BPSK	2526 - 2660	57.9445	0.638	28.05	57M9G7W
		QPSK	2526 - 2660	57.8658	0.661	28.20	57M9G7W
		16QAM	2526 - 2660	57.9510	0.511	27.08	58M0D7W
		64QAM	2526 - 2660	57.9602	0.416	26.19	58M0D7W
		256QAM	2526 - 2660	57.8939	0.214	23.30	57M9D7W
	70 MHz	π/2 BPSK	2531 - 2655	64.3531	0.395	25.97	64M4G7W
		QPSK	2531 - 2655	67.5394	0.661	28.20	67M5G7W
		16QAM	2531 - 2655	67.8060	0.661	28.20	67M8D7W
		64QAM	2531 - 2655	67.5138	0.649	28.12	67M5D7W
		256QAM	2531 - 2655	67.4509	0.530	27.24	67M5D7W
	80 MHz	π/2 BPSK	2536 - 2650	77.1828	0.655	28.16	77M2G7W
		QPSK	2536 - 2650	77.6545	0.661	28.20	77M7G7W
		16QAM	2536 - 2650	77.5757	0.530	27.24	77M6D7W
		64QAM	2536 - 2650	77.6417	0.424	26.27	77M6D7W
		256QAM	2536 - 2650	77.6106	0.215	23.33	77M6D7W
	90 MHz	π/2 BPSK	2541 - 2645	87.0449	0.661	28.20	87M0G7W
		QPSK	2541 - 2645	87.8124	0.661	28.20	87M8G7W
		16QAM	2541 - 2645	87.6496	0.526	27.21	87M6D7W
		64QAM	2541 - 2645	87.6692	0.414	26.17	87M7D7W
		256QAM	2541 - 2645	87.5248	0.214	23.30	87M5D7W
	100 MHz	π/2 BPSK	2546 - 2640	96.6065	0.661	28.20	96M6G7W
		QPSK	2546 - 2640	97.4605	0.635	28.03	97M5G7W
		16QAM	2546 - 2640	97.6981	0.526	27.21	97M7D7W
		64QAM	2546 - 2640	97.4401	0.413	26.16	97M4D7W
		256QAM	2546 - 2640	97.5029	0.207	23.16	97M5D7W

EUT Overview

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.

- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).

- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.

- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Agreements (MRAs).

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID:BCGA3355**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: M323DRYF34, G52L73WFXX, LN9DXV6D7V, H9HHAF0006K0000VYP, H9HH8N0000N0000VYR

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8)

This device supports BT Beamforming

Measurements for LTE Band 41, FR1 Band n41, and LTE ULCA B41 were performed with NS04 for all antennas. Measurements for LTE Band 30 were performed with NS21 for all antennas.

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Bluetooth 2.4GHz	WLAN	WIFI 5GHz	LTE / FR1 NR		
		BDR, EDR, HDR4/8, LE1/2M	802.11 b/g/n/ax	802.11 a/n/ac/ax	LB	MB/HB	Ultra High Band
Ant 3a	Config 1	✓	×	✓	×	✓	×
Ant 3a	Config 2	✓	×	✓	×	×	×
Ant 3a	Config 3	×	✓	×	×	✓	×
Ant 1a	Config 4	✓	×	×	×	×	✓
Ant 1a	Config 5	×	✓	×	×	×	✓
Ant 1b	Config 6	×	×	✓	×	✓	×

Table 2-1. Simultaneous Transmission Configurations

✓ = Support; × = Not Support

Note:

1. All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Config 1.

2. Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz), in both connected and disconnected modes, and Wi-Fi (2.4GHz) - Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5GHz on separate antenna.

2.3 Antenna Description

The following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain [dBi]			
	Antenna 4	Antenna 2b	Antenna 3a	Antenna 1b
LTE Band 30	1.9	-0.7	1.8	-4.2
NR Band n30				
LTE Band 7	2.6	-1.2	2.7	-3.6
NR Band n7				
LTE Band 41	2.4	-1.1	2.5	-2.9
NR Band n41				

Table 2-2. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNPM0WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
	w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
4	DC Power Supply	Model:	KPS3010D	S/N:	N/A

Table 2-3. Test Support Equipment

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

All possible simultaneous transmission configurations have been investigated and the worst case config has been reported.

Description	LTE B41	Bluetooth	UNII
Antenna	Antenna 3a	Antenna 3a	Antenna 3a
Channel	40640	78	36
Operating Frequency (MHz)	2595	2480	5180
Mode/Modulation	QPSK/1RB/20MHz	GFSK ePA	802.11n

Table 2-4. Worst Case Simultaneous Transmission Configuration

2.6 Software and Firmware

The test was conducted with firmware version 22D8 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the documents titled “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015 and TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure……..……None

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$EIRP_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8;\ \text{where D is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	2.07
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz-1GHz)	4.85
Radiated Disturbance (1-18GHz)	5.08
Radiated Disturbance (>18GHz)	5.22

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/14/2024	Annual	3/14/2025	T058701-01
ESPEC	SU-241	Tabletop Temperature Chamber	10/24/2024	Annual	10/24/2025	92009574
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/9/2024	Annual	4/9/2025	00218555
Fairview Microwave	FMCA1975-36	30MHz-40GHz Conducted RF Cable *	6/10/2024	Annual	6/10/2025	-
Fairview Microwave	M2CP1122-10	30MHz-40GHz Conducted Coupler *	6/10/2024	Annual	6/10/2025	1946
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2024	Annual	6/10/2025	-
Keysight Technology	N9040B	UXA Signal Analyzer	5/28/2024	Annual	5/28/2025	MY57212015
Rohde & Schwarz	FSW67	Signal and Spectrum Analyzer (2Hz-67GHz)	7/5/2024	Annual	7/5/2025	101366
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/14/2024	Annual	8/14/2025	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/29/2024	Annual	5/29/2025	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/1/2024	Annual	5/1/2025	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	7/3/2024	Annual	7/3/2025	102356
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/30/2023	Annual	10/2/2025	191707
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/21/2024	Annual	10/21/2025	187423
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/10/2024	Annual	6/10/2025	100057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/21/2024	Annual	6/21/2025	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2024	Annual	4/24/2025	101364
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/29/2024	Annual	4/29/2025	00304

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. * denotes passive equipment that have been internally verified/calibrated.

6.0 SAMPLE CALCULATIONS

Emission Designator

π/2 BPSK / QPSK Modulation

Emission Designator = 8M62G7W
BW = 8.62 MHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination of Any

QAM Modulation

Emission Designator = 8M45D7W
BW = 8.45 MHz
D = Amplitude/Angle Modulated
7 = Quantized/Digital Info
W = Combination of Any

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm – (-24.80) = 50.3 dBc.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.

FCC ID: BCGA3355

FCC Classification: PCS Licensed Transmitter (PCB)

Mode(s): LTE/NR/ULCA

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions (LTE Band 30)	2.1051, 27.53(a)	Undesirable emissions must meet the limits detailed in 27.53(a)	PASS	Sections 7.3, 7.4
	Conducted Band Edge / Spurious Emissions (LTE Band 7)	2.1051, 27.53(m)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Sections 7.3, 7.4
	Conducted Band Edge / Spurious Emissions (LTE Band 41)			PASS	Sections 7.3, 7.4
	Conducted Band Edge / Spurious Emissions (NR Band n41)			PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Additional Maximum Power Reduction (A-MPR)	2.1046	N/A	N/A	Section 7.5
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 30)	27.50(a)(3)	< 0.25 Watts max. EIRP	PASS	Section 7.6
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 7)	27.50(h)(2)	< 2 Watts max. EIRP	PASS	Section 7.6
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 41)			PASS	Section 7.6
	Effective Radiated Power / Equivalent Isotropic Radiated Power (NR Band n41)			PASS	Section 7.6
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block over the temperature and voltage range as tested	PASS	Section 7.8
RADIATED	Radiated Spurious Emissions (LTE Band 30)	2.1053, 27.53(a)	> 70 + 10log10(P[Watts])	PASS	Section 7.7
	Radiated Spurious Emissions (LTE Band 7)	2.1053, 27.53(m)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Section 7.7
	Radiated Spurious Emissions (LTE Band 41)			PASS	Section 7.7
	Radiated Spurious Emissions (NR Band n41)			PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.

3. All antenna ports conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized was Element EMC Software Tool v1.1.

5. For radiated spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 3.1.0.

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

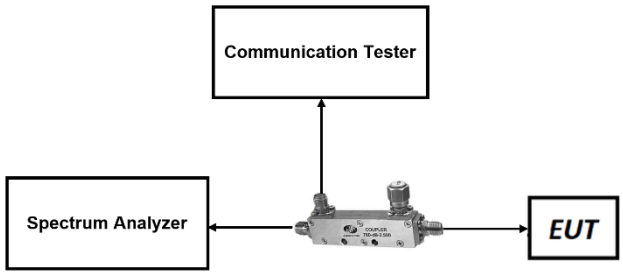

Figure 7-1. LTE Test Instrument & Measurement Setup



Figure 7-2. FR1 Test Instrument & Measurement Setup

Test Notes

None.

LTE Band 30

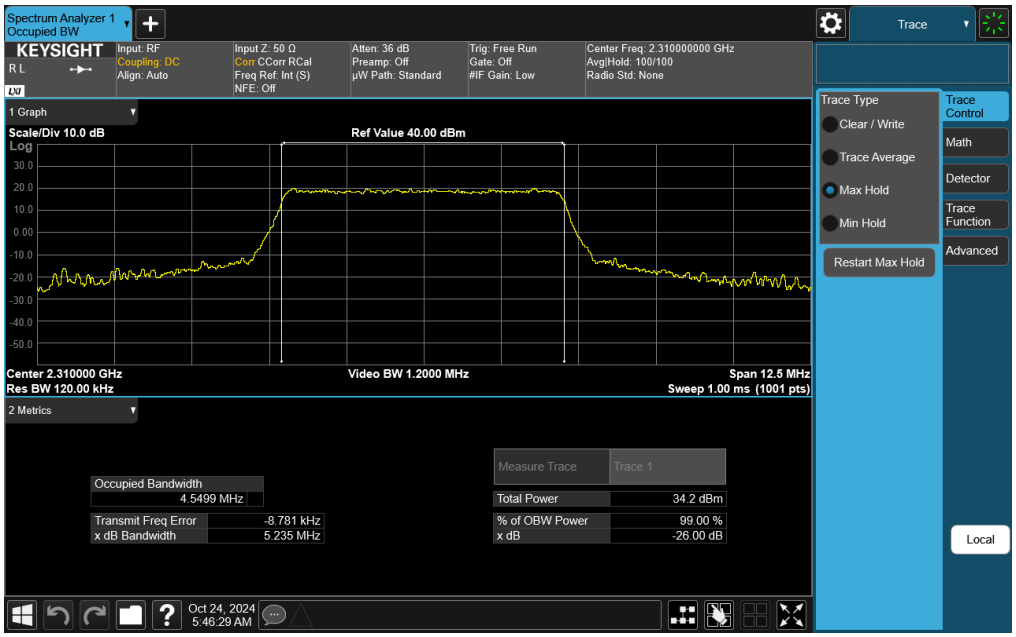

Plot 7-1. Occupied Bandwidth Plot (LTE Band 30 - 5MHz QPSK - Full RB)

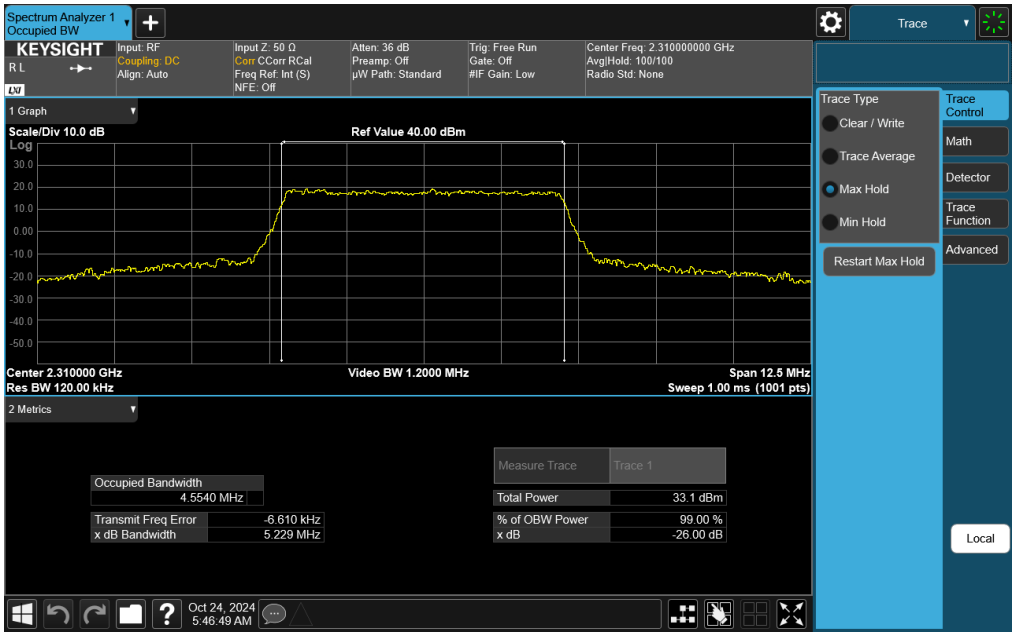

Plot 7-2. Occupied Bandwidth Plot (LTE Band 30 - 5MHz 16-QAM - Full RB)

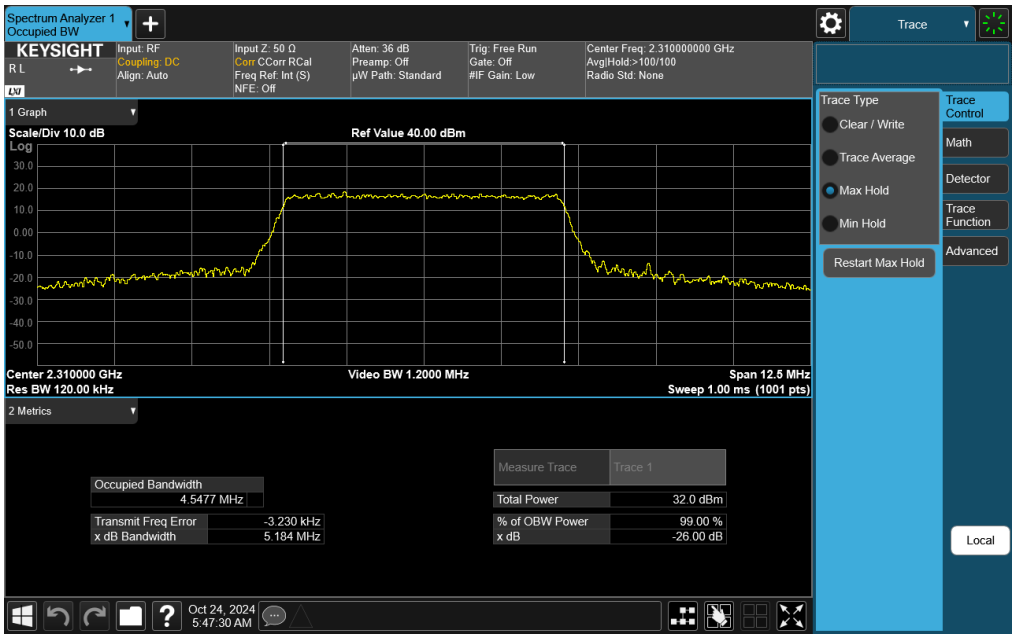

Plot 7-3. Occupied Bandwidth Plot (LTE Band 30 - 5MHz 64-QAM - Full RB)

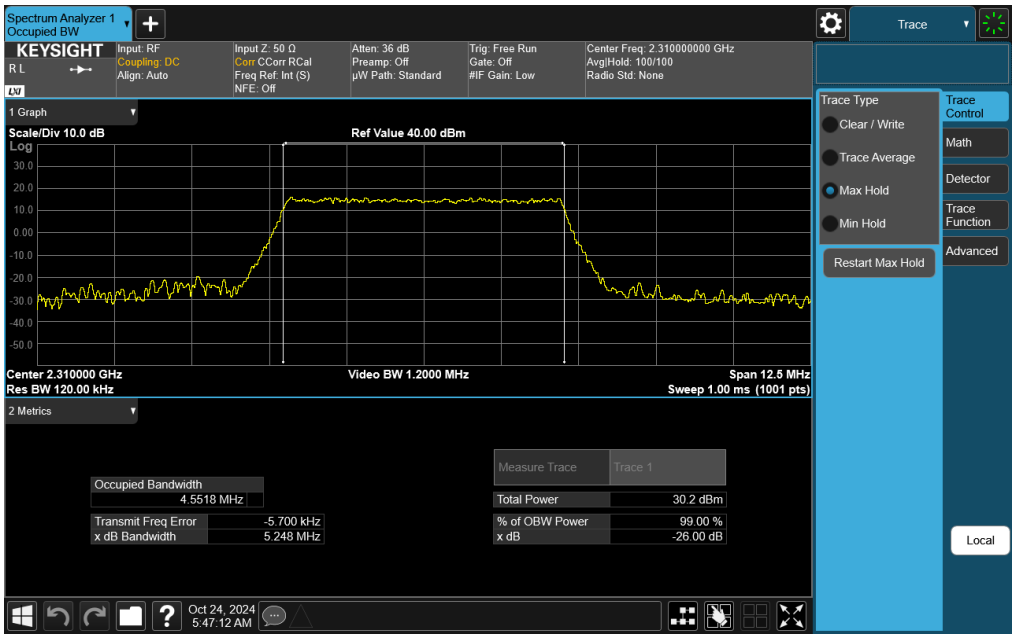

Plot 7-4. Occupied Bandwidth Plot (LTE Band 30 - 5MHz 256-QAM - Full RB)

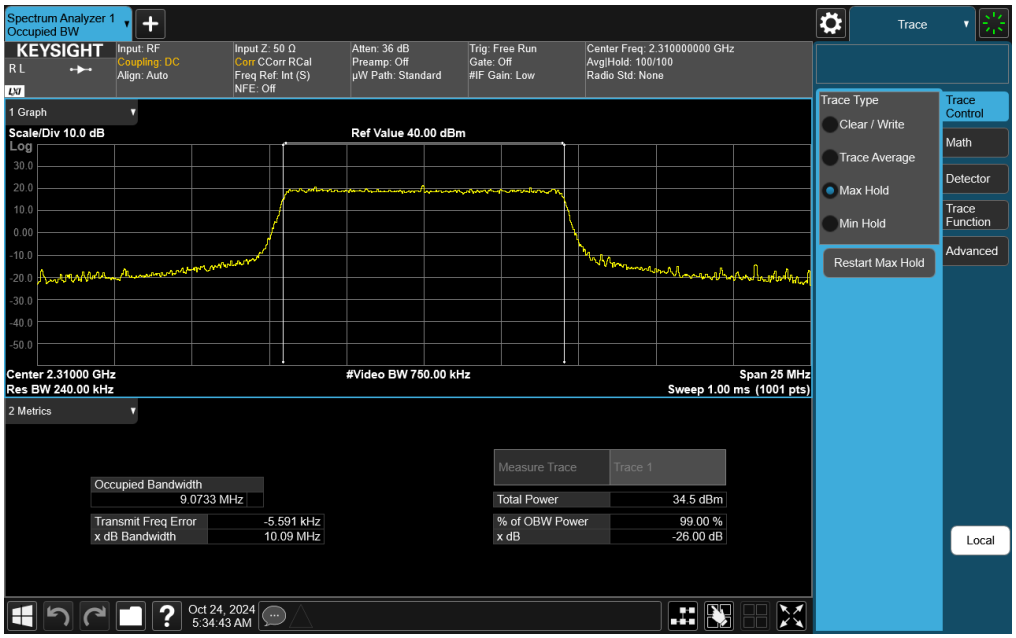

Plot 7-5. Occupied Bandwidth Plot (LTE Band 30 - 10MHz QPSK - Full RB)

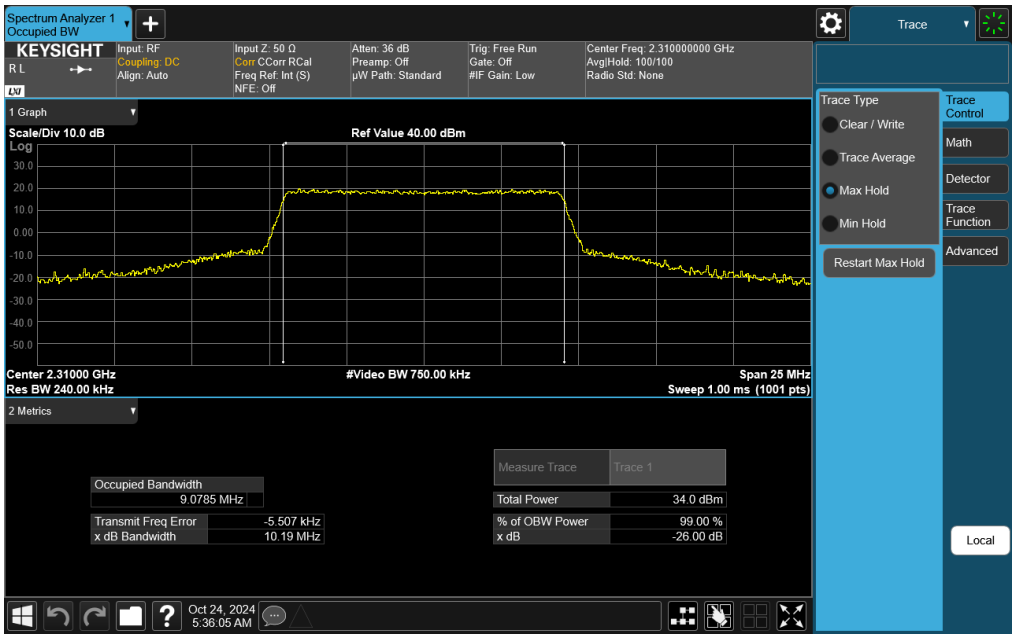

Plot 7-6. Occupied Bandwidth Plot (LTE Band 30 - 10MHz 16-QAM - Full RB)

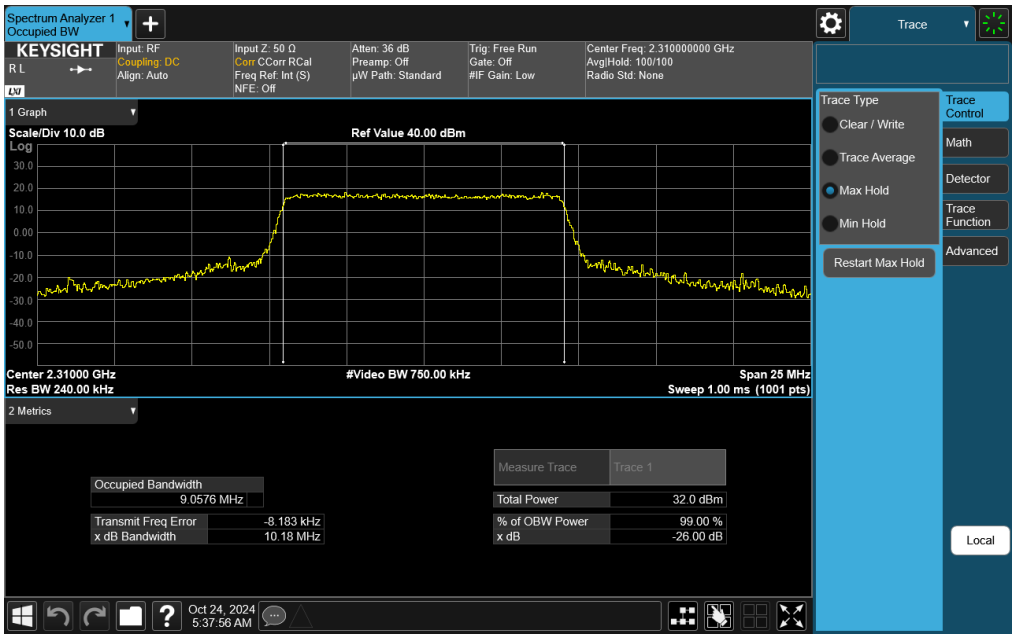

Plot 7-7. Occupied Bandwidth Plot (LTE Band 30 - 10MHz 64-QAM - Full RB)

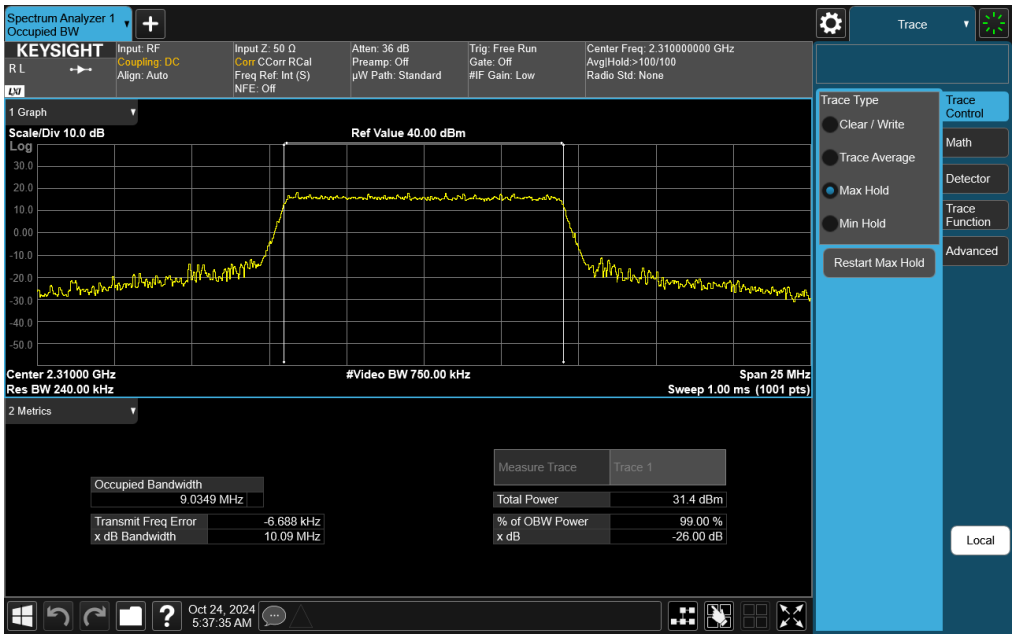

Plot 7-8. Occupied Bandwidth Plot (LTE Band 30 - 10MHz 256-QAM - Full RB)

LTE Band 7

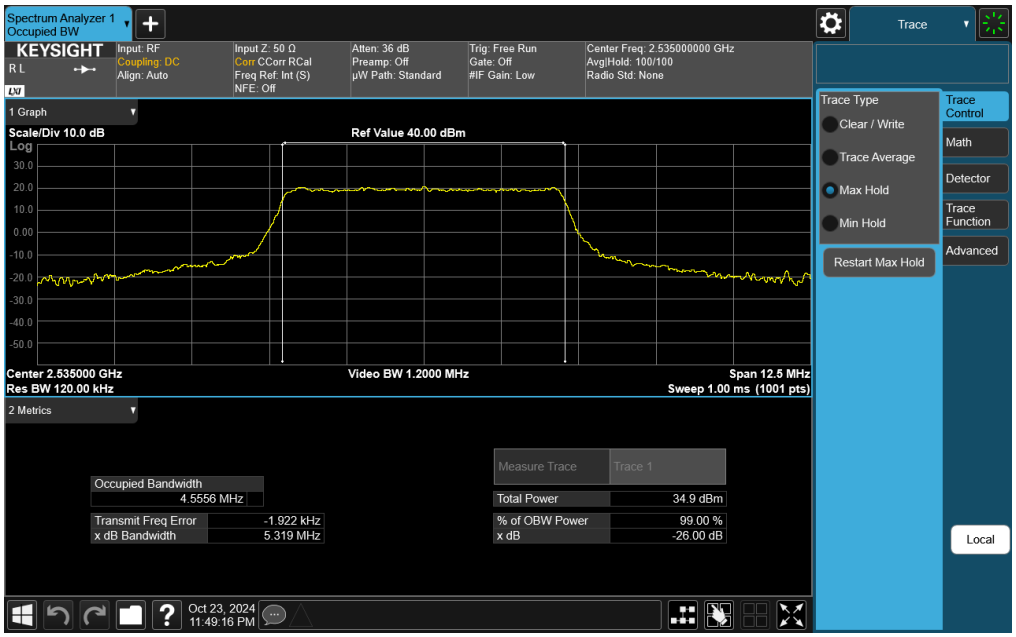

Plot 7-9. Occupied Bandwidth Plot (LTE Band 7 - 5MHz QPSK - Full RB)

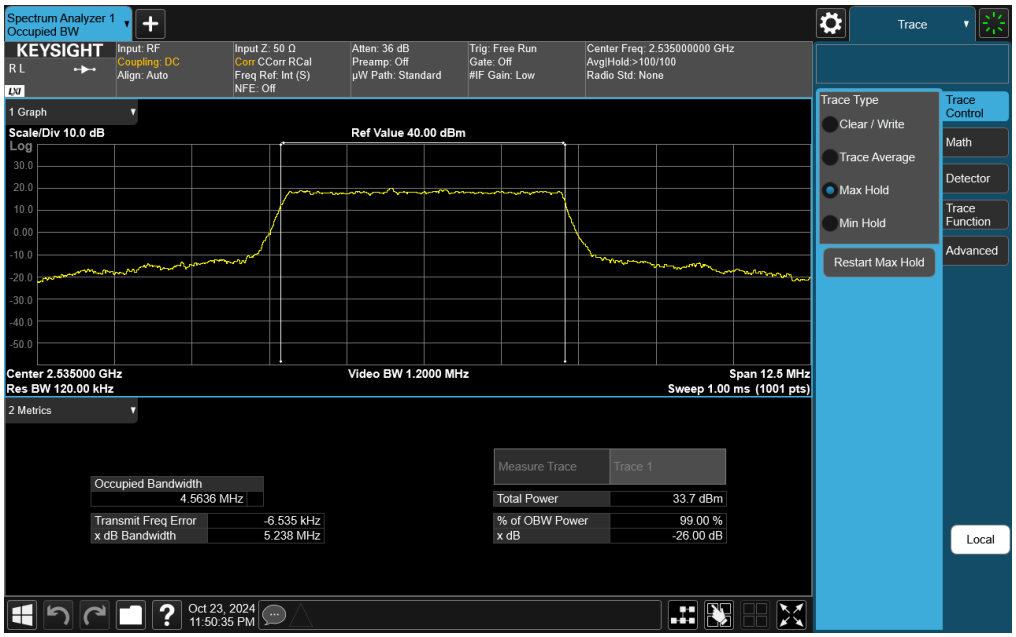

Plot 7-10. Occupied Bandwidth Plot (LTE Band 7 - 5MHz 16-QAM - Full RB)

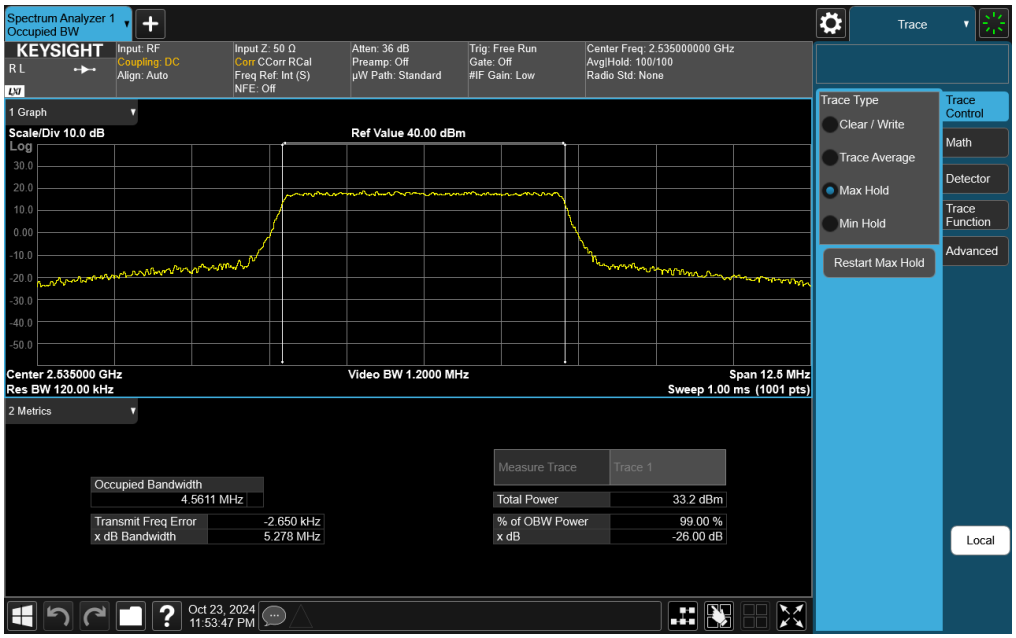

Plot 7-11. Occupied Bandwidth Plot (LTE Band 7 - 5MHz 64-QAM - Full RB)

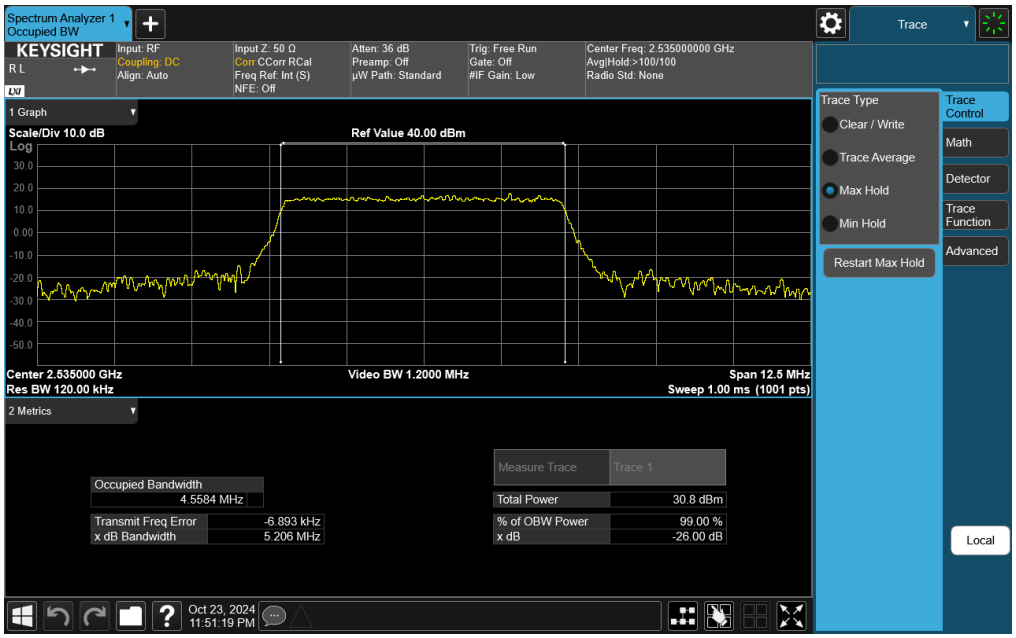

Plot 7-12. Occupied Bandwidth Plot (LTE Band 7 - 5MHz 256-QAM - Full RB)

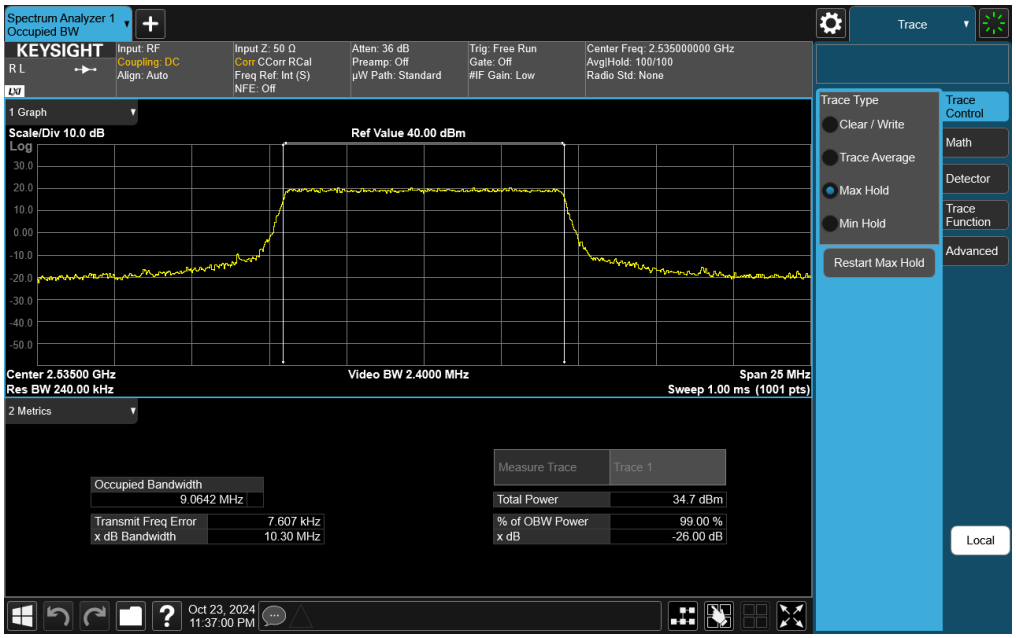

Plot 7-13. Occupied Bandwidth Plot (LTE Band 7 - 10MHz QPSK - Full RB)

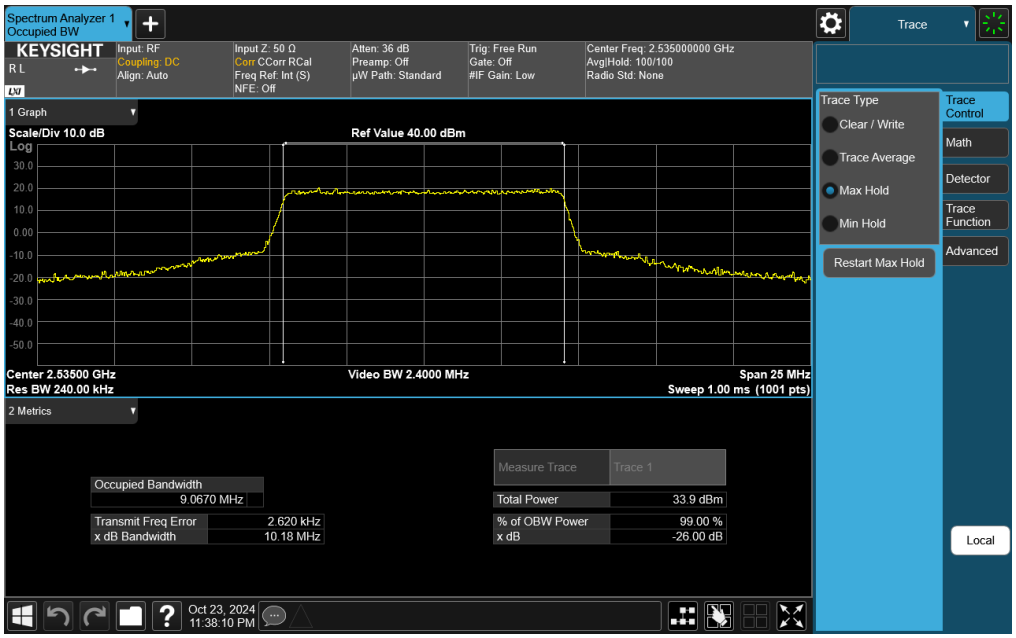

Plot 7-14. Occupied Bandwidth Plot (LTE Band 7 - 10MHz 16-QAM - Full RB)

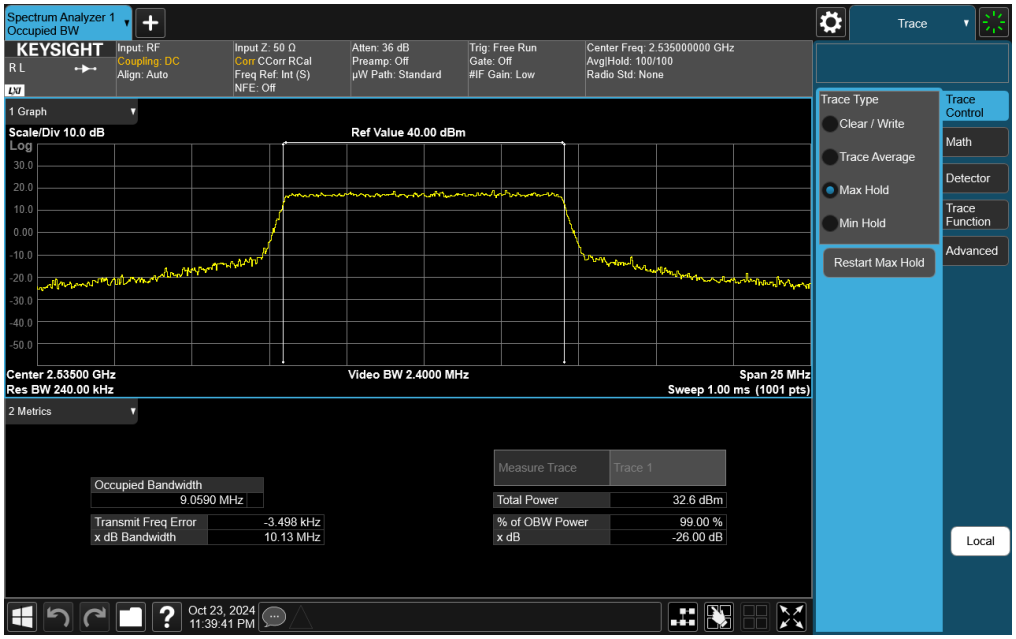

Plot 7-15. Occupied Bandwidth Plot (LTE Band 7 - 10MHz 64-QAM - Full RB)

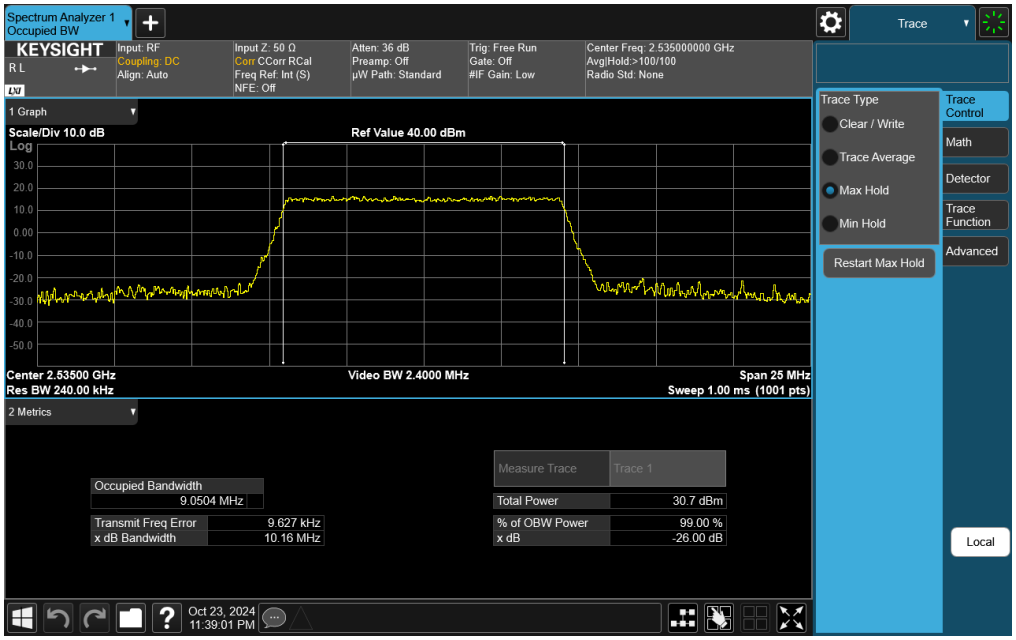

Plot 7-16. Occupied Bandwidth Plot (LTE Band 7 - 10MHz 256-QAM - Full RB)

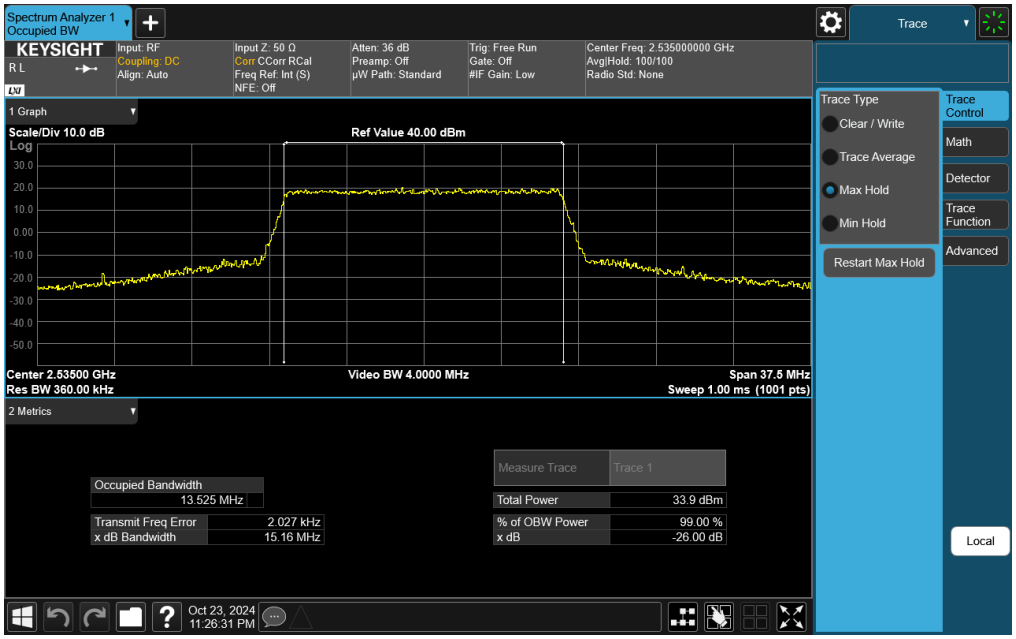

Plot 7-17. Occupied Bandwidth Plot (LTE Band 7 - 15MHz QPSK - Full RB)

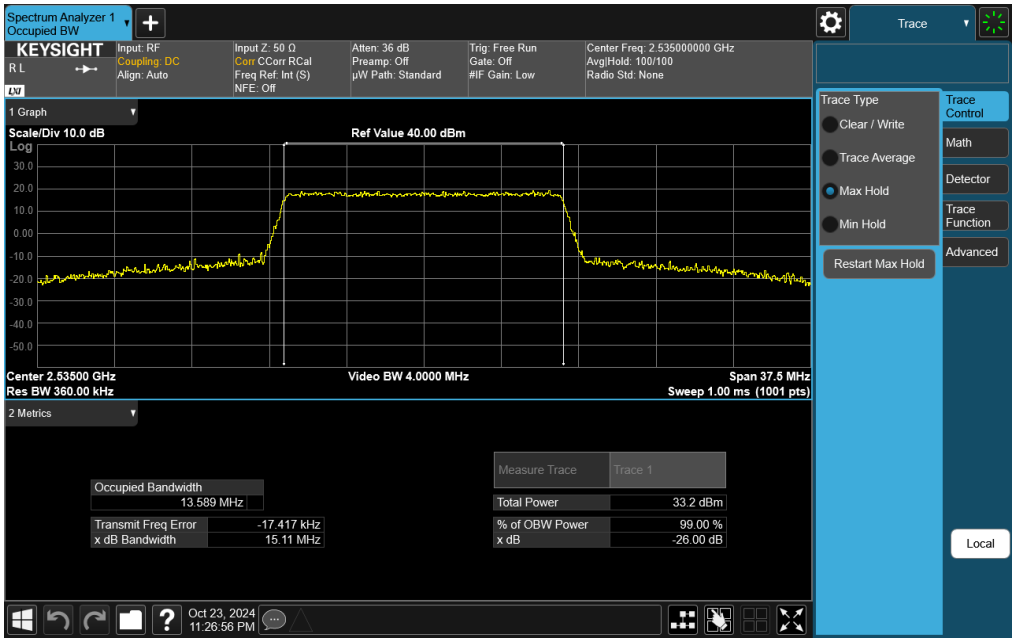

Plot 7-18. Occupied Bandwidth Plot (LTE Band 7 - 15MHz 16-QAM - Full RB)

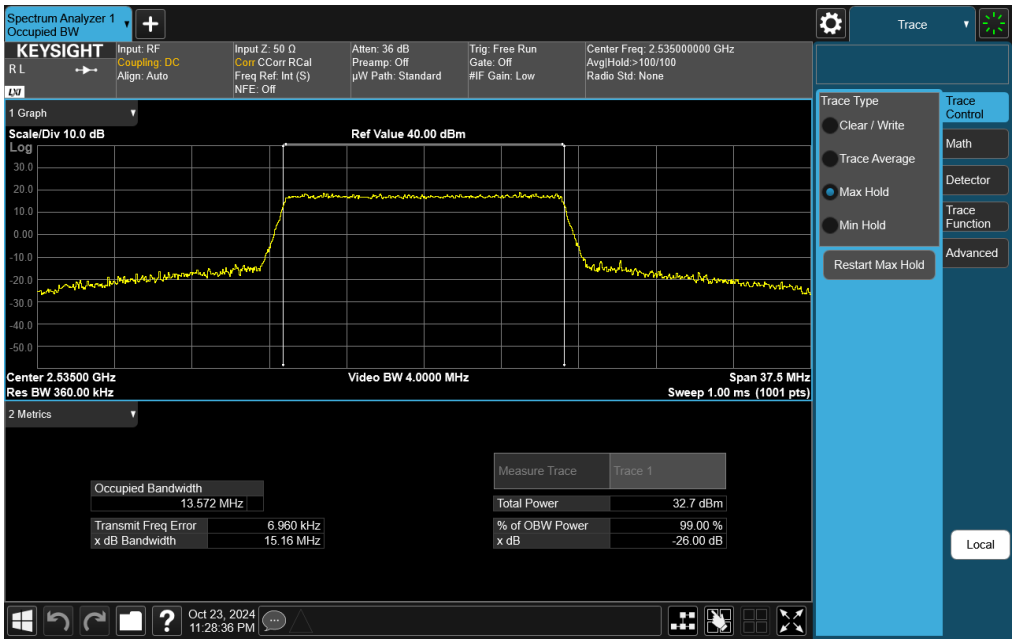

Plot 7-19. Occupied Bandwidth Plot (LTE Band 7 - 15MHz 64-QAM - Full RB)

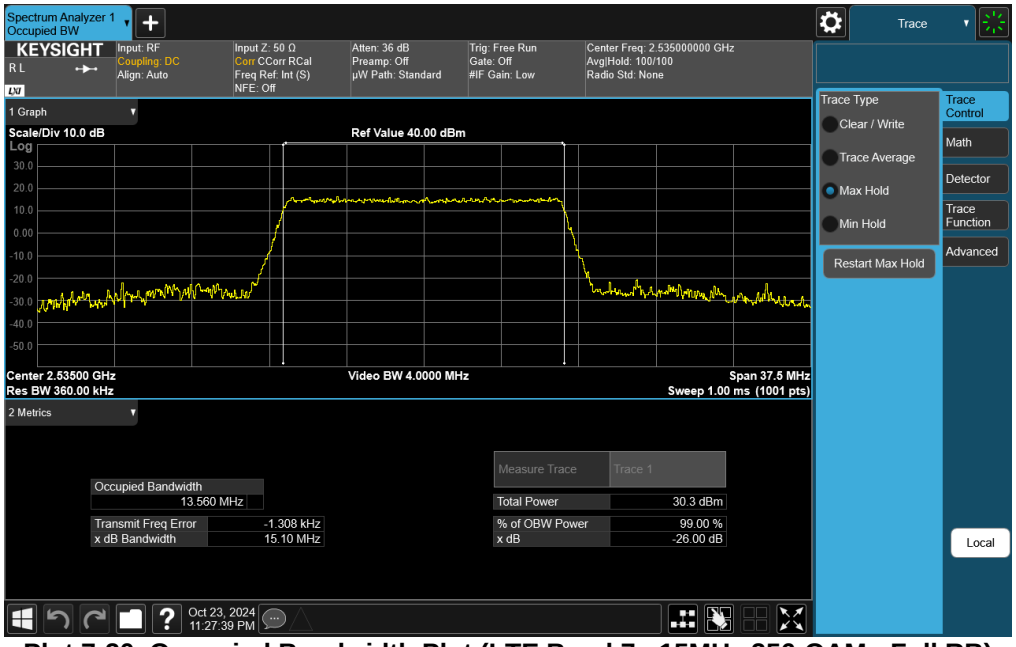

Plot 7-20. Occupied Bandwidth Plot (LTE Band 7 - 15MHz 256-QAM - Full RB)

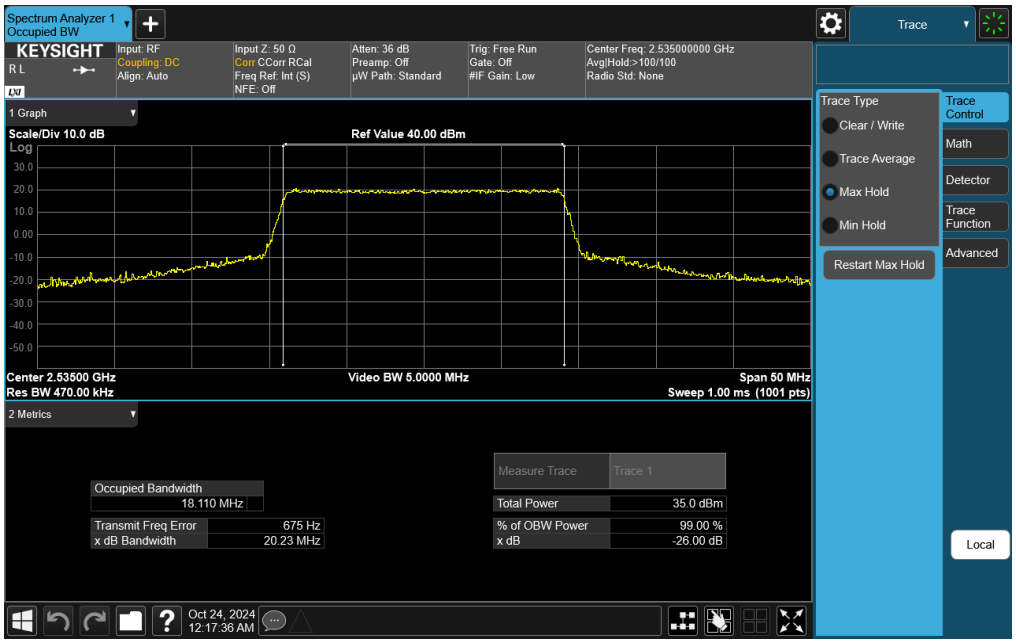

Plot 7-21. Occupied Bandwidth Plot (LTE Band 7 - 20MHz QPSK - Full RB)

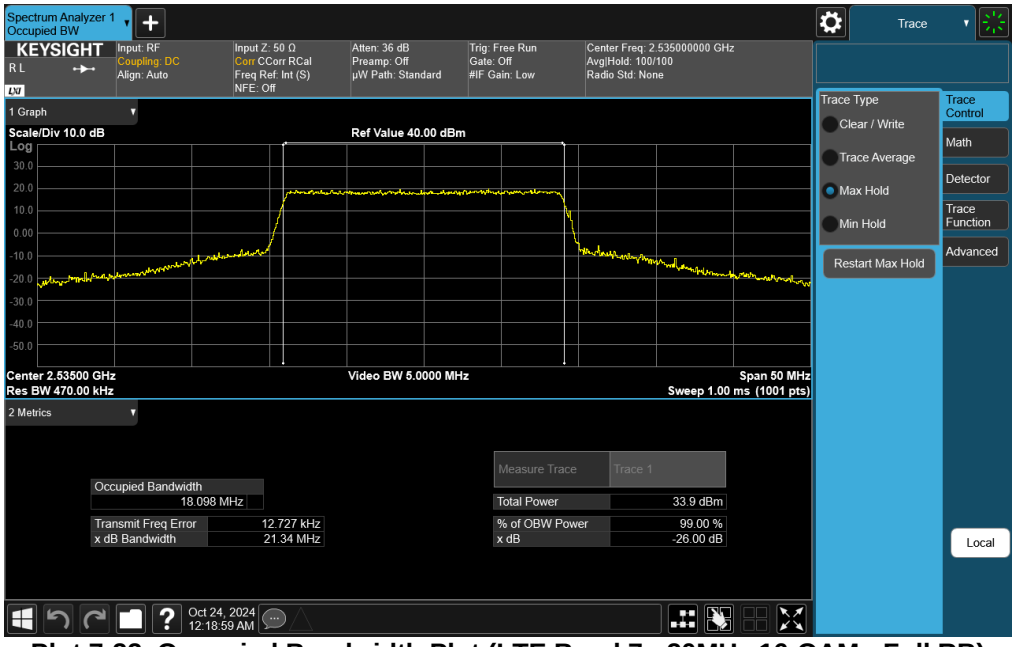

Plot 7-22. Occupied Bandwidth Plot (LTE Band 7 - 20MHz 16-QAM - Full RB)

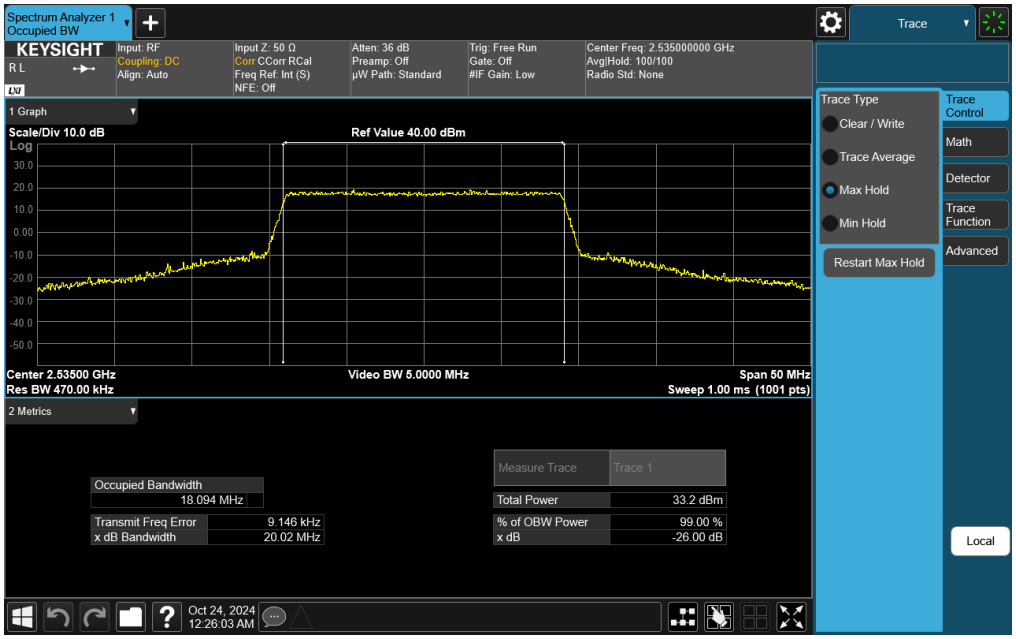

Plot 7-23. Occupied Bandwidth Plot (LTE Band 7 - 20MHz 64-QAM - Full RB)

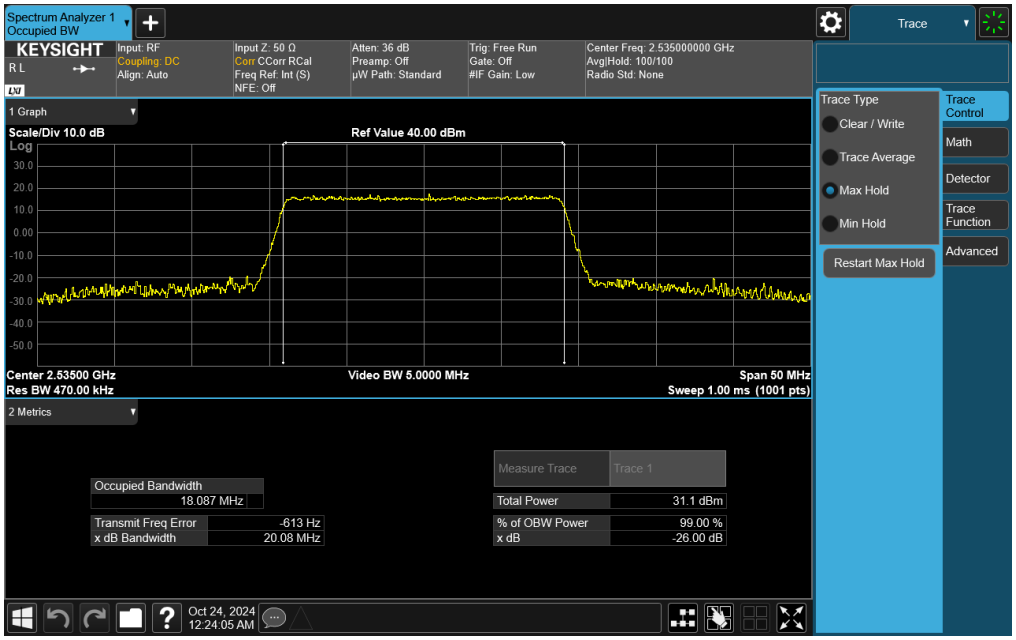

Plot 7-24. Occupied Bandwidth Plot (LTE Band 7 - 20MHz 256-QAM - Full RB)

LTE Band 41

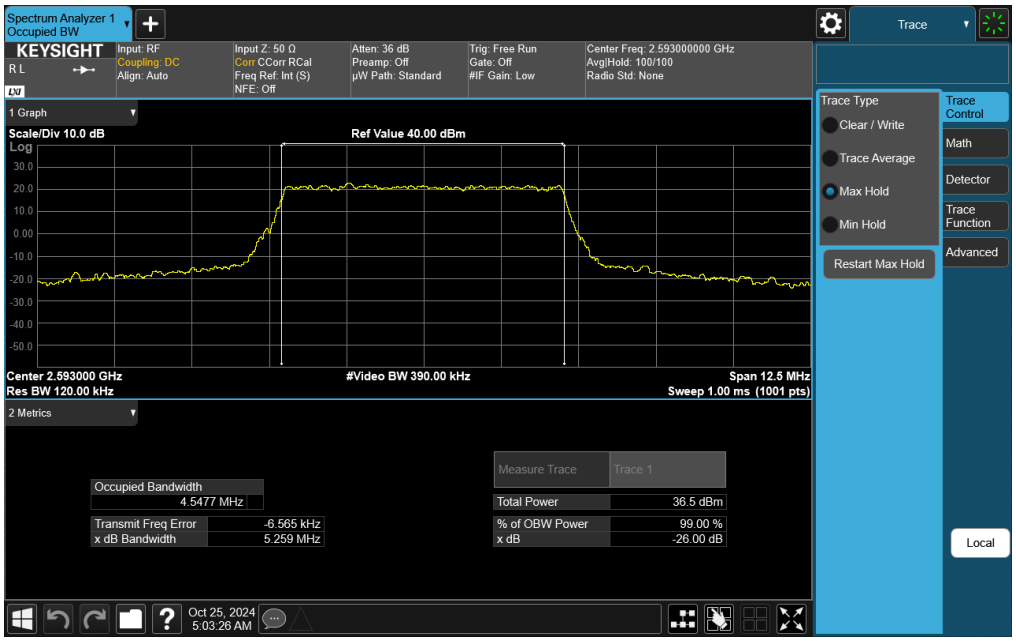

Plot 7-25. Occupied Bandwidth Plot (LTE Band 41 - 5MHz QPSK - Full RB)

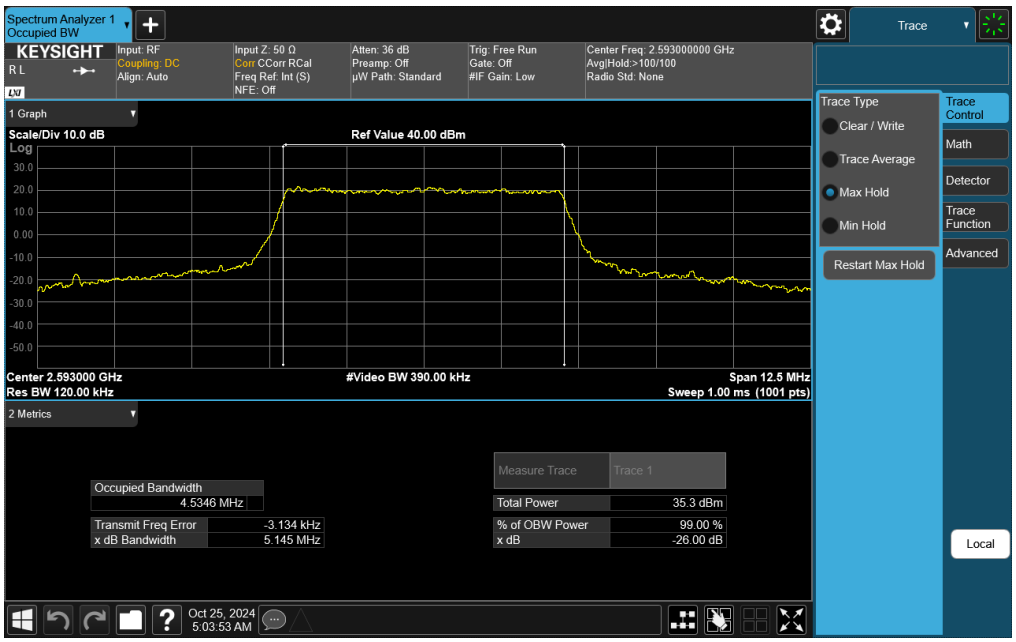

Plot 7-26. Occupied Bandwidth Plot (LTE Band 41 - 5MHz 16-QAM - Full RB)

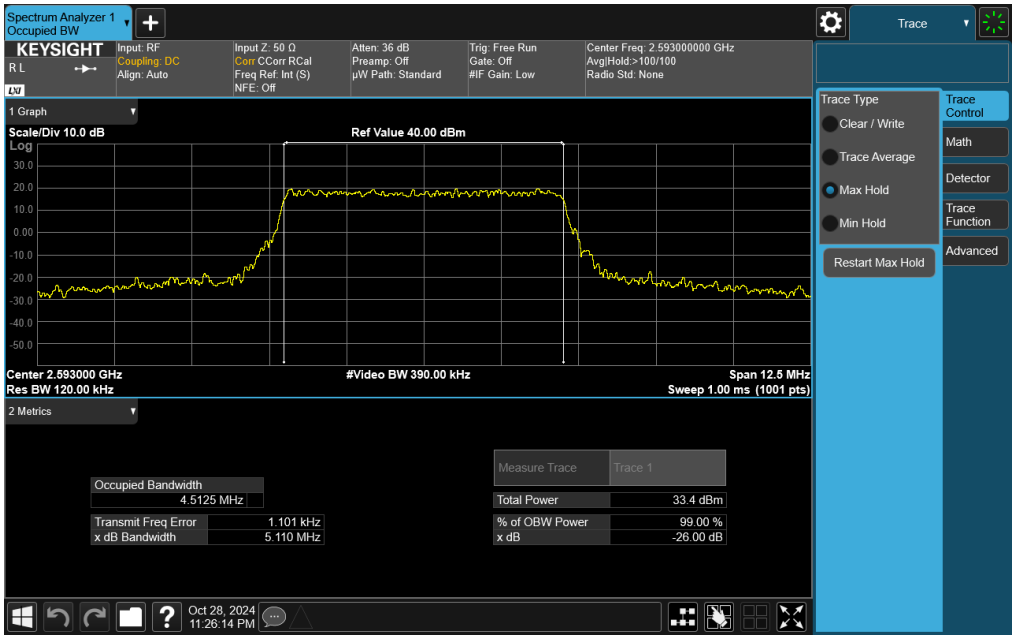

Plot 7-27. Occupied Bandwidth Plot (LTE Band 41 - 5MHz 64-QAM - Full RB)

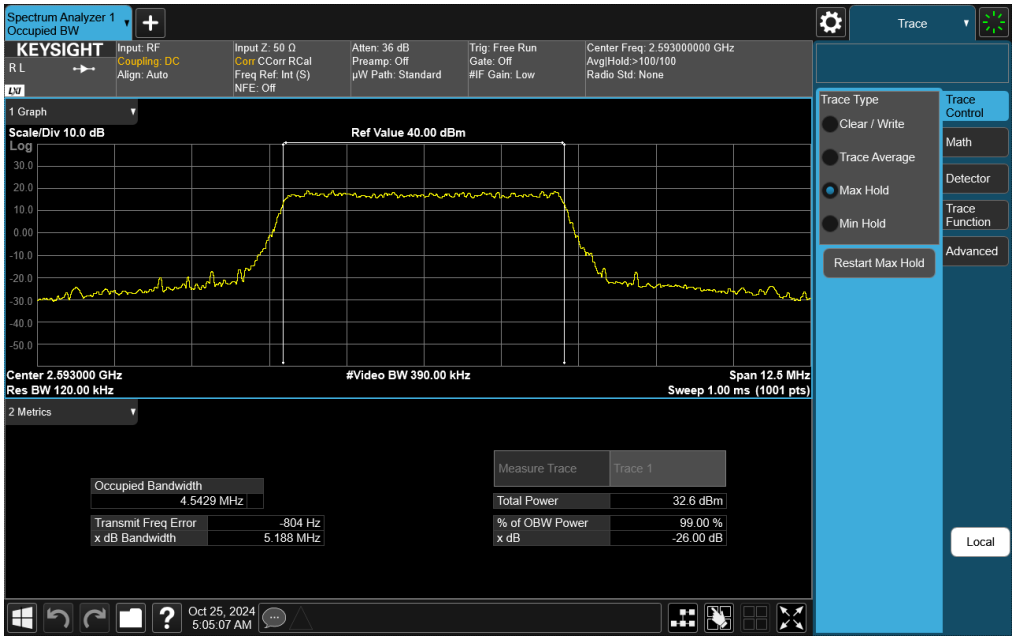

Plot 7-28. Occupied Bandwidth Plot (LTE Band 41 - 5MHz 256-QAM - Full RB)

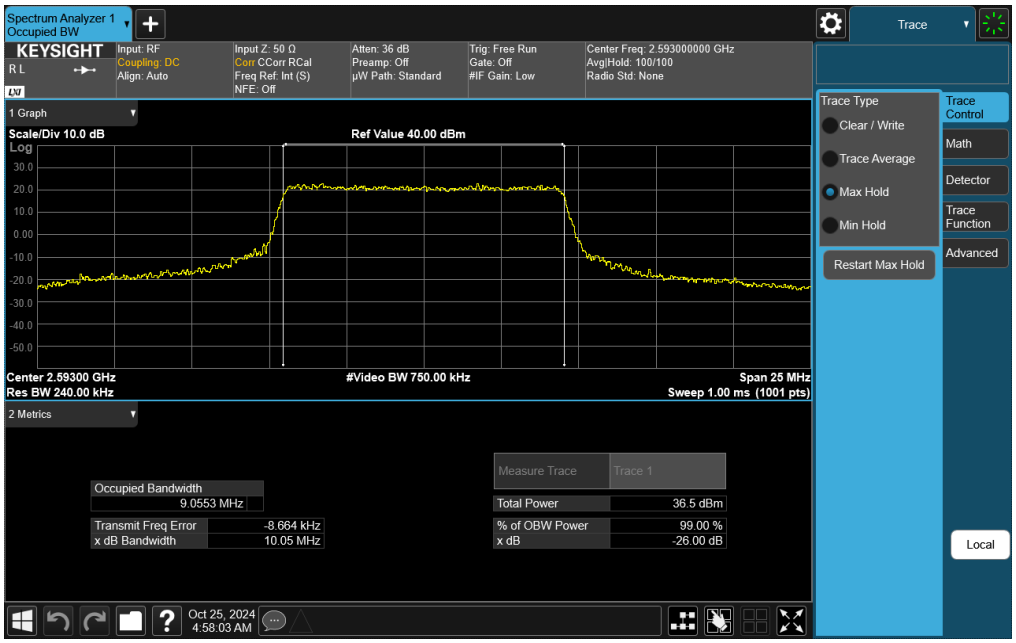

Plot 7-29. Occupied Bandwidth Plot (LTE Band 41 - 10MHz QPSK - Full RB)

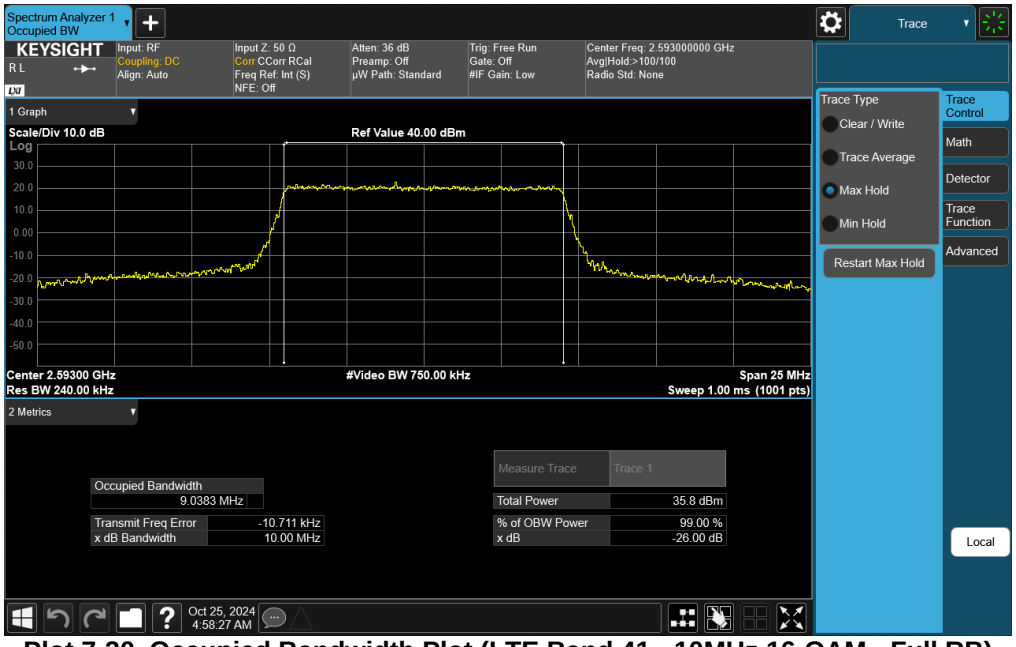

Plot 7-30. Occupied Bandwidth Plot (LTE Band 41 - 10MHz 16-QAM - Full RB)

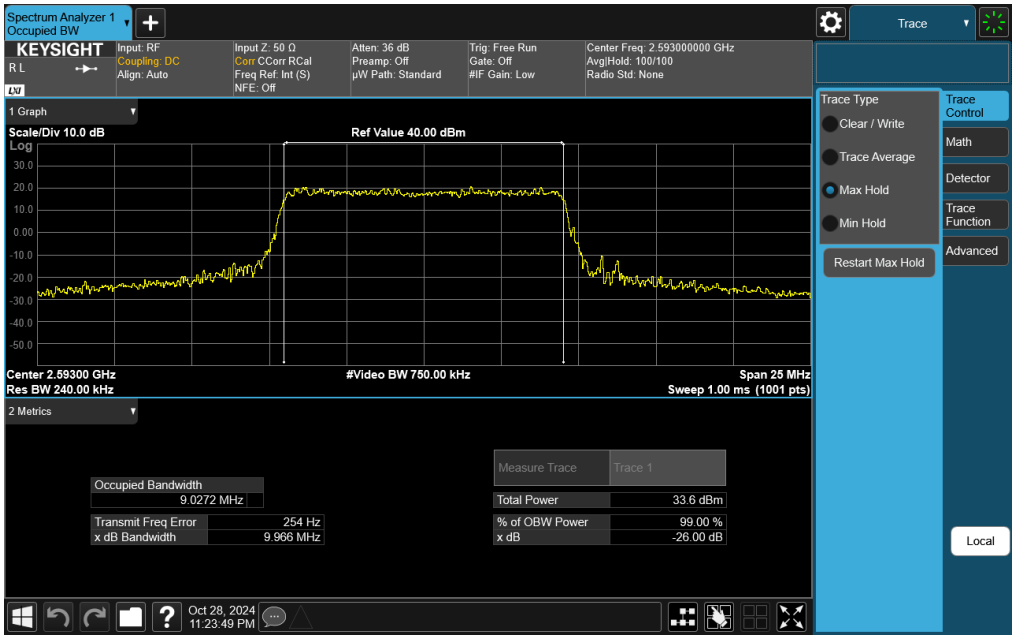

Plot 7-31. Occupied Bandwidth Plot (LTE Band 41 - 10MHz 64-QAM - Full RB)

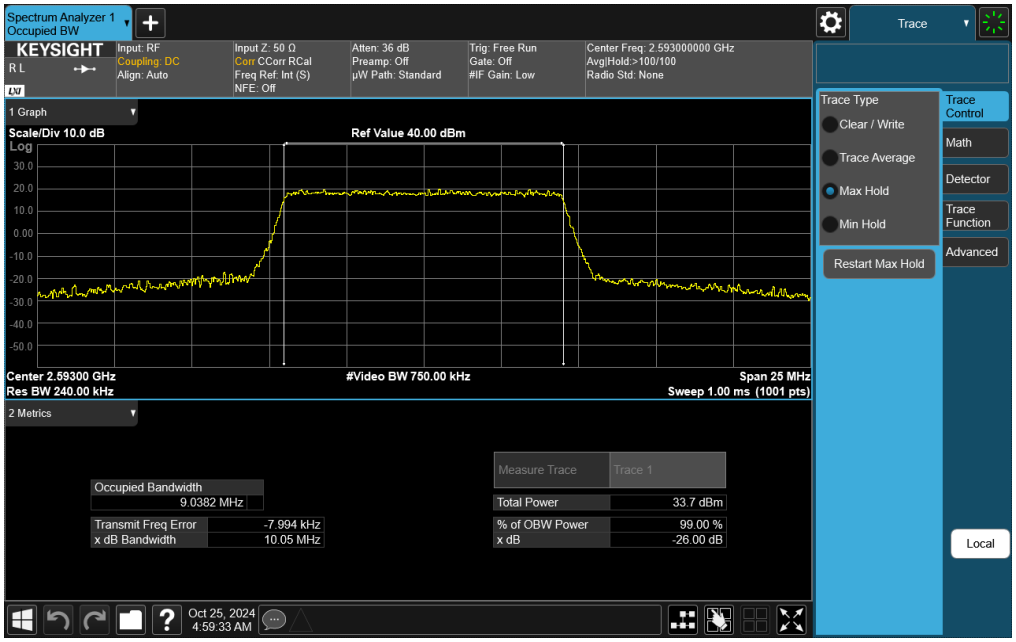

Plot 7-32. Occupied Bandwidth Plot (LTE Band 41 - 10MHz 256-QAM - Full RB)

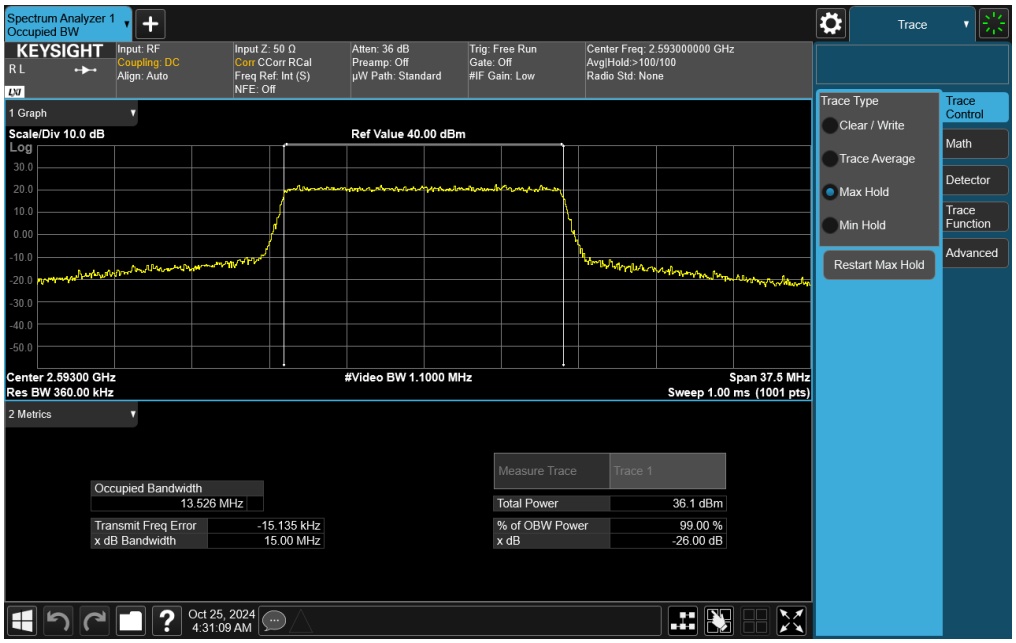

Plot 7-33. Occupied Bandwidth Plot (LTE Band 41 - 15MHz QPSK - Full RB)

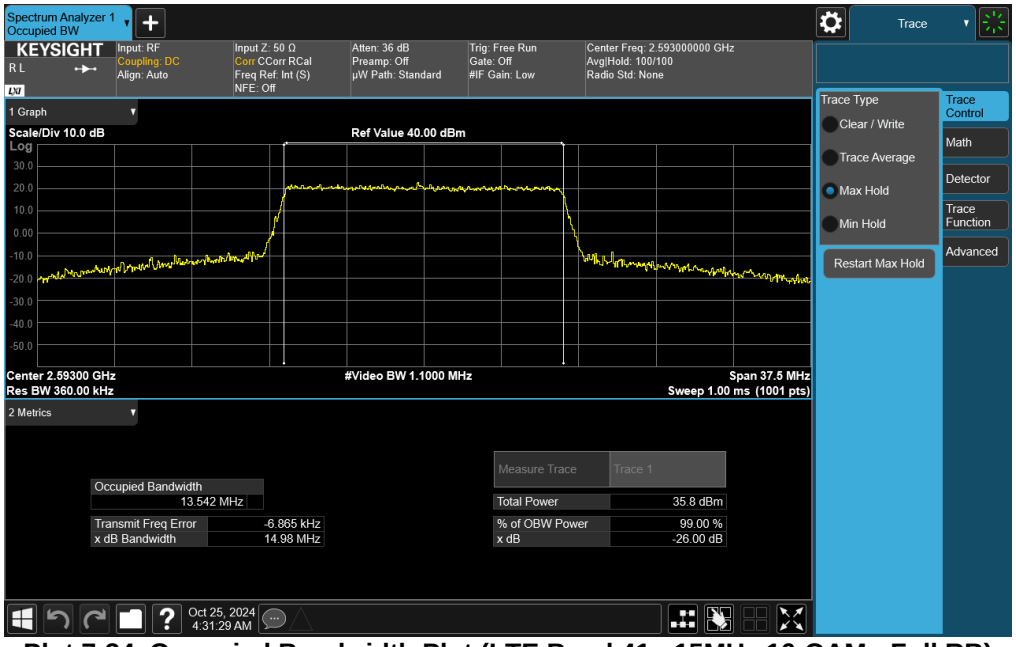

Plot 7-34. Occupied Bandwidth Plot (LTE Band 41 - 15MHz 16-QAM - Full RB)

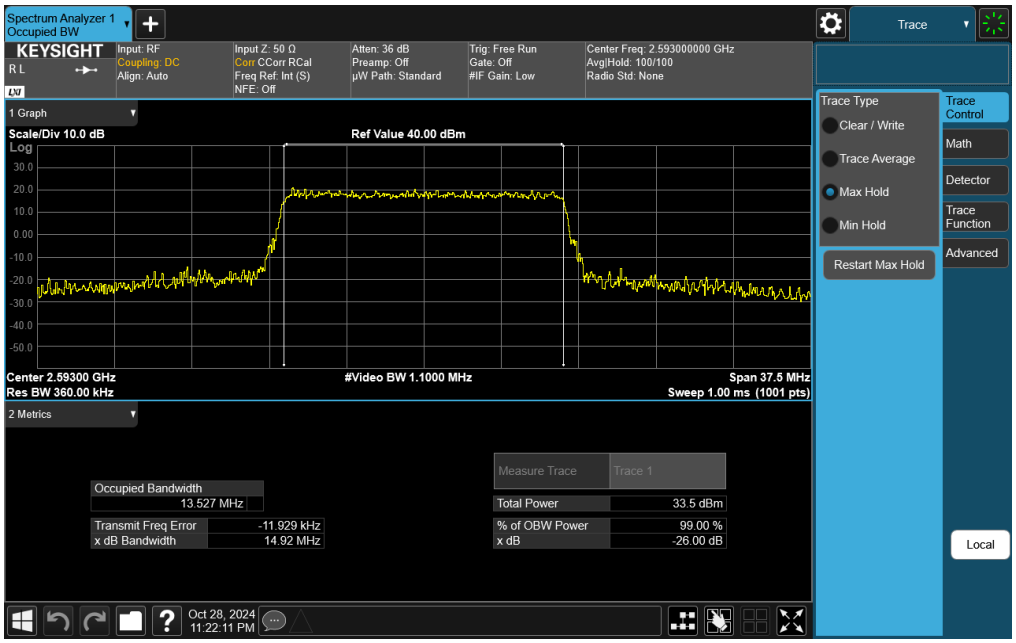

Plot 7-35. Occupied Bandwidth Plot (LTE Band 41 - 15MHz 64-QAM - Full RB)

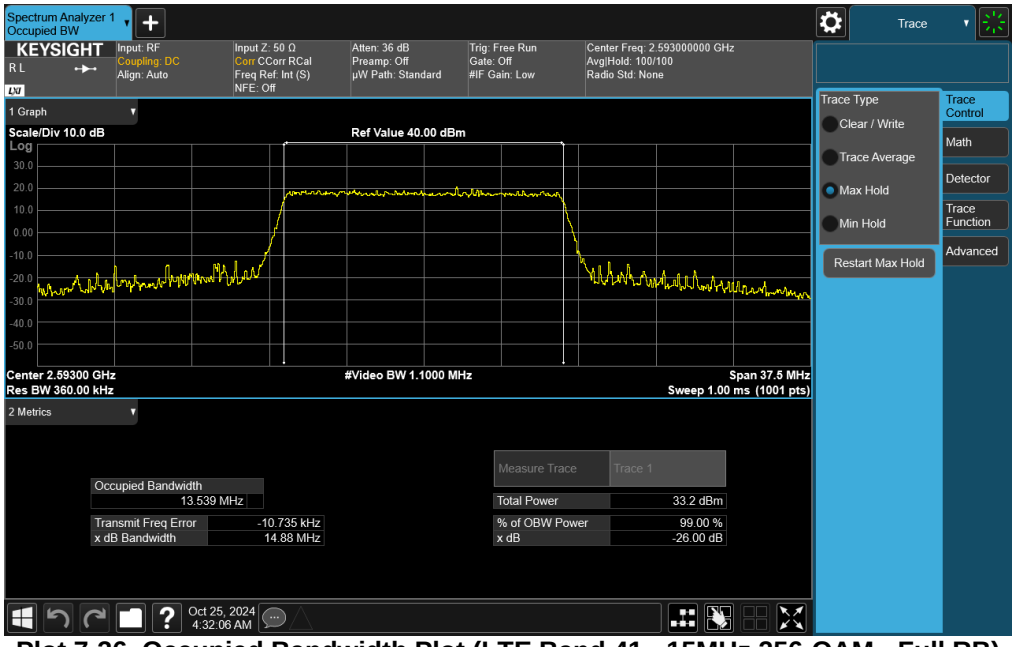

Plot 7-36. Occupied Bandwidth Plot (LTE Band 41 - 15MHz 256-QAM - Full RB)

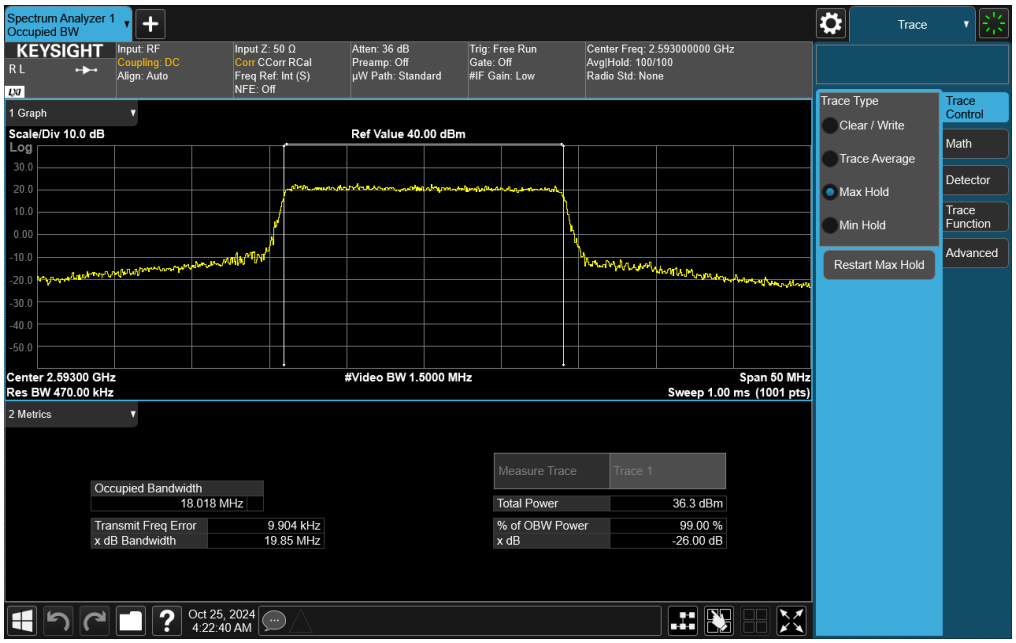

Plot 7-37. Occupied Bandwidth Plot (LTE Band 41 - 20MHz QPSK - Full RB)

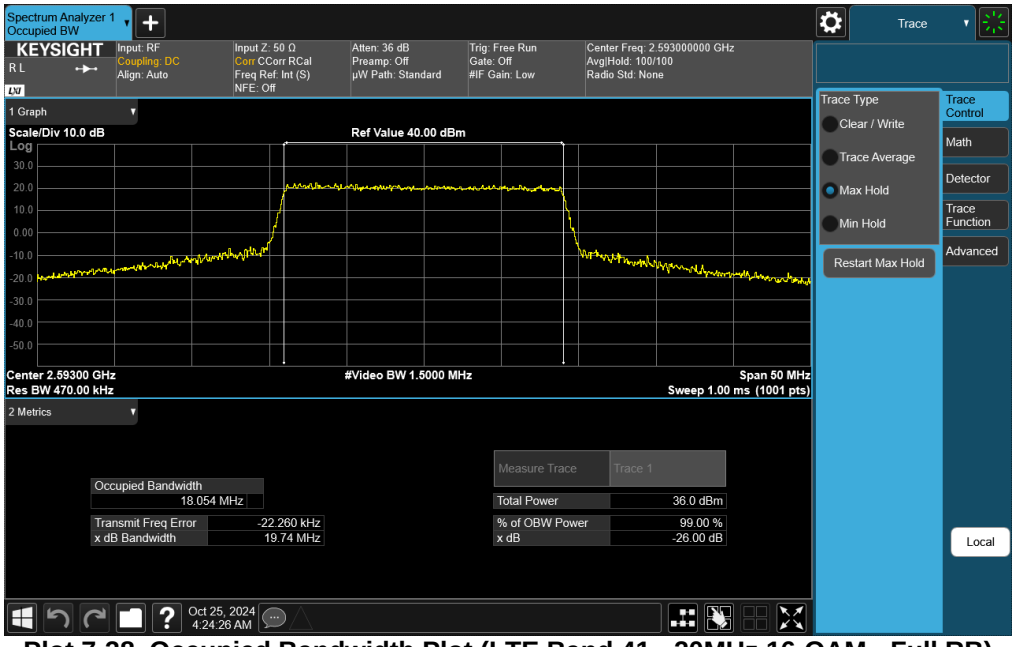

Plot 7-38. Occupied Bandwidth Plot (LTE Band 41 - 20MHz 16-QAM - Full RB)

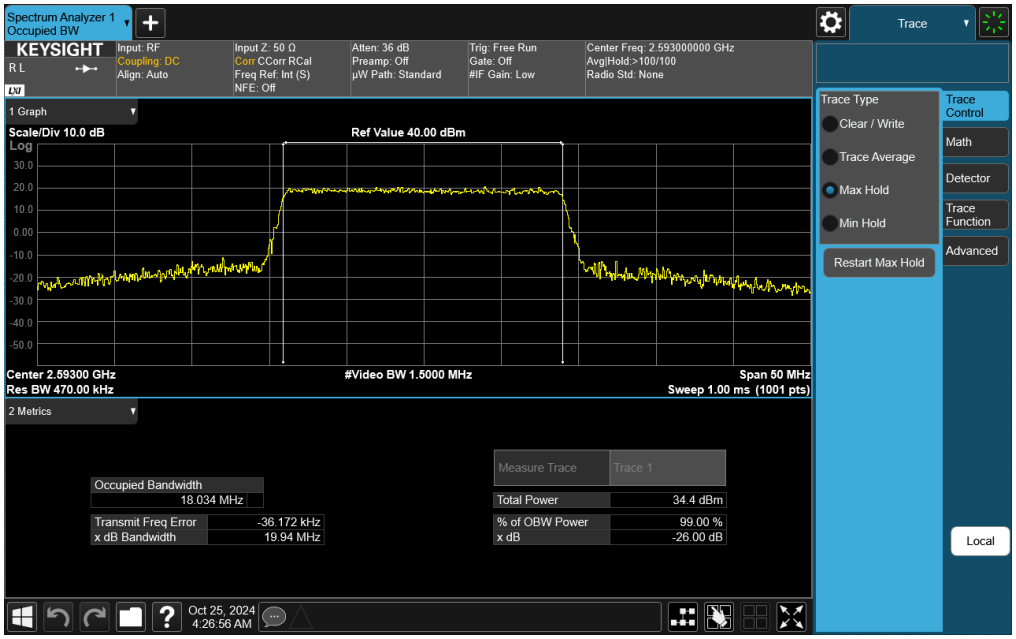

Plot 7-39. Occupied Bandwidth Plot (LTE Band 41 - 20MHz 64-QAM - Full RB)

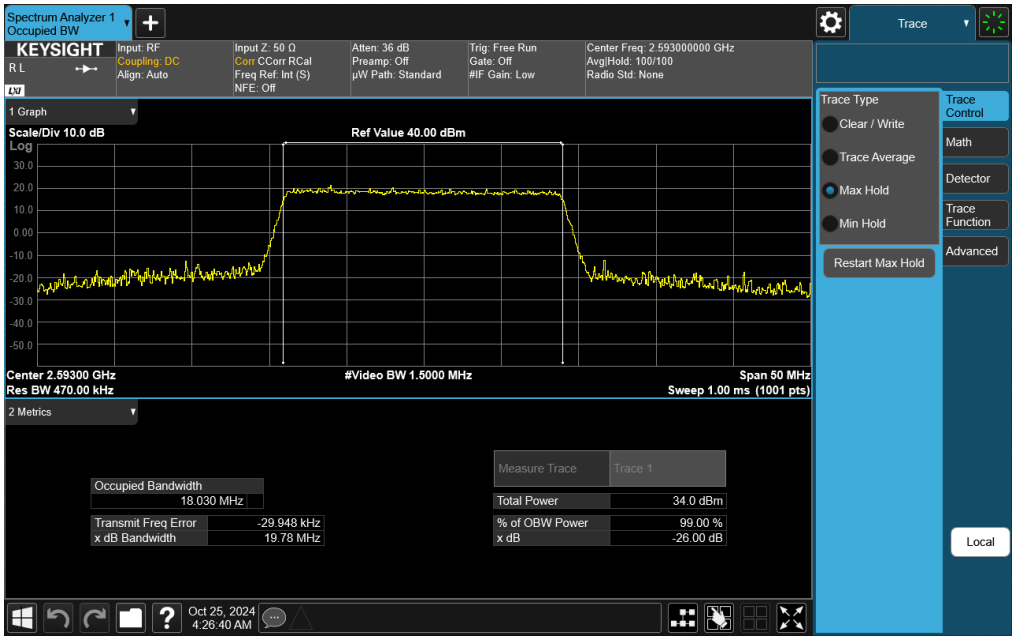

Plot 7-40. Occupied Bandwidth Plot (LTE Band 41 - 20MHz 256-QAM - Full RB)

NR Band n30

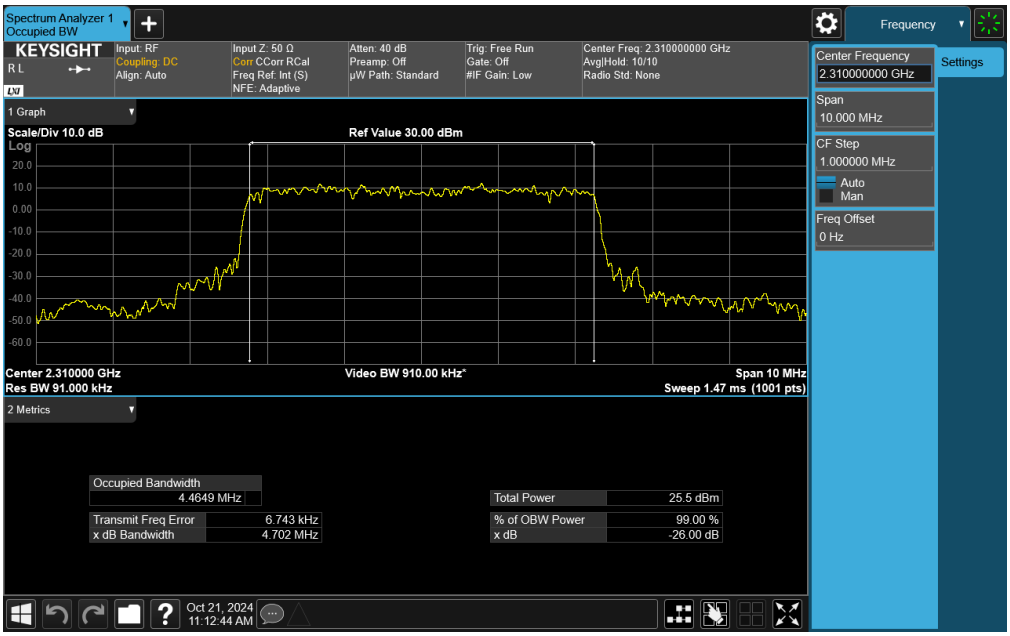

Plot 7-41. Occupied Bandwidth Plot (NR Band n30 - 5MHz DFT-s-OFDM π/2 BPSK - Full RB)

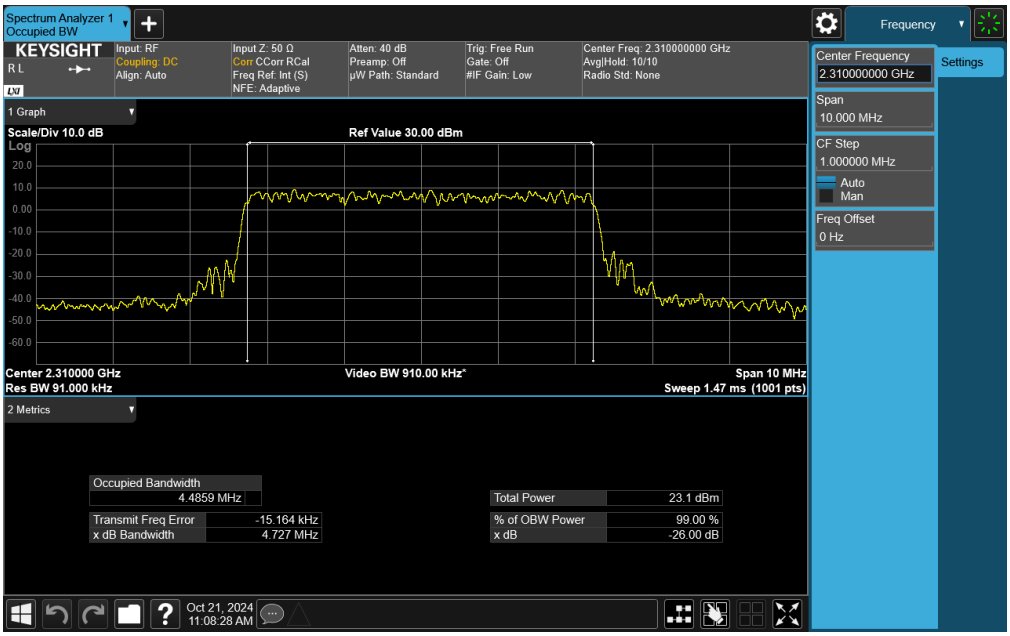

Plot 7-42. Occupied Bandwidth Plot (NR Band n30 - 5MHz CP-OFDM QPSK - Full RB)

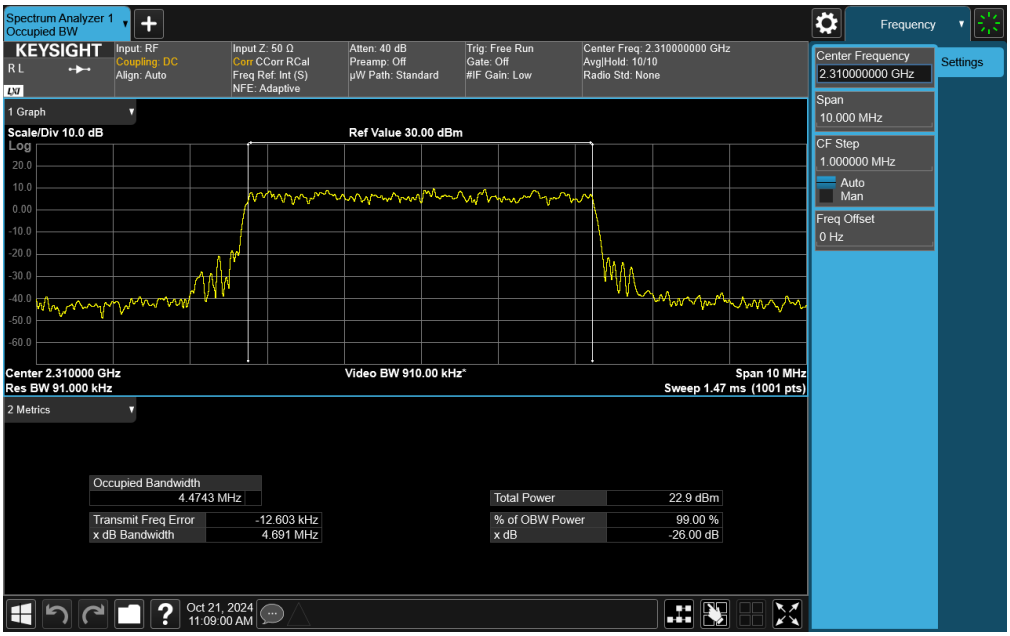

Plot 7-43. Occupied Bandwidth Plot (NR Band n30 - 5MHz CP-OFDM 16-QAM - Full RB)

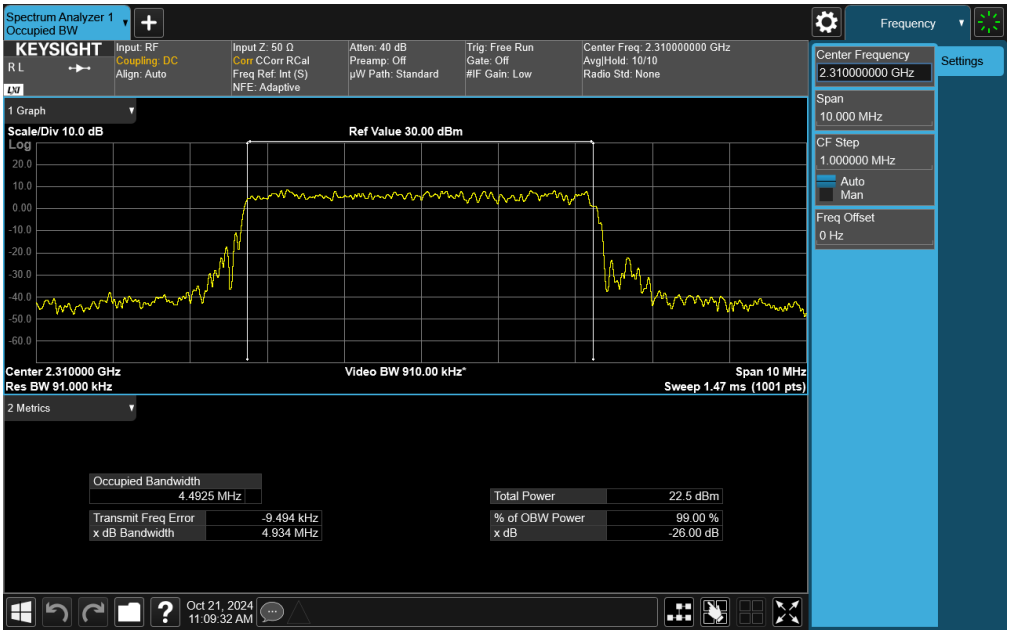

Plot 7-44. Occupied Bandwidth Plot (NR Band n30 - 5MHz CP-OFDM 64-QAM - Full RB)

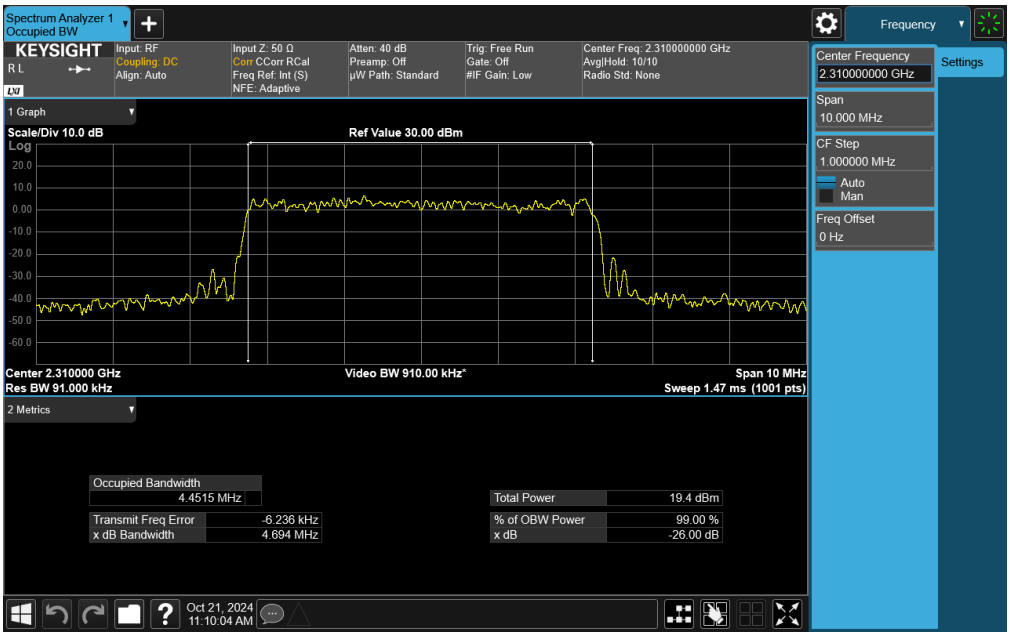

Plot 7-45. Occupied Bandwidth Plot (NR Band n30 - 5MHz CP-OFDM 256-QAM - Full RB)

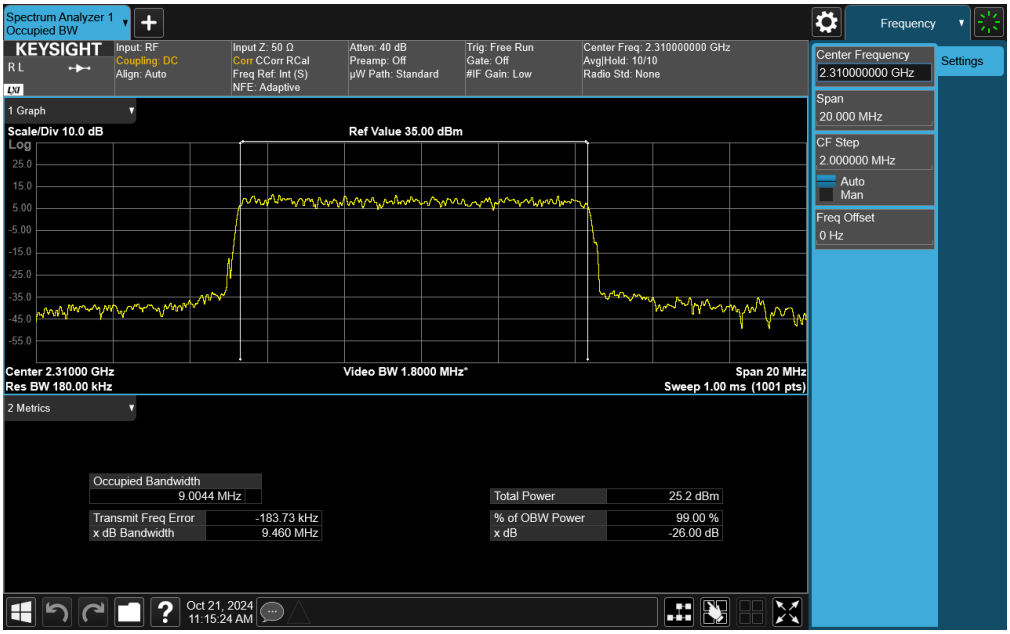

Plot 7-46. Occupied Bandwidth Plot (NR Band n30 - 10MHz DFT-s-OFDM π/2 BPSK - Full RB)

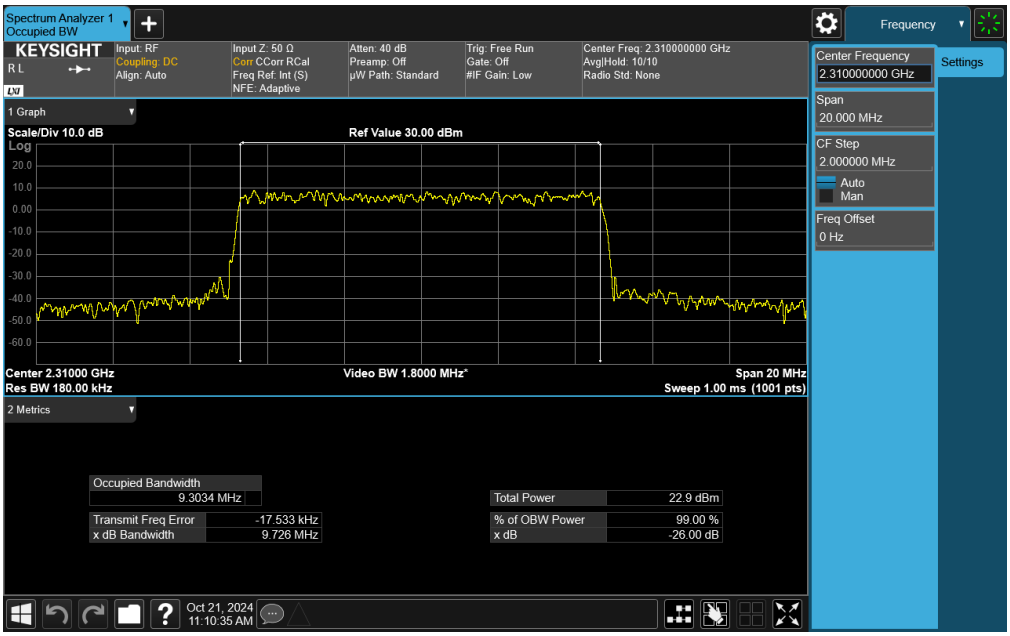

Plot 7-47. Occupied Bandwidth Plot (NR Band n30 - 10MHz CP-OFDM QPSK - Full RB)

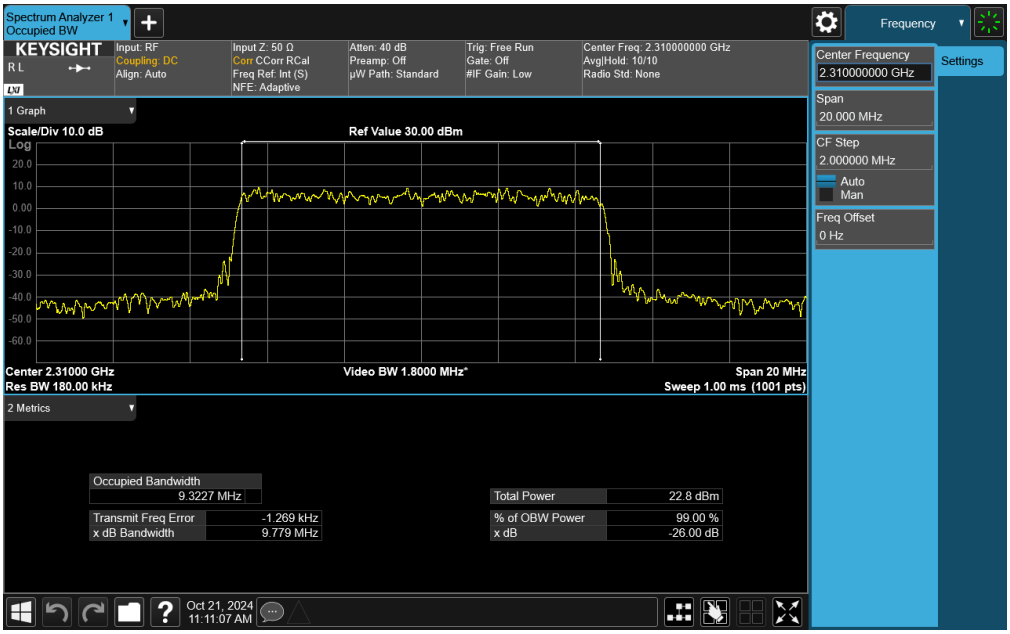

Plot 7-48. Occupied Bandwidth Plot (NR Band n30 - 10MHz CP-OFDM 16-QAM - Full RB)

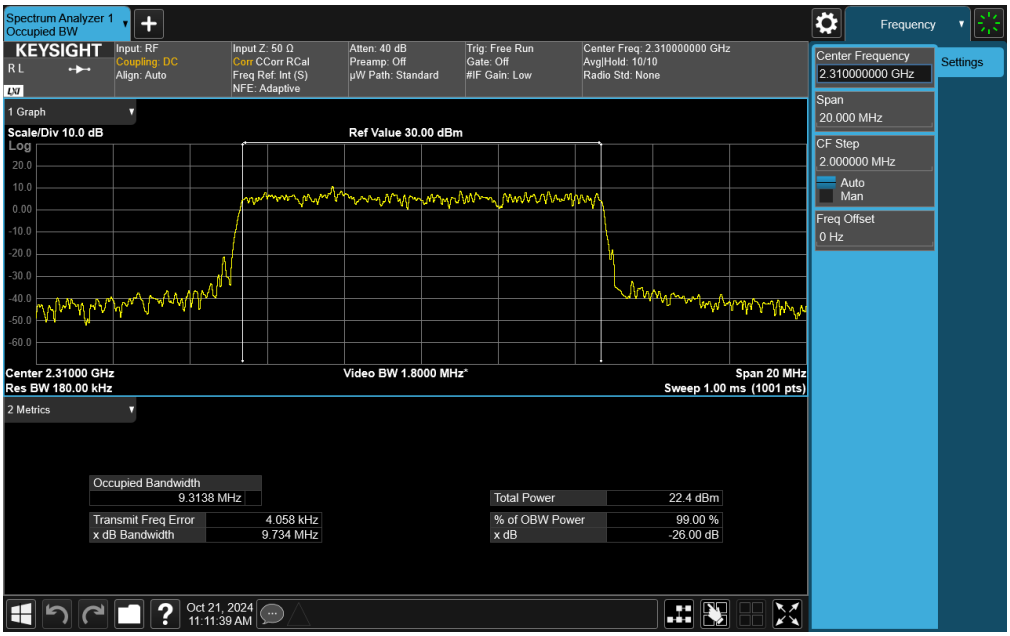

Plot 7-49. Occupied Bandwidth Plot (NR Band n30 - 10MHz CP-OFDM 64-QAM - Full RB)

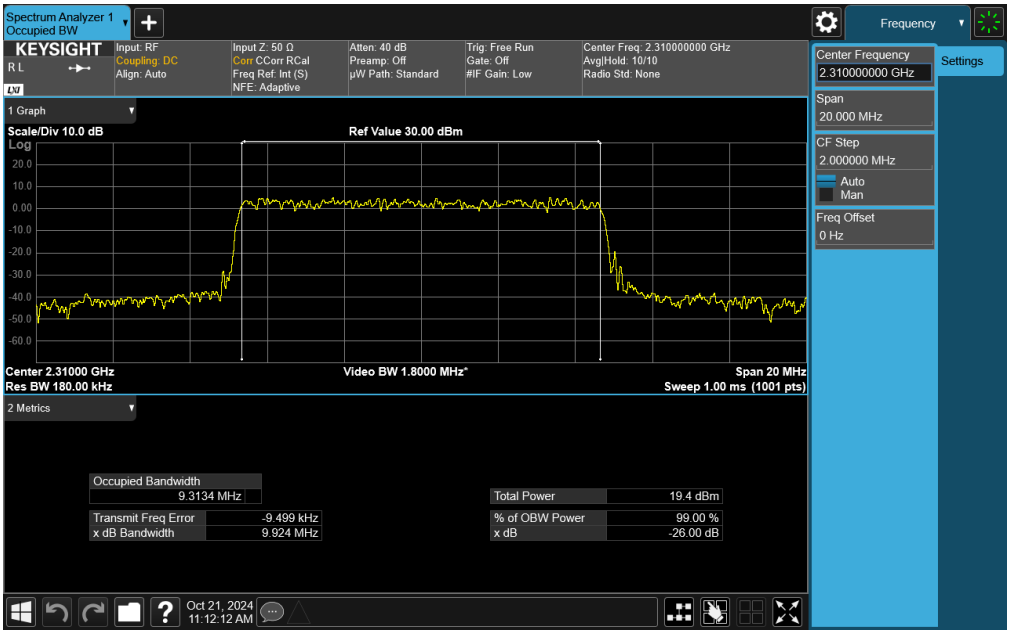

Plot 7-50. Occupied Bandwidth Plot (NR Band n30 - 10MHz CP-OFDM 256-QAM - Full RB)

NR Band n7

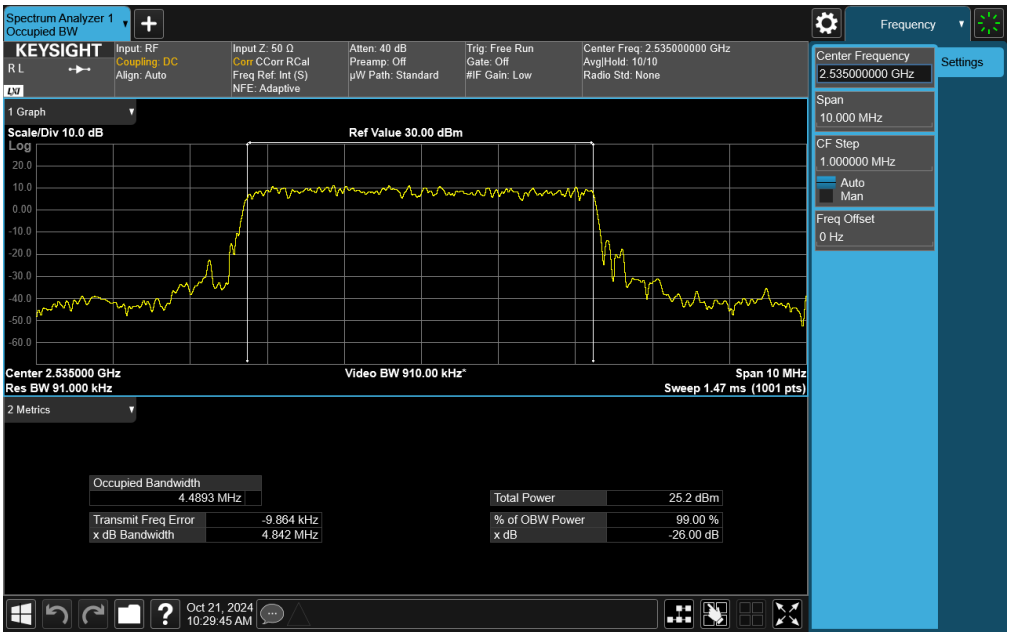

Plot 7-51. Occupied Bandwidth Plot (NR Band n7 - 5MHz DFT-s-OFDM π/2 BPSK - Full RB)

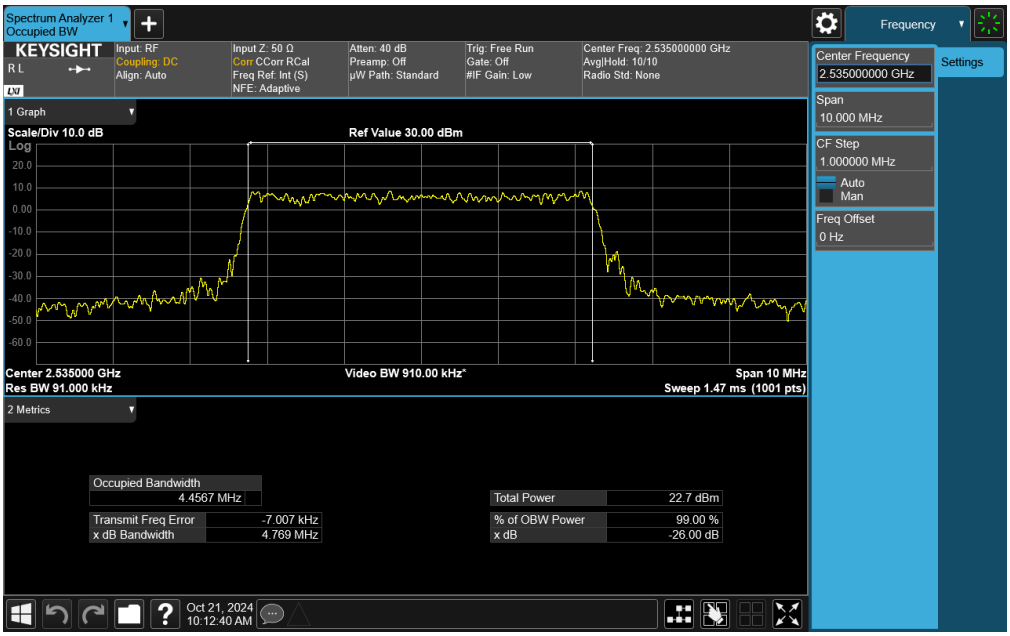

Plot 7-52. Occupied Bandwidth Plot (NR Band n7 - 5MHz CP-OFDM QPSK - Full RB)

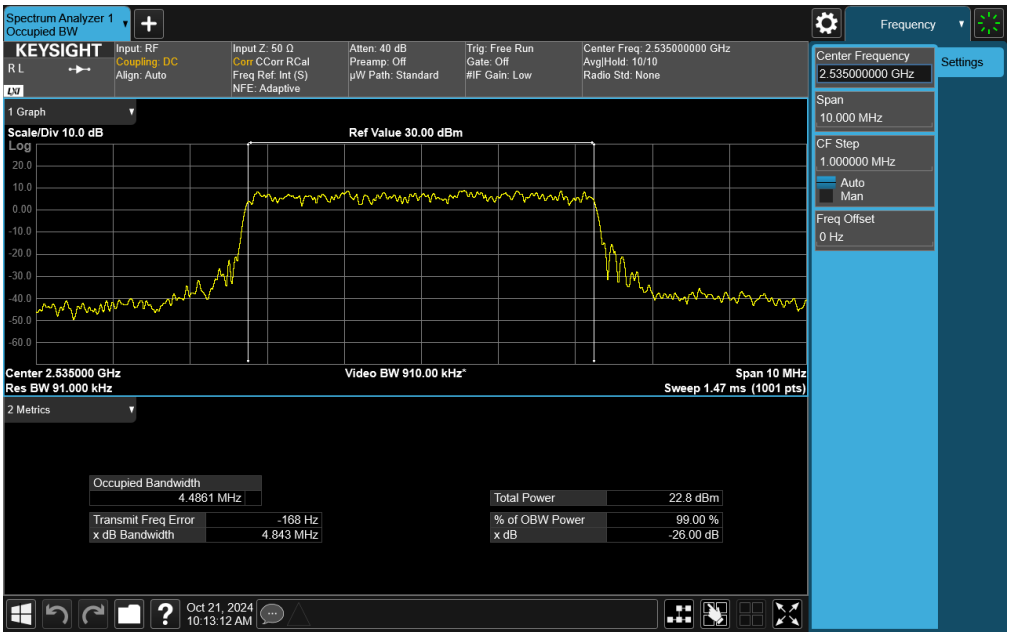

Plot 7-53. Occupied Bandwidth Plot (NR Band n7 - 5MHz CP-OFDM 16-QAM - Full RB)

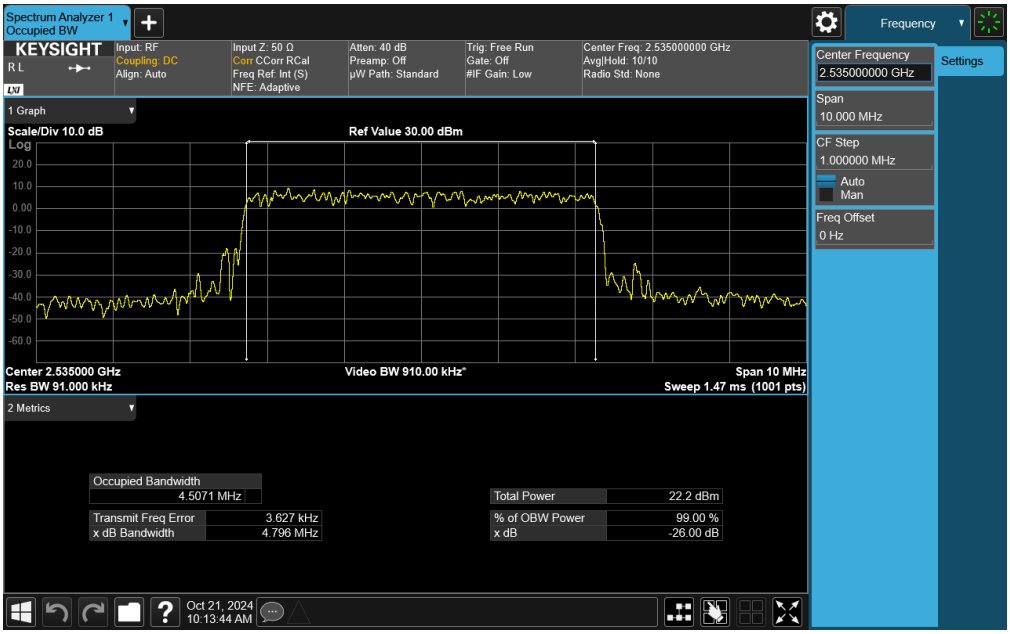

Plot 7-54. Occupied Bandwidth Plot (NR Band n7 - 5MHz CP-OFDM 64-QAM - Full RB)

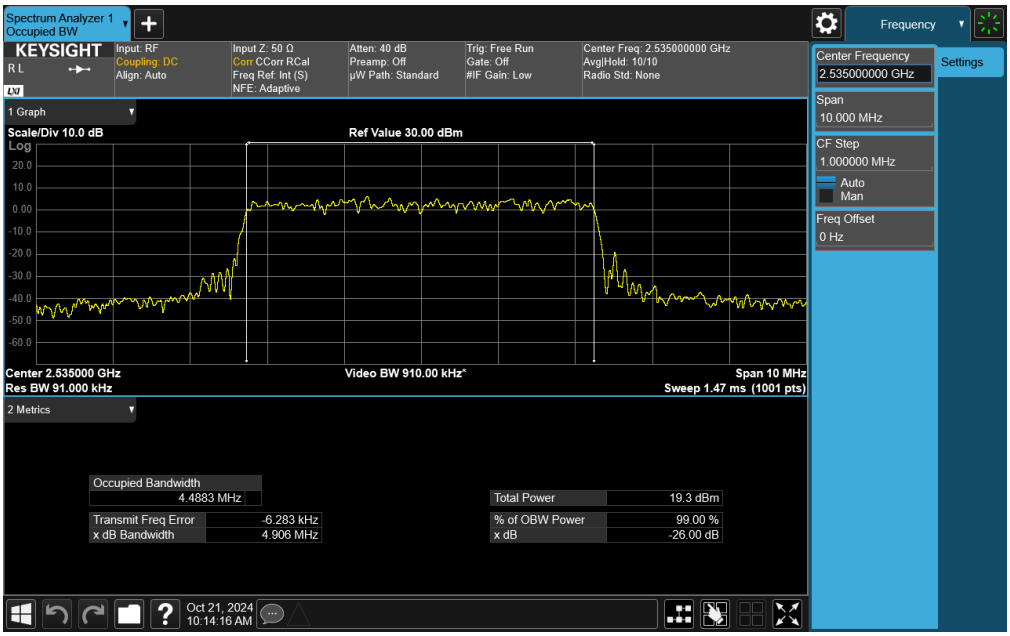

Plot 7-55. Occupied Bandwidth Plot (NR Band n7 - 5MHz CP-OFDM 256-QAM - Full RB)

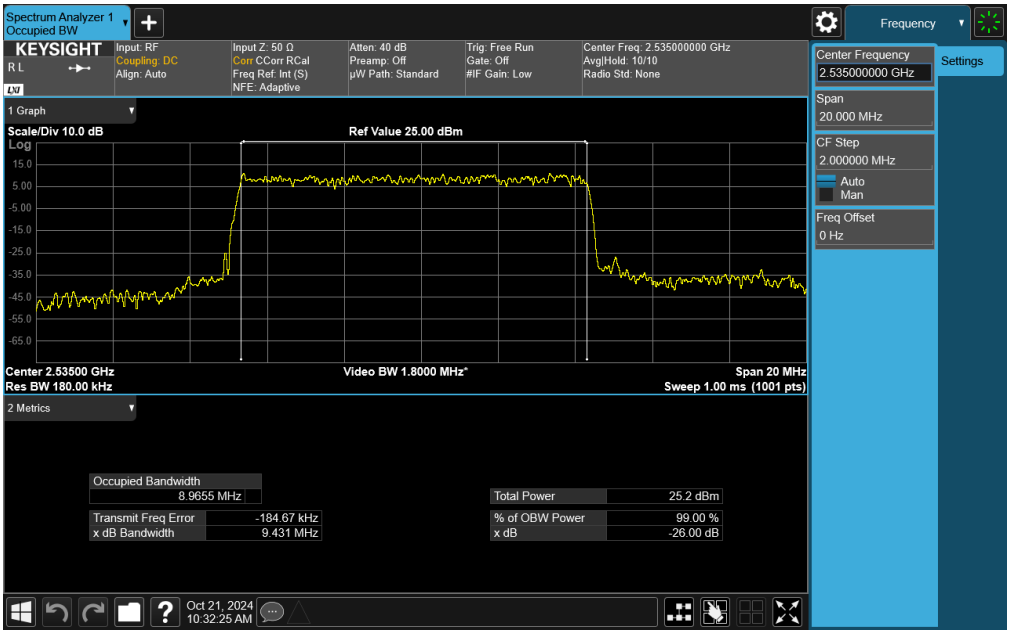

Plot 7-56. Occupied Bandwidth Plot (NR Band n7 - 10MHz DFT-s-OFDM π/2 BPSK - Full RB)

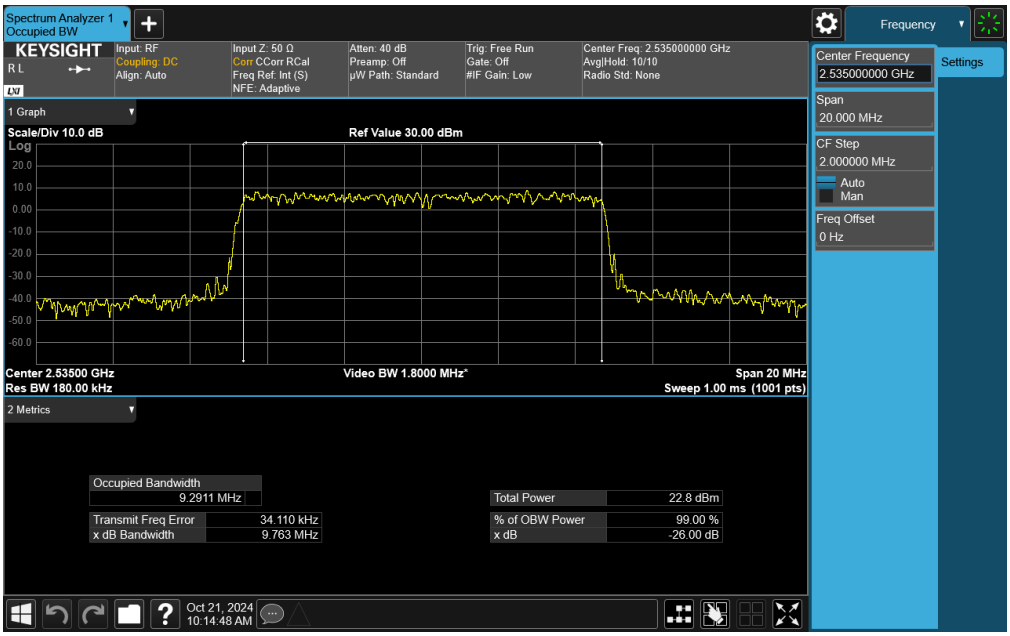

Plot 7-57. Occupied Bandwidth Plot (NR Band n7 - 10MHz CP-OFDM QPSK - Full RB)

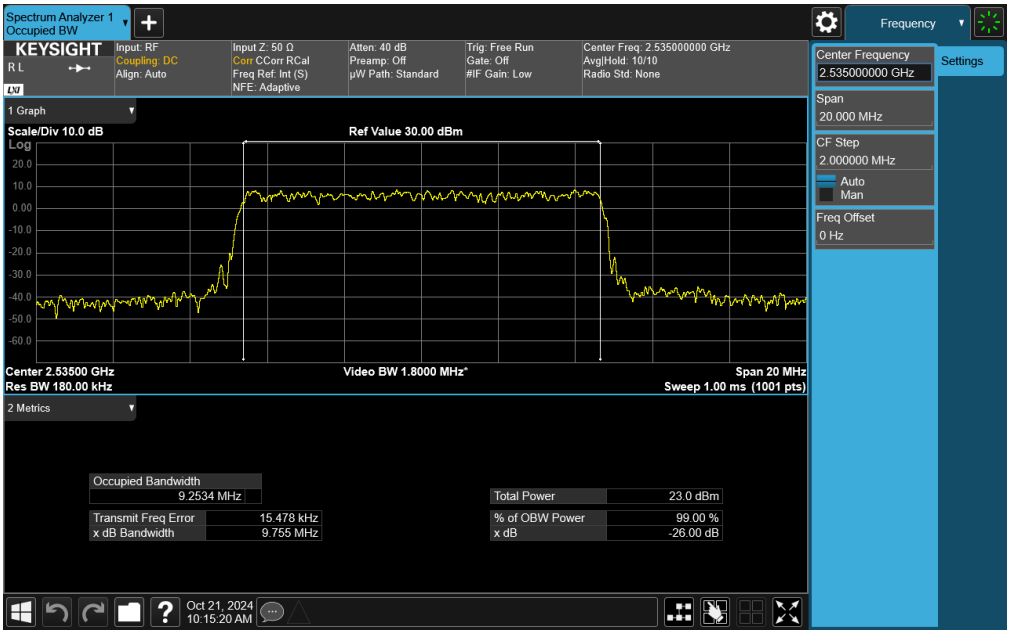

Plot 7-58. Occupied Bandwidth Plot (NR Band n7 - 10MHz CP-OFDM 16-QAM - Full RB)

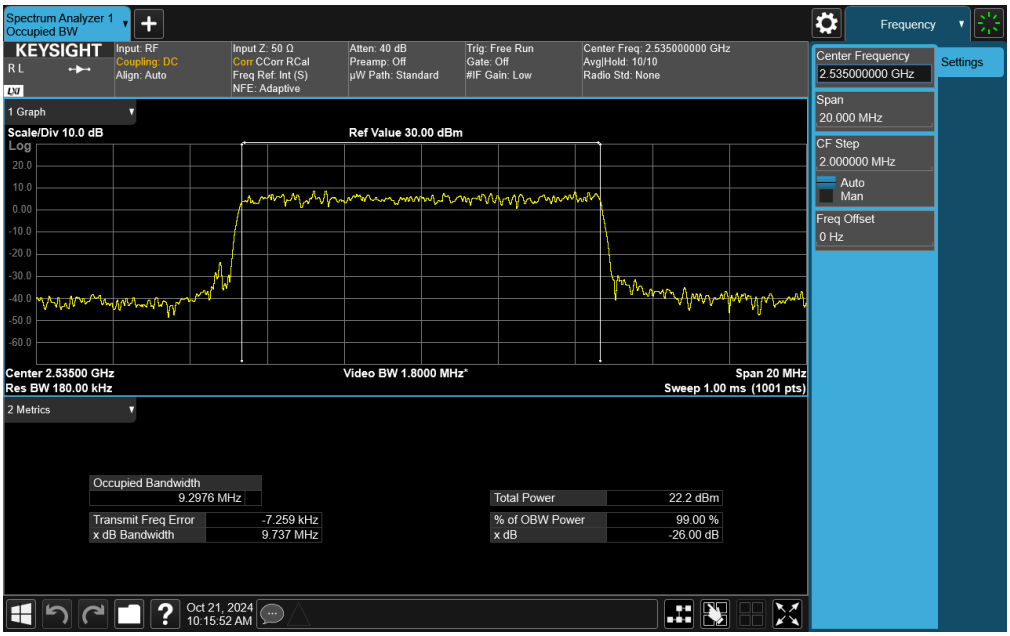

Plot 7-59. Occupied Bandwidth Plot (NR Band n7 - 10MHz CP-OFDM 64-QAM - Full RB)

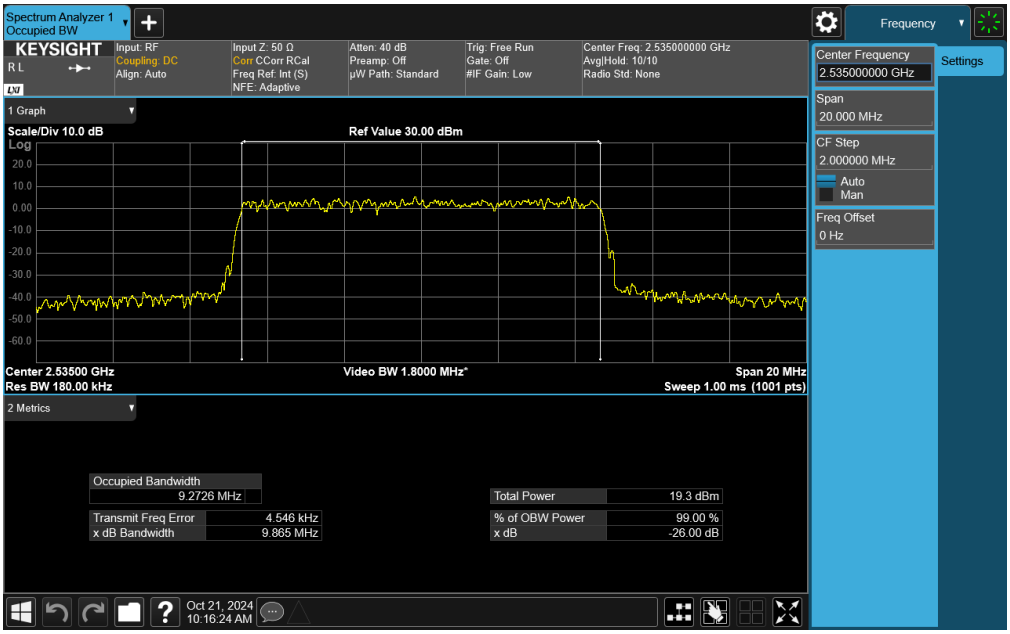

Plot 7-60. Occupied Bandwidth Plot (NR Band n7 - 10MHz CP-OFDM 256-QAM - Full RB)

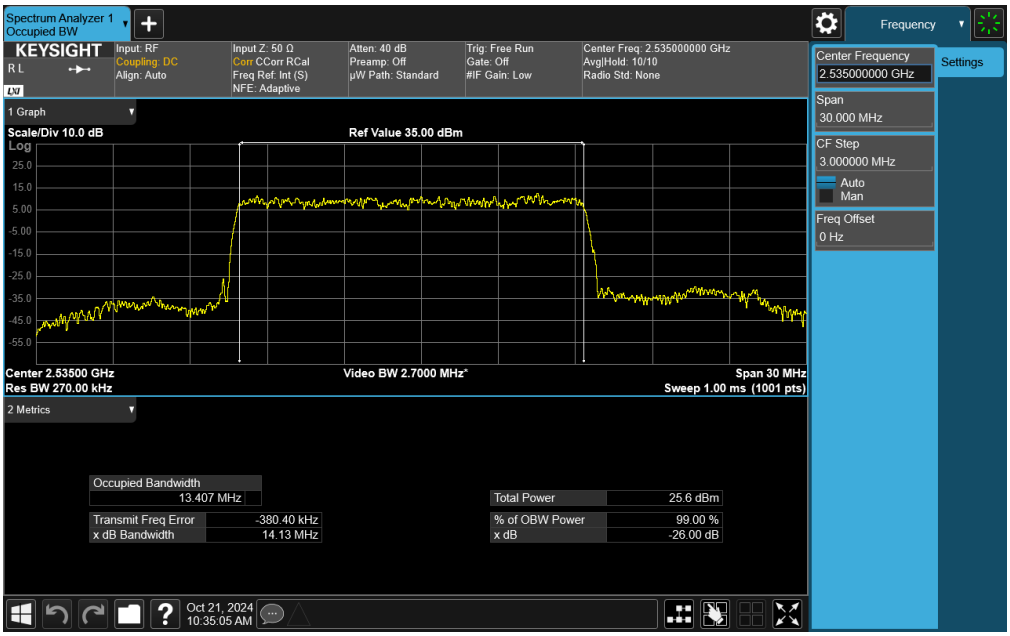

Plot 7-61. Occupied Bandwidth Plot (NR Band n7 - 15MHz DFT-s-OFDM π/2 BPSK - Full RB)

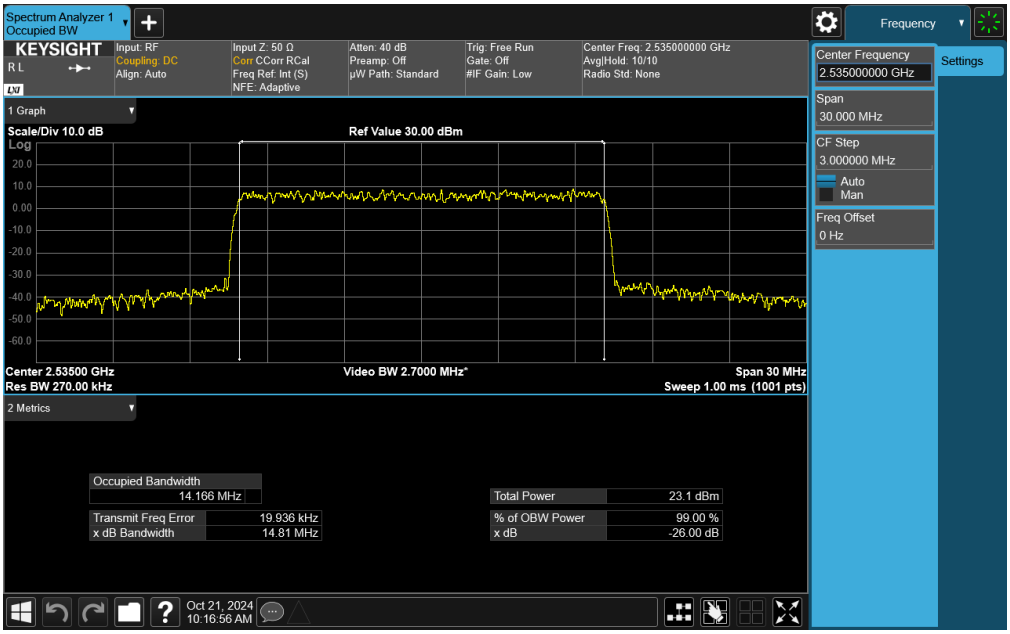

Plot 7-62. Occupied Bandwidth Plot (NR Band n7 - 15MHz CP-OFDM QPSK - Full RB)

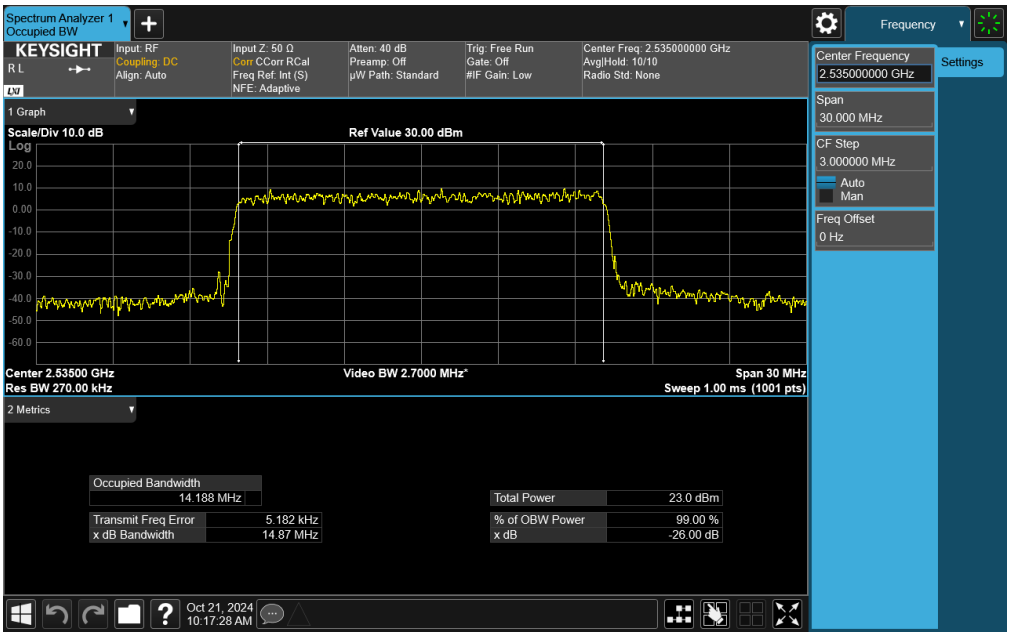

Plot 7-63. Occupied Bandwidth Plot (NR Band n7 - 15MHz CP-OFDM 16-QAM - Full RB)

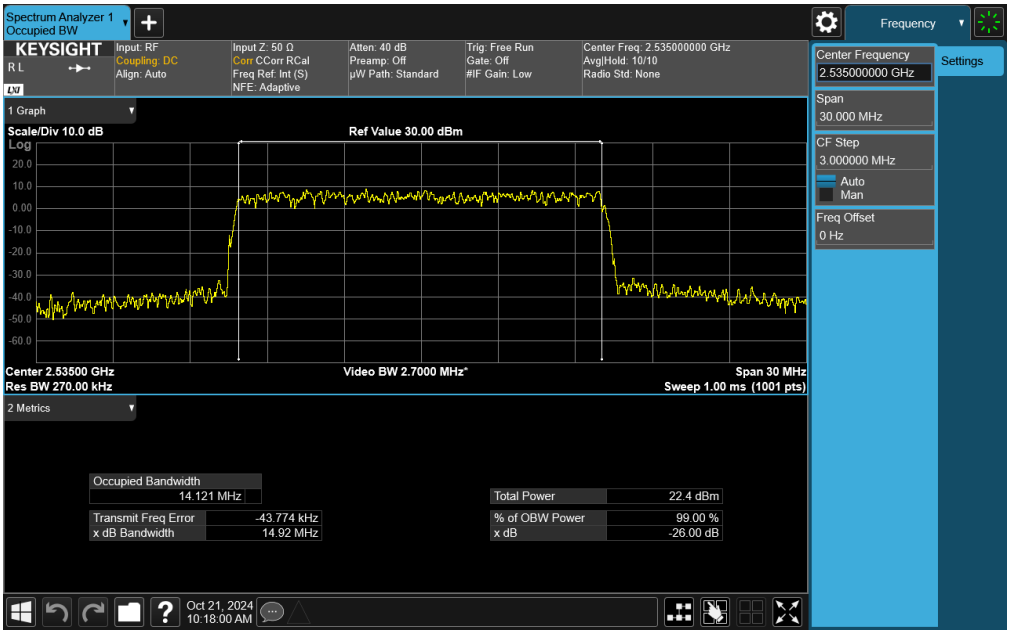

Plot 7-64. Occupied Bandwidth Plot (NR Band n7 - 15MHz CP-OFDM 64-QAM - Full RB)

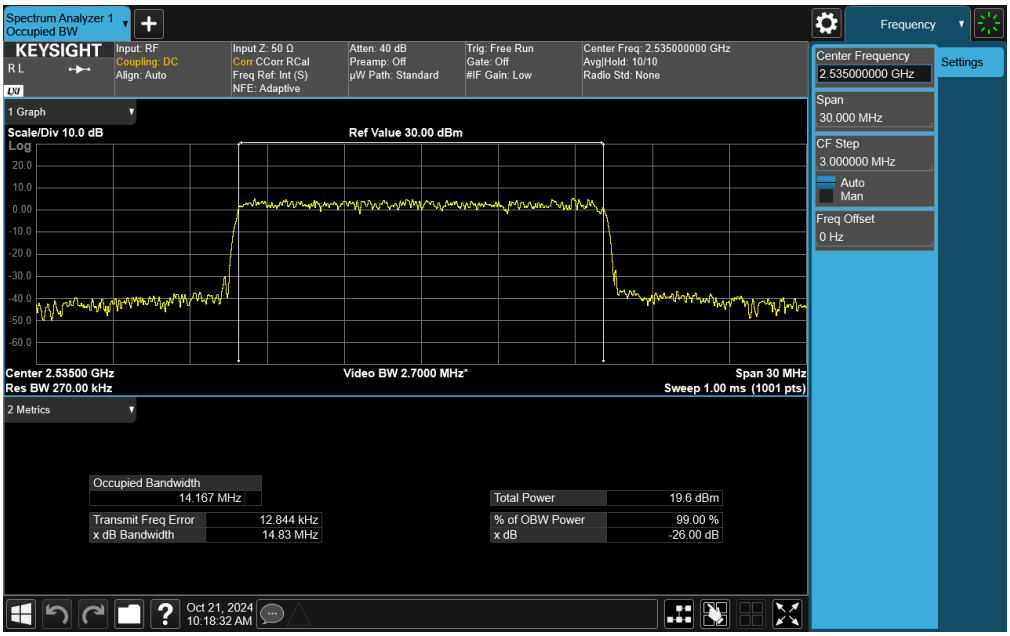

Plot 7-65. Occupied Bandwidth Plot (NR Band n7 - 15MHz CP-OFDM 256-QAM - Full RB)

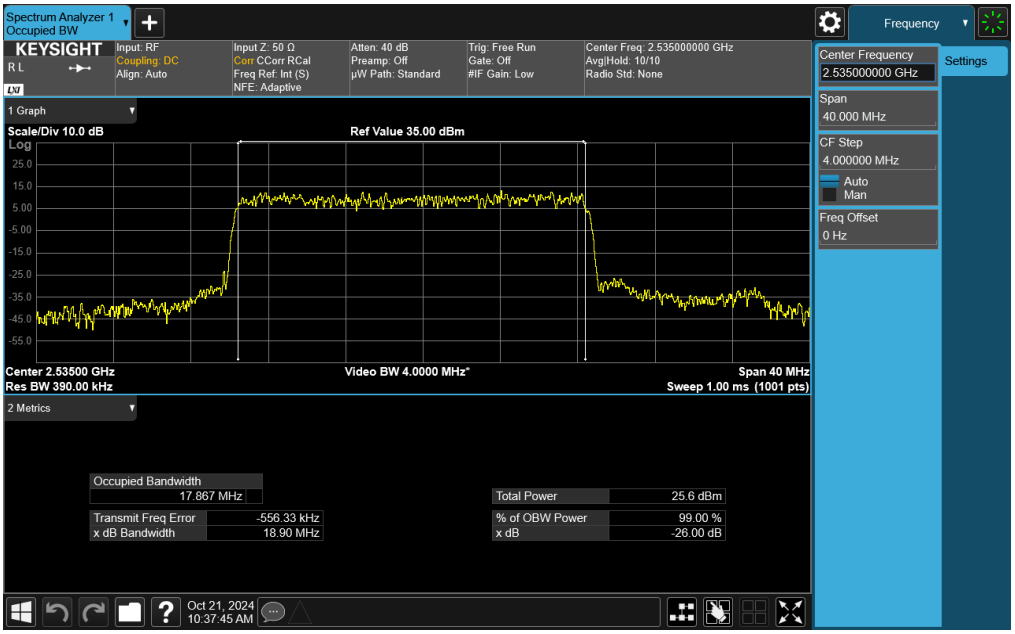

Plot 7-66. Occupied Bandwidth Plot (NR Band n7 - 20MHz DFT-s-OFDM π/2 BPSK - Full RB)

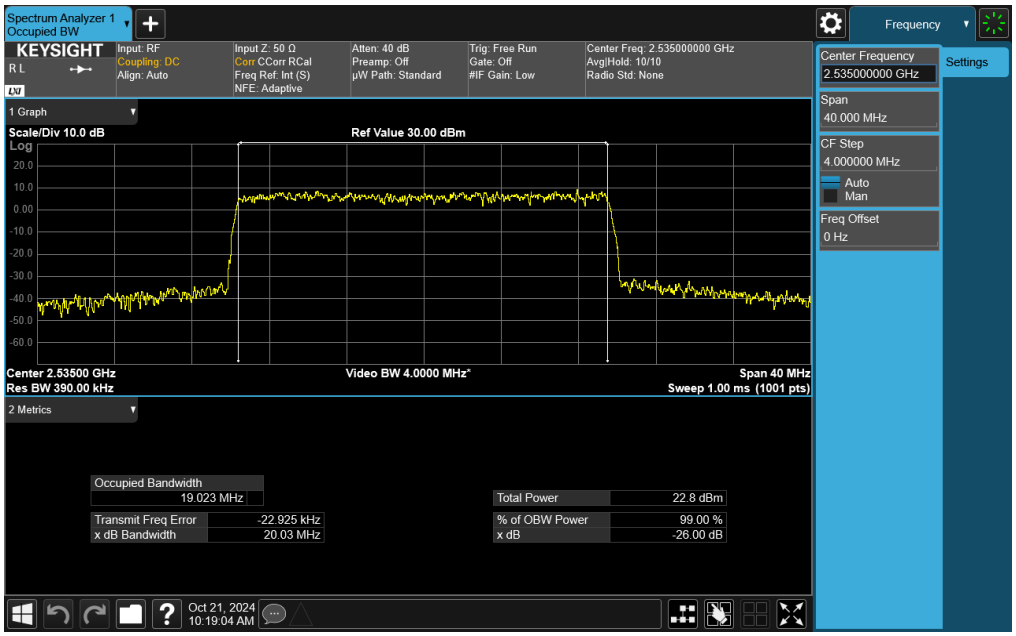

Plot 7-67. Occupied Bandwidth Plot (NR Band n7 - 20MHz CP-OFDM QPSK - Full RB)

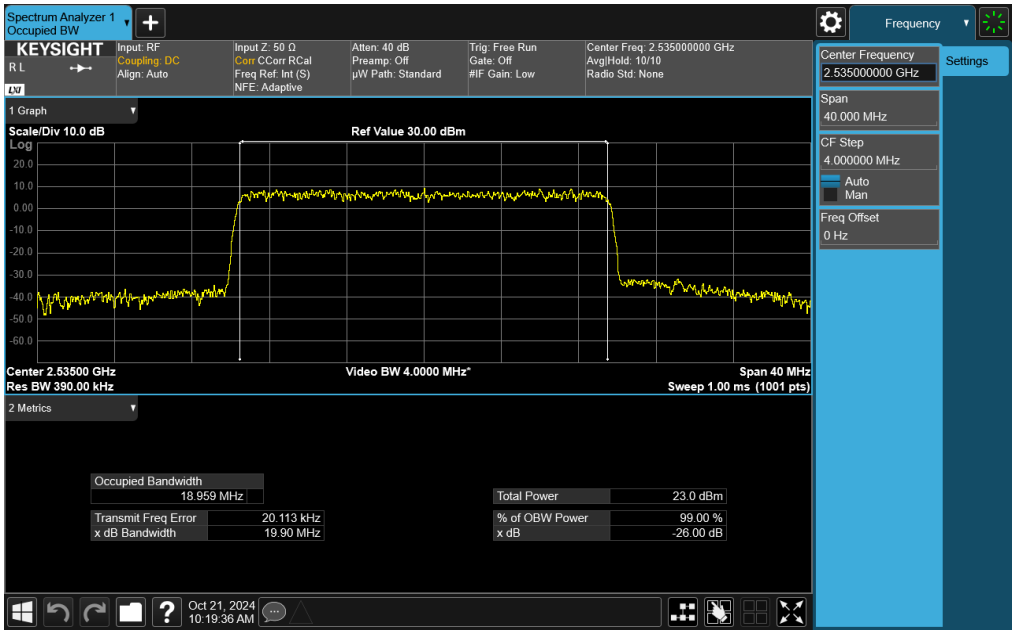

Plot 7-68. Occupied Bandwidth Plot (NR Band n7 - 20MHz CP-OFDM 16-QAM - Full RB)

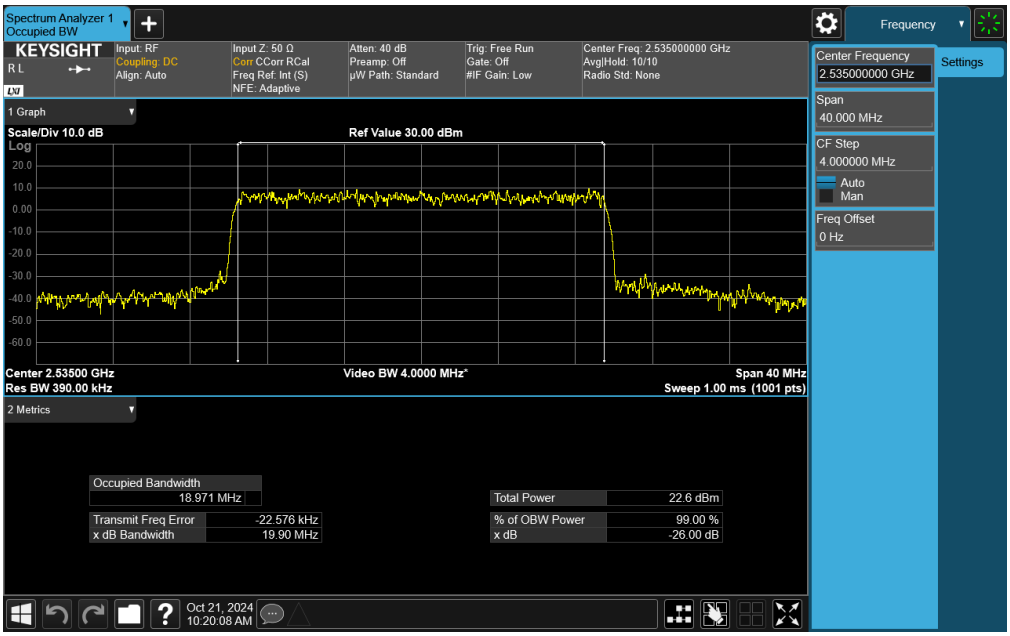

Plot 7-69. Occupied Bandwidth Plot (NR Band n7 - 20MHz CP-OFDM 64-QAM - Full RB)

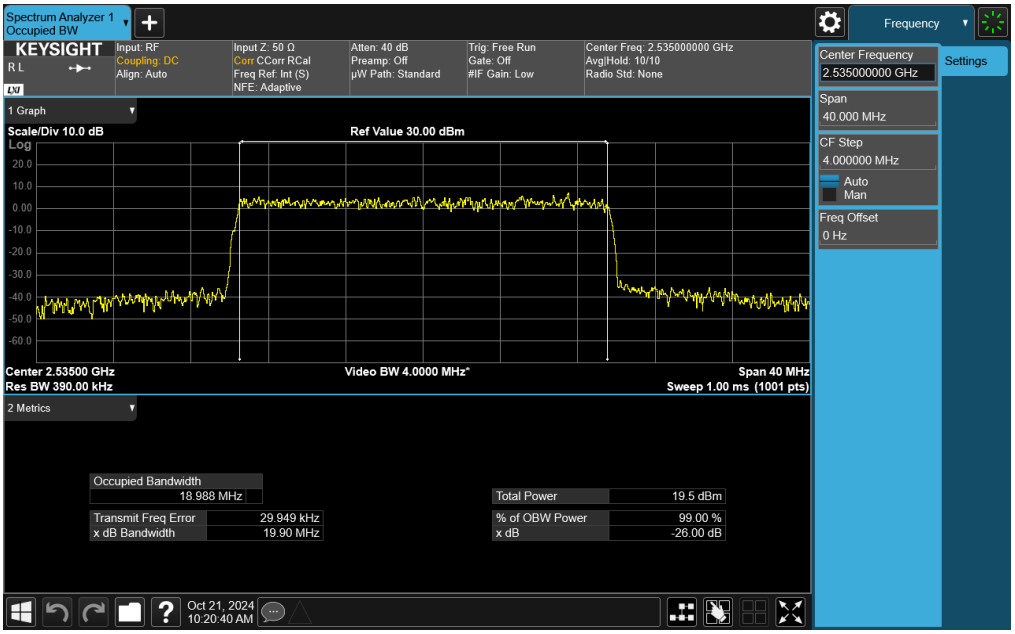

Plot 7-70. Occupied Bandwidth Plot (NR Band n7 - 20MHz CP-OFDM 256-QAM - Full RB)

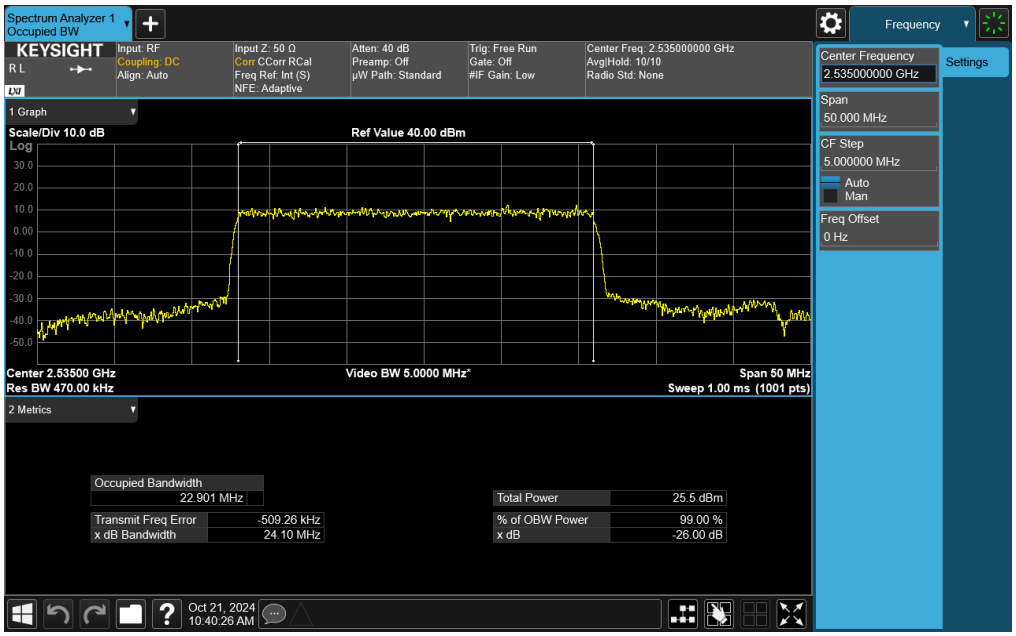

Plot 7-71. Occupied Bandwidth Plot (NR Band n7 - 25MHz DFT-s-OFDM π/2 BPSK - Full RB)

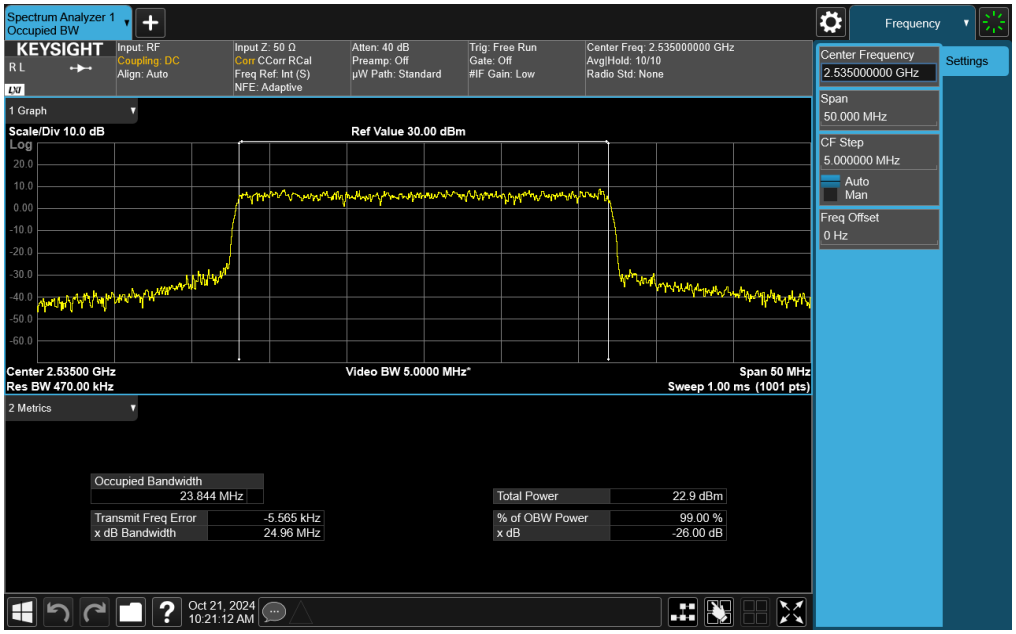

Plot 7-72. Occupied Bandwidth Plot (NR Band n7 - 25MHz CP-OFDM QPSK - Full RB)

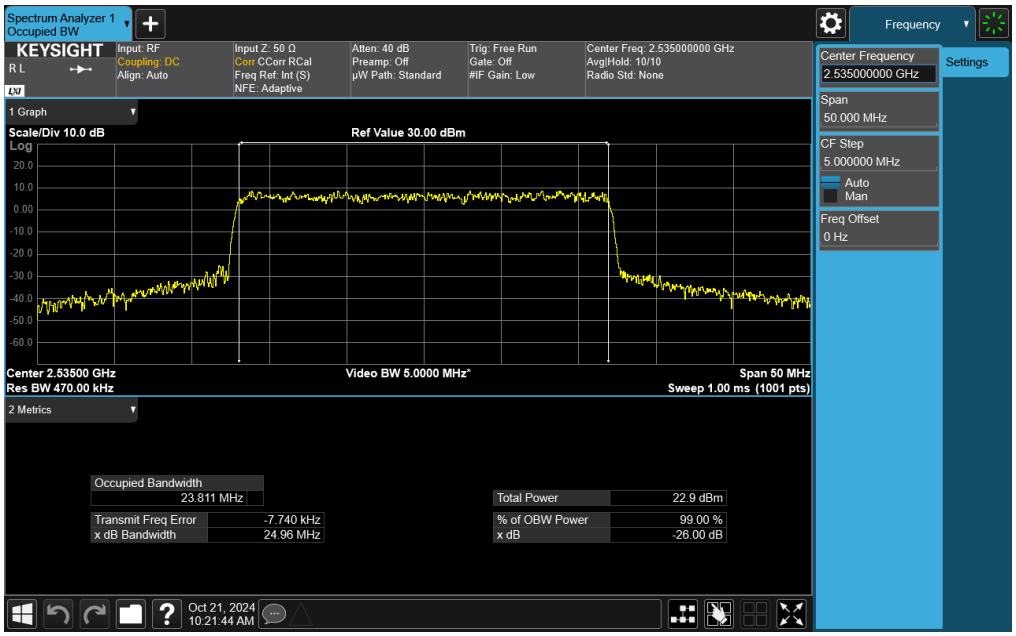

Plot 7-73. Occupied Bandwidth Plot (NR Band n7 - 25MHz CP-OFDM 16-QAM - Full RB)

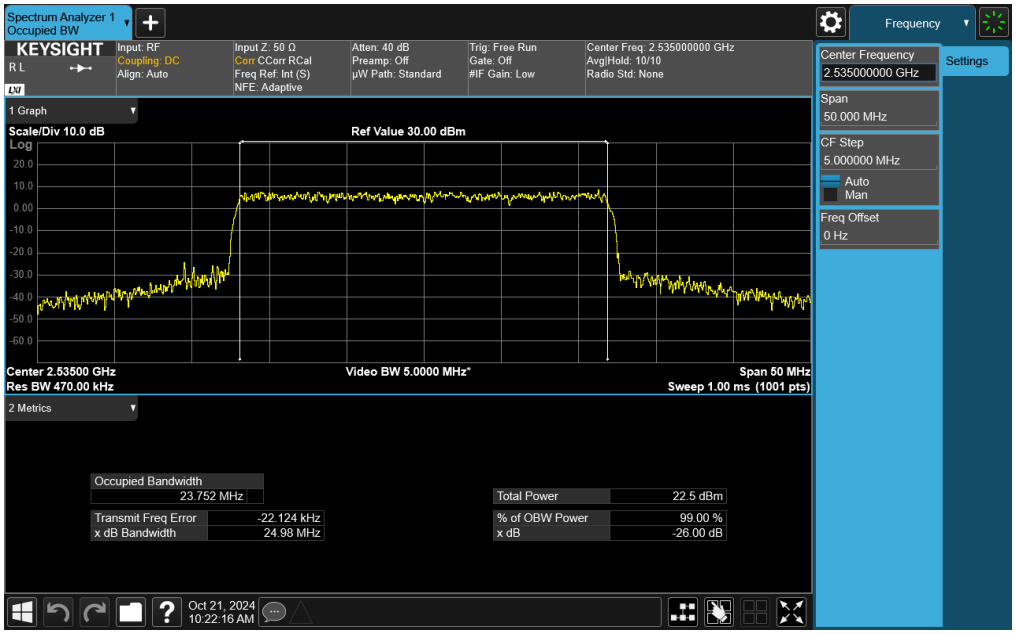

Plot 7-74. Occupied Bandwidth Plot (NR Band n7 - 25MHz CP-OFDM 64-QAM - Full RB)

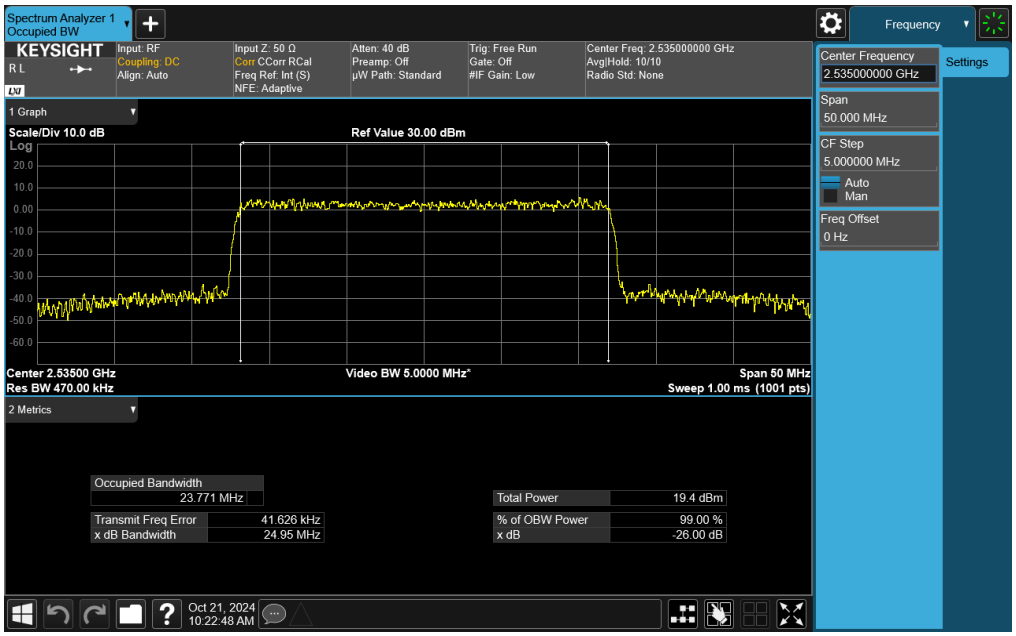

Plot 7-75. Occupied Bandwidth Plot (NR Band n7 - 25MHz CP-OFDM 256-QAM - Full RB)

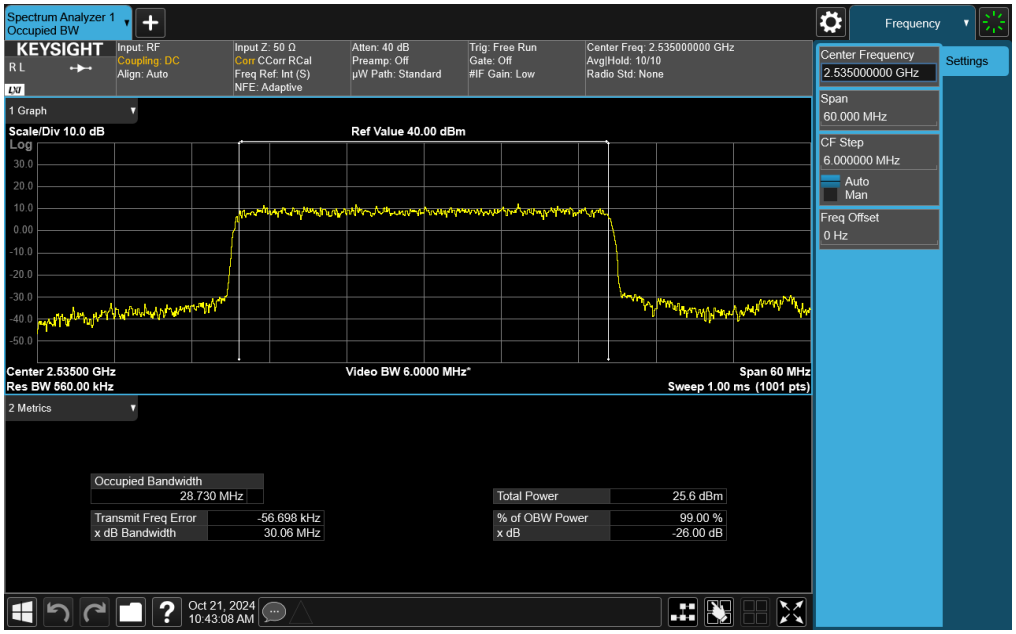

Plot 7-76. Occupied Bandwidth Plot (NR Band n7 - 30MHz DFT-s-OFDM π/2 BPSK - Full RB)

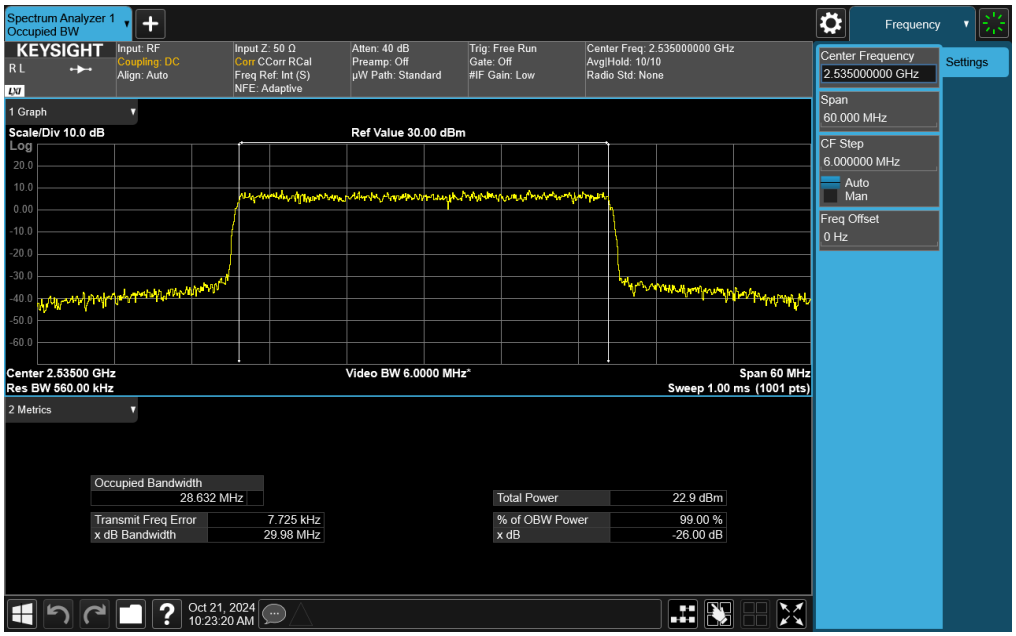

Plot 7-77. Occupied Bandwidth Plot (NR Band n7 - 30MHz CP-OFDM QPSK - Full RB)

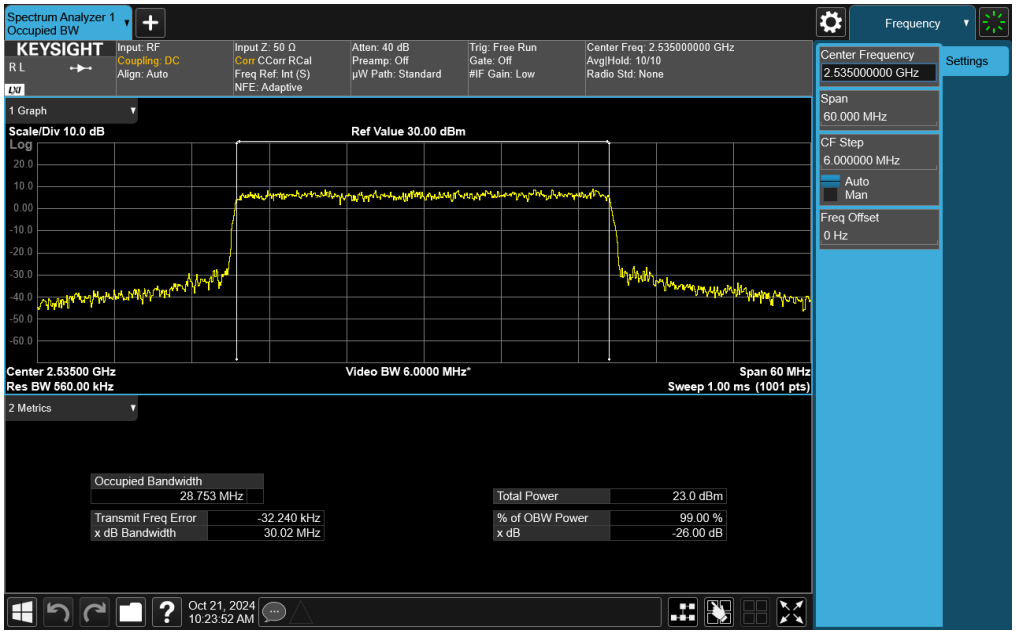

Plot 7-78. Occupied Bandwidth Plot (NR Band n7 - 30MHz CP-OFDM 16-QAM - Full RB)

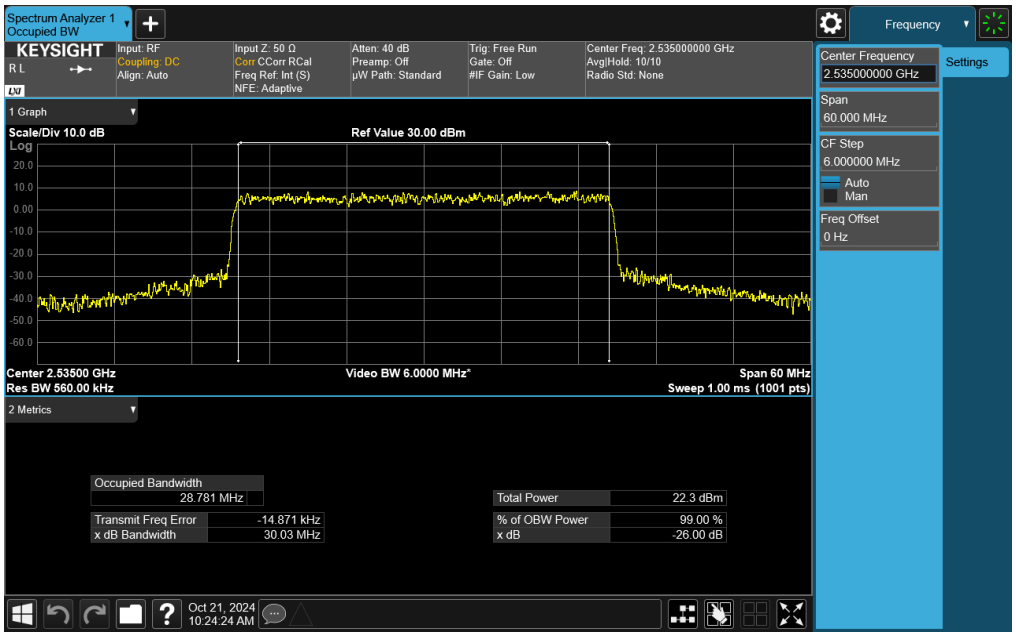

Plot 7-79. Occupied Bandwidth Plot (NR Band n7 - 30MHz CP-OFDM 64-QAM - Full RB)

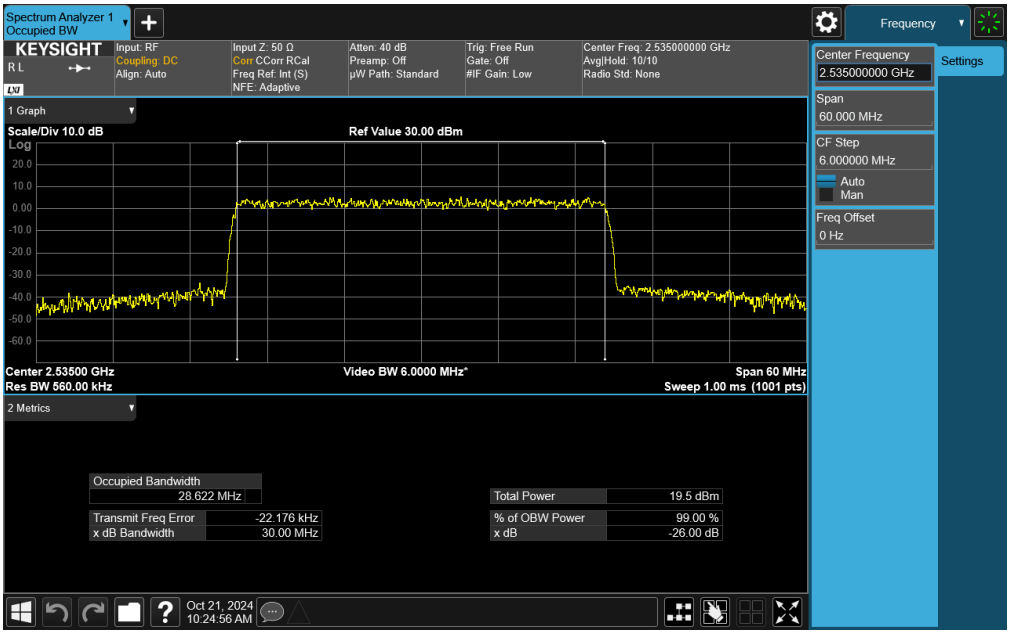

Plot 7-80. Occupied Bandwidth Plot (NR Band n7 - 30MHz CP-OFDM 256-QAM - Full RB)

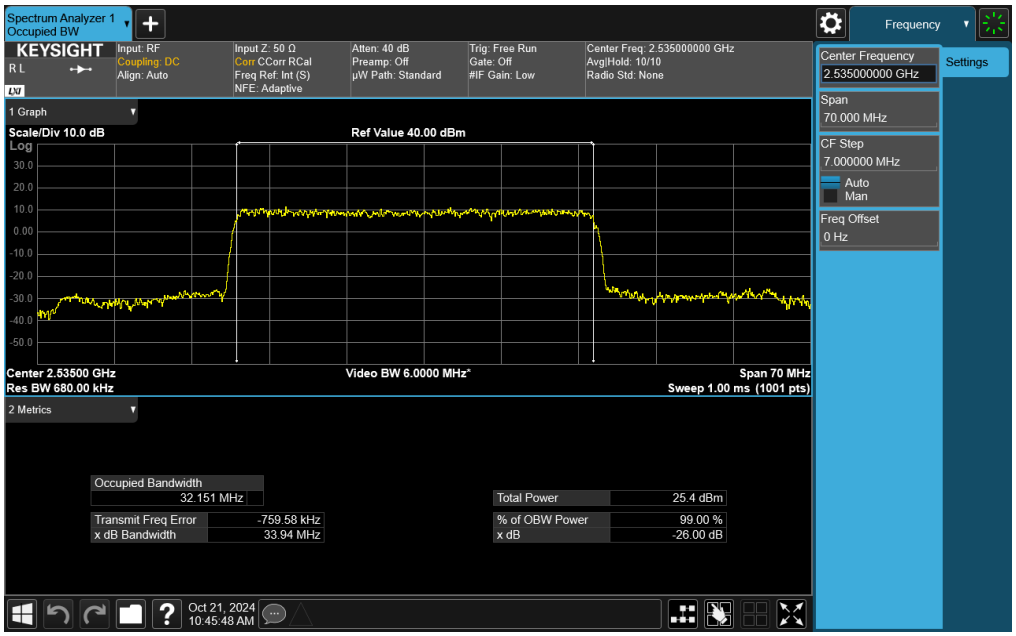

Plot 7-81. Occupied Bandwidth Plot (NR Band n7 - 35MHz DFT-s-OFDM π/2 BPSK - Full RB)

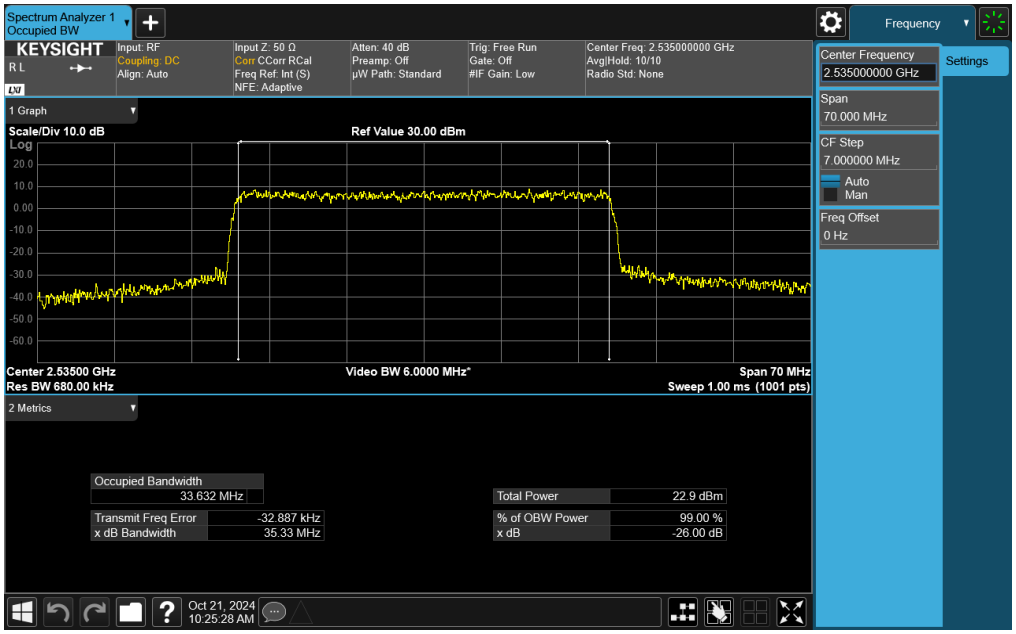

Plot 7-82. Occupied Bandwidth Plot (NR Band n7 - 35MHz CP-OFDM QPSK - Full RB)

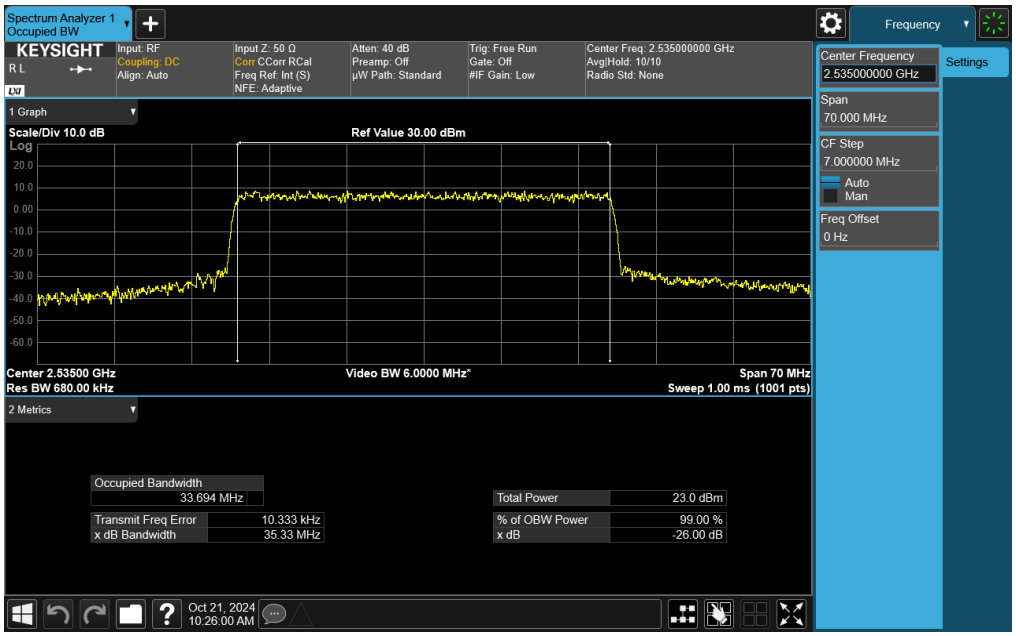

Plot 7-83. Occupied Bandwidth Plot (NR Band n7 - 35MHz CP-OFDM 16-QAM - Full RB)

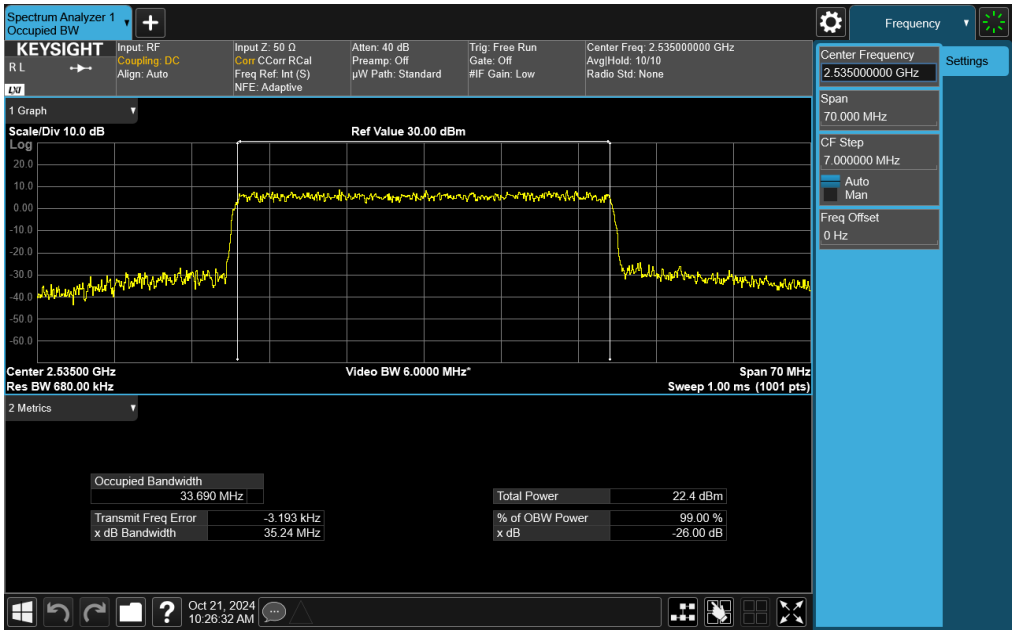

Plot 7-84. Occupied Bandwidth Plot (NR Band n7 - 35MHz CP-OFDM 64-QAM - Full RB)

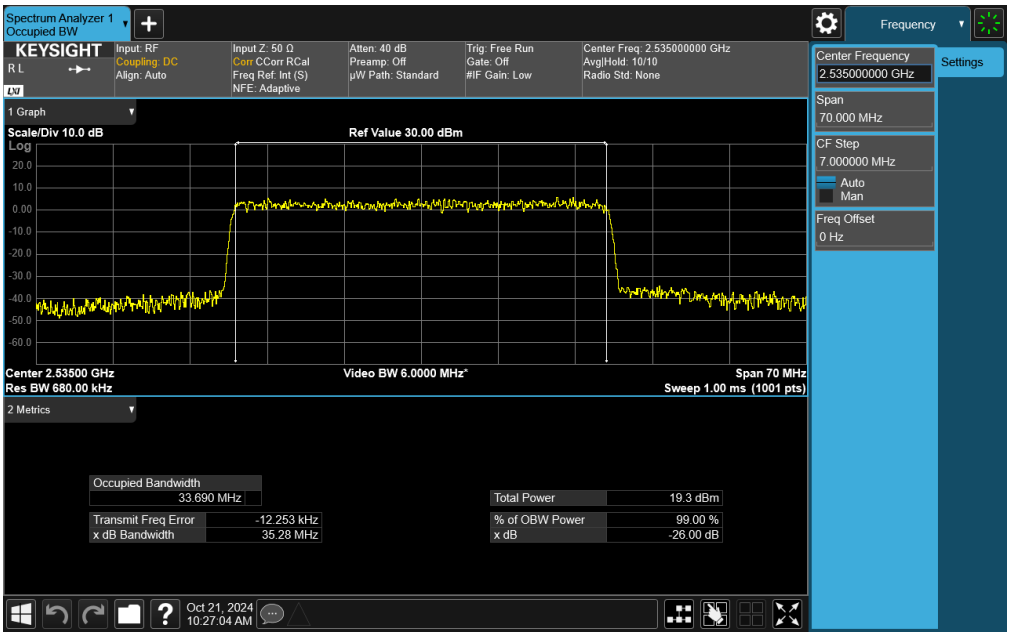

Plot 7-85. Occupied Bandwidth Plot (NR Band n7 - 35MHz CP-OFDM 256-QAM - Full RB)

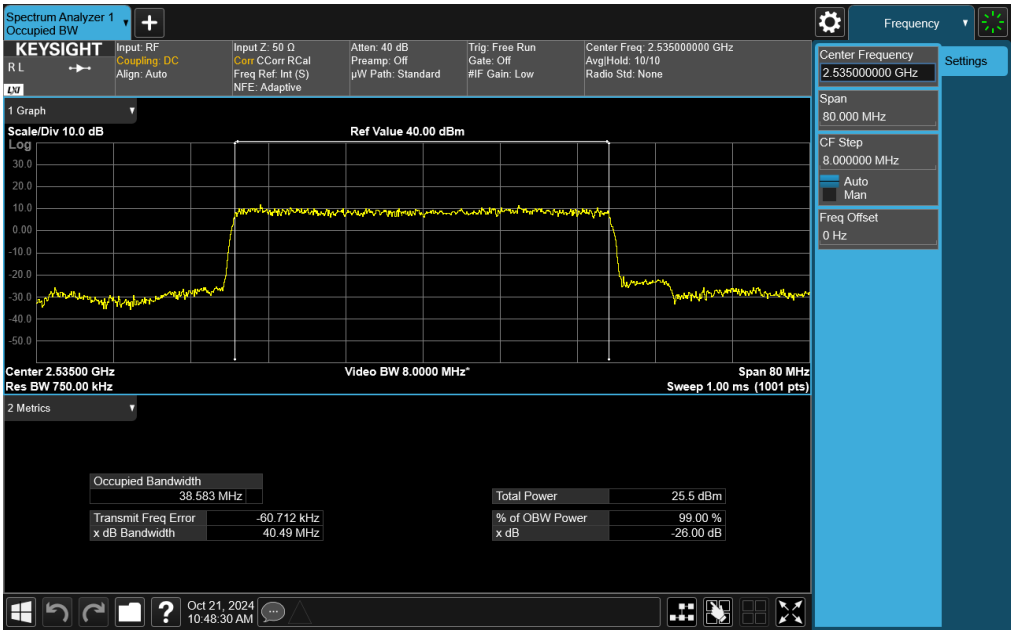

Plot 7-86. Occupied Bandwidth Plot (NR Band n7 - 40MHz DFT-s-OFDM π/2 BPSK - Full RB)

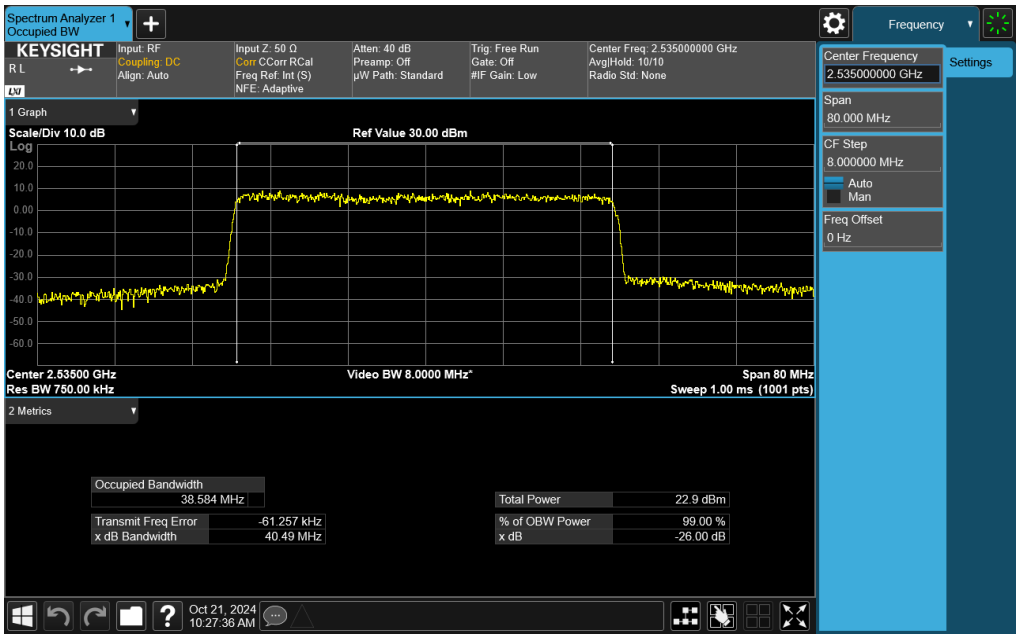

Plot 7-87. Occupied Bandwidth Plot (NR Band n7 - 40MHz CP-OFDM QPSK - Full RB)

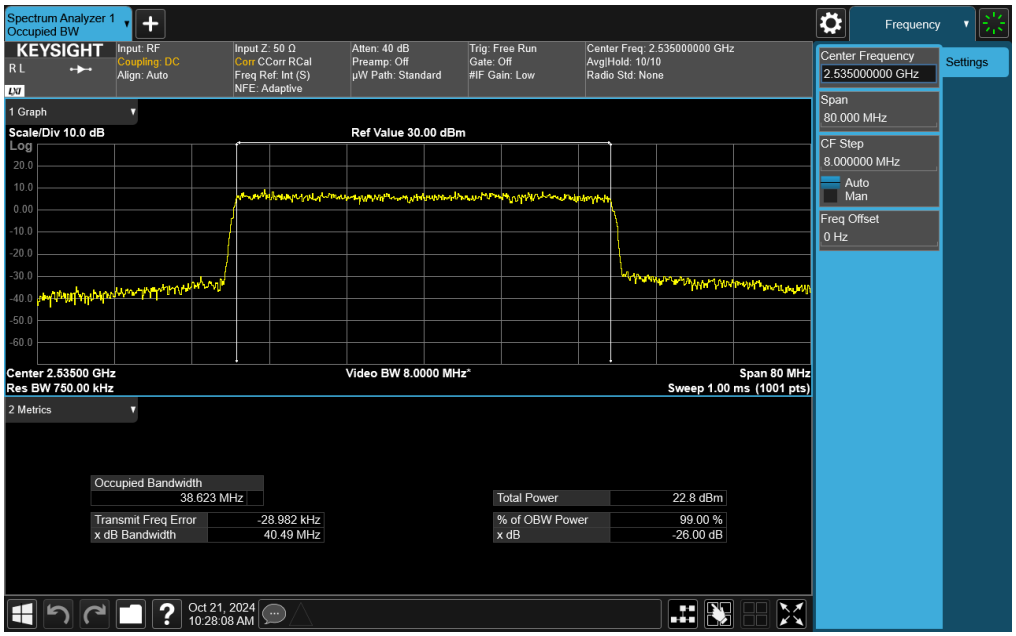

Plot 7-88. Occupied Bandwidth Plot (NR Band n7 - 40MHz CP-OFDM 16-QAM - Full RB)

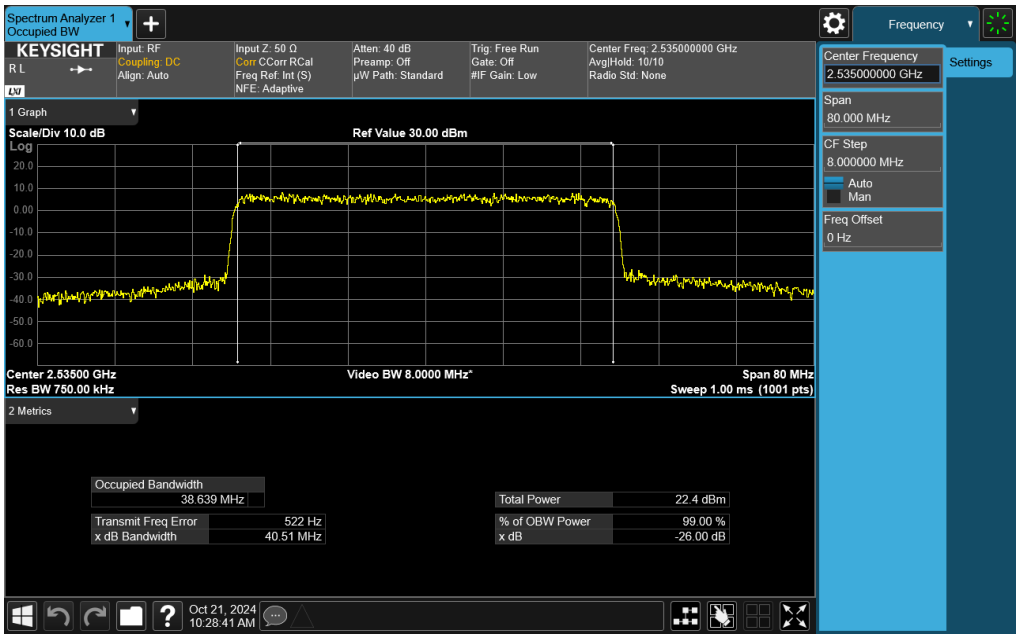

Plot 7-89. Occupied Bandwidth Plot (NR Band n7 - 40MHz CP-OFDM 64-QAM - Full RB)

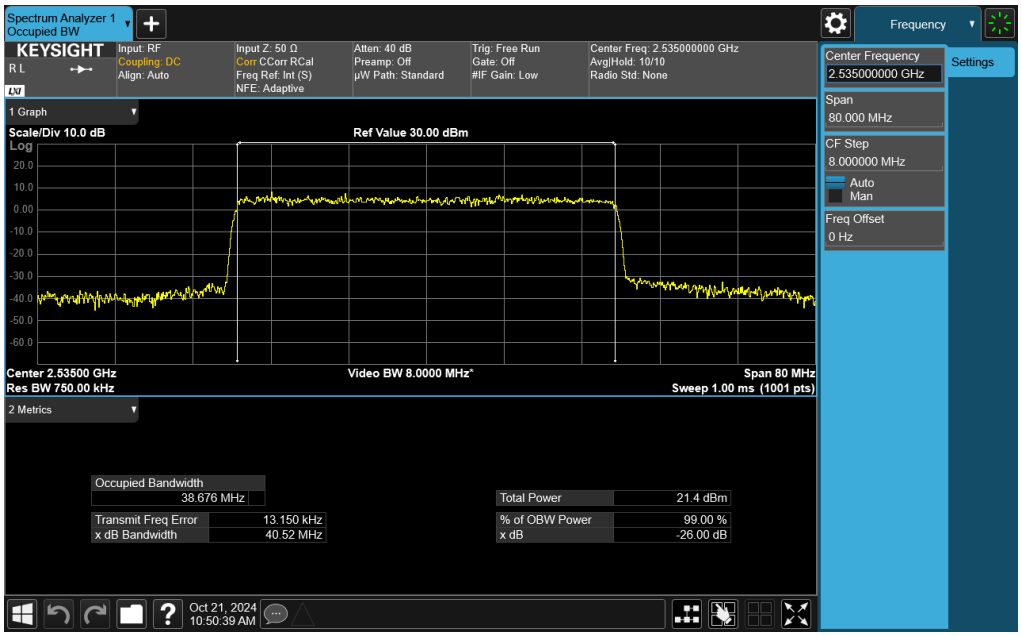

Plot 7-90. Occupied Bandwidth Plot (NR Band n7 - 40MHz CP-OFDM 256-QAM - Full RB)

NR Band n41

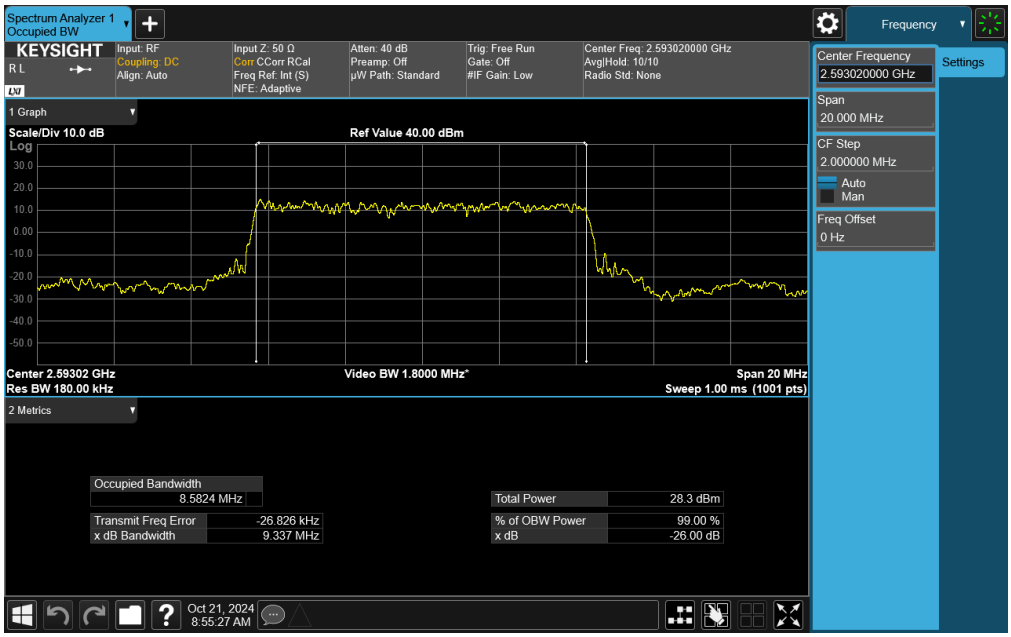

Plot 7-91. Occupied Bandwidth Plot (NR Band n41 - 10MHz DFT-s-OFDM π/2 BPSK - Full RB)

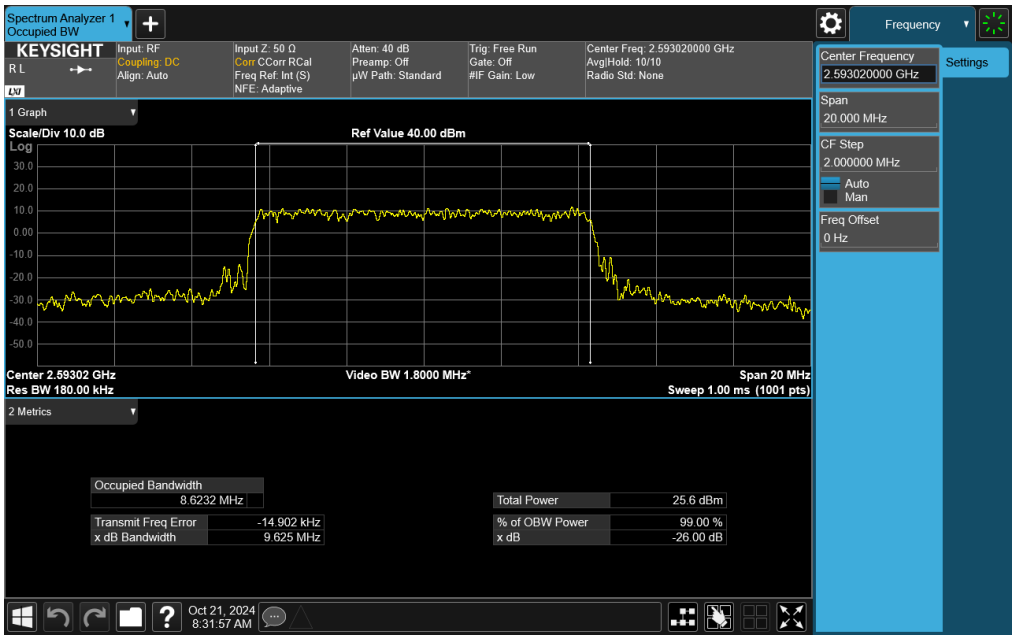

Plot 7-92. Occupied Bandwidth Plot (NR Band n41 - 10MHz CP-OFDM QPSK - Full RB)