



Plot 7-63. Conducted Spurious Plot Antenna 1a (802.11ax OFDMA - RU242 - Ch. 1)




Plot 7-64. Conducted Spurious Plot Antenna 1a (802.11ax OFDMA - RU242 - Ch. 1)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 63 of 116	
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 03 01 110	

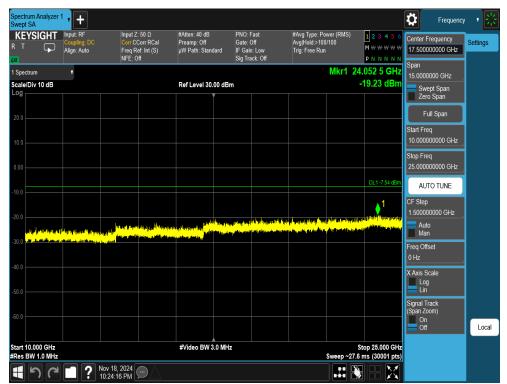

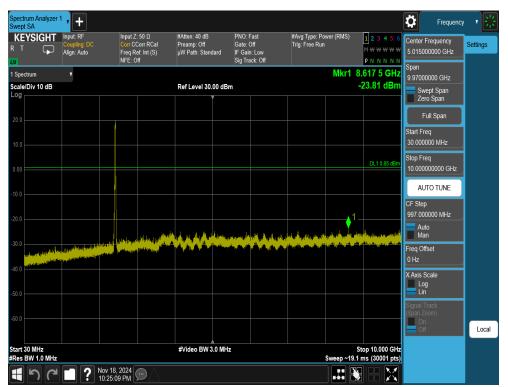


Plot 7-65. Conducted Spurious Plot Antenna 1a (802.11ax OFDMA - RU242 - Ch. 6)

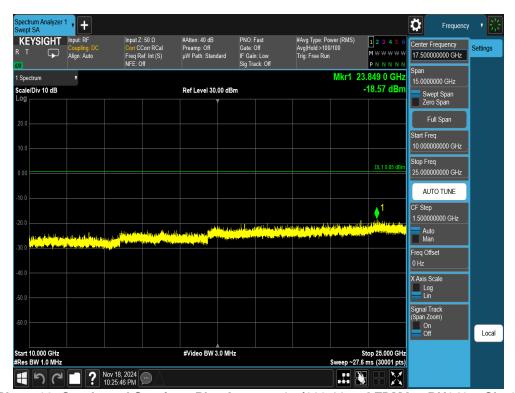

Plot 7-66. Conducted Spurious Plot Antenna 1a (802.11ax OFDMA - RU242 - Ch. 6)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 64 of 116	
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 04 of 110	



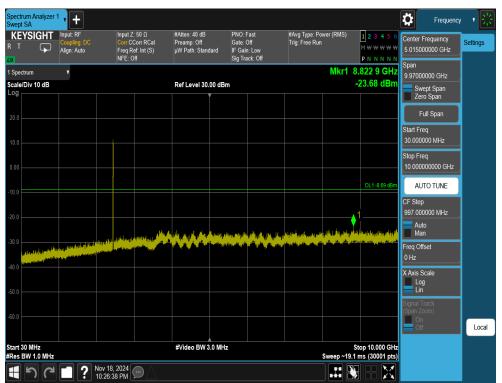

Plot 7-67. Conducted Spurious Plot Antenna 1a (802.11ax OFDMA - RU242 - Ch. 11)



Plot 7-68. Conducted Spurious Plot Antenna 1a (802.11ax OFDMA - RU242 - Ch. 11)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 65 of 116	
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 03 01 110	



7.7 Radiated Spurious Emissions – Above 1 GHz §15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-24 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]		
Above 960.0 MHz	500	3		

Table 7-24. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Subclause 6.6.4.3 KDB 558074 D01 v05r02 – Sections 8.6, 8.7

Test Settings

Average Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = power average (RMS)
- 5. Number of Measurement points = 1001 (Number of points must be ≥ 2 x span/RBW)
- 6. Sweep time = auto
- 7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

FCC ID: BCGA3355 IC: 579C-A3355	element	ement MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 66 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 00 01 110



Test Setup

The EUT and Measurement equipment were set up as shown in the diagram below.

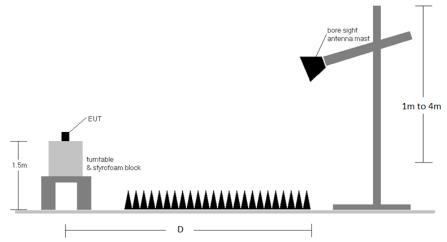


Figure 7-6. Radiated Measurement Setup

Test Notes

- The optional test procedures for antenna port conducted Measurements of unwanted emissions per the guidance
 of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All Radiated
 Spurious Emissions levels were measured in a radiated test setup.
- 2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-24.
- 3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- 4. This unit was tested with its standard battery.
- 5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak Measurements were taken using linearly polarized horn antennas.
- D is the Measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while
 emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction
 factor.
- 7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
- 8. The "-" shown in the following RSE tables are used to denote a noise floor Measurement.
- 9. All data rates were investigated and only the worst case is reported.
- 10. For radiated Measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 67 of 116	
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage of or 110	



Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dBuV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- O AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] Preamplifier Gain [dB]
- o Margin [dB] = Field Strength Level [dB $_{\mu}V/m$] Limit [dB $_{\mu}V/m$]


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.2 7.7.4 was calculated using the formula:
 - Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) Preamplifier Gain

FCC ID: BCGA3355 IC: 579C-A3355	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 68 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	Faye 00 01 110



7.7.1 CDD Radiated Spurious Emission Measurements §15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

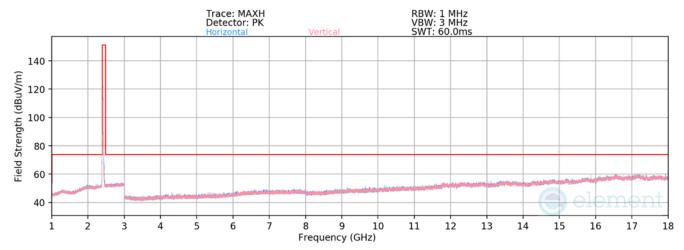

Plot 7-69. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA - RU26 - Ch. 1)


Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Average	Н	-	-	-79.32	7.06	34.74	53.98	-19.24
4824.00	Peak	Н	-	-	-68.15	7.47	46.32	73.98	-27.66
12060.00	Average	V	1	-	-82.00	17.58	42.57	53.98	-11.41
12060.00	Peak	V	-	-	-71.01	18.03	54.02	73.98	-19.96


Table 7-25. Radiated Measurements CDD (RU26)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)			
Test Report S/N:	Test Dates:	EUT Type:	Page 69 of 116		
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 09 01 110		



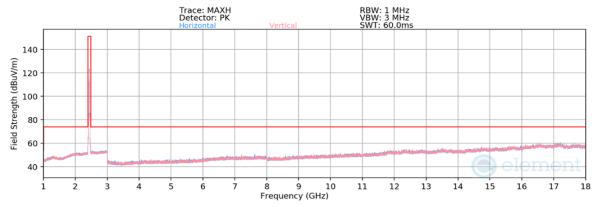

Plot 7-70. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA - RU26 - Ch. 6)

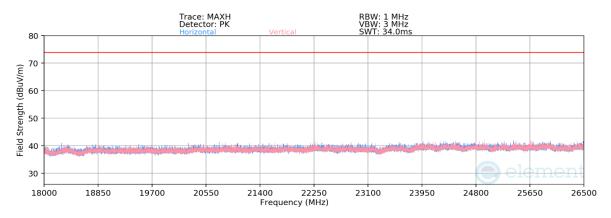

Plot 7-71. Radiated Spurious Emissions above 18GHz CDD (802.11ax OFDMA - RU26 - Ch. 6)

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 2437MHz


Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Average	Н	-	-	-79.68	7.57	34.89	53.98	-19.09
4874.00	Peak	Н	-	-	-67.78	7.57	46.80	73.98	-27.18
7311.00	Average	Н	-	-	-79.96	10.57	37.62	53.98	-16.36
7311.00	Peak	Н	-	-	-68.72	10.57	48.85	73.98	-25.13
12185.00	Average	V	-	-	-82.39	17.90	42.51	53.98	-11.47
12185.00	Peak	V	-	-	-71.13	17.90	53.78	73.98	-20.20

Table 7-26. Radiated Measurements CDD (RU26)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 70 of 116	
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 70 of 110	



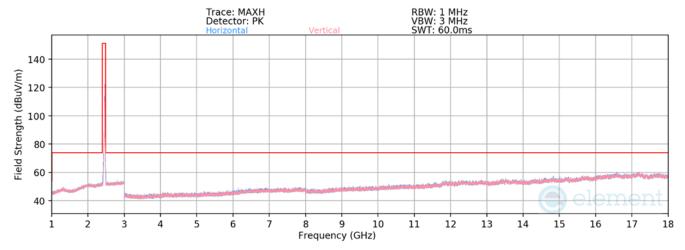

Plot 7-72. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 11)

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz


Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4924.00	Average	V	-	-	-79.56	7.40	34.83	53.98	-19.15
4924.00	Peak	V	-	-	-67.88	7.20	46.32	73.98	-27.66
7386.00	Average	V	-	-	-80.45	10.76	37.31	53.98	-16.67
7386.00	Peak	V	-	-	-68.02	10.48	49.46	73.98	-24.52
12310.00	Average	Н	-	-	-82.73	18.71	42.98	53.98	-11.00
12310.00	Peak	Н	-	-	-71.28	18.39	54.11	73.98	-19.87

Table 7-27. Radiated Measurements CDD (RU26)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 71 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage / For Fro



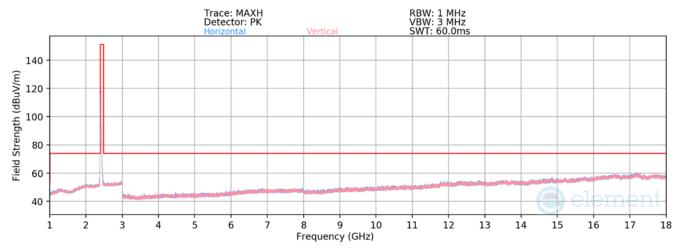

Plot 7-73. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA - RU242 - Ch. 1)


Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Average	Н	-	-	-78.58	7.06	35.48	53.98	-18.50
4824.00	Peak	Н	-	-	-67.67	7.00	46.33	73.98	-27.65
12060.00	Average	V	-	-	-82.55	18.01	42.46	53.98	-11.52
12060.00	Peak	V	-	-	-71.00	18.01	54.01	73.98	-19.97


Table 7-28. Radiated Measurements CDD (RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 72 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 72 of 110



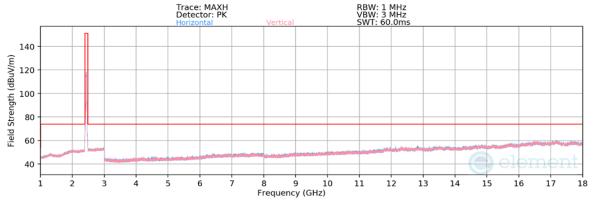

Plot 7-74. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA - RU242 - Ch. 6)

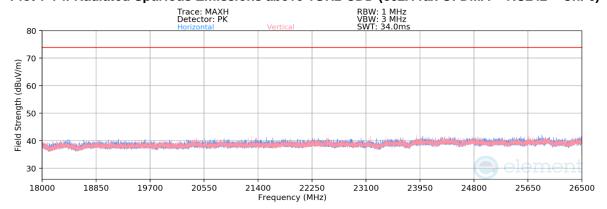

Plot 7-75. Radiated Spurious Emissions above 18GHz CDD (802.11ax OFDMA - RU242 - Ch. 6)


Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Average	Н	-	-	-79.68	7.57	34.89	53.98	-19.09
4874.00	Peak	Н	-	-	-67.85	7.06	46.21	73.98	-27.77
7311.00	Average	Н	-	-	-80.00	10.57	37.57	53.98	-16.41
7311.00	Peak	Н	-	-	-68.18	10.43	49.25	73.98	-24.73
12185.00	Average	Н	-	-	-82.44	17.90	42.46	53.98	-11.52
12185.00	Peak	Н	-	-	-70.46	17.38	53.93	73.98	-20.05

Table 7-29. Radiated Measurements CDD (RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 73 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 73 of 110



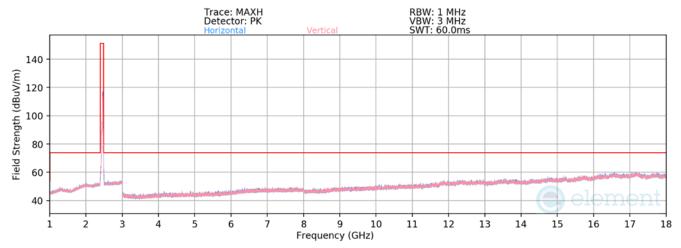

Plot 7-76. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA - RU242 - Ch. 11)

Worst Case Mode:

Worst Case Transfer Rate:

RU Index:

Distance of Measurements:

Operating Frequency:

Channel:

802.11ax OFDMA

MCS0

61

3 Meters

2462MHz

11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4924.00	Average	V	-	-	-79.53	7.20	34.68	53.98	-19.30
4924.00	Peak	V	-	-	-68.69	7.58	45.89	73.98	-28.09
7386.00	Average	Н	-	-	-80.34	10.76	37.41	53.98	-16.57
7386.00	Peak	Н	-	-	-68.08	10.51	49.43	73.98	-24.55
12310.00	Average	V	-	-	-82.53	18.39	42.86	53.98	-11.12
12310.00	Peak	V	-	-	-71.74	18.71	53.97	73.98	-20.01

Table 7-30. Radiated Measurements CDD (RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 74 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 74 of 110



7.7.2 Antenna 3a Radiated Restricted Band Edge Measurements §15.205 §15.209; RSS-Gen [8.9]

RU26

 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 0

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2412MHz

 Channel:
 1

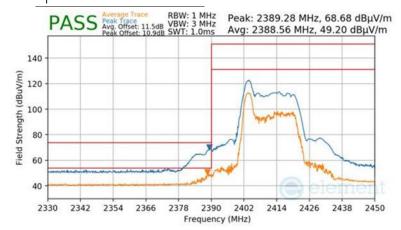

Plot 7-77 Radiated Restricted Lower Band Edge Measurement Antenna 3a (Peak & Average - RU26)

 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 8

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2412MHz

 Channel:
 1

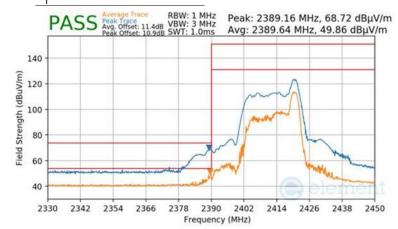

Plot 7-78 Radiated Restricted Lower Band Edge Measurement Antenna 3a (Peak & Average - RU26)


FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 75 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	Fage 73 01 110



Mode: Transfer Rate: RU Index: Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA
MCS9
0
3 Meters
2462MHz
11

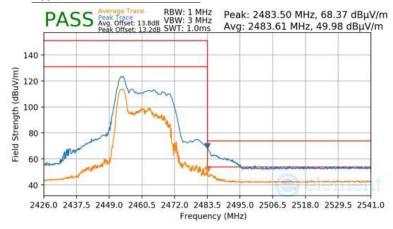


Plot 7-79 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU26)

Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA
MCS9
8
3 Meters
2462MHz
11

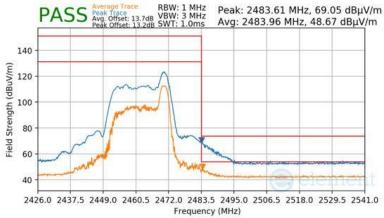

Plot 7-80 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU26)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 76 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 70 01 110




Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA
MCS9
0
3 Meters
2467MHz

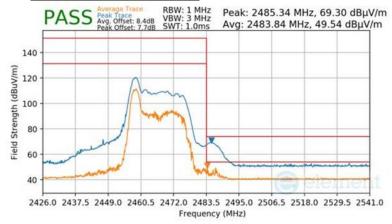


Plot 7-81 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU26)

Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA MCS9 8 3 Meters 2467MHz

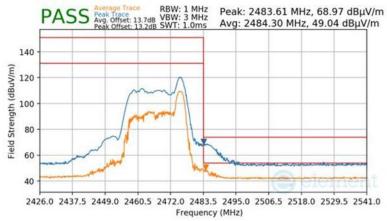

Plot 7-82 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU26)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 77 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage // Oi 110



RU242

 Mode:
 802.11ax OFDMA

 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2412MHz

1

Channel:

PASS Average Trace RBW: 1 MHz
Peak Trace RBW: 3 MHz
Avg. Offset: 11.3d8 VBW: 3 MHz
Peak Offset: 10.9dB SWT: 1.0ms Peak: 2389.76 MHz, 68.36 dBµV/m Avg: 2390.00 MHz, 50.58 dBµV/m 140 Field Strength (dBuV/m) 120 100 80 60 40 2330 2342 2354 2366 2378 2390 2402 2414 2426 2438 2450 Frequency (MHz)

Plot 7-83 Radiated Restricted Lower Band Edge Measurement Antenna 3a (Peak & Average - RU242)


 Mode:
 802.11ax OFDMA

 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2417MHz

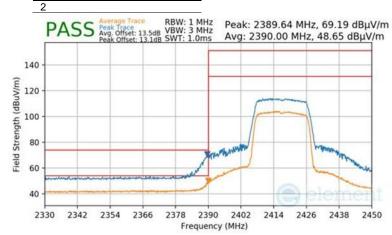

Plot 7-84 Radiated Restricted Lower Band Edge Measurement Antenna 3a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 78 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 70 of 110



 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2422MHz

 Channel:
 3

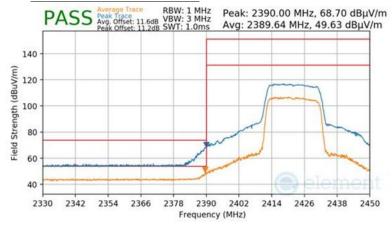

Plot 7-85 Radiated Restricted Lower Band Edge Measurement Antenna 3a (Peak & Average - RU242)

 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2427MHz

 Channel:
 4

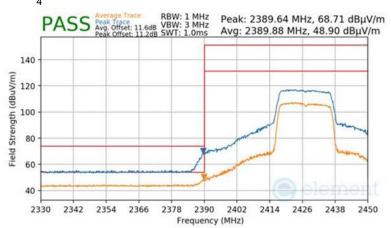


Plot 7-86 Radiated Restricted Lower Band Edge Measurement Antenna 3a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 79 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 19 01 110




802.11ax OFDMA Mode: Transfer Rate: MCS9 RU Index: 61 Distance of Measurements: 3 Meters Operating Frequency: 2432MHz Channel: 5

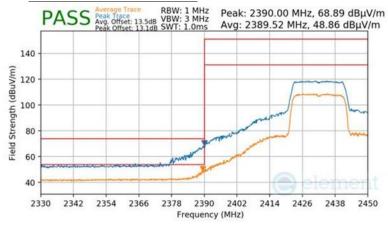

Plot 7-87 Radiated Restricted Lower Band Edge Measurement Antenna 3a (Peak & Average - RU242)

Mode: 802.11ax OFDMA Transfer Rate: MCS9 RU Index: 61 3 Meters Distance of Measurements: Operating Frequency: 2437MHz 6 Low

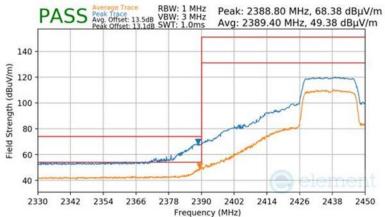

Plot 7-88 Radiated Restricted Lower Band Edge Measurement Antenna 3a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 80 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage of or 110




Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA	
MCS9	
61	
3 Meters	
2437MHz	
6 High	

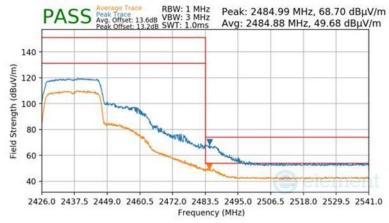


Plot 7-89 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU242)

Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:

802.11ax OFDMA
MCS9
61
3 Meters
2442MHz
7

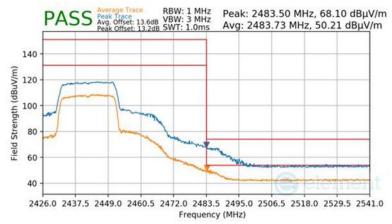

Plot 7-90 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 81 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage of of 110



 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2447MHz

 Channel:
 8

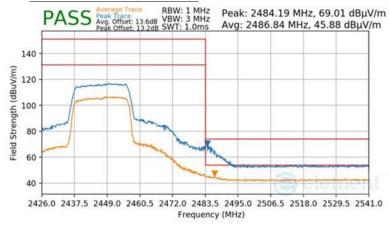


Plot 7-91 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU242)

Mode: Transfer Rate: RU Index: Distance of Measurements:

Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA MCS9 61 3 Meters 2452MHz

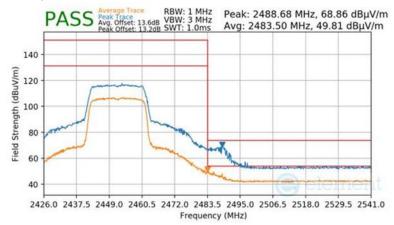

Plot 7-92 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 82 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	Fage 02 01 110



 Mode:
 802.11ax OFDMA

 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2457MHz

 Channel:
 10

PASS Peak (1842 VBW: 3 MHz Avg. 2483.96 MHz, 68.91 dBμV/m Avg. 2483.61 MHz, 50.05 dBμV/m Avg. 2483.61 MHz, 50.05 dBμV/m Avg. 2426.0 2437.5 2449.0 2460.5 2472.0 2483.5 2495.0 2506.5 2518.0 2529.5 2541.0 Frequency (MHz)

Plot 7-93 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU242)

 Mode:
 802.11ax

 Transfer Rate:
 MCS9


 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2462MHz

Channel:

802.11ax OFDMA
MCS9
61
3 Meters
2462MHz

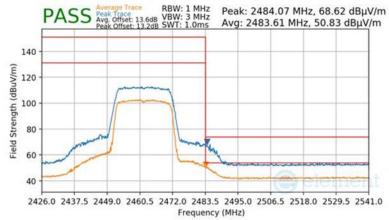


Plot 7-94 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 83 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 03 of 110



Mode: Transfer Rate: RU Index: Distance of Measurements: Operating Frequency:

802.11ax OFDMA
MCS9
61
3 Meters
2467MHz
12

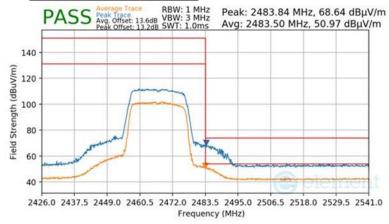

Plot 7-95 Radiated Restricted Upper Band Edge Measurement Antenna 3a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 84 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 64 01 110



7.7.3 Antenna 1a Radiated Restricted Band Edge Measurements §15.205 §15.209; RSS-Gen [8.9]

RU26

 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 0

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2412MHz

 Channel:
 1

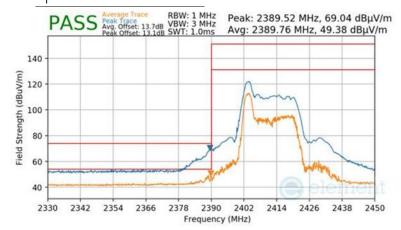

Plot 7-96 Radiated Restricted Lower Band Edge Measurement Antenna 1a (Peak & Average - RU26)

 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 8

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2412MHz

 Channel:
 1

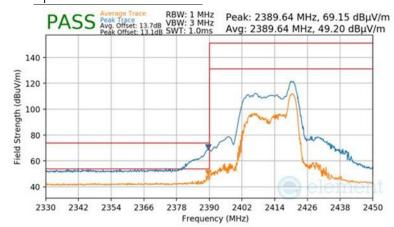

Plot 7-97 Radiated Restricted Lower Band Edge Measurement Antenna 1a (Peak & Average - RU26)


FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 85 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 65 01 110



Mode: Transfer Rate: RU Index: Distance of Measurements: Operating Frequency:

Channel:


802.11ax OFDMA
MCS9
0
3 Meters
2462MHz
11

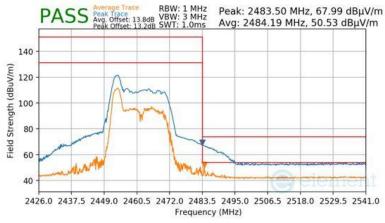


Plot 7-98 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU26)

Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:



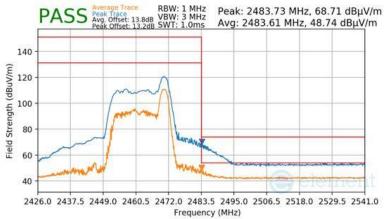

Plot 7-99 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU26)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 86 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 60 01 110




Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA
MCS9
0
3 Meters
2467MHz
12

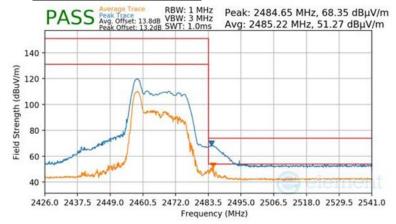


Plot 7-100 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU26)

Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA MCS9 8 3 Meters 2467MHz

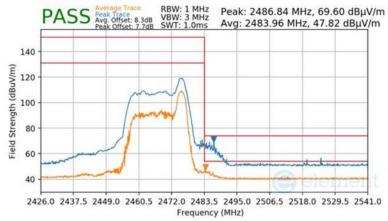

Plot 7-101 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU26)

FCC ID: BCGA3355 IC: 579C-A3355	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 87 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	Fage 07 OF 110



RU242

 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2412MHz

Channel:

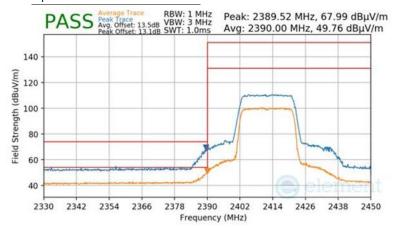

Plot 7-102 Radiated Restricted Lower Band Edge Measurement Antenna 1a (Peak & Average - RU242)


 Mode:
 802.11ax OFDMA

 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2417MHz

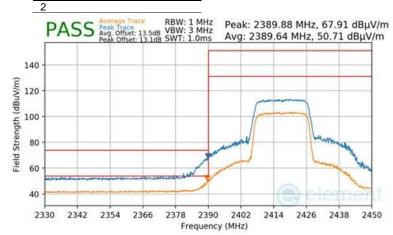

Plot 7-103 Radiated Restricted Lower Band Edge Measurement Antenna 1a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element	element Measurement Report (Certification)	
Test Report S/N:	Test Dates:	EUT Type:	Page 88 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 60 01 110



 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2422MHz

 Channel:
 3

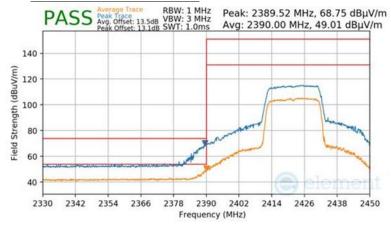

Plot 7-104 Radiated Restricted Lower Band Edge Measurement Antenna 1a (Peak & Average - RU242)

 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2427MHz

 Channel:
 4

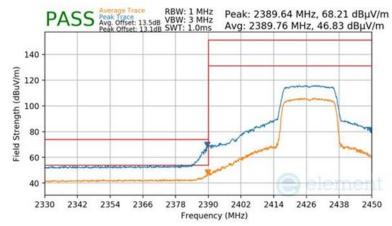

Plot 7-105 Radiated Restricted Lower Band Edge Measurement Antenna 1a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 89 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 69 01 110



 Mode:
 802.11ax OFDMA

 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2432MHz

 Channel:
 5

RBW: 1 MHz VBW: 3 MHz SWT: 1.0ms Peak: 2389.40 MHz, 68.36 dBµV/m Avg: 2389.88 MHz, 50.90 dBµV/m Field Strength (dBuV/m) Frequency (MHz)

Plot 7-106 Radiated Restricted Lower Band Edge Measurement Antenna 1a (Peak & Average - RU242)

 Mode:
 802.11ax OFDMA

 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2437MHz

 Channel:
 6 Low

RBW: 1 MHz VBW: 3 MHz SWT: 1.0ms Peak: 2389.88 MHz, 68.28 dBµV/m Avg: 2389.64 MHz, 49.68 dBµV/m Field Strength (dBuV/m) Frequency (MHz)

Plot 7-107 Radiated Restricted Lower Band Edge Measurement Antenna 1a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element Measurement Report (Certification)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 90 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 90 of 110



 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2437MHz

 Channel:
 6 High

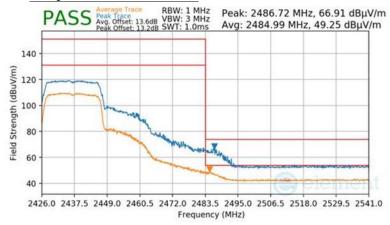

Plot 7-108 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU242)

 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2442MHz

 Channel:
 7

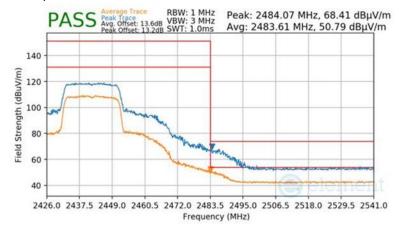

Plot 7-109 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element Measurement Report (Certification)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 91 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 91 01 110



 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2447MHz

 Channel:
 8

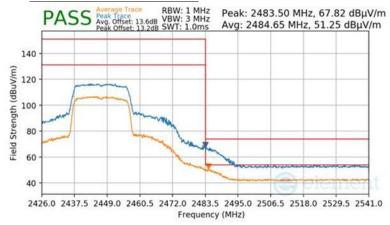

Plot 7-110 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU242)

 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2452MHz

 Channel:
 9

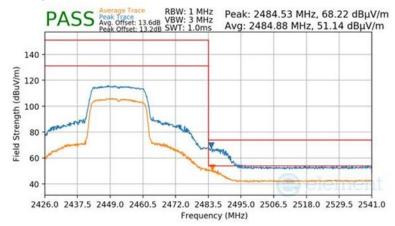

Plot 7-111 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element Measurement Report (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 92 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 92 of 110



 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2457MHz

 Channel:
 10

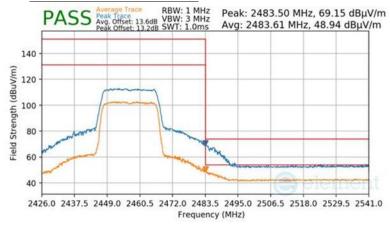

Plot 7-112 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU242)

 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2462MHz

 Channel:
 11

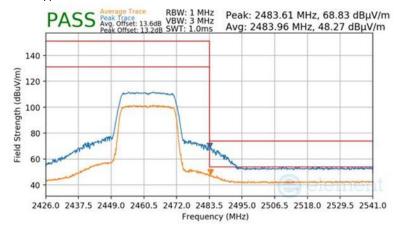


Plot 7-113 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element Measurement Report (Certification)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 93 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 93 of 110



Mode: Transfer Rate: RU Index: Distance of Measurements: Operating Frequency:

802.11ax OFDMA
MCS9
61
3 Meters
2467MHz
12

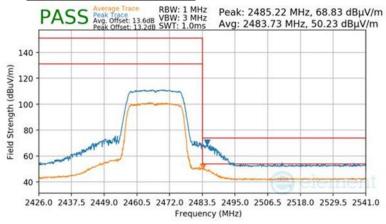

Plot 7-114 Radiated Restricted Upper Band Edge Measurement Antenna 1a (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element Measurement Report (Certification)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 94 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 94 of 110



7.7.4 CDD Radiated Restricted Band Edge Measurements §15.205 §15.209; RSS-Gen [8.9]

RU26

 Mode:
 802.11ax OFDMA

 Transfer Rate:
 MCS9

 RU Index:
 0

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2412MHz


 Channel:
 1

RBW: 1 MHz VBW: 3 MHz Peak: 2389.40 MHz, 67.96 dBµV/m Avg: 2389.16 MHz, 50.82 dBµV/m Field Strength (dBuV/m) 120 80 60 40 2342 2378 2402 2414 2426 2438 2450 2330 2354 2366 2390 Frequency (MHz)

Plot 7-115 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average - RU26)

Mode: Transfer Rate: RU Index: Distance of Measurement

Distance of Measurements: Operating Frequency: Channel: 802.11ax OFDMA MCS9 8 3 Meters 2412MHz

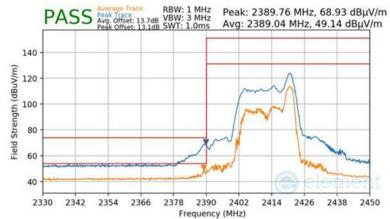

Plot 7-116 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average - RU26)


FCC ID: BCGA3355 IC: 579C-A3355	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 95 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	Fage 33 of 110



Mode: Transfer Rate: RU Index: Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA MCS9 0 3 Meters 2462MHz 11

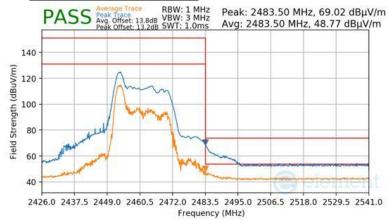


Plot 7-117 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU26)

Mode: Transfer Rate: RU Index:

Distance of Measurements:
Operating Frequency:

Channel:

802.11ax OFDMA
MCS9
8
3 Meters
2462MHz

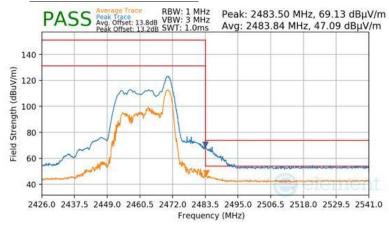


Plot 7-118 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU26)

FCC ID: BCGA3355 IC: 579C-A3355	element	element Measurement report (Certification)	
Test Report S/N:	Test Dates:	EUT Type:	Page 96 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 90 01 110



Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency: Channel: 802.11ax OFDMA
MCS9
0
3 Meters
2467MHz

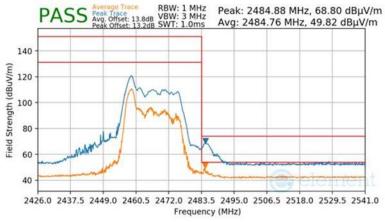


Plot 7-119 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU26)

Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA MCS9 8 3 Meters 2467MHz

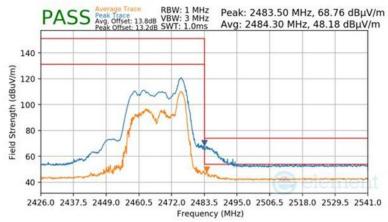

Plot 7-120 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU26)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 97 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	




RU242

Channel:

Mode: 80
Transfer Rate: M
RU Index: 61
Distance of Measurements: 3
Operating Frequency: 24

802.11ax OFDMA MCS9 61 3 Meters 2412MHz

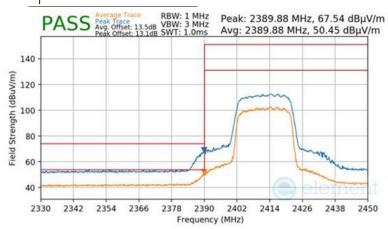


Plot 7-121 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average - RU242)

Mode: Transfer Rate: RU Index:

Distance of Measurements:
Operating Frequency:

Channel:

802.11ax OFDMA
MCS9
61
3 Meters
2417MHz
2

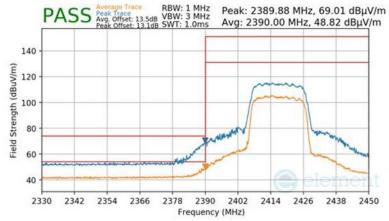

Plot 7-122 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 98 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 90 of 110



 Mode:
 802.11


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Mete

 Operating Frequency:
 2422M

802.11ax OFDMA MCS9 61 3 Meters 2422MHz

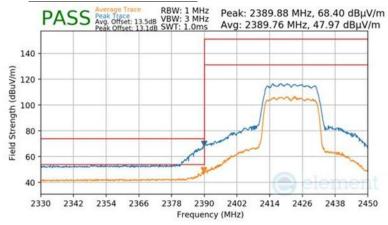

Plot 7-123 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average - RU242)


Mode: Transfer Rate: RU Index: Distance of Measuremen

Distance of Measurements: Operating Frequency:

Channel:

Channel:

802.11ax OFDMA
MCS9
61
3 Meters
2427MHz
4

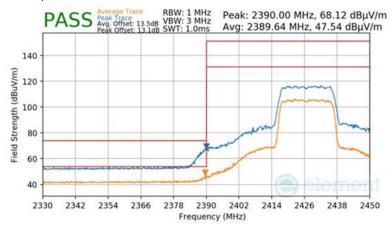

Plot 7-124 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 99 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 99 of 110



 Mode:
 802.11a

 Transfer Rate:
 MCS9


 RU Index:
 61

 Distance of Measurements:
 3 Meter

 Operating Frequency:
 2432Mir

 Channel:
 5

802.11ax OFDMA
MCS9
61
3 Meters
2432MHz
5

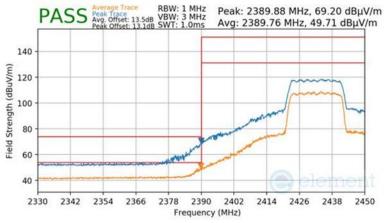


Plot 7-125 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average - RU242)

Mode: Transfer Rate: RU Index: Distance of Measureme

Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA
MCS9
61
3 Meters
2437MHz
6 Low

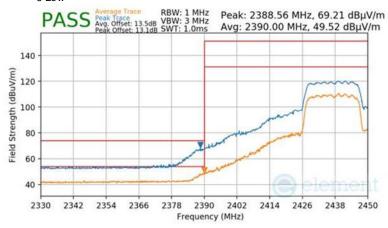

Plot 7-126 Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 100 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 100 of 110



 Mode:
 802.11ax OFDMA


 Transfer Rate:
 MCS9

 RU Index:
 61

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2437MHz

 Channel:
 6 High

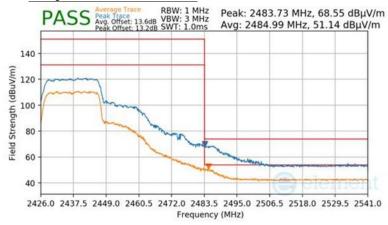


Plot 7-127 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU242)

Transfer Rate: RU Index: Distance of Measurements: Operating Frequency: Channel:

Mode:

802.11ax OFDMA
MCS9
61
3 Meters
2442MHz
7

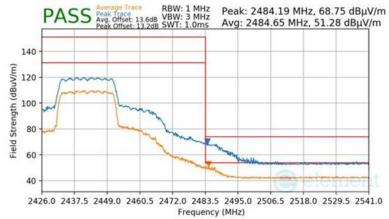

Plot 7-128 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU242)


FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 101 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage for or fro



Mode: Transfer Rate: RU Index: Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA
MCS9
61
3 Meters
2447MHz
8

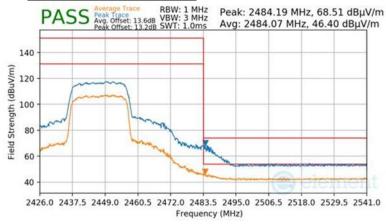



Plot 7-129 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU242)

Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:

Channel:



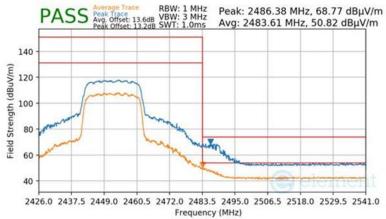

Plot 7-130 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU242)


FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 102 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 102 01 110



Mode: Transfer Rate: RU Index: Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA MCS9 61 3 Meters 2457MHz

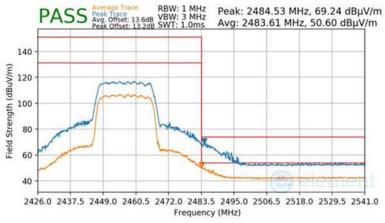


Plot 7-131 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU242)

Mode: Transfer Rate: RU Index:

Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA MCS9 61 3 Meters 2462MHz

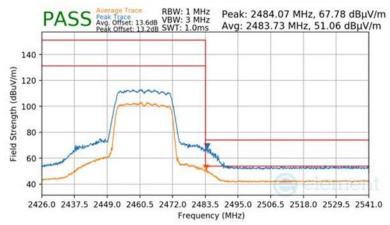

Plot 7-132 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU242)


FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 103 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 103 of 110



Mode: Transfer Rate: RU Index: Distance of Measurements: Operating Frequency:

Channel:

802.11ax OFDMA
MCS9
61
3 Meters
2467MHz
12

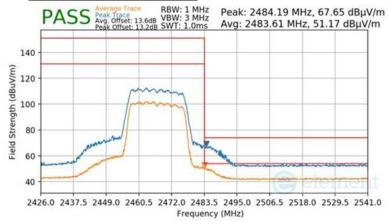

Plot 7-133 Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average - RU242)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 104 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 104 01 110



7.8 Radiated Spurious Emissions – Below 1GHz §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-31 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490 MHz	2400/F (kHz)	300
0.490 - 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-31. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. VBW = 300kHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- Trace mode = max hold
- 7. Trace was allowed to stabilize

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 105 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 103 01 110



Test Setup

The EUT and Measurement equipment were set up as shown in the diagrams below.

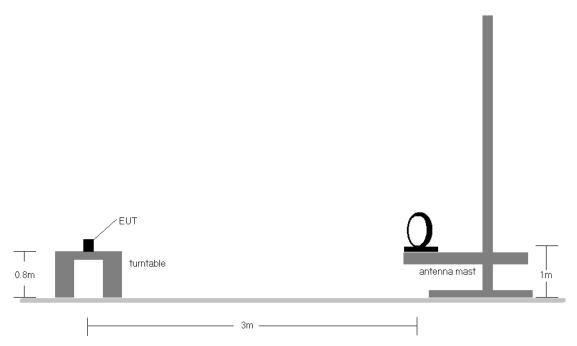


Figure 7-7. Radiated Test Setup < 30MHz

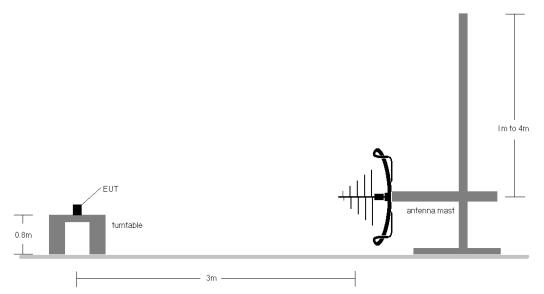


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 106 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 100 01 110



Test Notes

- All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-31.
- 2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
- 3. This unit was tested with its standard battery.
- 4. The spectrum is investigated using a peak detector and final Measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
- 5. Emissions were measured at a 3 meter test distance.
- 6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
- 7. No spurious emissions were detected within 20dB of the limit below 30MHz.
- 8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the Measurement antenna was found to be less than 2:1.
- 9. All antenna configurations and data rates were investigated and only the worst case are reported.
- 10. For radiated Measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.
- 11. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $[dB_{\mu}V/m]$ = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- O AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB, V/m] Limit [dB, V/m]

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 107 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 107 01 110



CDD Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

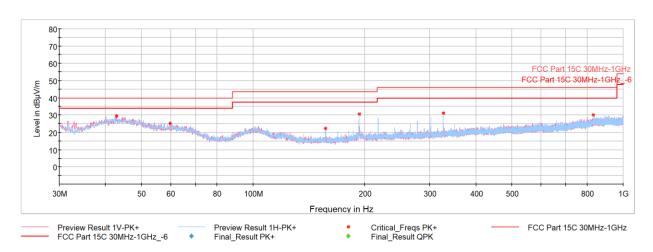


Plot 7-134. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
42.85	Max-Peak	٧	200	274	-62.51	-14.96	29.53	40.00	-10.47
59.63	Max-Peak	Н	300	94	-65.94	-15.66	25.40	40.00	-14.60
157.02	Max-Peak	Н	200	143	-65.40	-19.14	22.46	43.52	-21.06
193.35	Max-Peak	Н	100	172	-60.25	-16.12	30.63	43.52	-12.89
326.48	Max-Peak	Н	100	241	-63.36	-12.43	31.21	46.02	-14.81
829.04	Max-Peak	Н	100	261	-74.39	-2.54	30.07	46.02	-15.95

Table 7-32. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 108 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 100 01 110



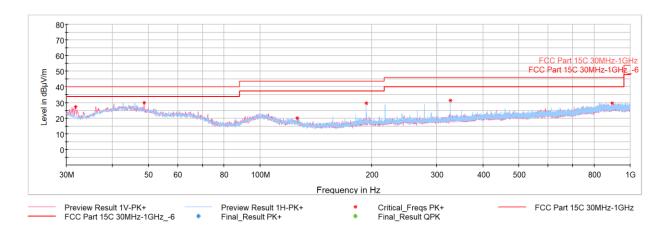

Plot 7-135. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
31.75	Max-Peak	V	200	15	-61.13	-18.55	27.32	40.00	-12.68
48.62	Max-Peak	V	100	8	-62.79	-14.35	29.86	40.00	-10.14
125.93	Max-Peak	Н	200	36	-67.63	-19.26	20.11	43.52	-23.41
193.45	Max-Peak	Н	100	140	-61.38	-16.11	29.51	43.52	-14.01
326.38	Max-Peak	Н	100	257	-63.13	-12.44	31.43	46.02	-14.59
891.94	Max-Peak	V	100	291	-75.53	-1.76	29.71	46.02	-16.31

Table 7-33. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 109 of 116	
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 109 01 110	



7.9 AC Line-Conducted Emissions Measurement §15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission	Conducted Limit (dBμV)				
(MHz)	Quasi-peak	Average			
0.15 - 0.5	66 to 56*	56 to 46*			
0.5 – 5	56	46			
5 – 30	60	50			

Table 7-34. Conducted Limits

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- 2. RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

Average Measurements

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- 2. RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = RMS
- Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 110 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 110 01 110

^{*}Decreases with the logarithm of the frequency.



Test Setup

The EUT and Measurement equipment were set up as shown in the diagram below.

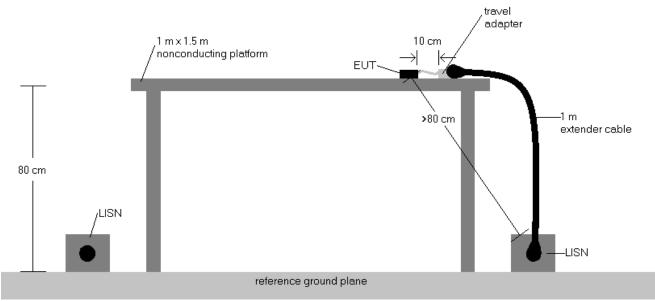



Figure 7-9. Test Instrument & Measurement Setup

Test Notes

- 1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- 2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
- 3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
- 4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Correction Factore (dB)
- 6. Margin (dB) = QP/AV Level (dB μ V) QP/AV Limit (dB μ V)
- 7. Traces shown in plot are made using quasi peak and average detectors.
- 8. Deviations to the Specifications: None.
- 9. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA3355 IC: 579C-A3355	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 111 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage III of 110



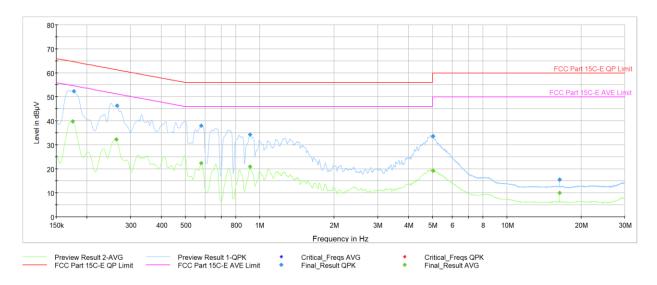


Plot 7-136. AC Line Conducted Emissions with 802.11ax (RU26) Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Marqin [dB]	Line	PE
0.175	FINAL		39.87	54.73	-14.87	L1	GND
0.177	FINAL	52.4		64.63	-12.20	L1	GND
0.263	FINAL		32.37	51.35	-18.98	L1	GND
0.265	FINAL	46.4		61.28	-14.88	L1	GND
0.580	FINAL		22.51	46.00	-23.49	L1	GND
0.580	FINAL	38.0		56.00	-18.01	L1	GND
0.913	FINAL	34.3		56.00	-21.73	L1	GND
0.913	FINAL		20.91	46.00	-25.09	L1	GND
5.026	FINAL	33.7		60.00	-26.28	L1	GND
5.028	FINAL		19.27	50.00	-30.73	L1	GND
16.332	FINAL		9.99	50.00	-40.01	L1	GND
16.332	FINAL	15.5		60.00	-44.52	L1	GND

Table 7-35. AC Line Conducted Data with 802.11ax (RU26) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 112 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 112 01 110



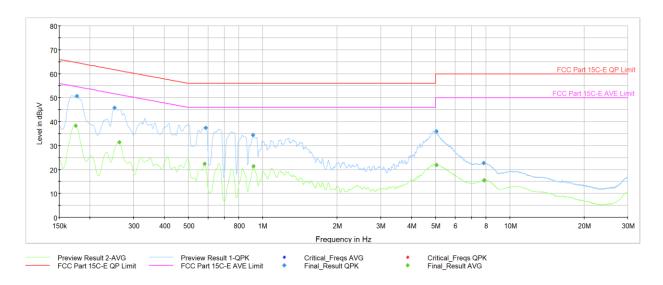


Plot 7-137. AC Line Conducted Emissions with 802.11ax (RU26) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dB µ V]	Averaqe [dBµV]	Limit [dBµV]	Marqin [dB]	Line	PE
0.175	FINAL		38.30	54.73	-16.43	N	GND
0.177	FINAL	50.6		64.63	-13.99	N	GND
0.251	FINAL	45.9		61.72	-15.81	N	GND
0.263	FINAL		31.42	51.35	-19.93	N	GND
0.582	FINAL		22.35	46.00	-23.65	N	GND
0.589	FINAL	37.6	_	56.00	-18.45	Ν	GND
0.913	FINAL	34.4	_	56.00	-21.60	Ν	GND
0.915	FINAL		21.41	46.00	-24.59	N	GND
5.037	FINAL	35.9		60.00	-24.08	N	GND
5.042	FINAL		21.87	50.00	-28.13	N	GND
7.836	FINAL	22.7		60.00	-37.26	N	GND
7.865	FINAL		15.58	50.00	-34.42	N	GND

Table 7-36. AC Line Conducted Data with 802.11ax (RU26) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3355 IC: 579C-A3355	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 113 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 113 01 110



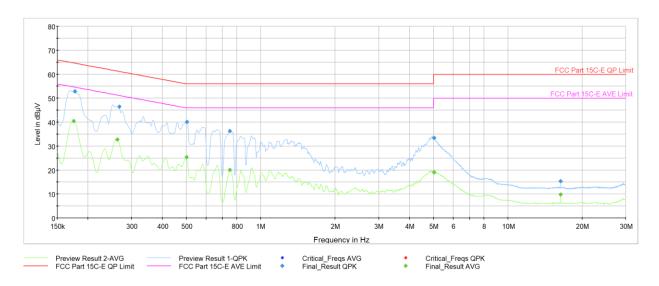


Plot 7-138. AC Line Conducted Emissions with 802.11ax (RU242) Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dB µ V]	Averaqe [dBµV]	Limit [dBµV]	Marqin [dB]	Line	PE
0.175	FINAL		40.44	54.73	-14.29	L1	GND
0.177	FINAL	52.9		64.63	-11.73	L1	GND
0.263	FINAL		32.76	51.35	-18.59	L1	GND
0.267	FINAL	46.5		61.21	-14.76	L1	GND
0.501	FINAL		25.37	46.00	-20.63	L1	GND
0.503	FINAL	40.2		56.00	-15.81	L1	GND
0.749	FINAL	36.3		56.00	-19.72	L1	GND
0.749	FINAL		20.15	46.00	-25.85	L1	GND
5.024	FINAL		19.11	50.00	-30.89	L1	GND
5.028	FINAL	33.4		60.00	-26.58	L1	GND
16.325	FINAL		9.94	50.00	-40.06	L1	GND
16.325	FINAL	15.5		60.00	-44.53	L1	GND

Table 7-37. AC Line Conducted Data with 802.11ax (RU242) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 114 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 114 01 110



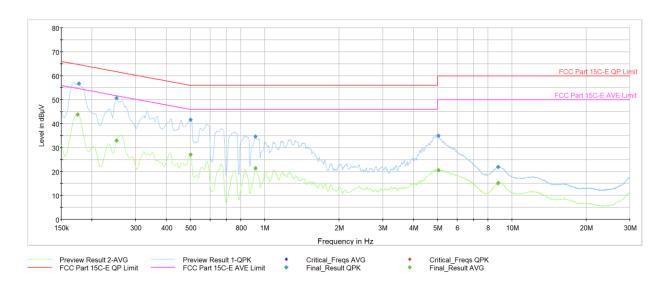

Plot 7-139. AC Line Conducted Emissions with 802.11ax (RU242) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Averaqe [dBµV]	Limit [dBµV]	Marqin [dB]	Line	PE
0.175	FINAL		43.82	54.73	-10.91	N	GND
0.177	FINAL	56.7		64.63	-7.97	N	GND
0.251	FINAL	50.8		61.72	-10.92	N	GND
0.251	FINAL		32.99	51.72	-18.72	N	GND
0.501	FINAL		27.19	46.00	-18.81	N	GND
0.501	FINAL	41.6		56.00	-14.40	N	GND
0.915	FINAL	34.6		56.00	-21.42	N	GND
0.917	FINAL		21.47	46.00	-24.53	N	GND
5.046	FINAL	34.9		60.00	-25.06	Ν	GND
5.051	FINAL		20.63	50.00	-29.37	Ν	GND
8.792	FINAL	22.0	_	60.00	-37.99	Ν	GND
8.799	FINAL		15.29	50.00	-34.71	Ν	GND

Table 7-38. AC Line Conducted Data with 802.11ax (RU242) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 115 of 116	
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 115 01 110	



8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3355, IC: 579C-A3355** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3355 IC: 579C-A3355	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 116 of 116
1C2410210077-15.BCG	10/25/2024 - 1/14/2025	Tablet Device	rage 110 01 110