

Figure 235 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth

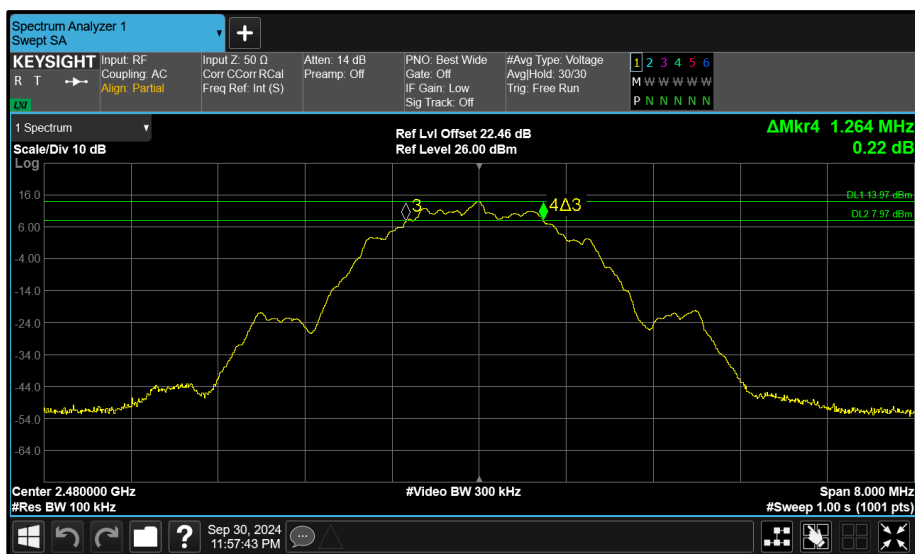


Figure 236 - Core 0 (A) 2480 MHz (CH39) 6 dB Bandwidth

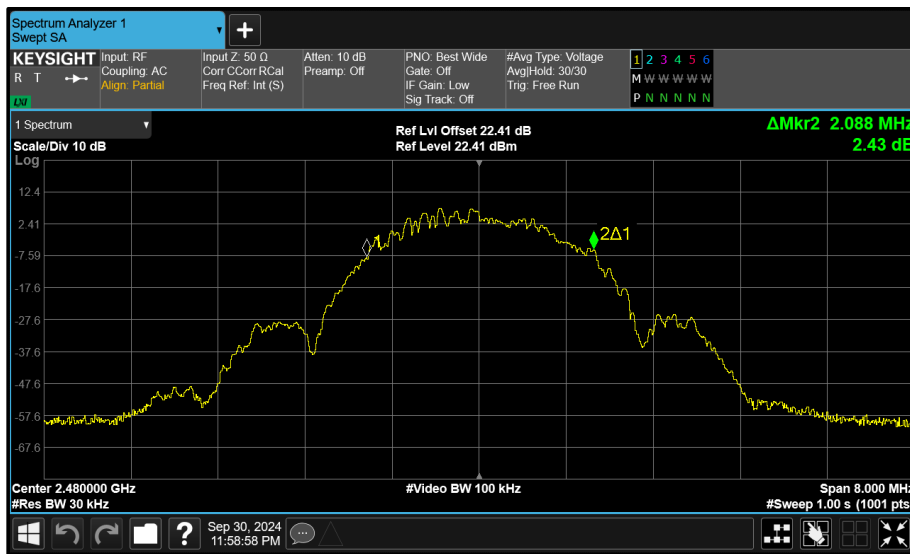


Figure 237 - Core 1 (B) 2480 MHz (CH39) 99% Bandwidth

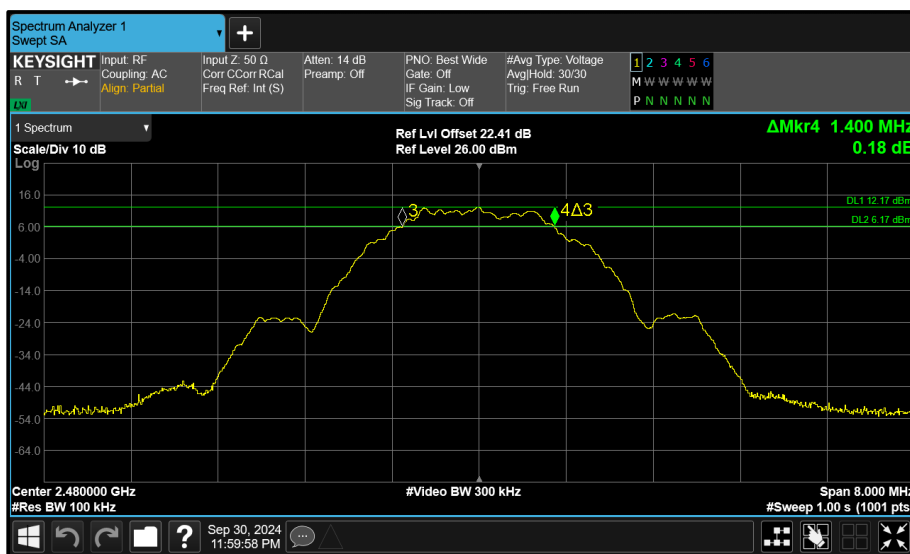


Figure 238 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2)

The minimum 6 dB Bandwidth shall be at least 500 kHz.



**2.2.7 Test Location and Test Equipment Used**

This test was carried out in RF Chamber 18 and RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5919	24	18-Mar-2026
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	28-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6519	12	08-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6520	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6521	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6528	12	22-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon

**Table 56**

O/P Mon - Output Monitored using calibrated equipment



## **2.3 Maximum Conducted Output Power**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (b)

### **2.3.2 Equipment Under Test and Modification State**

A3401, S/N: HHJTCJ96L9 - Modification State 0

### **2.3.3 Date of Test**

30-September-2024 to 04-October-2024

### **2.3.4 Test Method**

The test was performed in accordance with ANSI C63.10 clause 11.9.1.2 Method PKPM1.

MIMO output port summing was performed in accordance with KDB 662911 D01. The Directional Gain was calculated in accordance with clause F)2)f)(ii) using the calculations from F)2)f)(i) with worst-case individual gain and an array gain of zero.

### **2.3.5 Environmental Conditions**

Ambient Temperature	22.1 °C
Relative Humidity	52.6 - 58.6 %



**2.3.6 Test Results**

2.4 GHz Bluetooth LE/HDR

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	-	8.90	-	-	-	30.00	-21.10
2441	-	9.10	-	-	-	30.00	-20.90
2476	-	9.14	-	-	-	30.00	-20.86

**Table 57 - FCC Maximum Conducted (peak) Output Power Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	-	8.95	-	-	-	30.00	-21.05
2441	-	9.20	-	-	-	30.00	-20.80
2476	-	9.14	-	-	-	30.00	-20.86

**Table 58 - FCC Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	8.53	-	-	-	30.00	-21.47
2440	-	8.55	-	-	-	30.00	-21.45
2480	-	8.16	-	-	-	30.00	-21.84

**Table 59 - FCC Maximum Conducted (peak) Output Power Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	8.17	-	-	-	30.00	-21.83
2440	-	8.75	-	-	-	30.00	-21.25
2480	-	7.86	-	-	-	30.00	-22.14

**Table 60 - FCC Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	-	-	8.73	-	-	30.00	-21.27
2441	-	-	8.85	-	-	30.00	-21.15
2476	-	-	8.97	-	-	30.00	-21.03

**Table 61 - FCC Maximum Conducted (peak) Output Power Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	-	-	9.02	-	-	30.00	-20.98
2441	-	-	9.05	-	-	30.00	-20.95
2476	-	-	9.00	-	-	30.00	-21.00

**Table 62 - FCC Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	7.86	-	-	30.00	-22.14
2440	-	-	8.45	-	-	30.00	-21.55
2480	-	-	8.48	-	-	30.00	-21.52

**Table 63 - FCC Maximum Conducted (peak) Output Power Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	8.08	-	-	30.00	-21.92
2440	-	-	8.72	-	-	30.00	-21.28
2480	-	-	8.74	-	-	30.00	-21.26

**Table 64 - FCC Maximum Conducted (peak) Output Power Results**





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	-	17.89	-	-	-	30.00	-12.11
2441	-	17.71	-	-	-	30.00	-12.29
2476	-	18.07	-	-	-	30.00	-11.93

**Table 65 - FCC Maximum Conducted (peak) Output Power Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	-	16.08	-	-	-	30.00	-13.92
2441	-	15.94	-	-	-	30.00	-14.06
2476	-	15.77	-	-	-	30.00	-14.23

**Table 66 - FCC Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	60.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.50

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	15.99	-	-	-	-	30.00	-14.01
2440	16.11	-	-	-	-	30.00	-13.89
2480	16.26	-	-	-	-	30.00	-13.74

**Table 67 - FCC Maximum Conducted (peak) Output Power Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 2M)	Duty Cycle (%):	31.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.50

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	16.14	-	-	-	-	30.00	-13.86
2440	16.28	-	-	-	-	30.00	-13.72
2480	16.41	-	-	-	-	30.00	-13.59

**Table 68 - FCC Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	8.76	8.60	-	-	11.69	28.34	-16.65
2441	8.66	8.54	-	-	11.61	28.34	-16.73
2476	8.90	8.63	-	-	11.78	28.34	-16.56

**Table 69 - FCC Maximum Conducted (peak) Output Power Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	9.03	8.16	-	-	11.63	28.34	-16.71
2441	9.09	8.72	-	-	11.92	28.34	-16.42
2476	9.04	8.85	-	-	11.96	28.34	-16.38

**Table 70 - FCC Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.4
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	7.84	7.93	-	-	10.90	28.34	-17.44
2440	8.23	8.07	-	-	11.16	28.34	-17.18
2480	7.63	7.20	-	-	10.43	28.34	-17.91

**Table 71 - FCC Maximum Conducted (peak) Output Power Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.3
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	7.73	8.09	-	-	10.93	28.34	-17.41
2440	8.05	8.36	-	-	11.22	28.34	-17.12
2480	7.95	7.94	-	-	10.96	28.34	-17.38

**Table 72 - FCC Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	18.00	17.65	-	-	20.84	28.34	-7.50
2441	18.05	17.91	-	-	20.99	28.34	-7.35
2476	17.74	17.37	-	-	20.57	28.34	-7.77

**Table 73 - FCC Maximum Conducted (peak) Output Power Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	15.92	15.36	-	-	18.66	28.34	-9.68
2441	16.09	15.31	-	-	18.73	28.34	-9.61
2476	16.31	15.83	-	-	19.09	28.34	-9.25

**Table 74 - FCC Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	60.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	16.58	16.44	-	-	19.52	28.34	-8.82
2440	16.74	16.05	-	-	19.42	28.34	-8.92
2480	16.26	16.43	-	-	19.36	28.34	-8.98

**Table 75 - FCC Maximum Conducted (peak) Output Power Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA GFSK (LE 2M)	Duty Cycle (%):	31.6
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	16.28	16.40	-	-	19.35	28.34	-8.99
2440	16.47	16.09	-	-	19.29	28.34	-9.05
2480	16.05	15.72	-	-	18.89	28.34	-9.44

**Table 76 - FCC Maximum Conducted (peak) Output Power Results**

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



**2.3.7 Test Location and Test Equipment Used**

This test was carried out in RF Chamber 18 and RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5921	12	05-Feb-2025
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5922	12	05-Feb-2025
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5923	12	05-Feb-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6519	12	08-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6520	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6521	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6522	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6528	12	22-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6585	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6586	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6590	12	20-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon

**Table 77**

O/P Mon - Output Monitored using calibrated equipment



## **2.4 Authorised Band Edges**

### **2.4.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (d)

### **2.4.2 Equipment Under Test and Modification State**

A3401, S/N: JVJC362FKV - Modification State 0  
A3401, S/N: H56R7RH7PK - Modification State 0

### **2.4.3 Date of Test**

04-September-2024 to 29-September-2024

### **2.4.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

### **2.4.5 Environmental Conditions**

Ambient Temperature	22.3 - 24.5 °C
Relative Humidity	41.0 - 54.7 %






**2.4.6 Test Results**

2.4 GHz Bluetooth LE/HDR


iPA - Core 0 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	HDR4	2404	2400	-55.53
Static	HDR8	2404	2400	-46.32
Static	LE1M	2402	2400	-62.10
Static	LE2M	2402	2400	-33.51


**Table 78 - SISO Authorised Band Edge Results**

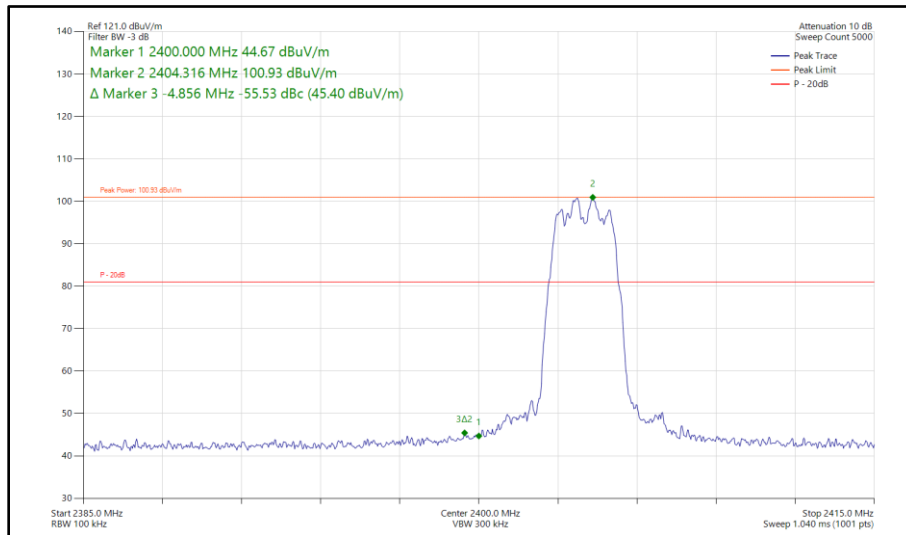


**Figure 239 - Bluetooth HDR4, SISO, Core 0 - 2404 MHz  
 Band Edge Frequency 2400 MHz**

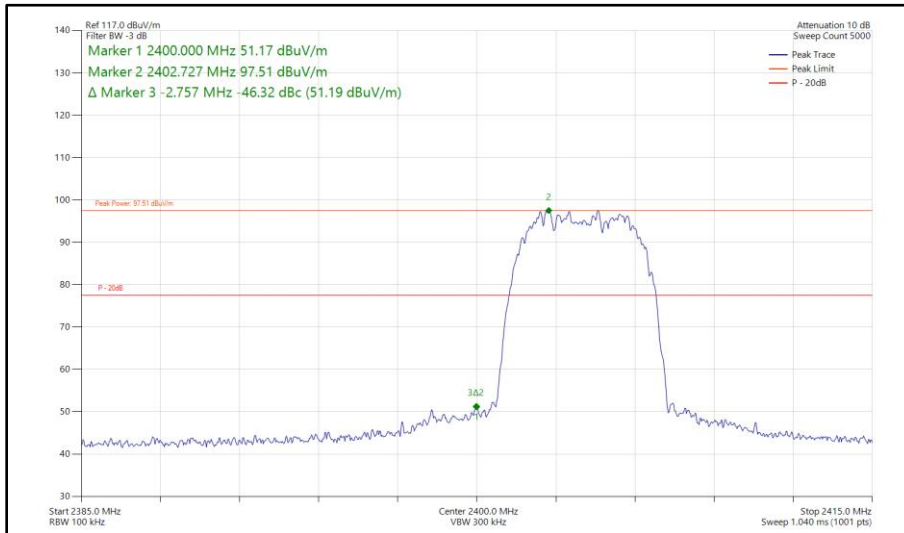

**Figure 240 - Bluetooth HDR8, SISO, Core 0 - 2404 MHz  
Band Edge Frequency 2400 MHz**

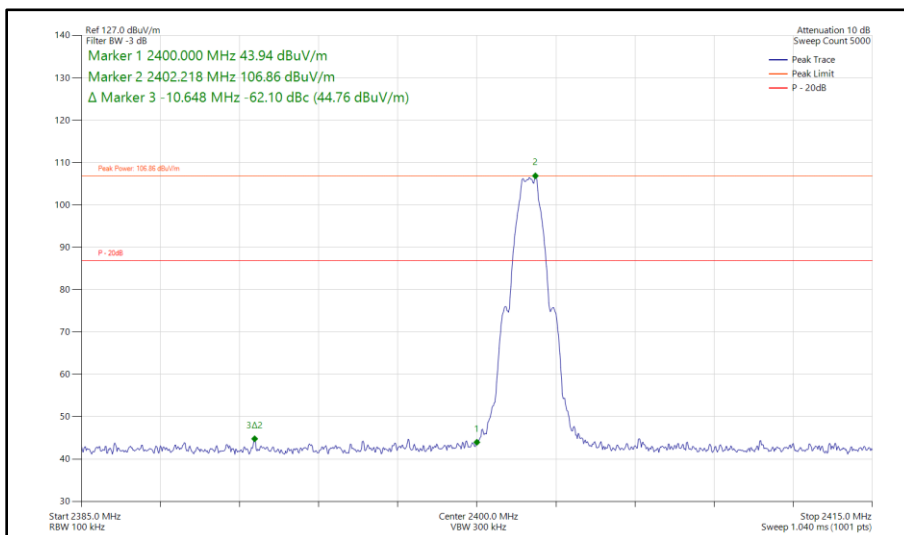

**Figure 241 - Bluetooth LE1M, SISO, Core 0 - 2402 MHz  
Band Edge Frequency 2400 MHz**

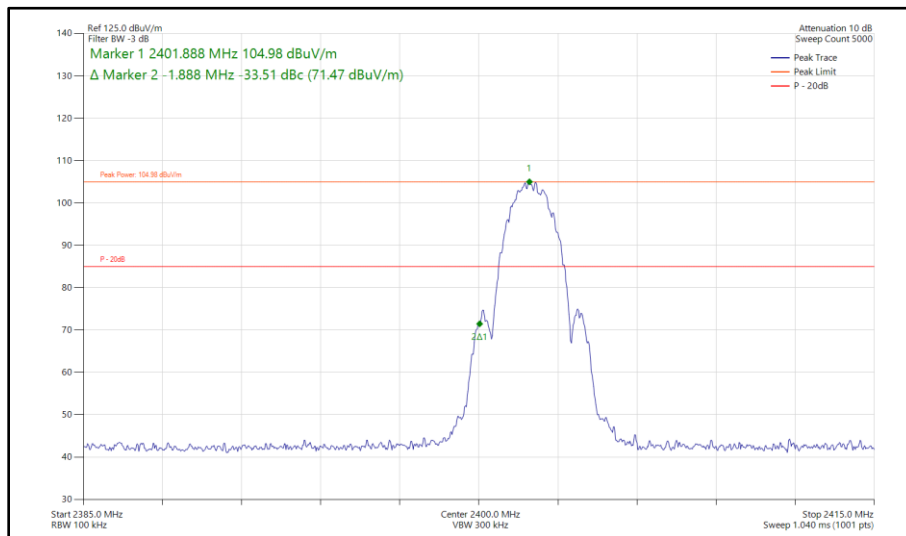

**Figure 242 - Bluetooth LE2M, SISO, Core 0 - 2402 MHz  
Band Edge Frequency 2400 MHz**



iPA - Core 1 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	HDR4	2404	2400	-53.59
Static	HDR8	2404	2400	-46.11
Static	LE1M	2402	2400	-60.93
Static	LE2M	2402	2400	-33.93

Table 79 - SISO Authorised Band Edge Results

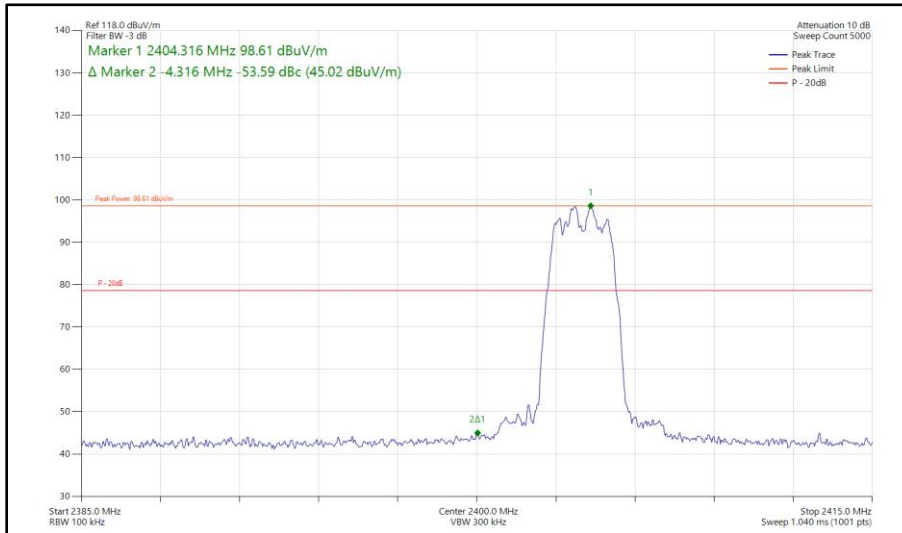


Figure 243 - Bluetooth HDR4, SISO, Core 1 - 2404 MHz  
 Band Edge Frequency 2400 MHz

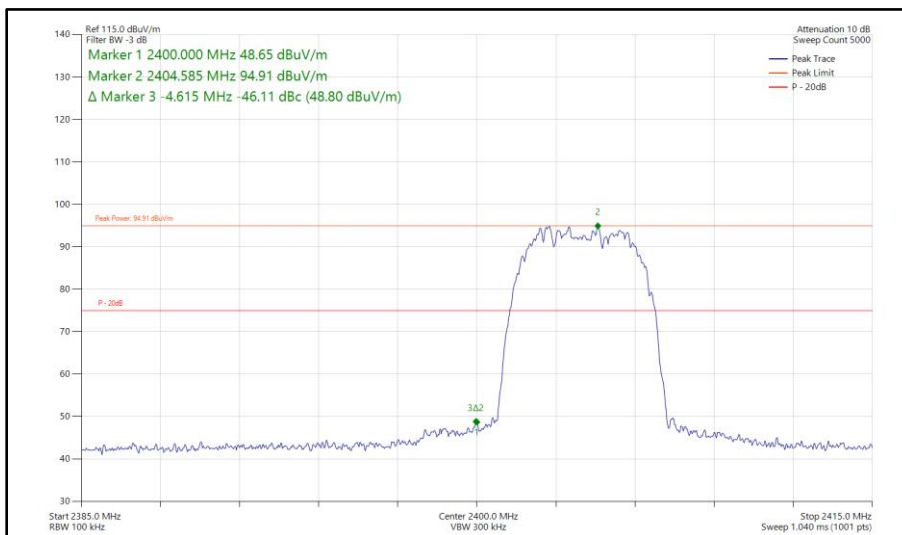


Figure 244 - Bluetooth HDR8, SISO, Core 1 - 2404 MHz  
 Band Edge Frequency 2400 MHz

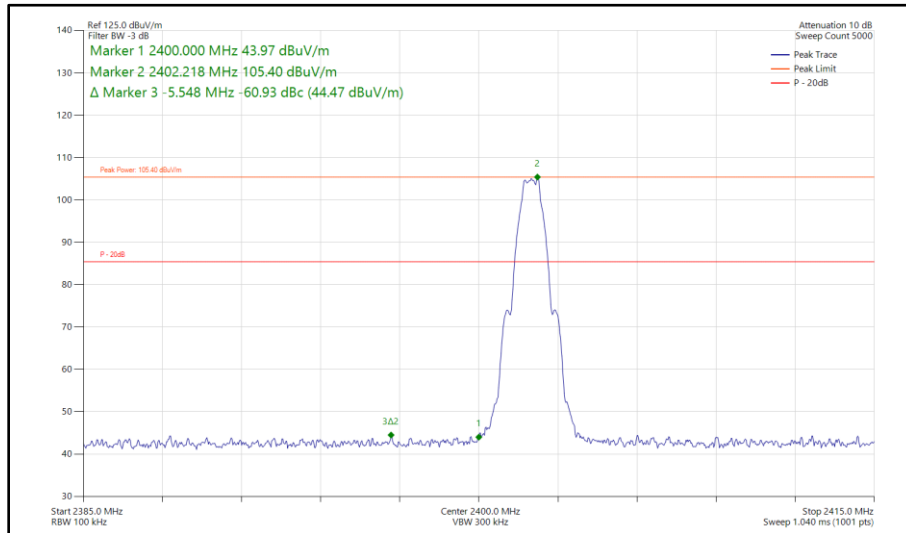


Figure 245 - Bluetooth LE1M, SISO, Core 1 - 2402 MHz  
Band Edge Frequency 2400 MHz

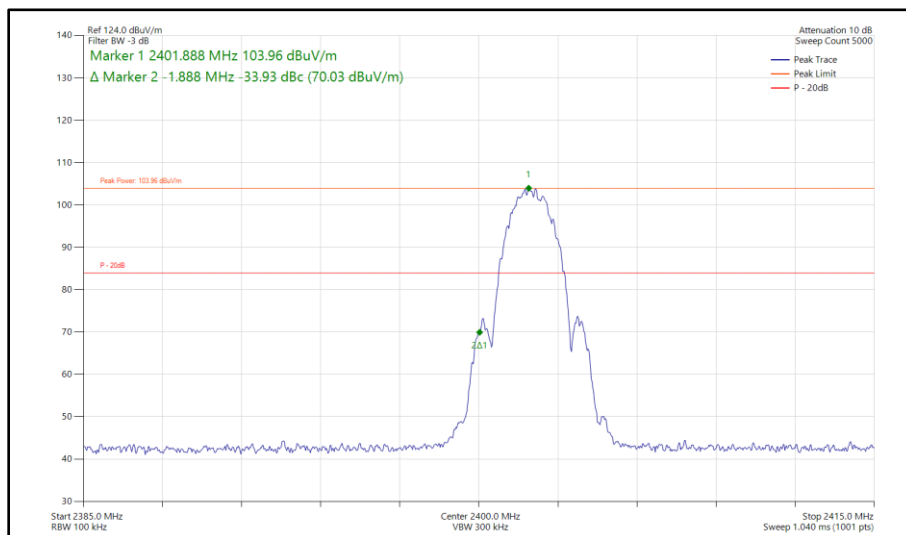



Figure 246 - Bluetooth LE2M, SISO, Core 1 - 2402 MHz  
Band Edge Frequency 2400 MHz




iPA - Core 2 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	HDR4	2404	2400	-54.99
Static	HDR8	2404	2400	-43.33
Static	LE1M	2402	2400	-60.04
Static	LE2M	2402	2400	-34.47


**Table 80 - SISO Authorised Band Edge Results**

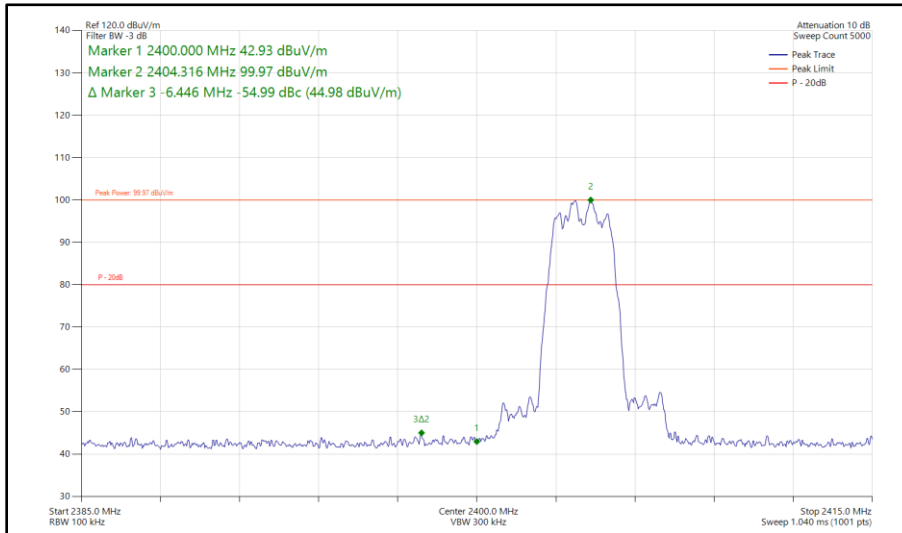


**Figure 247 - Bluetooth HDR4, SISO, Core 2 - 2404 MHz  
 Band Edge Frequency 2400 MHz**

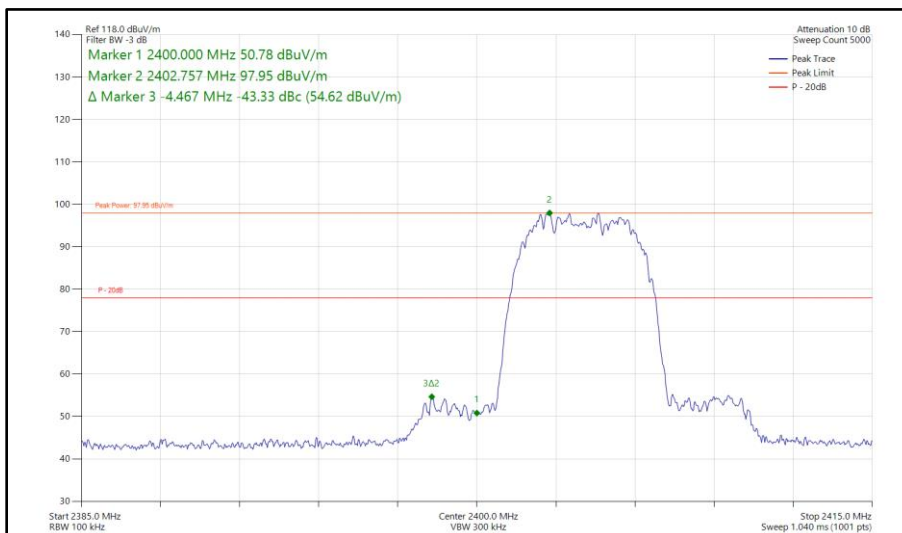

**Figure 248 - Bluetooth HDR8, SISO, Core 2 - 2404 MHz  
 Band Edge Frequency 2400 MHz**

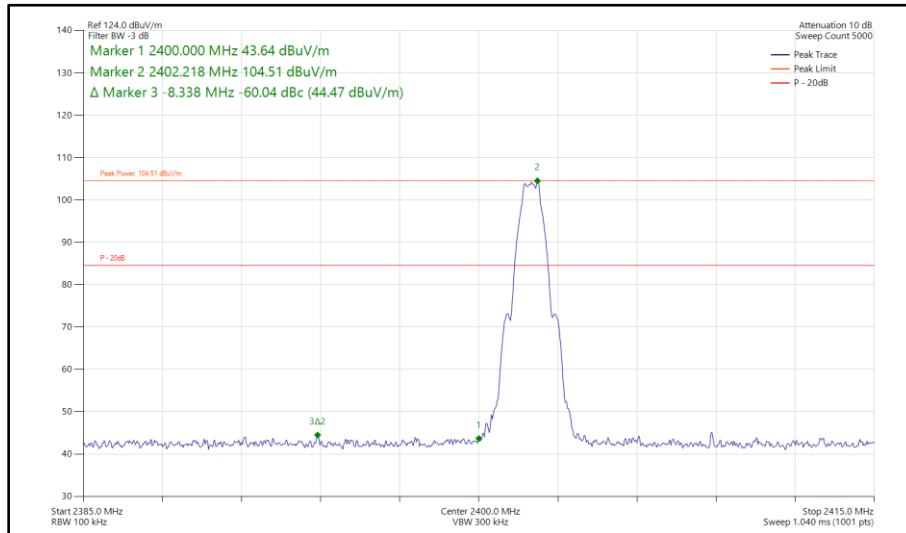

**Figure 249 - Bluetooth LE1M, SISO, Core 2 - 2402 MHz  
Band Edge Frequency 2400 MHz**

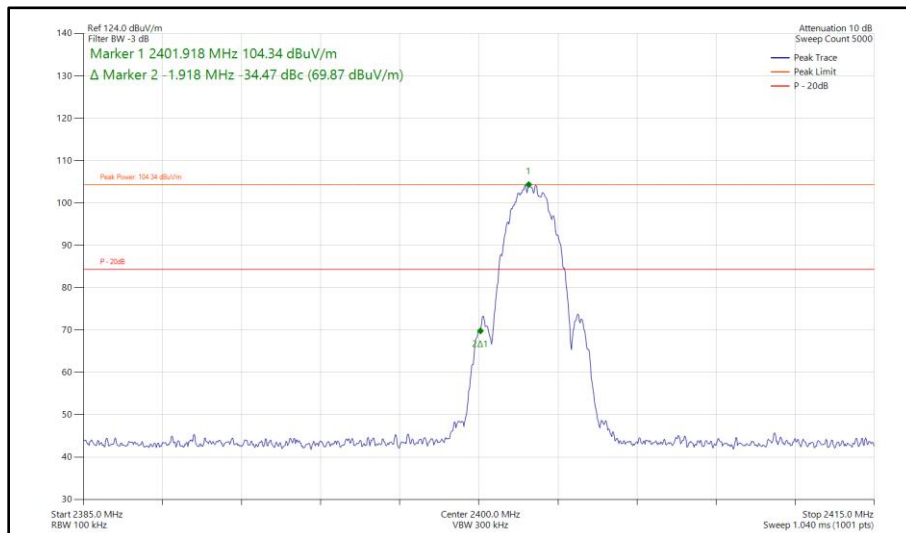

**Figure 250 - Bluetooth LE2M, SISO, Core 2 - 2402 MHz  
Band Edge Frequency 2400 MHz**



iPA - Core 0 - Core 1 (MIMO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	HDR4	2404	2400	-58.85
Static	HDR8	2404	2400	-49.99
Static	LE1M	2402	2400	-64.31
Static	LE2M	2402	2400	-33.70

Table 81 - MIMO Authorised Band Edge Results

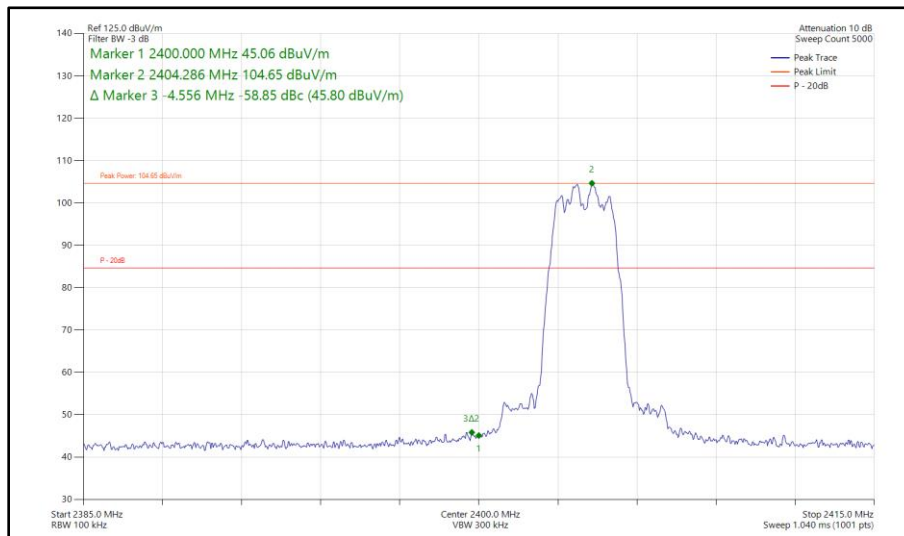


Figure 251 - Bluetooth HDR4, MIMO, Core 0 - Core 1 - 2404 MHz  
 Band Edge Frequency 2400 MHz



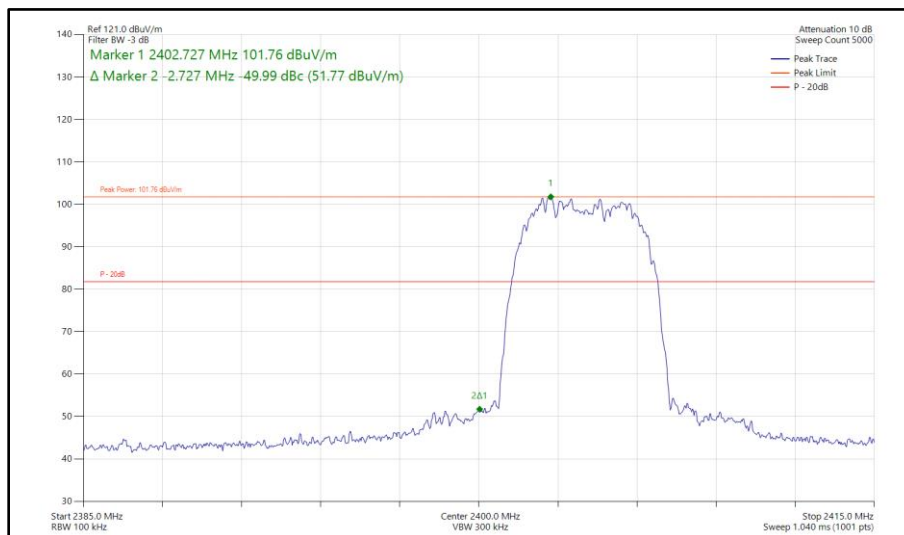


Figure 252 - Bluetooth HDR8, MIMO, Core 0 - Core 1 - 2404 MHz  
 Band Edge Frequency 2400 MHz



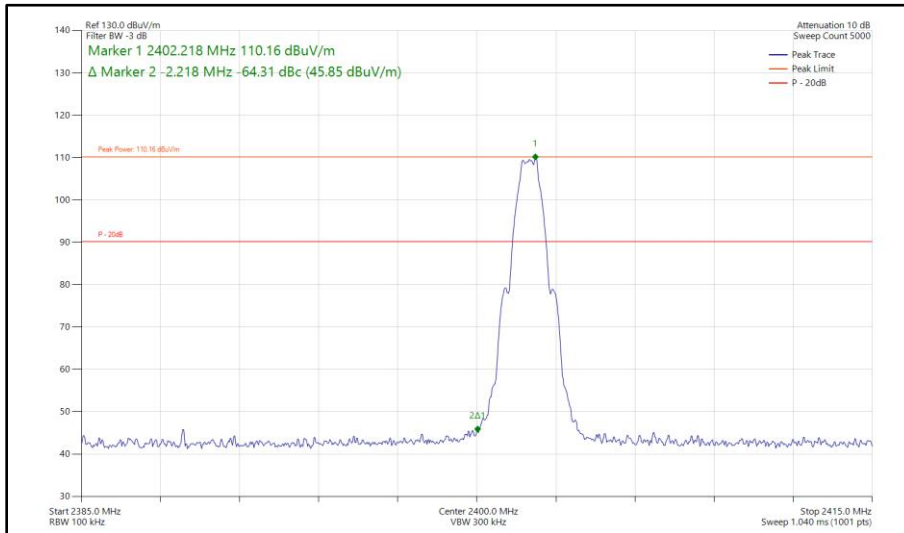

**Figure 253 - Bluetooth LE1M, MIMO, Core 0 - Core 1 - 2402 MHz  
Band Edge Frequency 2400 MHz**

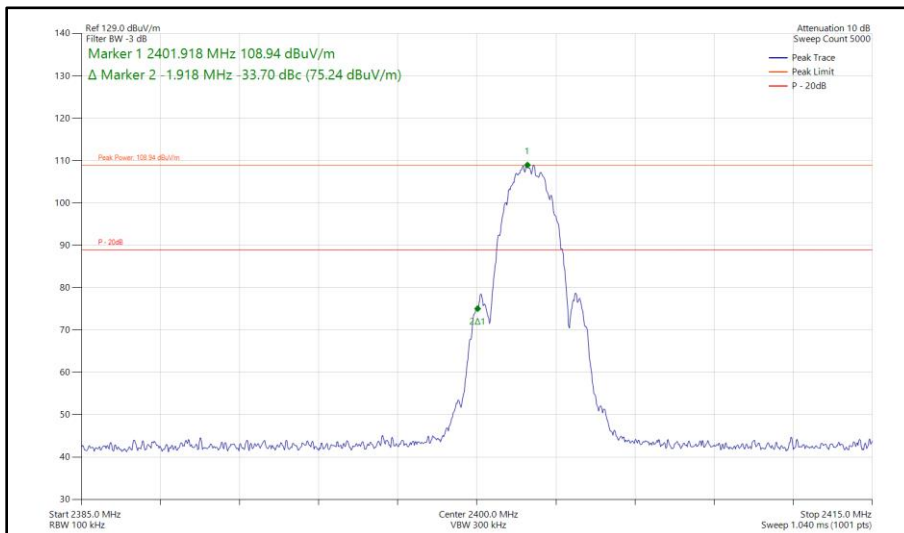

**Figure 254 - Bluetooth LE2M, MIMO, Core 0 - Core 1 - 2402 MHz  
Band Edge Frequency 2400 MHz**



ePA - Core 0 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	HDR4	2404	2400	-58.09
Static	HDR8	2404	2400	-47.69
Static	LE1M	2402	2400	-64.54
Static	LE2M	2402	2400	-34.64

Table 82 - SISO Authorised Band Edge Results

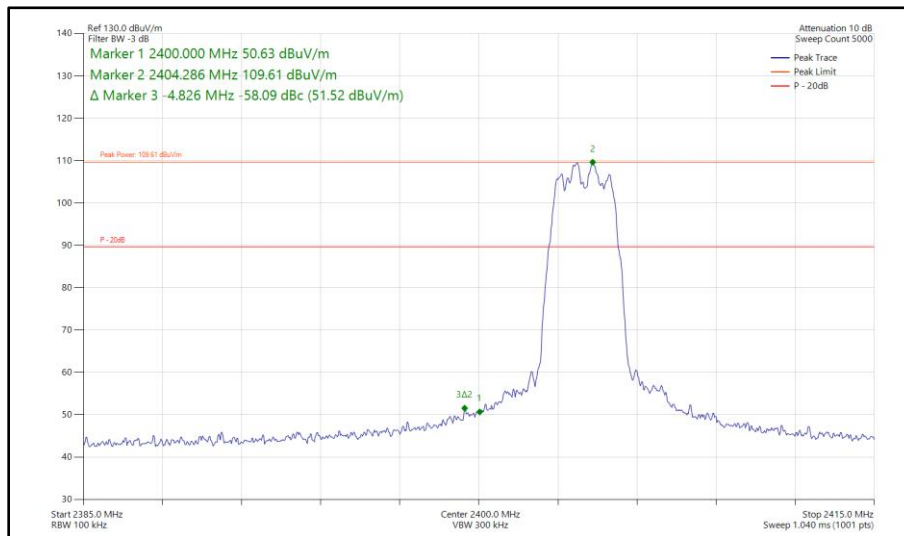


Figure 255 - Bluetooth HDR4, SISO, Core 0 - 2404 MHz  
 Band Edge Frequency 2400 MHz



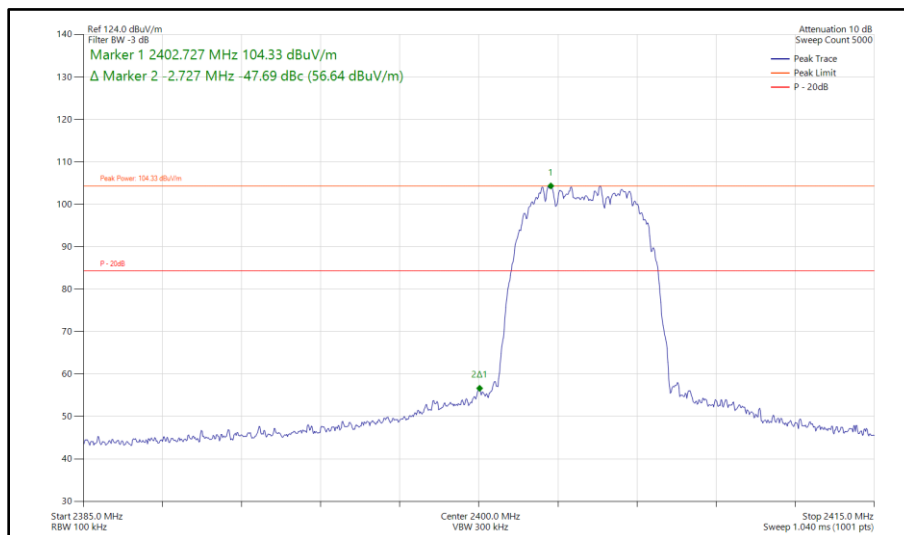


Figure 256 - Bluetooth HDR8, SISO, Core 0 - 2404 MHz  
 Band Edge Frequency 2400 MHz

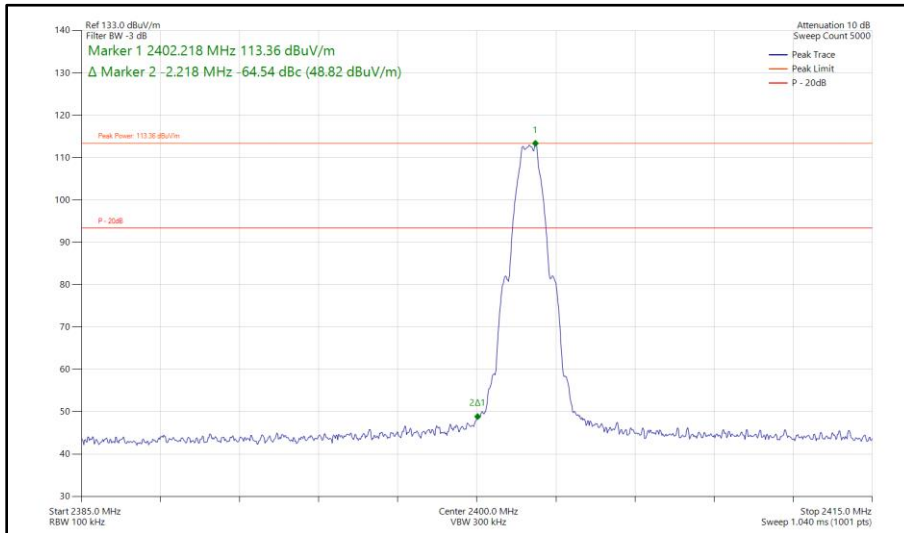

**Figure 257 - Bluetooth LE1M, SISO, Core 0 - 2402 MHz  
Band Edge Frequency 2400 MHz**

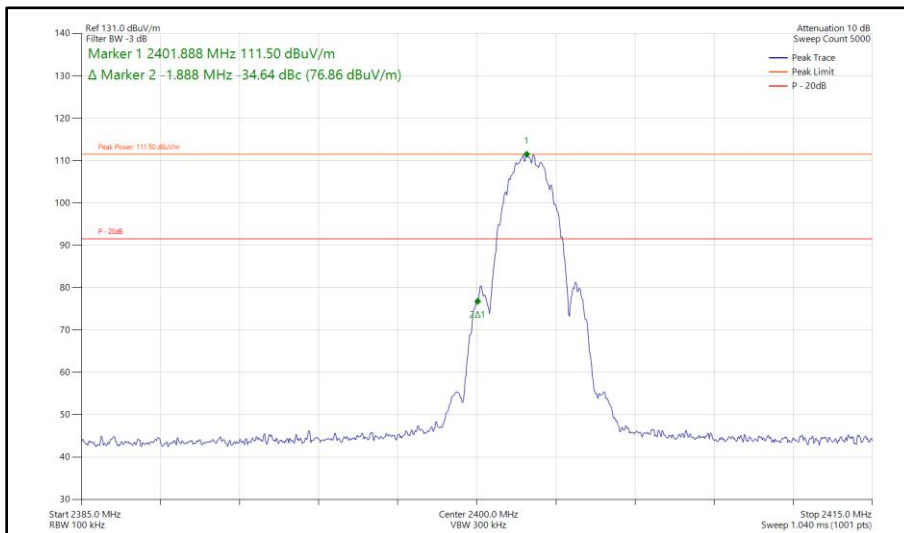

**Figure 258 - Bluetooth LE2M, SISO, Core 0 - 2402 MHz  
Band Edge Frequency 2400 MHz**



ePA - Core 1 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	HDR4	2404	2400	-58.64
Static	HDR8	2404	2400	-49.11
Static	LE1M	2402	2400	-64.03
Static	LE2M	2402	2400	-34.88

Table 83 - SISO Authorised Band Edge Results

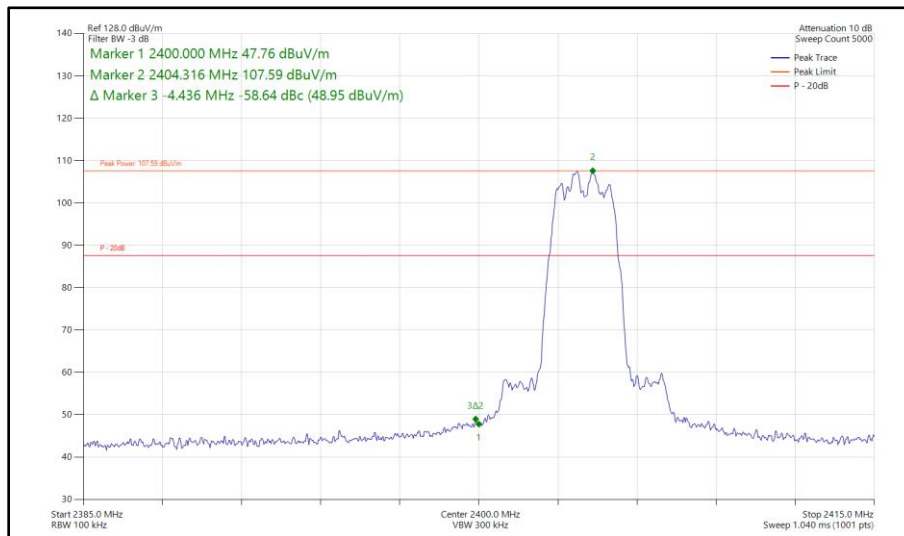


Figure 259 - Bluetooth HDR4, SISO, Core 1 - 2404 MHz  
 Band Edge Frequency 2400 MHz



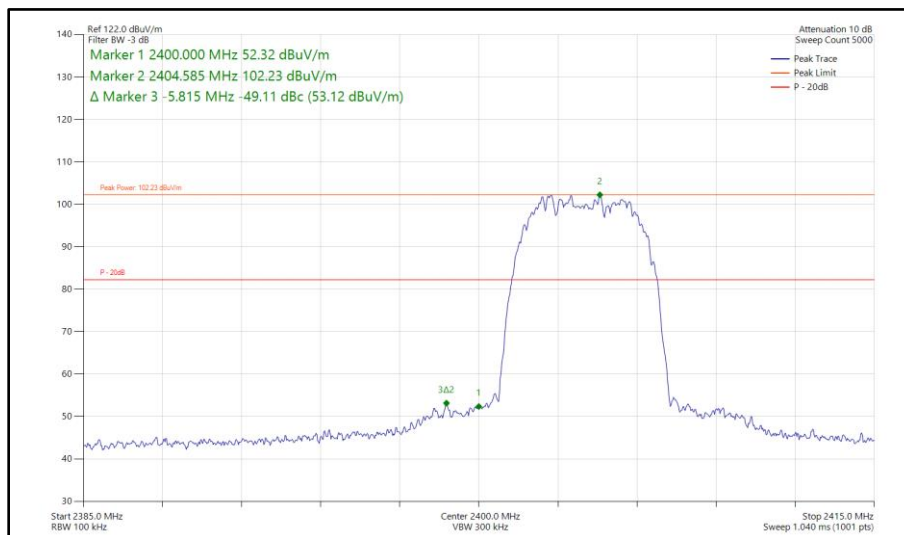


Figure 260 - Bluetooth HDR8, SISO, Core 1 - 2404 MHz  
 Band Edge Frequency 2400 MHz

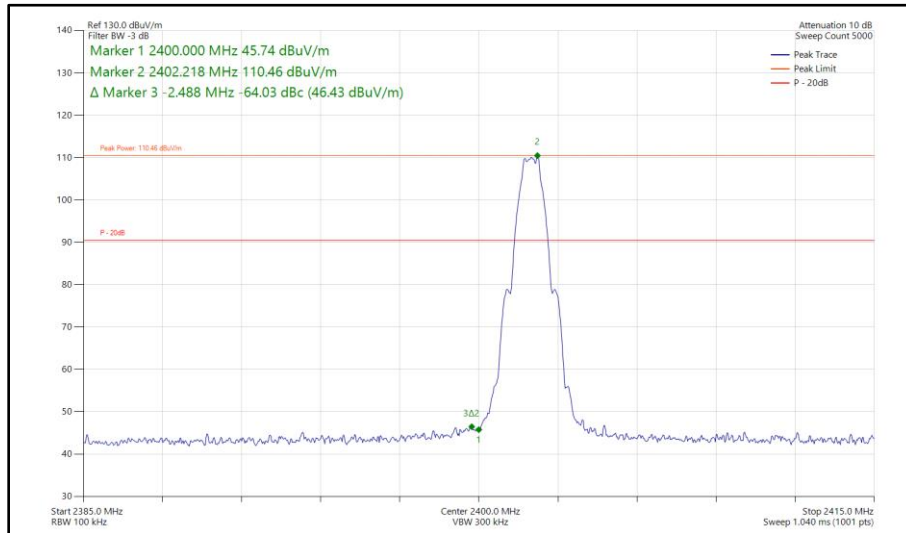

**Figure 261 - Bluetooth LE1M, SISO, Core 1 - 2402 MHz  
Band Edge Frequency 2400 MHz**

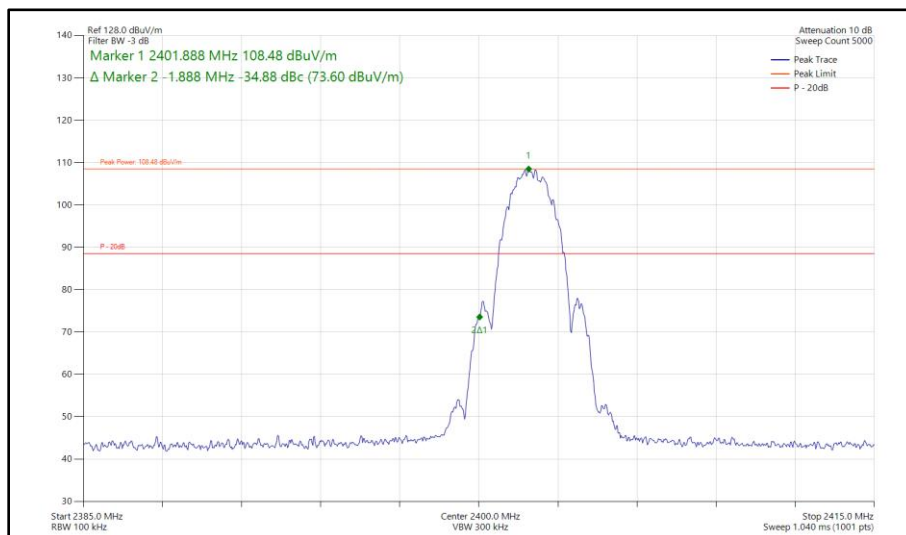


**Figure 262 - Bluetooth LE2M, SISO, Core 1 - 2402 MHz  
Band Edge Frequency 2400 MHz**




ePA - Core 0 - Core 1 (MIMO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	HDR4	2404	2400	-61.24
Static	HDR8	2404	2400	-51.46
Static	LE1M	2402	2400	-66.72
Static	LE2M	2402	2400	-35.39


**Table 84 - MIMO Authorised Band Edge Results**

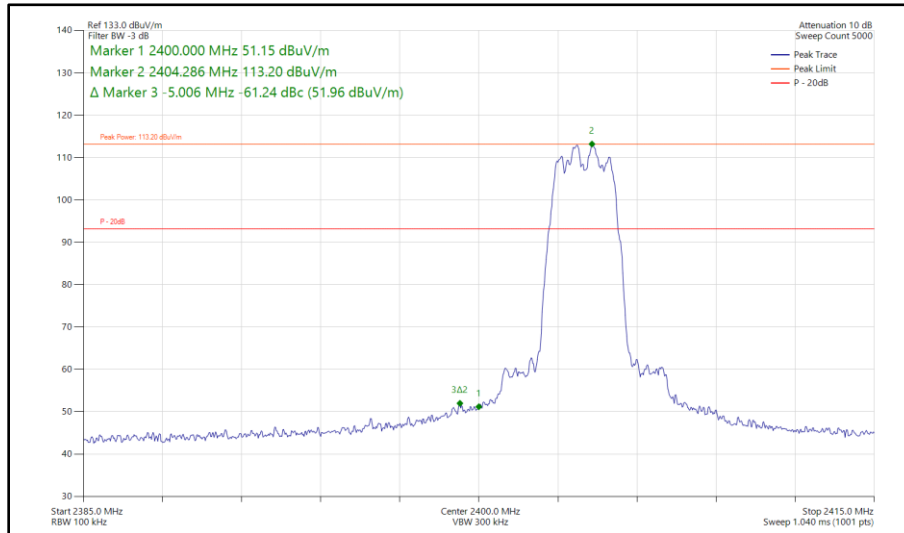


**Figure 263 - Bluetooth HDR4, MIMO, Core 0 - Core 1 - 2404 MHz  
 Band Edge Frequency 2400 MHz**

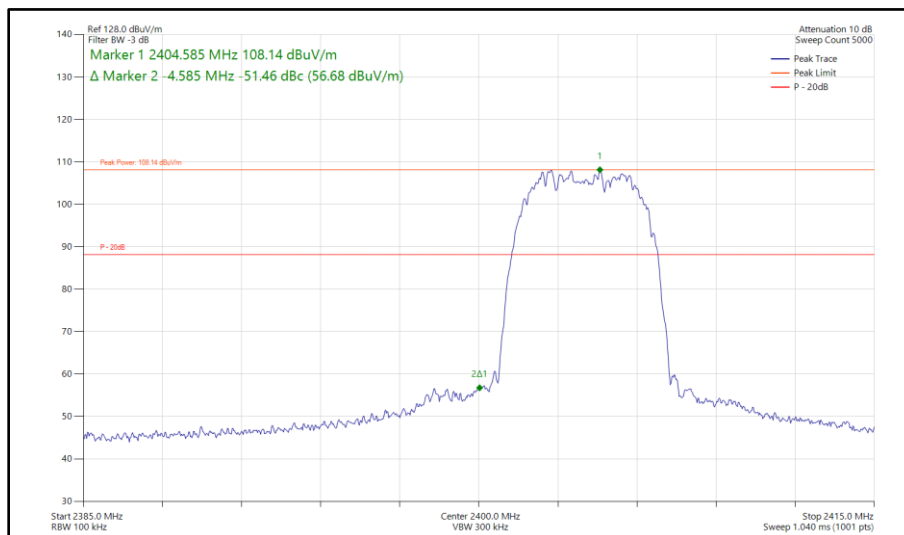

**Figure 264 - Bluetooth HDR8, MIMO, Core 0 - Core 1 - 2404 MHz  
 Band Edge Frequency 2400 MHz**

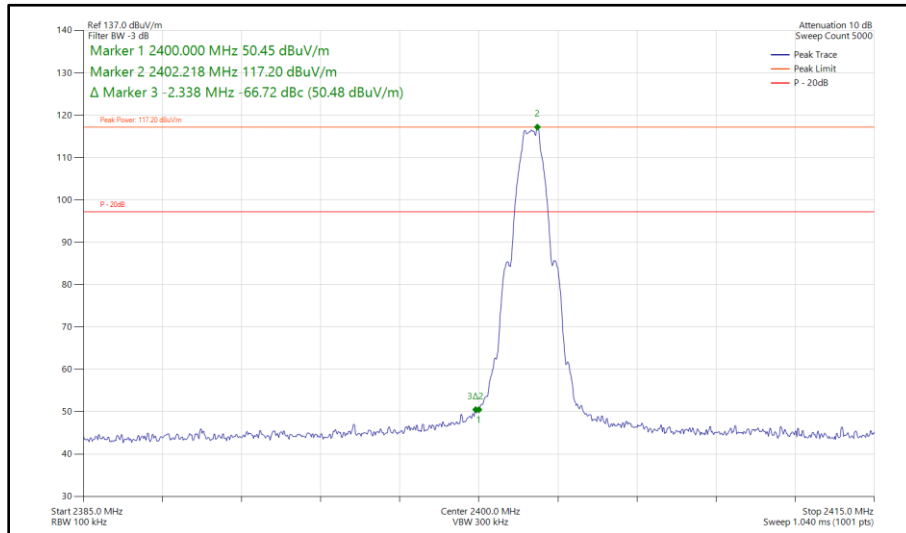

**Figure 265 - Bluetooth LE1M, MIMO, Core 0 - Core 1 - 2402 MHz  
Band Edge Frequency 2400 MHz**

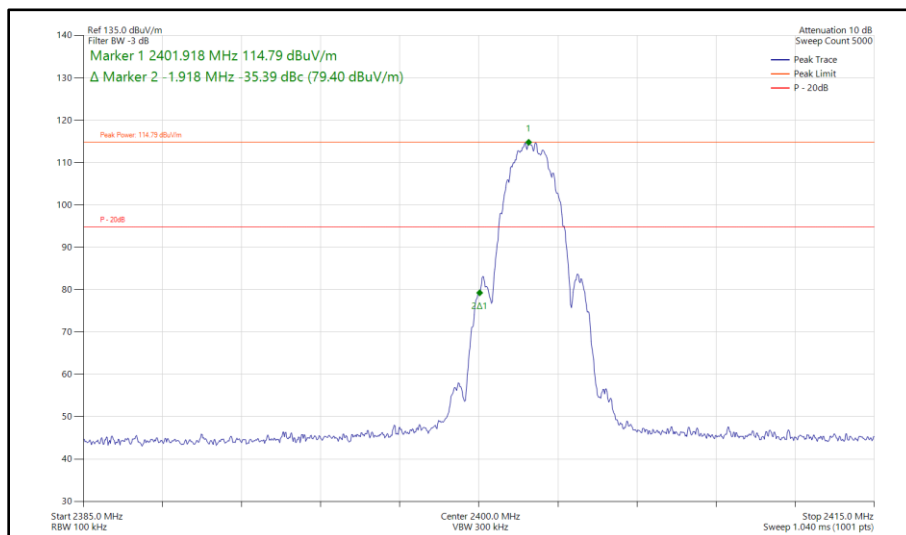

**Figure 266 - Bluetooth LE2M, MIMO, Core 0 - Core 1 - 2402 MHz  
Band Edge Frequency 2400 MHz**

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.



### 2.4.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14 and RF Chamber 17.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2 V.	5125	-	Software
Test Receiver	Rohde & Schwarz	ESW44	5914	12	24-May-2025
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	20-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	05-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	05-May-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Digital Multimeter	Fluke	115	6146	12	06-Jun-2025
Humidity & Temperature meter	R.S Components	1364	6148	12	29-Jul-2025
Humidity & Temperature meter	R.S Components	1364	6149	12	12-Aug-2025
SAC Switch Unit	TUV SUD	TUV_Ssu_001	6190	12	22-Dec-2024
EMI Test Receiver	Rohde & Schwarz	ESW44	6294	12	06-Jan-2025
AC Power Supply	iTech	IT7324	6657	-	O/P Mon
3m Semi-Anechoic Chamber	Albatross Projects	RF Chamber 17	6658	36	28-Jan-2026
Mast and Turntable Controller	Maturo Gmbh	FCU3.0	6659	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6660	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6661	-	TU
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6741	12	01-Feb-2025
8m Cable	Junkosha	MWX221-08000AMSAMS/B	6748	12	01-Feb-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6834	12	14-Aug-2025

**Table 85**

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment





## **2.5 Spurious Radiated Emissions**

### **2.5.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.209 and 15.247 (d)

### **2.5.2 Equipment Under Test and Modification State**

A3401, S/N: JVJC362FKV - Modification State 0

### **2.5.3 Date of Test**

13-September-2024 to 12-October-2024

### **2.5.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

For frequencies > 1 GHz, plots for average measurements were taken in accordance with ANSI C63.10, clause 11.12.2.5.2.

The EUT was placed on the non-conducting platform in a manner typical of a normal installation.

Ports on the EUT were terminated with loads as described in ANSI C63.4 clause 6.2.4. For EUT's with multiple connectors of the same type, additional interconnecting cables were connected, and pre-scans performed to determine whether the level of the emissions were increased by >2 dB.

In the 30 MHz to 1 GHz range pre-scans were only performed on the mid channel (2440 MHz) only.

The plots shown are the characterisation of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dB $\mu$ V/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dB $\mu$ V/m to  $\mu$ V/m:

$10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$ .

Above 18 GHz, the measurement distance was reduced to 1 m. The limit line was increased by  $20 \cdot \text{LOG}(3/1) = 9.54$  dB.

Where formal measurements have been necessary, the results have been presented in the emissions table.

### 2.5.5 Example Test Setup Diagram

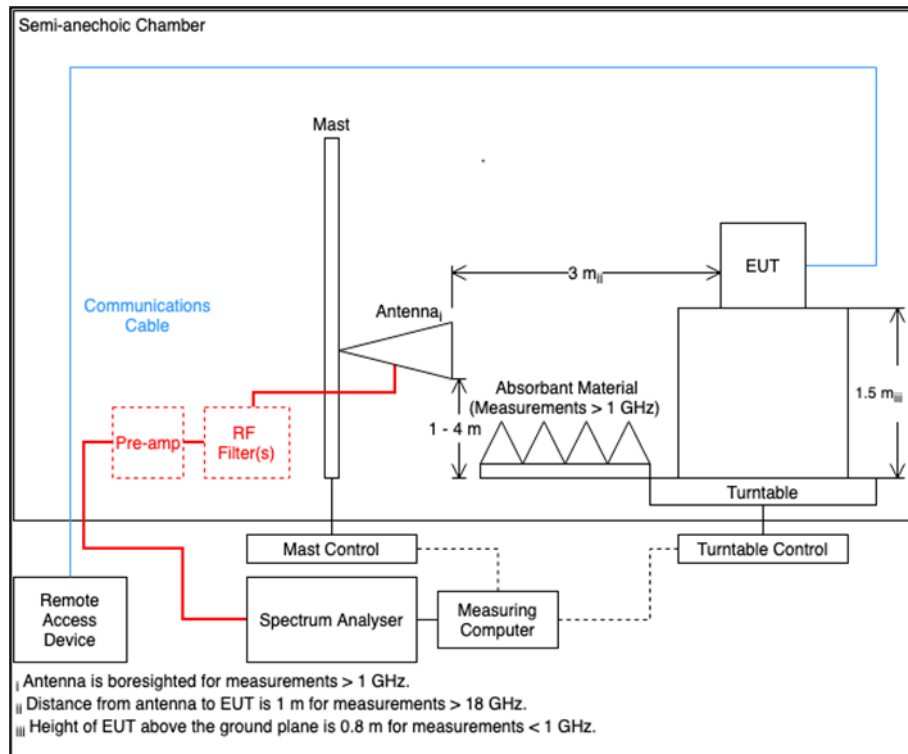


Figure 267

### 2.5.6 Environmental Conditions

Ambient Temperature	22.6 - 23.6 °C
Relative Humidity	46.5 - 51.7 %




**2.5.7 Test Results**

2.4 GHz Bluetooth LE/HDR


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2389.971	38.32	54.00	-15.68	RMS	9	376	Vertical
2389.981	34.04	54.00	-19.96	RMS	51	366	Horizontal

**Table 86 - 2402 MHz (CH37), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz**

No other emissions found within 10 dB of the limit.

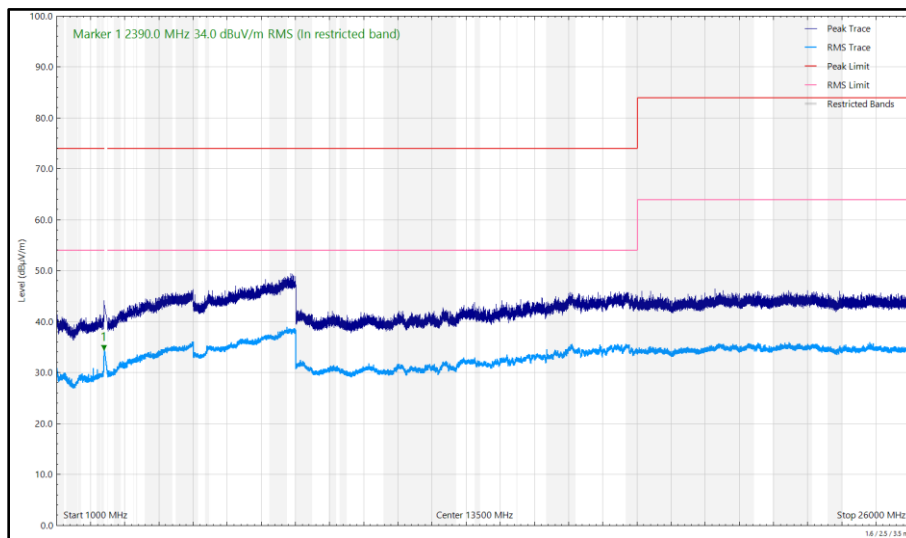

**Figure 268 - 2402 MHz (CH37), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal**

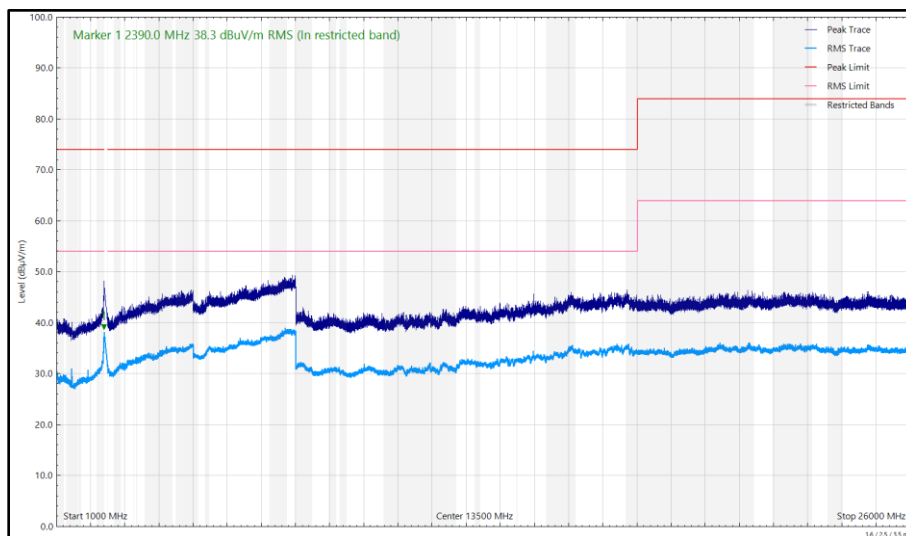


**Figure 269 - 2402 MHz (CH37), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical**




Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
30.084	25.67	40.00	-14.33	Q-Peak	3	100	Vertical

**Table 87 - 2440 MHz (CH17), LE1M, iPA, Core 0 + Core 1, 30 MHz to 26 GHz**

No other emissions found within 10 dB of the limit.

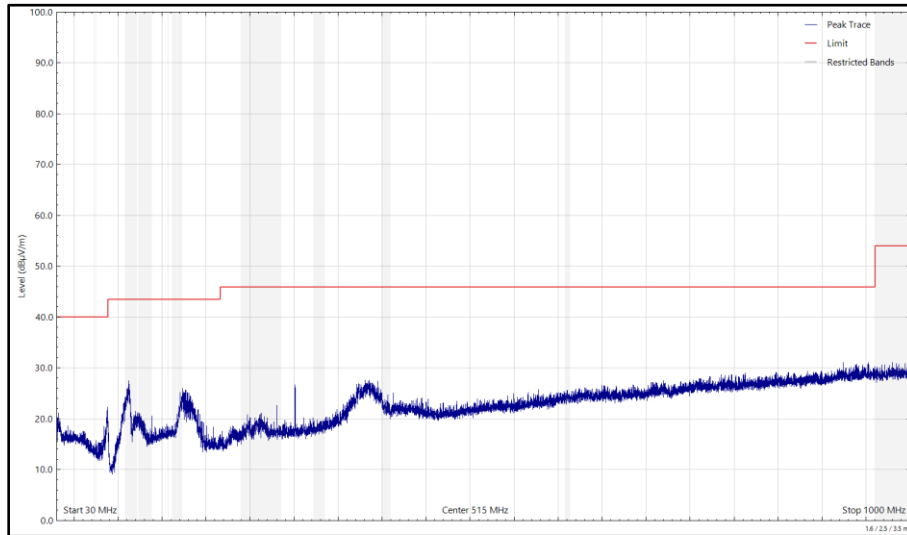

**Figure 270 - 2440 MHz (CH17), LE1M, iPA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)**

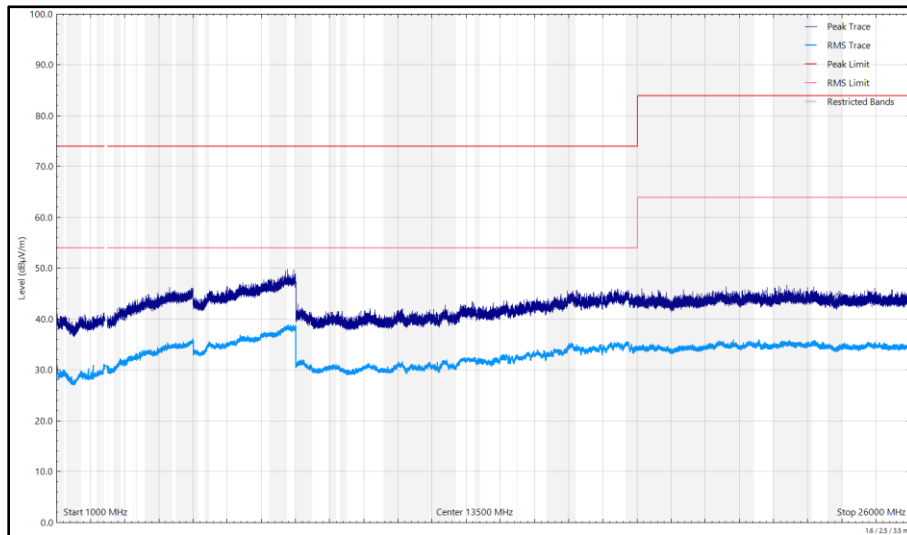

**Figure 271 - 2440 MHz (CH17), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal**

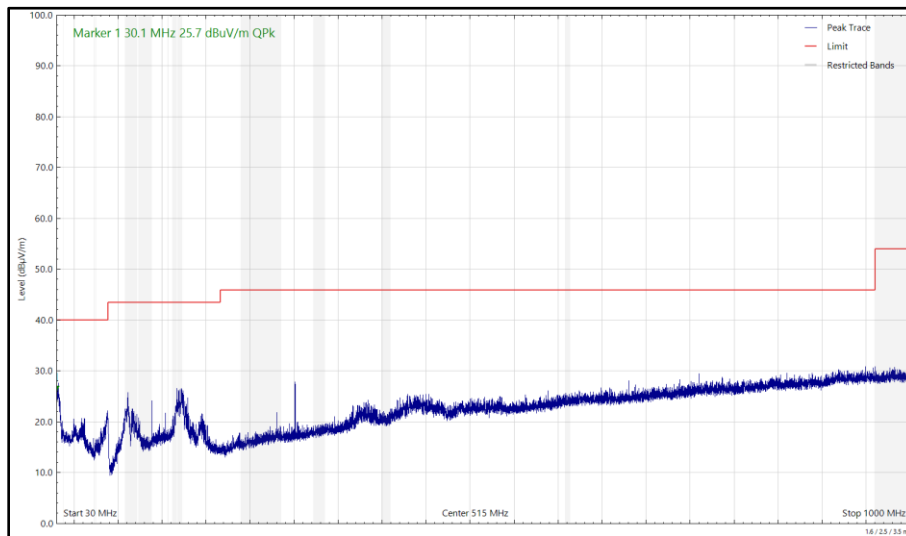


Figure 272 - 2440 MHz (CH17), LE1M, iPA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

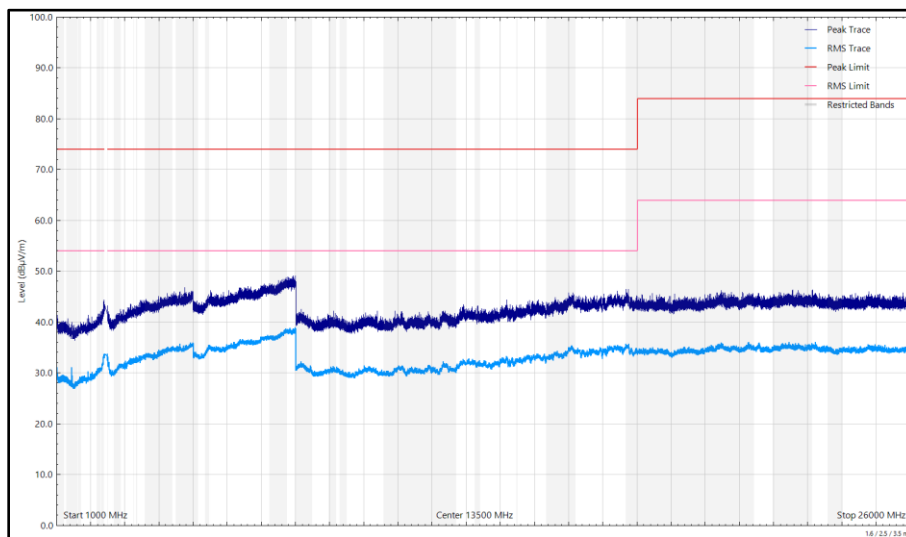



Figure 273 - 2440 MHz (CH17), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical




Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2498.508	36.80	54.00	-17.20	RMS	15	334	Vertical

**Table 88 - 2480 MHz (CH39), LE1M, iPA, Core 0 + Core 1, 30 MHz to 26 GHz**

No other emissions found within 10 dB of the limit.

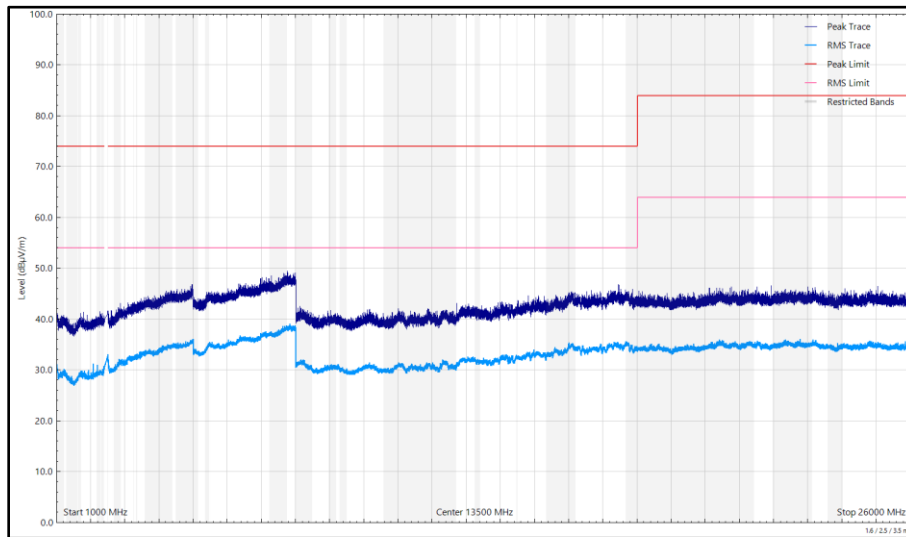

**Figure 274 - 2480 MHz (CH39), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal**

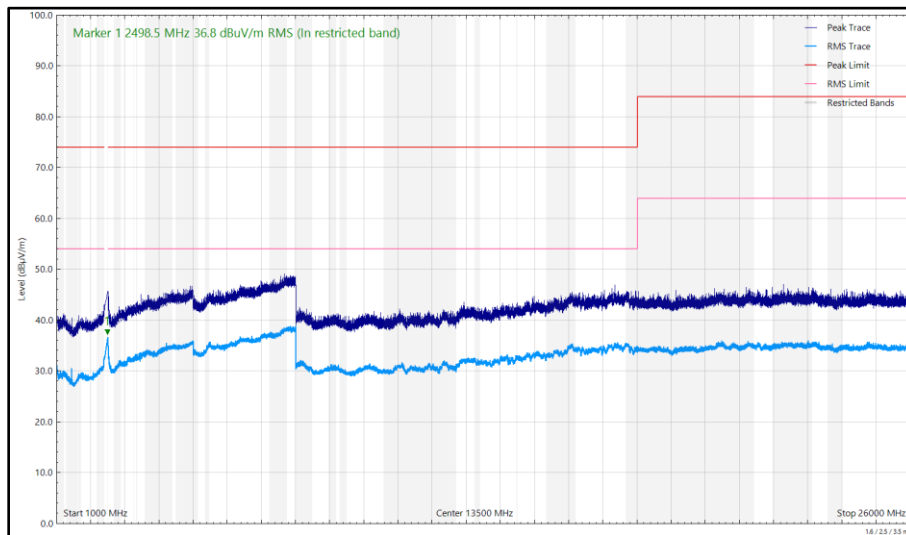


**Figure 275 - 2480 MHz (CH39), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical**




Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

**Table 89 - 2402 MHz (CH37), LE1M, iPA, Core 2, 1 GHz to 26 GHz**

\*No emissions found within 10 dB of the limit.

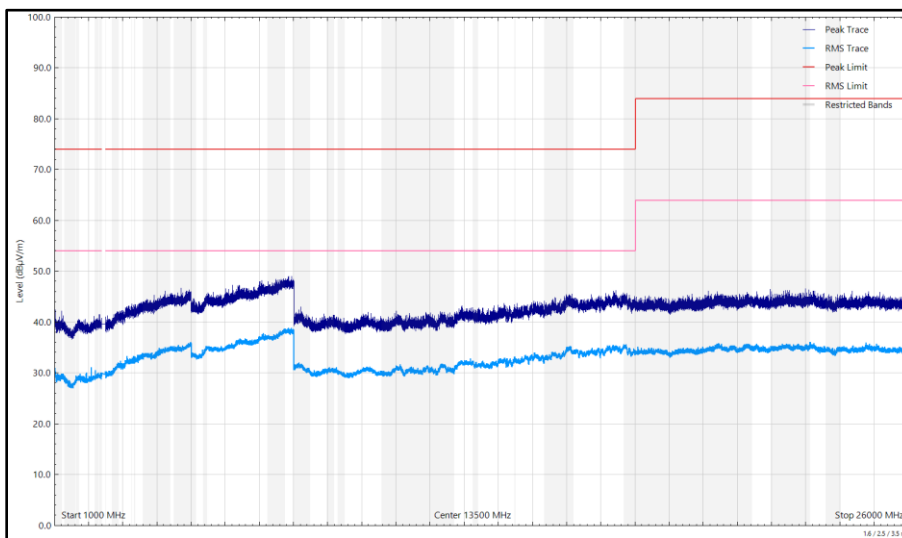

**Figure 276 - 2402 MHz (CH37), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Horizontal**

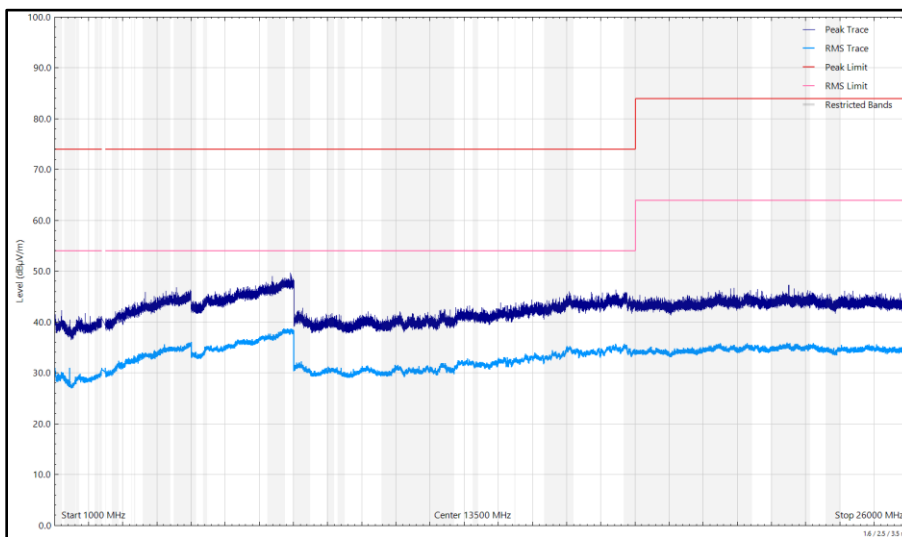


**Figure 277 - 2402 MHz (CH37), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Vertical**




Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
30.066	25.41	40.00	-14.59	Q-Peak	5	107	Vertical

**Table 90 - 2440 MHz (CH17), LE1M, iPA, Core 2, 30 MHz to 26 GHz**

No other emissions found within 10 dB of the limit.

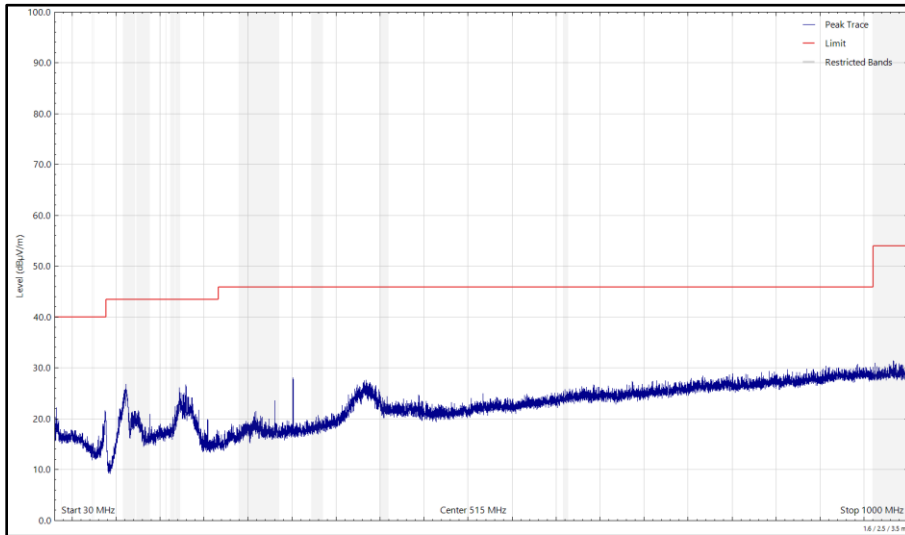

**Figure 278 - 2440 MHz (CH17), LE1M, iPA, Core 2, 30 MHz to 1 GHz, Horizontal (Peak)**

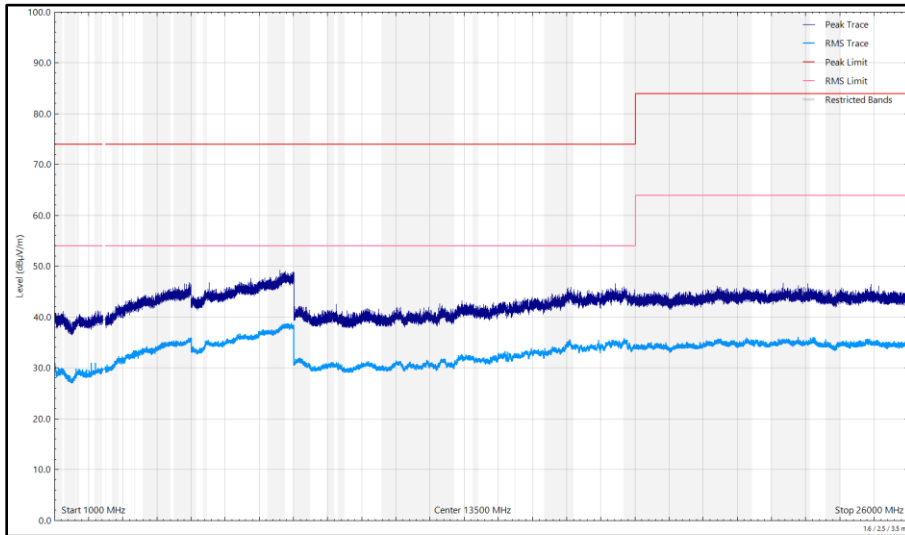

**Figure 279 - 2440 MHz (CH17), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Horizontal**



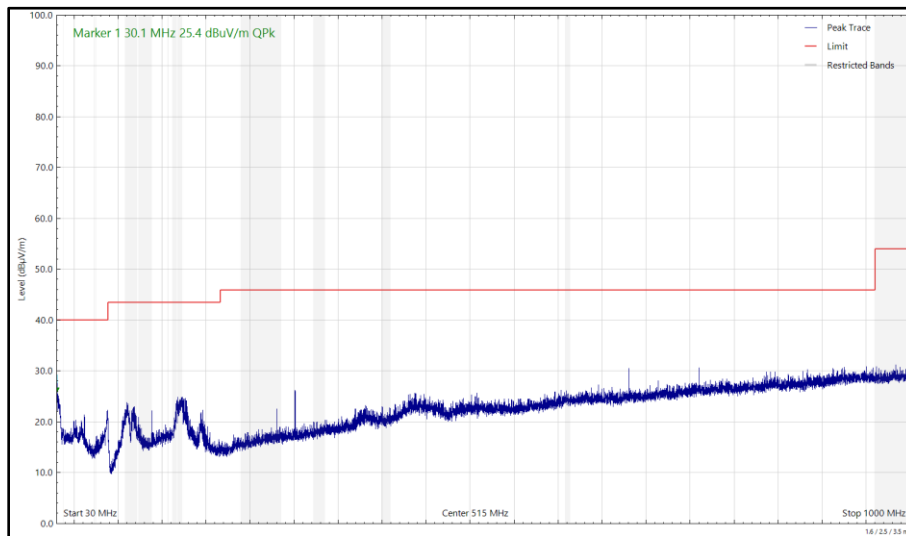


Figure 280 - 2440 MHz (CH17), LE1M, iPA, Core 2, 30 MHz to 1 GHz, Vertical (Peak)

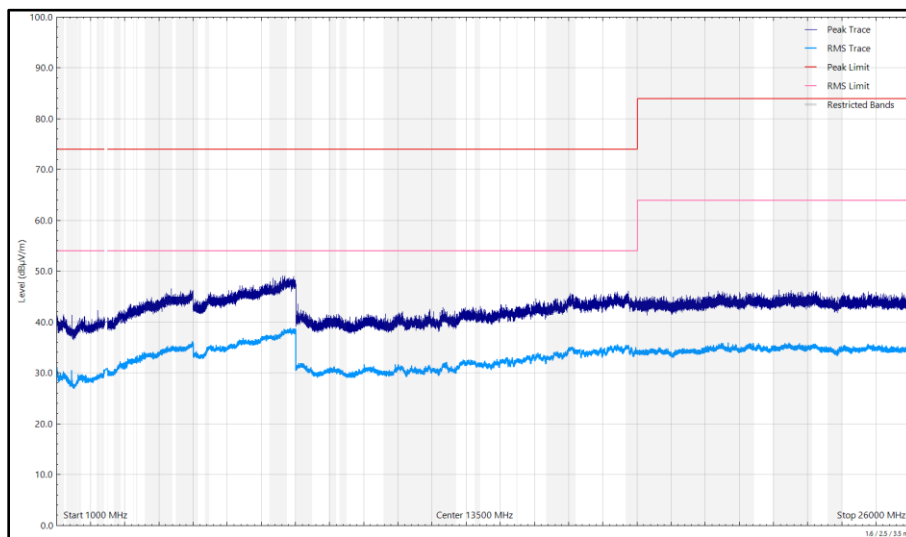



Figure 281 - 2440 MHz (CH17), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Vertical




Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

**Table 91 - 2480 MHz (CH39), LE1M, iPA, Core 2, 1 GHz to 26 GHz**

\*No emissions found within 10 dB of the limit.

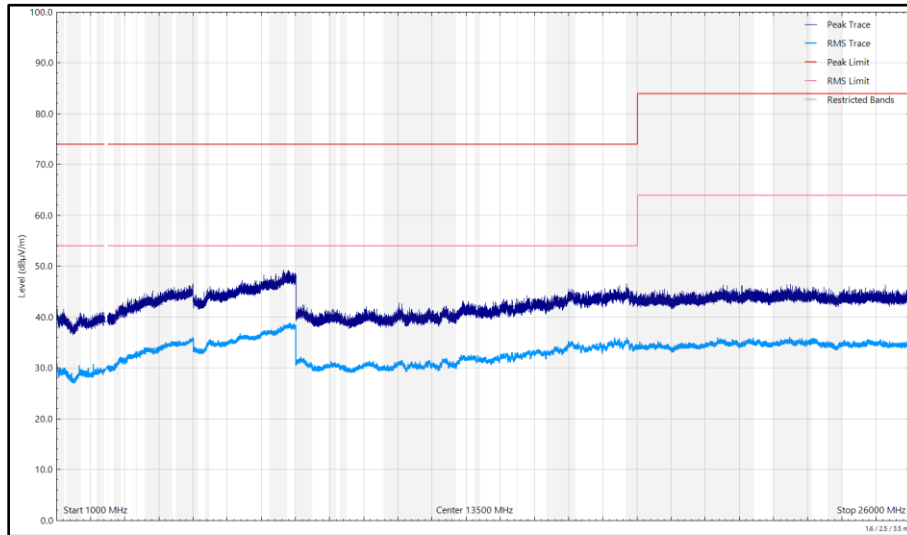

**Figure 282 - 2480 MHz (CH39), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Horizontal**

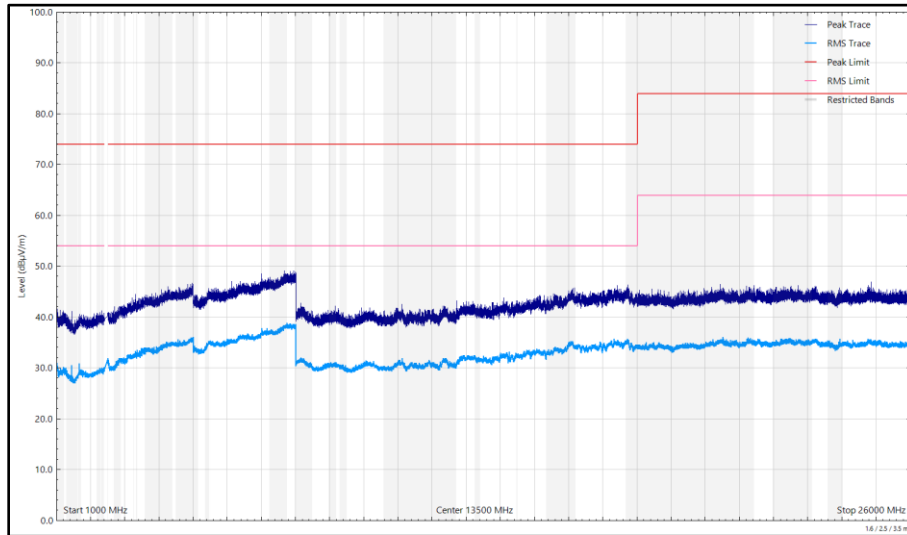


**Figure 283 - 2480 MHz (CH39), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Vertical**




Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2389.969	42.59	54.00	-11.41	RMS	0	276	Vertical
2389.994	38.97	54.00	-15.03	RMS	54	370	Horizontal
2483.646	35.53	54.00	-18.47	RMS	19	338	Vertical

**Table 92 - 2404 MHz (CH2), HDR4, ePA, Core 0 + Core 1, 1 GHz to 26 GHz**

No other emissions found within 10 dB of the limit.

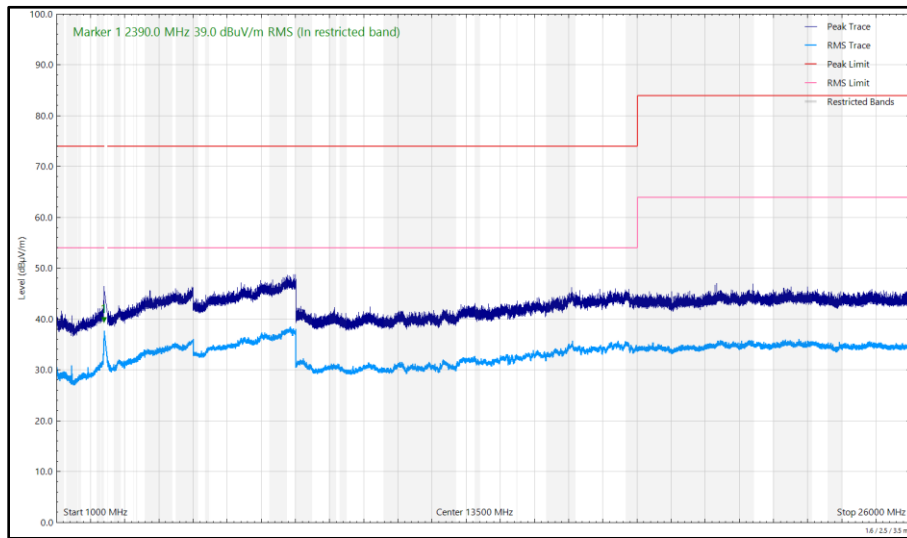

**Figure 284 - 2404 MHz (CH2), HDR4, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal**

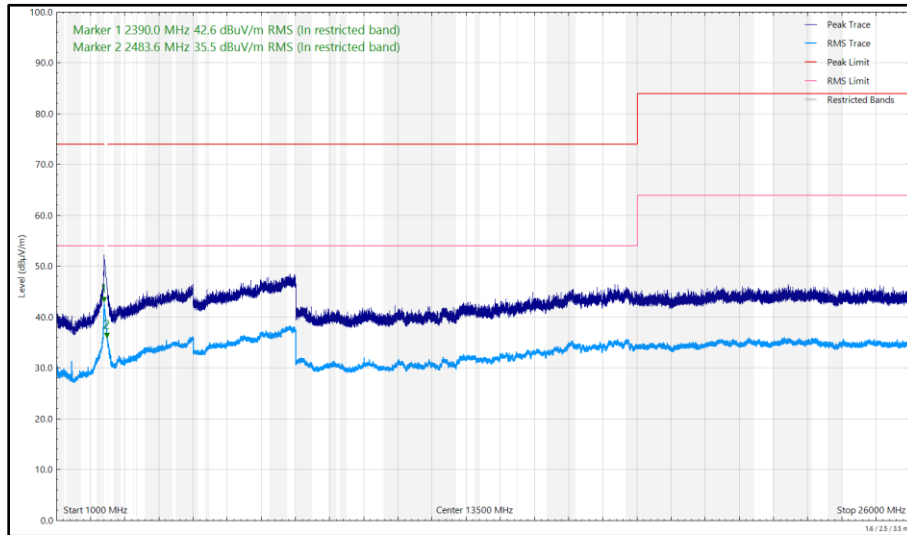


**Figure 285 - 2404 MHz (CH2), HDR4, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical**




Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
30.014	26.08	40.00	-13.92	Q-Peak	0	100	Vertical
2384.854	36.62	54.00	-17.38	RMS	10	328	Vertical
2484.217	37.33	54.00	-16.67	RMS	38	400	Vertical

**Table 93 - 2441 MHz (CH39), HDR4, ePA, Core 0 + Core 1, 1 GHz to 26 GHz**

No other emissions found within 10 dB of the limit.

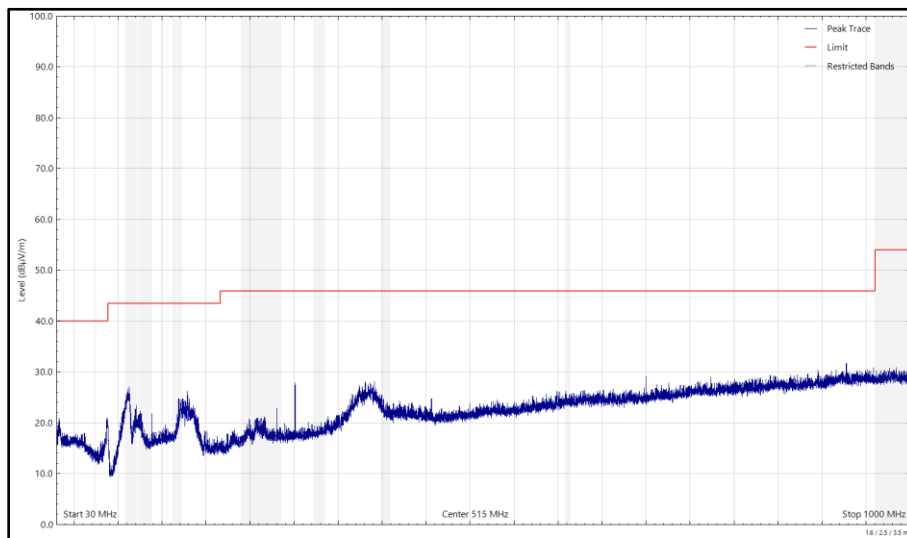

**Figure 286 - 2441 MHz (CH39), HDR4, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)**

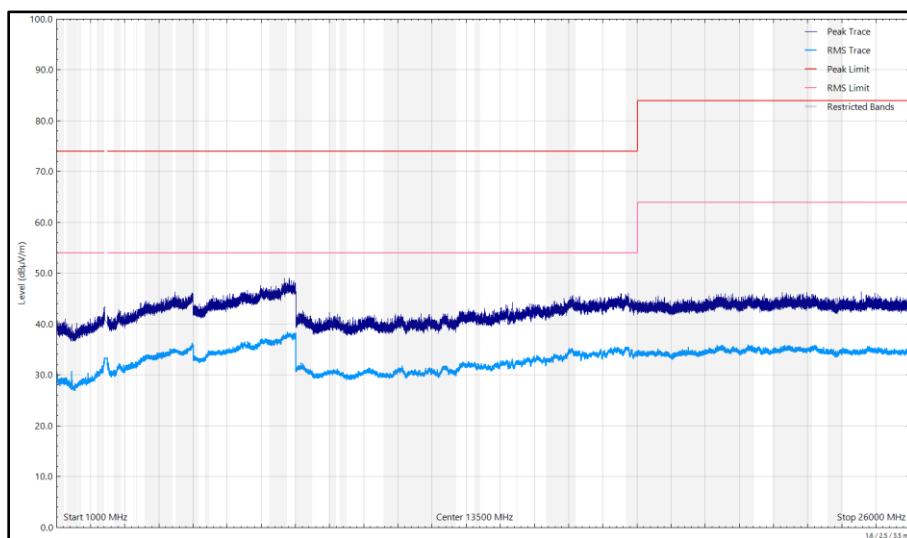

**Figure 287 - 2441 MHz (CH39), HDR4, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal**

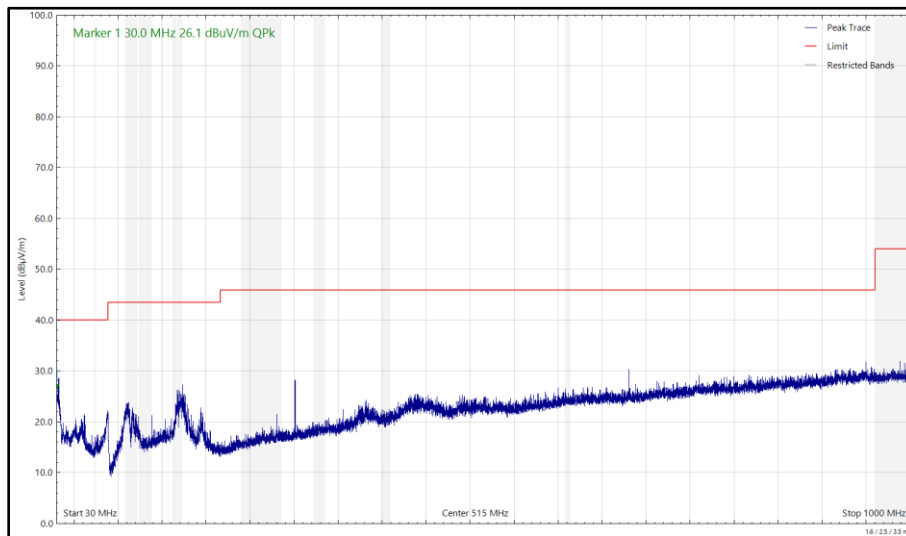


Figure 288 - 2441 MHz (CH39), HDR4, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

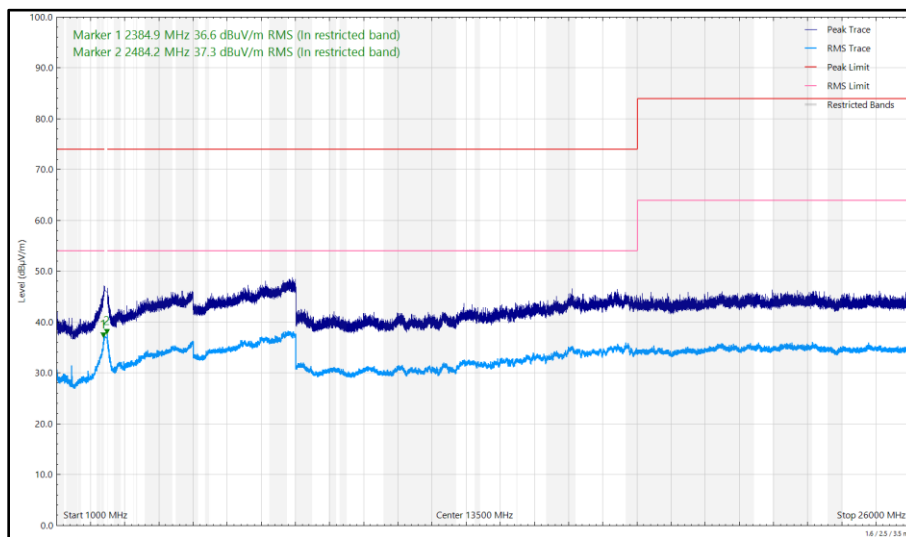



Figure 289 - 2441 MHz (CH39), HDR4, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical




Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2383.178	35.65	54.00	-18.35	RMS	6	306	Vertical
2498.546	38.24	54.00	-15.76	RMS	10	289	Vertical
2498.566	32.47	54.00	-21.53	RMS	329	288	Horizontal

**Table 94 - 2476 MHz (CH74), HDR4, ePA, Core 0 + Core 1, 1 GHz to 26 GHz**

No other emissions found within 10 dB of the limit.

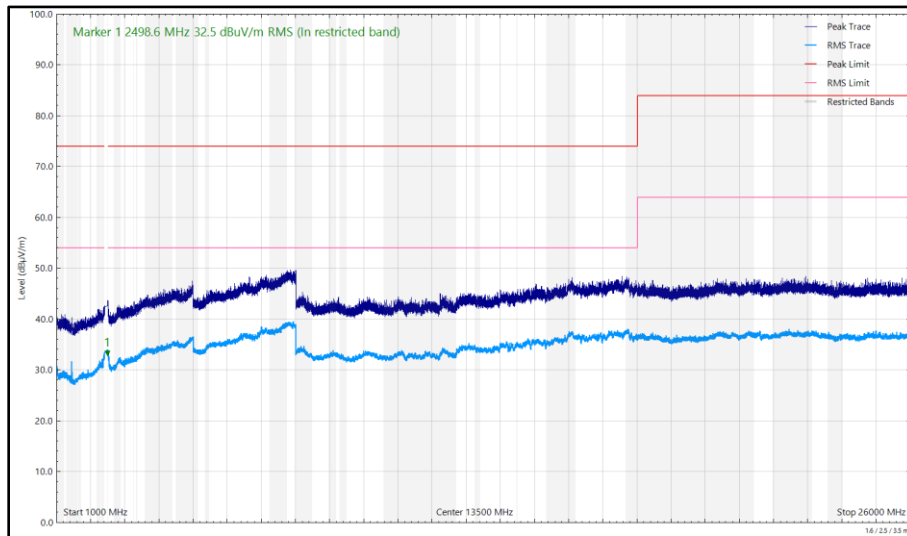

**Figure 290 - 2476 MHz (CH74), HDR4, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal**

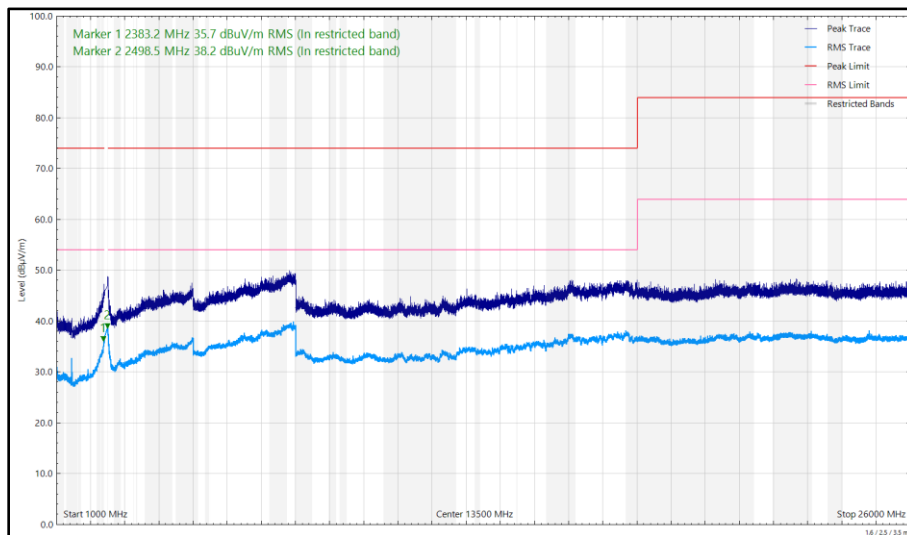

**Figure 291 - 2476 MHz (CH74), HDR4, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical**



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

**2.5.8 Test Location and Test Equipment Used**

This test was carried out in RF Chamber 16 and RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Cable 2.92m	Junkosha	MWX241-01000KMS	5413	12	23-May-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	5912	12	07-Aug-2025
Test Receiver	Rohde & Schwarz	ESW44	5914	12	24-May-2025
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5933	12	10-Jun-2025
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5939	12	05-May-2025
1500W (300V 12A) AC Power Supply	iTech	IT7324	5957	-	O/P Mon
3m Semi-Anechoic Chamber, Chamber16	Albatross Projects	RF Chamber 16	5972	36	24-May-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5973	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5974	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5975	-	TU
Cable (N to N 1m)	Junkosha	MWX221-01000AMSAMS/B	6009	12	20-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	05-May-2025
SAC Switch Unit	TUV SUD	TUV_SSU_001	6144	12	11-Dec-2024
Digital Multimeter	Fluke	115	6147	12	06-Jun-2025
Humidity & Temperature meter	R.S Components	1364	6148	12	29-Jul-2025
Attenuator 4dB	Pasternack	PE7074-4	6204	24	20-Jun-2026
USB Spectrum Analyser	Signal Hound	SA124B	6295	-	TU
Cable (SMA to SMA 8m)	Junkosha	MWX221-08000AMSAMS/B	6318	12	18-Feb-2025
Digital Multimeter	Fluke	115	6345	12	24-Jul-2025



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6349	12	07-May-2025
USB Spectrum Analyser	Signal Hound	SA124B	6383	-	TU
8 GHz High Pass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6427	12	23-Apr-2025
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	6456	24	10-Feb-2025
Humidity and Temperature Meter	R.S Components	1364	6486	12	04-Jun-2025
3m Semi-Anechoic Chamber	Albatross Projects	Chamber 18	6597	36	07-Feb-2026
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6771	24	17-Jan-2025
Pre Amp 8 - 18 GHz	Wright Technologies	APS06-0061	6783	12	23-Apr-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	6795	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6796	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6797	-	TU
AC Programmable Power Supply	iTech	IT7324	6812	-	O/P Mon
8M SMA Cable	Junkosha	MWX221- 08000AMSAMS/B	6833	12	14-Aug-2025

**Table 95**

TU - Traceability Unscheduled  
 O/P Mon - Output Monitored using calibrated equipment





## **2.6 Power Spectral Density**

### **2.6.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (e)

### **2.6.2 Equipment Under Test and Modification State**

A3401, S/N: HHJTCJ96L9 - Modification State 0

### **2.6.3 Date of Test**

30-September-2024 to 04-October-2024

### **2.6.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 11.10.2.

Where the EUT duty cycle was < 98 % and repeatable within 2 %, the spectrum analyser was set to trace (power) averaging and a duty cycle correction was added as calculated in the result tables below (Method AVGPSD-2).

MIMO output port summing was performed in accordance with KDB 662911 D01 E)2)b).

### **2.6.5 Environmental Conditions**

Ambient Temperature	22.1 °C
Relative Humidity	52.6 - 58.6 %



**2.6.6 Test Results**

**2.4 GHz Bluetooth LE/HDR**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	$\Sigma$		
2404	3.0	-	-10.98	-	-	-	8.00	-18.98
2441	3.0	-	-10.85	-	-	-	8.00	-18.85
2476	3.0	-	-10.85	-	-	-	8.00	-18.85

**Table 96 - Maximum Power Spectral Density Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	$\Sigma$		
2404	3.0	-	-10.78	-	-	-	8.00	-18.78
2441	3.0	-	-10.60	-	-	-	8.00	-18.60
2476	3.0	-	-10.50	-	-	-	8.00	-18.50

**Table 97 - Maximum Power Spectral Density Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-	-7.78	-	-	-	8.00	-15.78
2440	3.0	-	-7.97	-	-	-	8.00	-15.97
2480	3.0	-	-7.72	-	-	-	8.00	-15.72

**Table 98 - Maximum Power Spectral Density Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-	-10.38	-	-	-	8.00	-18.38
2440	3.0	-	-9.98	-	-	-	8.00	-17.98
2480	3.0	-	-10.35	-	-	-	8.00	-18.35

**Table 99 - Maximum Power Spectral Density Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	$\Sigma$		
2404	3.0	-	-	-11.06	-	-	8.00	-19.06
2441	3.0	-	-	-11.01	-	-	8.00	-19.01
2476	3.0	-	-	-10.81	-	-	8.00	-18.81

**Table 100 - Maximum Power Spectral Density Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	$\Sigma$		
2404	3.0	-	-	-10.99	-	-	8.00	-18.99
2441	3.0	-	-	-10.60	-	-	8.00	-18.60
2476	3.0	-	-	-10.58	-	-	8.00	-18.58

**Table 101 - Maximum Power Spectral Density Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-	-	-8.25	-	-	8.00	-16.25
2440	3.0	-	-	-7.96	-	-	8.00	-15.96
2480	3.0	-	-	-8.00	-	-	8.00	-16.00

**Table 102 - Maximum Power Spectral Density Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-	-	-10.45	-	-	8.00	-18.45
2440	3.0	-	-	-10.22	-	-	8.00	-18.22
2480	3.0	-	-	-10.08	-	-	8.00	-18.08

**Table 103 - Maximum Power Spectral Density Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	$\Sigma$		
2404	3.0	-	-1.60	-	-	-	8.00	-9.60
2441	3.0	-	-2.09	-	-	-	8.00	-10.09
2476	3.0	-	-1.94	-	-	-	8.00	-9.94

**Table 104 - Maximum Power Spectral Density Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	$\Sigma$		
2404	3.0	-	-3.76	-	-	-	8.00	-11.76
2441	3.0	-	-4.05	-	-	-	8.00	-12.05
2476	3.0	-	-4.53	-	-	-	8.00	-12.53

**Table 105 - Maximum Power Spectral Density Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	60.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.50

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-0.12	-	-	-	-	8.00	-8.12
2440	3.0	-0.02	-	-	-	-	8.00	-8.02
2480	3.0	0.33	-	-	-	-	8.00	-7.68

**Table 106 - Maximum Power Spectral Density Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 2M)	Duty Cycle (%):	31.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.50

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-2.10	-	-	-	-	8.00	-10.10
2440	3.0	-2.15	-	-	-	-	8.00	-10.15
2480	3.0	-2.01	-	-	-	-	8.00	-10.01

**Table 107 - Maximum Power Spectral Density Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	$\Sigma$		
2404	3.0	-10.98	-11.31	-	-	-8.13	6.34	-14.47
2441	3.0	-11.44	-11.38	-	-	-8.40	6.34	-14.74
2476	3.0	-11.22	-11.27	-	-	-8.23	6.34	-14.57

**Table 108 - Maximum Power Spectral Density Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	$\Sigma$		
2404	3.0	-11.36	-11.48	-	-	-8.41	6.34	-14.75
2441	3.0	-11.21	-11.29	-	-	-8.24	6.34	-14.58
2476	3.0	-10.99	-11.39	-	-	-8.17	6.34	-14.51

**Table 109 - Maximum Power Spectral Density Results**





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.4
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-7.98	-8.21	-	-	-5.08	6.34	-11.42
2440	3.0	-7.77	-8.03	-	-	-4.88	6.34	-11.22
2480	3.0	-8.23	-8.48	-	-	-5.34	6.34	-11.68

**Table 110 - Maximum Power Spectral Density Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.3
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-10.20	-10.27	-	-	-7.22	6.34	-13.56
2440	3.0	-9.84	-9.95	-	-	-6.89	6.34	-13.23
2480	3.0	-10.13	-10.19	-	-	-7.15	6.34	-13.49

**Table 111 - Maximum Power Spectral Density Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	$\Sigma$		
2404	3.0	-2.36	-2.32	-	-	0.67	6.34	-5.67
2441	3.0	-1.91	-2.38	-	-	0.88	6.34	-5.46
2476	3.0	-2.27	-2.04	-	-	0.86	6.34	-5.48

**Table 112 - Maximum Power Spectral Density Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	$\Sigma$		
2404	3.0	-4.55	-4.40	-	-	-1.46	6.34	-7.80
2441	3.0	-4.29	-4.57	-	-	-1.42	6.34	-7.76
2476	3.0	-3.65	-4.01	-	-	-0.81	6.34	-7.15

**Table 113 - Maximum Power Spectral Density Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	60.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	0.37	0.05	-	-	3.22	6.34	-3.12
2440	3.0	0.53	0.08	-	-	3.32	6.34	-3.02
2480	3.0	0.05	0.19	-	-	3.13	6.34	-3.21

**Table 114 - Maximum Power Spectral Density Results**

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	ePA GFSK (LE 2M)	Duty Cycle (%):	31.6
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.66

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-1.98	-2.53	-	-	0.76	6.34	-5.58
2440	3.0	-2.28	-2.13	-	-	0.81	6.34	-5.53
2480	3.0	-2.49	-2.73	-	-	0.41	6.34	-5.93

**Table 115 - Maximum Power Spectral Density Results**

FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



**2.6.7 Test Location and Test Equipment Used**

This test was carried out in RF Chamber 18 and RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5919	24	18-Mar-2026
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	28-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6519	12	08-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6520	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6521	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6522	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6528	12	22-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon

**Table 116**

O/P Mon - Output Monitored using calibrated equipment



### 3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	30 MHz to 1 GHz: $\pm 5.2$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Emission Bandwidth	$\pm 84.30$ kHz
Maximum Conducted Output Power	$\pm 1.38$ dB
Authorised Band Edges	30 MHz to 1 GHz: $\pm 5.2$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Spurious Radiated Emissions	30 MHz to 1 GHz: $\pm 5.2$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Power Spectral Density	$\pm 1.49$ dB

**Table 117**

#### Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.