

Figure 517 - First 12 s of Channel Shutdown Period

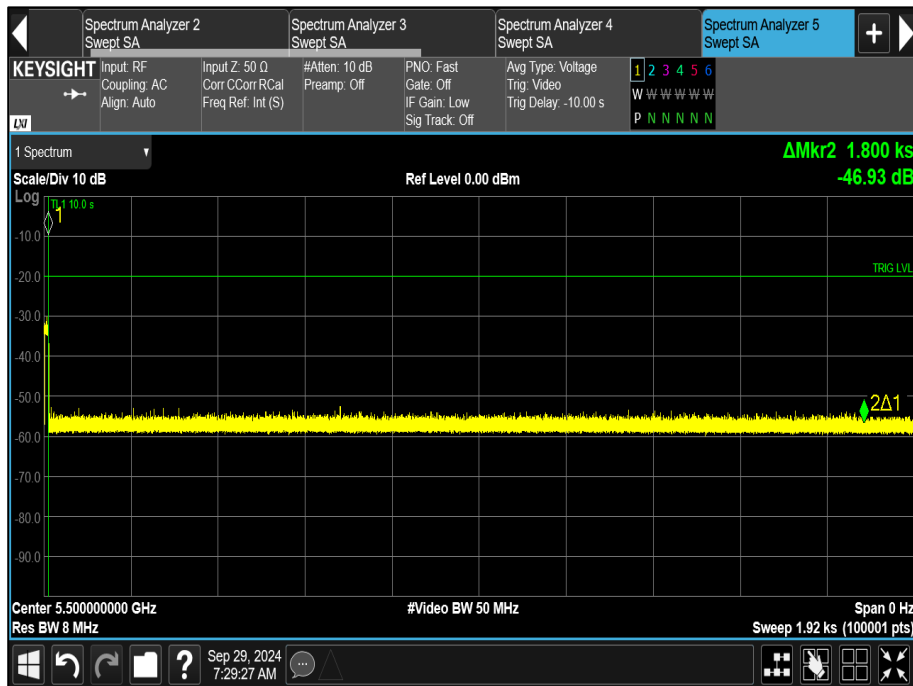


Figure 518 - 30 minute Non-Occupancy Period

5 GHz WLAN - Client to Client

The equipment under test was a Client without Radar Detection.

This test was performed in the following mode of operation: 802.11ac VHT80.

The equipment was set up as shown in the diagram below. The EUT and a 2nd client device were both connected to the DFS Master device. The 2nd client device was set to stream video directly to the EUT using the AirPlay protocol, while under the supervision of the DFS master (but without the DFS master re-transmitting the data packets). The channel loading was checked to ensure it was >17%.

To calibrate the level of the radar at the input to the DFS Master, the DFS Master device was replaced by the spectrum analyser and the output of the vector signal generator adjusted to give -62 dBm.

Radar Type	Pulse Width (μ s)	PRI (μ s)	Number of Pulses
0	1	1428	18

Table 579 - Radar Pulse Type 0 Characteristics

Manufacturer	Model	Serial Number	FCC ID
ASUS	GT-AXE11000	M8IG0X400285XVN	MSQ-RTAXJF00

Table 580 - Details of Master Device used to support testing

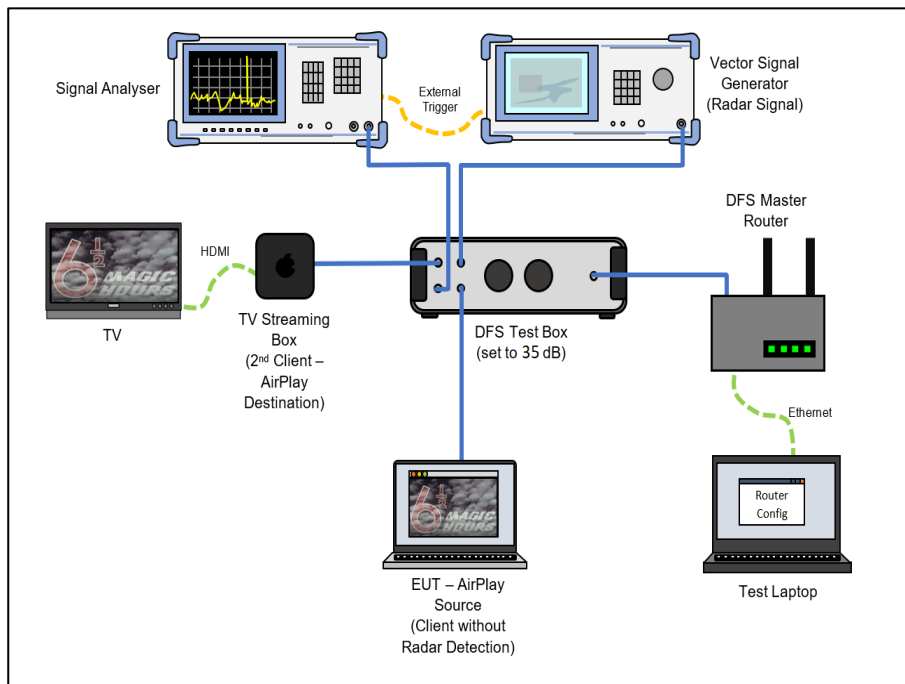


Figure 519 - Test Equipment Setup Diagram for Client without Radar Detection with Injection at the Master



Figure 520 - Verification of Radar Type 0

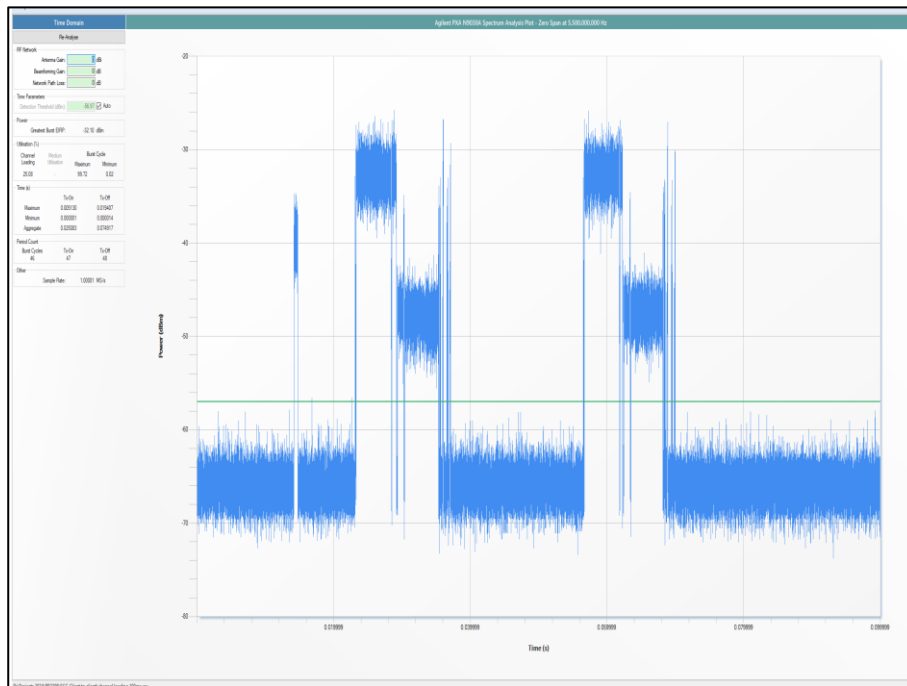


Figure 521 - Channel Loading

The channel loading was 25.08%



Maximum Transmit Power	Value (Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

Table 581 - DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Test Parameter	Result
Test Channel	CH114 (5570 MHz), Control CH100 (5500 MHz)
Channel Move Time	0.001
Channel Closing Time (Aggregate Time During 200 ms)	1.080
Channel Closing Time (Aggregate Time During 200 ms to 10 s)	0
Channel Closing Time (Aggregate Time During 10 s)	1.080
Transmission Observed During Non-Occupancy Period	No

Table 582 - In-Service Monitoring Test Results

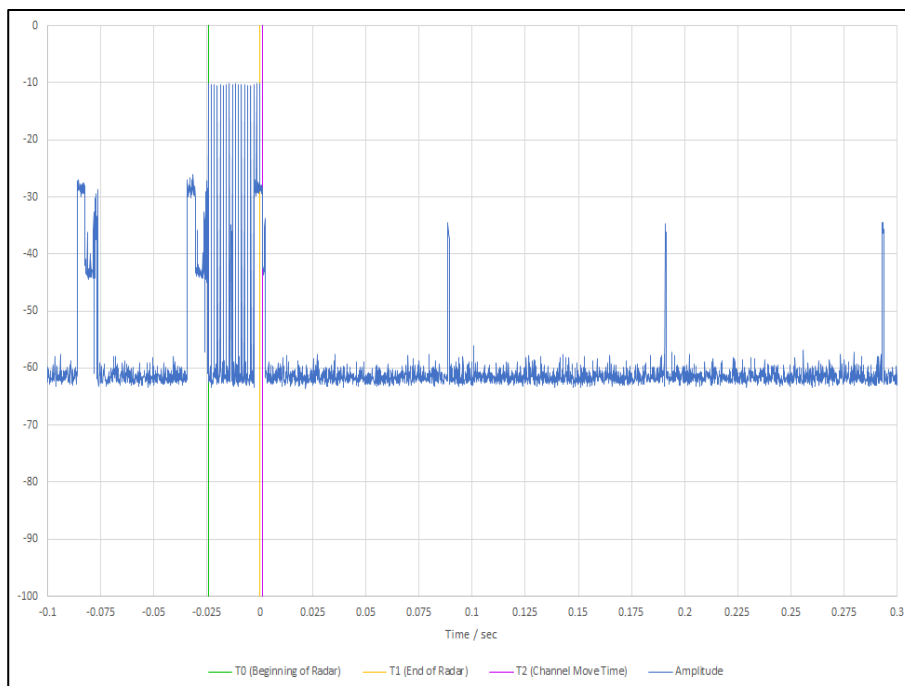


Figure 522 - First 200 ms of Channel Shutdown Period

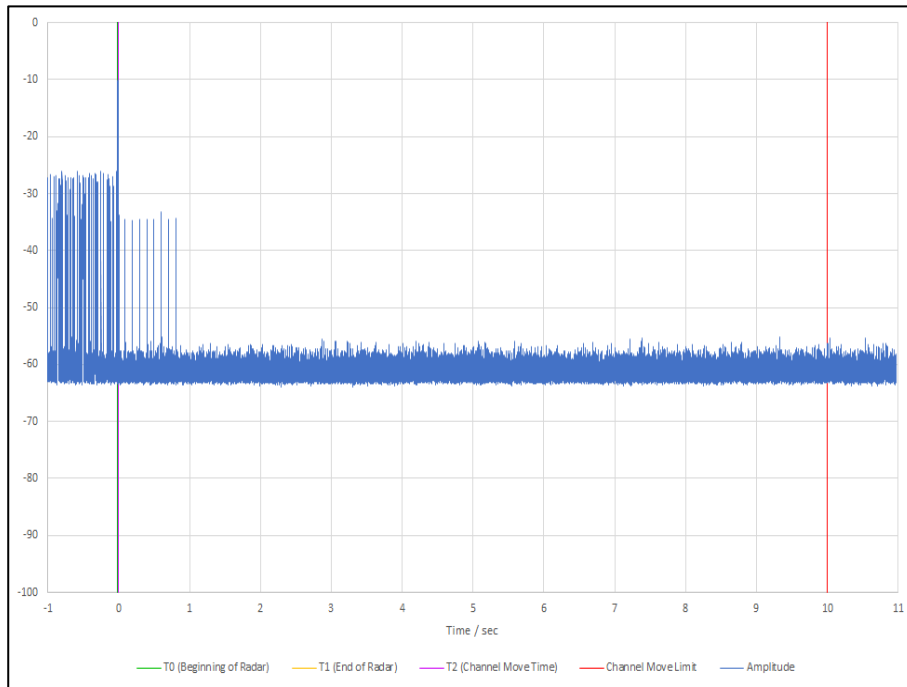


Figure 523 - First 12 s of Channel Shutdown Period



Figure 524 - 30 minute Non-Occupancy Period



FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iii)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms

Table 583 - Channel Move Time and Channel Closing Transmission Time Limit

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iv)

Non-occupancy Period	> 30 minutes
----------------------	--------------

Table 584 - Non-Occupancy Limit

2.7.7 Test Location and Test Equipment Used

This test was carried out in Shielded Laboratory 1.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5416	12	07-Mar-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5426	12	16-May-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5427	12	23-May-2025
3.5mm Cable (1m)	Junkosha	MWX221/B	5838	12	29-Jul-2025
Vector Signal Generator	Rohde & Schwarz	SMM100A	5915	36	01-Mar-2026
WiFi 6E Tri-Band Gaming Router	Asus	GT-AXE110000	5926	-	TU
Thermohygrometer	R.S Components	1364	6352	12	13-Jun-2025
MXA Signal Analyzer	Keysight Technologies	N9020B	6415	24	22-Mar-2025
Test Coupling Network	TUV SUD	TUV_RxTest_001	6441	12	30-Apr-2025

Table 585

TU - Traceability Unscheduled



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	± 6.3 dB
Emission Bandwidth	± 3.914 MHz
Maximum Conducted Output Power	± 1.38 dB
Maximum Conducted Power Spectral Density	± 1.49 dB
Authorised Band Edges	± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Time: ± 0.47 % Power: ± 1.29 dB

Table 586

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.