

# FCC and ISED Test Report

Apple Inc  
Model: A3401



In accordance with FCC 47 CFR Part 15B and ICES-003 and ISED RSS-GEN

Prepared for: Apple Inc  
One Apple Park Way  
Cupertino  
California  
95014  
USA

FCC ID: BCGA3401

IC: 579C-A3401

## COMMERCIAL-IN-CONFIDENCE

Document 75961394-50 Issue 01

### SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Andy Lawson	Chief Engineer	Authorised Signatory	04 September 2024

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15B and ICES-003 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Connor Lee	04 September 2024	

FCC Accreditation

492497/UK2010 Octagon House, Fareham Test Laboratory

ISED Accreditation

12669A Octagon House, Fareham Test Laboratory

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15B, ICES-003 and ISED RSS-GEN: 2023, Issue 7: 2020 and Issue 5 and A2 (2021-02) for the tests detailed in section 1.3.



### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2024 TÜV SÜD. This report relates only to the actual item/items tested.

### ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD  
is a trading name of TÜV SÜD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TÜV SÜD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuvsud.com/en](http://www.tuvsud.com/en)

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire PO15 5RL  
United Kingdom



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results .....	3
1.4	Product Information .....	4
1.5	Deviations from the Standard.....	5
1.6	Identification of the EUT .....	5
1.7	EUT Modification Record .....	5
1.8	Test Location .....	5
<b>2</b>	<b>Test Details .....</b>	<b>6</b>
2.1	Conducted Disturbance at Mains Terminals .....	6
2.2	Radiated Disturbance .....	11
<b>3</b>	<b>Incident Reports .....</b>	<b>20</b>
<b>4</b>	<b>Measurement Uncertainty .....</b>	<b>21</b>



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	04-Sept-2024

**Table 1**

## 1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
EUT/Sample Identification	Refer to section 1.6
Test Specification/Issue/Date	FCC 47 CFR Part 15B: 2023 ICES-003, Issue 7: 2020 ISED RSS-GEN: Issue 5 and A2 (2021-02)
Start of Test	20-August-2024
Finish of Test	22-August-2024
Name of Engineer(s)	Connor Lee
Related Document(s)	ANSI C63.4: 2014



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15B and ICES-003 and ISED RSS-GEN is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: AC Powered - Transmitter Idle				
2.1	15.107, 3.1 and 8.8	Conducted Disturbance at Mains Terminals	Pass	ANSI C63.4: 2014
2.2	15.109, 3.2 and 7.1	Radiated Disturbance	Pass	ANSI C63.4: 2014

**Table 2**



**1.4 Product Information**

**1.4.1 Technical Description**

The equipment under test (EUT) was a portable laptop computer.

**1.4.2 EUT Port/Cable Identification**

Port	Max Cable Length specified	Usage	Type	Screened
Configuration and Mode: AC Powered - Transmitter Idle				
AC Power Port	2 m	Power	AC to DC Power Adapter with USB-C output and MagSafe cable	No
USB Port 1	2 m	Data	USB Type-C	No
USB Port 2	Unterminated	Data	USB Type-C	No
USB Port 3	Unterminated	Data	USB Type-C	No
HDMI Port	2 m	Video output	HDMI	No
Audio Jack Port	1 m	Audio Output	3.5 mm Jack	No

**Table 3**

**1.4.3 Test Configuration**

Configuration	Description
AC Powered	The EUT was powered from a 120 V 60 Hz AC supply using an AC to DC adapter with USB-C output. PSU Model: A2743. A PC hub was used to terminate USB Port 1, HDMI port and Audio Jack Port. USB Port 2 was unterminated. USB Port 3 was unterminated.

**Table 4**

**1.4.4 Modes of Operation**

Mode	Description
Transmitter Idle	The EUT was powered with all internal transmitters disabled.

**Table 5**



**1.5 Deviations from the Standard**

No deviations from the applicable test standard were made during testing.

**1.6 Identification of the EUT**

The table below details identification of the EUT(s) that have been used to carry out the testing within this report.

Model: A3401			
Serial Number	Hardware Version	Software Version	Firmware
CQ91KHYQ7R	REV1.0	24A295	WLAN: 23.10.864.0.41.51.156 BT: 22.1.116.1034
JDQH4YGN4J	REV1.0	24A295	WLAN: 23.10.864.0.41.51.156 BT: 22.1.116.1034

**Table 6**

**1.7 EUT Modification Record**

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A3401, Serial Number: CQ91KHYQ7R			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3401, Serial Number: JDQH4YGN4J			
0	As supplied by the customer	Not Applicable	Not Applicable

**Table 7**

**1.8 Test Location**

TÜV SÜD conducted the following tests at our Octagon House Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: AC Powered - Transmitter Idle		
Conducted Disturbance at Mains Terminals	Connor Lee	UKAS
Radiated Disturbance	Connor Lee	UKAS

**Table 8**

Office Address:

TÜV SÜD  
 Octagon House  
 Concorde Way  
 Fareham  
 Hampshire  
 PO15 5RL  
 United Kingdom



## 2 Test Details

### 2.1 Conducted Disturbance at Mains Terminals

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15B, ICES-003 and ISED RSS-GEN, Clause 15.107, 3.1 and 8.8

#### 2.1.2 Equipment Under Test and Modification State

A3401, S/N: JDQH4YGN4J - Modification State 0

#### 2.1.3 Date of Test

22-August-2024

#### 2.1.4 Test Method

The EUT was setup according to ANSI C63.4, clause 5.2.

The EUT was placed on a non-conductive table 0.8 m above a reference ground plane. A vertical coupling plane was placed 0.4 m from the EUT boundary.

A Line Impedance Stabilisation Network (LISN) was directly bonded to the ground-plane. The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN was 0.8 m.

Interconnecting cables that hanged closer than 0.4 m to the ground plane were folded back and forth in the centre forming a bundle 0.3 m to 0.4 m long.

Input and output cables were terminated with equipment or loads representative of real usage conditions.


The EUT was configured to give the highest level of emissions within reason of a typical installation as described by the manufacturer.

#### 2.1.5 Example Calculation

Quasi-Peak level (dB $\mu$ V) = Receiver level (dB $\mu$ V) + Correction Factor (dB)  
Margin (dB) = Quasi-Peak level (dB $\mu$ V) - Limit (dB $\mu$ V)

CISPR Average level (dB $\mu$ V) = Receiver level (dB $\mu$ V) + Correction Factor (dB)  
Margin (dB) = CISPR Average level (dB $\mu$ V) - Limit (dB $\mu$ V)

**2.1.6 Example Test Setup Diagram**

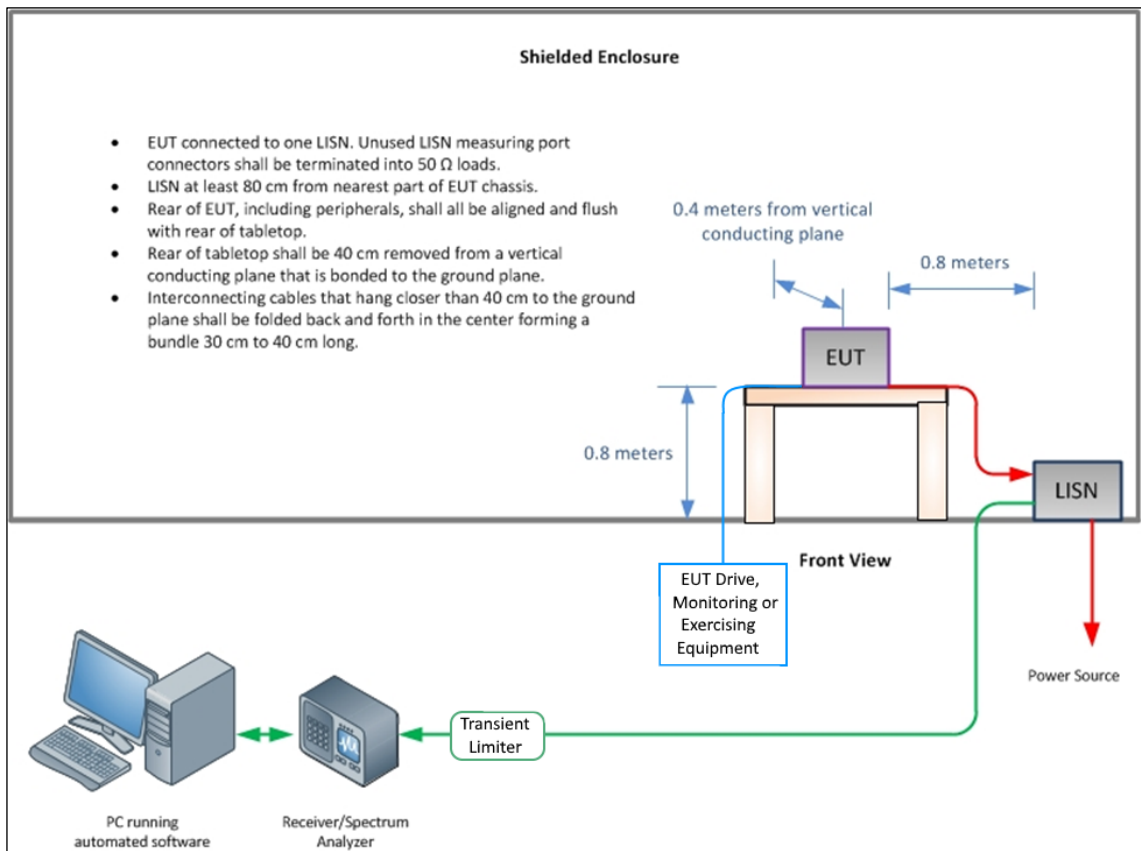

**Figure 1 - Conducted Disturbance**

**2.1.7 Environmental Conditions**

Ambient Temperature 24.1 °C  
 Relative Humidity 47.5 %  
 Atmospheric Pressure 1008.0 mbar

**2.1.8 Specification Limits**

Required Specification Limits - Class B			
Line Under Test	Frequency Range (MHz)	Quasi-Peak Test Limit (dBµV)	CISPR Average Test Limit (dBµV)
AC Power Port	0.15 to 0.5	66 to 56 <sup>(1)</sup>	56 to 46 <sup>(1)</sup>
	0.5 to 5	56	46
	5 to 30	60	50

**Supplementary information:**  
 Note 1. Decreases with the logarithm of the frequency.

**Table 9**






**2.1.9 Test Results**

**Results for Configuration and Mode: AC Powered - Transmitter Idle.**

**This test was performed to the requirements of the Class B limits.**

Performance assessment of the EUT made during this test: Pass.


Detailed results are shown below.

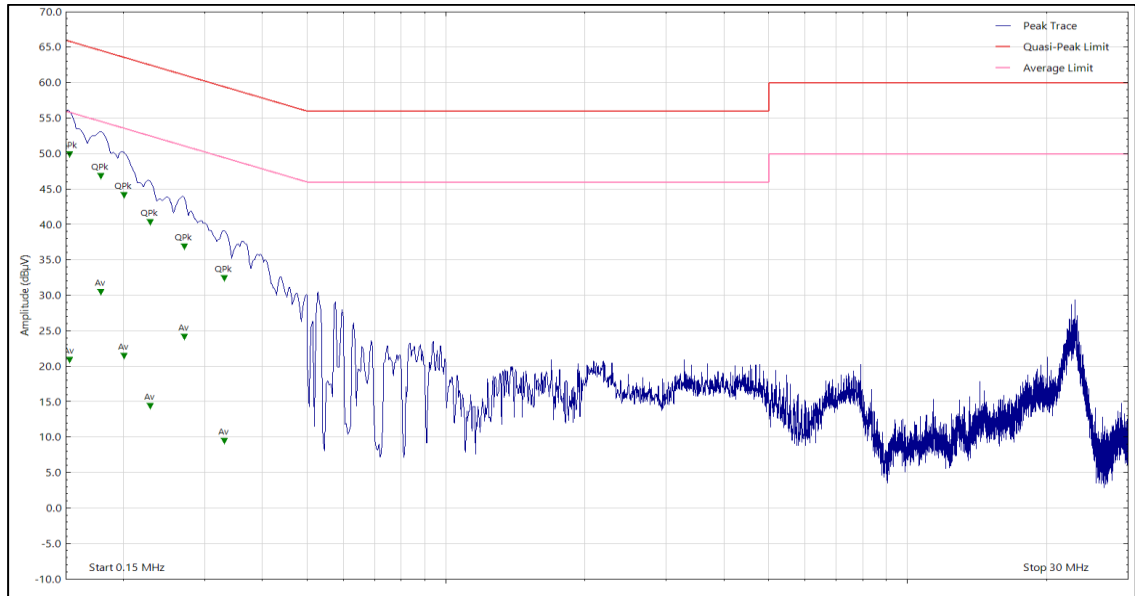

**Figure 2 - Graphical Results - AC Power Live Line**

Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Margin (dB)	Detector
0.153	49.23	65.80	-16.57	Q-Peak
0.153	20.23	55.80	-35.57	CISPR Avg
0.179	46.21	64.50	-18.29	Q-Peak
0.179	29.81	54.50	-24.69	CISPR Avg
0.201	43.50	63.60	-20.10	Q-Peak
0.201	20.83	53.60	-32.77	CISPR Avg
0.229	13.78	52.50	-38.72	CISPR Avg
0.229	39.64	62.50	-22.86	Q-Peak
0.271	36.20	61.10	-24.90	Q-Peak
0.271	23.45	51.10	-27.65	CISPR Avg
0.331	31.75	59.40	-27.65	Q-Peak
0.331	8.79	49.40	-40.61	CISPR Avg

**Table 10**

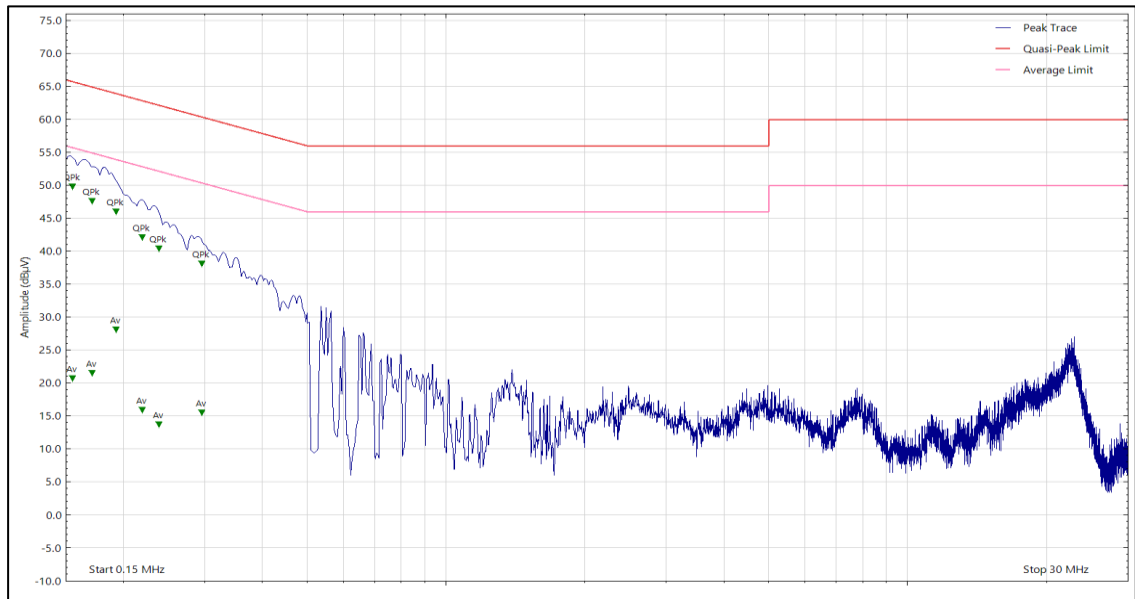

**Figure 3 - Graphical Results - AC Power Neutral Line**

Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Margin (dB)	Detector
0.155	20.00	55.80	-35.80	CISPR Avg
0.155	49.09	65.80	-16.71	Q-Peak
0.171	20.85	54.90	-34.05	CISPR Avg
0.171	46.84	64.90	-18.06	Q-Peak
0.193	27.38	53.90	-26.52	CISPR Avg
0.193	45.25	63.90	-18.65	Q-Peak
0.220	15.18	52.80	-37.62	CISPR Avg
0.220	41.43	62.80	-21.37	Q-Peak
0.239	13.06	52.10	-39.04	CISPR Avg
0.239	39.74	62.10	-22.36	Q-Peak
0.296	14.81	50.40	-35.59	CISPR Avg
0.296	37.41	60.40	-22.99	Q-Peak

**Table 11**



**2.1.10 Test Location and Test Equipment Used**

This test was carried out in EMC Chamber 12.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
3m Semi-Anechoic Chamber	MVG	EMC Chamber 12	5621	36	07-Aug-2026
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Test Receiver	Rohde & Schwarz	ESU40	3506	12	17-Apr-2025
Transient Limiter	Hewlett Packard	11947A	15	12	24-Oct-2024
Cable (N-Type to N-Type, 2 m)	Junkosha	MWX221-02000AMSAMS/B	5729	6	02-Feb-2025
Cable (N-Type to N-Type, 8 m)	Junkosha	MWX221-08000NMSNMS/B	6321	12	04-Feb-2025
LISN (CISPR 16, Single Phase)	Rohde & Schwarz	ESH3-Z5	1390	12	01-Feb-2025
Thermo-Hygro-Barometer	PCE Instruments	OCE-THB-40	5470	12	07-May-2025

**Table 12**



## 2.2 Radiated Disturbance

### 2.2.1 Specification Reference

FCC 47 CFR Part 15B, ICES-003 and ISED RSS-GEN, Clause 15.109, 3.2 and 7.1

### 2.2.2 Equipment Under Test and Modification State

A3401, S/N: CQ91KHYQ7R - Modification State 0

### 2.2.3 Date of Test

20-August-2024 to 21-August-2024

### 2.2.4 Test Method

The EUT was set up on a non-conductive table 0.8 m above a reference ground plane within a semi-anechoic chamber on a remotely controlled turntable.

A pre-scan of the EUT emissions profile using a peak detector was made at a 3 m antenna distance whilst varying the antenna-to-EUT azimuth and polarisation.

For an EUT which could reasonable be used in multiple planes, pre-scans were performed with the EUT orientated in X, Y and Z planes with reference to the ground plane.

Using a list of the highest emissions detected during the pre-scan along with their bearing and associated antenna polarisation, the EUT was then formally measured using a Quasi-Peak, Peak or CISPR Average detector as appropriate.

The readings were maximised by adjusting the antenna height, polarisation and turntable azimuth, in accordance with the specification.

### 2.2.5 Example Calculation

Below 1 GHz:

$$\begin{aligned} \text{Quasi-Peak level (dB}\mu\text{V/m)} &= \text{Receiver level (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ \text{Margin (dB)} &= \text{Quasi-Peak level (dB}\mu\text{V/m)} - \text{Limit (dB}\mu\text{V/m)} \end{aligned}$$

Above 1 GHz:

$$\begin{aligned} \text{CISPR Average level (dB}\mu\text{V/m)} &= \text{Receiver level (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ \text{Margin (dB)} &= \text{CISPR Average level (dB}\mu\text{V/m)} - \text{Limit (dB}\mu\text{V/m)} \end{aligned}$$

$$\begin{aligned} \text{Peak level (dB}\mu\text{V/m)} &= \text{Receiver level (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ \text{Margin (dB)} &= \text{Peak level (dB}\mu\text{V/m)} - \text{Limit (dB}\mu\text{V/m)} \end{aligned}$$

2.2.6 Example Test Setup Diagram

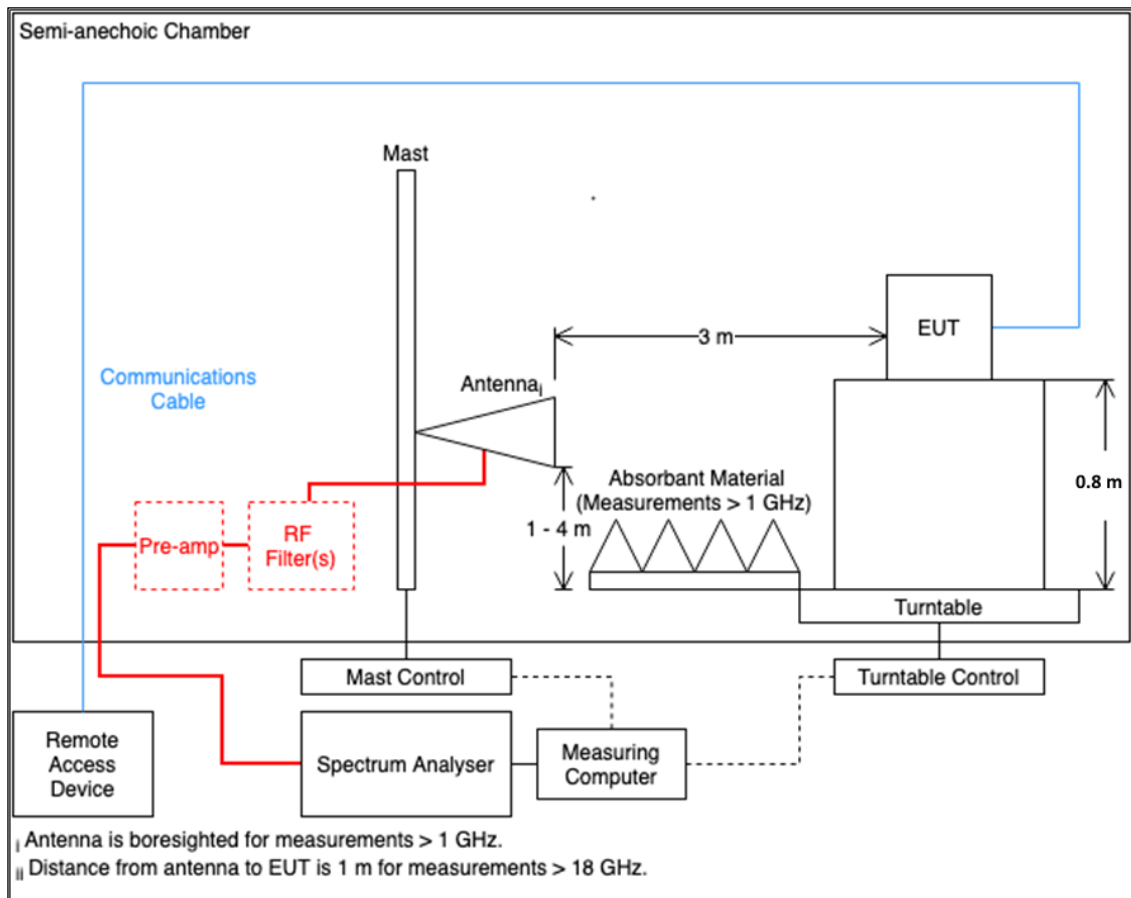


Figure 4 - Radiated Disturbance Example Test Setup

2.2.7 Environmental Conditions

Ambient Temperature 20.8 - 23.3 °C  
 Relative Humidity 55.4 - 58.4 %  
 Atmospheric Pressure 1004.0 - 1009.0 mbar

2.2.8 Specification Limits

Required Specification Limits, Field Strength - Class B Test Limit at a 3 m Measurement Distance		
Frequency Range (MHz)	Test Limit (µV/m)	Test Limit (dBµV/m)
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

**Supplementary information:**  
 Note 1. A Quasi-peak detector is to be used for measurements below 1 GHz.  
 Note 2. A CISPR Average detector is to be used for measurements above 1 GHz.  
 Note 3. The Peak test limit above 1 GHz is 20 dB higher than the CISPR Average test limit.

Table 13



**2.2.9 Test Results**


**Results for Configuration and Mode: AC Powered - Transmitter Idle.**

**This test was performed to the requirements of the Class B limits.**

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.


Highest frequency generated or used within the EUT: 7.125 GHz  
 Which necessitates an upper frequency test limit of: 30 GHz (Tested To 40 GHz.)

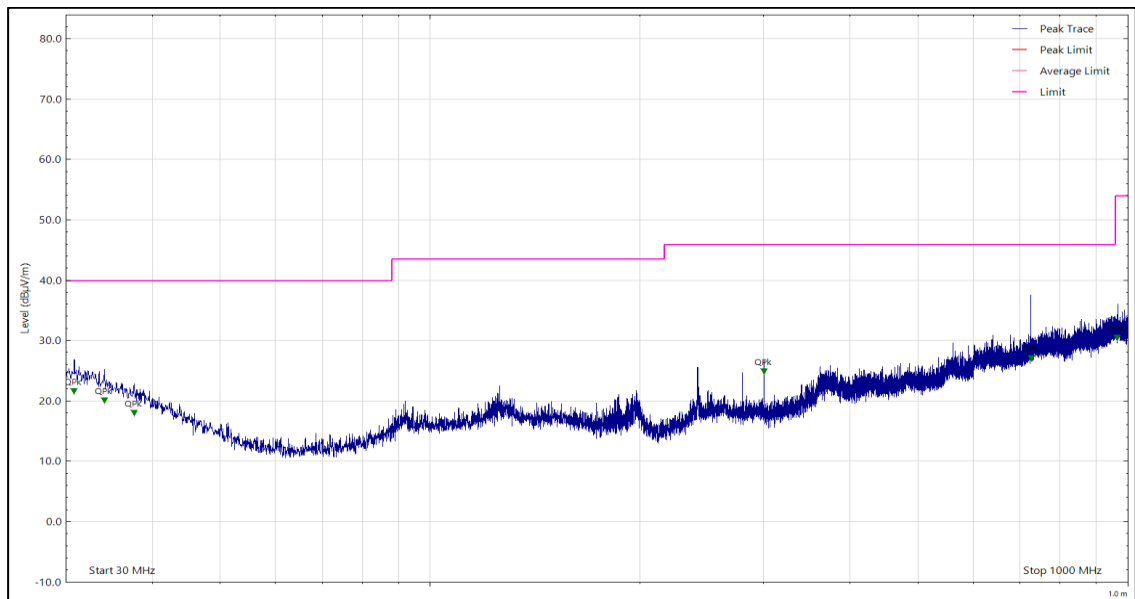

**Figure 5 - 30 MHz to 1 GHz, Horizontal**

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
30.838	20.84	40.00	-19.16	Q-Peak	181	100	Horizontal
34.072	19.34	40.00	-20.66	Q-Peak	287	166	Horizontal
37.604	17.21	40.00	-22.79	Q-Peak	17	100	Horizontal
300.822	24.08	46.00	-21.92	Q-Peak	80	109	Horizontal
728.400	26.28	46.00	-19.72	Q-Peak	221	100	Horizontal
965.212	29.70	54.00	-24.30	Q-Peak	36	100	Horizontal

**Table 14**

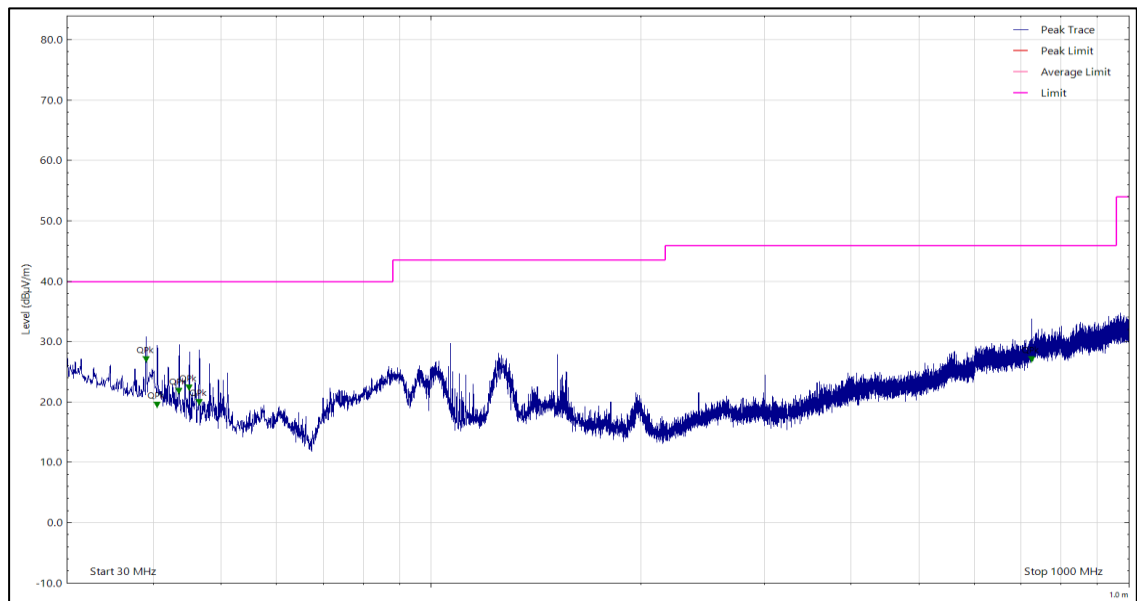

**Figure 6 - 30 MHz to 1 GHz, Vertical**

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
38.981	26.27	40.00	-13.73	Q-Peak	288	100	Vertical
40.419	18.76	40.00	-21.24	Q-Peak	284	107	Vertical
43.472	21.04	40.00	-18.96	Q-Peak	198	102	Vertical
44.969	21.62	40.00	-18.38	Q-Peak	327	102	Vertical
46.466	19.24	40.00	-20.76	Q-Peak	226	100	Vertical
725.346	26.26	46.00	-19.74	Q-Peak	1	110	Vertical

**Table 15**

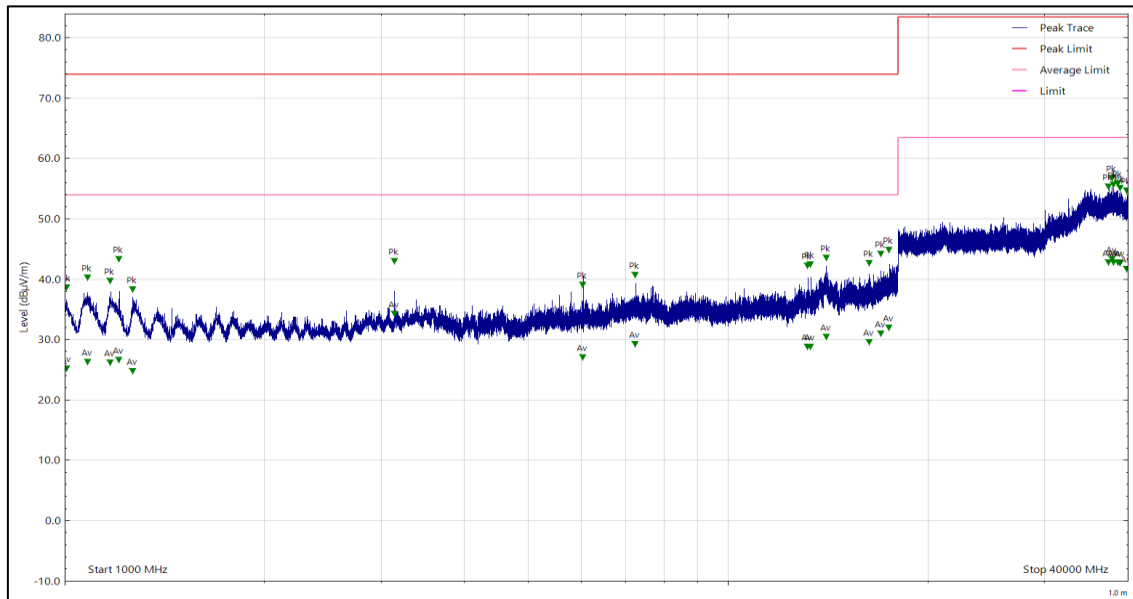


Figure 7 - 1 GHz to 40 GHz, CISPR Average, Horizontal

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1006.000	24.43	54.00	-29.57	CISPR Avg	158	383	Horizontal
1006.000	37.92	74.00	-36.08	Peak	158	383	Horizontal
1082.500	39.54	74.00	-34.46	Peak	242	321	Horizontal
1082.500	25.54	54.00	-28.46	CISPR Avg	242	321	Horizontal
1172.000	38.97	74.00	-35.03	Peak	42	354	Horizontal
1172.000	25.47	54.00	-28.53	CISPR Avg	42	354	Horizontal
1207.500	25.83	54.00	-28.17	CISPR Avg	278	104	Horizontal
1207.500	42.59	74.00	-31.41	Peak	278	104	Horizontal
1265.000	24.01	54.00	-29.99	CISPR Avg	21	299	Horizontal
1265.000	37.53	74.00	-36.47	Peak	21	299	Horizontal
3139.500	42.27	74.00	-31.73	Peak	159	100	Horizontal
3139.500	33.53	54.00	-20.47	CISPR Avg	159	100	Horizontal
6032.500	38.27	74.00	-35.73	Peak	130	100	Horizontal
6032.500	26.28	54.00	-27.72	CISPR Avg	130	100	Horizontal
7239.000	39.99	74.00	-34.01	Peak	356	330	Horizontal
7239.000	28.46	54.00	-25.54	CISPR Avg	356	330	Horizontal
13177.000	28.02	54.00	-25.98	CISPR Avg	280	100	Horizontal
13177.000	41.45	74.00	-32.55	Peak	280	100	Horizontal
13307.500	28.02	54.00	-25.98	CISPR Avg	131	100	Horizontal
13307.500	41.73	74.00	-32.27	Peak	131	100	Horizontal
14049.500	42.79	74.00	-31.21	Peak	254	281	Horizontal
14049.500	29.64	54.00	-24.36	CISPR Avg	254	281	Horizontal
16307.000	28.80	54.00	-25.20	CISPR Avg	172	100	Horizontal
16307.000	41.89	74.00	-32.11	Peak	172	100	Horizontal





Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
16983.000	43.49	74.00	-30.51	Peak	82	100	Horizontal
16983.000	30.24	54.00	-23.76	CISPR Avg	82	100	Horizontal
17469.500	44.05	74.00	-29.95	Peak	351	100	Horizontal
17469.500	31.19	54.00	-22.81	CISPR Avg	351	100	Horizontal
37453.000	42.03	63.50	-21.47	CISPR Avg	45	100	Horizontal
37453.000	54.56	83.50	-28.94	Peak	45	100	Horizontal
37849.000	56.03	83.50	-27.47	Peak	0	100	Horizontal
37849.000	42.59	63.50	-20.91	CISPR Avg	0	100	Horizontal
38054.000	54.93	83.50	-28.57	Peak	213	100	Horizontal
38054.000	42.01	63.50	-21.49	CISPR Avg	213	100	Horizontal
38647.500	55.11	83.50	-28.39	Peak	32	100	Horizontal
38647.500	42.01	63.50	-21.49	CISPR Avg	32	100	Horizontal
38990.500	54.32	83.50	-29.18	Peak	0	100	Horizontal
38990.500	41.92	63.50	-21.58	CISPR Avg	0	100	Horizontal
39879.000	53.93	83.50	-29.57	Peak	247	100	Horizontal
39879.000	40.95	63.50	-22.55	CISPR Avg	247	100	Horizontal

**Table 16**

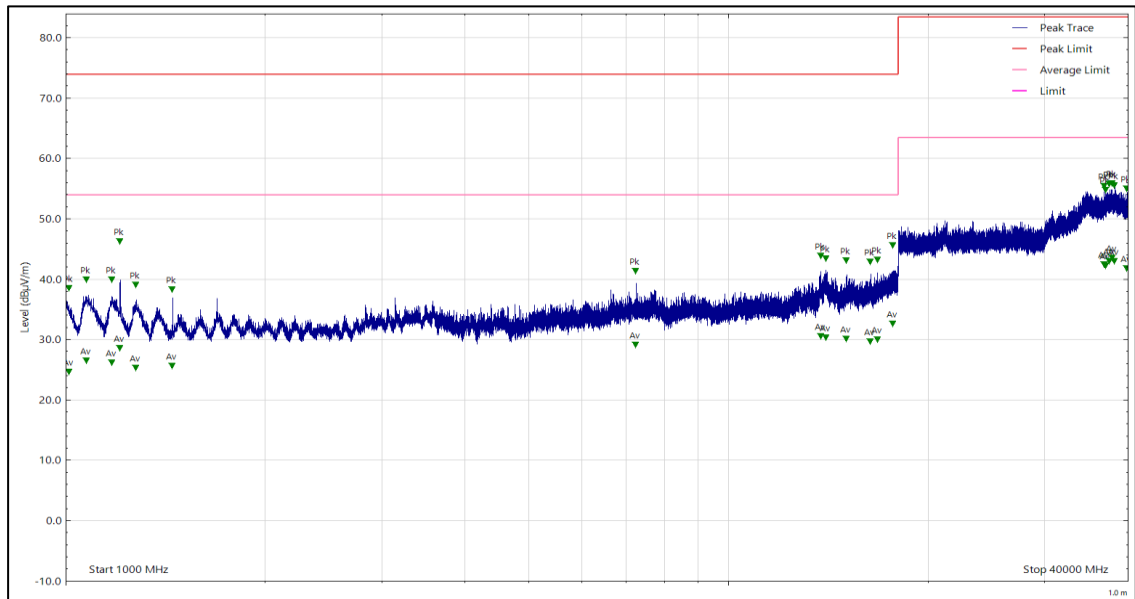


Figure 8 - 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1011.000	37.81	74.00	-36.19	Peak	81	255	Vertical
1011.000	23.93	54.00	-30.07	CISPR Avg	81	255	Vertical
1074.500	25.79	54.00	-28.21	CISPR Avg	301	274	Vertical
1074.500	39.15	74.00	-34.85	Peak	301	274	Vertical
1173.000	25.41	54.00	-28.59	CISPR Avg	210	215	Vertical
1173.000	39.17	74.00	-34.83	Peak	210	215	Vertical
1207.500	45.47	74.00	-28.53	Peak	214	100	Vertical
1207.500	27.83	54.00	-26.17	CISPR Avg	214	100	Vertical
1276.500	38.26	74.00	-35.74	Peak	237	274	Vertical
1276.500	24.53	54.00	-29.47	CISPR Avg	237	274	Vertical
1448.500	24.83	54.00	-29.17	CISPR Avg	78	100	Vertical
1448.500	37.57	74.00	-36.43	Peak	78	100	Vertical
7237.500	40.62	74.00	-33.38	Peak	1	390	Vertical
7237.500	28.40	54.00	-25.60	CISPR Avg	1	390	Vertical
13768.500	43.11	74.00	-30.89	Peak	336	303	Vertical
13768.500	29.75	54.00	-24.25	CISPR Avg	336	303	Vertical
14004.500	42.69	74.00	-31.31	Peak	70	154	Vertical
14004.500	29.63	54.00	-24.37	CISPR Avg	70	154	Vertical
15063.500	29.33	54.00	-24.67	CISPR Avg	238	100	Vertical
15063.500	42.39	74.00	-31.61	Peak	238	100	Vertical
16364.500	42.08	74.00	-31.92	Peak	15	100	Vertical
16364.500	28.94	54.00	-25.06	CISPR Avg	15	100	Vertical
16752.500	29.30	54.00	-24.70	CISPR Avg	174	287	Vertical
16752.500	42.41	74.00	-31.59	Peak	174	287	Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
17681.500	44.90	74.00	-29.10	Peak	181	333	Vertical
17681.500	31.84	54.00	-22.16	CISPR Avg	181	333	Vertical
36811.000	54.66	83.50	-28.84	Peak	75	100	Vertical
36811.000	41.65	63.50	-21.85	CISPR Avg	75	100	Vertical
37008.004	41.49	63.50	-22.01	CISPR Avg	234	100	Vertical
37008.004	53.98	83.50	-29.52	Peak	234	100	Vertical
37549.499	55.04	83.50	-28.46	Peak	350	100	Vertical
37549.499	42.25	63.50	-21.25	CISPR Avg	350	100	Vertical
37848.003	55.14	83.50	-28.36	Peak	343	100	Vertical
37848.003	42.77	63.50	-20.73	CISPR Avg	343	100	Vertical
38210.498	54.85	83.50	-28.65	Peak	40	100	Vertical
38210.498	42.27	63.50	-21.23	CISPR Avg	40	100	Vertical
39851.997	54.23	83.50	-29.27	Peak	138	100	Vertical
39851.997	41.09	63.50	-22.41	CISPR Avg	138	100	Vertical

Table 17



### 2.2.10 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 12 and EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
3m Semi-Anechoic Chamber	MVG	EMC Chamber 12	5621	36	07-Aug-2026
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Test Receiver	Rohde & Schwarz	ESU40	3506	12	17-Apr-2025
Turntable & Mast Controller	Maturo Gmbh	NCD/498/2799.01	5612	-	TU
Tilt Antenna Mast	Maturo Gmbh	TAM 4.0-P	5613	-	TU
Cable (K-Type to K-Type, 1 m)	Junkosha	MWX241-01000KMSKMS/A	5511	12	06-Jun-2025
Cable (K-Type to K-Type, 1 m)	Junkosha	MWX241-01000KMSKMS/A	5512	12	23-May-2025
Cable (N-Type to N-Type, 2 m)	Junkosha	MWX221-02000AMSAMS/B	5729	6	02-Feb-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221/B	5998	12	24-Oct-2024
Cable (N-Type to N-Type, 8 m)	Junkosha	MWX221-08000NMSNMS/B	6321	12	04-Feb-2025
Pre-Amplifier (1 GHz to 18 GHz)	Schwarzbeck	BBV 9718 C	5350	12	01-Dec-2024
Pre-Amplifier (8 GHz to 18 GHz)	Phase One	PS04-0086	1533	12	26-Feb-2025
Pre-Amplifier (18 GHz to 40 GHz)	Narda	NARDA DB02-0447	237	12	04-Dec-2024
Pre-Amplifier (18 GHz to 40 GHz)	Phase One	PSO4-0087	1534	12	13-Feb-2025
Antenna (Bi-Log, 30 MHz to 1 GHz)	Teseq	CBL6111D	5615	24	15-Mar-2025
Antenna (DRG, 1 GHz to 10.5 GHz)	Schwarzbeck	BBHA9120B	5611	12	15-Oct-2024
Antenna (DRG, 7.5 GHz to 18 GHz)	Schwarzbeck	HWRD750	5348	12	15-Oct-2024
Antenna (DRG, 18 GHz to 40 GHz)	Link Microtek Ltd	AM180HA-K-TU2	230	24	23-Sep-2024
Thermo-Hygro-Barometer	PCE Instruments	OCE-THB-40	5470	12	07-May-2025

**Table 18**

TU - Traceability Unscheduled



### **3 Incident Reports**

No incidents reports were raised.



## 4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Conducted Disturbance at Mains Terminals	150 kHz to 30 MHz, LISN, $\pm 3.7$ dB
Radiated Disturbance	30 MHz to 1 GHz, Bilog Antenna, SAC, $\pm 5.2$ dB 1 GHz to 6 GHz, Horn Antenna, SAC, $\pm 5.1$ dB 6 GHz to 18 GHz, Horn Antenna, SAC, $\pm 4.9$ dB 18 GHz to 40 GHz, Horn Antenna, SAC, $\pm 6.3$ dB

**Table 19**

Worst case error for both Time and Frequency measurement 12 parts in  $10^6$ .

### Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.