

**GSM 850**

Communication System: UID 0, GPRS-FDD (TDMA, GMSK, 1 slot) (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.00018

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM850 Ch 190/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.67 dB

BWC Factor = 10.80 dB

Location: 0, 360, 13 mm

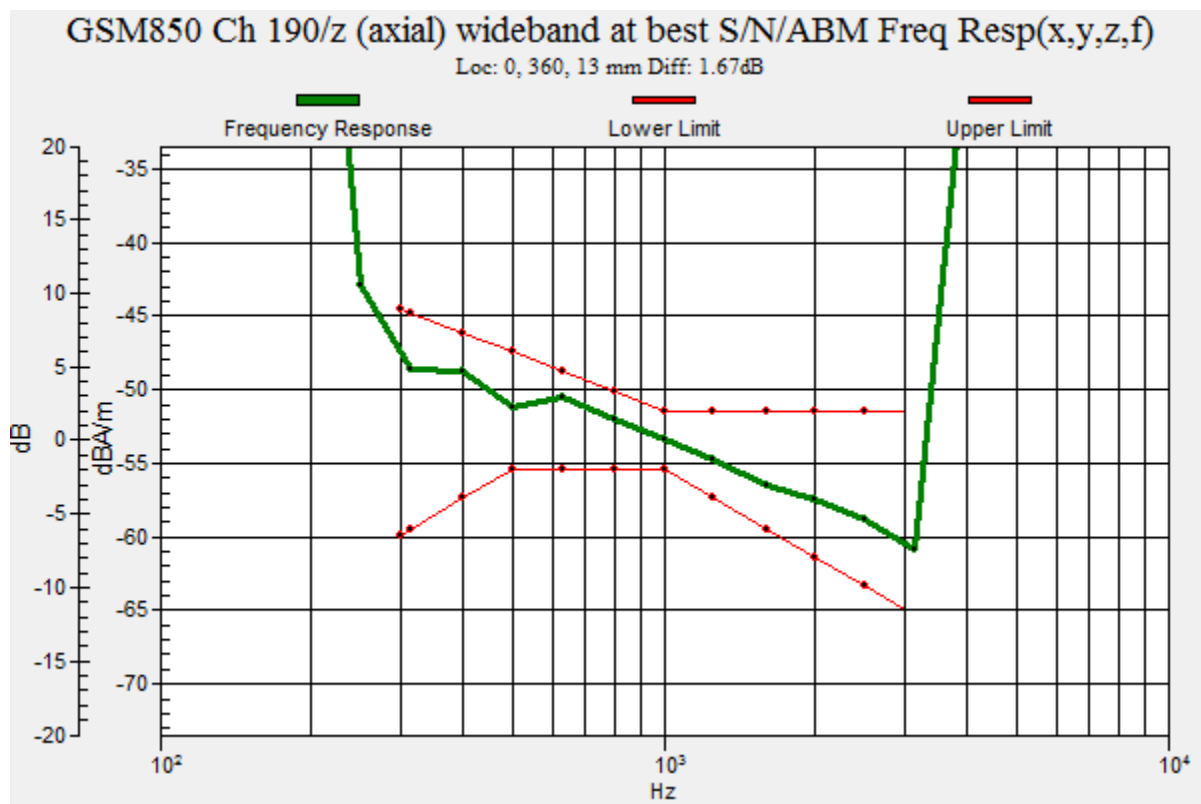

## GSM 850

Communication System: UID 0, GPRS-FDD (TDMA, GMSK, 1 slot) (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.00018

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM850 Ch 190/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 48.00 dB


ABM1 comp = 5.04 dBA/m

BWC Factor = 0.16 dB

Location: 0.4, -6.3, 3.7 mm

ABM2 = -16.52 dBA/m

Location: 25, -8.3, 3.7 mm

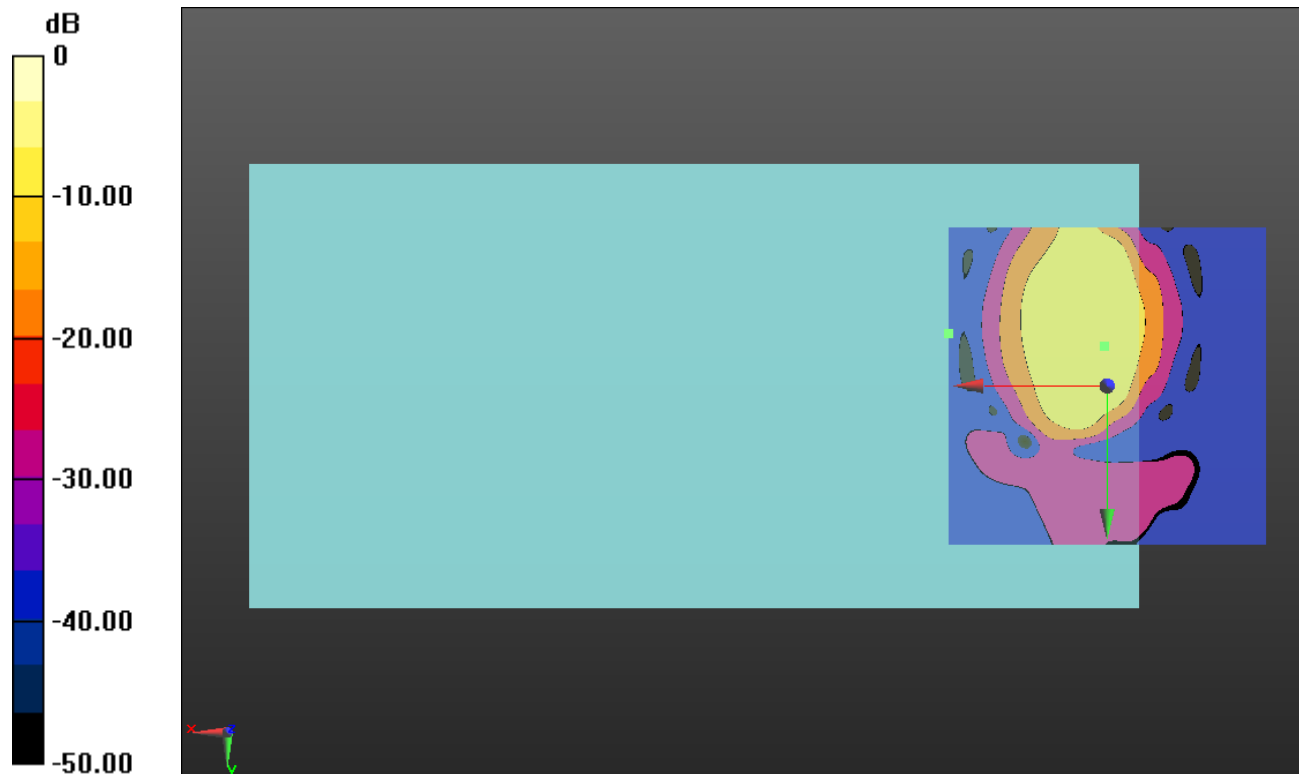

## GSM 850

Communication System: UID 0, GPRS-FDD (TDMA, GMSK, 1 slot) (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.00018

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM850 Ch 190/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 41.15 dB


ABM1 comp = 5.69 dBA/m

BWC Factor = 0.16 dB

Location: 8.8, 0.4, 3.7 mm

ABM2 = -13.26 dBA/m

Location: 25, -25, 3.7 mm

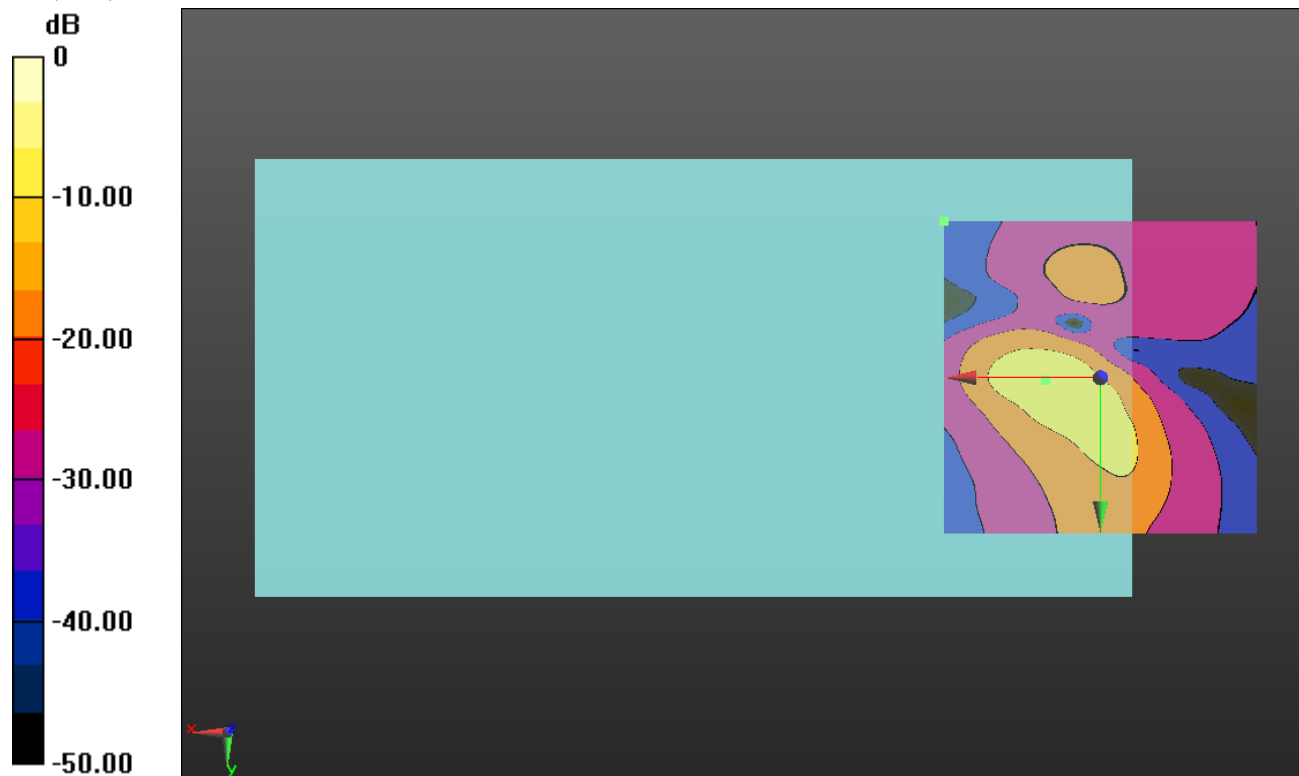

0 dB = 1.000 = 0.00 dB

**GSM1900**

Communication System: UID 0, GPRS-FDD (TDMA, GMSK, 1 slot); Frequency: 1880 MHz; Duty Cycle: 1:8.00018

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM1900 Ch 661 UAT/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.60 dB

BWC Factor = 10.80 dB

Location: 0, 360, 13 mm

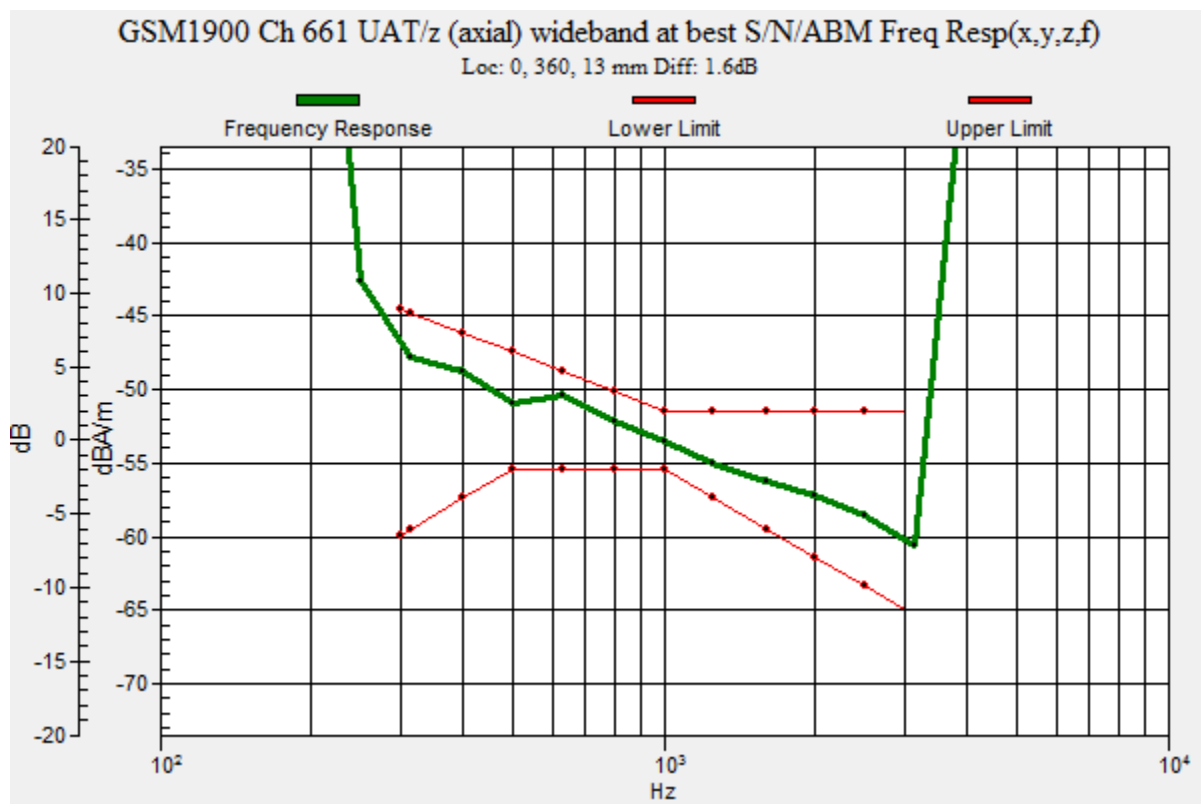

## GSM1900

Communication System: UID 0, GPRS-FDD (TDMA, GMSK, 1 slot); Frequency: 1880 MHz; Duty Cycle: 1:8.00018

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM1900 Ch 661 UAT/z (axial)

**4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 45.82 dB


ABM1 comp = 4.19 dBA/m

BWC Factor = 0.16 dB

Location: 0, -5.4, 3.7 mm

ABM2 = -11.47 dBA/m

Location: 25, -8.3, 3.7 mm

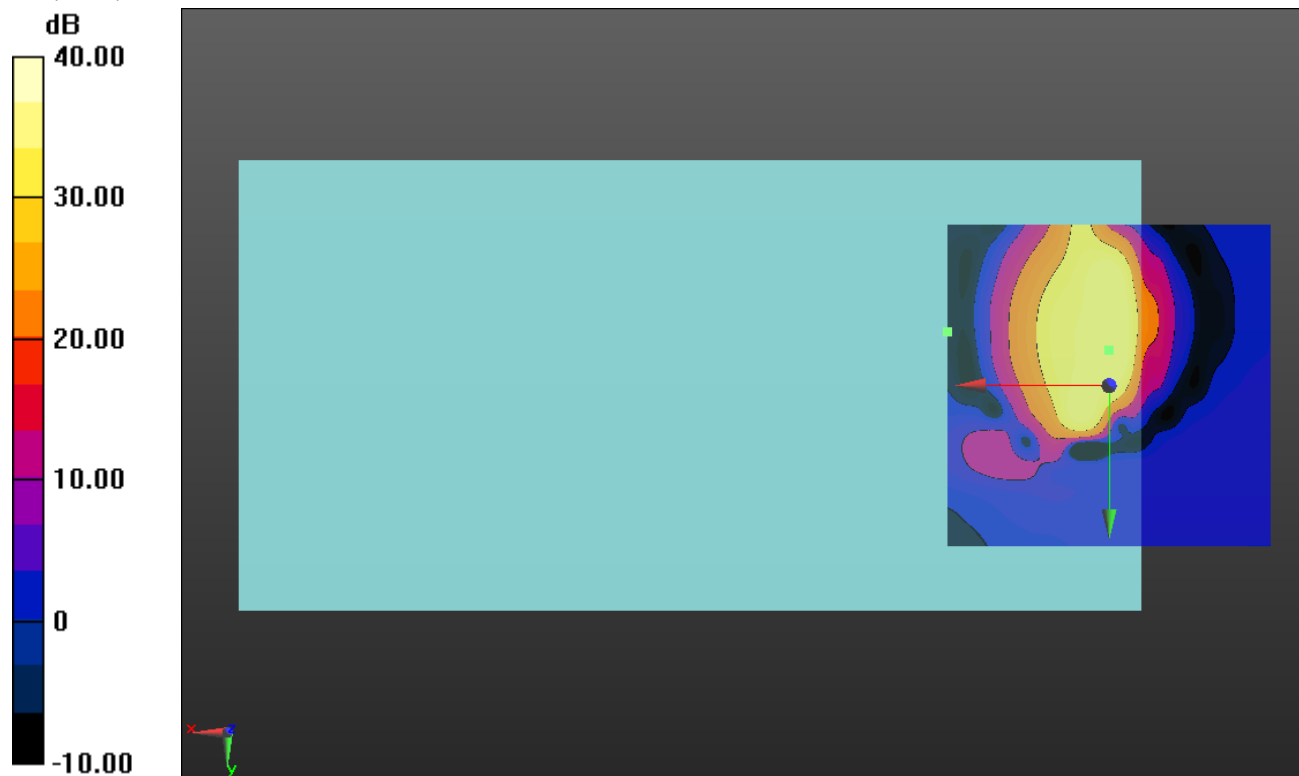

## GSM1900

Communication System: UID 0, GPRS-FDD (TDMA, GMSK, 1 slot); Frequency: 1880 MHz; Duty Cycle: 1:8.00018

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/GSM1900 Ch 661 UAT/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 42.71 dB


ABM1 comp = 5.31 dBA/m

BWC Factor = 0.16 dB

Location: 11.7, 0, 3.7 mm

ABM2 = -11.64 dBA/m

Location: 25, -25, 3.7 mm

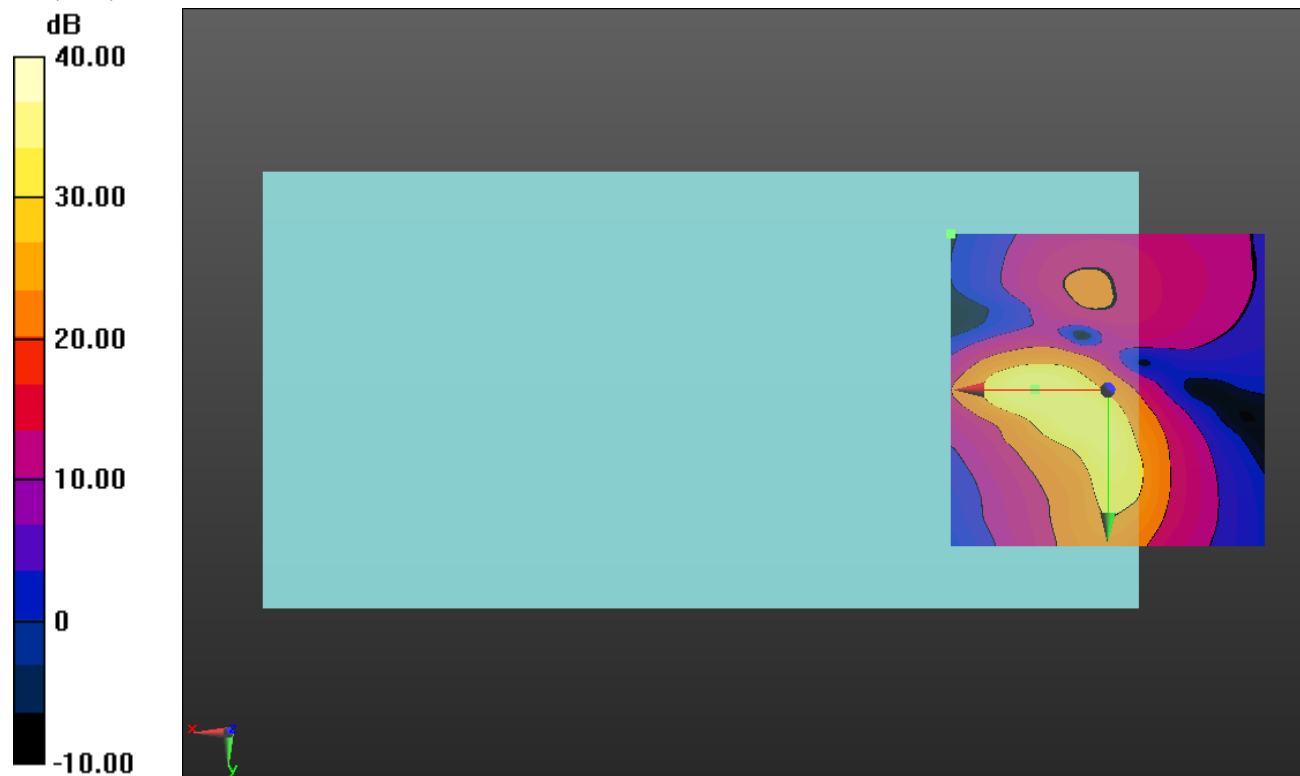

0 dB = 1.000 = 0.00 dB

## WCDMA Band II

Communication System: UID 0, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA BII Ch 9400 NB 4.75 kbps UAT/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

### Cursor:

Diff = 2.00 dB

BWC Factor = 10.80 dB

Location: 9.2, 0.2, 3.7 mm

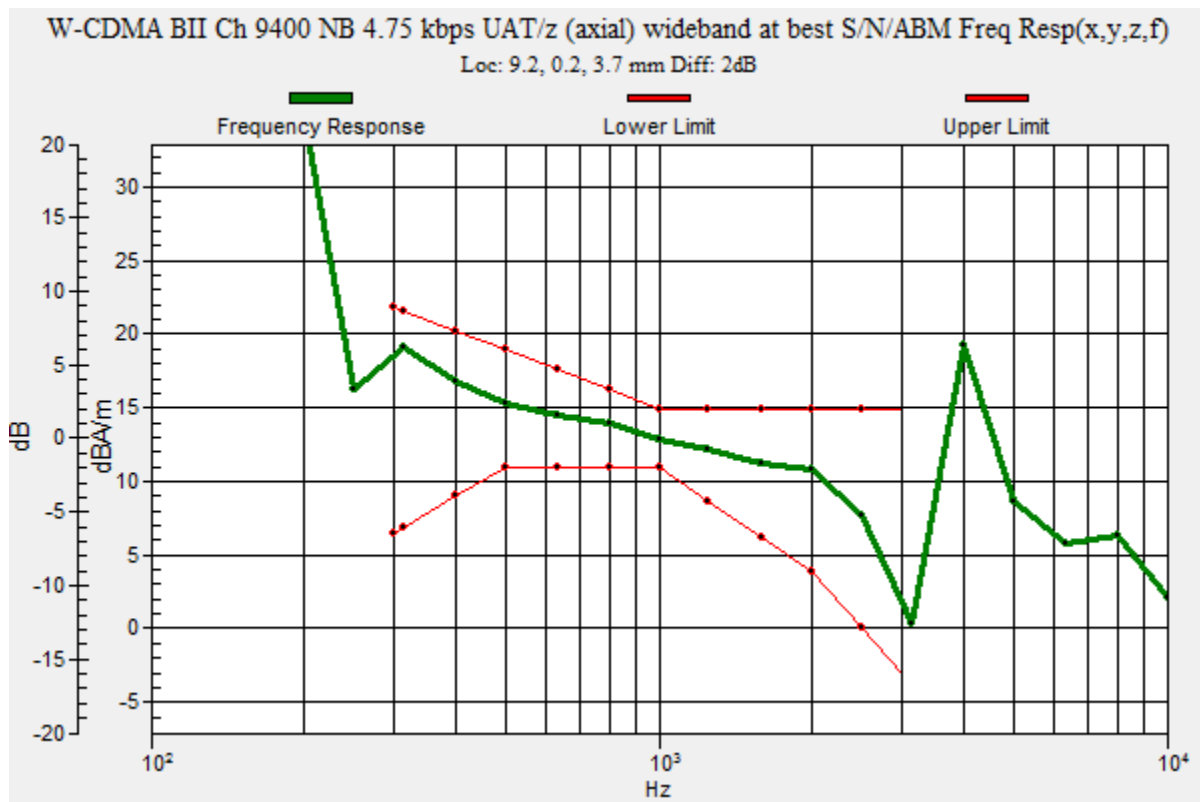

## WCDMA Band II

Communication System: UID 0, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA BII Ch 9400 NB 4.75 kbps UAT/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 60.64 dB


ABM1 comp = 16.11 dBA/m

BWC Factor = 0.16 dB

Location: 9.2, 0, 3.7 mm

ABM2 = -31.32 dBA/m

Location: 25, 8.3, 3.7 mm

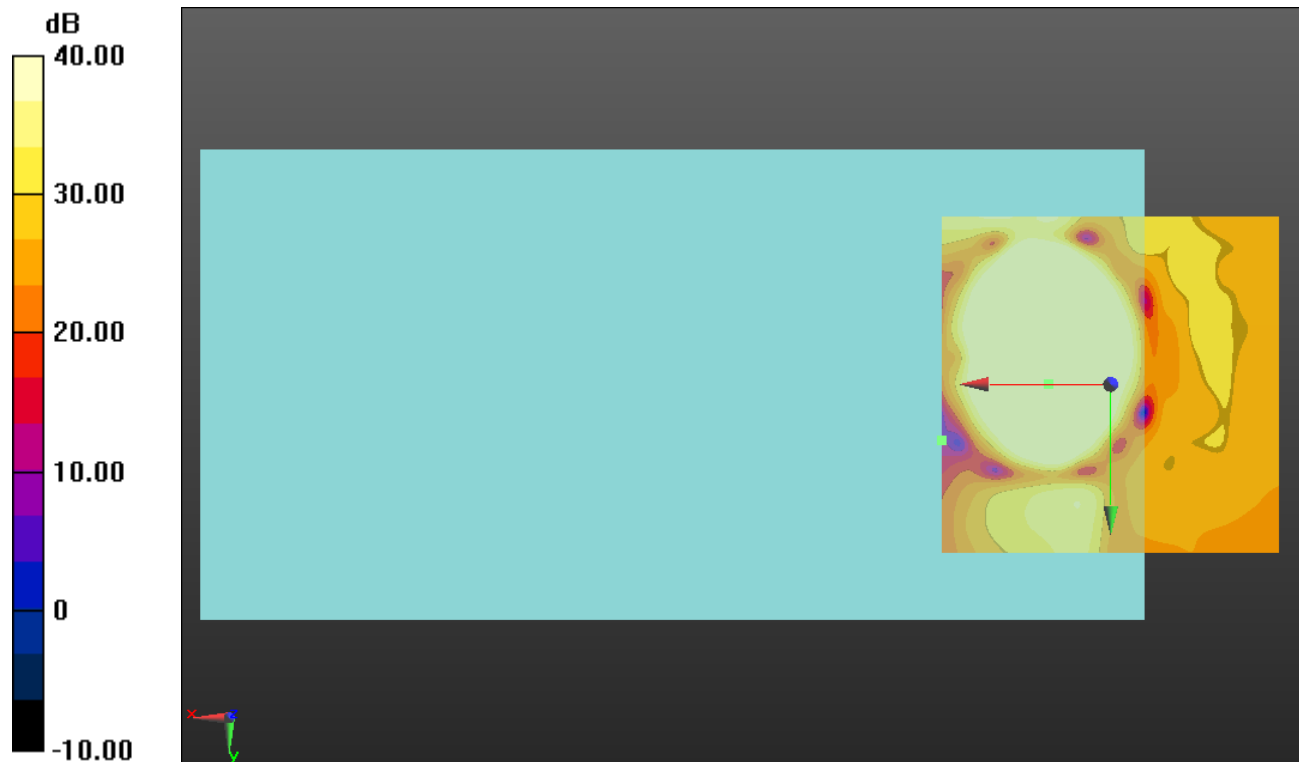

0 dB = 1.000 = 0.00 dB

## WCDMA Band II

Communication System: UID 0, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA BII Ch 9400 NB 4.75 kbps UAT/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated

grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 49.58 dB


ABM1 comp = 6.74 dBA/m

BWC Factor = 0.16 dB

Location: 7.1, -12.5, 3.7 mm

ABM2 = -28.07 dBA/m

Location: 25, 20.8, 3.7 mm

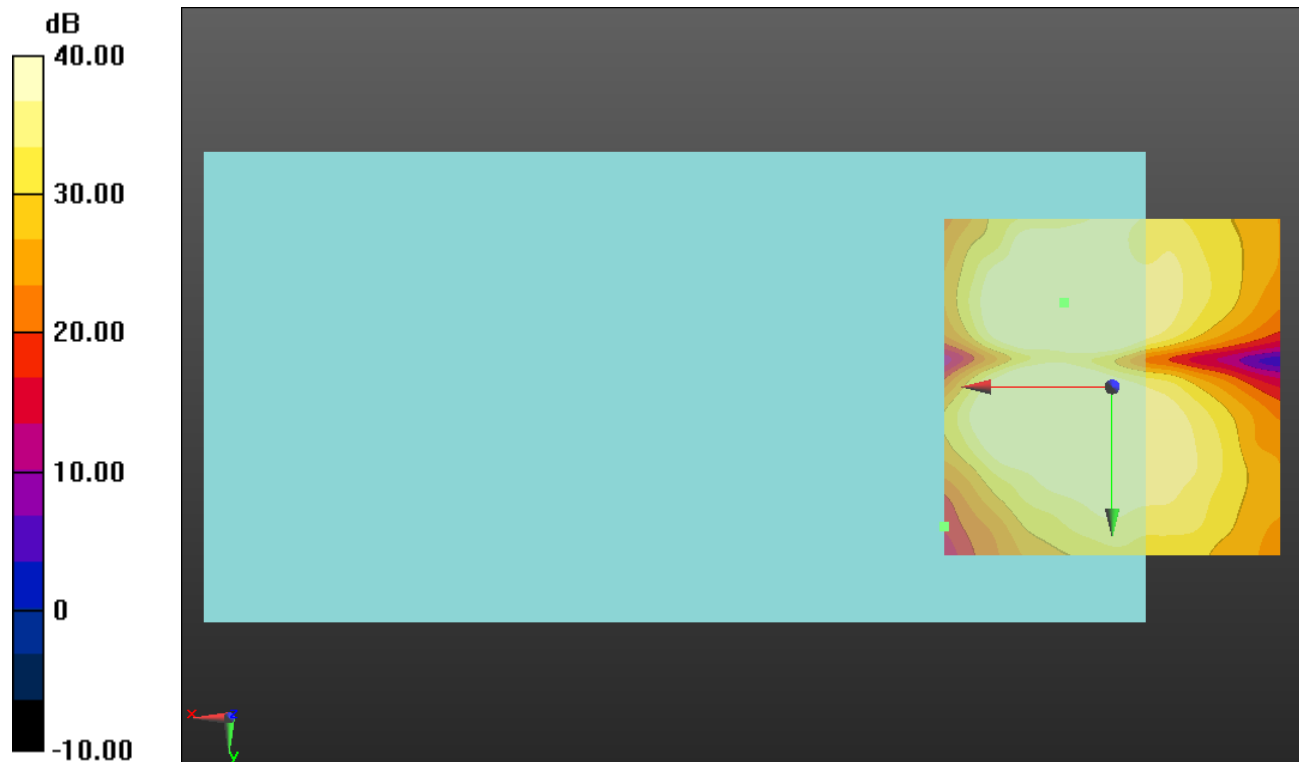

0 dB = 1.000 = 0.00 dB

## WCDMA Band IV

Communication System: UID 0, @UMTS-FDD (WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA BIV Ch 1413 NB 4.75 kbps UAT/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.31 dB

BWC Factor = 10.80 dB

Location: 8.2, -12.4, 3.7 mm

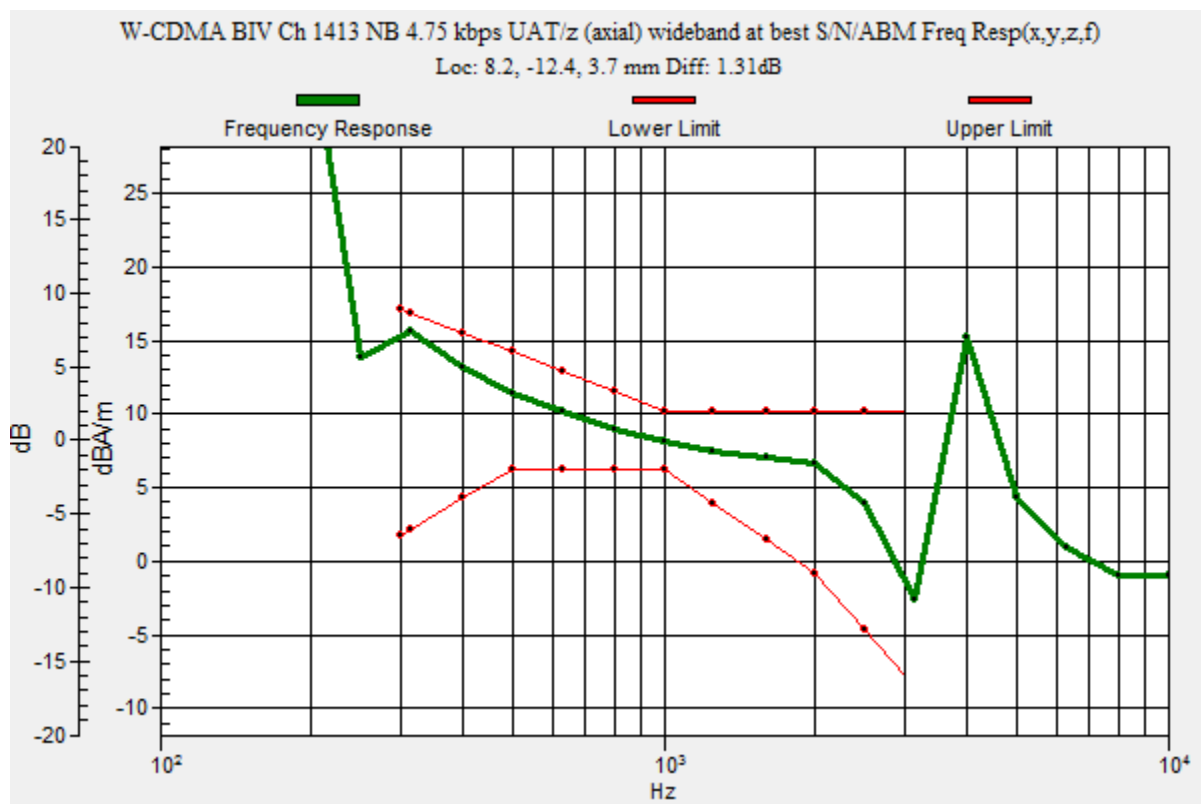

## WCDMA Band IV

Communication System: UID 0, @UMTS-FDD (WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA BIV Ch 1413 NB 4.75 kbps UAT/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 58.66 dB


ABM1 comp = 10.89 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, -12.5, 3.7 mm

ABM2 = -26.56 dBA/m

Location: 25, 4.2, 3.7 mm

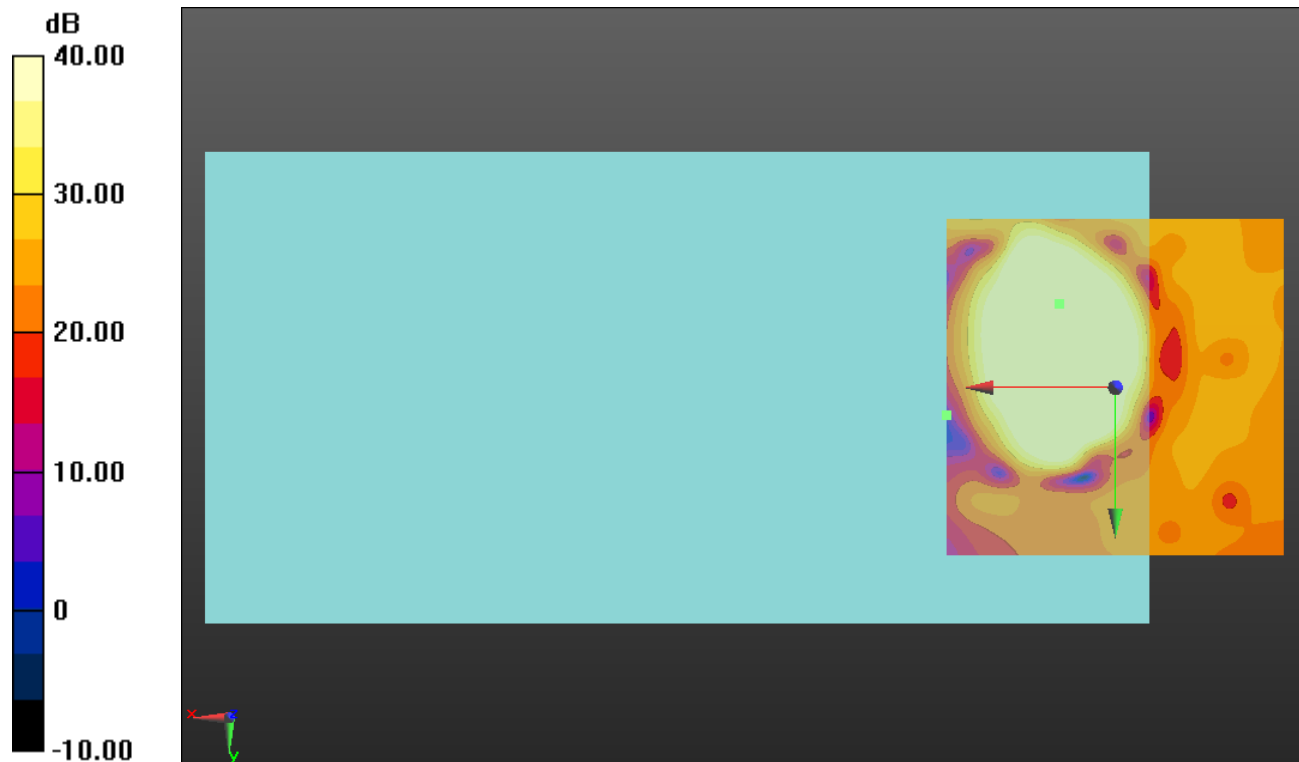

## WCDMA Band IV

Communication System: UID 0, @UMTS-FDD (WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA BIV Ch 1413 NB 4.75 kbps UAT/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 48.91 dB


ABM1 comp = 6.51 dBA/m

BWC Factor = 0.16 dB

Location: 11.3, 2.1, 3.7 mm

ABM2 = -26.10 dBA/m

Location: 25, 20.8, 3.7 mm

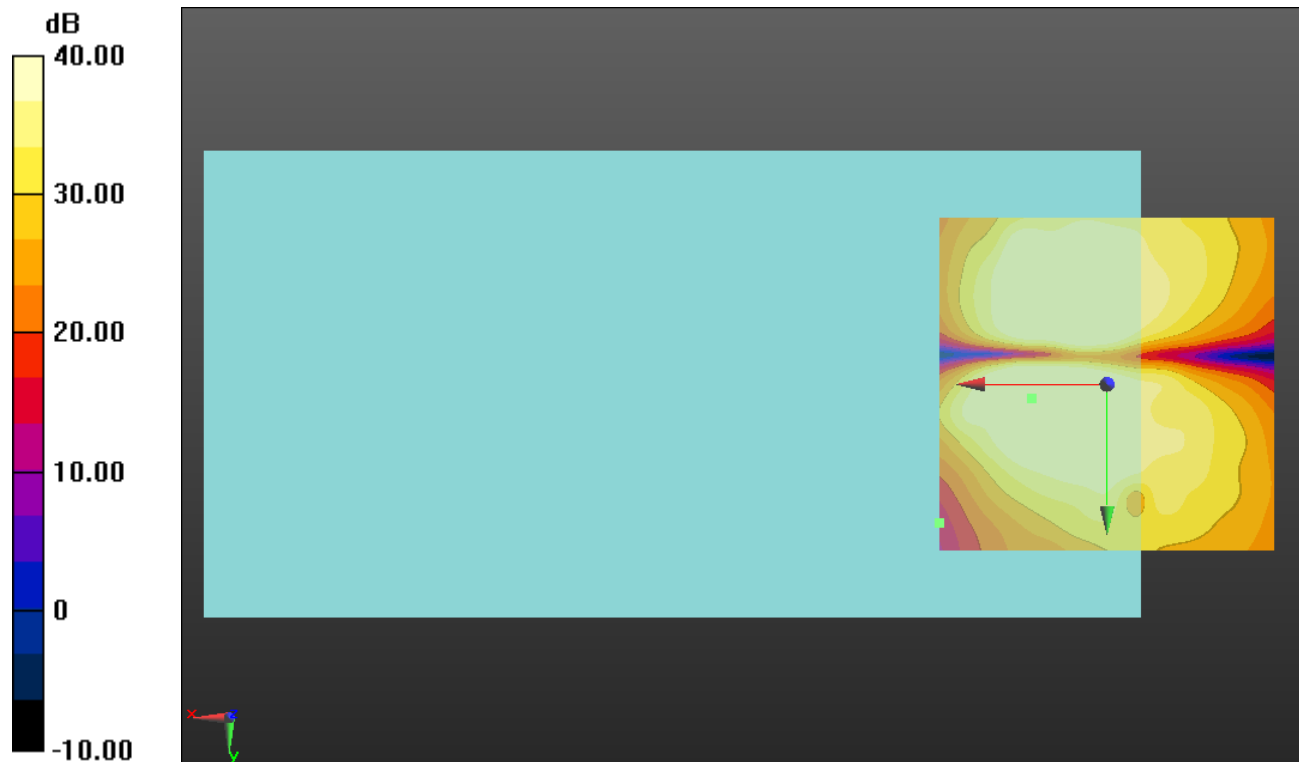

0 dB = 1.000 = 0.00 dB

**WCDMA Band V**

Communication System: UID 0, @UMTS-FDD (WCDMA) (0); Frequency: 836.6 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA BV Ch 4183 WB 15.85 kbps UAT/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.67 dB

BWC Factor = 10.80 dB

Location: 5.1, -11.2, 3.7 mm

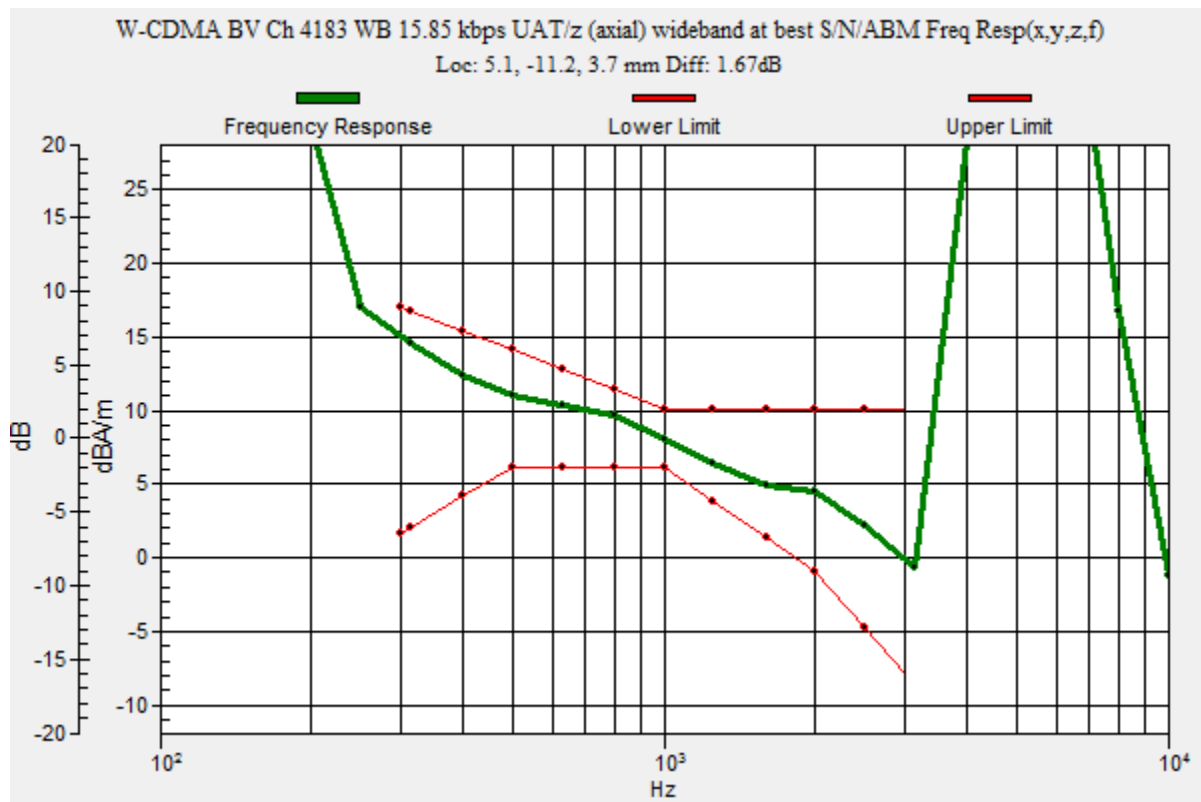

## WCDMA Band V

Communication System: UID 0, @UMTS-FDD (WCDMA) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA BV Ch 4183 WB 15.85 kbps UAT/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 57.48 dB


ABM1 comp = 10.56 dBA/m

BWC Factor = 0.16 dB

Location: 5, -11.3, 3.7 mm

ABM2 = -27.41 dBA/m

Location: 25, 0, 3.7 mm

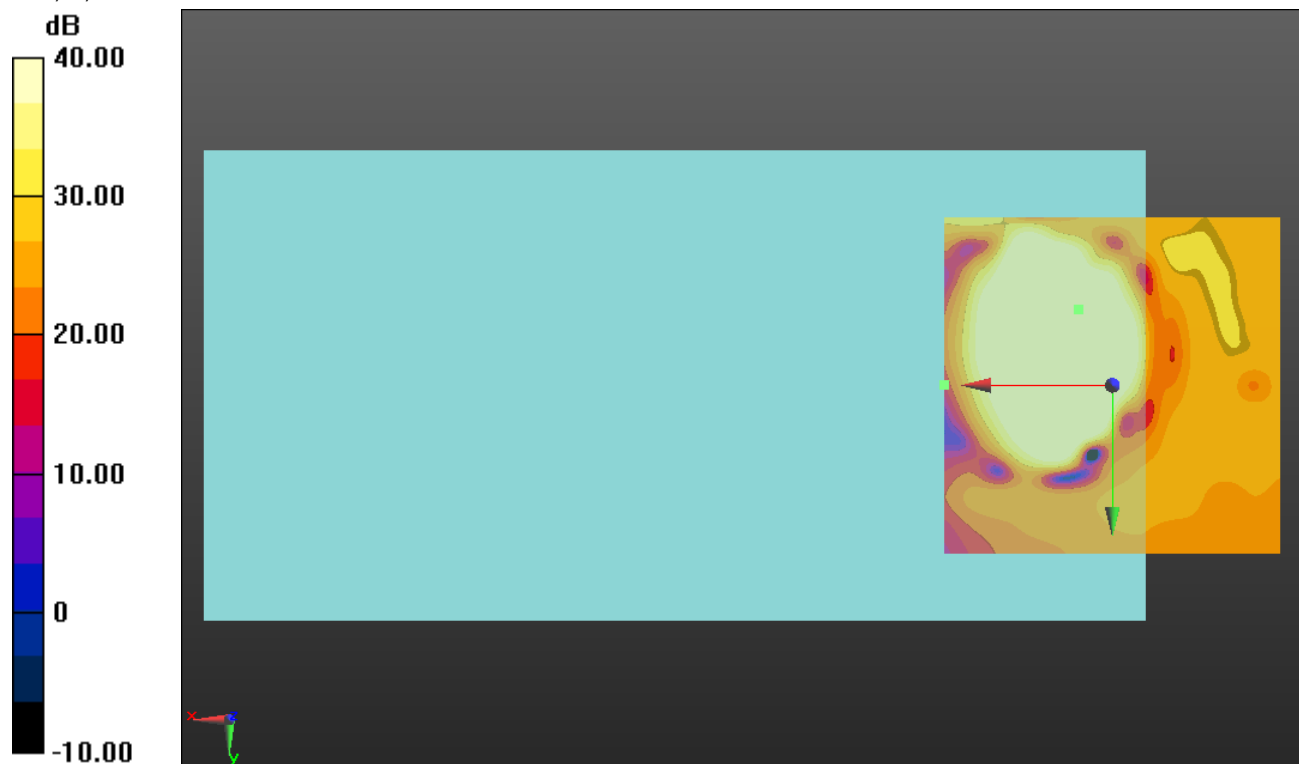

0 dB = 1.000 = 0.00 dB

## WCDMA Band V

Communication System: UID 0, @UMTS-FDD (WCDMA) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/W-CDMA BV Ch 4183 WB 15.85 kbps UAT/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 50.67 dB


ABM1 comp = 7.51 dBA/m

BWC Factor = 0.16 dB

Location: 10, 1.2, 3.7 mm

ABM2 = -26.78 dBA/m

Location: 25, 16.7, 3.7 mm

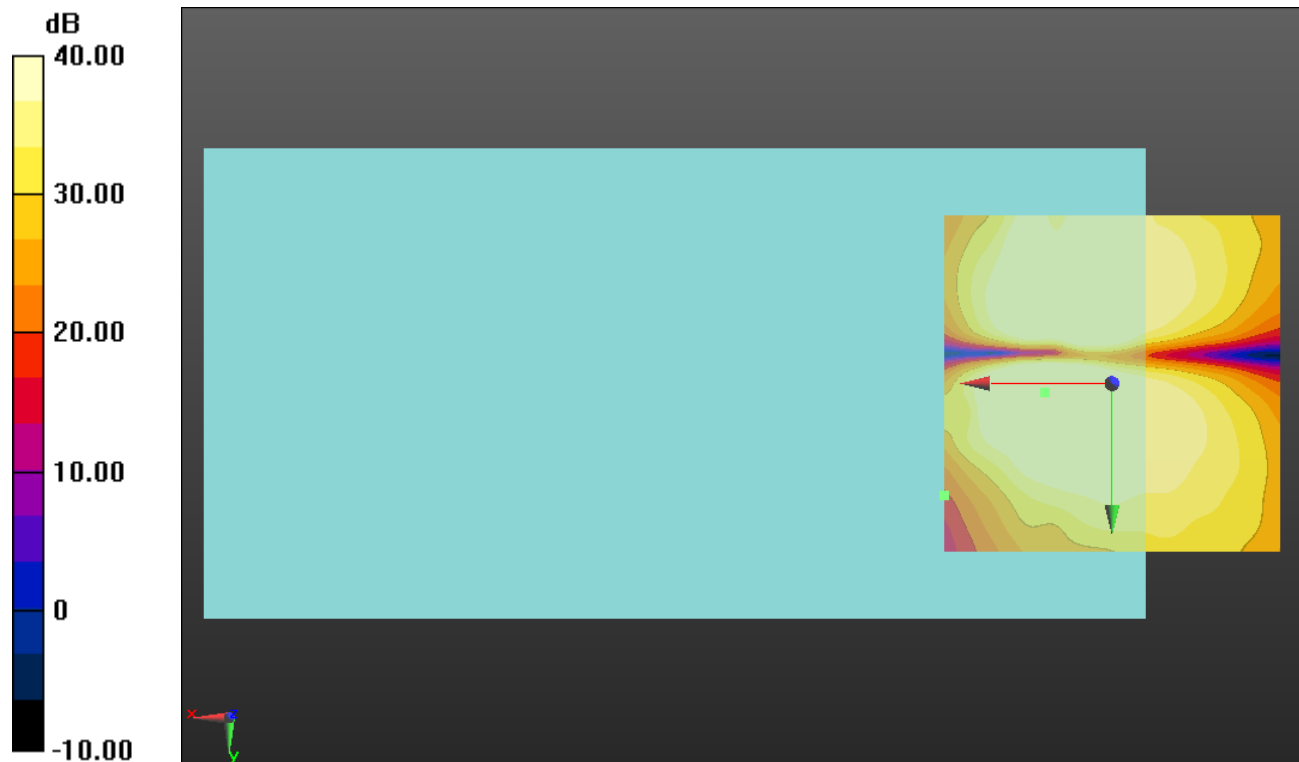

**CDMA BC0**

Communication System: UID 0, CDMA2000; Frequency: 836.52 MHz; Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/CDMA BC0 Ch 384 UAT/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.48 dB

BWC Factor = 10.80 dB

Location: 0, 360, 13 mm

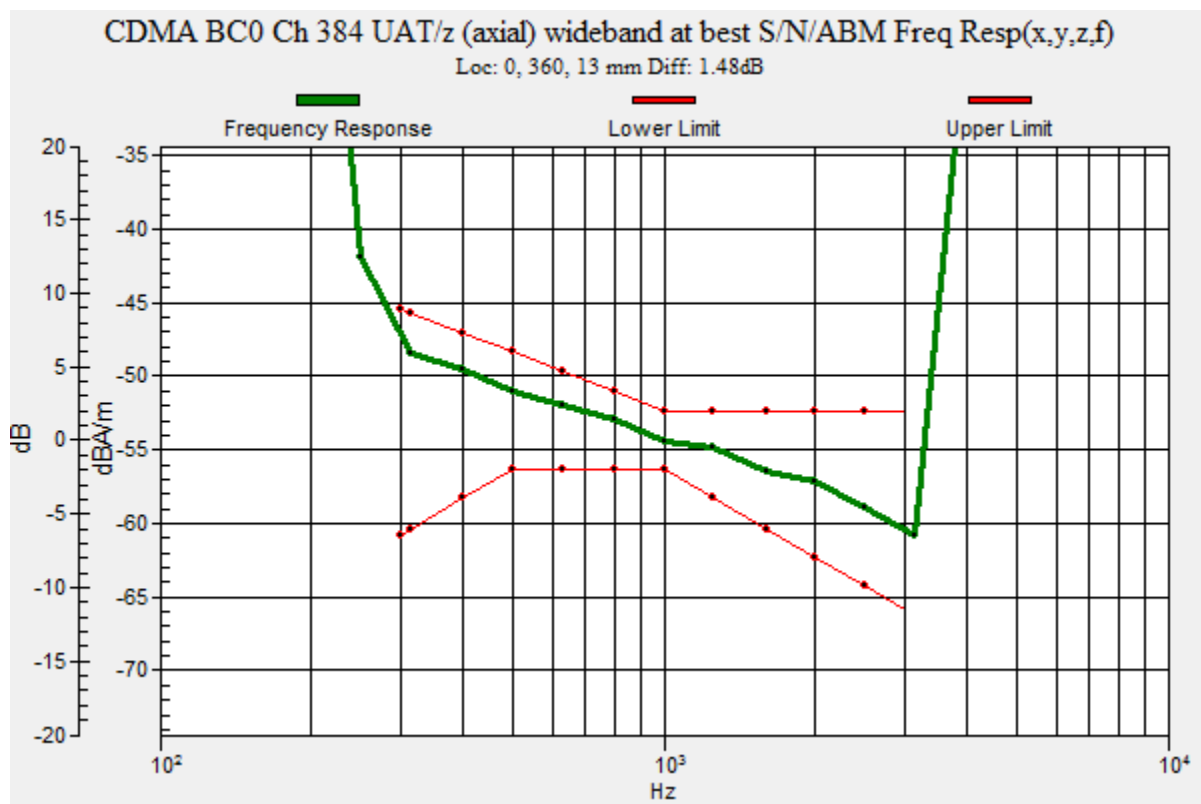

## CDMA BC0

Communication System: UID 0, CDMA2000; Frequency: 836.52 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/CDMA BC0 Ch 384 UAT/z (axial)

**4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 55.37 dB


ABM1 comp = 7.58 dBA/m

BWC Factor = 0.16 dB

Location: 0.4, -6.7, 3.7 mm

ABM2 = -21.39 dBA/m

Location: 25, -4.2, 3.7 mm

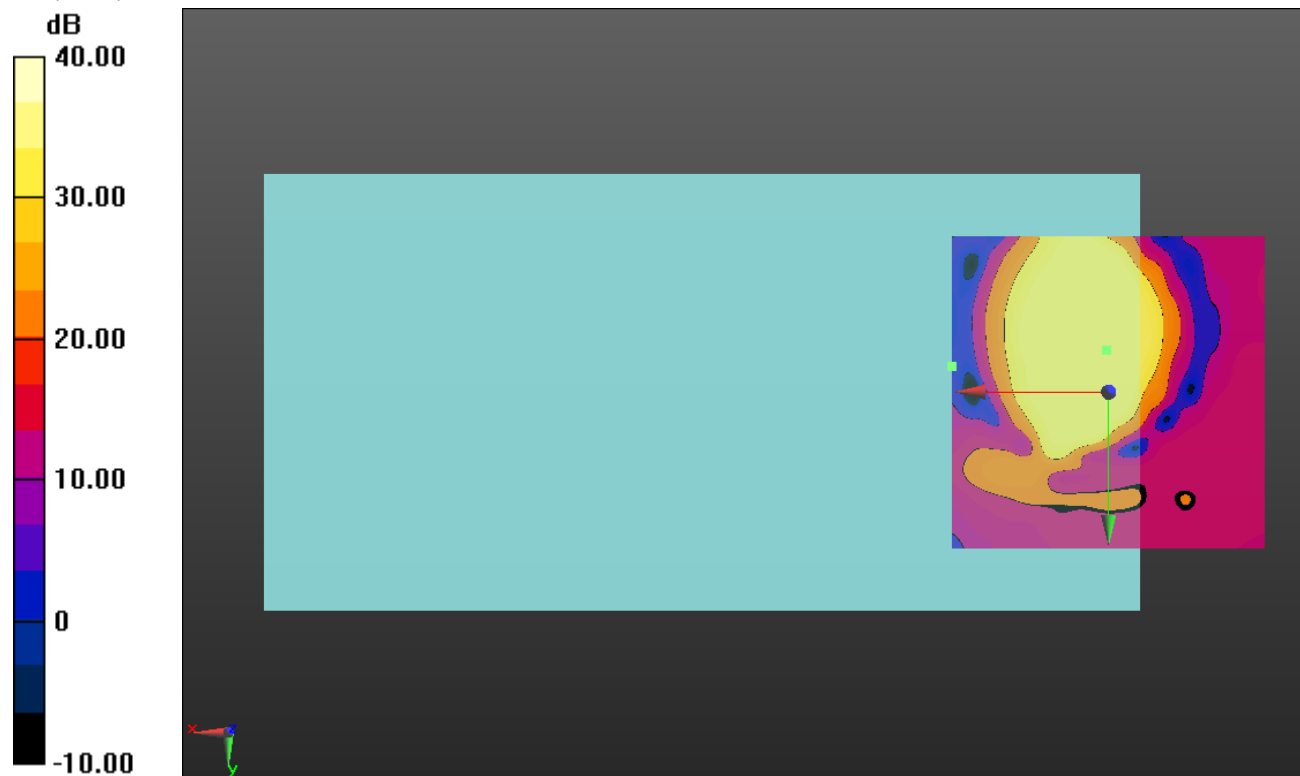

## CDMA BC0

Communication System: UID 0, CDMA2000; Frequency: 836.52 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/CDMA BC0 Ch 384 UAT/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 50.26 dB


ABM1 comp = 6.64 dBA/m

BWC Factor = 0.16 dB

Location: 6.7, 3.7, 3.7 mm

ABM2 = -23.35 dBA/m

Location: 25, -25, 3.7 mm

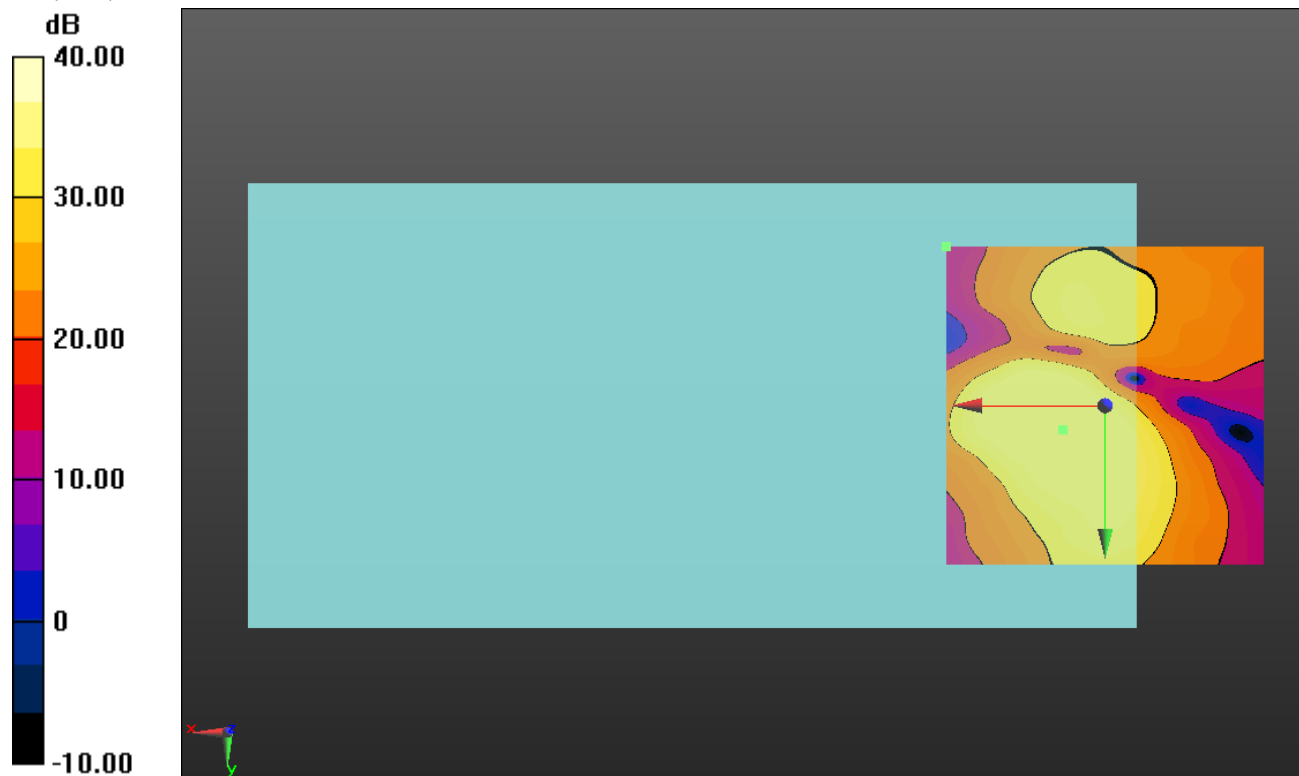

0 dB = 1.000 = 0.00 dB

## CDMA BC1

Communication System: UID 0, CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/CDMA BC1 Ch 600/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.19 dB

BWC Factor = 10.80 dB

Location: 0, 360, 13 mm

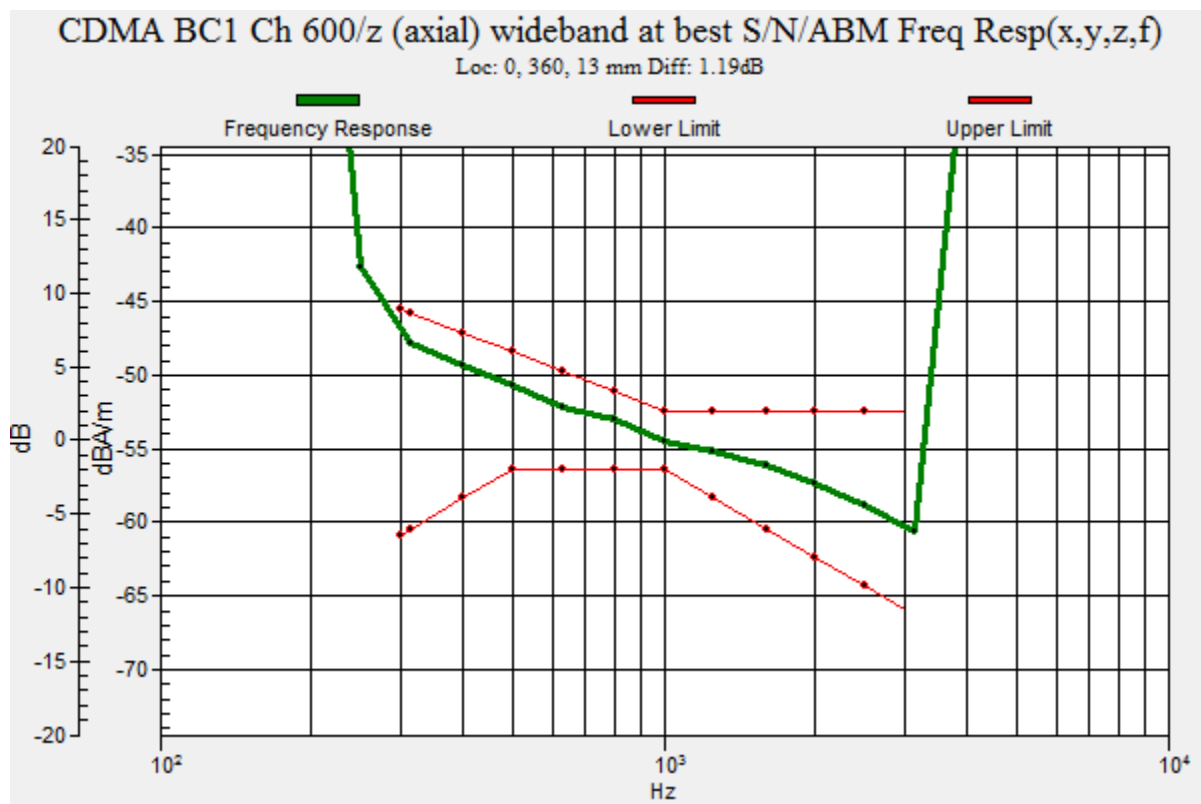

## CDMA BC1

Communication System: UID 0, CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/CDMA BC1 Ch 600/z (axial) 4.2mm

**50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 56.01 dB


ABM1 comp = 7.24 dBA/m

BWC Factor = 0.16 dB

Location: 0.4, -4.6, 3.7 mm

ABM2 = -23.55 dBA/m

Location: 25, -4.2, 3.7 mm

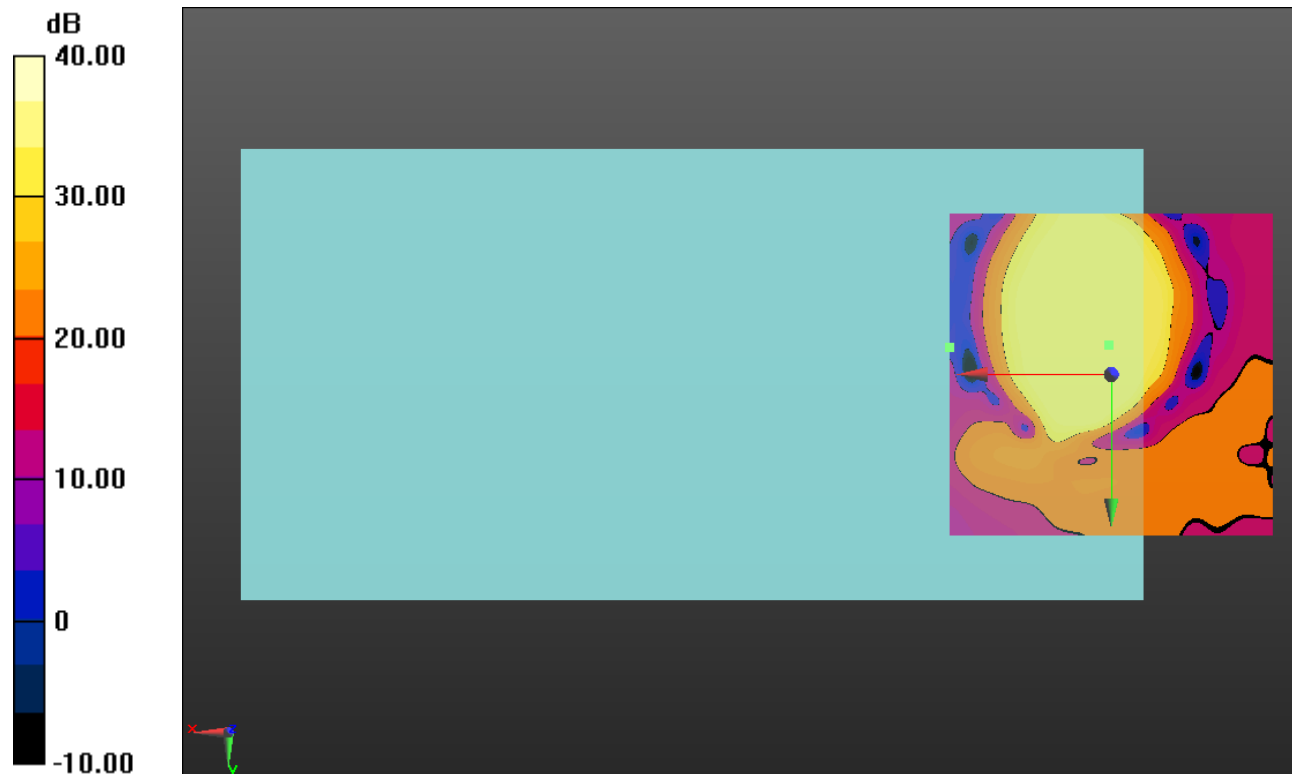

## CDMA BC1

Communication System: UID 0, CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/CDMA BC1 Ch 600/y (transversal)

**4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 51.47 dB


ABM1 comp = 6.56 dBA/m

BWC Factor = 0.16 dB

Location: 5.4, 3.7, 3.7 mm

ABM2 = -25.86 dBA/m

Location: 25, -25, 3.7 mm

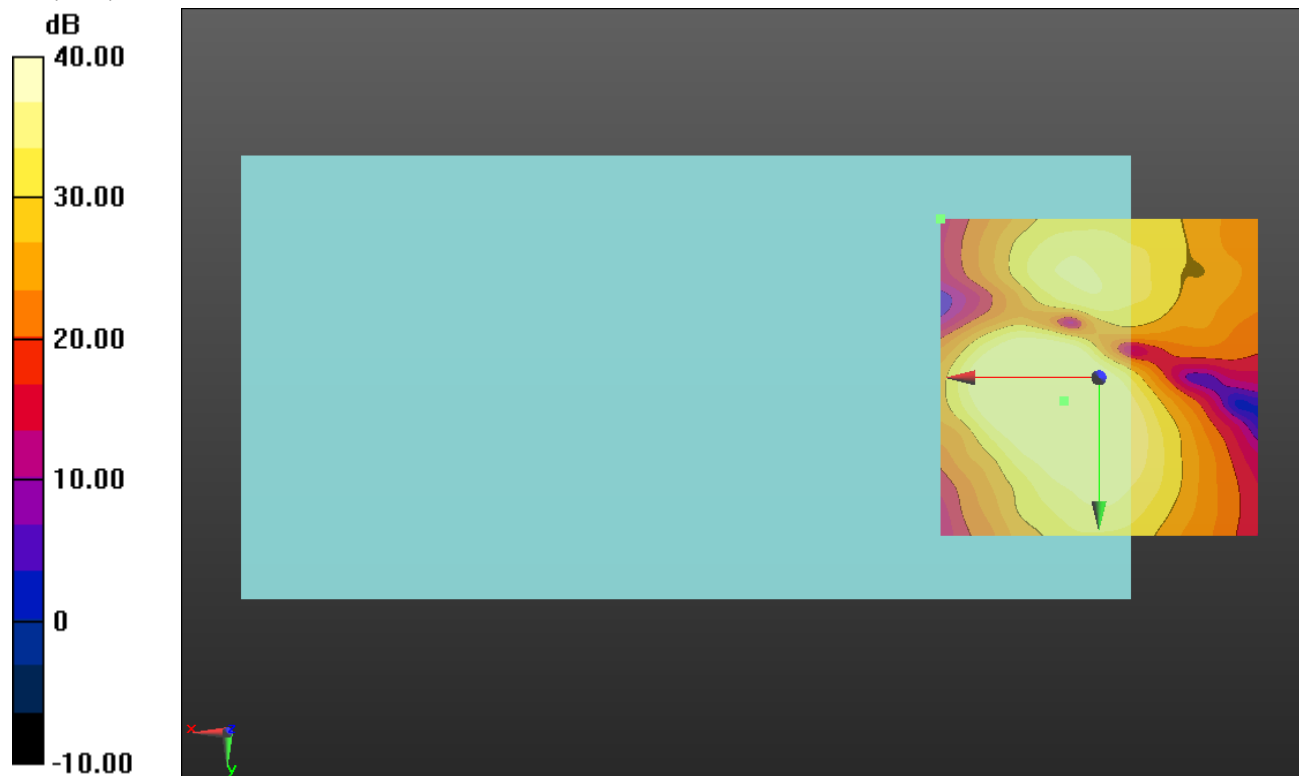

**CDMA BC10**

Communication System: UID 0, CDMA2000; Frequency: 820.5 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/CDMA BC10 Ch 580/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.47 dB

BWC Factor = 10.80 dB

Location: 0, 360, 13 mm

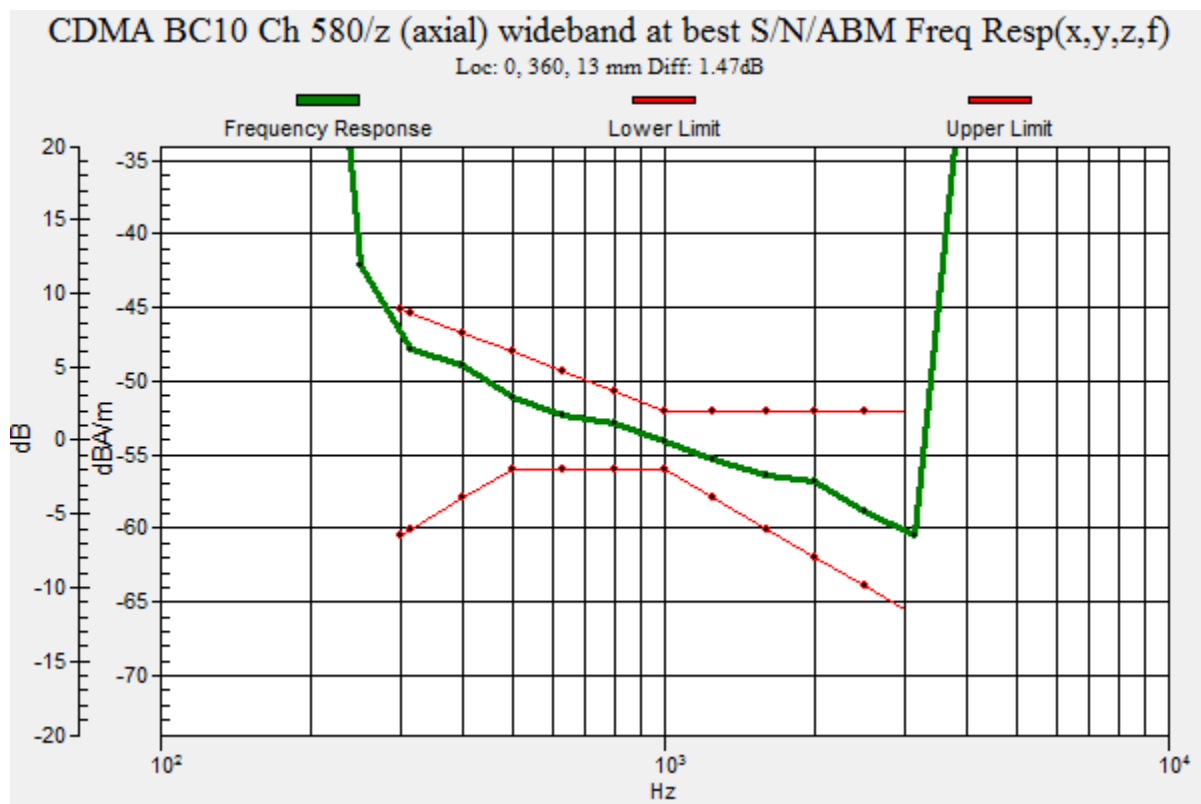

## CDMA BC10

Communication System: UID 0, CDMA2000; Frequency: 820.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/CDMA BC10 Ch 580/z (axial)

**4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 56.20 dB


ABM1 comp = 7.20 dBA/m

BWC Factor = 0.16 dB

Location: 0.4, -5, 3.7 mm

ABM2 = -23.40 dBA/m

Location: 25, -4.2, 3.7 mm

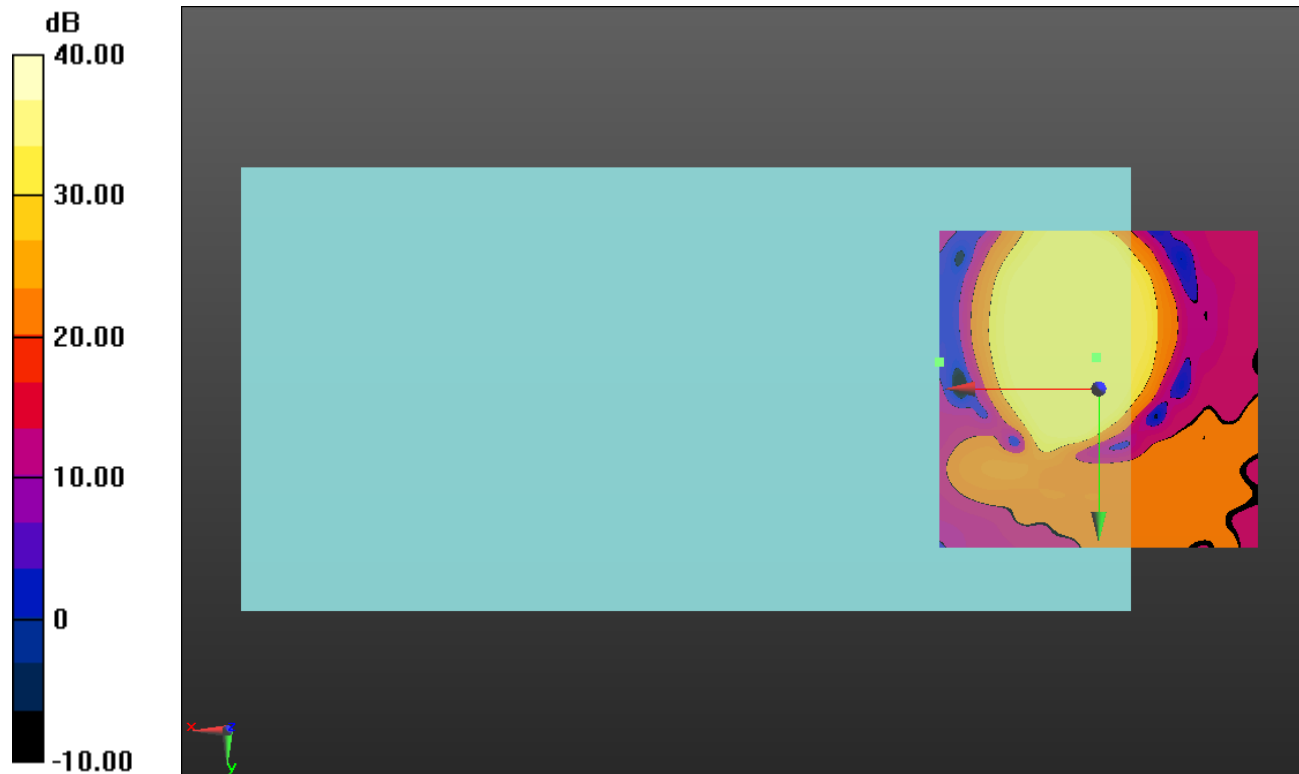

## CDMA BC10

Communication System: UID 0, CDMA2000; Frequency: 820.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/CDMA BC10 Ch 580/y (transversal)

**4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 50.82 dB


ABM1 comp = 7.15 dBA/m

BWC Factor = 0.16 dB

Location: 7.5, 3.3, 3.7 mm

ABM2 = -25.61 dBA/m

Location: 25, -25, 3.7 mm

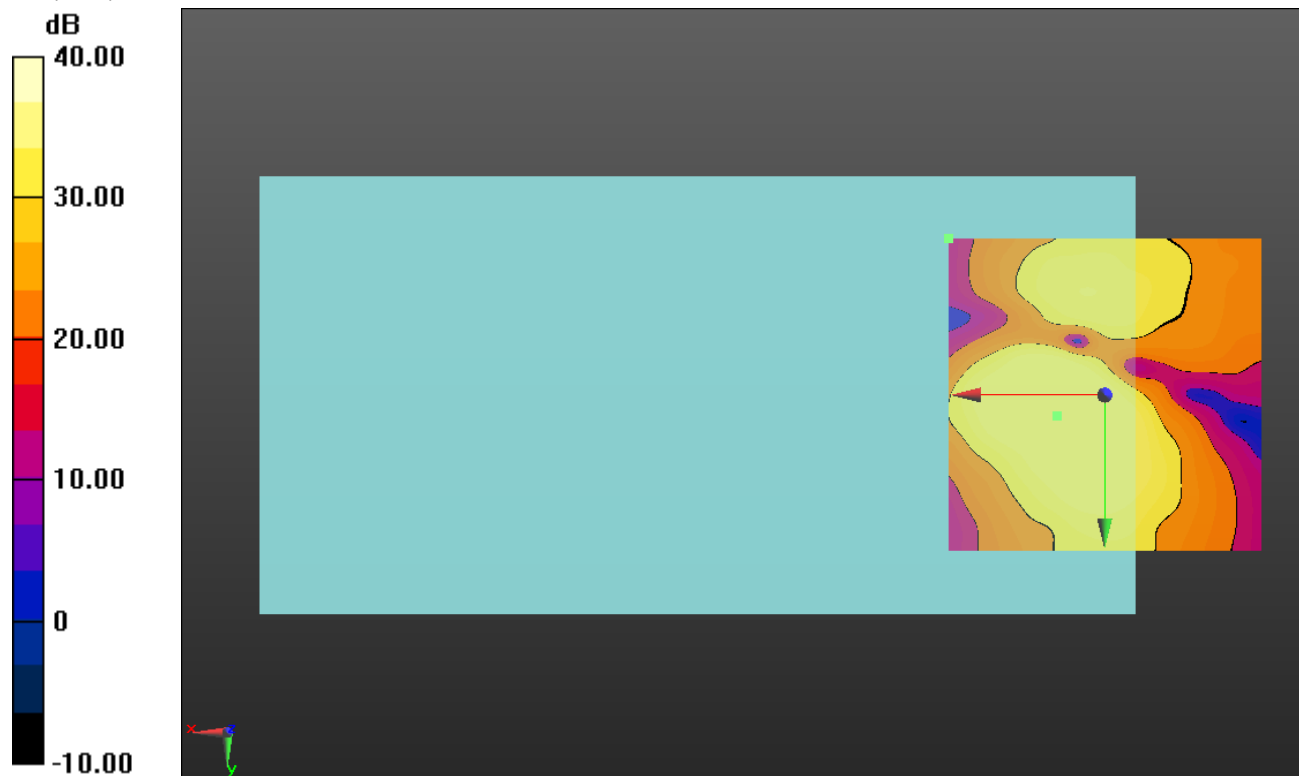

0 dB = 1.000 = 0.00 dB

## LTE Band 4

Communication System: UID 0, LTE (FDD) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 4 ch 20175\_WB 6.6 kbit/s UAT/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.49 dB

BWC Factor = 10.80 dB

Location: 0, 360, 13 mm

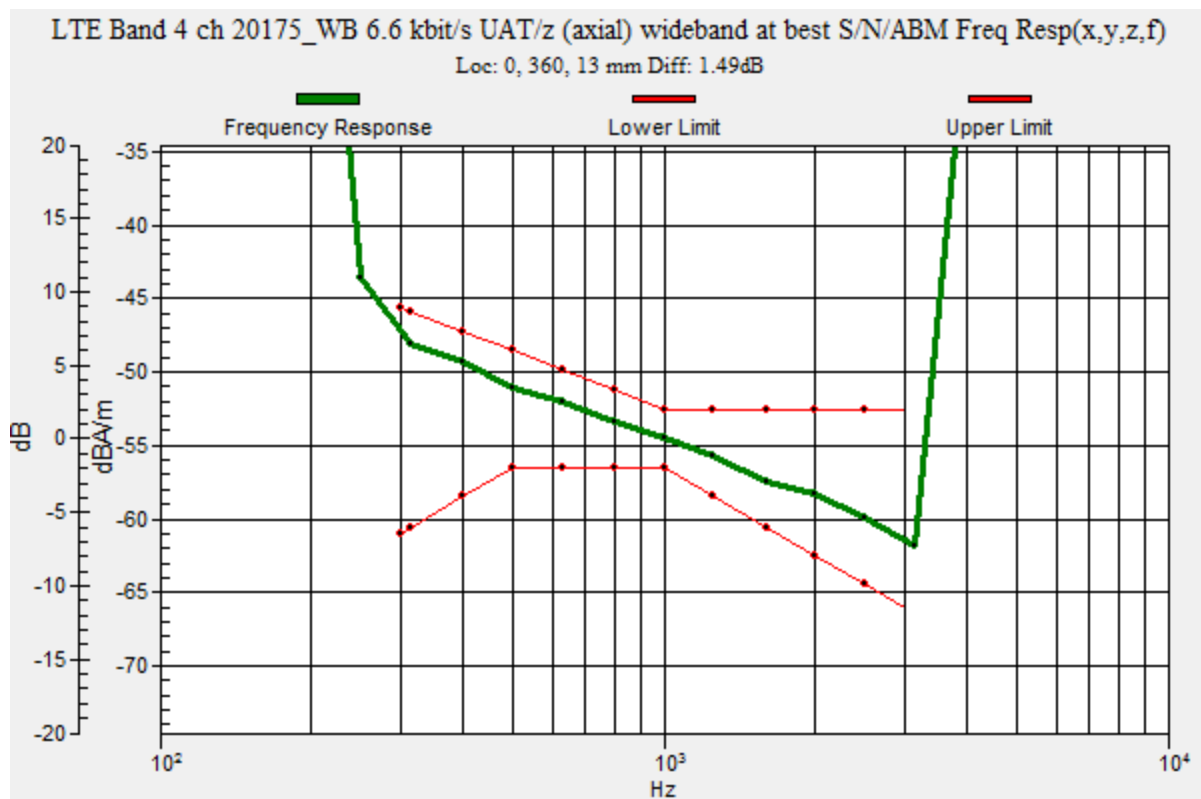

## LTE Band 4

Communication System: UID 0, LTE (FDD) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 4 ch 20175\_WB 6.6 kbit/s UAT/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 57.94 dB


ABM1 comp = 12.24 dBA/m

BWC Factor = 0.16 dB

Location: 7.5, -12.5, 3.7 mm

ABM2 = -22.07 dBA/m

Location: 25, 4.2, 3.7 mm

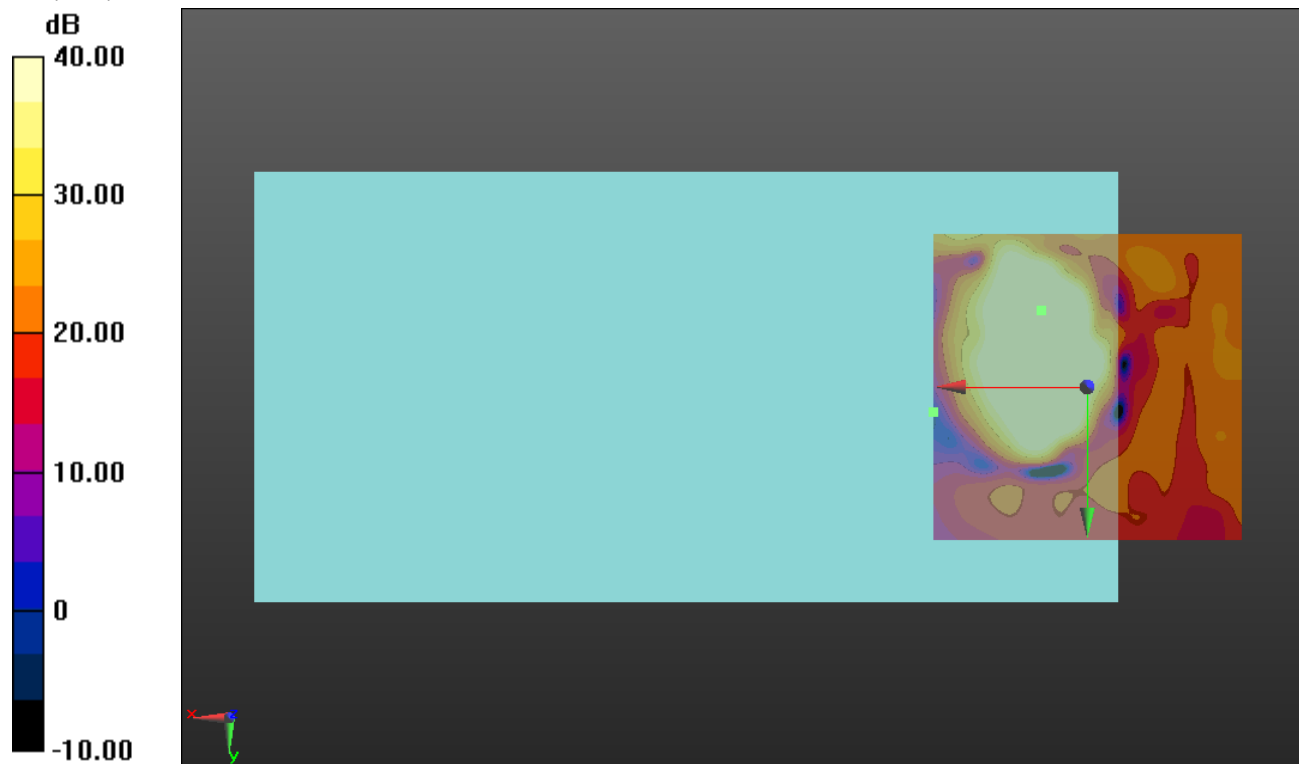

0 dB = 1.000 = 0.00 dB

## LTE Band 4

Communication System: UID 0, LTE (FDD) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 4 ch 20175\_WB 6.6 kbit/s UAT/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 49.00 dB


ABM1 comp = 7.36 dBA/m

BWC Factor = 0.16 dB

Location: 7.9, 1.7, 3.7 mm

ABM2 = -19.09 dBA/m

Location: 25, 25, 3.7 mm

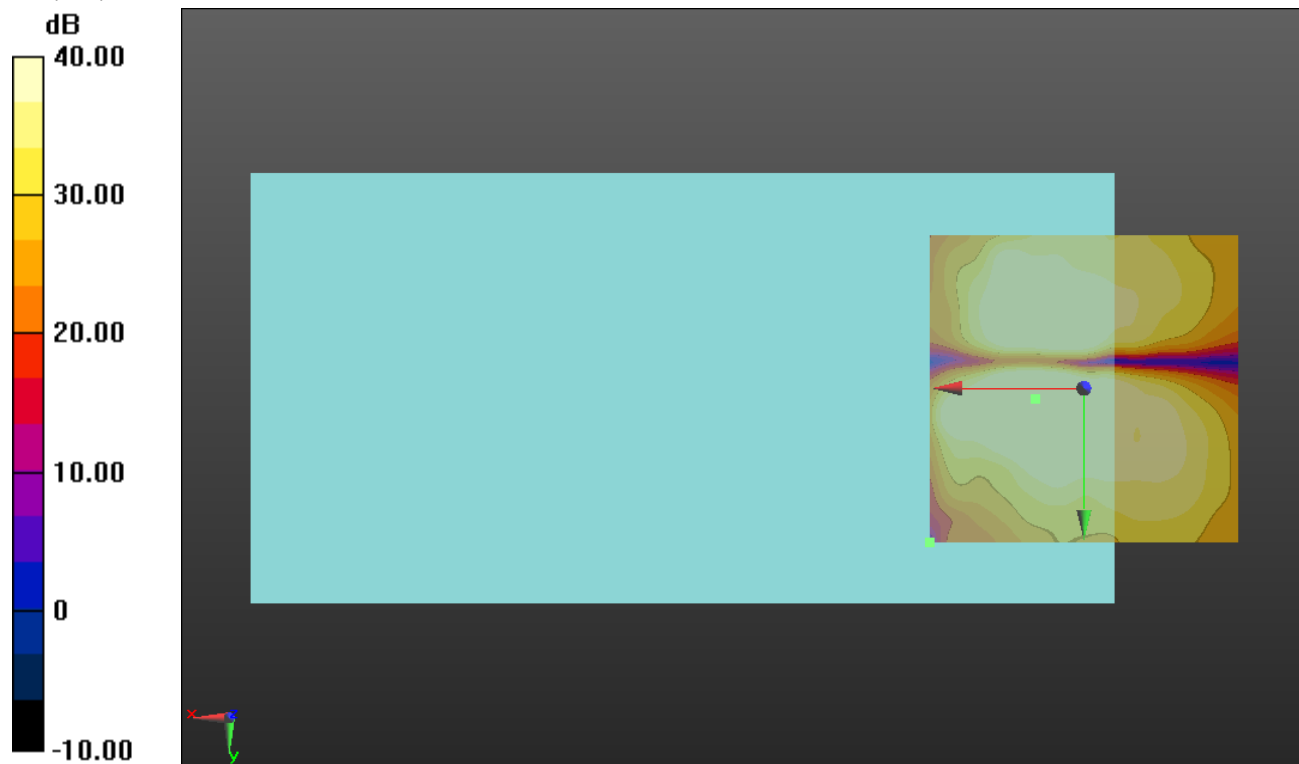

## LTE Band 7

Communication System: UID 0, LTE (FDD) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 7 ch 21350\_EVS 2.8/5.9 kbit/s UAT/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

#### Cursor:

Diff = 1.39 dB

BWC Factor = 10.80 dB

Location: 7.7, -12.2, 3.7 mm

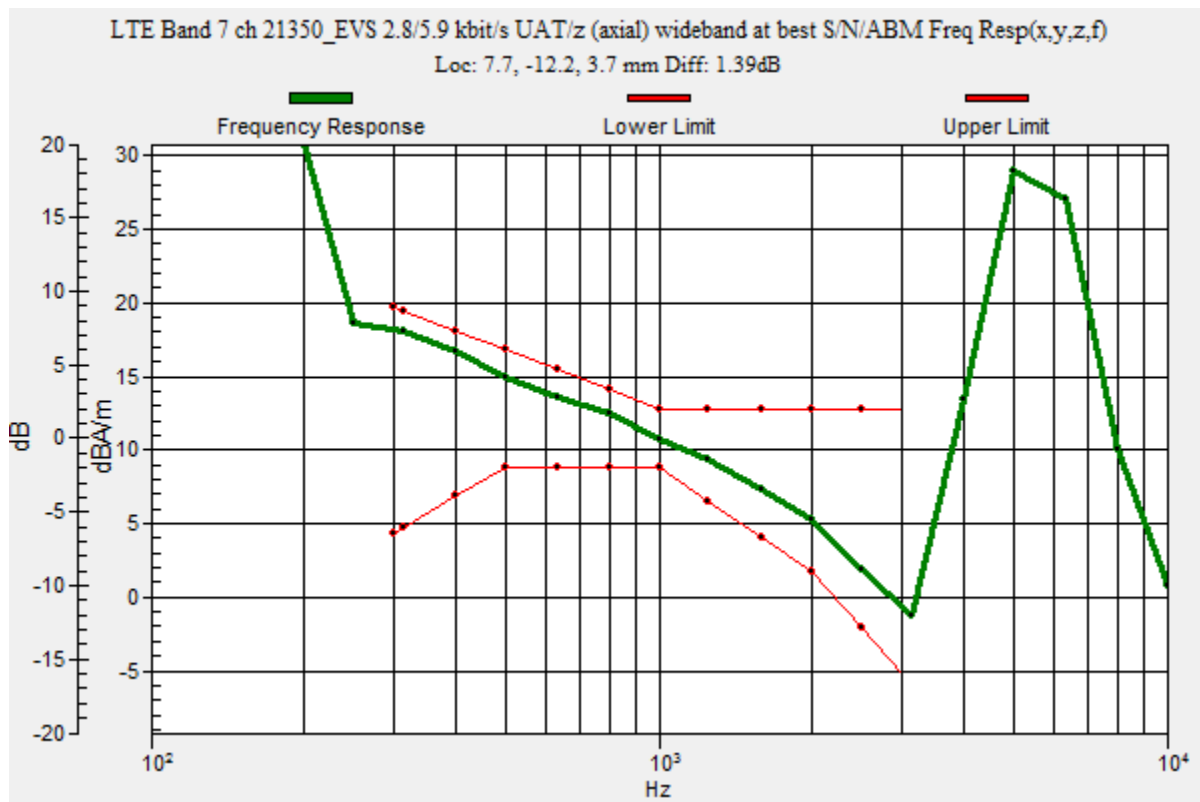

## LTE Band 7

Communication System: UID 0, LTE (FDD) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 7 ch 21350\_EVS 2.8/5.9 kbit/s UAT/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 56.55 dB


ABM1 comp = 10.75 dBA/m

BWC Factor = 0.16 dB

Location: 7.9, -12.1, 3.7 mm

ABM2 = -31.01 dBA/m

Location: 25, 0, 3.7 mm

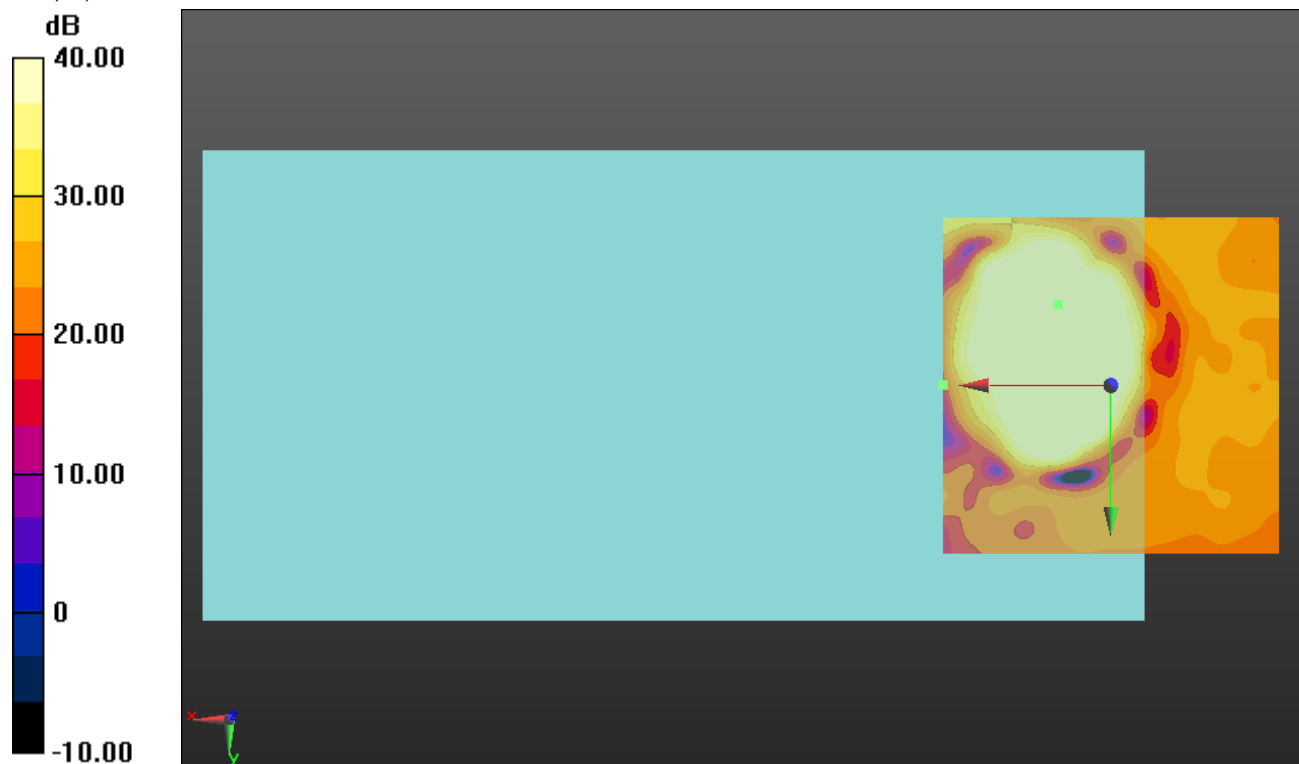

0 dB = 1.000 = 0.00 dB

## LTE Band 7

Communication System: UID 0, LTE (FDD) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 7 ch 21350\_EVS 2.8/5.9 kbit/s UAT/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 48.94 dB


ABM1 comp = 7.68 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, 2.9, 3.7 mm

ABM2 = -26.18 dBA/m

Location: 25, 16.7, 3.7 mm

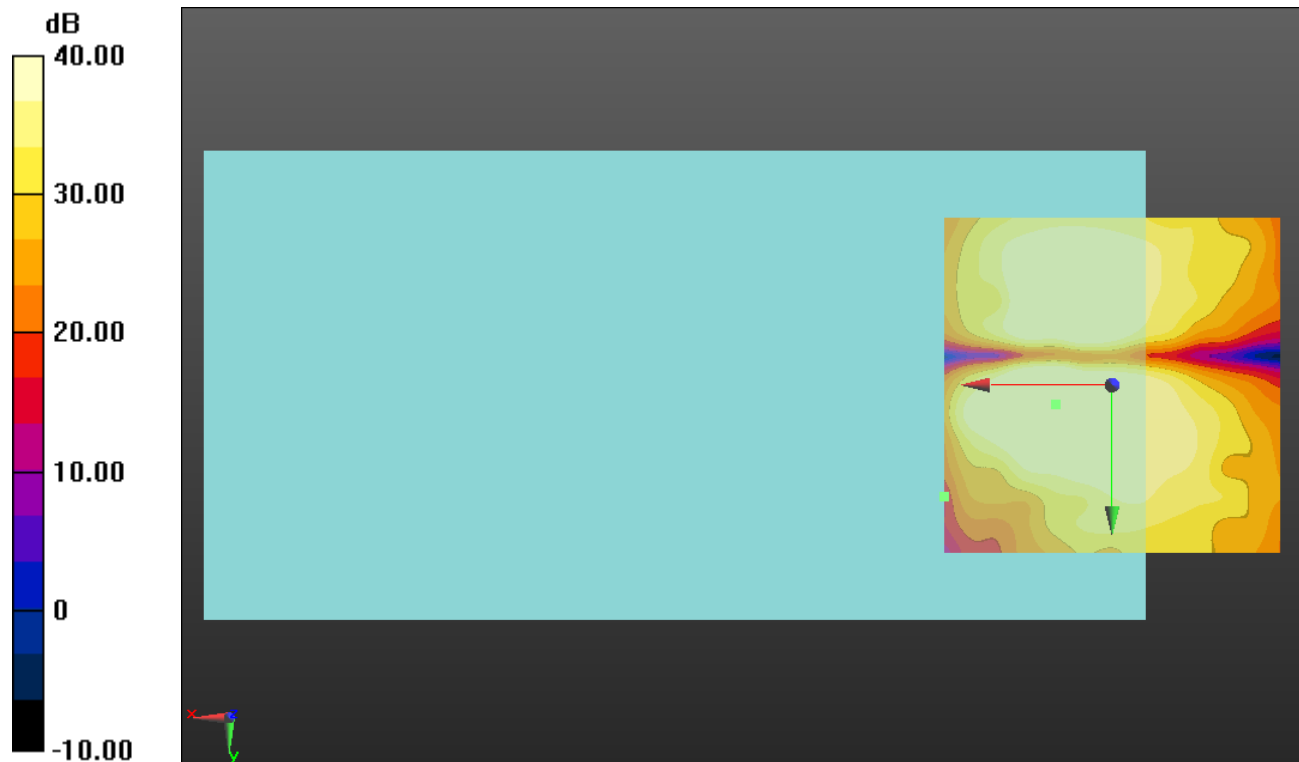

0 dB = 1.000 = 0.00 dB

**LTE Band 12**

Communication System: UID 0, LTE (FDD) (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 12 ch 23095\_EVS 2.8/5.9 kbit/s/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 0.46 dB

BWC Factor = 10.80 dB

Location: 6.5, -0.5, 3.7 mm

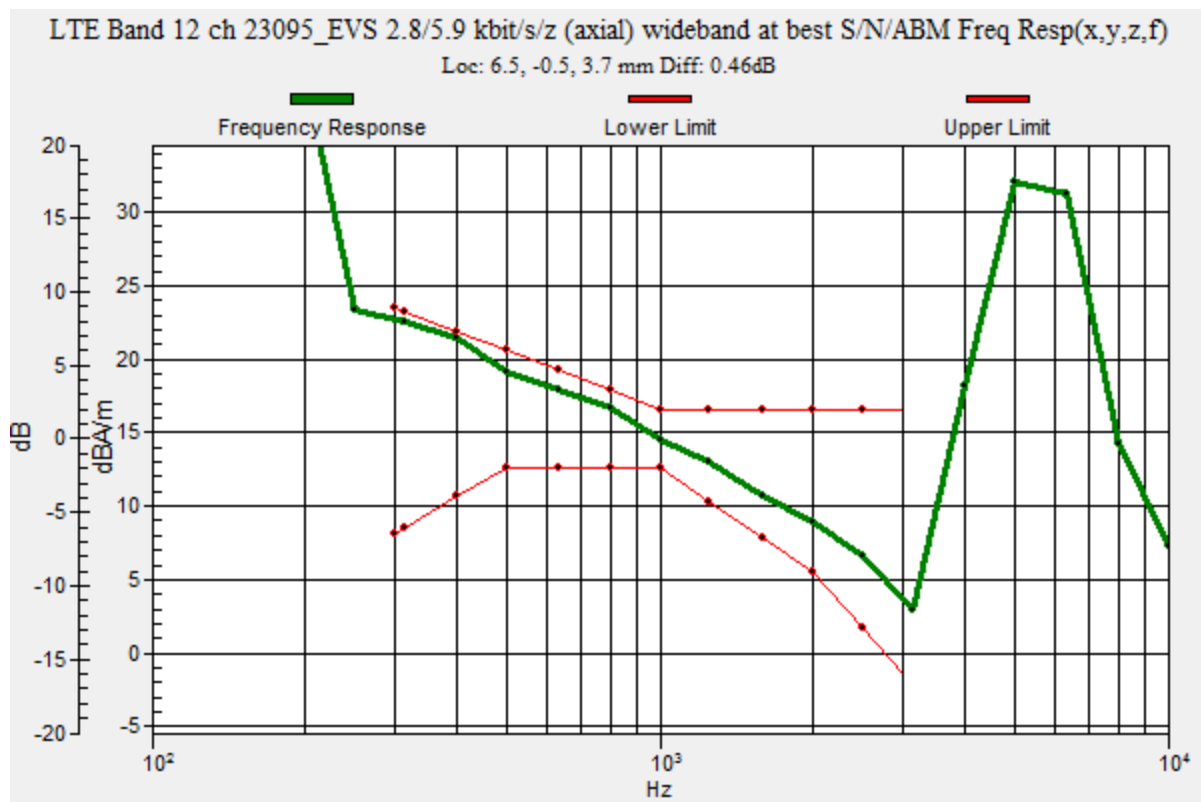

## LTE Band 12

Communication System: UID 0, LTE (FDD) (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 12 ch 23095\_EVS 2.8/5.9 kbit/s/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 61.22 dB


ABM1 comp = 15.41 dBA/m

BWC Factor = 0.16 dB

Location: 6.7, -0.4, 3.7 mm

ABM2 = -27.49 dBA/m

Location: 25, -4.2, 3.7 mm

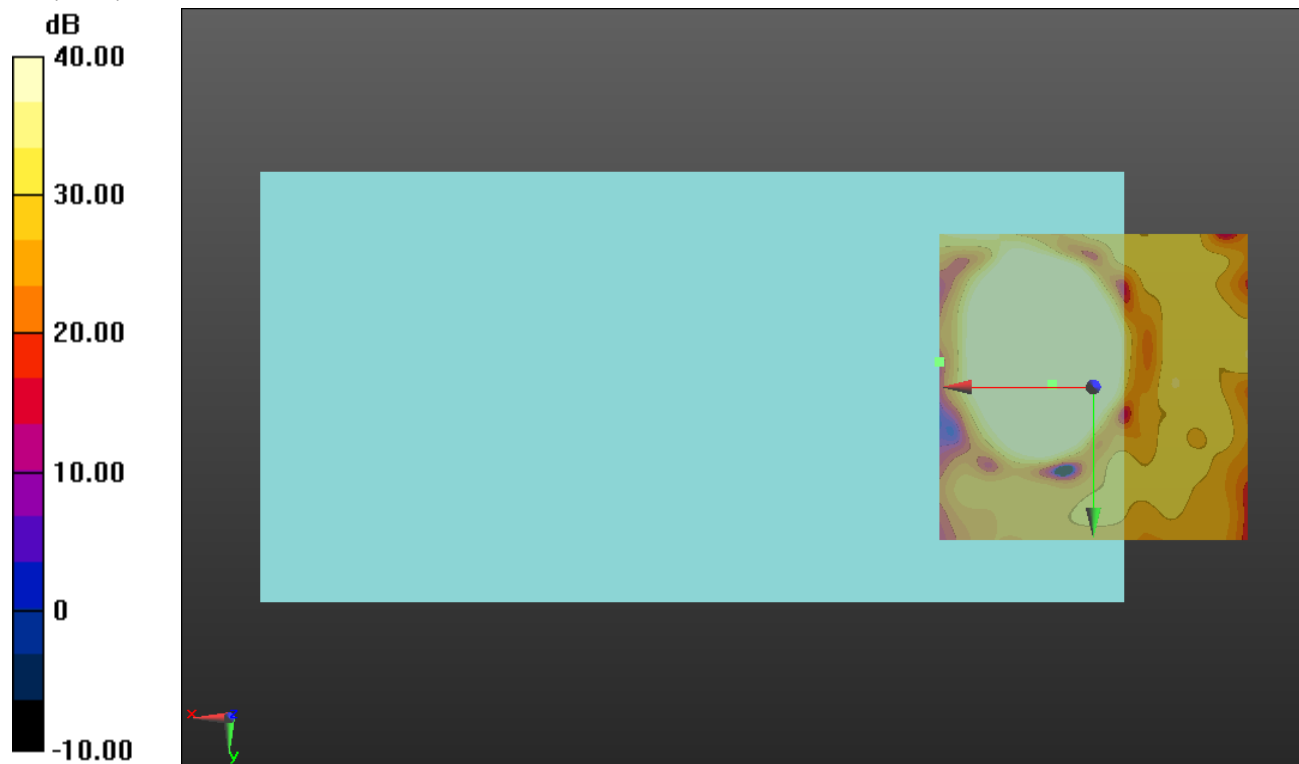

0 dB = 1.000 = 0.00 dB

## LTE Band 12

Communication System: UID 0, LTE (FDD) (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 12 ch 23095\_EVS 2.8/5.9 kbit/s/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated

grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 49.53 dB


ABM1 comp = 7.66 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, 2.5, 3.7 mm

ABM2 = -27.63 dBA/m

Location: 25, 16.7, 3.7 mm

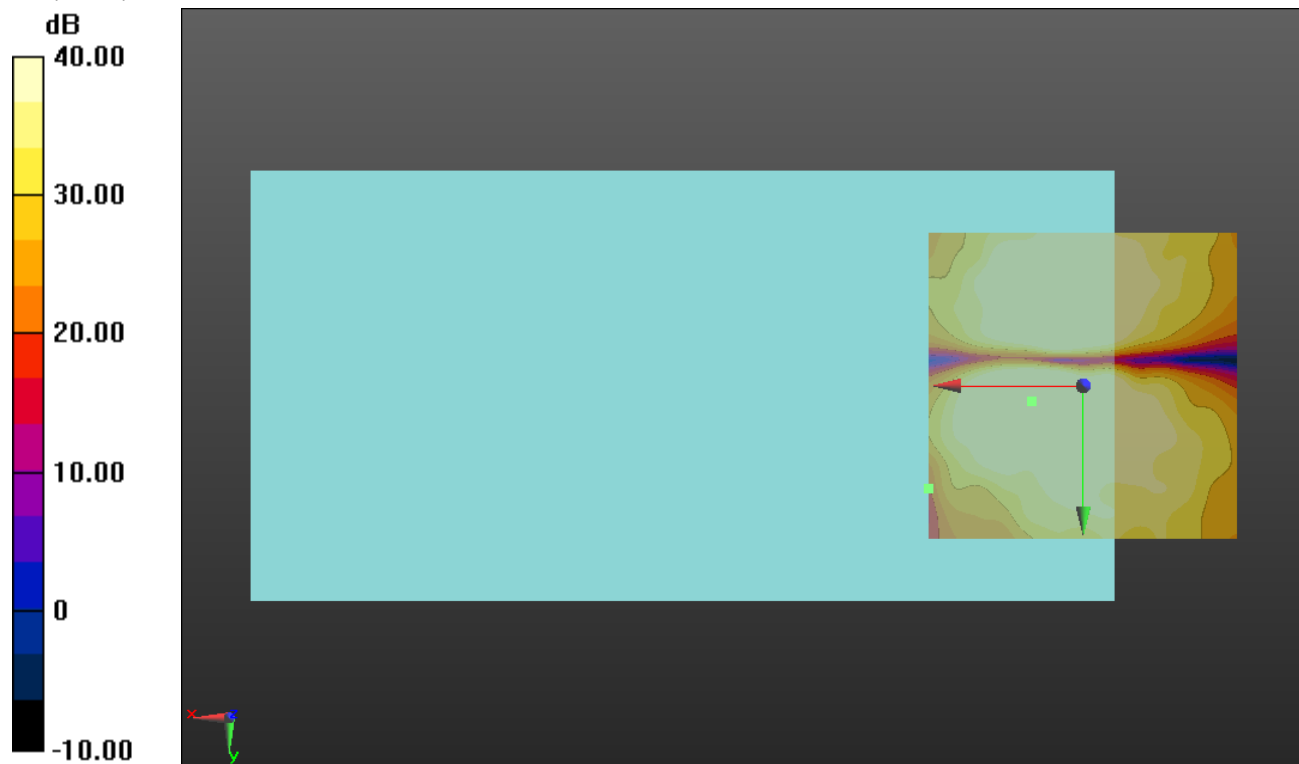

**LTE Band 26**

Communication System: UID 0, LTE (FDD) (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 26 ch 26865\_EVS 2.8/5.9 kbit/s/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 0.57 dB

BWC Factor = 10.80 dB

Location: 7.9, -12.4, 3.7 mm

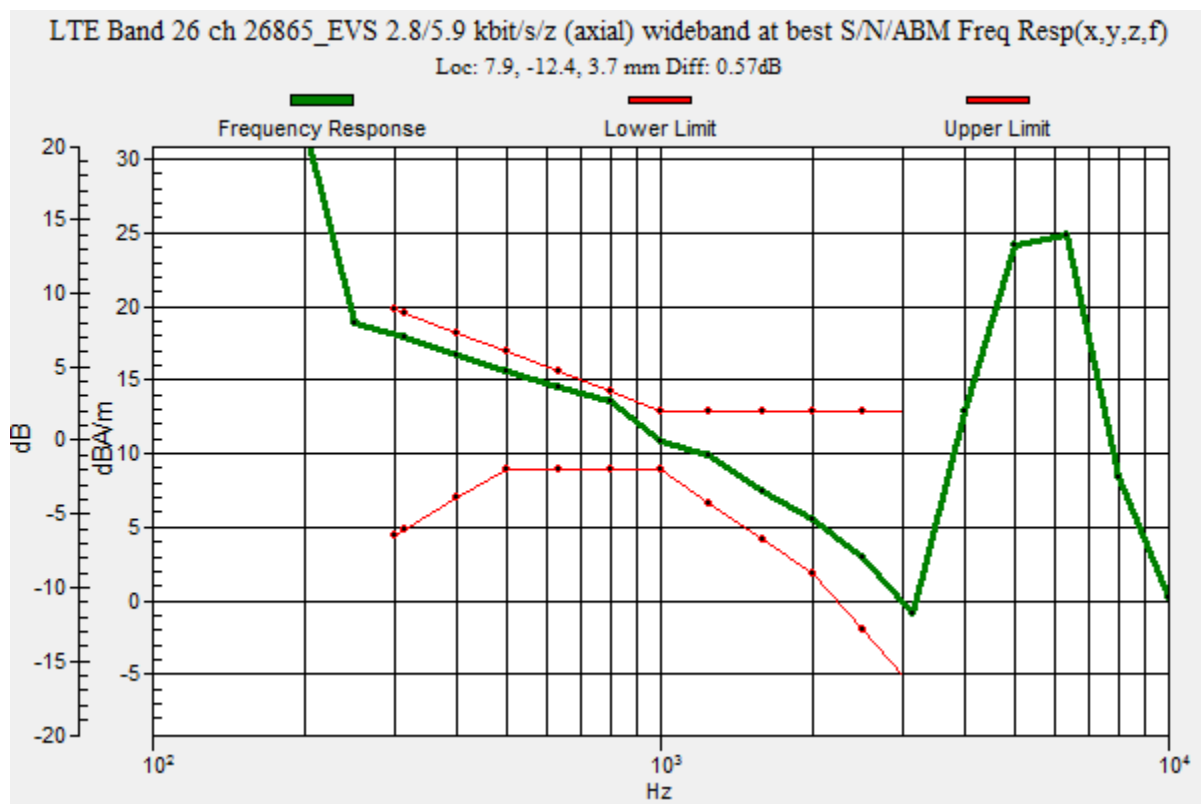

## LTE Band 26

Communication System: UID 0, LTE (FDD) (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 26 ch 26865\_EVS 2.8/5.9 kbit/s/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 59.53 dB


ABM1 comp = 13.31 dBA/m

BWC Factor = 0.16 dB

Location: 7.9, -12.5, 3.7 mm

ABM2 = -27.70 dBA/m

Location: 25, 4.2, 3.7 mm

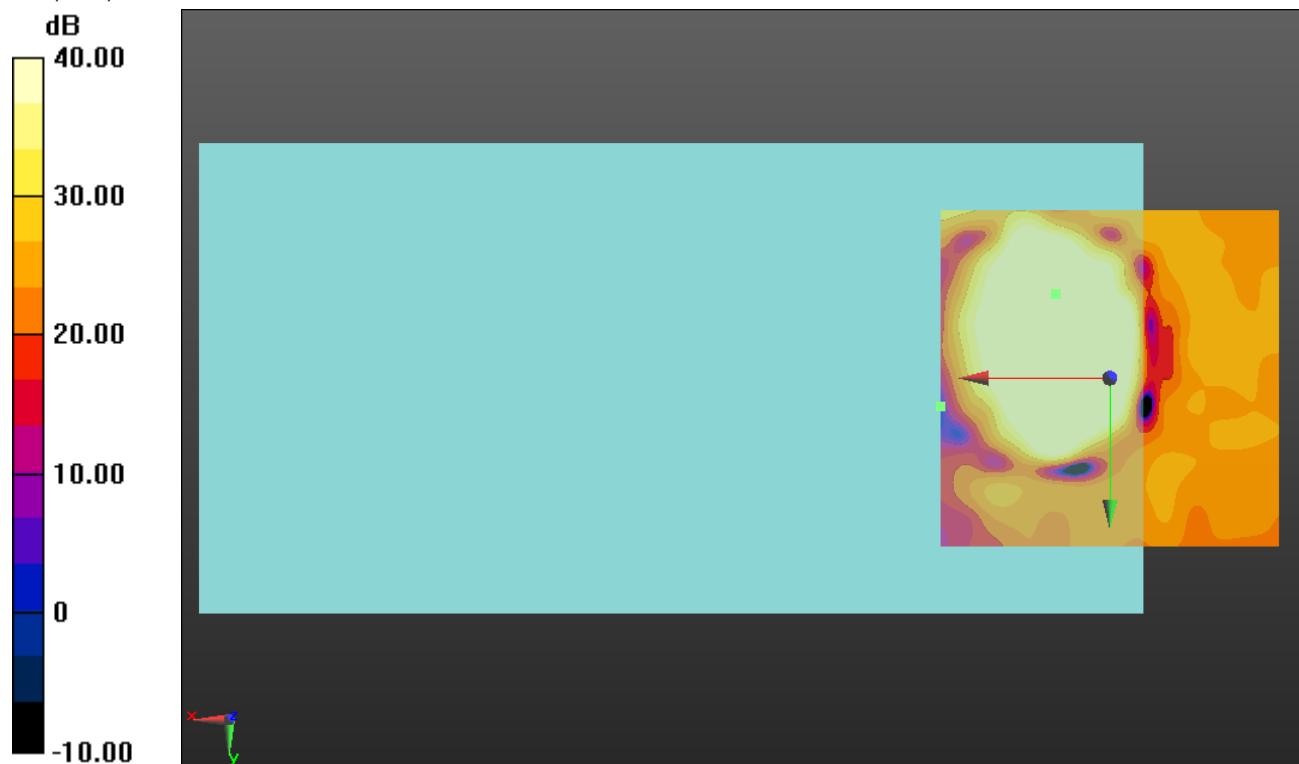

## LTE Band 26

Communication System: UID 0, LTE (FDD) (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 26 ch 26865\_EVS 2.8/5.9 kbit/s/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated

grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 48.05 dB


ABM1 comp = 6.71 dBA/m

BWC Factor = 0.16 dB

Location: 8.8, 2.9, 3.7 mm

ABM2 = -26.78 dBA/m

Location: 25, 16.7, 3.7 mm

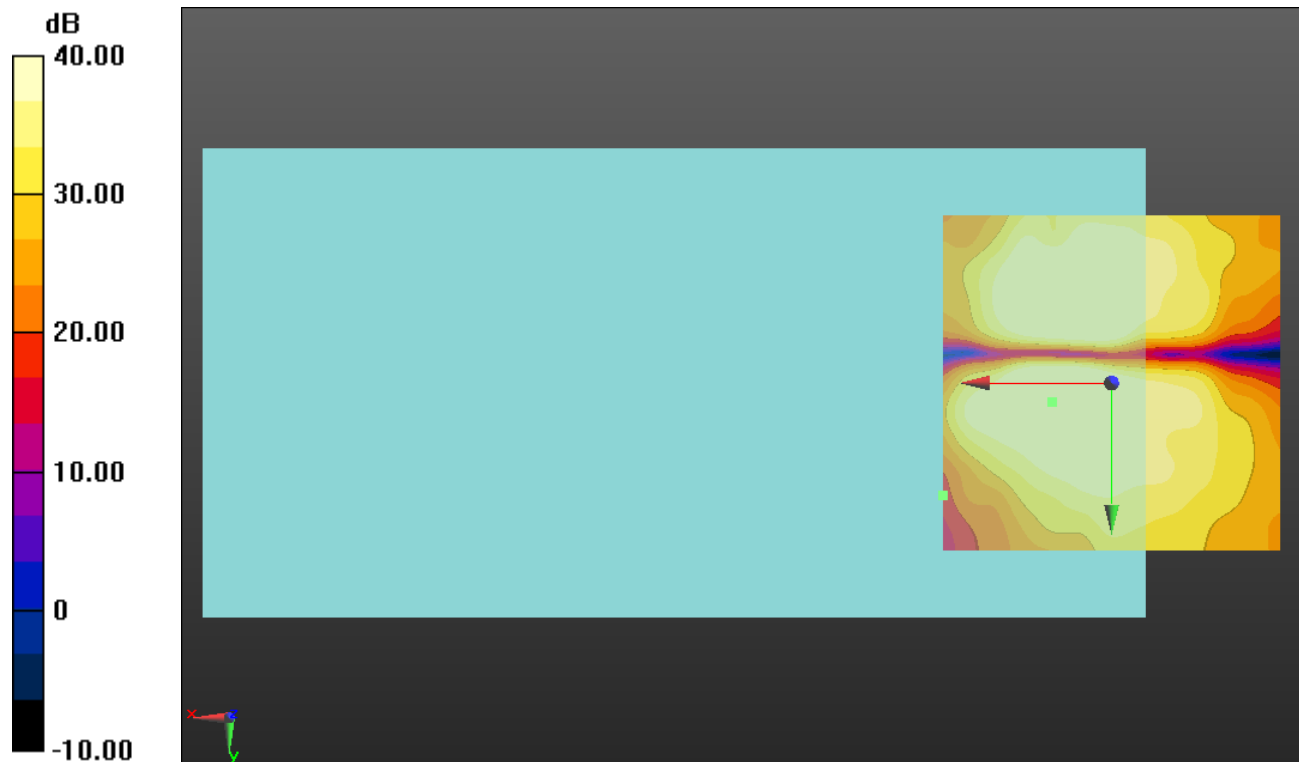

0 dB = 1.000 = 0.00 dB

**LTE Band 41**

Communication System: UID 0, @LTE (TDD) (0); Frequency: 2593 MHz;Duty Cycle: 1:1.59956

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 41 ch 40620 EVS 2.8/5.9 kbit/s/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.15 dB

BWC Factor = 10.80 dB

Location: 7.5, -11.9, 3.7 mm

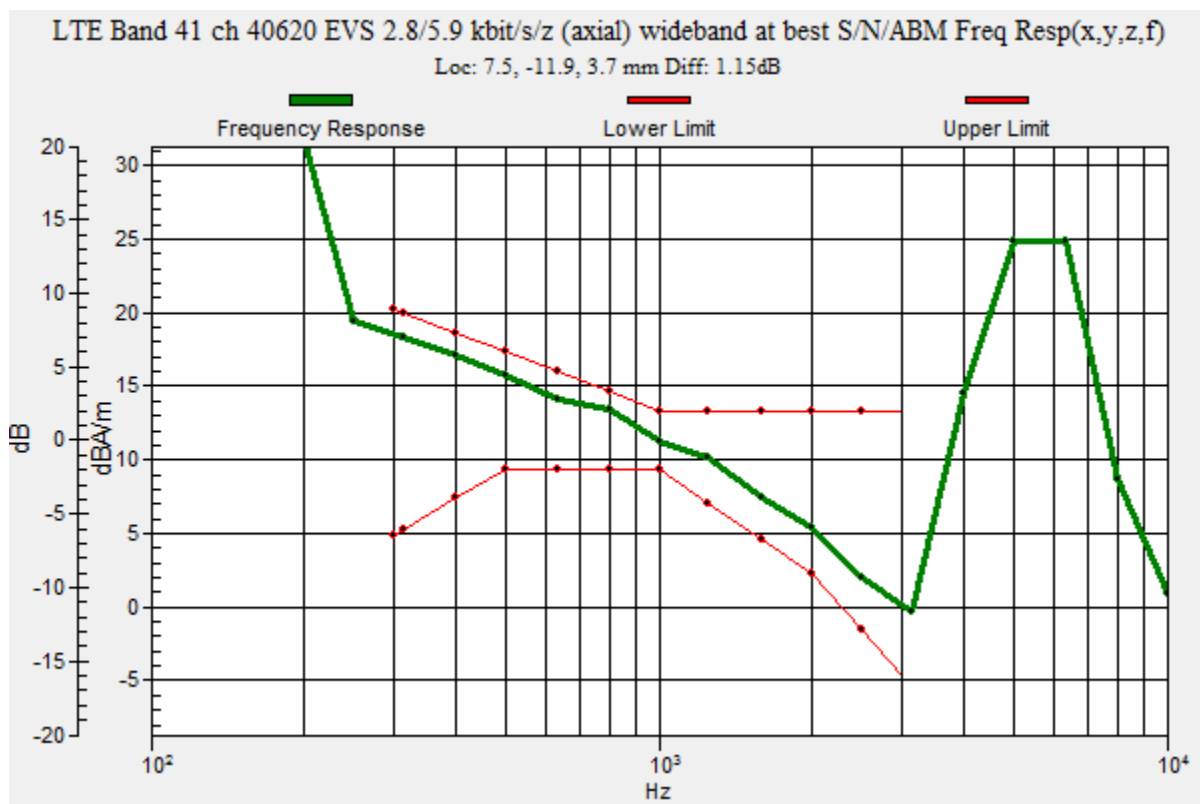

## LTE Band 41

Communication System: UID 0, @LTE (TDD) (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59956

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 41 ch 40620 EVS 2.8/5.9 kbit/s/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 55.33 dB


ABM1 comp = 11.18 dBA/m

BWC Factor = 0.16 dB

Location: 7.5, -12.1, 3.7 mm

ABM2 = -26.86 dBA/m

Location: 25, 0, 3.7 mm

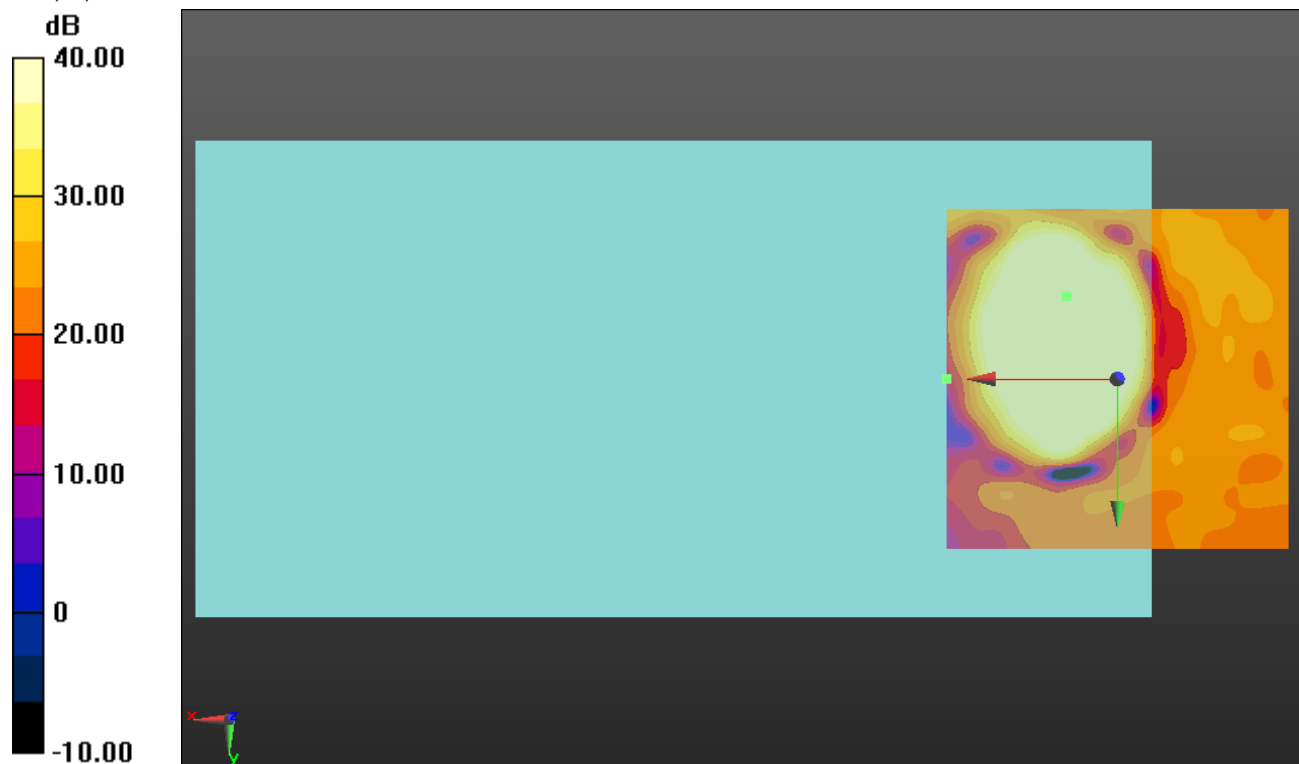

0 dB = 1.000 = 0.00 dB

## LTE Band 41

Communication System: UID 0, @LTE (TDD) (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59956

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 41 ch 40620 EVS 2.8/5.9 kbit/s/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1): Interpolated

grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 46.06 dB


ABM1 comp = 4.57 dBA/m

BWC Factor = 0.16 dB

Location: 6.3, 1.7, 3.7 mm

ABM2 = -25.08 dBA/m

Location: 25, 16.7, 3.7 mm

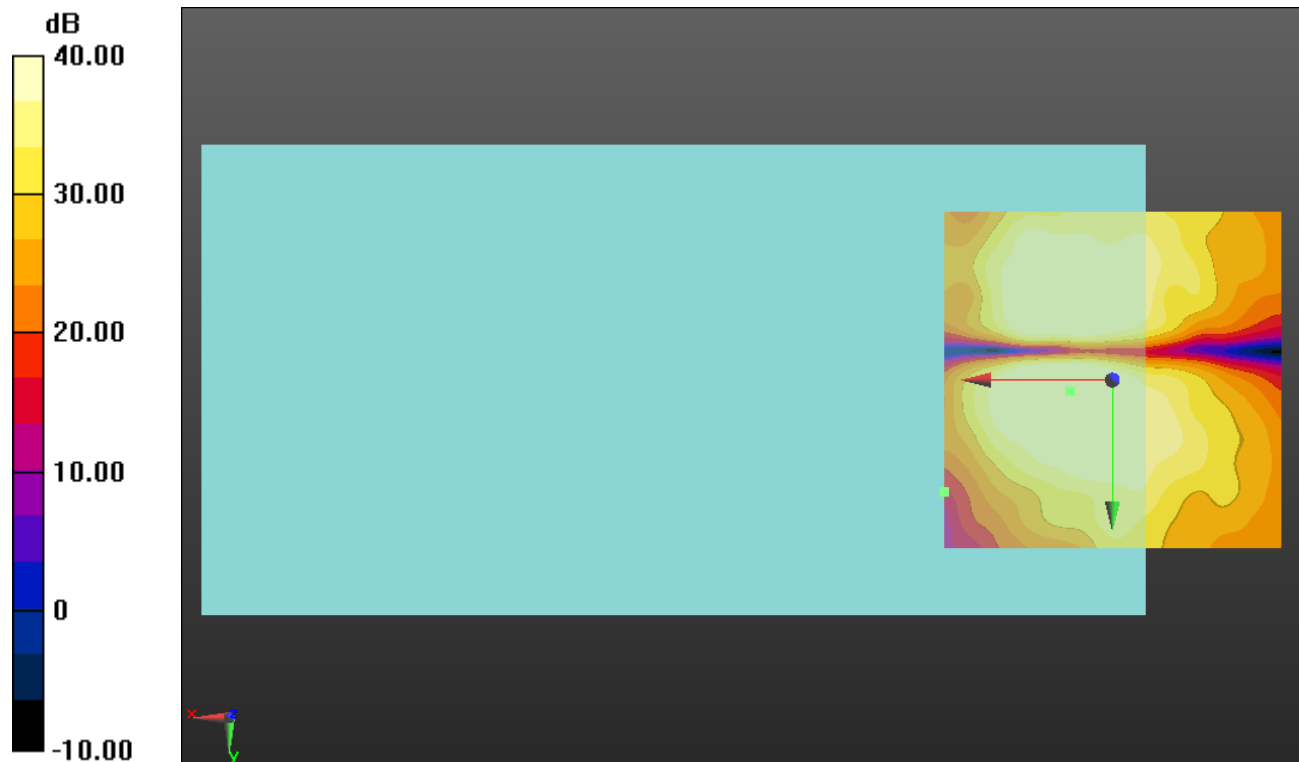

0 dB = 1.000 = 0.00 dB

**802.11b**

Communication System: UID 0, IEEE 802.11b/g/n 2.4 GHz Band (0); Frequency: 2412 MHz; Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11b CCK 5.5Mbps ch 1\_NB  
4.75 kbit/s/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 0.81 dB

BWC Factor = 10.80 dB

Location: 0, 360, 13 mm

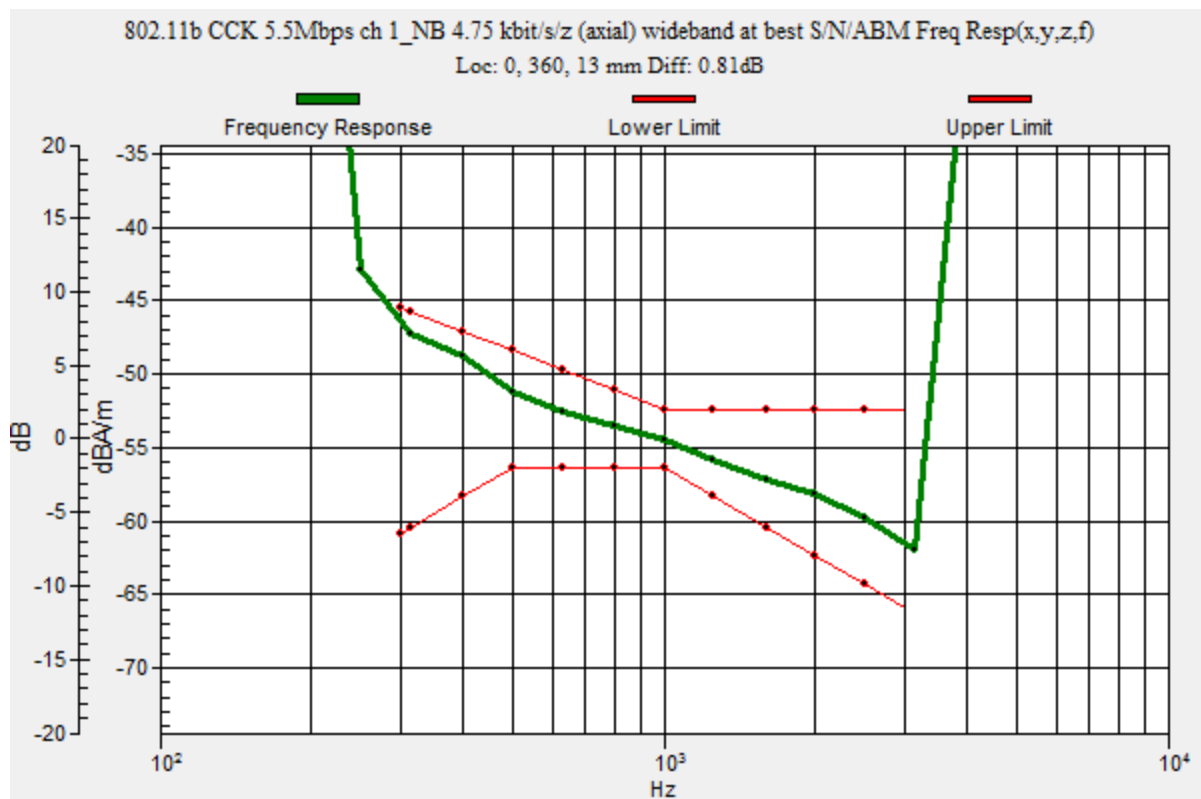

**802.11b**

Communication System: UID 0, IEEE 802.11b/g/n 2.4 GHz Band (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11b CCK 5.5Mbps ch 1\_NB  
4.75 kbit/s/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 58.64 dB


ABM1 comp = 13.49 dBA/m

BWC Factor = 0.16 dB

Location: 5.4, -10.4, 3.7 mm

ABM2 = -27.01 dBA/m

Location: 25, 0, 3.7 mm

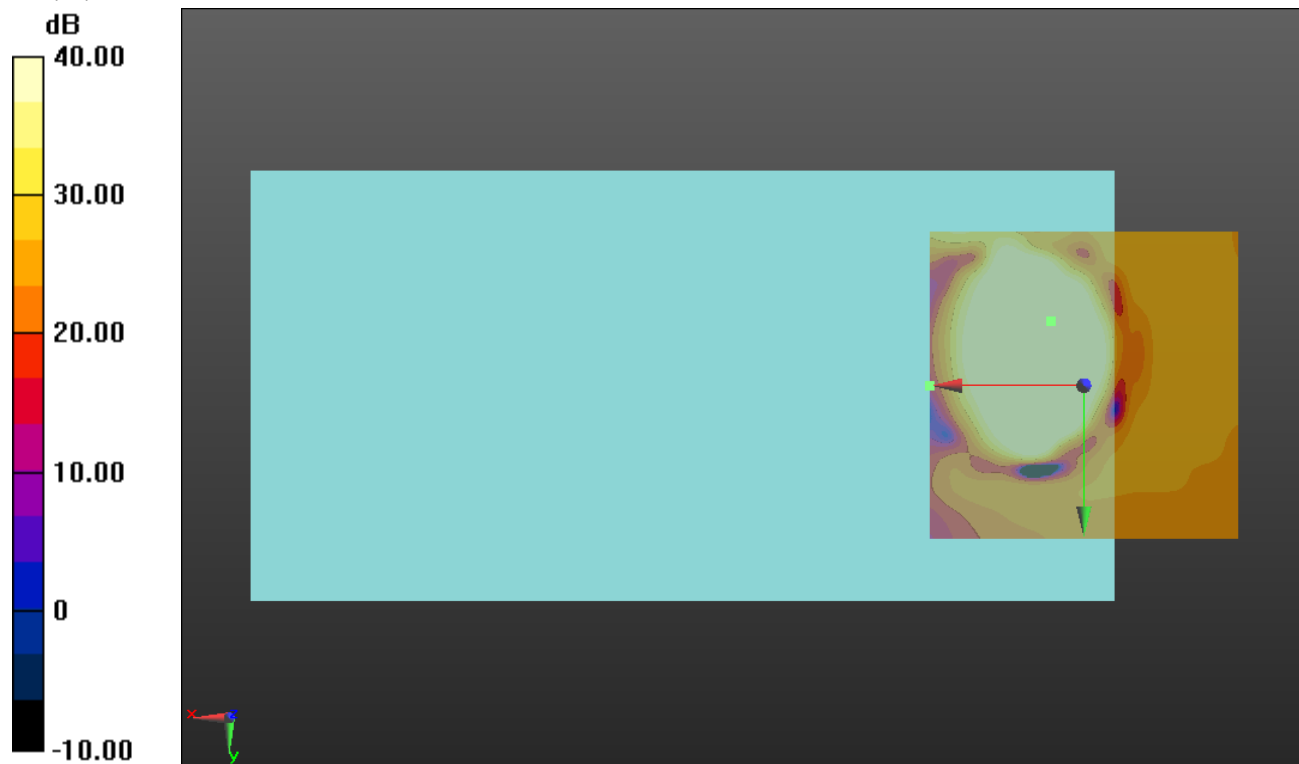

0 dB = 1.000 = 0.00 dB

**802.11b**

Communication System: UID 0, IEEE 802.11b/g/n 2.4 GHz Band (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11b CCK 5.5Mbps ch 1\_NB  
4.75 kbit/s/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 52.01 dB


ABM1 comp = 8.36 dBA/m

BWC Factor = 0.16 dB

Location: 10, 1.2, 3.7 mm

ABM2 = -26.55 dBA/m

Location: 25, 16.7, 3.7 mm

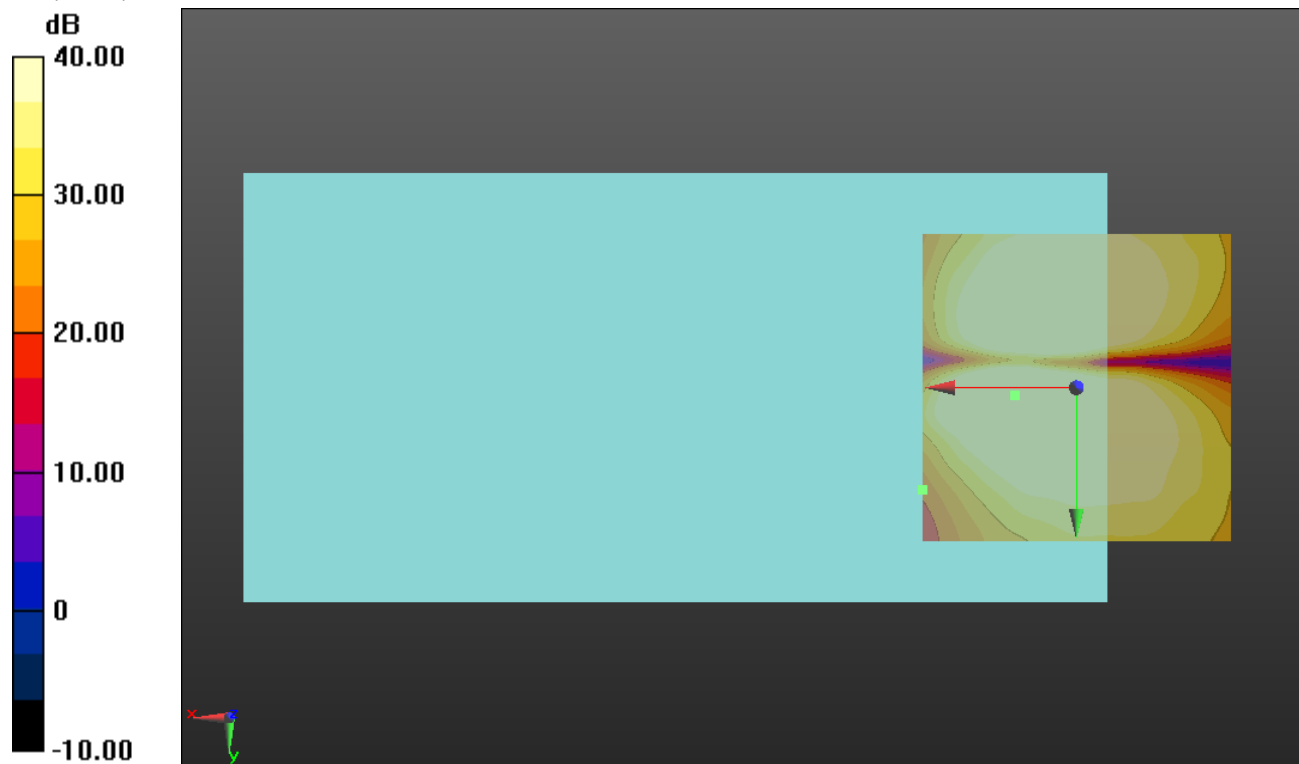

0 dB = 1.000 = 0.00 dB

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5190 MHz; Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 38\_NB 4.75 kbit/s/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 2.00 dB

BWC Factor = 10.80 dB

Location: 0, 360, 13 mm

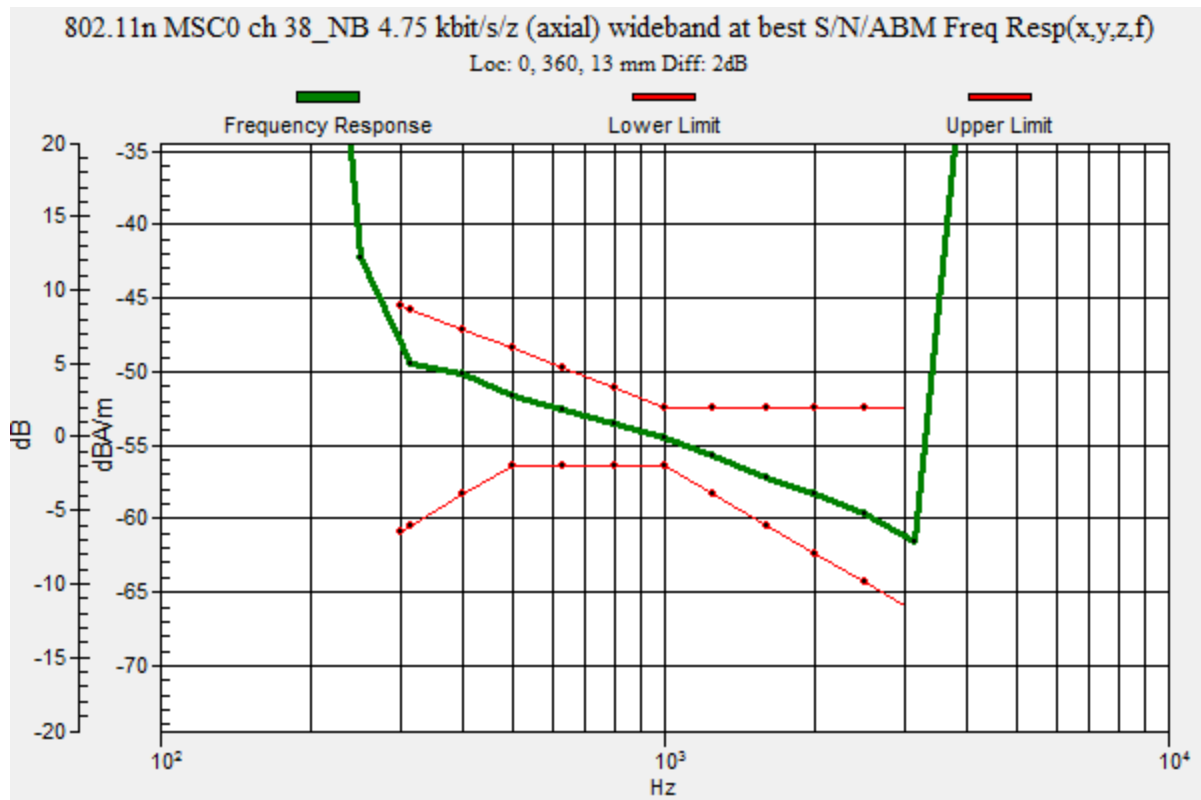

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 38\_NB 4.75 kbit/s/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 62.95 dB


ABM1 comp = 17.11 dBA/m

BWC Factor = 0.16 dB

Location: 7.9, -4.2, 3.7 mm

ABM2 = -26.12 dBA/m

Location: 25, 12.5, 3.7 mm

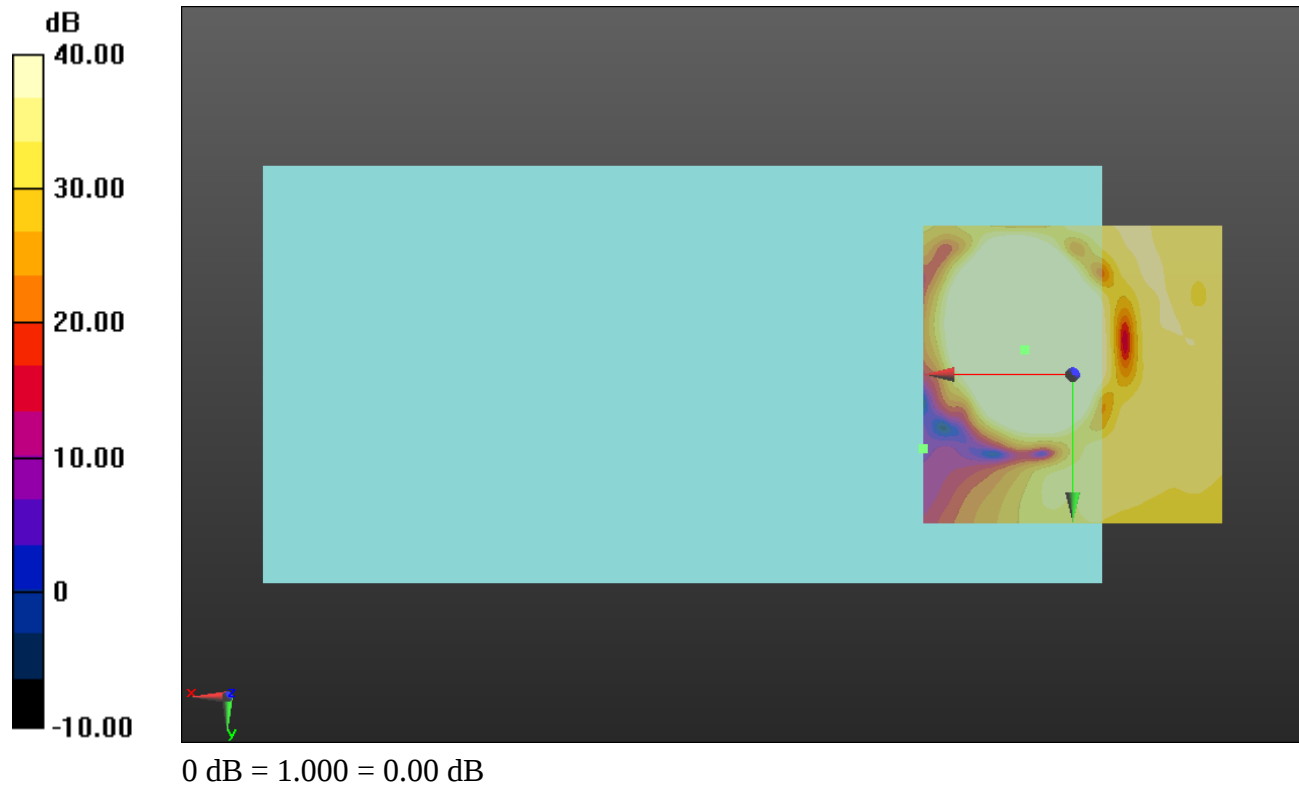

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/15/2018
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 38\_NB 4.75 kbit/s/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated

grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 49.83 dB


ABM1 comp = 7.82 dBA/m

BWC Factor = 0.16 dB

Location: 5.8, -12.5, 3.7 mm

ABM2 = -23.03 dBA/m

Location: 25, -25, 3.7 mm

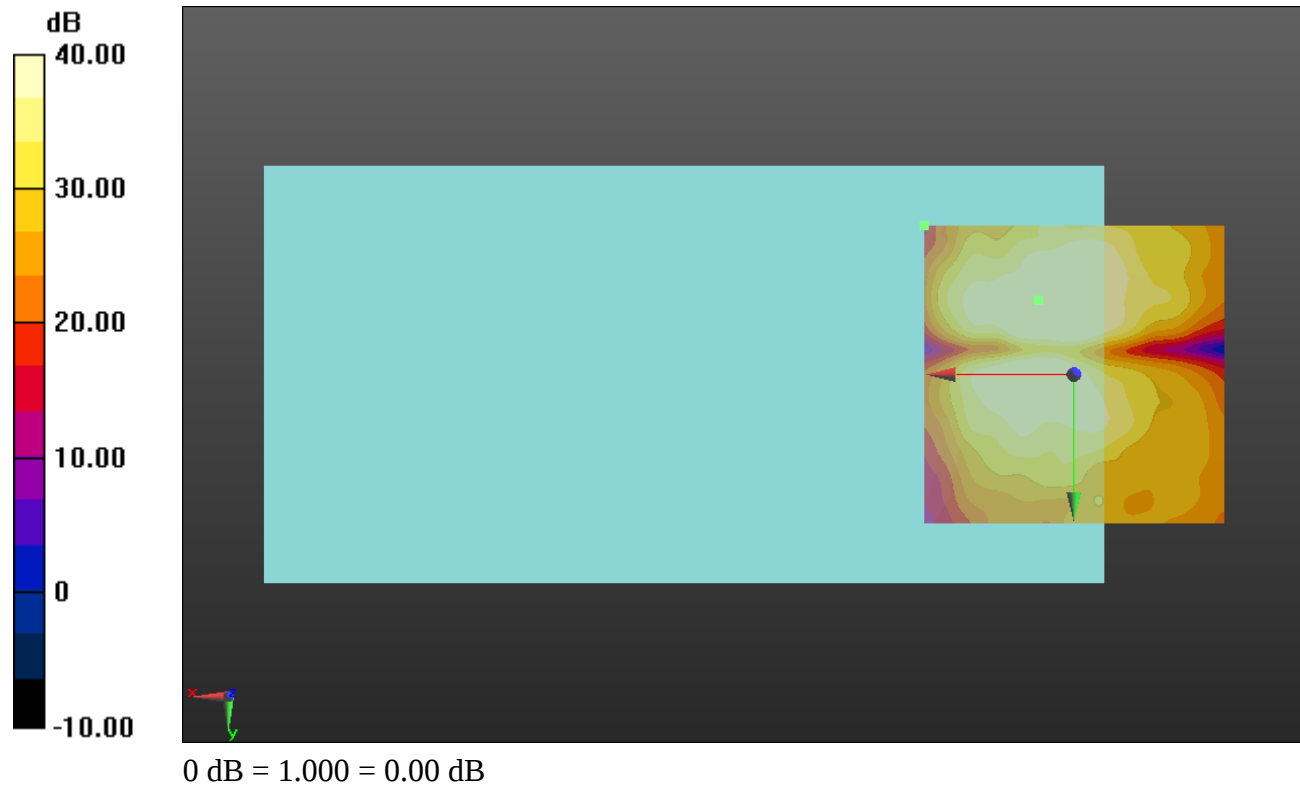

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band; Frequency: 5270 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 54\_NB 4.75 kbit/s/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 0.99 dB

BWC Factor = 10.80 dB

Location: 0, 360, 13 mm

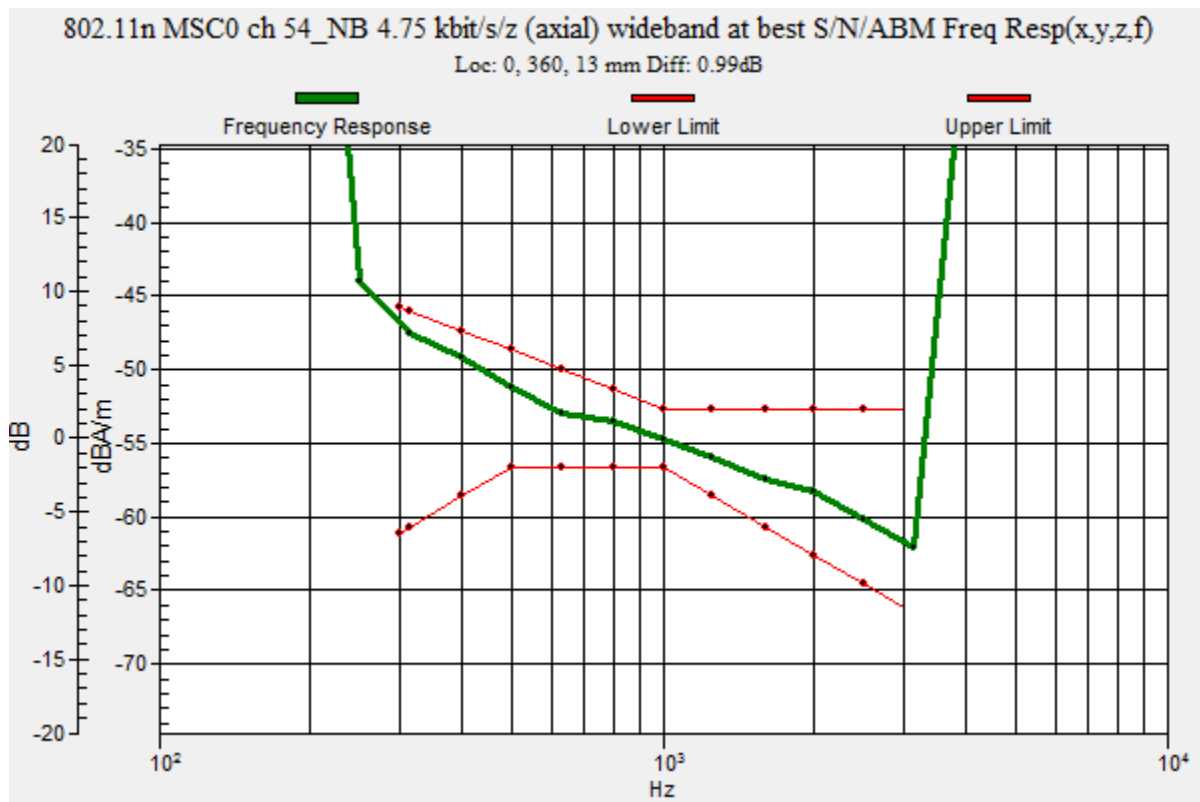

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 54\_NB 4.75 kbit/s/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 61.81 dB


ABM1 comp = 17.04 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, -8.3, 3.7 mm

ABM2 = -27.13 dBA/m

Location: 25, 8.3, 3.7 mm

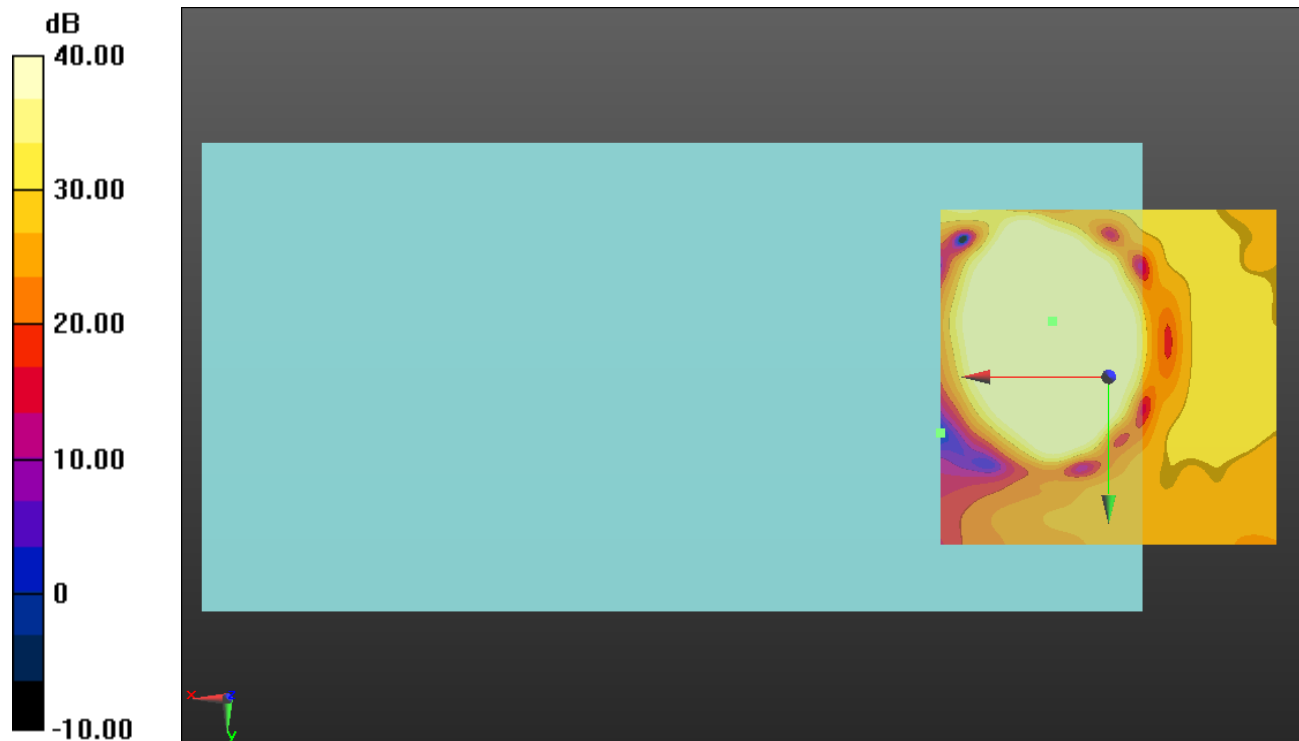

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 54\_NB 4.75 kbit/s/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated

grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 52.92 dB


ABM1 comp = 9.71 dBA/m

BWC Factor = 0.16 dB

Location: 7.5, 3.7, 3.7 mm

ABM2 = -28.17 dBA/m

Location: 25, 20.8, 3.7 mm

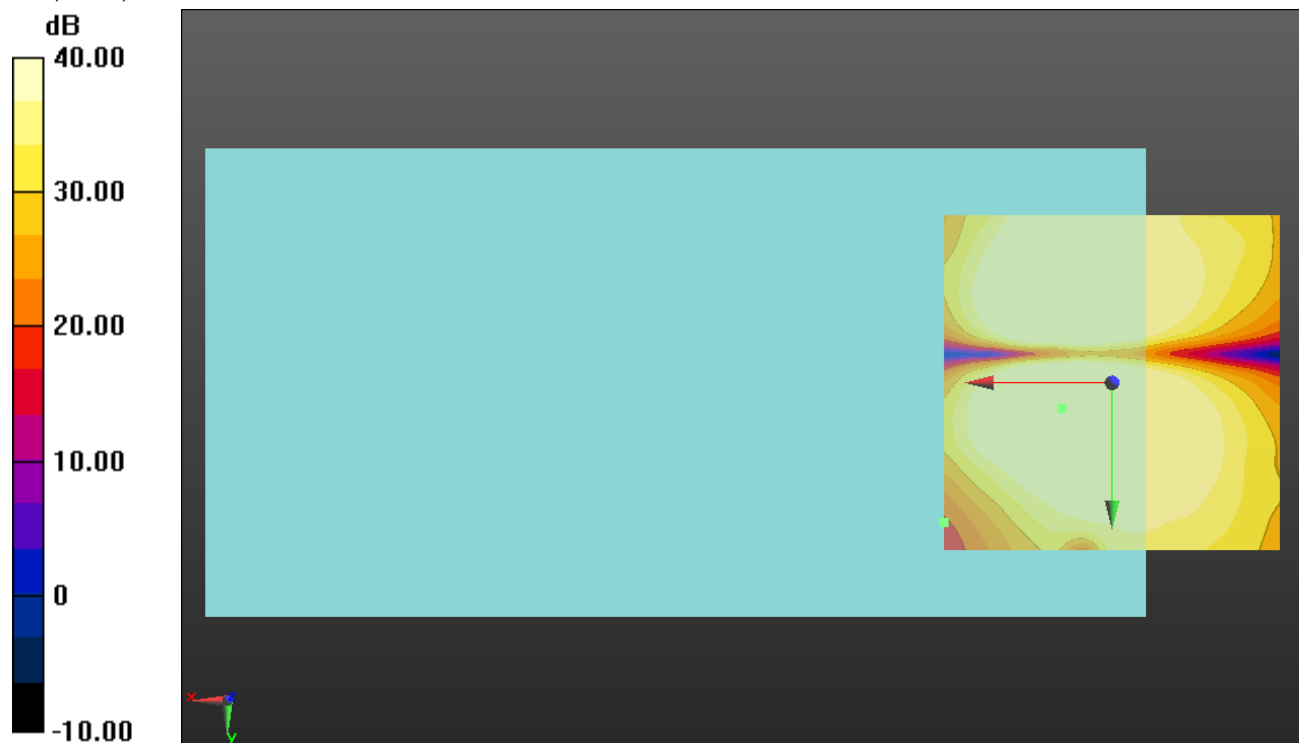

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band; Frequency: 5510 MHz; Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 102\_NB 4.75 kbit/s/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.20 dB

BWC Factor = 10.80 dB

Location: -50, 360, 13 mm

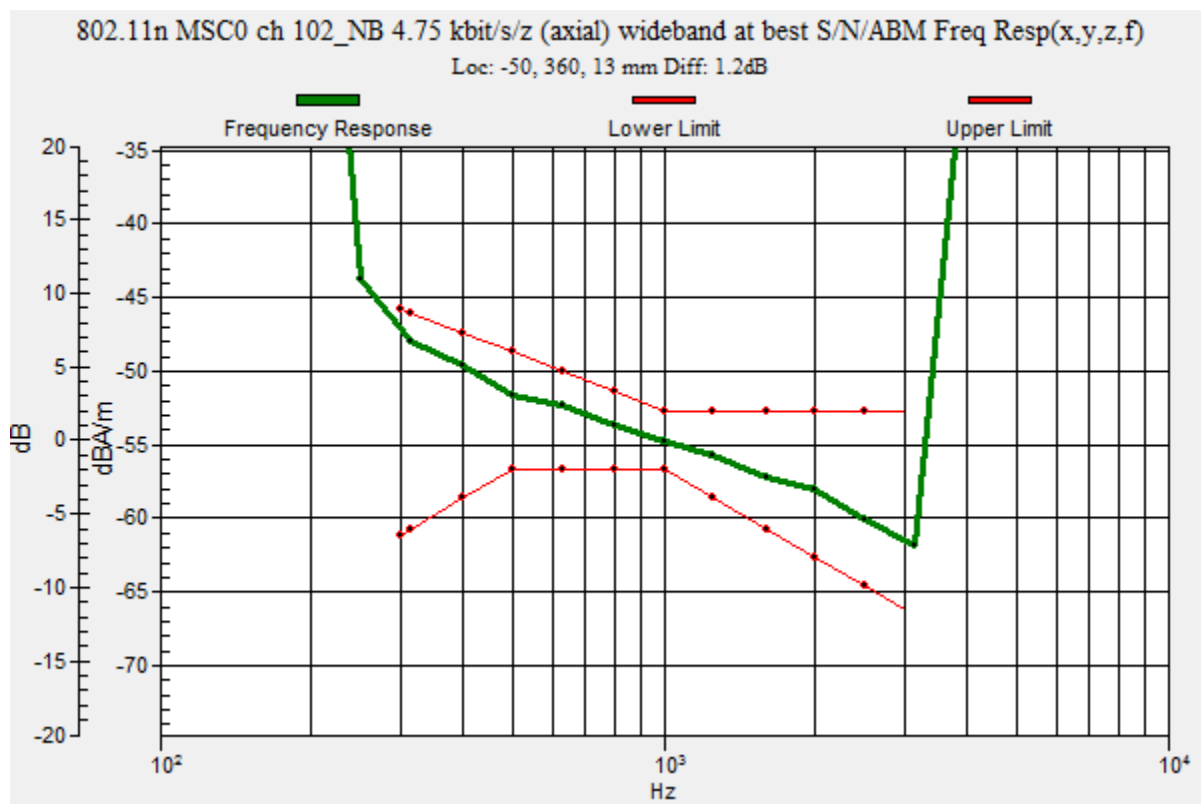

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band; Frequency: 5510 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 102\_NB 4.75 kbit/s/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid:  
dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 60.86 dB


ABM1 comp = 15.77 dBA/m

BWC Factor = 0.16 dB

Location: 6.7, -1.3, 3.7 mm

ABM2 = -26.50 dBA/m

Location: 25, 8.3, 3.7 mm

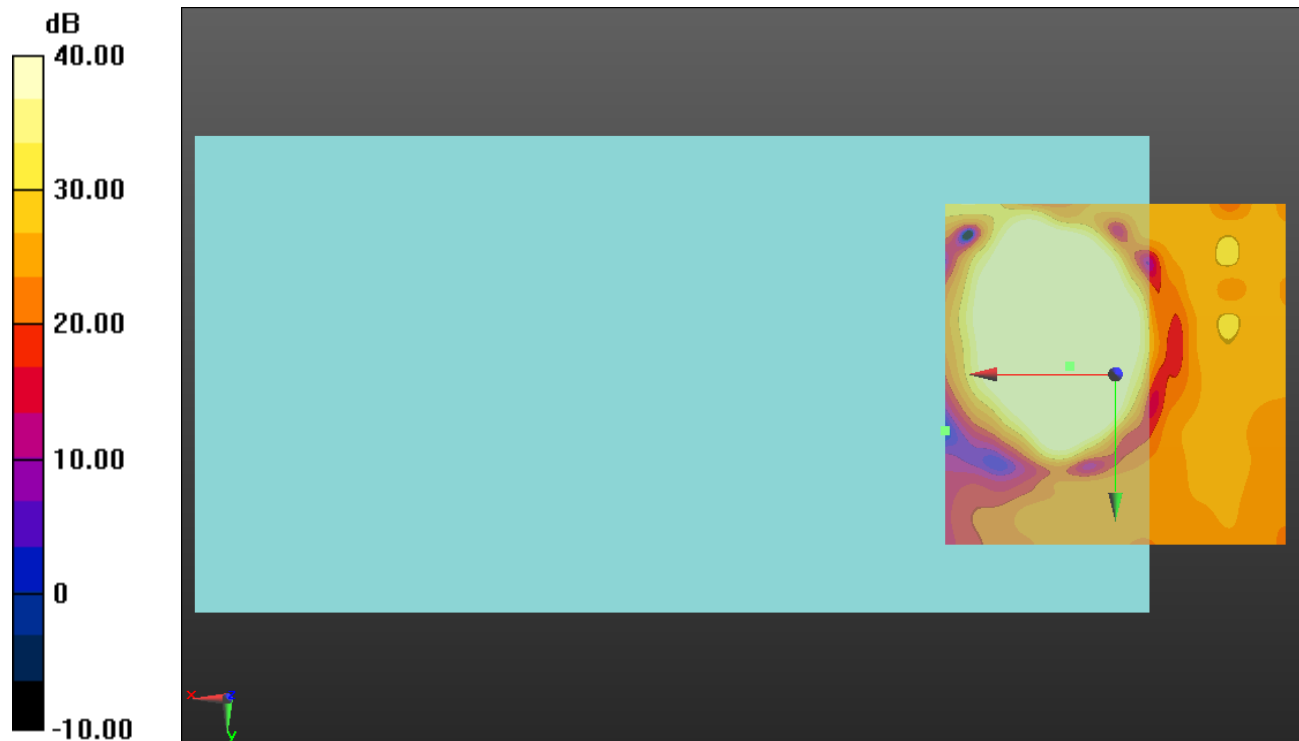

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band; Frequency: 5510 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 102\_NB 4.75 kbit/s/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated

grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 52.18 dB


ABM1 comp = 9.05 dBA/m

BWC Factor = 0.16 dB

Location: 6.7, 3.7, 3.7 mm

ABM2 = -25.79 dBA/m

Location: 25, 20.8, 3.7 mm

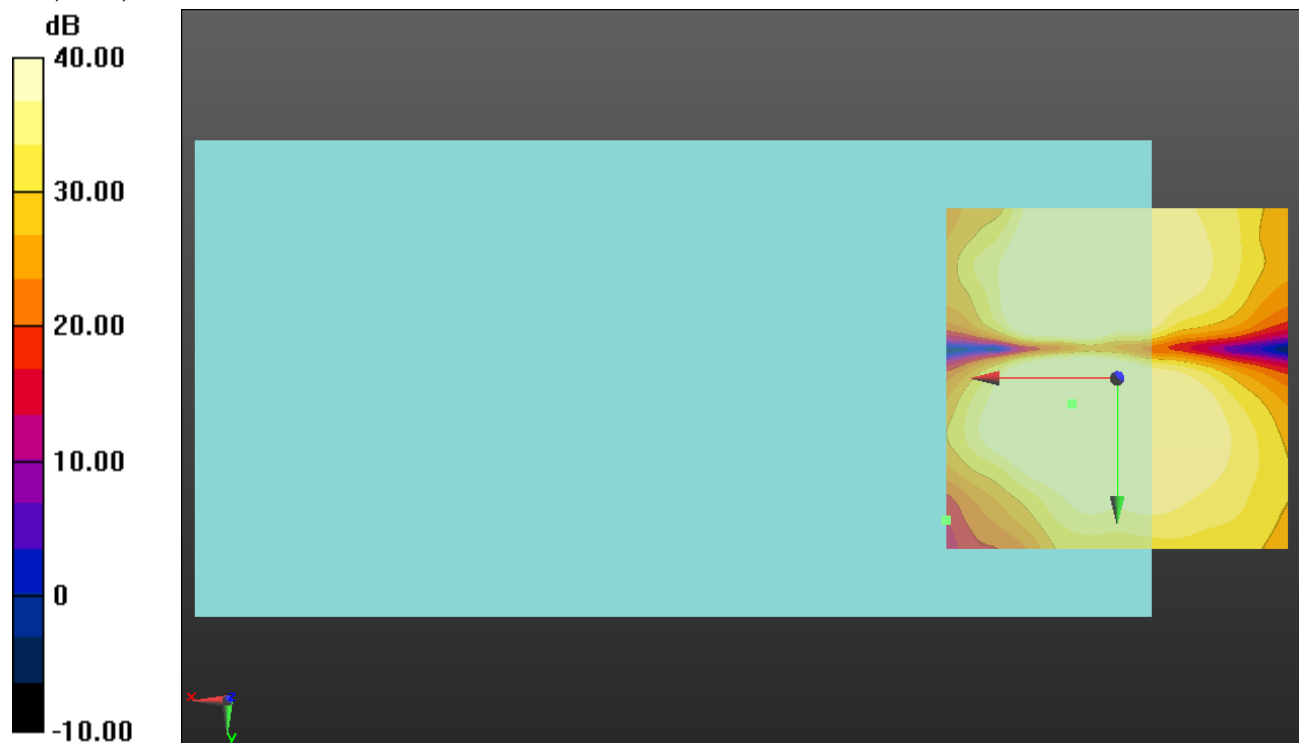

0 dB = 1.000 = 0.00 dB

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band; Frequency: 5755 MHz;Duty Cycle: 1:1

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 151\_NB 4.75 kbit/s/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid:

dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

**Cursor:**

Diff = 1.13 dB

BWC Factor = 10.80 dB

Location: 0, 360, 13 mm

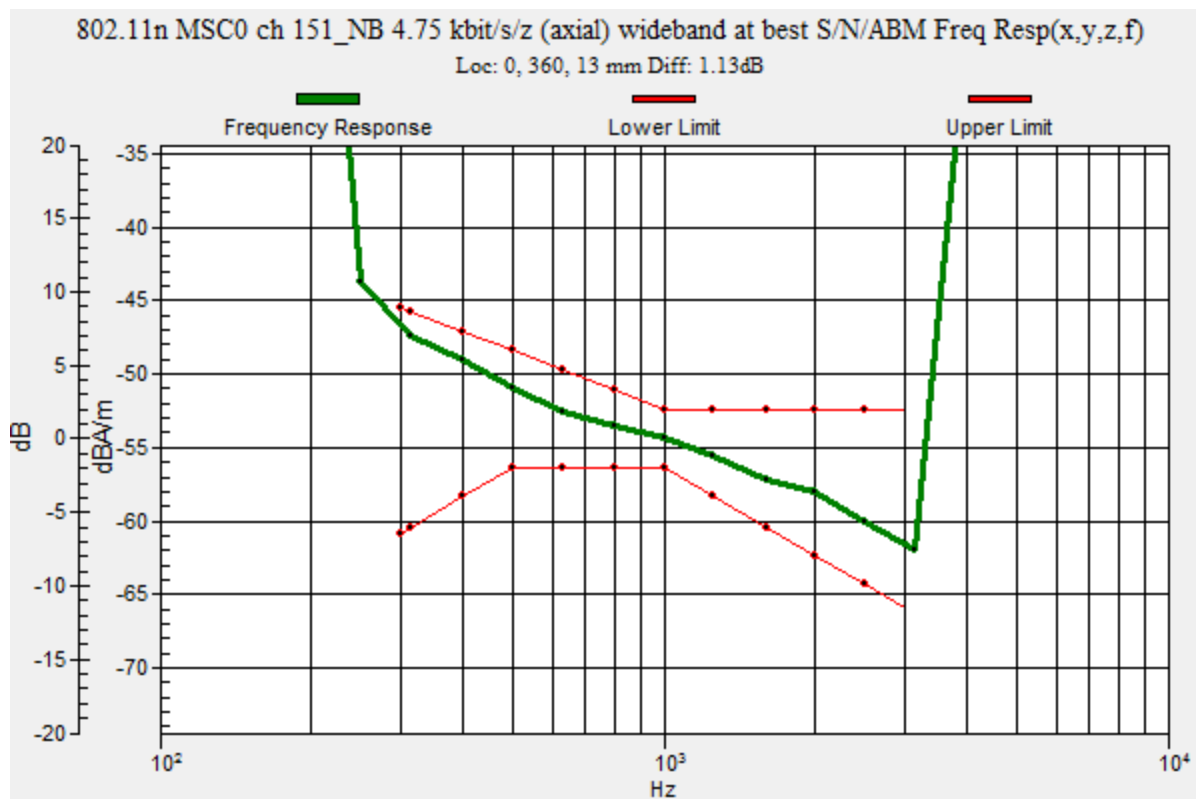

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band; Frequency: 5755 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 151\_NB 4.75 kbit/s/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):**

Interpolated grid:  
dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 62.18 dB


ABM1 comp = 15.79 dBA/m

BWC Factor = 0.16 dB

Location: 7.1, -0.4, 3.7 mm

ABM2 = -29.11 dBA/m

Location: 25, 8.3, 3.7 mm

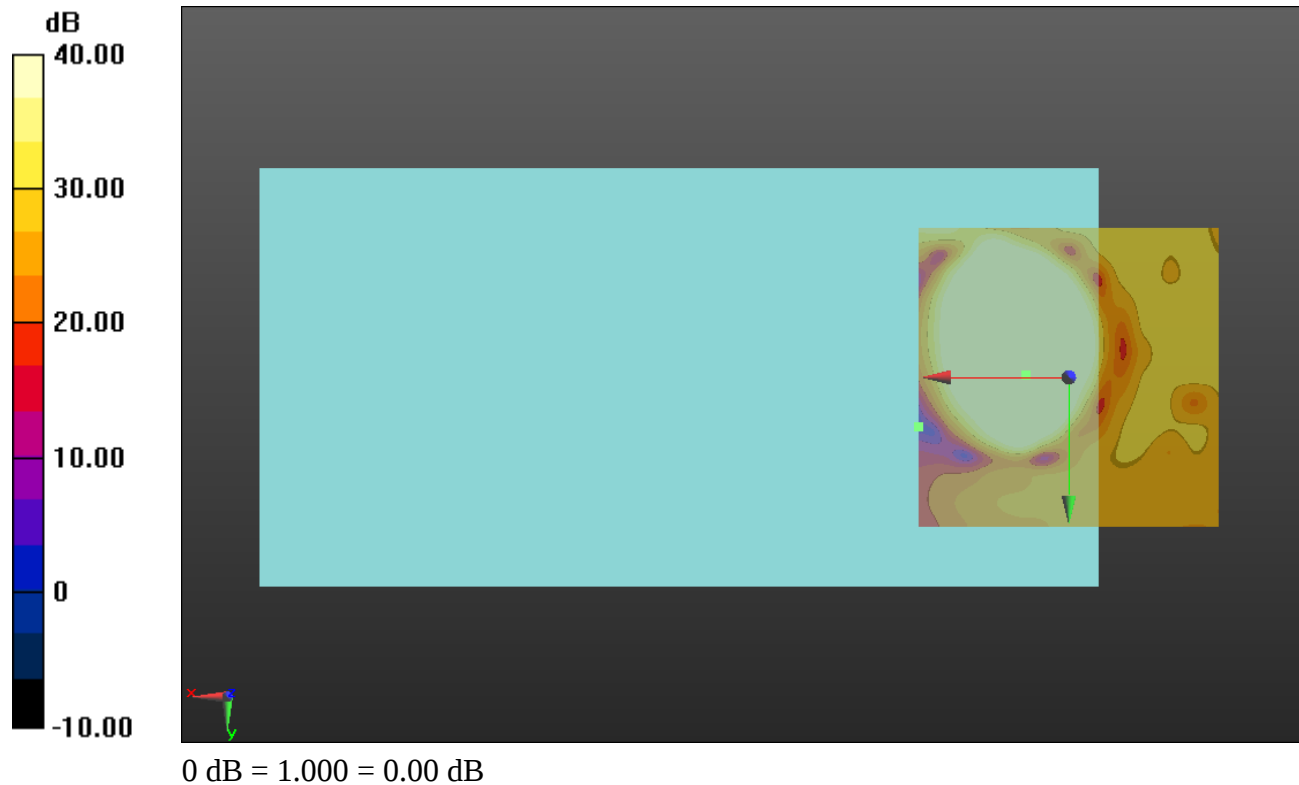

**802.11n\_ac 40**

Communication System: UID 0, IEEE 802.11a/n/ac 5 GHz Band; Frequency: 5755 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3092; ; Calibrated: 7/20/2017
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/8/2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (0);SEMCAD X Version 14.6.10 (7417)

**T-Coil scan (scan for ANSI C63.19 2011 compliance)/802.11n MSC0 ch 151\_NB 4.75 kbit/s/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated

grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 100

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1/ABM2 = 52.98 dB

ABM1 comp = 9.38 dBA/m

BWC Factor = 0.16 dB

Location: 7.1, 3.7, 3.7 mm

ABM2 = -28.03 dBA/m

Location: 25, 20.8, 3.7 mm

