
8.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 5.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS

8.8.1. HIGH POWER BASIC DATA RATE GFSK MODULATION


Antenna 2 SPURIOUS EMISSIONS, NON-HOPPING

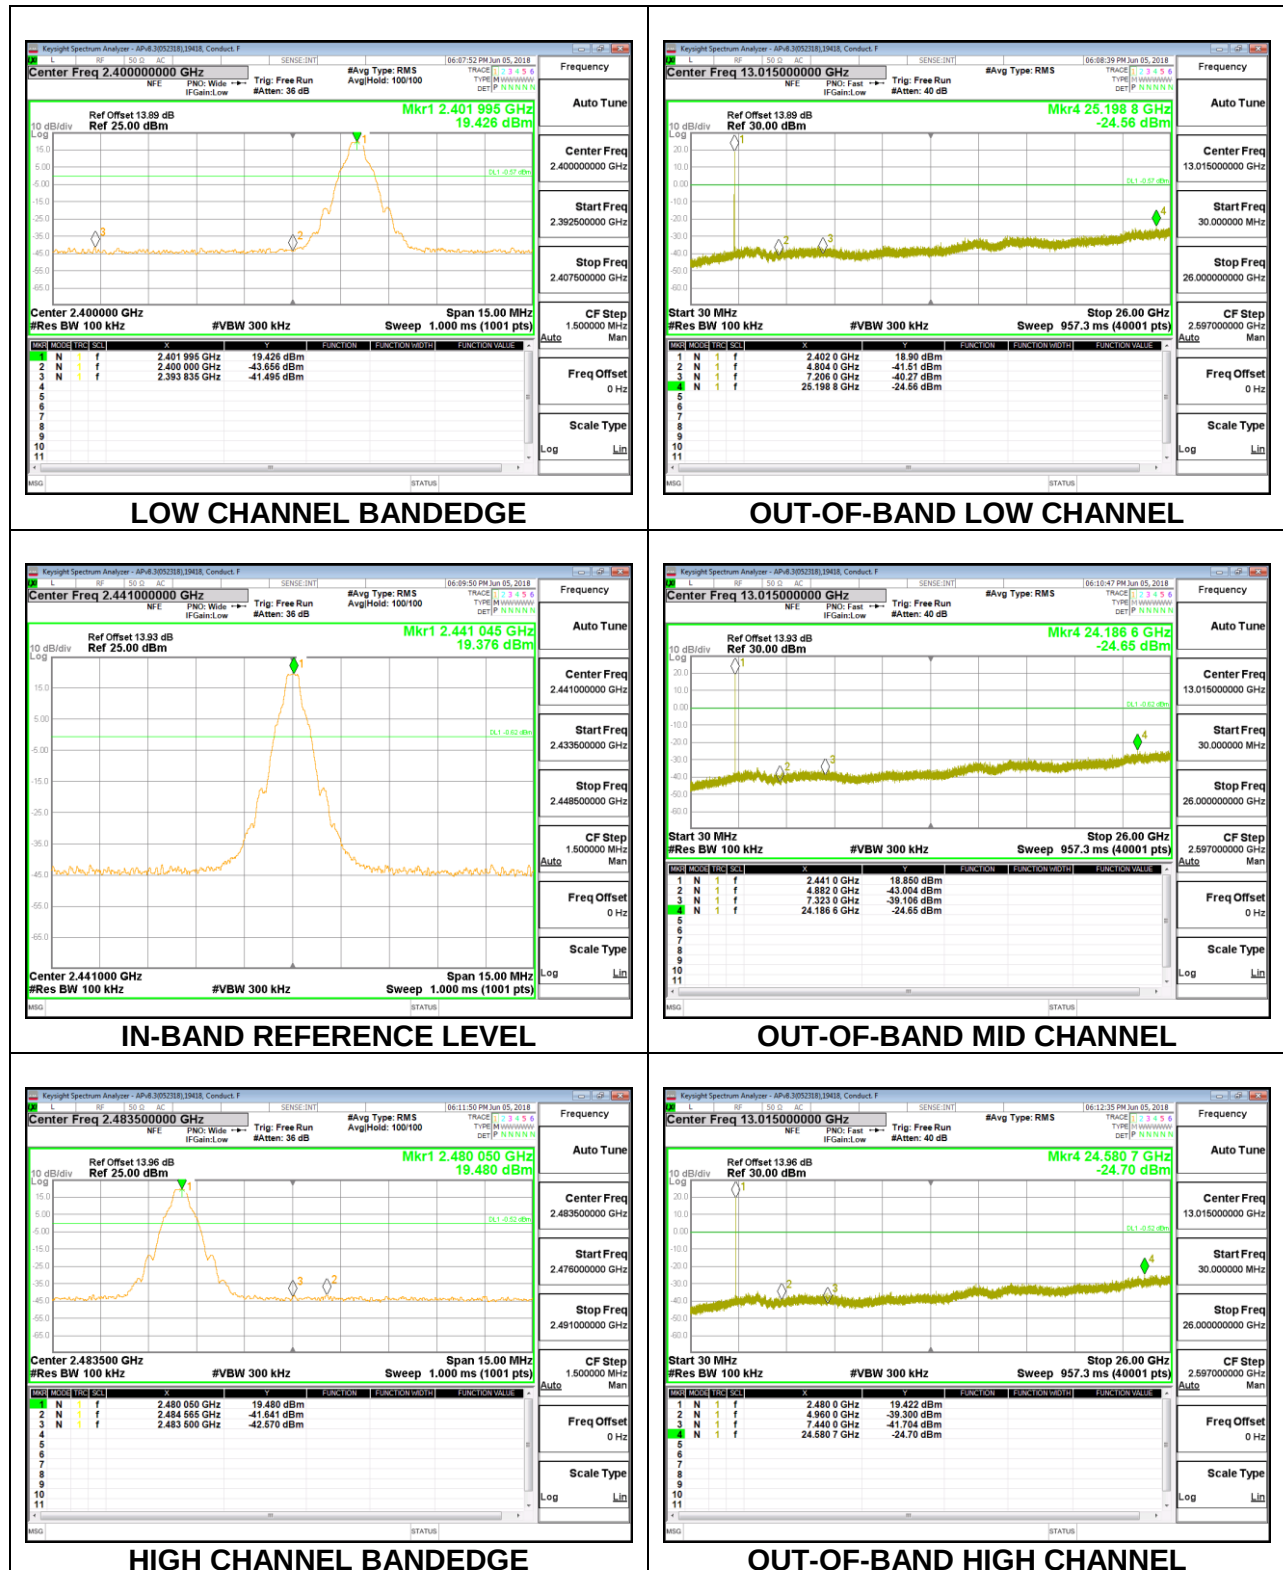


Antenna 2 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

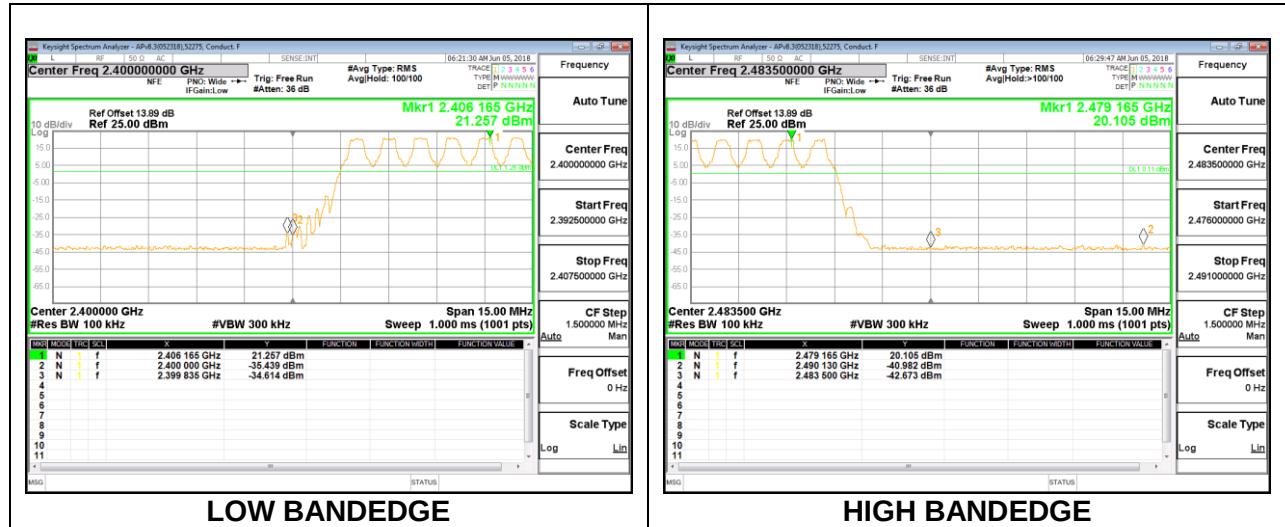


Antenna 5 SPURIOUS EMISSIONS, NON-HOPPING

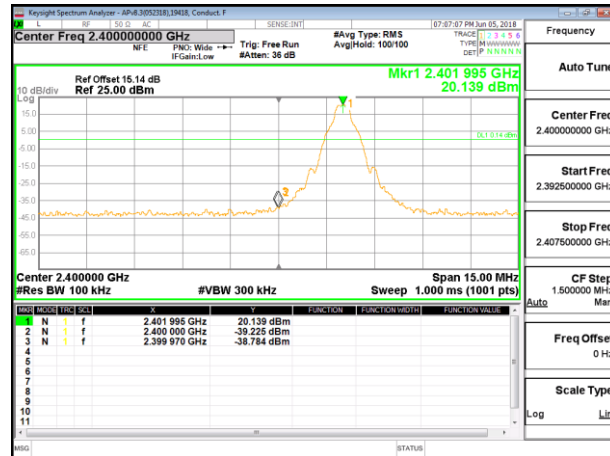


LOW CHANNEL BANDEDGE

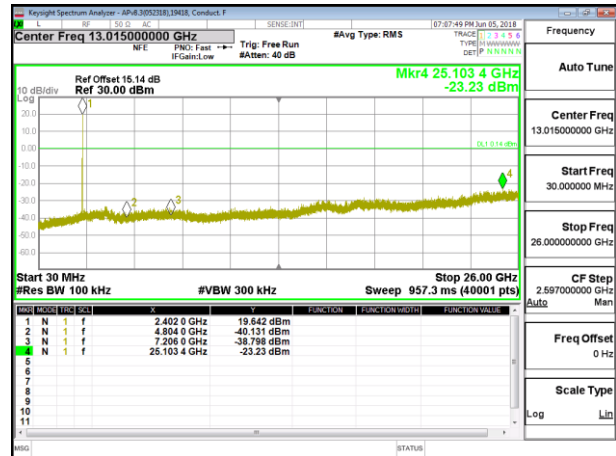


OUT-OF-BAND LOW CHANNEL

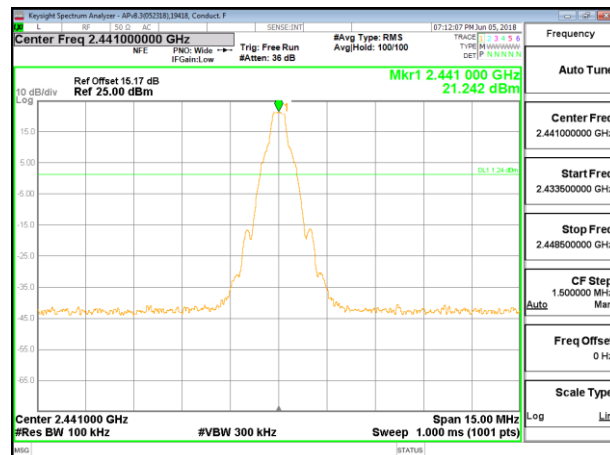


IN-BAND REFERENCE LEVEL

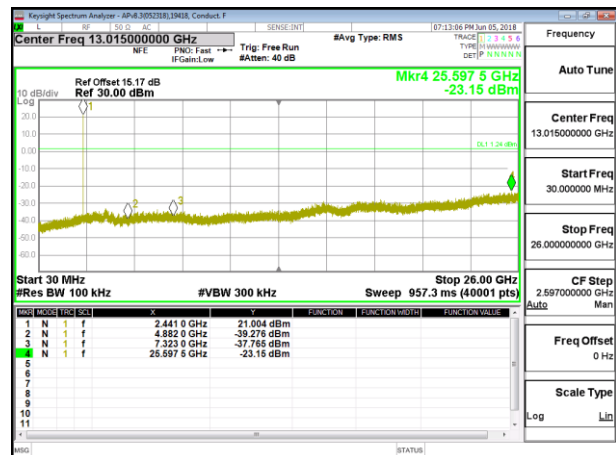

OUT-OF-BAND MID CHANNEL

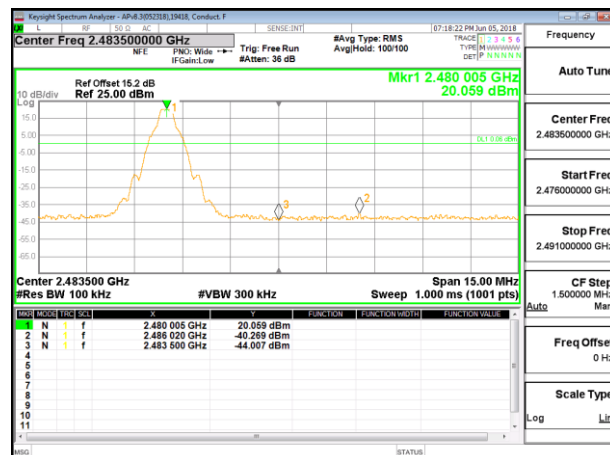


HIGH CHANNEL BANDEDGE

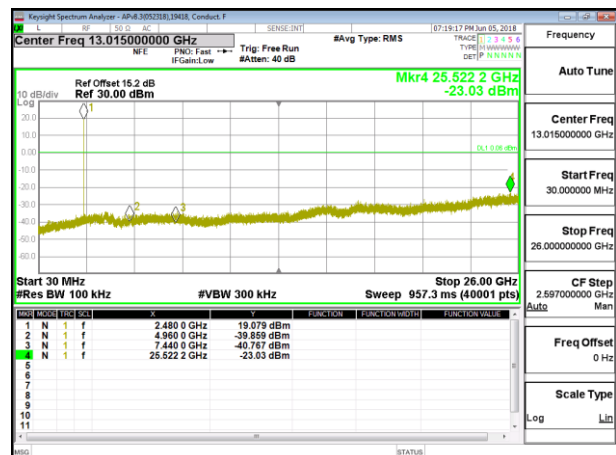


OUT-OF-BAND HIGH CHANNEL

Antenna 5 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

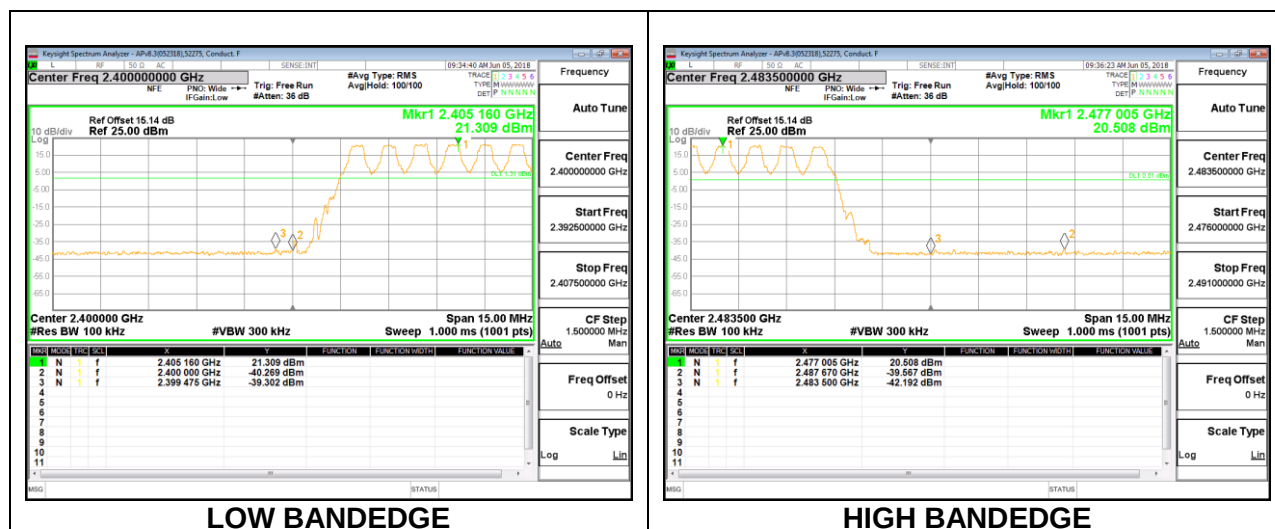


8.8.2. HIGH POWER ENCHANCED DATA RATE 8PSK MODULATION


Antenna 2 SPURIOUS EMISSIONS, NON-HOPPING

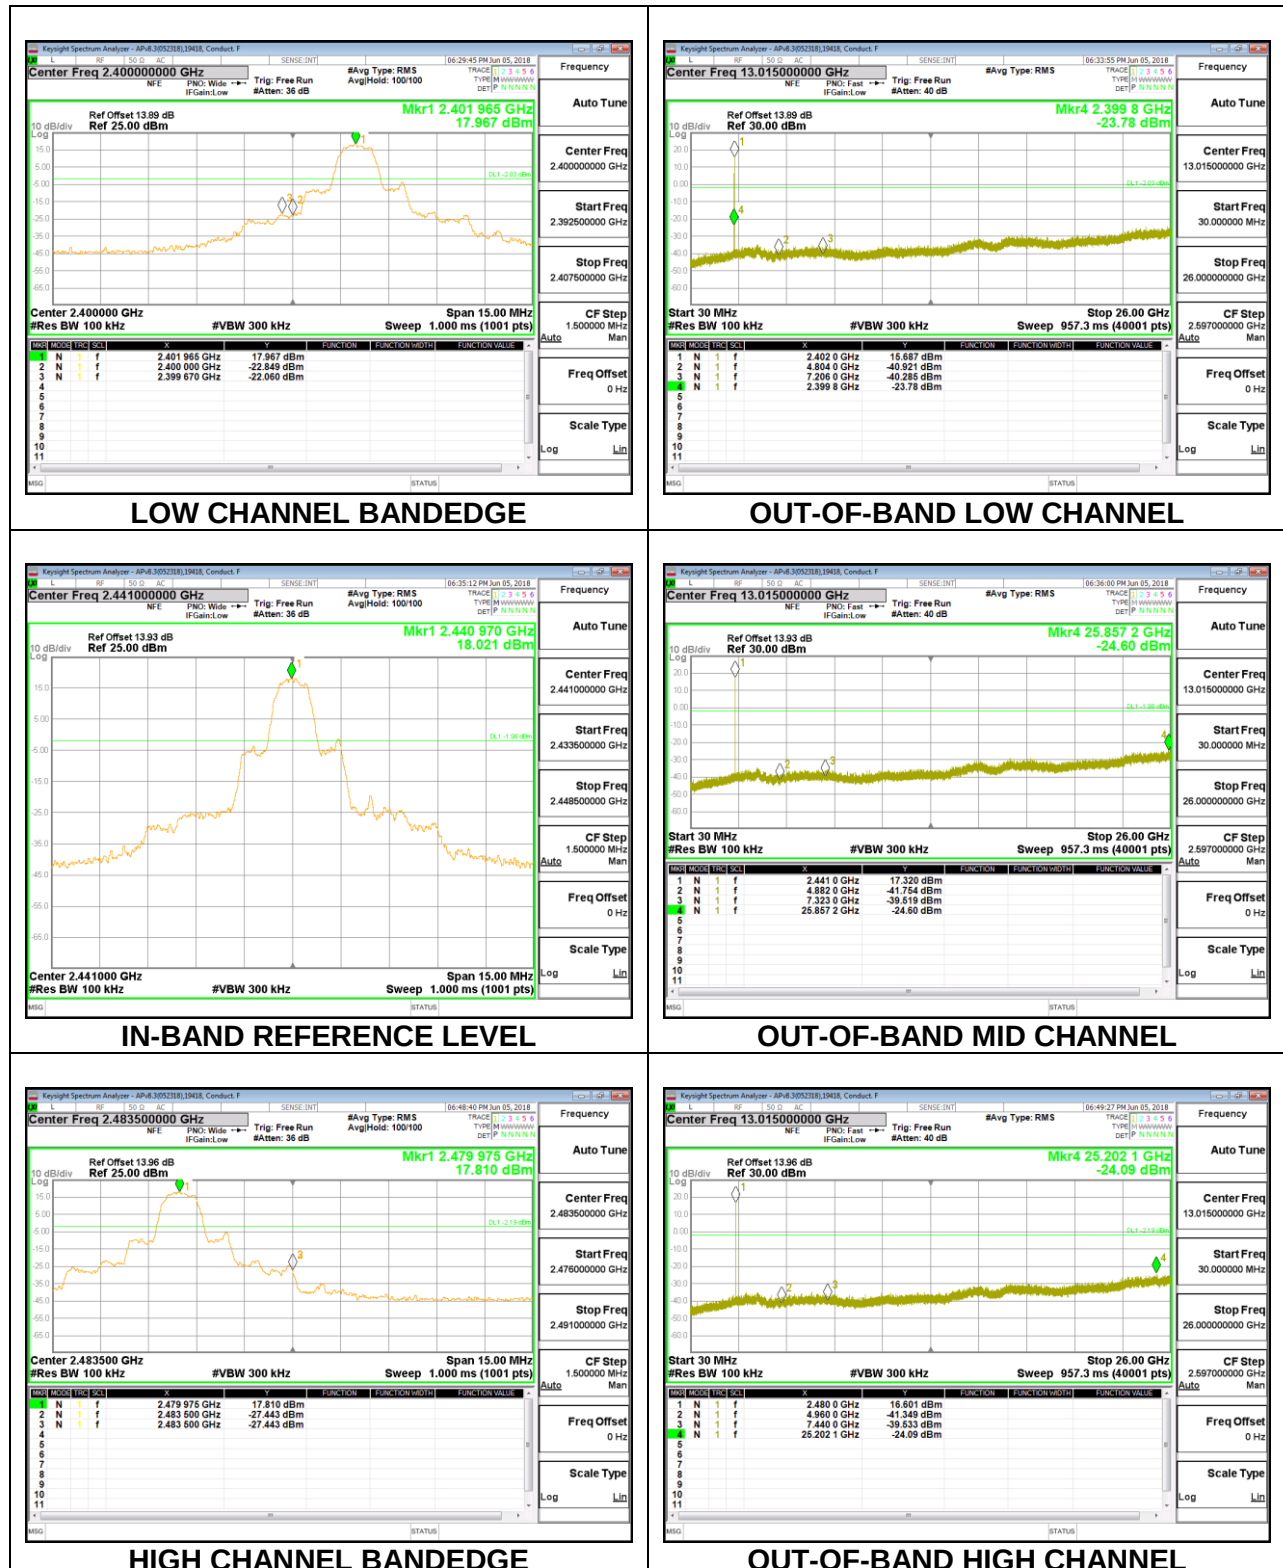


Antenna 2 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

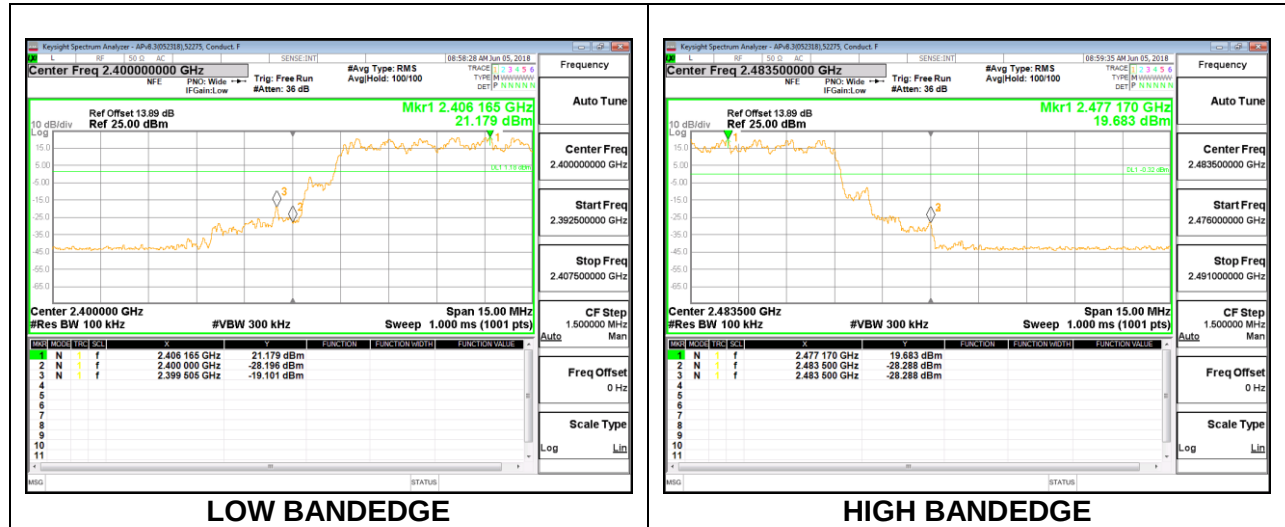

Antenna 5 SPURIOUS EMISSIONS, NON-HOPPING

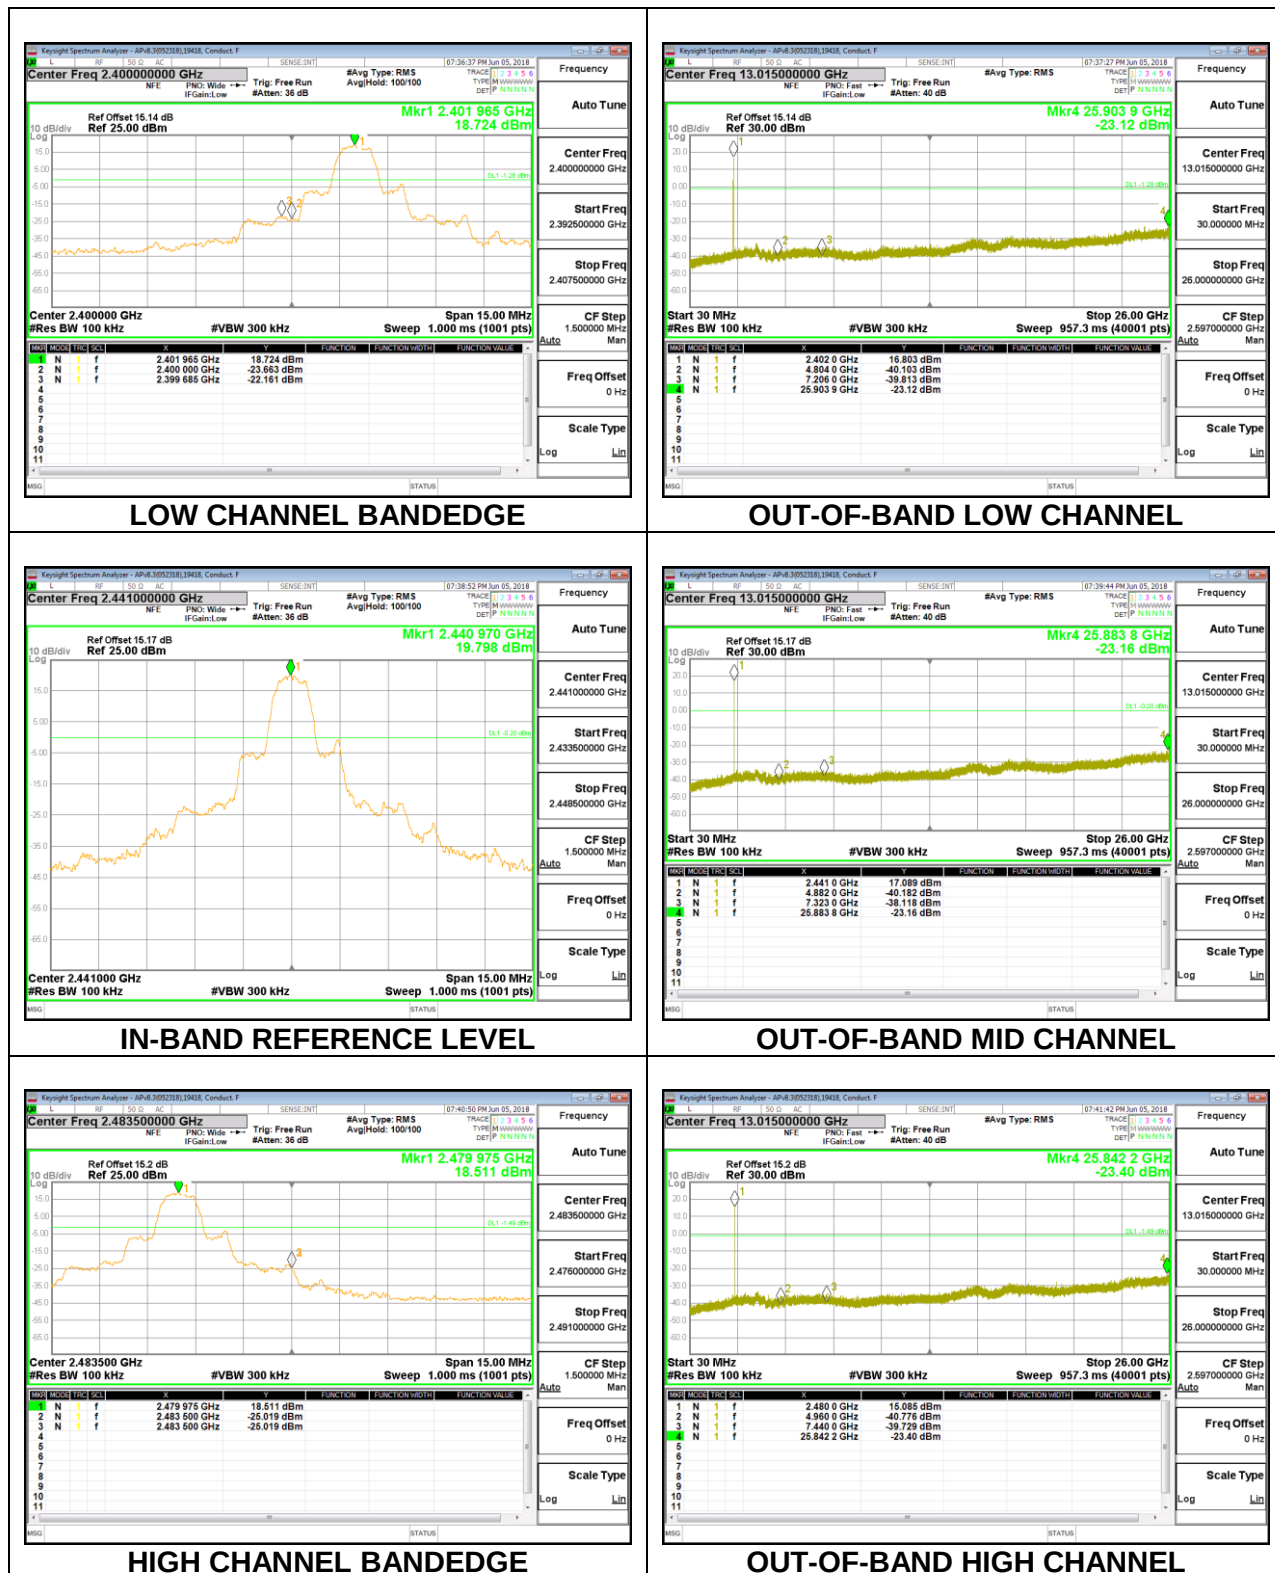


Antenna 5 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

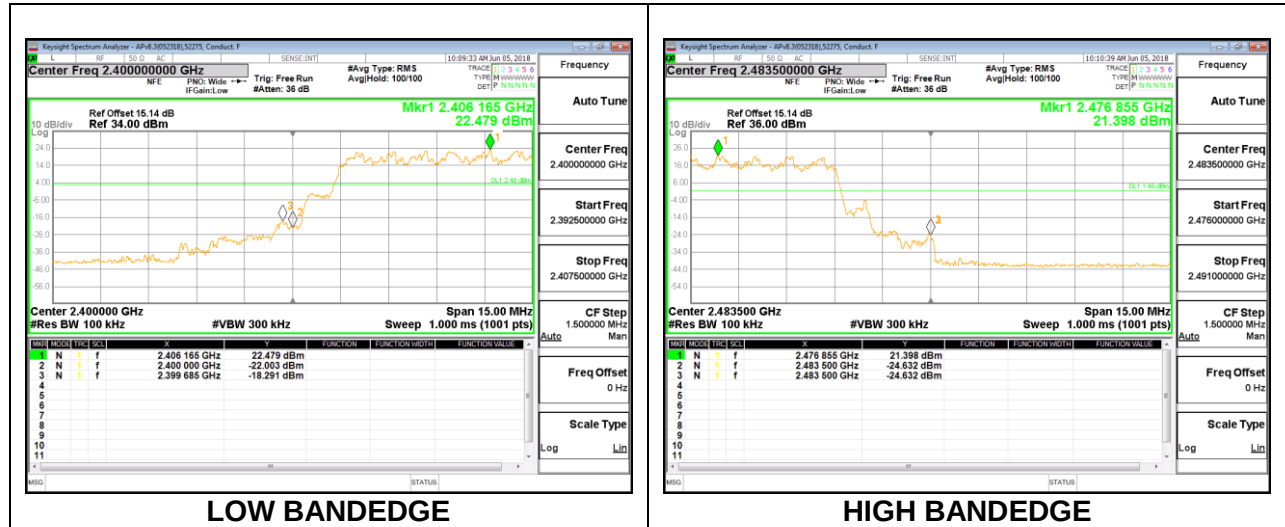


8.8.3. LOW POWER BASIC DATA RATE GFSK MODULATION


Antenna 2 SPURIOUS EMISSIONS, NON-HOPPING

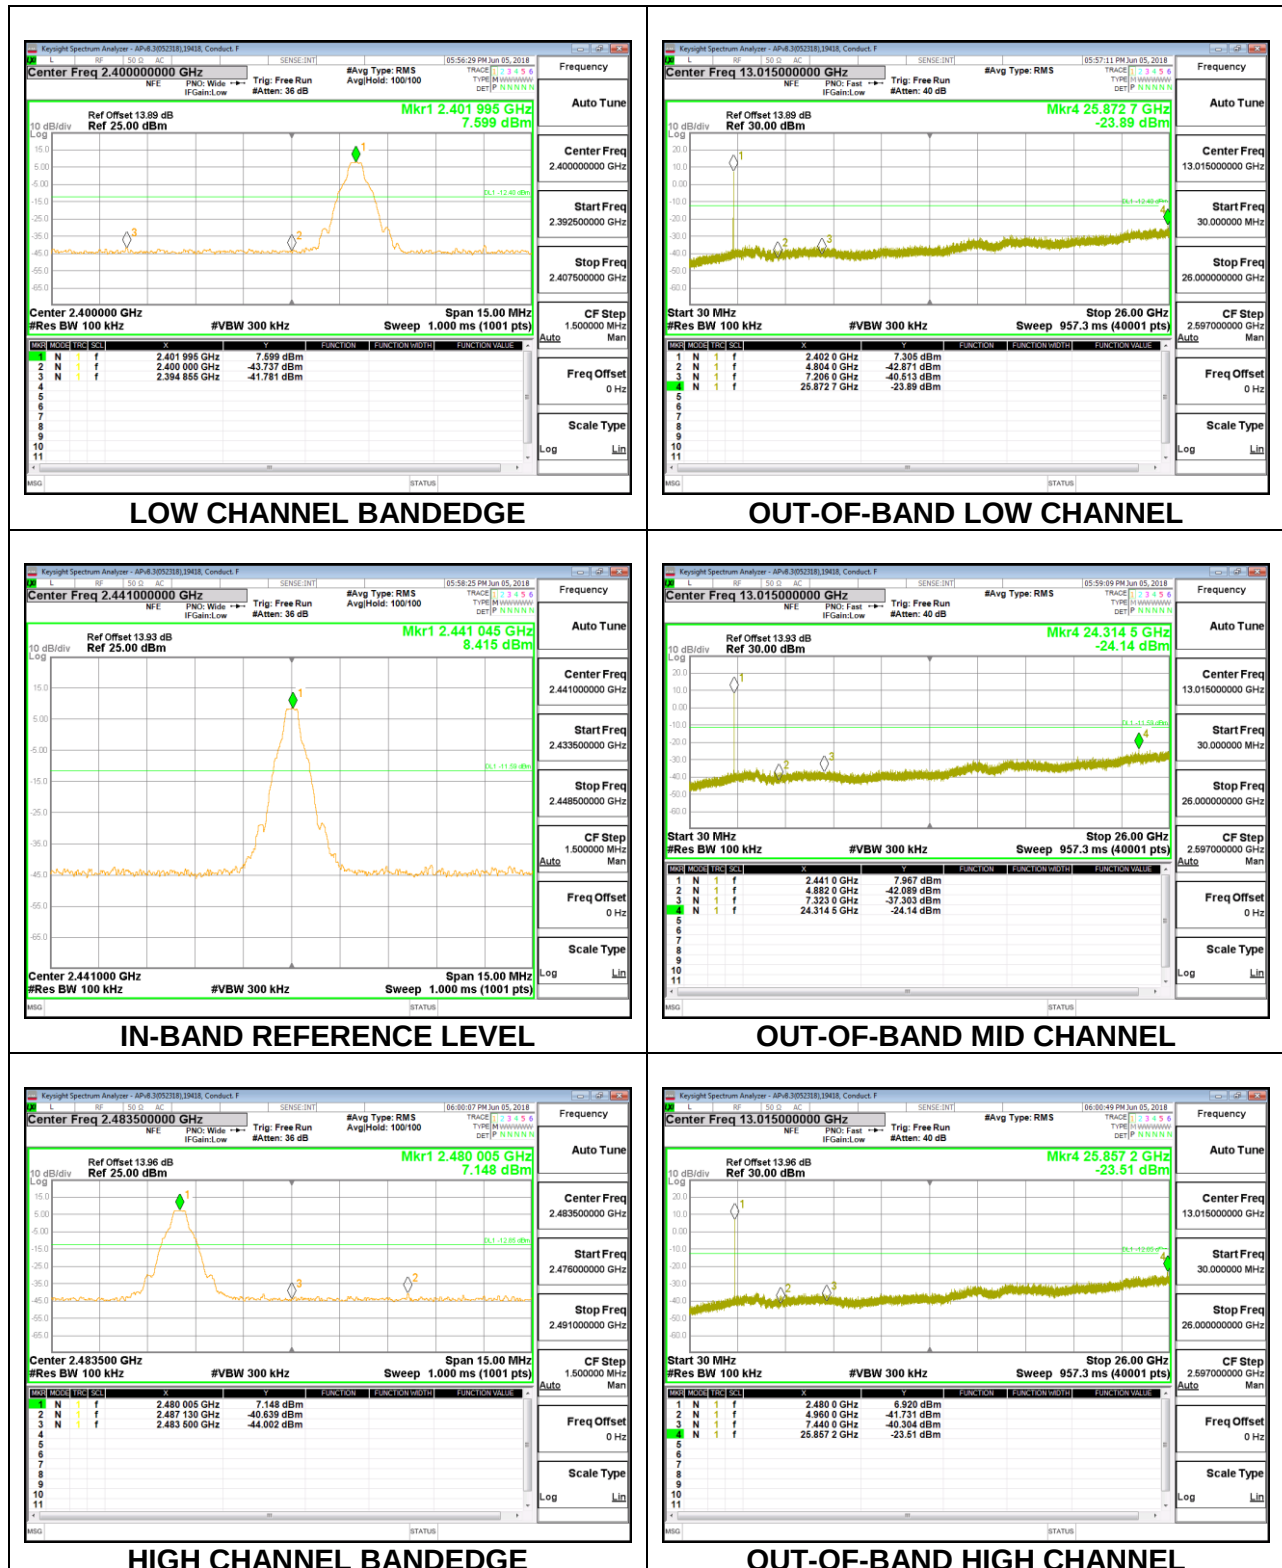


Antenna 2 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

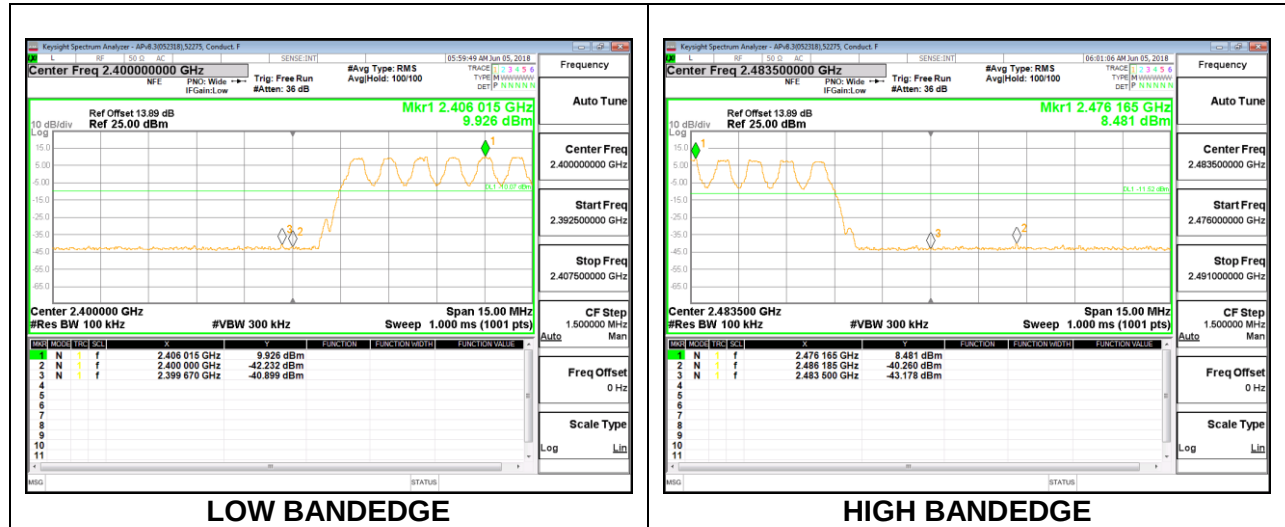

Antenna 5 SPURIOUS EMISSIONS, NON-HOPPING

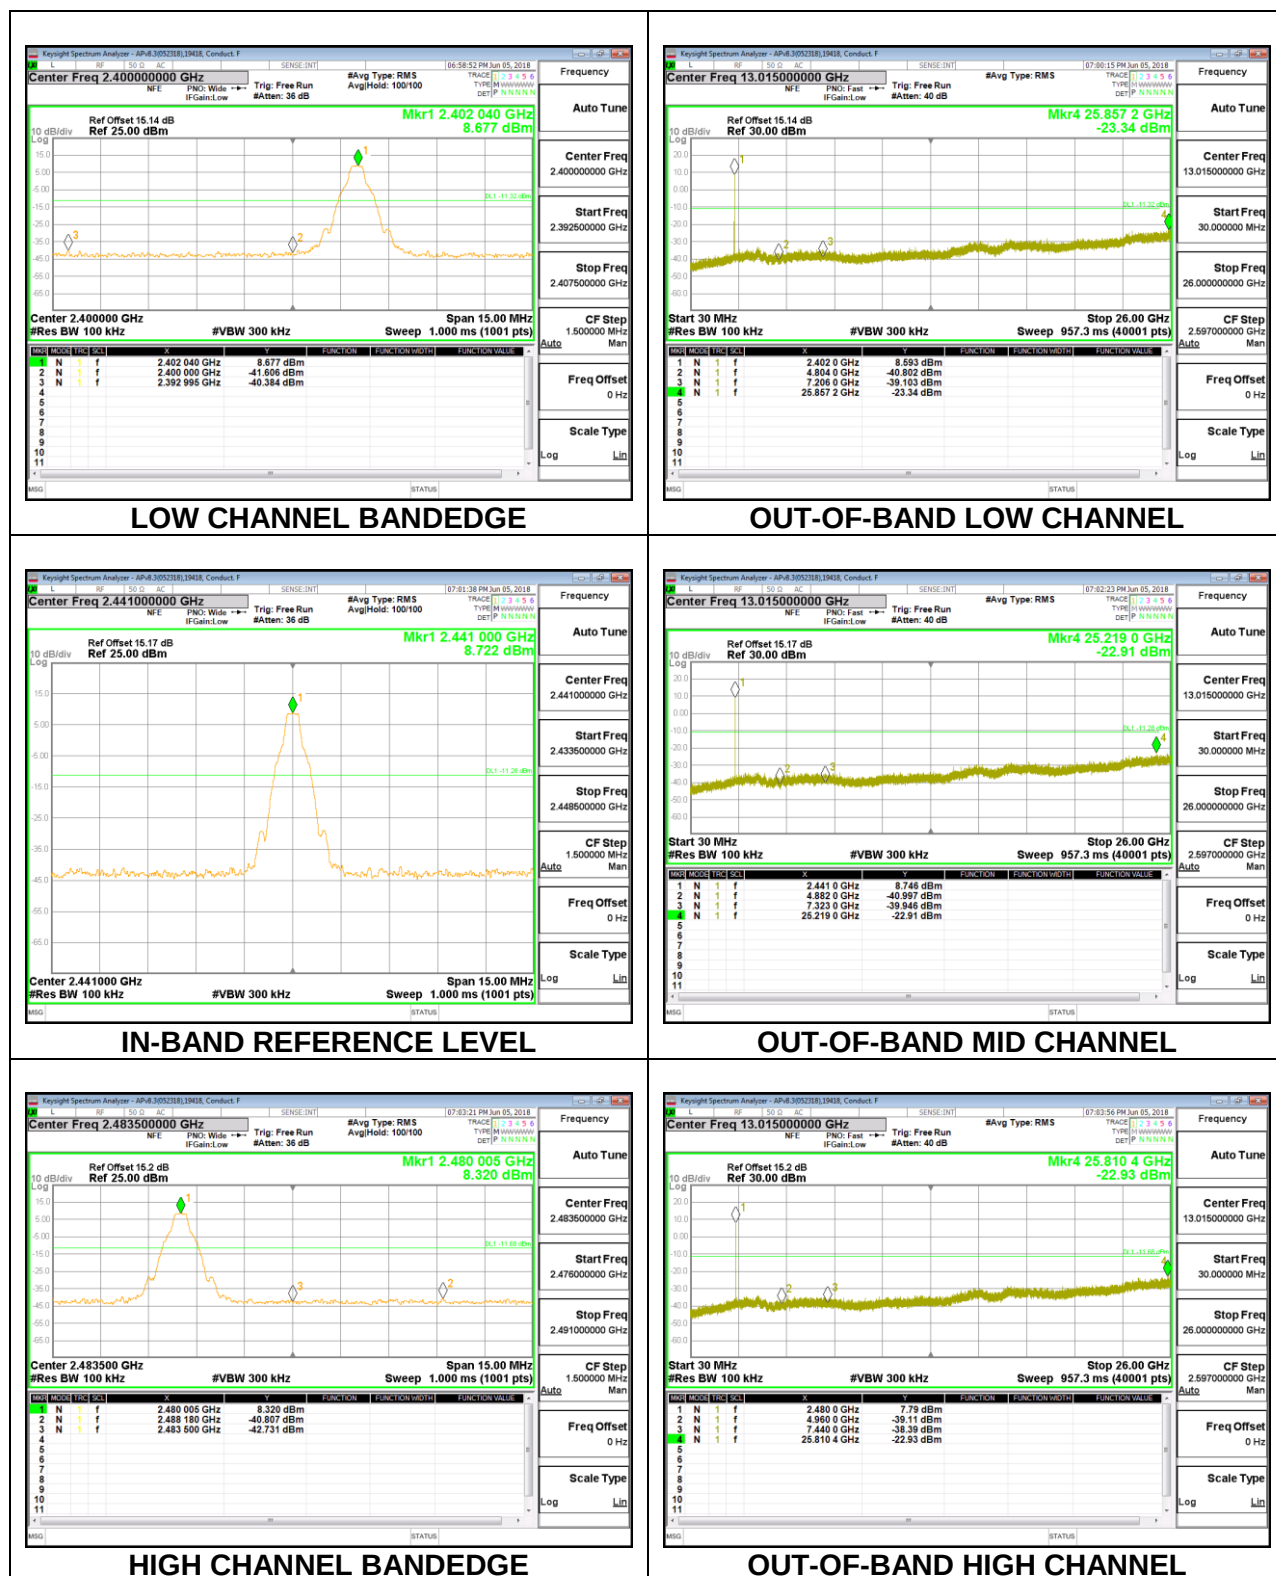


Antenna 5 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

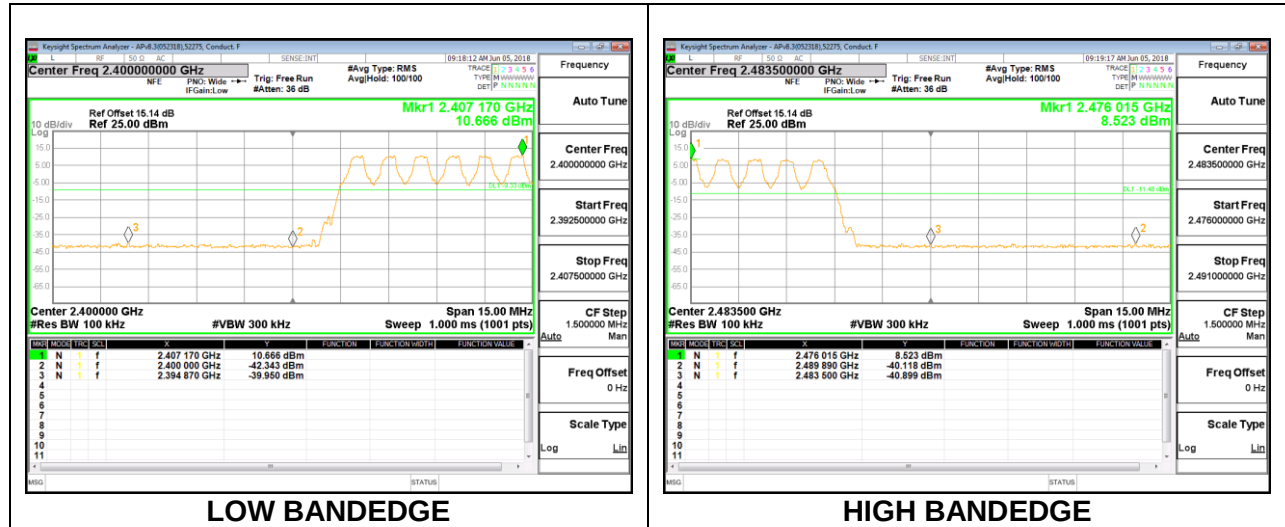


8.8.4. LOW POWER ENCHANCED DATA RATE 8PSK MODULATION

Antenna 2 SPURIOUS EMISSIONS, NON-HOPPING

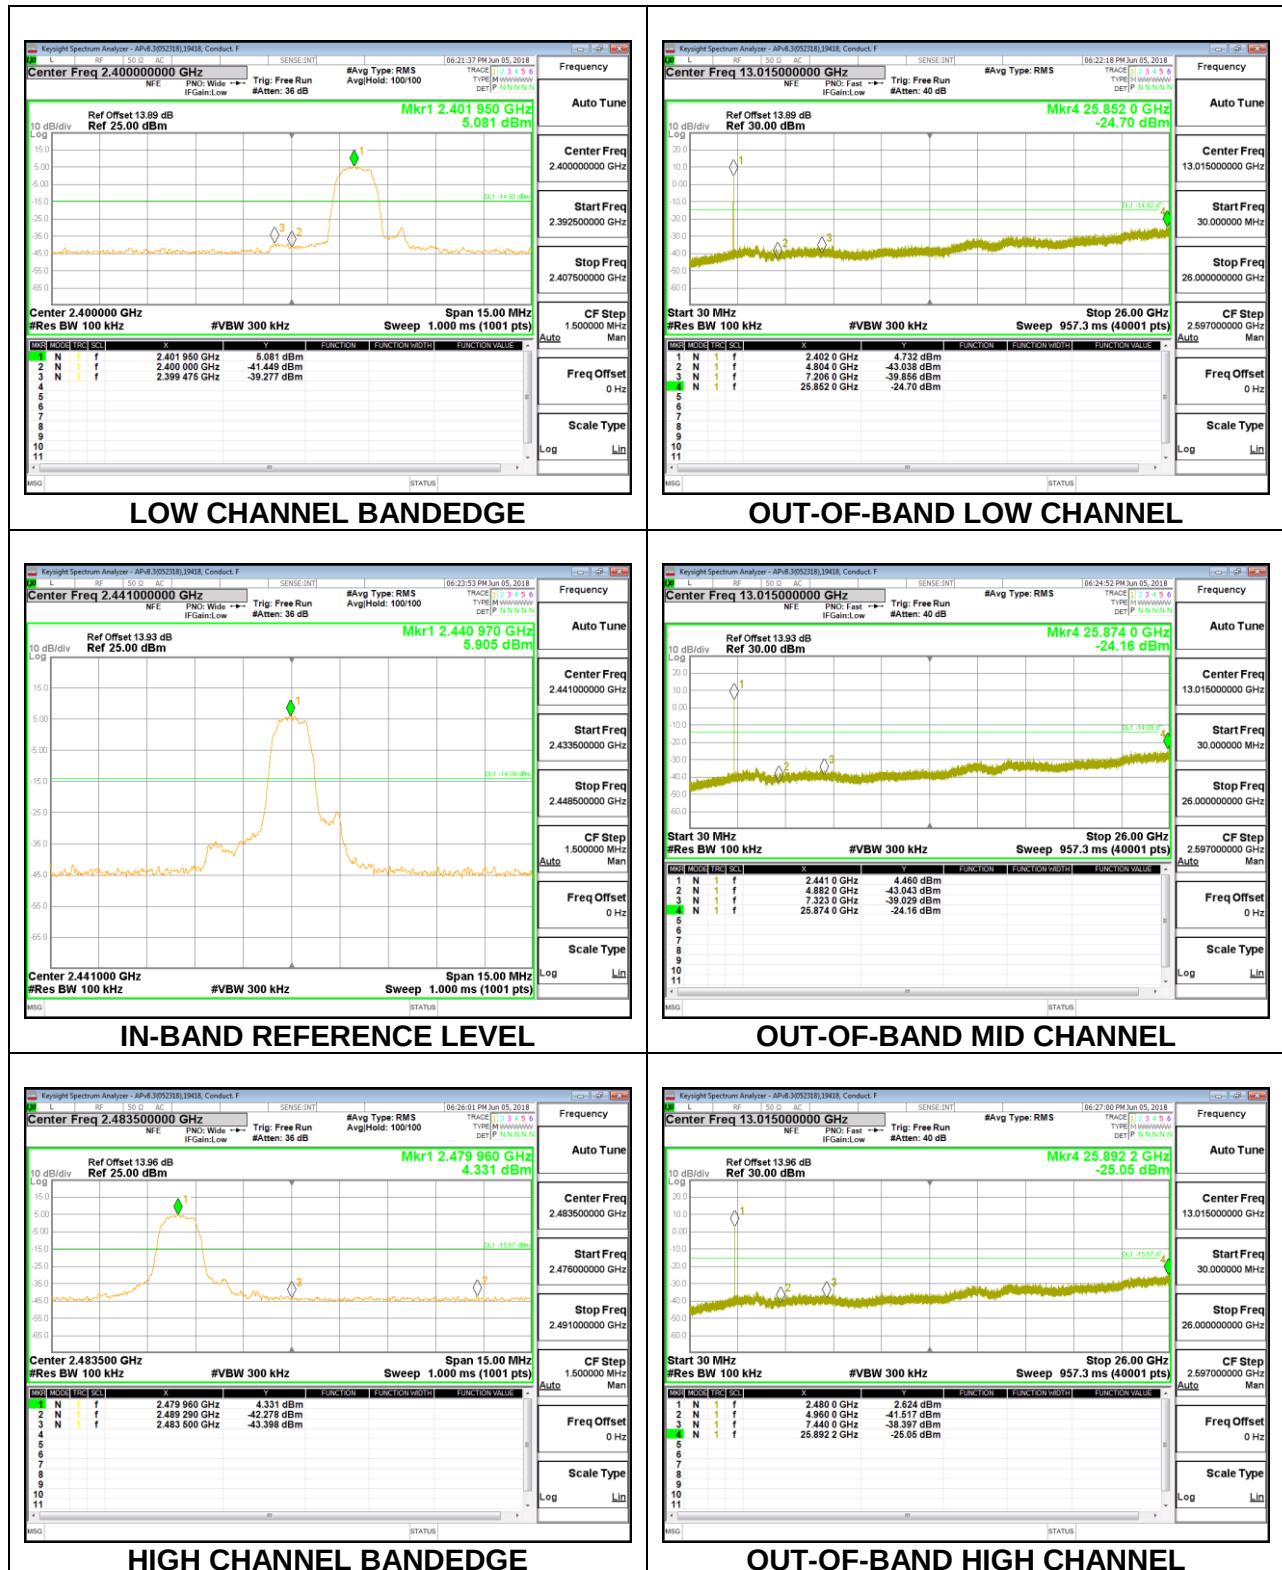

Antenna 2 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

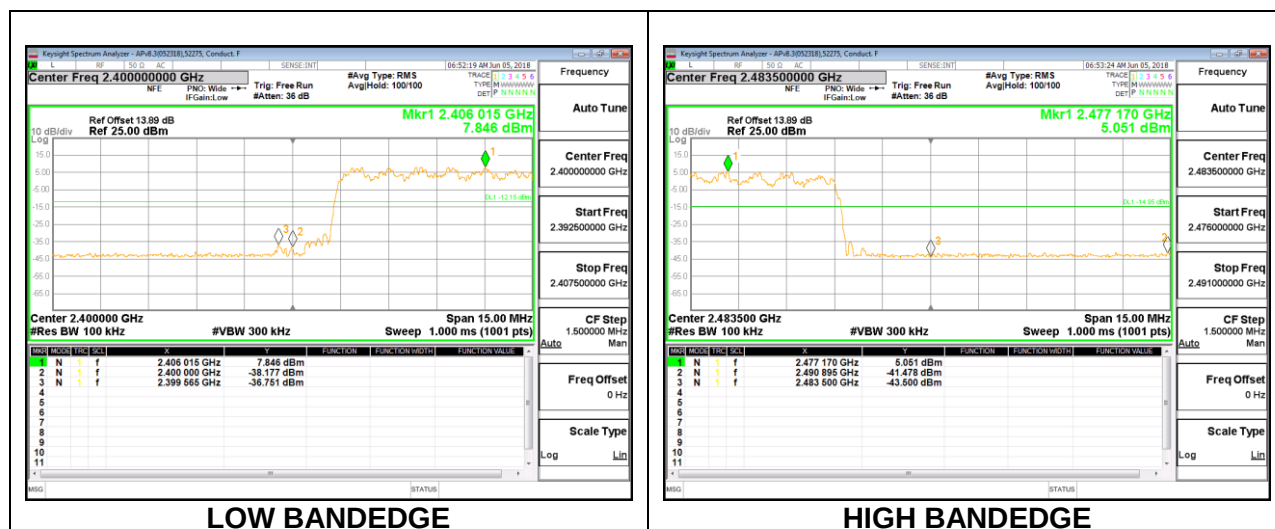

Antenna 5 SPURIOUS EMISSIONS, NON-HOPPING

