



# **CERTIFICATION TEST REPORT**

**Report Number. :** 12258201-E14V1

**Applicant :** APPLE, INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A.

**Model :** A2106

**FCC ID :** BCG-E3238A

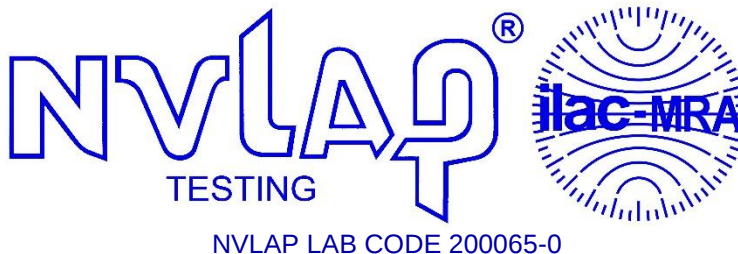
**IC :** 579C-E3238A

**EUT Description :** SMARTPHONE

**Test Standard(s) :** FCC PART 1 SUBPART I AND PART 2 SUBPART J  
IC RSS-102 ISSUE 5

**Date Of Issue:**  
AUGUST 24, 2018

**Prepared by:**  
UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888



Revision History

| Rev. | Issue Date | Revisions      | Revised By       |
|------|------------|----------------|------------------|
| V1   | 8/24/2018  | Initial Review | Mengistu Mekuria |

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS ..... 4

2. TEST METHODOLOGY ..... 5

3. REFERENCES ..... 5

4. FACILITIES AND ACCREDITATION ..... 5

5. EQUIPMENT UNDER TEST ..... 6

    5.1. DESCRIPTION OF EUT ..... 6

    5.2. WORST-CASE CONFIGURATION AND MODE ..... 6

6. MAXIMUM PERMISSIBLE RF EXPOSURE..... 8

    6.1. FCC RULES..... 8



    6.2. IC RULES..... 9

    6.3. EQUATIONS..... 10

    6.4. IC EXEMPTION..... 12

7. RF EXPOSURE RESULTS ..... 13

## 1. ATTESTATION OF TEST RESULTS

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Applicant Name and Address                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | APPLE, INC.<br>1 APPLE PARK WAY<br>CUPERTINO, CA 95014, U.S.A.                                       |
| Model                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | A2106                                                                                                |
| FCC ID                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | BCG-E3238A                                                                                           |
| IC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 579C-E3238A                                                                                          |
| EUT Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SMARTPHONE                                                                                           |
| Serial Number                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | C7CWN00RK3MY                                                                                         |
| Applicable Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | FCC PART 1 SUBPART I AND PART 2 SUBPART J<br>IC RSS-102 ISSUE 5                                      |
| Test Results                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | COMPLIES                                                                                             |
| <p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p> |                                                                                                      |
| Approved & Released By:<br>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Prepared By:<br> |
| Mengistu Mekuria<br>Lead Test Engineer<br>UL Verification Services Inc.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Lieu Nguyen<br>Laboratory Engineer<br>UL Verification Services Inc.                                  |

## 2. TEST METHODOLOGY

All calculations were made in accordance with FCC OET Bulletin 65 Edition 97-01 and IC Safety Code 6.

## 3. REFERENCES

All transmit characteristics used in this evaluations were documented in the UL Verification Services Inc. document 12258201-S1V1 (SAR report) and Antenna Gain exhibit

Output power and Duty cycle is excerpted from the SAR report. Antenna gain data is excerpted from Antenna Gain exhibit.

## 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at [NVLAP Lab Search](#).

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The Apple iPhone, is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac, Bluetooth, GPS and NFC. All models support at least one UICC based SIM. The second SIM is either UICC based, electronic SIM (e-SIM), or second SIM is not present. The device has a built-in inductive charging receiver which is not user accessible. The rechargeable battery is not user accessible.

The MPE analysis performed in this report evaluates a unique mobile use case where the handset is placed on a Apple proprietary wireless charger. The cellular, WiFi and Bluetooth transmitters can be active while being charged. The power levels used and reported in this analysis are specific for this use condition only. Simultaneous transmission for these transmitters are analyzed herein without the wireless charger. The simultaneous transmission use condition and permitted configuration together with the charger will be addressed in the applicable wireless charger certification application

### 5.2. WORST-CASE CONFIGURATION AND MODE

The worst-case is when the EUT is transmitting on the highest power allowed for each of the transmit bands, as specified in the SAR reports

The table below is used to determine the worst-case co-located simultaneous transmission for evaluation.

| Simultaneous Transmission | Technology         | WLAN 2.4 | BT 2.4 | WLAN 5G |
|---------------------------|--------------------|----------|--------|---------|
| Technology                | Output Power (dBm) | 22.0     | 20.0   | 21.5    |
| GSM 850 1 Slot            | 33.0               | **       | **     | **      |
| GSM 851 2 Slot            | 32.0               | **       | **     | **      |
| GSM 1900                  | 31.5               | **       | **     | **      |
| WCDMA Band II             | 25.5               | **       | **     | **      |
| WCDMA Band IV             | 25.5               | **       | **     | **      |
| WCDMA Band V              | 25.5               | **       | **     | **      |
| CDMA/EVDO BC0             | 25.5               | **       | **     | **      |
| CDMA/EVDO BC1             | 25.5               | **       | **     | **      |
| CDMA/EVDO BC10            | 25.5               | **       | **     | **      |
| LTE Band 2                | 25.5               | **       | **     | **      |
| LTE Band 5                | 25.5               | **       | **     | **      |
| LTE Band 7                | 25.5               | **       | **     | **      |
| LTE Band 12               | 25.5               | **       | **     | **      |
| LTE Band 13               | 25.5               | *        | *      | *       |
| LTE Band 14               | 25.5               | **       | **     | **      |
| LTE Band 17               | 25.5               | **       | **     | **      |
| LTE Band 25               | 25.5               | **       | **     | **      |
| LTE Band 26               | 25.5               | **       | **     | **      |
| LTE Band 30               | 23.5               | **       | **     | **      |
| LTE Band 41               | 27.0               | **       | **     | **      |
| LTE Band 66               | 25.5               | **       | **     | **      |

Note: \* Worst Case for the Co-located MPE Calculation based on the output powers.

\*\* Not the worst case

The LTE Band 13 may have been used as a worst-case, because it does provide the lowest margin of power density to the FCC limit.

## 6. MAXIMUM PERMISSIBLE RF EXPOSURE

### 6.1. FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

**TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

| Frequency range (MHz)                                          | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|----------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(A) Limits for Occupational/Controlled Exposure</b>         |                               |                               |                                     |                          |
| 0.3-3.0                                                        | 614                           | 1.63                          | *100                                | 6                        |
| 3.0-30                                                         | 1842/f                        | 4.89/f                        | *900/f <sup>2</sup>                 | 6                        |
| 30-300                                                         | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300-1,500                                                      |                               |                               | f/300                               | 6                        |
| 1,500-100,000                                                  |                               |                               | 5                                   | 6                        |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34                                                       | 614                           | 1.63                          | *100                                | 30                       |
| 1.34-30                                                        | 824/f                         | 2.19/f                        | *180/f <sup>2</sup>                 | 30                       |
| 30-300                                                         | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1,500                                                      |                               |                               | f/1500                              | 30                       |
| 1,500-100,000                                                  |                               |                               | 1.0                                 | 30                       |

f = frequency in MHz

\* = Plane-wave equivalent power density

#### **Notes:**

- (1) Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when a person is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.
- (2) General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure

## 6.2. IC RULES

IC Safety Code 6 (2015), Section 2.2.2: To ensure compliance with the basic restrictions outlined in Section 2.1, at frequencies between 10 MHz and 300 GHz, the reference levels for electric- and magnetic-field strength and power density must be complied with.

**TABLE 2:** Reference Levels for Electric Field Strength, Magnetic Field Strength and Power Density in Uncontrolled Environments

| Table 2: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment) |                          |                               |                                   |                            |
|-----------------------------------------------------------------------------------------------------|--------------------------|-------------------------------|-----------------------------------|----------------------------|
| <b>Note:</b> $f$ is frequency in MHz.                                                               |                          |                               |                                   |                            |
| Frequency Range (MHz)                                                                               | Electric Field (V/m rms) | Magnetic Field (A/m rms)      | Power Density (W/m <sup>2</sup> ) | Reference Period (minutes) |
| 10-20                                                                                               | 27.46                    | 0.0728                        | -2                                | 6                          |
| 20-48                                                                                               | $58.07/f^{0.25}$         | $0.1540/f^{0.25}$             | $8.944/f^{0.5}$                   | 6                          |
| 48-300                                                                                              | 22.06                    | 0.05852                       | 1.291                             | 6                          |
| 300-6000                                                                                            | $3.142 f^{0.3417}$       | $0.008335 f^{0.3417}$         | $0.02619 f^{0.6834}$              | 6                          |
| 6000-15000                                                                                          | 61.4                     | 0.163                         | 10                                | 6                          |
| 15000-150000                                                                                        | 61.4                     | 0.163                         | 10                                | $616000/f^{1.2}$           |
| 150000-300000                                                                                       | $0.158 f^{0.5}$          | $4.21 \times 10^{-4} f^{0.5}$ | $6.67 \times 10^{-5} f$           | $616000/f^{1.2}$           |

**TABLE 3:** Reference Levels for Electric Field Strength, Magnetic Field Strength and Power Density in Controlled Environments

| Table 3: RF Field Strength Limits for Controlled Use Devices (Controlled Environment) |                          |                               |                                   |                            |
|---------------------------------------------------------------------------------------|--------------------------|-------------------------------|-----------------------------------|----------------------------|
| <b>Note:</b> $f$ is frequency in MHz.                                                 |                          |                               |                                   |                            |
| Frequency Range (MHz)                                                                 | Electric Field (V/m rms) | Magnetic Field (A/m rms)      | Power Density (W/m <sup>2</sup> ) | Reference Period (minutes) |
| 10-20                                                                                 | 61.4                     | 0.163                         | -10                               | 6                          |
| 20-48                                                                                 | $129.8/f^{0.25}$         | $0.3444/f^{0.25}$             | $44.72/f^{0.5}$                   | 6                          |
| 48-100                                                                                | 49.33                    | 0.1309                        | 6.455                             | 6                          |
| 100-6000                                                                              | $15.60 f^{0.25}$         | $0.04138 f^{0.25}$            | $0.6455 f^{0.5}$                  | 6                          |
| 6000-15000                                                                            | 137                      | 0.364                         | 50                                | 6                          |
| 15000-150000                                                                          | 137                      | 0.364                         | 50                                | $616000/f^{1.2}$           |
| 150000-300000                                                                         | $0.354 f^{0.5}$          | $9.40 \times 10^{-4} f^{0.5}$ | $3.33 \times 10^{-4} f$           | 616000                     |

### 6.3. EQUATIONS

#### POWER DENSITY

Power density is given by:

$$S = \text{EIRP} / (4 * \text{Pi} * D^2)$$

Where

S = Power density in mW/cm<sup>2</sup>

EIRP = Equivalent Isotropic Radiated Power in mW

D = Separation distance in cm

Power density in units of mW/cm<sup>2</sup> is converted to units of W/m<sup>2</sup> by multiplying by 10.

#### DISTANCE

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \text{Pi} * S))$$

Where

D = Separation distance in cm

EIRP = Equivalent Isotropic Radiated Power in mW

S = Power density in mW/cm<sup>2</sup>

#### SOURCE-BASED DUTY CYCLE

Where applicable (for example, multi-slot cell phone applications) a duty cycle factor may be applied.

$$\text{Source-based time-averaged EIRP} = (\text{DC} / 100) * \text{EIRP}$$

Where

DC = Duty Cycle in %, as applicable

EIRP = Equivalent Isotropic Radiated Power in W

**MIMO AND CO-LOCATED TRANSMITTERS (Identical limits for Transmitters)**

For multiple chain devices, and colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the EIRP (in linear units) of each transmitter.

$$\text{Total EIRP} = (\text{EIRP1}) + (\text{EIRP2}) + \dots + (\text{EIRPn})$$

where

EIRPx = Source-based time-averaged EIRP of chain x or transmitter x

The total EIRP is then used to calculate the Power Density or the Distance as applicable.

**MIMO AND COLOCATED TRANSMITTERS (Different limits for Transmitter)**

For multiple colocated transmitters operating simultaneously in frequency bands where different limits apply:

The Power Density at the specified separation distance is calculated for each transmitter chain or transmitter.

The fraction of the exposure limit is calculated for each chain or transmitter as  
(Power Density of chain or transmitter) / (Limit applicable to that chain or transmitter).

The fractions are summed.

Compliance is established if the sum of the fractions is less than or equal to one.

## 6.4. IC EXEMPTION

### INDUSTRY CANADA EXEMPTION

RSS-102 Clause 2.5.2 RF exposure evaluation is required if the separation distance between the user and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;

## 7. RF EXPOSURE RESULTS

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

(Single chain transmitters, no co-location, 20 cm MPE distance)

These all use Mode A maximum power ratings (Mode B is when body detect power tables are enabled and device is being body-worn or hand-held)

|                                           | WWAN - worst case EIRP in each operating band across all supported cellular protocols |        |        |        |            |        |       |        |       |
|-------------------------------------------|---------------------------------------------------------------------------------------|--------|--------|--------|------------|--------|-------|--------|-------|
| Mode / Band                               | LTE 12                                                                                | LTE 13 | LTE 14 | LTE 26 | GSM 2 slot | LTE 66 | LTE 2 | LTE 30 | LTE 7 |
| Frequency (MHz)                           | 698                                                                                   | 776    | 788    | 814    | 824        | 1710   | 1850  | 2305   | 2500  |
| Output power (dBm)                        | 25.50                                                                                 | 25.50  | 25.50  | 25.50  | 32.00      | 25.50  | 25.50 | 23.50  | 25.50 |
| Gain (dBi)                                | -3.6                                                                                  | -2.6   | -2.6   | -3.9   | -3.3       | -0.8   | 0.2   | -1.8   | -0.9  |
| Duty Cycle                                | 100%                                                                                  | 100%   | 100%   | 100%   | 25%        | 100%   | 100%  | 100%   | 100%  |
| EIRP (mW) (RF exposure)                   | 155                                                                                   | 195    | 195    | 145    | 185        | 295    | 372   | 148    | 288   |
| Distance (cm)                             | 20                                                                                    | 20     | 20     | 20     | 20         | 20     | 20    | 20     | 20    |
| Power density (mW/cm <sup>2</sup> )       | 0.031                                                                                 | 0.039  | 0.039  | 0.029  | 0.037      | 0.059  | 0.074 | 0.029  | 0.057 |
| FCC Limit (mW/cm <sup>2</sup> )           | 0.47                                                                                  | 0.52   | 0.53   | 0.54   | 0.55       | 1.00   | 1.00  | 1.00   | 1.00  |
| % of FCC limit                            | 6.6%                                                                                  | 7.5%   | 7.4%   | 5.3%   | 6.7%       | 5.9%   | 7.4%  | 2.9%   | 5.7%  |
| Power density (W/m <sup>2</sup> )         | 0.31                                                                                  | 0.39   | 0.39   | 0.29   | 0.37       | 0.59   | 0.74  | 0.29   | 0.57  |
| Industry Canada Limit (W/m <sup>2</sup> ) | 2.30                                                                                  | 2.47   | 2.50   | 2.55   | 2.58       | 4.24   | 4.48  | 5.20   | 5.50  |
| % of ISED limit                           | 13.4%                                                                                 | 15.7%  | 15.5%  | 11.3%  | 14.3%      | 13.8%  | 16.5% | 5.7%   | 10.4% |

Based on the Power density calculations, all values meet the IC limits specified in section 6.4 and are exempt from routine RF exposure evaluation.

(MIMO and/or Co-located transmitters all with same Power Density limit, 20 cm MPE distance)

### Notes:

- 1) For MPE the new KDB 447498 requires the calculations to use the maximum rated power; that power should be declared by the manufacturer, and should not be lower than the measured power. If the power has a tolerance then we also need to check that the measured power is within the tolerance.
- 2) The manufacturer configures output power so that the maximum power, after accounting for manufacturing tolerances, will never exceed the maximum power level measured.
- 3) The output power in the tables above is the maximum power per chain among various channels and various modes within the specific band.
- 4) The antenna gain in the tables above is the maximum antenna gain among various channels within the specified band.

(MIMO and/or Co-located transmitters with different Power Density limits among bands)

For simultaneous conditions sum the % for the active transmitters, result must be less than 100%.

For simultaneous conditions check total eirp does not exceed thresholds that might require routine evaluation (measurement)

| Mode                                      | Standalone SISO |           | Standalone MIMO |           | Cellular On SISO |           | Cellular on MIMO |           |
|-------------------------------------------|-----------------|-----------|-----------------|-----------|------------------|-----------|------------------|-----------|
| Band                                      | 2.4G Wifi       | 5Ghz Wifi | 2.4G Wifi       | 5Ghz Wifi | 2.4G Wifi        | 5Ghz Wifi | 2.4G Wifi        | 5Ghz Wifi |
| Frequency (MHz)                           | 2412            | 5180      | 2412            | 5180      | 2412             | 5180      | 2412             | 5180      |
| EIRP dBm                                  | 19.9            | 17.8      | 19.9            | 20.3      | 18.7             | 17.1      | 18.7             | 19.5      |
| Duty Cycle                                | 100%            | 100%      | 100%            | 100%      | 100%             | 100%      | 100%             | 100%      |
| EIRP (mW) (RF exposure)                   | 98              | 60        | 98              | 107       | 74               | 51        | 74               | 89        |
| Distance (cm)                             | 20              | 20        | 20              | 20        | 20               | 20        | 20               | 20        |
| Power density (mW/cm <sup>2</sup> )       | 0.02            | 0.01      | 0.02            | 0.02      | 0.01             | 0.01      | 0.01             | 0.02      |
| FCC Limit (mW/cm <sup>2</sup> )           | 1.00            | 1.00      | 1.00            | 1.00      | 1.00             | 1.00      | 1.00             | 1.00      |
| % of FCC limit                            | 1.9%            | 1.2%      | 1.9%            | 2.1%      | 1.5%             | 1.0%      | 1.5%             | 1.8%      |
| Power density (W/m <sup>2</sup> )         | 0.19            | 0.12      | 0.19            | 0.21      | 0.15             | 0.10      | 0.15             | 0.18      |
| Industry Canada Limit (W/m <sup>2</sup> ) | 5.37            | 9.05      | 5.37            | 9.05      | 5.37             | 9.05      | 5.37             | 9.05      |
| % of ISSED limit                          | 3.6%            | 1.3%      | 3.6%            | 2.4%      | 2.7%             | 1.1%      | 2.7%             | 2.0%      |

|                                           | Bluetooth |              |             |
|-------------------------------------------|-----------|--------------|-------------|
| Mode                                      | Alone     | Cell or WiFi | Cell + Wifi |
| Frequency (MHz)                           | 2402      | 2402         | 2402        |
| Output power (dBm)                        | 18        | 20           | 16          |
| Gain (dBi)                                | -2.8      | -4.9         | -4.9        |
| Duty Cycle                                | 100%      | 100%         | 100%        |
| EIRP (mW) (RF exposure)                   | 33        | 32           | 13          |
| Distance (cm)                             | 20        | 20           | 20          |
| Power density (mW/cm <sup>2</sup> )       | 0.01      | 0.01         | 0.00        |
| FCC Limit (mW/cm <sup>2</sup> )           | 1.00      | 1.00         | 1.00        |
| % of FCC limit                            | 0.7%      | 0.6%         | 0.3%        |
| Power density (W/m <sup>2</sup> )         | 0.07      | 0.06         | 0.03        |
| Industry Canada Limit (W/m <sup>2</sup> ) | 5.35      | 5.35         | 5.35        |
| % of ISSED limit                          | 1.2%      | 1.2%         | 0.5%        |

| Simultaneous conditions     |          |      |           |       |
|-----------------------------|----------|------|-----------|-------|
|                             | Cellular | WiFi | Bluetooth | Total |
| WiFi + Cellular + Bluetooth | 7.5%     | 1.8% | 0.5%      | 9.8%  |
| WiFi + Bluetooth            | 0.0%     | 2.1% | 1.2%      | 3.3%  |
| Cellular + Bluetooth        | 7.5%     | 0.0% | 1.2%      | 8.7%  |

**END OF REPORT**