



**Part 1: Test Under Static Transmission Scenario**

*For*  
**SMARTPHONE**

**FCC ID: BCG-E3997A**  
**Model Name: A2482**

**Report Number: 13571607-S4V2**  
**Issue Date: 7/21/2021**

*Prepared for*  
**APPLE INC.**  
**1 APPLE PARK WAY**  
**CUPERTINO, CA 95014-2084**

*Prepared by*  
**UL VERIFICATION SERVICES INC.**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 319-4000**  
**FAX: (510) 661-0888**



**Revision History**

Rev.	Date	Revisions	Revised By
V1	7/20/2021	Initial Issue	--
V2	7/21/2021	Updated Table 4-2 with the correct WLAN 5 GHz values	

**Table of Contents**

**1. Introduction .....5**

**2. Measurement Setup and General Information .....6**

    2.1. Test Environment .....6

    2.2. Power Density Measurement System .....6

        2.2.1. Power Density Probe .....6

        2.2.2. Power Density Measurement System Verification .....6

**3. Test Condition, Configuration, and Assessment .....10**

    3.1. Qualcomm Smart Transmit Parameters .....10

        3.1.1. Qualcomm Smart Transmit Parameters for the Sub-6 Modem .....10

        3.1.2. Qualcomm Smart Transmit parameters for the 5G modem .....10

    3.2. Device Test Configuration for SAR Measurements .....10

    3.3. Device Test Configuration for PD Measurements .....11

**4. Summary of Results .....14**

    4.1. SAR Measurement and Conducted Power Results at  $P_{limit}$  .....14

    4.2. PD Measurement Results at input.power.limit .....18

    4.3. Simultaneous Transmission Analysis .....24

        4.3.1. Analysis .....24

        4.3.2. Simultaneous Transmission Compliance Demonstration for Sub-6 GHz WWAN + WLAN .....26

        4.3.3. Simultaneous Transmission Compliance Demonstration for 5G mmW NR WWAN + WLAN .....26

**5. Conclusions .....30**

**Appendices .....30**

    A. mmW Probe Certificate .....30

    B. Verification Source Certificate .....30

**Figures**

Figure 2-1: 4 cm<sup>2</sup> PD for source validation on 6/27/2021 .....8

Figure 2-2: 4 cm<sup>2</sup> PD for source validation on 6/27/2021 .....9

Figure 3-1: EUT surface definition (S1=Front, S2=Rear, S3=Edge 4, S4=Edge 2, S5=Edge 1, S6=Edge 3) .....13

Figure 4-1: Band n258, beam ID 164, 4 cm<sup>2</sup> PD, Edge Right .....21

Figure 4-2: Band n260, beam ID 30, 4 cm<sup>2</sup> PD, Back .....22

Figure 4-3: Band n261, beam ID 167, 4 cm<sup>2</sup> PD, Back .....23

**Tables**

Table 2-1: System Validation Results for SAR 1 .....7

Table 2-2: System Validation Results for SAR 3 .....7

Table 2-3: System Check Results .....7

Table 3-1: PD verification test cases for n258 .....11

Table 3-2: PD verification test cases for n260 .....12

Table 3-3: PD verification test cases for n261 .....12

Table 4-1: Comparison of  $P_{limit}$  and  $P_{max}$  .....14

Table 4-2: Worst-case reported WLAN SAR .....17

Table 4-3: PD Measurement results for n258 .....18

Table 4-4: PD Measurement results for n260 .....19

Table 4-5: PD Measurement results for n261 .....20

Table 4-6: Worst-case time-averaged RF exposure for WWAN .....24

Table 4-7: 5G mmW NR Simulation PD Surface Ratio n258 .....27

Table 4-8: 5G mmW NR Simulation PD Surface Ratio n260 .....27

Table 4-9: 5G mmW NR Simulation PD Surface Ratio n261 .....27

---

Table 4-10: Head TER for Worst-Case WLAN + 5G mmW NR n258 .....	28
Table 4-11: Head TER for Worst-Case WLAN + 5G mmW NR n260 .....	28
Table 4-12: Head TER for Worst-Case WLAN + 5G mmW NR n261 .....	28
Table 4-13: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n258 .....	28
Table 4-14: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n260 .....	29
Table 4-15: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n261 .....	29
Table 5-1: Reported RF Exposure Level .....	30

## 1. Introduction

The equipment under test (EUT) contains the Qualcomm modem supporting 2G/3G/4G/5G technologies and mmW 5G NR bands. Both WWAN modems are enabled with Qualcomm's Smart Transmit feature with algorithms to control and manage transmitting power in real time and to ensure the time-averaged RF exposure from the WWAN modems are always in compliance with FCC requirements.

In addition to these WWAN modems, the EUT contains a different modem to support WLAN.

The purpose of this Part 1 report is to demonstrate that this EUT complies with FCC RF exposure limits at maximum time-averaged transmit power limits for WWAN technologies, and at maximum transmit power limits for WLAN technologies. The specifics of this report are as listed:

- SAR and power density (PD) compliance for all WWAN radios (Sub-6 GHz + 5G mmW NR) is assessed based on maximum time-averaged transmit power (static transmission condition). Relevant FCC KDBs and exclusion criteria are applied on a time-average power basis for WWAN technologies. The maximum time-averaged transmit power limits for supported WWAN technologies, bands, and antennas in this report are derived in the Part 0 report. The validation of the Qualcomm's Smart Transmit time-averaging algorithm and compliance under the Tx varying transmission scenario for WWAN technologies are reported in the Part 2 report.
- SAR compliance for WLAN radios are assessed based on maximum transmit power as per relevant FCC KDBs.
- Demonstrated compliance in simultaneous transmission scenarios involving both WWAN and WLAN transmissions, where WWAN exposure is assessed based on time-averaged transmit power limits, and WLAN exposure is assessed based on maximum transmit power limits.

By following the above steps, this report demonstrates that the this EUT complies with FCC RF exposure limits for FCC equipment authorization.

The  $P_{limit}$  and *input.power.limit* used in this report are determined and listed in the Part 0 report.

Refer to Compliance Summary report for product description and terminology used in this report.

## 2. Measurement Setup and General Information

The SAR measurement are recorded in UL *FCC SAR Test Report* (Report No. 13571607-S1).

This section provides the details of the test setup used for PD measurement.

### 2.1. Test Environment

Test Location	UL Verification Services
Ambient Temperature	22±2°C

### 2.2. Power Density Measurement System

The power density measurement system is constructed based on the DASY6 platform by SPEAG. The DASY6 with EUmmWv2 and 5G software module can measure the electromagnetic exposure (electromagnetic and power density) up to 110GHz as close as 2mm from any transmitter.

#### 2.2.1. Power Density Probe

The novel EUmmWV3 & EUmmWV4 probe is used in the power density measurement. It is designed for precise near-field measurements in the mm-wave range by Schmid & Partner Engineering AG of Zurich, Switzerland. The specifications are:

- Frequency range: 0.75 ~ 110 GHz
- Dynamic range: <50 – 3000 V/m (up to 10000 V/m with additional PRE-10 voltage divider)
- Linearity: < ± 0.2 dB
- Supports sensor model calibration (SMC)
- ISO17025 accredited calibration

#### 2.2.2. Power Density Measurement System Verification

The power density system verification is performed using the SPEAG verification device. It consists of a ka-band horn antenna with a corresponding gun oscillator packaged within a cube-shaped housing.

The specification of the verification device is:

- Calibrated frequency: 30 GHz at 10 mm from the case surface
- Frequency accuracy: ± 100 MHz
- E-field polarization: linear
- Harmonics: -20 dBc (typ)
- Total radiated power: 14 dBm (typ)
- Power stability: 0.05 dB
- Power consumption: 5 W (max)
- Size: 100 × 100 × 100 mm
- Weight: 1 kg

Tables 2-1 and 2-2 show the verification test results. The measured power density (PD) value is within ±10% of target level; for the 5G verification source's uncertainty, please refer to Appendix B.

**Table 2-1: System Validation Results for SAR 1**

SAR Lab	Date	Frequency (GHz)	5G Verification Probe SN	Probe Cal. Due Data	5G Verification Source SN	Source Cal. Due Data	Result Incident power (mW/cm <sup>2</sup> ) over 4cm <sup>2</sup>	Target <sub>n</sub> (Ref. Value)	Deviation (dB)	Result Total power (mW/cm <sup>2</sup> ) over 4cm <sup>2</sup>	Target <sub>Tot</sub> (Ref. Value)	Deviation (dB)
SAR 1	6/2/2021	30	9398	10/14/2021	1003	11/13/2021	39.4	33.5	0.70	39.9	33.9	0.71
SAR 1	6/2/2021	30	9398	10/14/2021	1003	11/13/2021	40.2	33.5	0.79	40.6	33.9	0.78
SAR 1	6/2/2021	30	9398	10/14/2021	1003	11/13/2021	40.5	33.5	0.82	40.9	33.9	0.82
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	40.8	33.5	0.86	41.2	33.9	0.85
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	40.9	33.5	0.87	41.3	33.9	0.86
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	40.3	33.5	0.80	40.7	33.9	0.79
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	39.3	33.5	0.69	39.6	33.9	0.67
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	39	33.5	0.66	39.4	33.9	0.65
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	38.5	33.5	0.60	38.9	33.9	0.60
SAR 1	6/3/2021	30	9398	10/14/2021	1003	11/13/2021	38.1	33.5	0.56	38.5	33.9	0.55
<b>Average</b>							<b>39.7</b>		<b>Average</b>	<b>40.1</b>		

**Table 2-2: System Validation Results for SAR 3**

SAR Lab	Date	Frequency (GHz)	5G Verification Probe SN	Probe Cal. Due Data	5G Verification Source SN	Source Cal. Due Data	Result Incident power (mW/cm <sup>2</sup> ) over 4cm <sup>2</sup>	Target <sub>n</sub> (Ref. Value)	Deviation (dB)	Result Total power (mW/cm <sup>2</sup> ) over 4cm <sup>2</sup>	Target <sub>Tot</sub> (Ref. Value)	Deviation (dB)
SAR 3	3/22/2021	30	9496	2/6/2022	1003	11/13/2021	30.7	33.5	-0.38	32.2	33.9	-0.22
SAR 3	3/22/2021	30	9496	2/6/2022	1003	11/13/2021	31.2	33.5	-0.31	32.4	33.9	-0.20
SAR 3	3/22/2021	30	9496	2/6/2022	1003	11/13/2021	31.7	33.5	-0.24	33	33.9	-0.12
SAR 3	3/22/2021	30	9496	2/6/2022	1003	11/13/2021	32.0	33.5	-0.20	33.2	33.9	-0.09
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	32.2	33.5	-0.17	33.3	33.9	-0.08
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	31.9	33.5	-0.21	33	33.9	-0.12
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	31.9	33.5	-0.21	33	33.9	-0.12
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	31.6	33.5	-0.25	32.8	33.9	-0.14
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	31.5	33.5	-0.27	32.7	33.9	-0.16
SAR 3	3/23/2021	30	9496	2/6/2022	1003	11/13/2021	31.2	33.5	-0.31	32.3	33.9	-0.21
<b>Average</b>							<b>31.6</b>		<b>Average</b>	<b>32.8</b>		

**Table 2-3: System Check Results**

SAR Lab	Date	Frequency (GHz)	5G Verification Source SN	Source Cal. Due Data	Result Incident power (mW/cm <sup>2</sup> ) over 4cm <sup>2</sup>	Target <sub>n</sub> (Ref. Value)	Delta ±10 %	Result Total power (mW/cm <sup>2</sup> ) over 4cm <sup>2</sup>	Target <sub>Tot</sub> (Ref. Value)	Delta ±10 %
SAR 1	6/3/2021	30	1003	11/13/2021	37.8	39.7	-5%	38.2	40.1	-5%
SAR 1	6/7/2021	30	1003	11/13/2021	39.2	39.7	-1%	39.8	40.1	-1%
SAR 1	6/11/2021	30	1003	11/13/2021	42	39.7	6%	42.4	40.1	6%
SAR 1	6/15/2021	30	1003	11/13/2021	43	39.7	8%	43.3	40.1	8%
SAR 1	6/19/2021	30	1003	11/13/2021	40.2	39.7	1%	40.8	40.1	2%
SAR 1	6/22/2021	30	1003	11/13/2021	43.3	39.7	9%	43.7	40.1	9%
SAR Lab	Date	Frequency (GHz)	5G Verification Source SN	Source Cal. Due Data	Result Incident power (mW/cm <sup>2</sup> ) over 4cm <sup>2</sup>	Target <sub>n</sub> (Ref. Value)	Delta ±10 %	Result Total power (mW/cm <sup>2</sup> ) over 4cm <sup>2</sup>	Target <sub>Tot</sub> (Ref. Value)	Delta ±10 %
SAR 3	6/21/2021	30	1003	11/13/2021	32.9	31.6	4%	35.1	32.8	7%
SAR 3	6/27/2021	30	1003	11/13/2021	33	31.6	4%	33.4	32.8	2%

# SAR 1:

## Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
, 5G Verification Source - 30GHz	100.0 x 100.0 x 100.0	1003	Phone

## Exposure Conditions

Phantom Section	Position, Distance [mm]	Test Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	FRONT, 5.55	Validation band	CW, 0--	30000.0, 30000	1.0

## Scan Setup

Medium	Probe, Calibration Date	DAE, Calibration Date
--Air-	EUmmWV3 - SN9398_F1-78GHz, 2020-10-14	DAE4 Sn1352, 2020-11-17

## Scan Setup

Grid Extents [mm]  
 Grid Steps [lambda]  
 Sensor Surface [mm]  
 MAIA

5G Scan  
 60.0 x 60.0  
 0.25 x 0.25  
 5.55  
 N/A

## Measurement Results

Date  
 Avg. Area [cm<sup>2</sup>]  
 pS<sub>tot</sub> avg [W/m<sup>2</sup>]  
 pS<sub>n</sub> avg [W/m<sup>2</sup>]  
 E<sub>peak</sub> [V/m]  
 Power Drift [dB]

5G Scan  
 2021-06-22, 01:16  
 4.00  
 43.7  
 43.3  
 145  
 -0.01

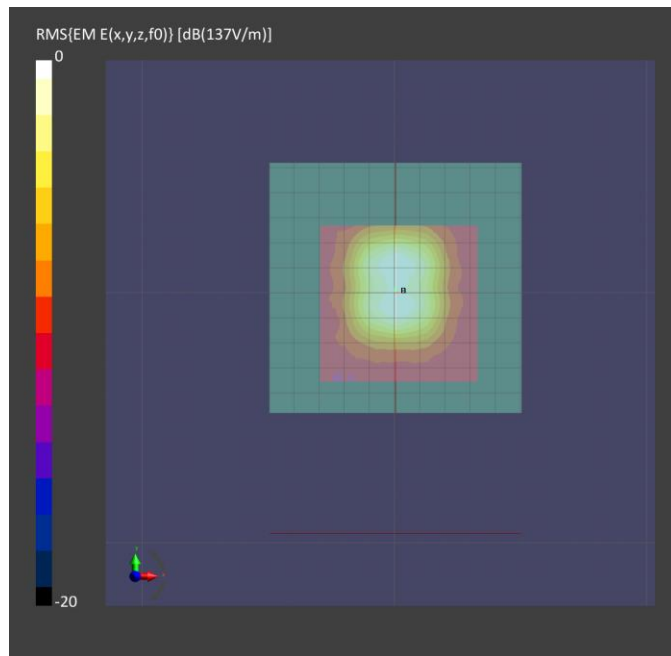


Figure 2-1: 4 cm<sup>2</sup> PD for source validation on 6/22/2021



### SAR 3: Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
, 5G Verification Source - 30GHz	100.0 x 100.0 x 100.0	1003	Phone

### Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G -	FRONT, 5 55	Validation band	CW, 0--	30000.0, 30000	1.0

### Hardware Setup

Medium	Probe, Calibration Date	DAE, Calibration Date	
--Air-	EUmmWV4 - SN9496_F1-78GHz, 2021-02-26	DAE4 Sn1548, 2021-02-22	

### Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	5.55
MAIA	N/A

### Measurement Results

	5G Scan
Date	2021-06-27, 23:23
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	33.0
psPDtot+ [W/m <sup>2</sup> ]	33.4
psPDmod+ [W/m <sup>2</sup> ]	33.7
E <sub>max</sub> [V/m]	132
Power Drift [dB]	0.21

--	--

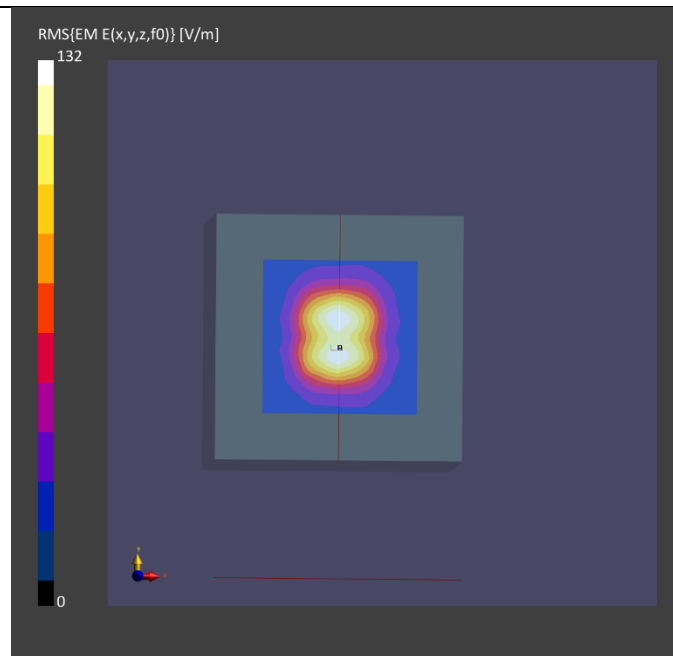


Figure 2-2: 4 cm<sup>2</sup> PD for source validation on 6/27/2021

### 3. Test Condition, Configuration, and Assessment

#### 3.1. Qualcomm Smart Transmit Parameters

The input parameters described in §2.3 of the Compliance Summary report are required for functionality of Qualcomm's Smart Transmit algorithm.

These parameters are entered through the *Embedded File System* (EFS) and cannot be accessed by the end-user.

The Part 0 report documents the determination of  $P_{limit}$  for Sub-6 GHz WWAN bands (Part 0, §2.4) and the *input.power.limit* for 5G mmW NR bands using the design targets (Part 0, §3.7), and device related uncertainty listed below:

Total Uncertainty (dB)	SAR <sub>Design Target</sub> (1-g W/kg)	SAR <sub>Design Target</sub> (10-g W/kg)	SAR <sub>Design Limit</sub> (1-g W/kg)	SAR <sub>Design Limit</sub> (10-g W/kg)
1.00	0.8	2.0	1.0	2.5

Total Uncertainty (dB)	PD <sub>Design Target</sub> (W/m <sup>2</sup> )
2.20	6.0

##### 3.1.1. Qualcomm Smart Transmit Parameters for the Sub-6 Modem

For this EUT, the input parameters listed in §2.3 of the Part 0 report are populated via the EFS entry.

##### 3.1.2. Qualcomm Smart Transmit parameters for the 5G modem

For this EUT, the *input.power.limit* parameters for the 5G mmW NR radio(s) are listed in §4.7.3 of the Part 0 report and are populated via EFS entry into the EUT.

#### 3.2. Device Test Configuration for SAR Measurements

In summary, SAR is evaluated on this EUT in test configurations and test conditions listed below:

- Test configurations: Hotspot SAR exposure (1-g SAR) from all device surfaces/edges (front, back, left, right, top, bottom) having a transmitting antenna located  $\leq 25\text{mm}$  from that device surface/edge when in direct contact with flat section of SAM phantom. Hotspot SAR is evaluated at 5mm separation distance for all selected device surfaces as per FCC KDB publication 648474 D04.
- Test condition: The SAR measurements on all supported Sub-6 WWAN technologies and bands are conducted with the EUT transmitting at maximum time-average transmit power ( $P_{limit}$ ) or maximum RF tune-up power ( $P_{max}$ ) if  $P_{max} \leq P_{limit}$ .

See UL *FCC SAR Test Report* (Report No. 13571607-S1) for details

### 3.3. Device Test Configuration for PD Measurements

As can be seen in §3 of the Part 0 report, the PD exposure for this EUT has been assessed against the  $PD_{Design\ Target}$  listed in §4.2 of this report using a validated simulation approach for the worst cases for all its beams. To further confirm the compliance, a subset of beams and test cases were selected for PD verification, see §4.2.

The following beam selection criteria for the PD verification test were used:

- Select one single beam (antenna array config) per polarization (vertical or horizontal) and per mmW antenna module
  - The single beam containing highest number of active antenna ports. For example, the single beam with 4 active patch ports should be selected over the beam with a single active patch port
- Select one beam per mmW antenna module
  - The beam pair containing the highest number of active antenna ports.

Additionally, since the worst-case surface dictates the compliance, the PD measurement is made on the worst channel and worst surface determined through the validated simulation approach, see Appendix B of the Part 0 report.

Based on the aforementioned criteria and the EUT codebook in §3.3 of the Part 0 report, Tables 3-1, 3-2, and 3-3 list the selected beams and test cases for PD verification measurement(s). The definition of the EUT surface is illustrated in Figure 3-1.

**Table 3-1: PD verification test cases for n258**

Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT Surface
		V	H	MHz	#	
ANT M1	2016667	27		100	1	Back
	2016667	28	156	100	1	Back
	2042915		167	100	66	Back
	2042915		167	100	66	Left
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT Surface
		V	H	MHz	#	
ANT M0	2042915		141	100	1	Back
	2042915	23	151	100	1	Back
	2042915	22		100	33	Back
	2042915	22		100	33	Left
	2042915	22		100	33	Top
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT Surface
		V	H	MHz	#	
ANT M2	2069160	44		100	1	Right
	2069160	36	164	100	1	Right
	2069160		164	100	33	Right
	2069160		164	100	33	Back
	2069160		164	100	33	Front

**Table 3-2: PD verification test cases for n260**

Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
ANT M1	2229167		166	100	1	Back
	2229167	38	166	100	1	Back
	2229167	30		100	66	Back
	2229167	30		100	66	Left
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
ANT M0	2229167	13		100	1	Back
	2229167	21	149	100	1	Back
	2229167		140	100	1	Back
	2229167		140	100	1	Left
	2229167		140	100	1	Top
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
ANT M2	2277500	33		100	1	Right
	2229167	34	162	100	1	Right
	2253330		170	100	33	Right
	2253330		170	100	33	Back
	2253330		170	100	33	Front

**Table 3-3: PD verification test cases for n261**

Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
		V	H	MHz	#	Surface
ANT M1	2070833	27		100	1	Back
	2070833	40	168	100	1	Back
	2070833		167	100	1	Back
	2070833		167	100	1	Left
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
ANT M0	2077084		141	100	1	Back
	2077084	13	141	100	1	Back
	2077084	22		100	1	Back
	2077084	22		100	1	Left
	2077084	22		100	1	Top
Module/Antenna	Ch.	Beam ID1	Beam ID2	BW	RB	DUT
ANT M2	2077084	44		100	1	Right
	2077084	41	169	100	1	Right
	2083330		164	50	1	Right
	2083330		164	50	1	Back
	2083330		164	50	1	Front

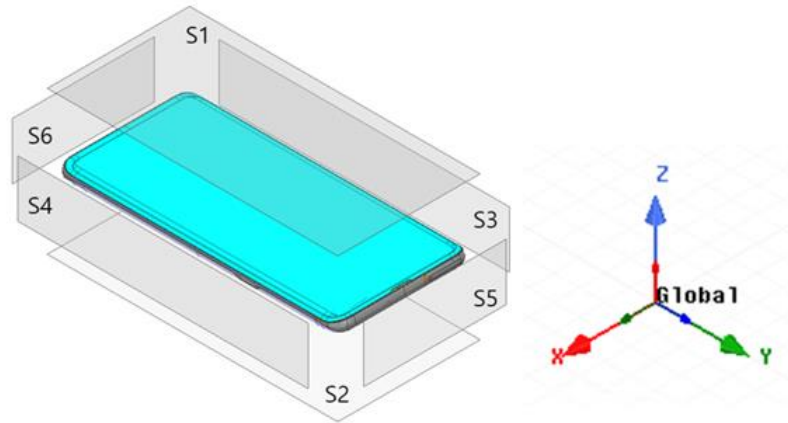


Figure 3-1: EUT surface definition (S1=Front, S2=Rear, S3=Edge 4, S4=Edge 2, S5=Edge 1, S6=Edge 3)

## 4. Summary of Results

### 4.1. SAR Measurement and Conducted Power Results at $P_{limit}$

The transmit power limit,  $P_{limit}$ , that corresponds to the  $SAR_{Design\ Target}$ , stated in §3.1 for all technologies and bands, was determined through the Part 0 report and are listed in EFS entries in §2.4 of the Part 0 report. For this EUT, the  $P_{max}$  (maximum RF tune-up power) for select Sub-6 GHz technologies is less than, or equal to, the corresponding  $P_{limit}$ , as summarized and shown in Table 4-1.

**Table 4-1: Comparison of  $P_{limit}$  and  $P_{max}$**

Exposure Scenario		Duty Cycle	Head	Body-worn	Hotspot	$P_{max}$ (dBm)
Spatial-average			1-g	1-g	1-g	
Test Distance			0 mm	5 mm	5 mm	
Power Mode (DSI)			DSI: 0	DSI: 1	DSI: 1	
Antenna	Tech/Band		$P_{limit}$ (dBm)	$P_{limit}$ (dBm)	$P_{limit}$ (dBm)	
			Burst Average	Burst Average	Burst Average	
ANT1	GSM 850 2 slots	25.0%	32.50	32.50	32.50	32.50
	GSM 1900 2 slots	25.0%	31.00	25.50	25.50	31.00
	W-CDMA B2	100.0%	25.70	19.50	19.50	25.70
	W-CDMA B4	100.0%	25.40	19.50	19.50	25.70
	W-CDMA B5	100.0%	25.70	25.20	25.20	25.70
	CDMA BC0	100.0%	23.50	23.50	23.50	23.50
	CDMA BC1	100.0%	25.70	19.50	19.50	25.70
	CDMA BC10	100.0%	25.70	25.20	25.20	25.70
	LTE Band 5	100.0%	25.70	25.20	25.20	25.70
	LTE Band 7	100.0%	24.30	19.30	19.30	25.70
	LTE Band 12/17	100.0%	25.70	25.70	25.70	25.70
	LTE Band 13	100.0%	25.70	25.70	25.70	25.70
	LTE Band 14	100.0%	25.70	25.70	25.70	25.70
	LTE Band 25/2	100.0%	25.70	19.50	19.50	25.70
	LTE Band 26	100.0%	25.70	25.20	25.20	25.70
	LTE Band 30	100.0%	24.60	20.10	20.10	24.60
	LTE Band 41	63.3%	25.70	21.50	21.50	25.70
	LTE Band 66/4	100.0%	25.40	19.50	19.50	25.70
	LTE Band 71	100.0%	25.70	25.70	25.70	25.70
	NR n5	100.0%	25.70	25.20	25.20	25.70
NR n7	100.0%	24.30	19.30	19.30	25.70	
NR n12	100.0%	25.70	25.70	25.70	25.70	
NR n25/2	100.0%	25.70	19.50	19.50	25.70	
NR n30	100.0%	24.60	20.10	20.10	24.60	
NR n41	63.3%	23.70	19.50	19.50	25.70	
NR n66	100.0%	25.40	19.50	19.50	25.70	
NR n71	100.0%	25.70	25.70	25.70	25.70	

Exposure Scenario		Duty Cycle	Head	Body-worn	Hotspot	Pmax (dBm)
Spatial-average			1-g	1-g	1-g	
Test Distance			0 mm	5 mm	5 mm	
Power Mode (DSI)			DSI: 0	DSI: 1	DSI: 1	
Antenna	Tech/Band		Plimit (dBm)	Plimit (dBm)	Plimit (dBm)	
			Burst Average	Burst Average	Burst Average	
			Burst Average	Burst Average	Burst Average	Burst Average
ANT2	GSM 850 2 slots	25.0%	31.00	31.00	31.00	31.00
	GSM 1900 2 slots	25.0%	28.50	28.50	28.50	28.50
	W-CDMA B2	100.0%	20.90	21.20	21.20	23.70
	W-CDMA B4	100.0%	22.10	22.10	22.10	23.70
	W-CDMA B5	100.0%	24.70	24.70	24.70	24.70
	CDMA BC0	100.0%	23.00	23.00	23.00	23.00
	CDMA BC1	100.0%	20.90	21.20	21.20	23.70
	CDMA BC10	100.0%	24.70	24.70	24.70	24.70
	LTE Band 5	100.0%	24.70	24.70	24.70	24.70
	LTE Band 7	100.0%	17.70	19.30	19.30	23.20
	LTE Band 12/17	100.0%	24.60	24.70	24.70	24.70
	LTE Band 13	100.0%	24.70	24.70	24.70	24.70
	LTE Band 14	100.0%	24.70	24.70	24.70	24.70
	LTE Band 25/2	100.0%	20.90	21.20	21.20	23.70
	LTE Band 26	100.0%	24.70	24.70	24.70	24.70
	LTE Band 30	100.0%	20.90	21.80	21.80	23.20
	LTE Band 41	63.3%	19.50	21.40	21.40	25.00
	LTE Band 66/4	100.0%	22.10	22.10	22.10	23.70
	LTE Band 71	100.0%	24.70	24.70	24.70	24.70
	NR n5	100.0%	24.70	24.70	24.70	24.70
	NR n7	100.0%	17.70	19.30	19.30	23.20
	NR n12	100.0%	24.60	24.70	24.70	24.70
	NR n25/2	100.0%	20.90	21.20	21.20	23.70
	NR n30	100.0%	20.90	21.80	21.80	23.20
NR n41	63.3%	17.50	19.40	19.40	25.70	
NR n66	100.0%	22.10	22.10	22.10	23.70	
NR n71	100.0%	24.70	24.70	24.70	24.70	

Exposure Scenario		Duty Cycle	Head	Body-worn	Hotspot	Pmax (dBm)
Spatial-average			1-g	1-g	1-g	
Test Distance			0 mm	5 mm	5 mm	
Power Mode (DSI)			DSI: 0	DSI: 1	DSI: 1	
Antenna	Tech/Band		Plimit (dBm)	Plimit (dBm)	Plimit (dBm)	
			Burst Average	Burst Average	Burst Average	
ANT3	GSM 1900 2 slots	25.0%	30.00	26.60	26.60	30.00
	W-CDMA B2	100.0%	24.50	20.60	20.60	25.20
	W-CDMA B4	100.0%	25.20	22.30	22.30	25.20
	LTE Band 7	100.0%	23.40	18.40	18.40	25.20
	LTE Band 25/2	100.0%	24.50	20.60	20.60	25.20
	LTE Band 30	100.0%	21.60	18.90	18.90	21.60
	LTE Band 41	63.3%	25.20	19.70	19.70	25.70
	LTE Band 66/4	100.0%	25.20	22.30	22.30	25.20
	NR n7	100.0%	23.40	18.40	18.40	25.20
	NR n25/2	100.0%	24.50	20.60	20.60	25.20
	NR n30	100.0%	21.60	18.90	18.90	21.60
	NR n41	63.3%	23.20	17.70	17.70	24.70
NR n66	100.0%	25.20	22.30	22.30	25.20	
ANT4	GSM 1900 2 slots	25.0%	26.50	26.20	26.20	28.00
	W-CDMA B2	100.0%	20.50	21.20	21.20	23.70
	W-CDMA B4	100.0%	20.50	22.00	22.00	23.70
	LTE Band 7	100.0%	21.50	21.70	21.70	23.20
	LTE Band 25/2	100.0%	20.50	21.20	21.20	23.70
	LTE Band 30	100.0%	21.20	21.80	21.80	23.20
	LTE Band 41	63.3%	22.70	23.00	23.00	25.00
	LTE Band 48	63.3%	22.50	21.20	21.20	22.50
	LTE Band 66/4	100.0%	20.50	22.00	22.00	23.70
	NR n7	100.0%	21.50	21.70	21.70	23.20
	NR n25/2	100.0%	20.50	21.20	21.20	23.70
	NR n30	100.0%	21.20	21.80	21.80	23.20
	NR n41	63.3%	20.70	21.00	21.00	25.70
	NR n66	100.0%	20.50	22.00	22.00	23.70
NR n77	63.3%	20.00	21.50	21.50	23.50	
ANT7	LTE Band 48	63.3%	23.50	20.40	20.40	23.50
	NR n77	63.3%	25.70	19.50	19.50	25.70
ANT8	LTE Band 48	63.3%	23.00	21.40	21.40	23.00
	NR n77	63.3%	24.00	20.70	20.70	24.00
ANT9	LTE Band 48	63.3%	25.20	23.00	23.00	25.20
	NR n77	63.3%	24.60	19.20	19.20	25.70



Therefore, for this EUT, SAR and conducted power measurements at  $P_{limit}$  will be the same as those performed at  $P_{max}$ . SAR measured at  $P_{limit}$  (reported in UL's FCC SAR Test Report, 13571607-S1) can be leveraged in this section to avoid re-testing. The worst-case reported SAR values for Sub-6 GHz are listed in §2.4 of the Part 0 report and the worst-case reported WLAN SAR results are listed in Table 4-2.

**Table 4-2: Worst-case reported WLAN SAR**

Techonology	Freq (GHz)	ANT			Reported 1-g SAR (W/kg)			P <sub>max</sub> Tune-up		
		Head	Body-worn	Hotspot	Head	Body-worn	Hotspot	Head	Body-worn	Hotspot
WLAN	2.4	ANT4	ANT3	ANT3	0.374	0.494	0.494	18.50	16.25	16.25
	5	ANT6	ANT5	ANT5	0.270	0.398	0.398	12.00	12.25	12.25

Note that WLAN SAR for each of the bands in the above table lists the worst-case SAR out of both WLAN antennas and WLAN MIMO.

### 4.2. PD Measurement Results at input.power.limit

Tables 3-1 to 3-3 list the beams selected for PD verification test for this EUT and Tables 4-3 to 4-5 list the corresponding PD measurement results at 2 mm spacing. Qualcomm’s Smart Transmit algorithm operates based on time-averaged transmit power reported on a per symbol basis, which is independent of modulation, channel, and bandwidth (RBs). Therefore, PD measurements in Tables 4-3 to 4-5 were conducted with the EUT in *Factory Test Mode (FTM)*, with CW modulation and on the worst-case channel determined through simulations (See Appendix B of the Part 0 report), with the EUT transmitting at *input.power.limit* (listed in Table 3-4 of the Part 0 report) corresponding to the tested beams.

All 4cm<sup>2</sup> PD values for the selected beams are listed in Tables 4-3 to 4-5. In addition to these selected beams, 4cm<sup>2</sup> PD for a few more beams (highlighted in Tables 4-3 to 4-5) were used in the Part 2 report.

**Table 4-3: PD Measurement results for n258**

Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	Signal Type	DUT Surface	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#			W/m <sup>2</sup>	W/m <sup>2</sup>
ANT M1	24.3	2016667	27		-0.3	1	100	1	CW	Back	1.40	1.98
	24.3	2016667	28	156	-2.8	1	100	1	CW	Back	1.95	2.32
	25.875	2042915		167	1.8	1	100	66	CW	Back	<b>4.68</b>	<b>5.31</b>
	25.875	2042915		167	1.8	1	100	66	CW	Left	0.064	0.074
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	Signal Type	DUT Surface	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#			W/m <sup>2</sup>	W/m <sup>2</sup>
ANT M0	25.875	2042915		141	6.6	1	100	1	CW	Back	2.11	2.87
	25.875	2042915	23	151	2.5	1	100	1	CW	Back	2.54	3.09
	25.875	2042915	22		6.1	1	100	1	CW	Back	<b>3.87</b>	<b>4.24</b>
	25.875	2042915	22		6.1	1	100	1	CW	Left	0.027	0.031
	25.875	2042915	22		6.1	1	100	1	CW	Top	0.615	0.639
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	Signal Type	DUT Surface	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#			W/m <sup>2</sup>	W/m <sup>2</sup>
ANT M2	27.45	2069160	44		0.9	1	100	1	CW	Right	2.46	3.77
	27.45	2069160	36	164	-2.3	1	100	1	CW	Right	2.77	4.12
	27.45	2069160		164	1.9	1	100	33	CW	Right	<b>4.72</b>	<b>7.21</b>
	27.45	2069160		164	1.9	1	100	33	CW	Back	1.21	1.41
	27.45	2069160		164	1.9	1	100	33	CW	Front	1.95	2.40

n258	PD_Design_Target (W/m <sup>2</sup> ):		6				
	Total Uncertainty (dB):		2.2				
Worst-case location (x,y,z) (m):		S4 (Edge Right) (0.03776, -0.01500, 0.00100)					
Module	Printed backoff Value bj (linear)	FCC PD Limit (W/m <sup>2</sup> )	bj*PD_design_target + total uncertainty (W/m <sup>2</sup> )	Beam/Beam-pair ID	Measured PD (W/m <sup>2</sup> )	Surface	Contribution Factor c(i,j)
0	0.9772	10	9.730	167	5.31	S2	0.0133
1	0.955	10	9.509	164	7.21	S4	1
Verification:		(0.0133 x 5.31) + (1 x 7.21) = 7.280623 < 9.509					

Note: Module 0 contains antennas M0 and M1, module 1 contains antenna M2

**Table 4-4: PD Measurement results for n260**

Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT Surface	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#		W/m <sup>2</sup>	W/m <sup>2</sup>
ANT M1	37	2229167		166	0.7	1	100	1	Back	2.45	2.81
	37	2229167	38	166	0	1	100	1	Back	3.86	4.54
	37	2229167	30		3.1	1	100	66	Back	<b>6.60</b>	<b>7.36</b>
	37	2229167	30		3.1	1	100	66	Left	0.037	0.062
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT Surface	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#		W/m <sup>2</sup>	W/m <sup>2</sup>
ANT M0	37	2229167	13		9.7	1	100	1	Back	2.64	3.21
	37	2229167	21	149	4.6	1	100	1	Back	2.41	3.16
	37	2229167		140	8.6	1	100	1	Back	<b>6.30</b>	<b>6.82</b>
	37	2229167		140	8.6	1	100	1	Left	0.030	0.062
	37	2229167		140	8.6	1	100	1	Top	0.419	0.565
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT Surface	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#		W/m <sup>2</sup>	W/m <sup>2</sup>
ANT M2	39.95	2277500	33		1.7	1	100	1	Right	1.58	2.12
	37	2229167	34	162	-2	1	100	1	Right	2.22	2.62
	38.5	2253330		170	1.4	1	100	33	Right	<b>4.01</b>	<b>4.75</b>
	38.5	2253330		170	1.4	1	100	33	Back	1.45	1.79
	38.5	2253330		170	1.4	1	100	33	Front	1.44	1.81

n260	PD_Design_Target (W/m <sup>2</sup> ):		6				
	Total Uncertainty (dB):		2.2				
Worst-case location (x,y,z) (m):		S4 (Edge Right) (0.03776, -0.02000, -0.00100)					
Module	Printed backoff Value bj (linear)	FCC PD Limit (W/m <sup>2</sup> )	bj*PD_design_target + total uncertainty (W/m <sup>2</sup> )	Beam/Beam-pair ID	Measured PD (W/m <sup>2</sup> )	Surface	Contribution Factor c(i,j)
0	0.9772	10	9.730	30	7.36	S2	0.0169
1	0.955	10	9.509	170	4.75	S4	1
Verification:		(0.0169 x 7.36) + (1 x 4.75) = 4.874384 < 9.509					

Note: Module 0 contains antennas M0 and M1, module 1 contains antenna M2

**Table 4-5: PD Measurement results for n261**

Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT Surface	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#		W/m <sup>2</sup>	W/m <sup>2</sup>
ANT M1	27.550	2070833	27		0.4	1	100	1	Back	3.02	4.62
	27.550	2070833	40	168	-2.2	1	100	1	Back	4.42	5.66
	27.550	2070833		167	1.9	1	50	66	Back	<b>6.74</b>	<b>7.53</b>
	27.550	2070833		167	1.9	1	50	66	Left	0.056	0.058
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT Surface	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#		W/m <sup>2</sup>	W/m <sup>2</sup>
ANT M0	27.925	2077084		141	6.7	1	100	1	Back	2.44	3.17
	27.925	2077084	13	141	2.9	1	100	1	Back	2.67	3.27
	27.925	2077084	22		6.6	1	100	1	Back	<b>5.10</b>	<b>5.41</b>
	27.925	2077084	22		6.6	1	100	1	Left	0.049	0.076
	27.925	2077084	22		6.6	1	100	1	Top	0.276	0.292
Module/Antenna	Frequency		Beam ID1	Beam ID2	input.power.limit	CC	BW	RB	DUT Surface	Normal psPD	Total psPD
	GHz	Ch.	V	H	dBm	#	MHz	#		W/m <sup>2</sup>	W/m <sup>2</sup>
ANT M2	27.550	2070833	44		-0.9	1	100	1	Right	4.17	5.92
	27.925	2077084	41	169	-2.8	1	100	1	Right	3.39	4.64
	28.300	2083330		164	1.2	1	50	66	Right	<b>4.30</b>	<b>7.19</b>
	28.300	2083330		164	1.2	1	50	66	Back	0.056	0.068
	28.300	2083330		164	1.2	1	50	66	Front	1.720	2.350

n261	PD_Design_Target (W/m <sup>2</sup> ):			6			
	Total Uncertainty (dB):			2.2			
	Worst-case location (x,y,z) (m):			S4 (Edge Right) (0.03776, -0.01200, 0.00000)			
Module	Printed backoff Value bj (linear)	FCC PD Limit (W/m <sup>2</sup> )	bj*PD_design_target + total uncertainty (W/m <sup>2</sup> )	Beam/Beam-pair ID	Measured PD (W/m <sup>2</sup> )	Surface	Contribution Factor c(i,j)
0	0.9772	10	9.730	167	7.53	S2	0.0268
1	0.955	10	9.509	164	7.19	S4	1
Verification:				(0.0268 x 7.53) + (1 x 7.19) = 7.391804 < 9.509			

Note: Module 0 contains antennas M0 and M1, module 1 contains antenna M2

The PD distribution plots for both point PD and 4cm<sup>2</sup> avg PD for the highest PD configuration in Tables 4-1, 4-2 & 4-3 is given below.

**Note:** Dasy mmWave module automatically computes grid extents from anchor scan

**n258:**

Name, Manufacturer	Dimensions [mm]	DUT Type
A2482	147.0 x 71.0 x 7.0	Phone

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	EDGE RIGHT, 2.00	Custom Band	CW, 0--	27450.0, 27450000	1.0

**Hardware Setup**

Medium	Probe, Calibration Date	DAE, Calibration Date
--Air-	EUmmWV3 - SN9398_F1-78GHz, 2020-10-14	DAE4 Sn1352, 2020-11-17

**Scan Setup**

	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

**Measurement Results**

	5G Scan
Date	2021-06-08, 01:29
Avg. Area [cm <sup>2</sup> ]	4.00
pS <sub>tot</sub> avg [W/m <sup>2</sup> ]	7.21
pS <sub>n</sub> avg [W/m <sup>2</sup> ]	4.72
E <sub>peak</sub> [V/m]	118
Power Drift [dB]	-0.01

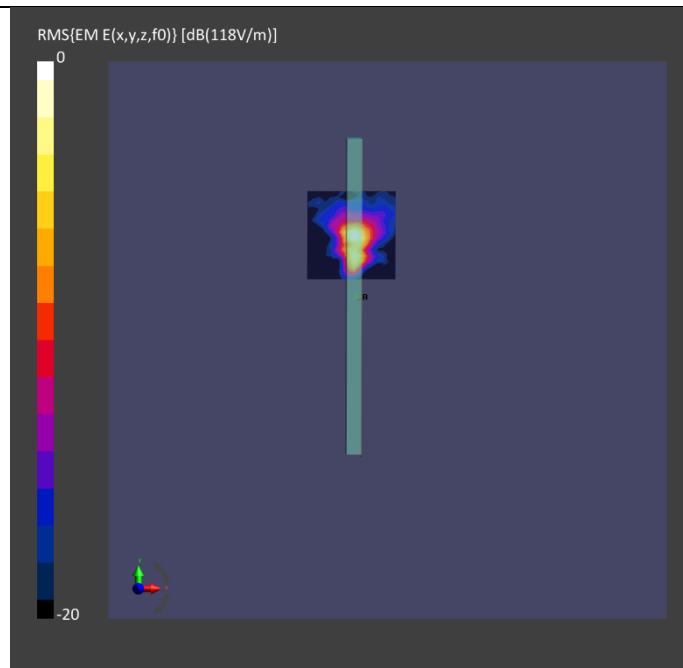



Figure 4-1: Band n258, beam ID 164, 4 cm<sup>2</sup> PD, Edge Right

**n260:**

Name, Manufacturer	Dimensions [mm]	DUT Type
A2482	147.0 x 71.0 x 7.0	Phone

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	BACK, 2.00	Custom Band	CW, 0--	37050.0, 37050000	1.0

**Hardware Setup**

Medium	Probe, Calibration Date	DAE, Calibration Date
--Air-	EUmmWV3 - SN9398_F1-78GHz, 2020-10-14	DAE4 Sn1352, 2020-11-17


**Scan Setup**

	5G Scan
<b>Grid Extents [mm]</b>	25.0 x 25.0
<b>Grid Steps [lambda]</b>	0.25 x 0.25
<b>Sensor Surface [mm]</b>	2.0
<b>MAIA</b>	N/A

**Measurement Results**

	5G Scan
<b>Date</b>	2021-06-21, 05:09
<b>Avg. Area [cm<sup>2</sup>]</b>	4.00
<b>pS<sub>tot</sub> avg [W/m<sup>2</sup>]</b>	7.36
<b>pS<sub>n</sub> avg [W/m<sup>2</sup>]</b>	6.60
<b>E<sub>peak</sub> [V/m]</b>	92.5
<b>Power Drift [dB]</b>	-0.08

--	--

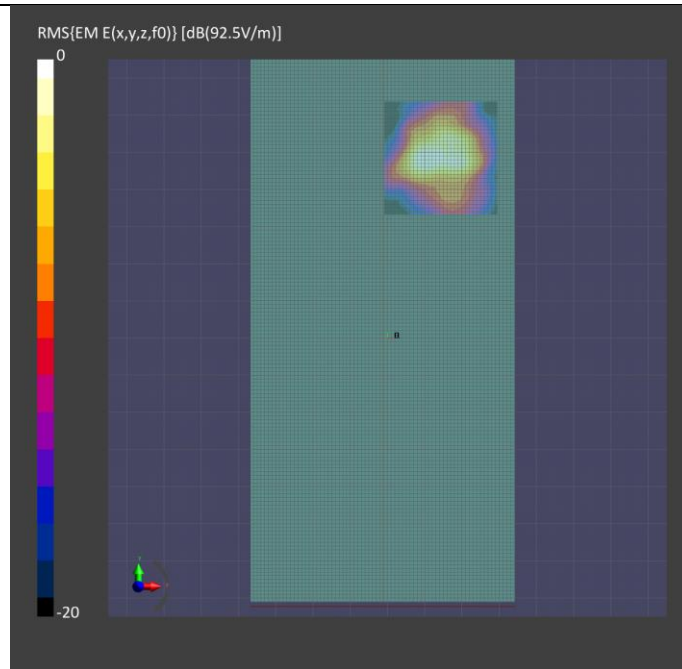

**Figure 4-2: Band n260, beam ID 30, 4 cm<sup>2</sup> PD, Back**

**n261:**

Name, Manufacturer	Dimensions [mm]	DUT Type
A2482	147.0 x 71.0 x 7.0	Phone

**Exposure Conditions**

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	BACK, 2.00	Custom Band	CW, 0--	27550.0, 27550000	1.0

**Hardware Setup**


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- xxxx	--Air-	EUmmWV3 - SN9398_F1-78GHz, 2020-10-14	DAE4 Sn1352, 2020-11-17

**Scan Setup**

	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

**Measurement Results**

	5G Scan
Date	2021-06-13, 02:00
Avg. Area [cm <sup>2</sup> ]	4.00
pS <sub>tot</sub> avg [W/m <sup>2</sup> ]	7.53
pS <sub>n</sub> avg [W/m <sup>2</sup> ]	6.74
E <sub>peak</sub> [V/m]	101
Power Drift [dB]	-0.01

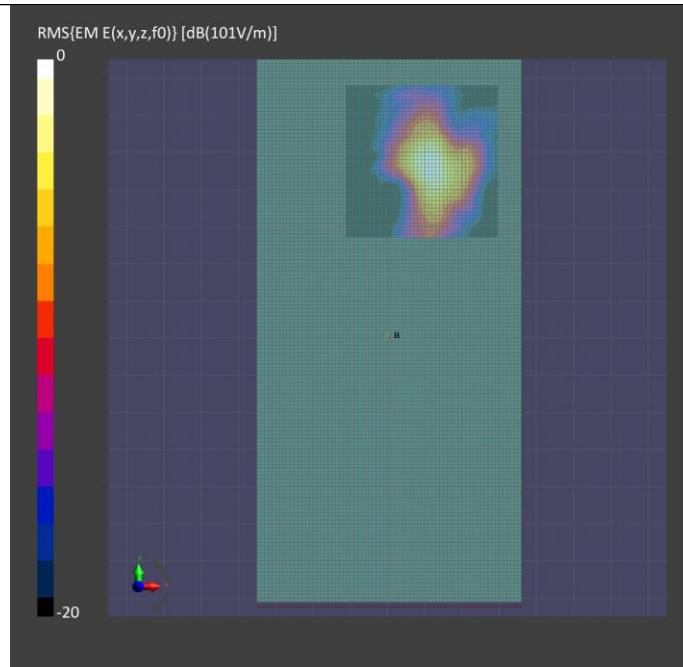

**Figure 4-3: Band n261, beam ID 167, 4 cm<sup>2</sup> PD, Back**

### 4.3. Simultaneous Transmission Analysis

The EUT supports simultaneous transmission of multiple radios. RF exposure compliance in simultaneous transmission scenarios is evaluated in this section.

It must be noted here that Qualcomm's Smart Transmit time-averaging algorithm was applied to only WWAN (Sub-6GHz/5G mmW NR) on this device, where the time-averaged power level is controlled so that the RF exposure is  $\leq SAR_{Design\ Target}$  (corresponding to  $P_{limit}$ ) for Sub-6 GHz WWAN and  $\leq PD_{Design\ Target}$  (corresponding to `input.power.limit`) for 5G mmW NR. Since there is total design related uncertainty arising from TxAGC and device-to-device variation, the worst-case RF exposure should be determined by accounting for this uncertainty in the corresponding design target, thus, with 1dB of device uncertainty for sub-6 WWAN and 2.2dB of device uncertainty for 5G mmW NR. Therefore, the worst-case RF exposure for this EUT is:

**Table 4-6: Worst-case time-averaged RF exposure for WWAN**

Scenario	WWAN	
	Sub-6 GHz WWAN	5G mmW NR
Maximum time-averaged power level	$P_{limit}$	<code>input.power.limit</code>
Maximum time-averaged exposure (Design Targets)	0.8 W/kg (1-g SAR)	6 W/m <sup>2</sup>
Design-related uncertainty (dB)	1.00	2.20
Worst-case time-averaged RF exposure	Reported SAR $\dagger$ = 1 W/kg (1-g SAR)	Reported PD* = 10 W/m <sup>2</sup>

$\dagger$ : For this EUT,  $(P_{limit} + 1.0\text{dB uncertainty}) \geq P_{max}$  (maximum RF tune-up output power). Therefore, time-averaged SAR exposure from Smart Transmit enabled EUT (at  $P_{limit}$ ) cannot exceed the reported SAR corresponding to  $P_{max}$  listed in Table 4-1.

WLAN reported 1g SAR at the maximum RF tune-up output power is listed in Table 4-2.

#### 4.3.1. Analysis

RF exposure compliance with WWAN+WLAN simultaneous transmission scenarios is demonstrated for various radio configurations using the equation below:

$$\text{Total norm. RF exposure} = \text{norm. RF exposure from Smart Transmit enabled WWAN (norm. SAR from Sub-6 GHz + norm. PD from 5G mmW NR)} + \text{norm. SAR from WLAN} \leq 1.0 \text{ normalized limit} \quad (1)$$

Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure from Sub-6 GHz WWAN and time-averaged RF exposure from 5G mmW NR, i.e.,

$$\text{norm. RF exposure from Smart Transmit enabled WWAN: (normalized SAR exposure from Sub-6 GHz) + (normalized PD exposure from 5G mmW NR)} \leq 1.0 \text{ normalized limit} \quad (2)$$

In other words, Smart Transmit algorithm controls the total RF exposure from both Sub-6 GHz radio and 5G mmW NR to not exceed the FCC limit. All WWAN sub6 antennas are assumed to collocate with each mmW module (i.e., ignoring spatial distribution of WWAN Sub-6 hotspots) and directly adds normalized RF exposures from Sub-6 GHz WWAN and from each 5G mmW NR module, i.e.,

$$\begin{aligned} \text{If } A &= \text{max normalized time-averaged SAR exposure from 4G,} \\ B &= \text{max normalized time-averaged PD exposure from 5G mmW NR,} \end{aligned}$$

Then, equation (2) can be re-written as below because All WWAN sub6 antennas are assumed to collocate with each mmW module and 5G mmW NR hotspot:

$$\text{Smart Transmit enabled WWAN: } x(t) * A + (1-x(t)) * B \leq 1.0 \text{ normalized limit} \quad (3)$$



Here, " $x(t)*A$ " represents percentage of normalized time-averaged RF exposure from Sub-6 GHz WWAN, and  $x(t)$  ranges between  $[0,1]$ ; " $(1-x(t))*B$ " is remaining percentage of RF exposure contribution from 5G mmW NR. Smart Transmit controls ' $x$ ' in real time such that the sum of these exposures never exceeds the 1.0 normalized limit.

Note that mathematically:

$$x(t) * A + (1 - x(t)) * B \leq \max(A, B) \leq 1.0 \text{ normalized limit for } x(t) \in [0,1] \quad (4)$$

Therefore, if equations (5a) and (5b) are proven:

$$A + \text{norm. SAR from WLAN} \leq 1.0 \text{ norm. limit} \quad (5a),$$

$$B + \text{norm. SAR from WLAN} \leq 1.0 \text{ norm. limit} \quad (5b),$$

Then, based on equation (4), the condition below is also proved:

$$[x(t) * A + (1 - x(t)) * B] + \text{norm. SAR from WLAN} \leq 1.0 \text{ norm. limit} \quad (5c)$$

which is the same as equation (1), as a means to demonstrate compliance for simultaneous transmission.

Additionally, it should be noted that in the absence of 5G mmW NR, Smart Transmit limits the maximum RF exposure contributed from Sub-6 GHz WWAN to 100% normalized exposure (i.e.,  $x=1.0$  in equation 3). Therefore:

$$\text{Smart Transmit enabled WWAN: } A = \max(\text{normalized SAR exposure from 4G}) \leq 1.0 \text{ normalized limit} \quad (6a)$$

$$\text{Smart Transmit enabled WWAN: } B = \max(\text{normalized PD exposure from 5G mmW NR}) \leq 1.0 \text{ normalized limit} \quad (6b)$$

Thus, for compliance demonstration given by equation (1), equation (7) is obtained by combining equations (5a & 5b) and (6a & 6b) and should be proven to guarantee simultaneous transmission compliance:

$$\text{Total normalized RF exposure} = \text{norm. SAR from 4G WWAN} + \text{norm. SAR from WLAN} < 1.0 \text{ normalized FCC limit} \quad (7a)$$

$$\text{Total normalized RF exposure} = \text{norm. PD from 5G mmW NR WWAN} + \text{norm. SAR from WLAN} < 1.0 \text{ normalized FCC limit} \quad (7b)$$

The compliance for simultaneous transmission scenarios of WWAN (Sub-6 GHz/5G mmW NR) radio enabled with Smart Transmit and WLAN without Smart Transmit is re-evaluated for all transmission scenarios supported by this EUT.

As described in equation (7), simultaneous transmission analysis for WWAN + WLAN is performed in two parts:

1. Sub-6 GHz WWAN + WLAN (i.e., Eq. (7a) with compliance demonstration in §5.3.2)
2. 5G mmW NR WWAN + WLAN (i.e., Eq. (7b) with compliance demonstration in §5.3.3)

By combining the equations  $a$  and  $b$  variants, the FCC requirement expressed in Eq. (1) is re-written below:

$$\text{Total norm. RF exposure} = \text{norm. RF exposure from Smart Transmit enabled WWAN (norm. SAR from Sub-6 GHz WWAN} + \text{norm. PD from 5G mmW NR)} + \text{norm. SAR from WLAN} \leq 1.0 \text{ normalized limit} \quad (1)$$

### 4.3.2. Simultaneous Transmission Compliance Demonstration for Sub-6 GHz WWAN + WLAN

Simultaneous transmission analysis for Sub-6 WWAN + WLAN is shown in the UL FCC SAR Test Report 13571607-S1.

### 4.3.3. Simultaneous Transmission Compliance Demonstration for 5G mmW NR WWAN + WLAN

Simultaneous transmission analysis is performed in this section using worst-case PD values listed in Tables 4-3 to 4-5 for compliance demonstration of 5G mmW NR WWAN + WLAN, along with all worst-case reported SAR, extracted from UL FCC SAR Test Report 13571607-S1, values for WLAN listed in Table 4-2.

Simultaneous transmission analysis on all 5G mmW NR WWAN + WLAN scenarios are listed below:

**Table 4-7: Simultaneous transmission analysis scenarios for 5G mmW NR WWAN + WLAN**

1	2.4GHz WLAN* + 5G mmW NR
2	5GHz WLAN* + 5G mmW NR
3	5GHz WLAN* + BT + 5G mmW NR

\*: For each of the WLAN bands, worst-case SAR out of both WLAN antennas and WLAN MIMO scenarios is used during simultaneous transmission analysis. Additionally, note that WLAN 2.4GHz and WLAN 5GHz cannot transmit simultaneously.

The total exposure ratio (TER) is calculated using the equation below, followed by the calculated TER for this EUT:

$$TER = \sum_{n=1}^N \frac{SAR_n}{SAR_{n,limit}} + \sum_{n=1}^N \frac{S_{m,avg}}{S_{m,limit}} < 1$$

**Table 4-7: 5G mmW NR Simulation PD Surface Ratio n258**

n258					
Surface	PD Magnitude Ratio		Head	Body <sup>1</sup>	Meas. Total PD
	2mm	5mm	PD @ 2mm (W/m <sup>2</sup> )	PD @ 5mm (W/m <sup>2</sup> )	(W/m <sup>2</sup> )
S1	0.56	-	5.6	3.6	2.4
S2	1.00	0.58	-	6.4	-
S3	0.22	-	-	1.4	0.074
S4	1.00	0.64	-	6.4	-
S5	0.24	-	-	1.5	0.639
S6	0.03	-	-	0.2	-

<sup>1</sup> Results for Body were calculated using the most conservative ratio between the PD Magnitudes for 2mm and 5mm.

**Table 4-8: 5G mmW NR Simulation PD Surface Ratio n260**

n260					
Surface	PD Magnitude Ratio		Head	Body <sup>1</sup>	Meas. Total PD
	2mm	5mm	PD @ 2mm (W/m <sup>2</sup> )	PD @ 5mm (W/m <sup>2</sup> )	(W/m <sup>2</sup> )
S1	0.50	-	5	2.6	0.181
S2	1.00	0.32	-	5.2	-
S3	0.16	-	-	0.8	0.062
S4	1.00	0.52	-	5.2	-
S5	0.21	-	-	1.1	0.565
S6	0.02	-	-	0.1	-

<sup>1</sup> Results for Body were calculated using the most conservative ratio between the PD Magnitudes for 2mm and 5mm.

**Table 4-9: 5G mmW NR Simulation PD Surface Ratio n261**

n261					
Surface	PD Magnitude Ratio		Head	Body <sup>1</sup>	Meas. Total PD
	2mm	5mm	PD @ 2mm (W/m <sup>2</sup> )	PD @ 5mm (W/m <sup>2</sup> )	(W/m <sup>2</sup> )
S1	0.58	-	5.80	3.8	2.35
S2	1.00	0.55	-	6.5	-
S3	0.21	-	-	1.4	0.076
S4	1.00	0.65	-	6.5	-
S5	0.21	-	-	1.4	0.292
S6	0.03	-	-	0.2	-

<sup>1</sup> Results for Body were calculated using the most conservative ratio between the PD Magnitudes for 2mm and 5mm.

**Table 4-10: Head TER for Worst-Case WLAN + 5G mmW NR n258**

Head TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P <sub>low</sub>	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT
	W/m <sup>2</sup>	W/kg	W/kg	W/kg			
TER Combinations	1	2	3	4	1+2	1+3	1+3+4
Applicable limit	10	1.6	1.6	1.6	1	1	1
Reported Exposure	5.6	0.374	0.270	0.098	-	-	-
Ratio to Limit	0.560	0.234	0.169	0.061	0.794	0.729	0.790

**Table 4-11: Head TER for Worst-Case WLAN + 5G mmW NR n260**

Head TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P <sub>low</sub>	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT
	W/m <sup>2</sup>	W/kg	W/kg	W/kg			
TER Combinations	1	2	3	4	1+2	1+3	1+3+4
Applicable limit	10	1.6	1.6	1.6	1	1	1
Reported Exposure	5	0.374	0.270	0.098	-	-	-
Ratio to Limit	0.500	0.234	0.169	0.061	0.734	0.669	0.730

**Table 4-12: Head TER for Worst-Case WLAN + 5G mmW NR n261**

Head TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P <sub>low</sub>	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT
	W/m <sup>2</sup>	W/kg	W/kg	W/kg			
TER Combinations	1	2	3	4	1+2	1+3	1+3+4
Applicable limit	10	1.6	1.6	1.6	1	1	1
Reported Exposure	5.80	0.374	0.270	0.098	-	-	-
Ratio to Limit	0.580	0.234	0.169	0.061	0.814	0.749	0.810

**Table 4-13: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n258**

n258							
Body/Hotspot TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P <sub>low</sub>	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT
	W/m <sup>2</sup>	W/kg	W/kg	W/kg			
Scenario	1	2	3	4	1+2	1+3	1+3+4
Applicable limit	10	1.6	1.6	1.6	1	1	1
S1 @ 5 mm	Reported Exposure	3.584	0.468	0.191	0.051	-	-
	Ratio to Limit	0.358	0.293	0.119	0.032	0.651	0.478
S2 @ 5mm	Reported Exposure	6.400	0.494	0.398	0.086	-	-
	Ratio to Limit	0.640	0.308	0.249	0.054	0.948	0.889
S3 @ 5mm	Reported Exposure	1.408	0.468	0.391	0.074	-	-
	Ratio to Limit	0.141	0.293	0.245	0.046	0.434	0.385
S4 @ 5mm	Reported Exposure	6.400	0.479	0.000	0.094	-	-
	Ratio to Limit	0.640	0.300	0.000	0.059	0.940	0.640
S5 @ 5mm	Reported Exposure	1.536	0.367	0.191	0.000	-	-
	Ratio to Limit	0.154	0.229	0.119	0.000	0.383	0.273
S6 @ 5mm	Reported Exposure	0.192	0.468	0.094	0.025	-	-
	Ratio to Limit	0.019	0.293	0.059	0.015	0.312	0.078

**Table 4-14: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n260**

n260								
Body/Hotspot TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P <sub>low</sub>	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT	
	W/m <sup>2</sup>	W/kg	W/kg	W/kg				
Scenario	1	2	3	4	1+2	1+3	1+3+4	
Applicable limit	10	1.6	1.6	1.6	1	1	1	
S1 @ 5 mm	Reported Exposure	2.600	0.468	0.191	0.051	-	-	-
	Ratio to Limit	0.260	0.293	0.119	0.032	0.553	0.379	0.411
S2 @ 5mm	Reported Exposure	5.200	0.494	0.398	0.086	-	-	-
	Ratio to Limit	0.520	0.308	0.249	0.054	0.828	0.769	0.822
S3 @ 5mm	Reported Exposure	0.832	0.468	0.391	0.074	-	-	-
	Ratio to Limit	0.083	0.293	0.245	0.046	0.376	0.328	0.374
S4 @ 5mm	Reported Exposure	5.200	0.479	0.000	0.094	-	-	-
	Ratio to Limit	0.520	0.300	0.000	0.059	0.820	0.520	0.579
S5 @ 5mm	Reported Exposure	1.092	0.367	0.191	0.000	-	-	-
	Ratio to Limit	0.109	0.229	0.119	0.000	0.339	0.228	0.228
S6 @ 5mm	Reported Exposure	0.104	0.468	0.094	0.025	-	-	-
	Ratio to Limit	0.010	0.293	0.059	0.015	0.303	0.069	0.085

**Table 4-15: Body/Hotspot TER for Worst-Case WLAN + 5G mmW NR n261**

n261								
Body/Hotspot TER	psPD	2.4 GHz WiFi	5 GHz WiFi	BT P <sub>low</sub>	psPD + 2.4 GHz WLAN	psPD + 5 GHz WLAN	psPD + 5 GHz WLAN + BT	
	W/m <sup>2</sup>	W/kg	W/kg	W/kg				
Scenario	1	2	3	4	1+2	1+3	1+3+4	
Applicable limit	10	1.6	1.6	1.6	1	1	1	
S1 @ 5 mm	Reported Exposure	3.770	0.468	0.191	0.051	-	-	-
	Ratio to Limit	0.377	0.293	0.119	0.032	0.670	0.496	0.528
S2 @ 5mm	Reported Exposure	6.500	0.494	0.398	0.086	-	-	-
	Ratio to Limit	0.650	0.308	0.249	0.054	0.958	0.899	0.952
S3 @ 5mm	Reported Exposure	1.365	0.468	0.391	0.074	-	-	-
	Ratio to Limit	0.137	0.293	0.245	0.046	0.429	0.381	0.427
S4 @ 5mm	Reported Exposure	6.500	0.479	0.000	0.094	-	-	-
	Ratio to Limit	0.650	0.300	0.000	0.059	0.950	0.650	0.709
S5 @ 5mm	Reported Exposure	1.365	0.367	0.191	0.000	-	-	-
	Ratio to Limit	0.137	0.229	0.119	0.000	0.366	0.256	0.256
S6 @ 5mm	Reported Exposure	0.195	0.468	0.094	0.025	-	-	-
	Ratio to Limit	0.020	0.293	0.059	0.015	0.312	0.078	0.094

## 5. Conclusions

Table 5-1 shows the worst-case 1-g SAR at  $P_{limit}$  and worst-case 4cm<sup>2</sup>-avg PD at *input.power.limit*.

**Table 5-1: Reported RF Exposure Level**

Reported RF Exposure Level		Notes
Highest 1-g SAR at $P_{limit}$ (W/kg)	0.959	Refer to §1 for the reference SAR Report
Highest 4cm <sup>2</sup> -avg PD at <i>input.power.limit</i> (W/m <sup>2</sup> )	7.53	§4.2
Highest 1-g SAR (W/kg) for simultaneous Tx (Sub-6 WWAN + WLAN)	1.521	Refer to §1 for the reference SAR Report
Highest Total Exposure Ratio for simultaneous Tx (5G mmW NR + WLAN)	0.958	§4.3

Qualcomm's Smart Transmit feature employed in the EUT meets the  $SAR_{Design\ Target}$  and  $PD_{Design\ Target}$  (within the design uncertainties) when operating in the static transmission condition at  $P_{limit}$  and *input.power.limit*, respectively, and is compliant with the FCC RF exposure limits.

## Appendices

**Refer to separated files for the following appendixes.**

### A. mmW Probe Certificate

### B. Verification Source Certificate