



Nemko Test Report: 16264RUS1

Applicant: Andrew Corporation
108 Rand Park Drive
Garner, NC 27529
USA

Equipment Under Test: AF1927
(E.U.T.)

In Accordance With: CFR 47, Part 24, Subpart E
Broadband PCS Repeaters

Tested By: Nemko USA, Inc.
802 N. Kealy
Lewisville, TX 75057-3136


TESTED BY:



David Light, Senior Wireless Engineer

DATE: 06 October, 2008

APPROVED BY:



DATE: 08 October, 2008

Number of Pages: 60

Table of Contents

SECTION 1.	SUMMARY OF TEST RESULTS	3
SECTION 2.	GENERAL EQUIPMENT SPECIFICATION	5
SECTION 3.	RF POWER OUTPUT	7
SECTION 4.	OCCUPIED BANDWIDTH	8
SECTION 5.	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	25
SECTION 6.	FIELD STRENGTH OF SPURIOUS	50
SECTION 7.	TEST EQUIPMENT LIST	51
ANNEX A - TEST DETAILS		52
ANNEX B - TEST DIAGRAMS		57

EQUIPMENT: **AF1927**

Section 1. Summary of Test Results

Manufacturer Andrew Corporation

Model No.: AF1927

Serial No.: 15

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with CFR 47, Part 24, Subpart E.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
RF Power Output	24.232	100W	Complies
Occupied Bandwidth	2.1049	Input/Output	Complies
Spurious Emissions at Antenna Terminals	24.238(a)	-13 dBm	Complies
Field Strength of Spurious Emissions	24.238(a)	-13 dBm E.I.R.P.	Complies
Frequency Stability	24.235		NA

Footnotes:

- (1) Modulation characteristics were not tested since the E.U.T. processes but does not produce a modulated waveform.
- (2) Frequency stability was not performed because the device under test uses a common oscillator for down-conversion of the signal to an intermediate frequency and up-conversion of the signal from IF to the transmit frequency. The output frequency is the same as the input frequency.


EQUIPMENT: **AF1927****Section 2. General Equipment Specification**

Supply Voltage Input:	120 Vac		
Frequency Bands: Downlink:	☒ Block A : 1930 – 1945 MHz ☒ Block D : 1945 – 1950 MHz ☒ Block B : 1950 – 1965 MHz ☒ Block E : 1965 – 1970 MHz ☒ Block F : 1970 – 1975 MHz ☒ Block C : 1975 – 1990 MHz		
Frequency Bands: Uplink:	☒ Block A : 1850 – 1865 MHz ☒ Block D : 1865 – 1870 MHz ☒ Block B : 1870 – 1885 MHz ☒ Block E : 1885 – 1890 MHz ☒ Block F : 1890 – 1895 MHz ☒ Block C : 1895 – 1910 MHz		
Type of Modulation and Designator:	CDMA (F9W) ☒	GSM (GXW) ☒	W-CDMA (F9W) ☒
			EDGE (G7W) ☒
System Gain:	84 dB		
Output Impedance:	50 ohms		
RF Output (Rated): Uplink	$\frac{1.0}{30}$ W dBm		
RF Output (Rated): Downlink	$\frac{0.50}{27}$ W dBm		
Frequency Translation:	F1-F1 ☒	F1-F2 ☐	N/A ☐
Band Selection:	Software ☒	Duplexer ☐	Fullband ☐

Description of EUT

The Node A is an RF enhancer which is capable of filtering and amplifying a multitude of distinct sub-bands up to 120 MHz in total anywhere within multiple frequency bands. It is designed to be part of the primary infrastructure

System Diagram

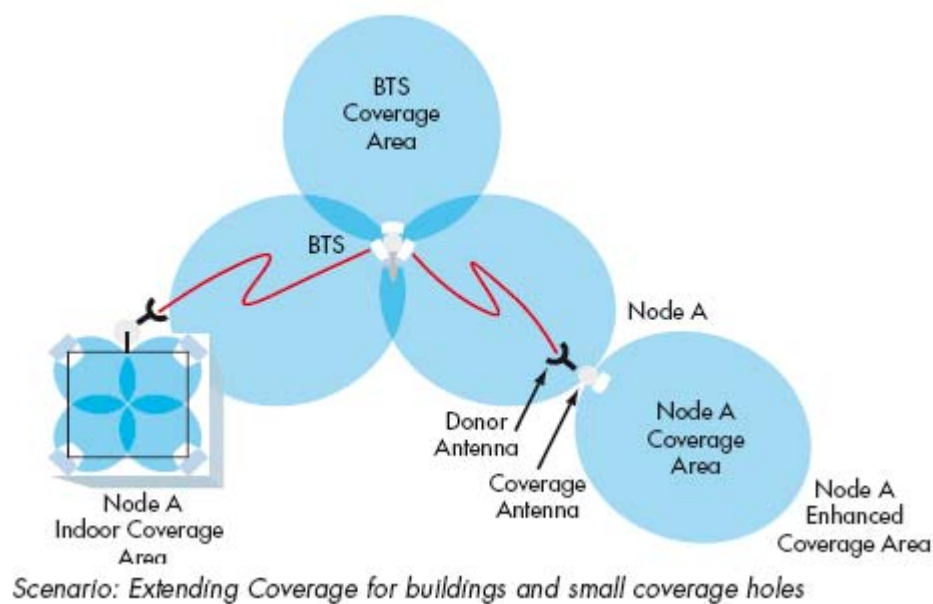

EQUIPMENT: **AF1927****Section 3. RF Power Output**

NAME OF TEST: RF Power Output	PARA. NO.: 24.232
TESTED BY: David Light	DATE: 06 October 2008

Test Results: Complies.

Measurement Data:

Direction	Modulation	Composite Power (dBm)	RF Power (W)
Downlink	CDMA	27	0.5
	GSM	27	0.5
	EDGE	27	0.5
	WCDMA	27	0.5
Uplink	CDMA	30	1.0
	GSM	30	1.0
	EDGE	30	1.0
	WCDMA	30	1.0

Equipment Used: 1604-1064-1082-1659

Measurement Uncertainty: +/- 1.7 dBTemperature: 22 °CRelative Humidity: 48 %

EQUIPMENT: **AF1927**

Section 4. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 24.238
TESTED BY: David Light	DATE: 06 October 2008

Test Results: Complies.

Test Data: See attached plot(s).

Equipment Used: 1064-1604-1082-1659

Measurement Uncertainty: 1X10⁻⁷ ppm

Temperature: 22 °C

Relative Humidity: 48 %

EQUIPMENT: **AF1927**

Test Data – Occupied Bandwidth


Output – Uplink

CDMA / EVDO



Ref Lvl
40 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

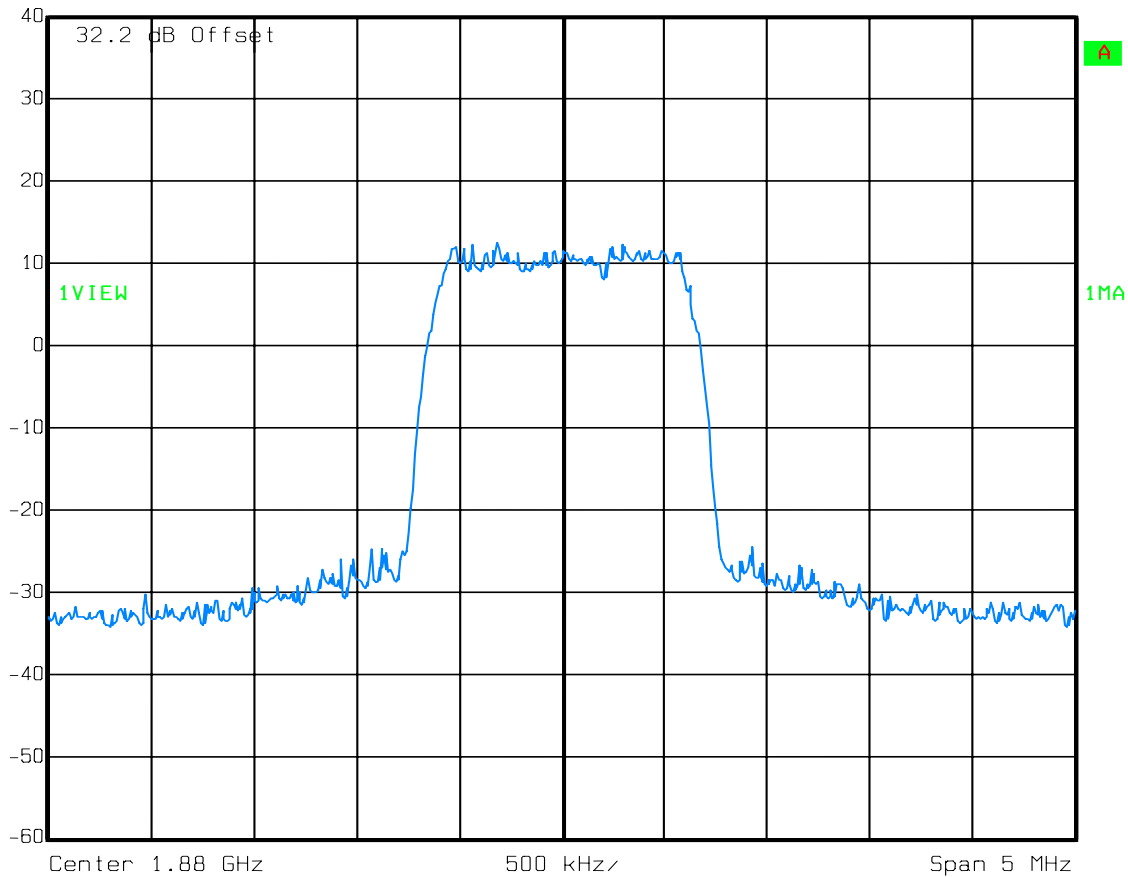

Date: 06.OCT.2008 12:53:42

EQUIPMENT: **AF1927**

Test Data – Occupied Bandwidth


Input – Uplink

CDMA / EVDO



Ref Lvl
-30 dBm

RBW	30 kHz	RF Att	0 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

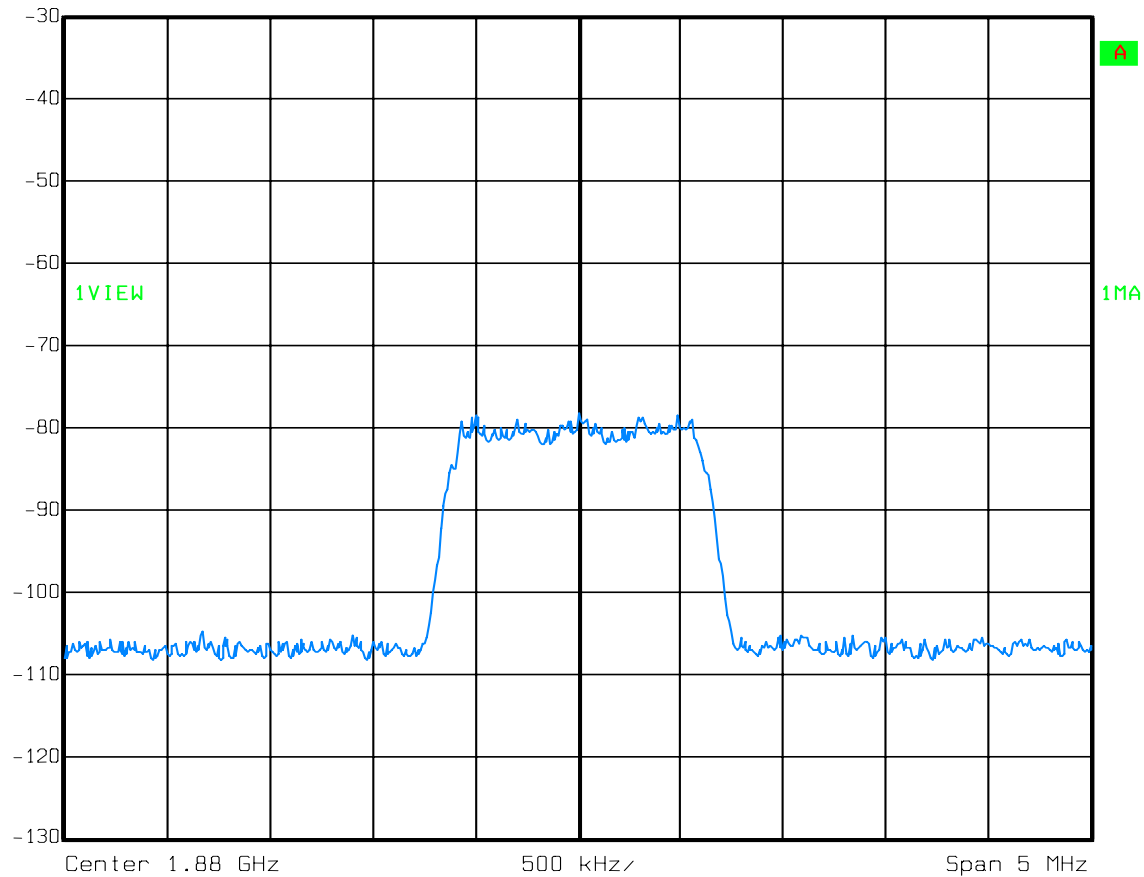

Date: 06.OCT.2008 12:55:11

EQUIPMENT: **AF1927**


Test Data – Occupied Bandwidth

GSM
Output - Uplink



Ref Lvl
40 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz		
SWT	280 ms	Unit	dBm

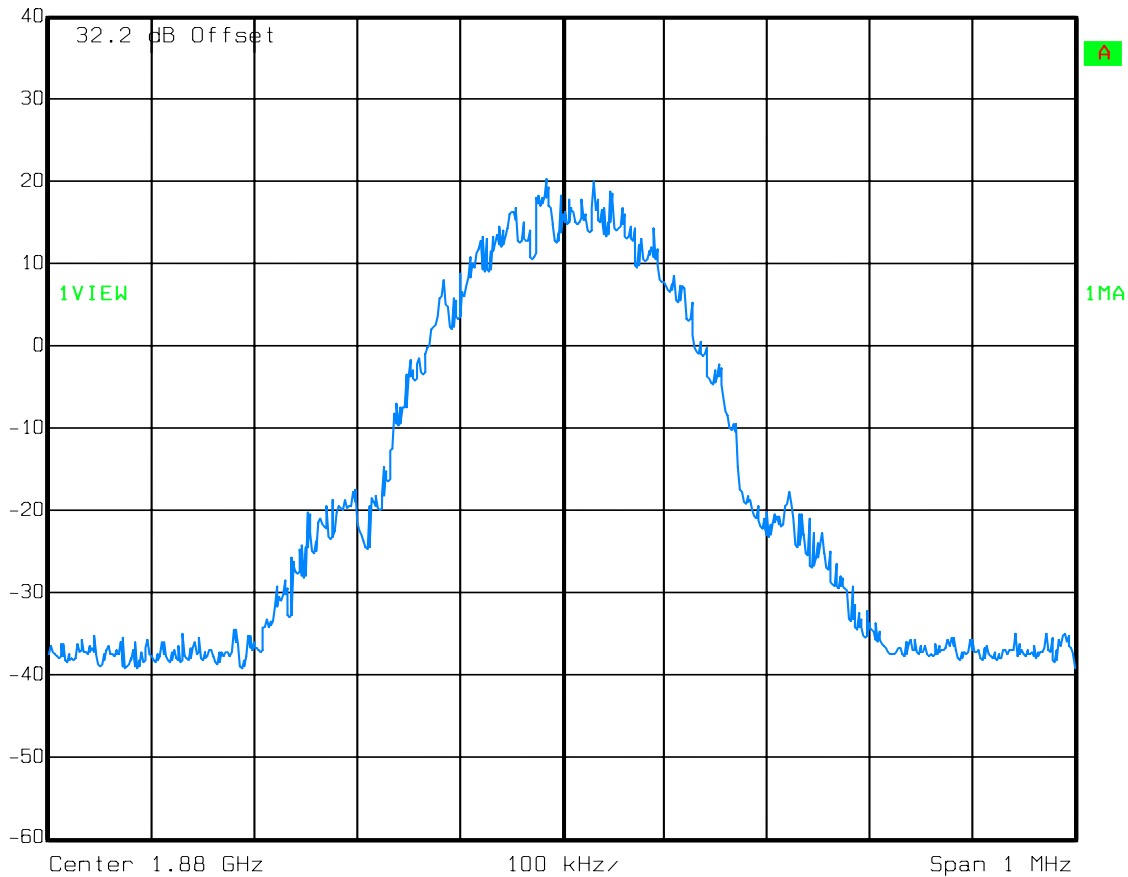

Date: 06.OCT.2008 12:59:06

EQUIPMENT: **AF1927**

Test Data – Occupied Bandwidth


GSM

Input - Uplink



Ref Lvl
-40 dBm

RBW	3 kHz	RF Att	0 dB
VBW	3 kHz		
SWT	280 ms	Unit	dBm

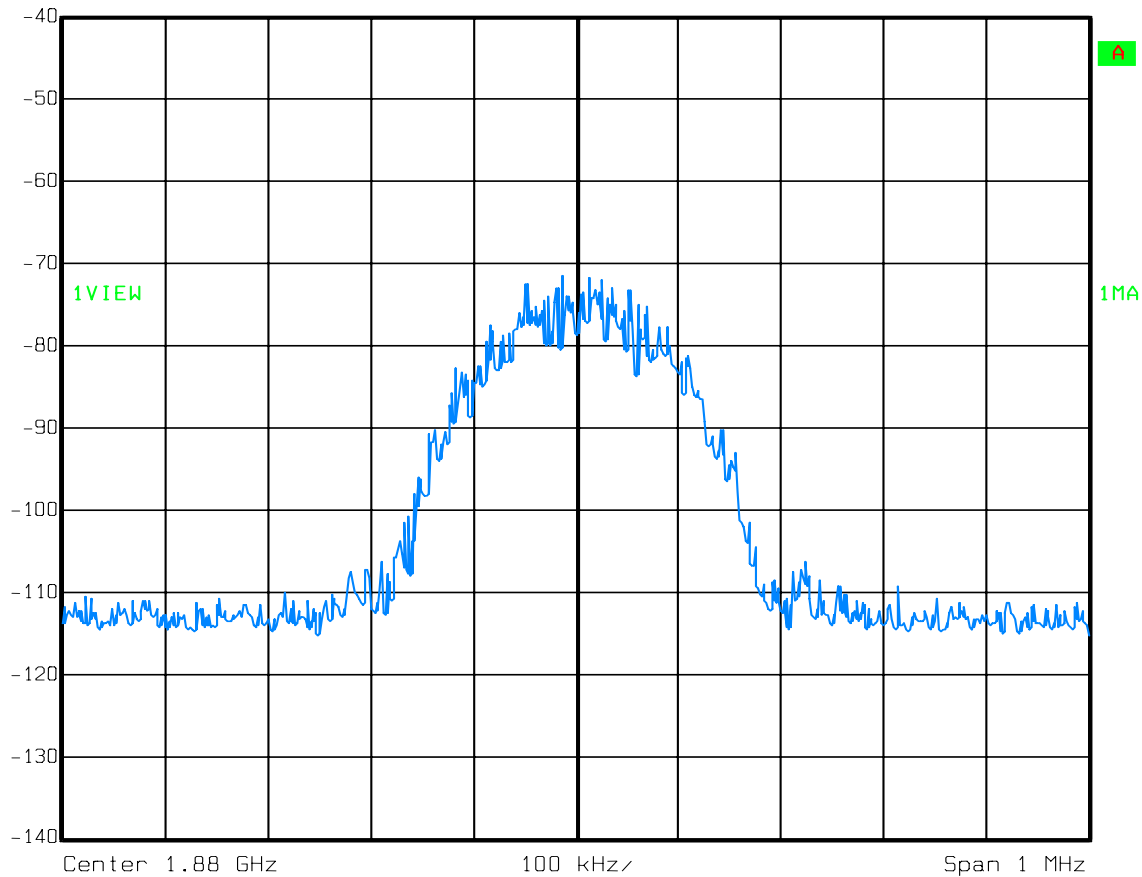

Date: 06.OCT.2008 13:00:28


EQUIPMENT: **AF1927****Test Data – Occupied Bandwidth**

EDGE

Output - Uplink

Ref Lvl
40 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz		
SWT	280 ms	Unit	dBm

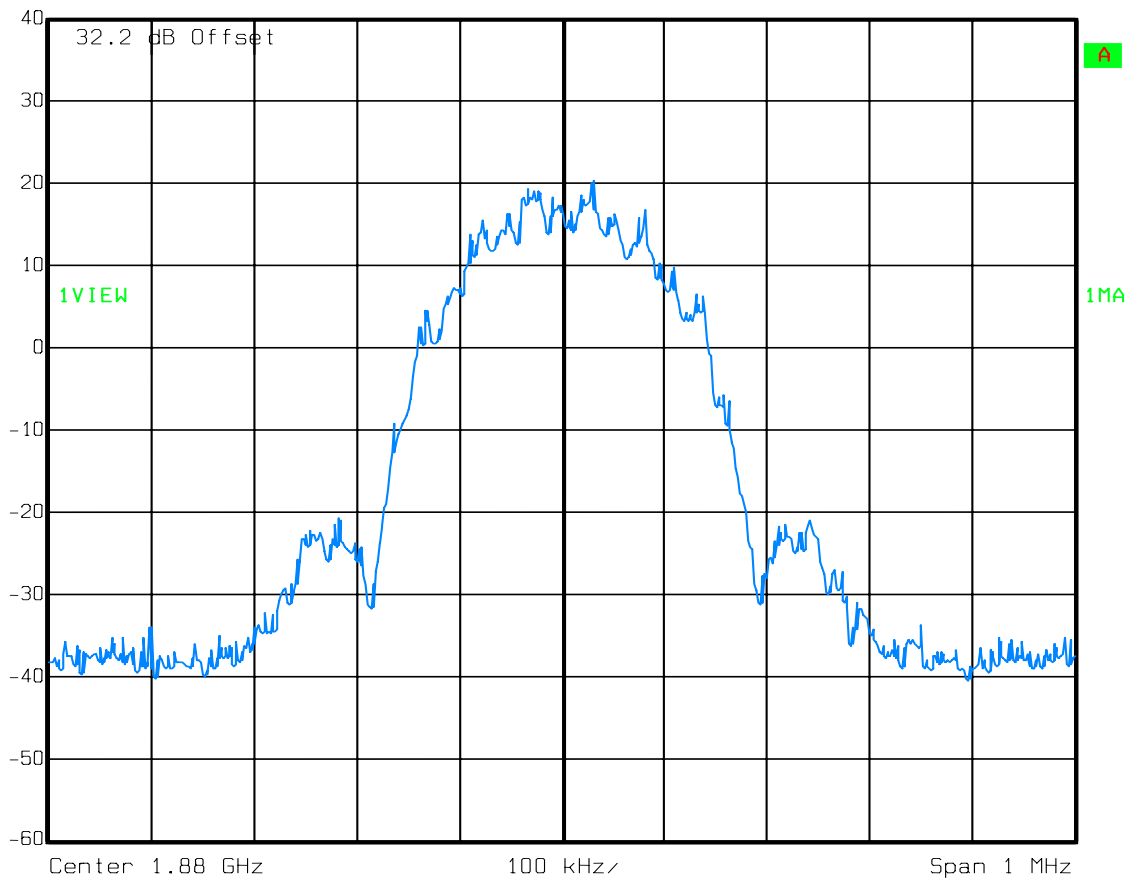

Date: 06.OCT.2008 13:11:29

EQUIPMENT: **AF1927**

Test Data – Occupied Bandwidth


EDGE

Input - Uplink



Ref Lvl
-40 dBm

RBW	3 kHz	RF Att	0 dB
VBW	3 kHz		
SWT	280 ms	Unit	dBm

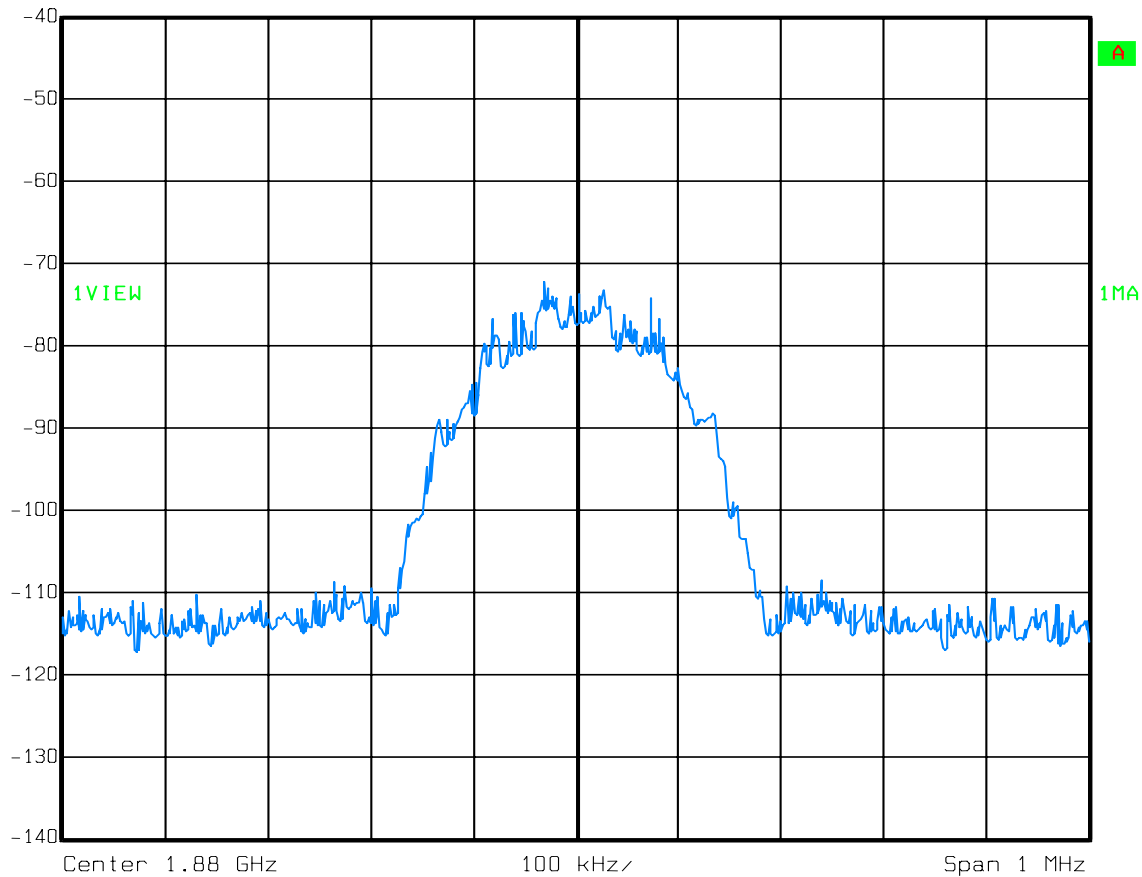

Date: 06.OCT.2008 13:12:33


EQUIPMENT: **AF1927****Test Data – Occupied Bandwidth**

W-CDMA

Out put - Uplink

Ref Lvl
40 dBm

RBW	50 kHz	RF Att	20 dB
VBW	50 kHz		
SWT	10 ms	Unit	dBm

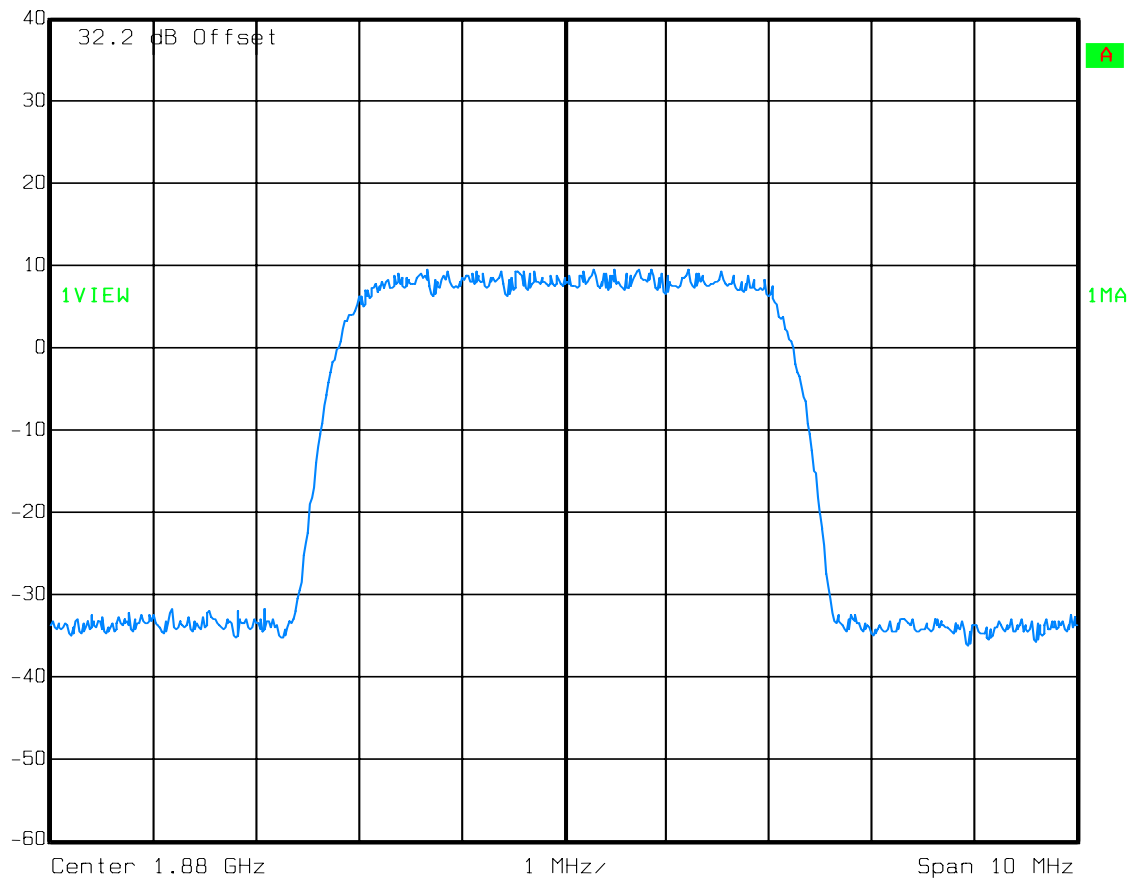

Date: 06.OCT.2008 13:17:32

EQUIPMENT: **AF1927**


Test Data – Occupied Bandwidth

W-CDMA
Input - Uplink



Ref Lvl
-30 dBm

RBW	50 kHz	RF Att	0 dB
VBW	50 kHz		
SWT	10 ms	Unit	dBm

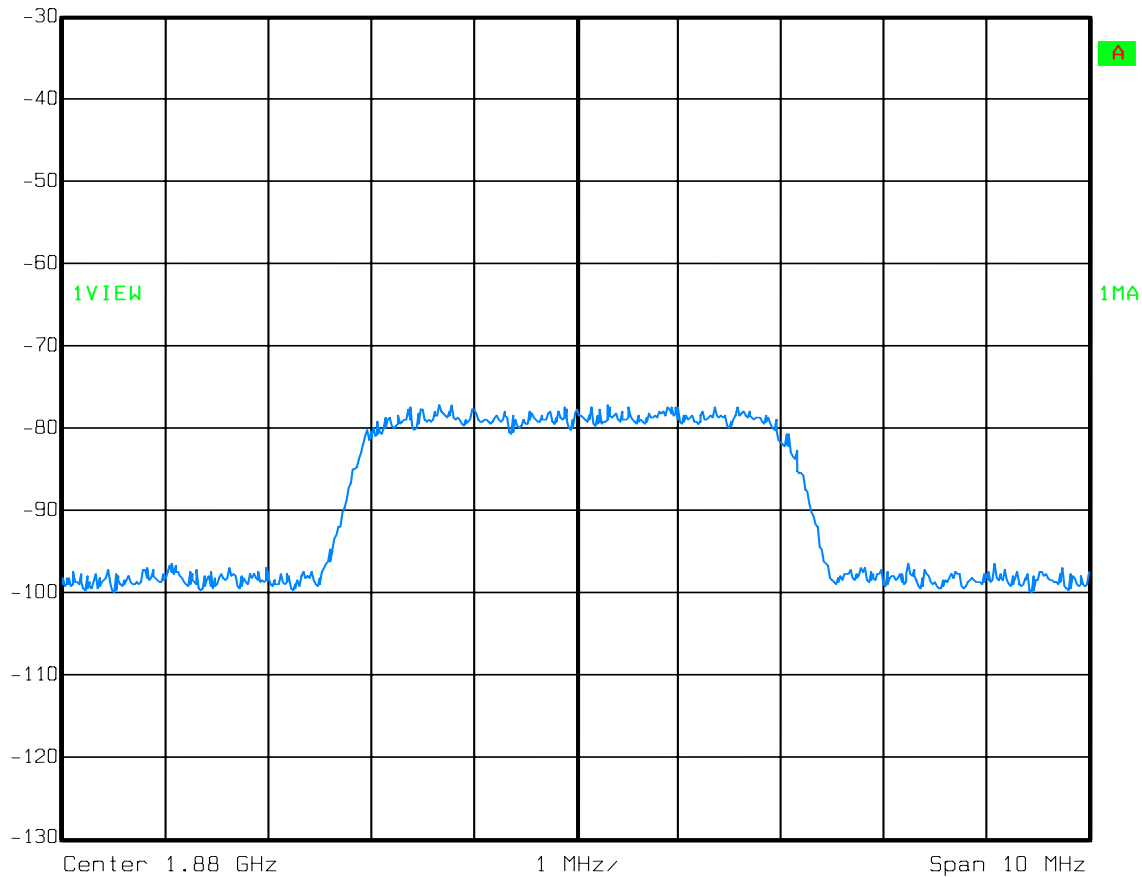

Date: 06.OCT.2008 13:18:42

EQUIPMENT: **AF1927**

Test Data – Occupied Bandwidth


CDMA

Output - Downlink



Ref Lvl
40 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

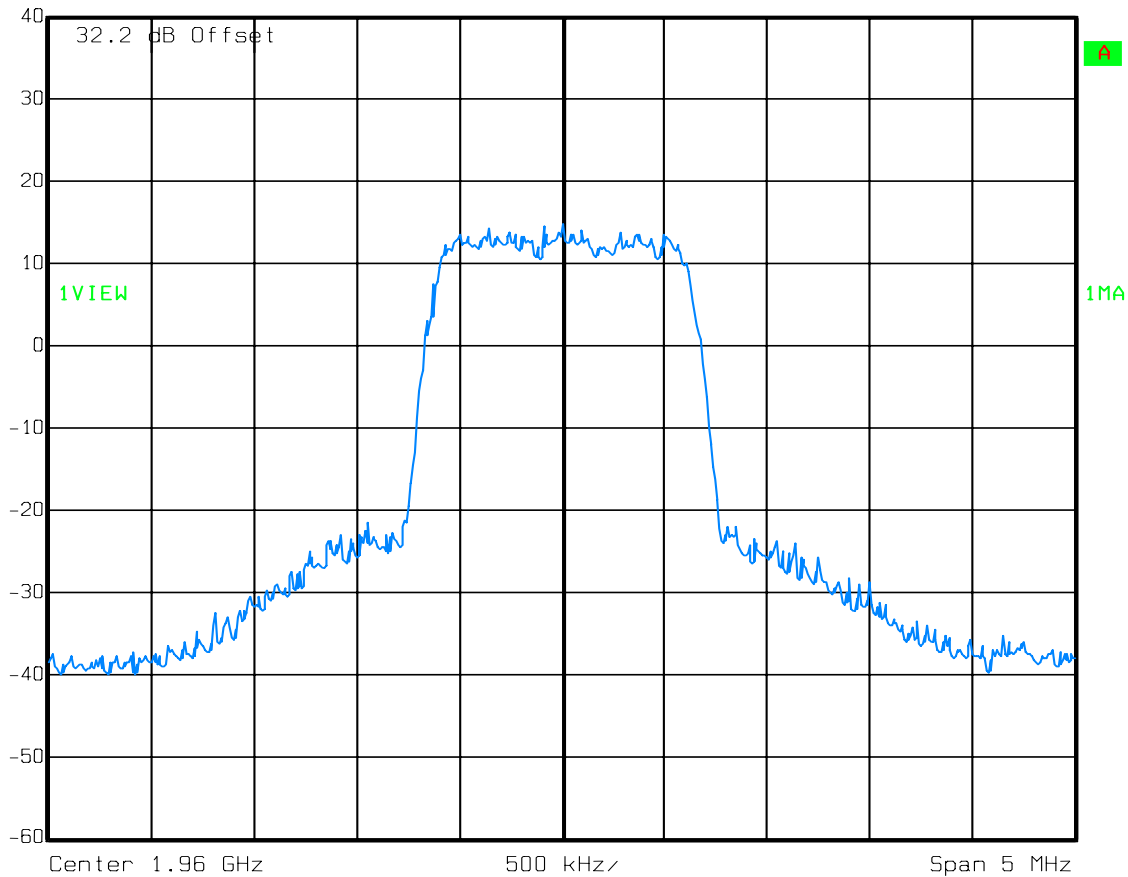

Date: 06.OCT.2008 15:22:35

EQUIPMENT: **AF1927**

Test Data – Occupied Bandwidth


CDMA

Input - Downlink



Ref Lvl
-30 dBm

RBW	30 kHz	RF Att	0 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

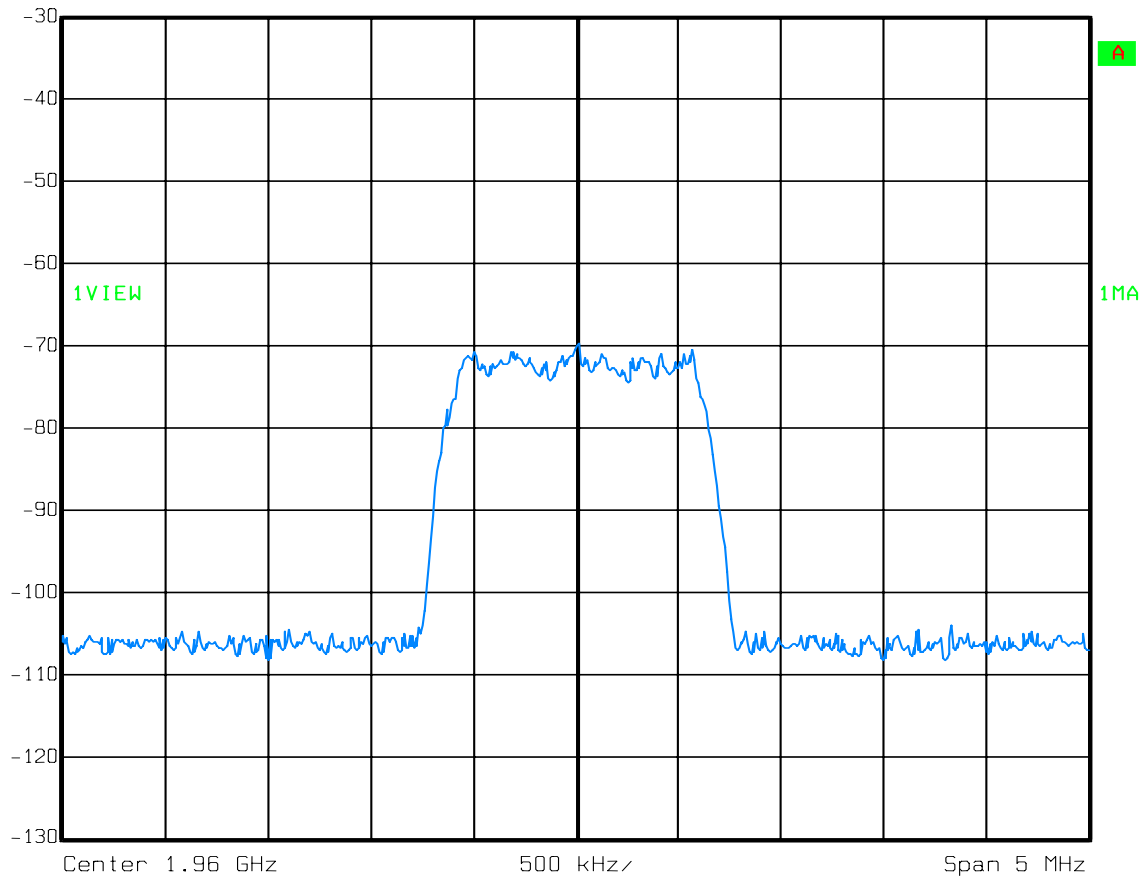

Date: 06.OCT.2008 15:23:27


EQUIPMENT: **AF1927****Test Data – Occupied Bandwidth**

GSM

Output - Downlink

Ref Lvl
40 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz		
SWT	560 ms	Unit	dBm

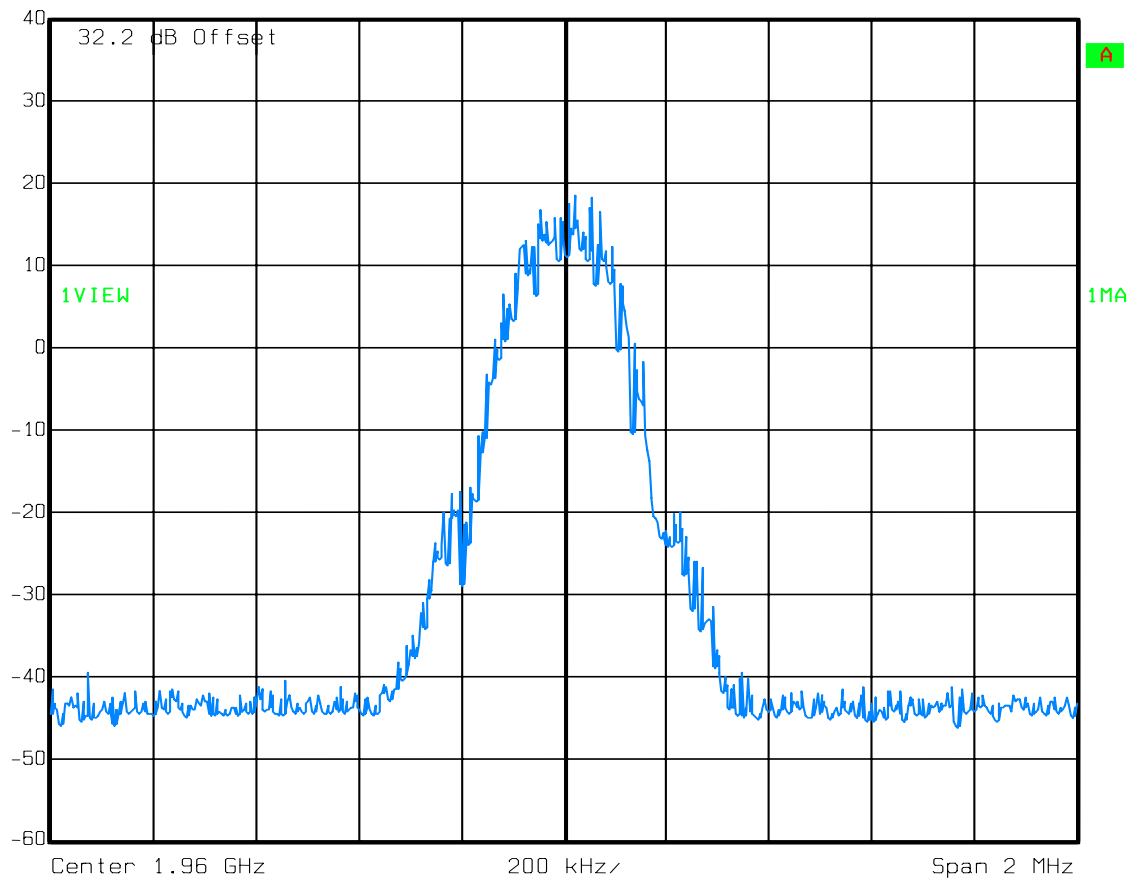

Date: 06.OCT.2008 15:17:28

EQUIPMENT: **AF1927**

Test Data – Occupied Bandwidth


GSM

Input - Downlink



Ref Lvl
-30 dBm

RBW	3 kHz	RF Att	0 dB
VBW	3 kHz		
SWT	560 ms	Unit	dBm

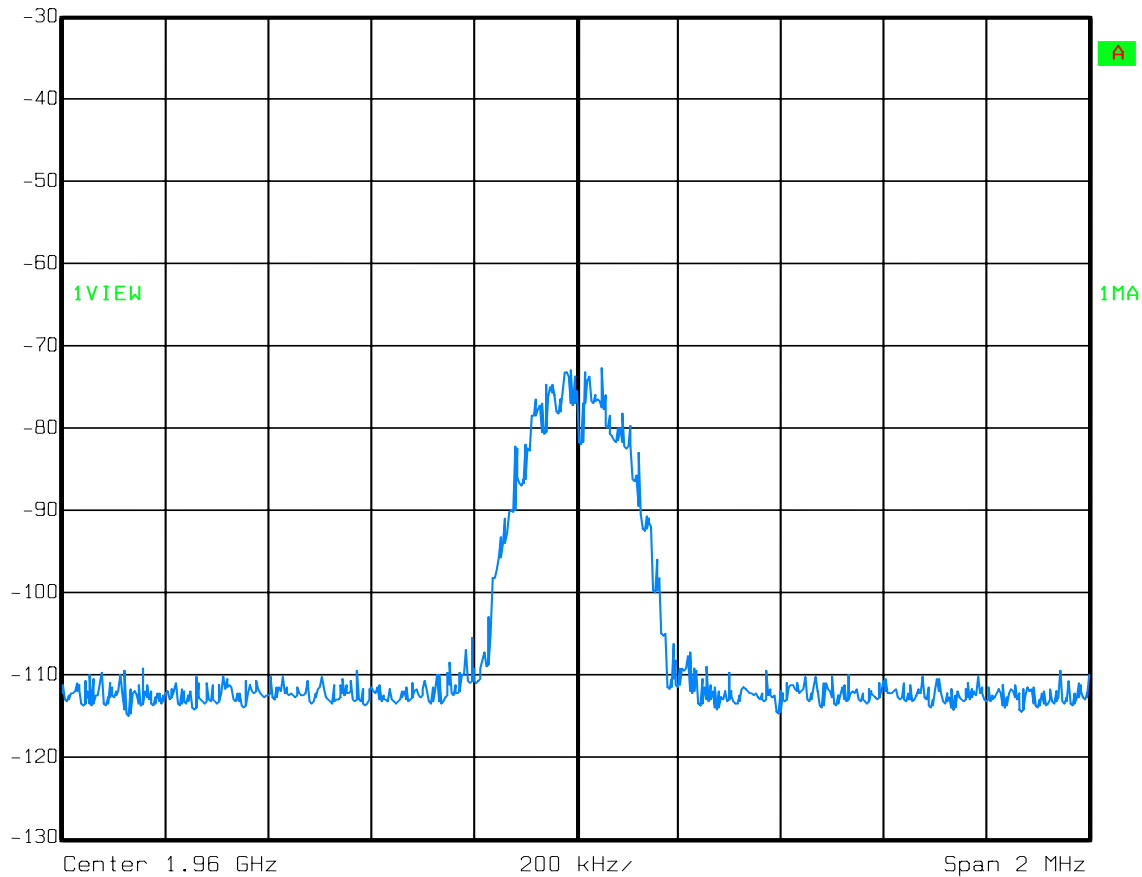

Date: 06.OCT.2008 15:18:30


EQUIPMENT: **AF1927****Test Data – Occupied Bandwidth**

EDGE

Output - Downlink

Ref Lvl
40 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz		
SWT	280 ms	Unit	dBm

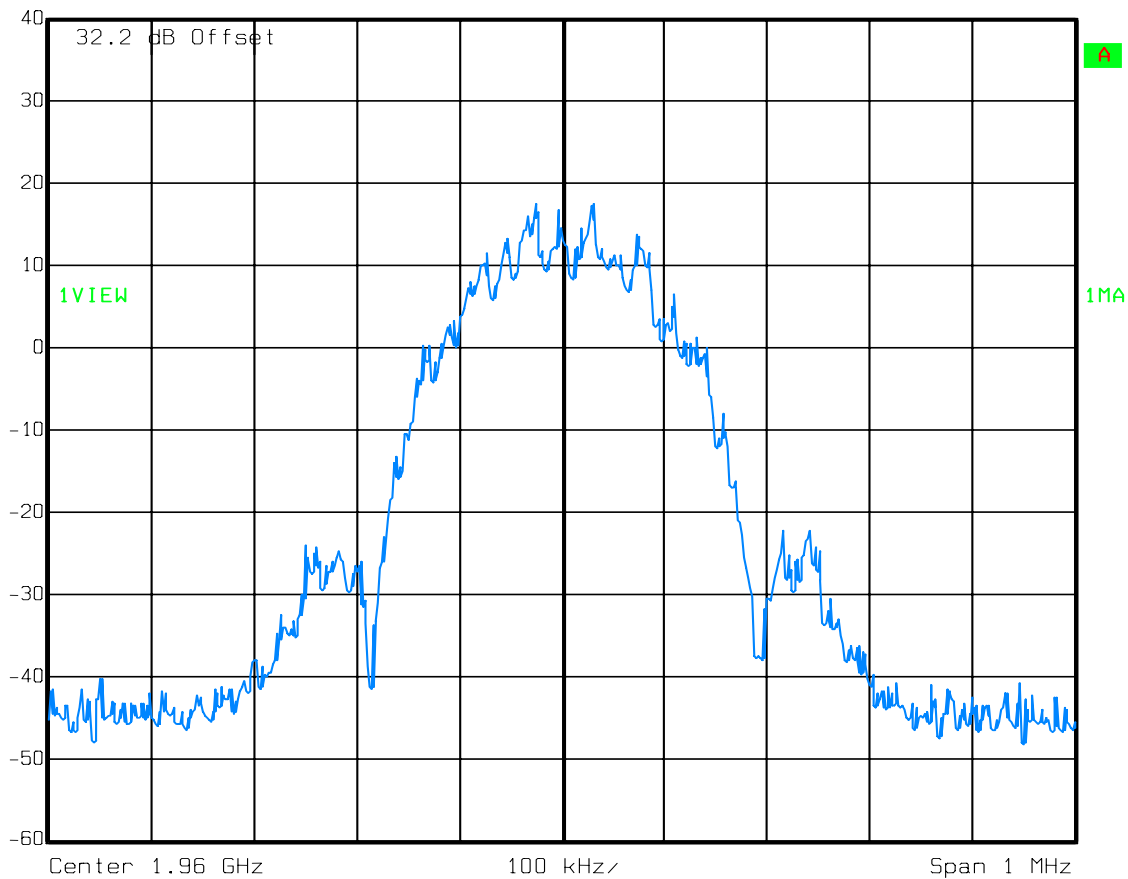

Date: 06.OCT.2008 15:08:29

EQUIPMENT: **AF1927**

Test Data – Occupied Bandwidth


EDGE

Input - Downlink



Ref Lvl
-30 dBm

RBW	3 kHz	RF Att	0 dB
VBW	3 kHz		
SWT	280 ms	Unit	dBm

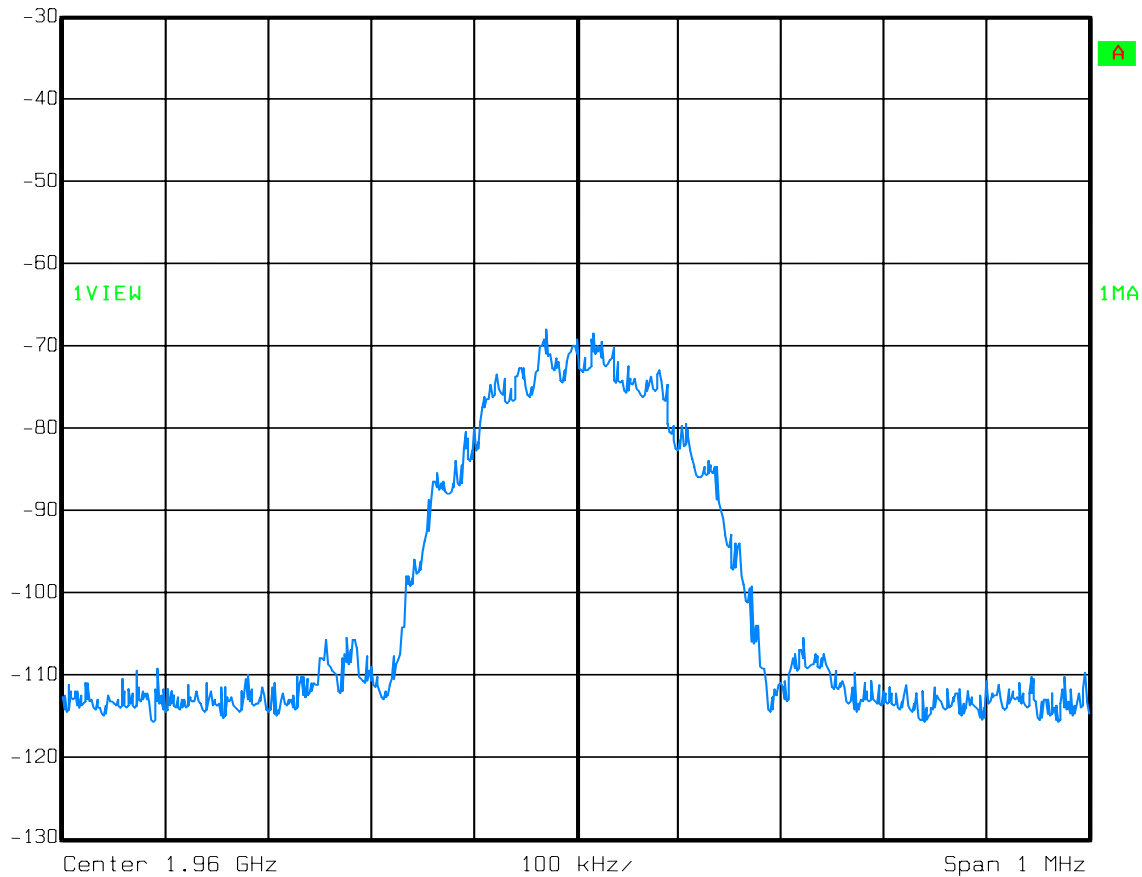

Date: 06.OCT.2008 15:09:20

EQUIPMENT: **AF1927**

Test Data – Occupied Bandwidth


W-CDMA

Output - Downlink



Ref Lvl
40 dBm

RBW	50 kHz	RF Att	20 dB
VBW	50 kHz		
SWT	10 ms	Unit	dBm

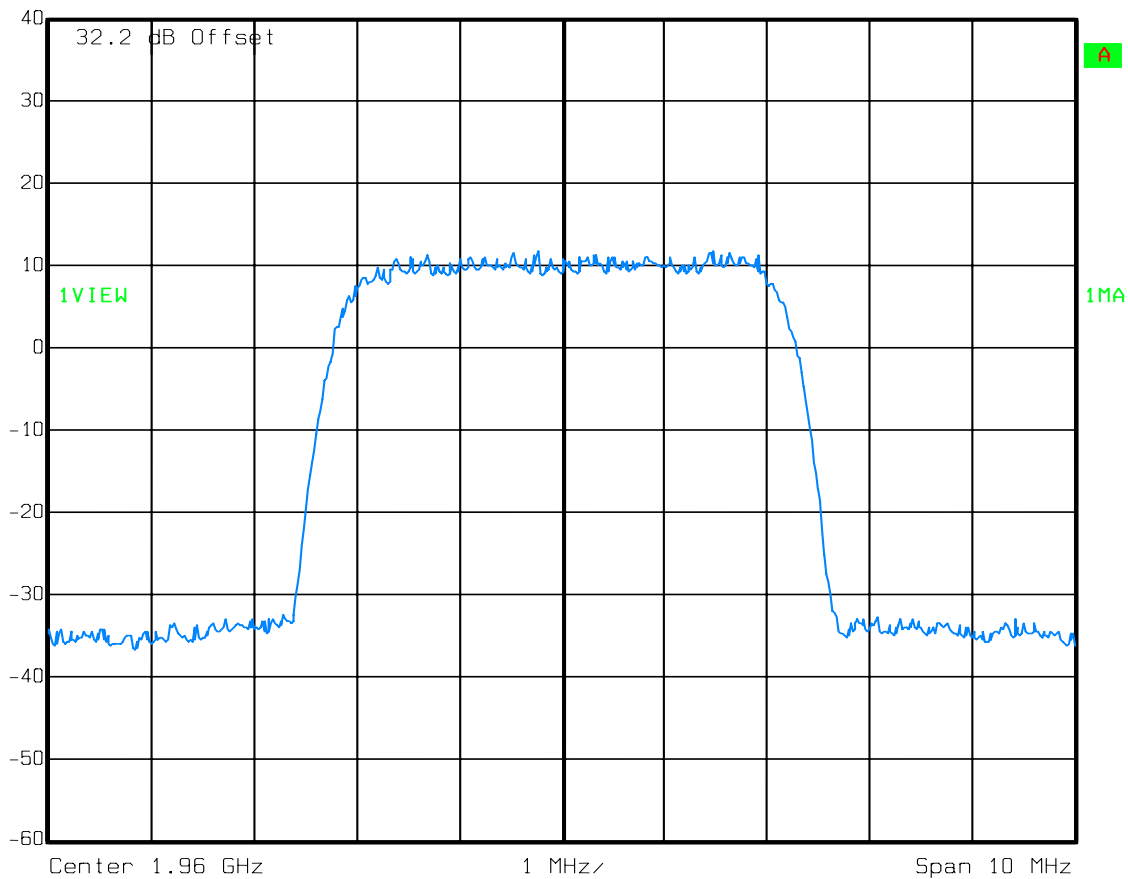

Date: 06.OCT.2008 15:02:33

EQUIPMENT: **AF1927**

Test Data – Occupied Bandwidth


W-CDMA

Input - Downlink



Ref Lvl
-20 dBm

RBW	50 kHz	RF Att	0 dB
VBW	50 kHz		
SWT	10 ms	Unit	dBm

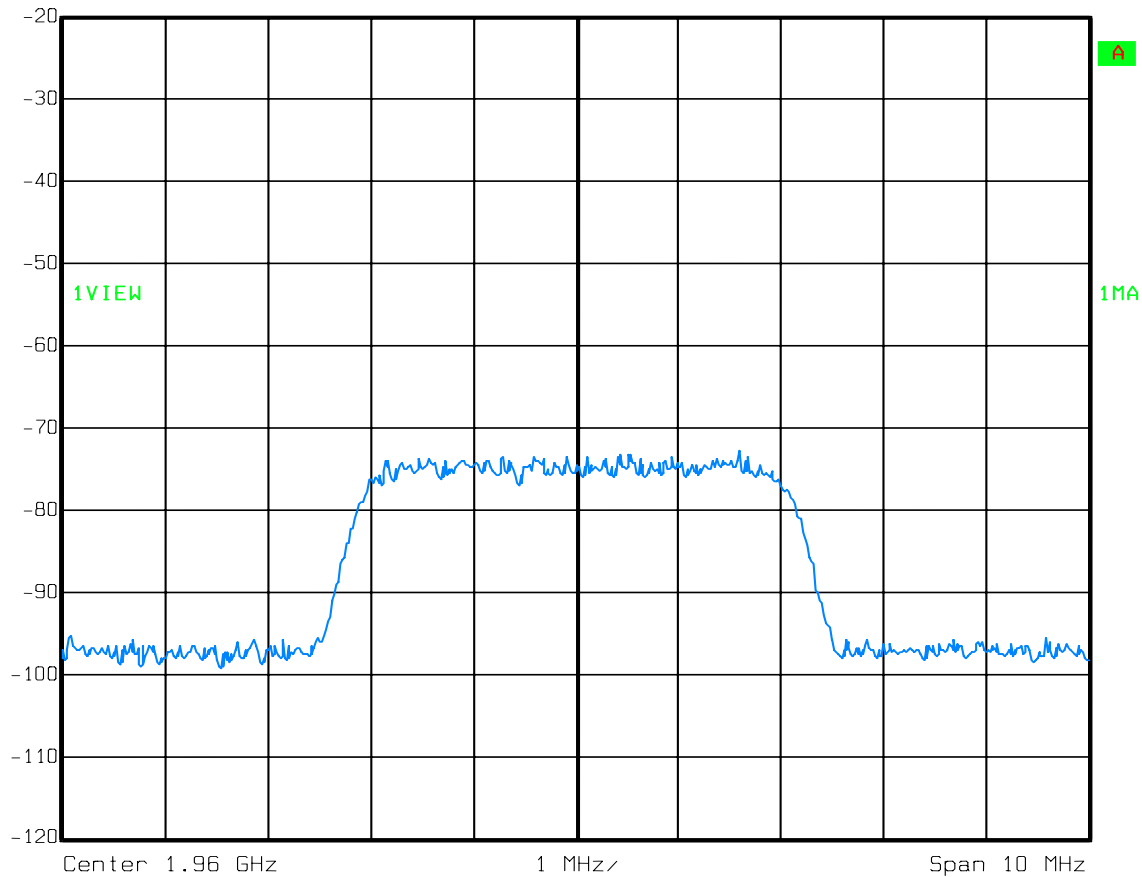

Date: 06.OCT.2008 15:03:30

EQUIPMENT: **AF1927**

Section 5. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals PARA. NO.: 24.238

TESTED BY: David Light

DATE: 06 October 2008

Test Results: Complies.

Test Data: See attached plot(s).

Equipment Used: 1064-1604-1082-1659

Measurement Uncertainty: +/- 1.7 dB

Temperature: 22 °C

Relative Humidity: 48 %

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**


CDMA/EV-DO

LOW BANDEDGE INTERMOD

Uplink

Ref Lvl
40 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

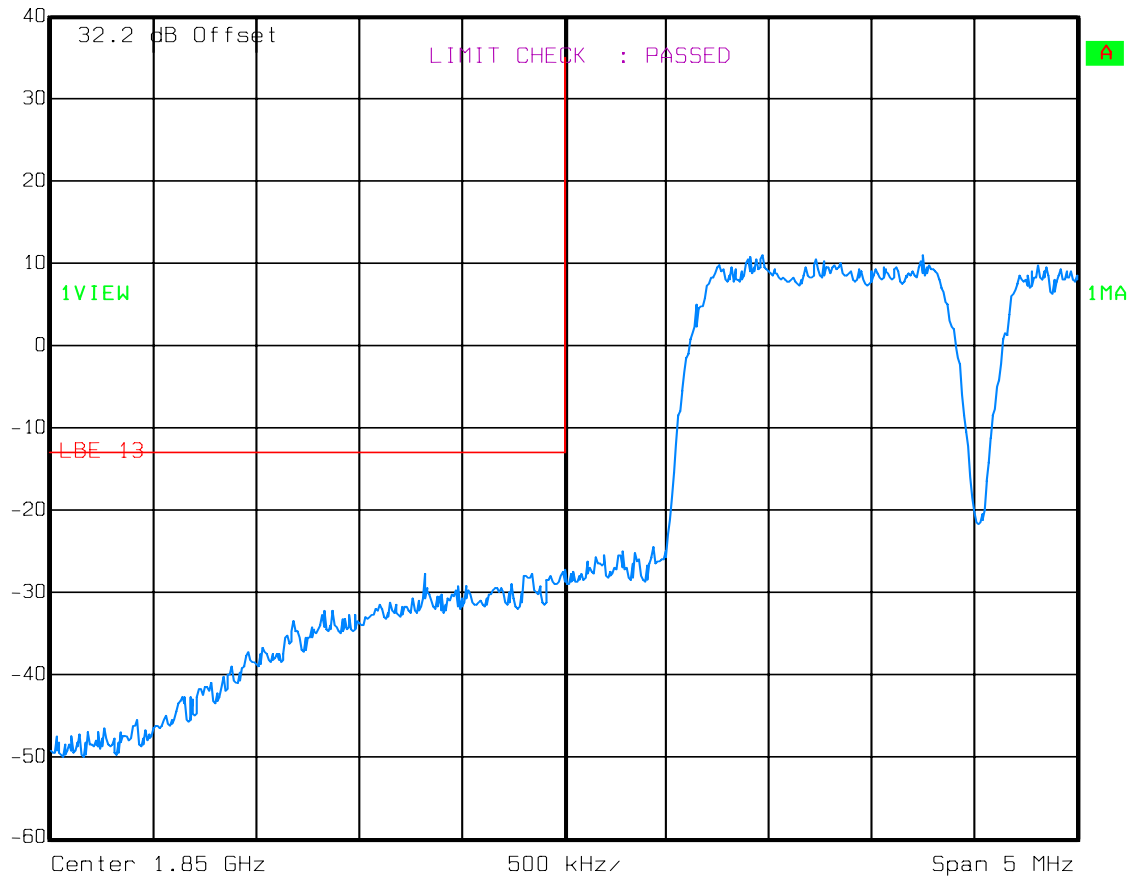

Date: 06.OCT.2008 12:50:54

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**


CDMA/EV-DO

HIGH BAND EDGE

Uplink



Ref Lvl	Marker 1 [T1]	RBW	30 kHz	RF Att	20 dB
40 dBm	-48.92 dBm	VBW	30 kHz	Mixer	-10 dBm
	1.91750000 GHz	SWT	14 ms	Unit	dBm

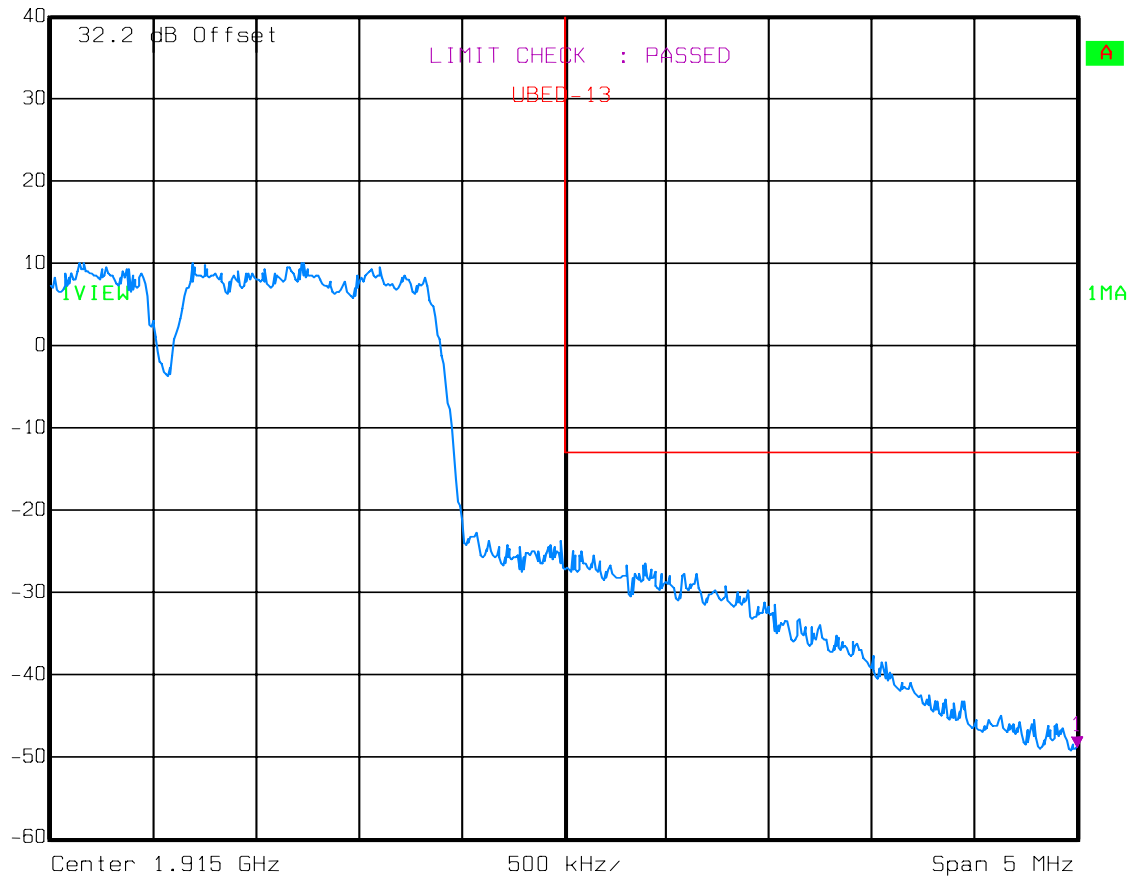


Date: 06.OCT.2008 12:52:55

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

EDGE

LOW BANDEDGE INTERMOD

Uplink

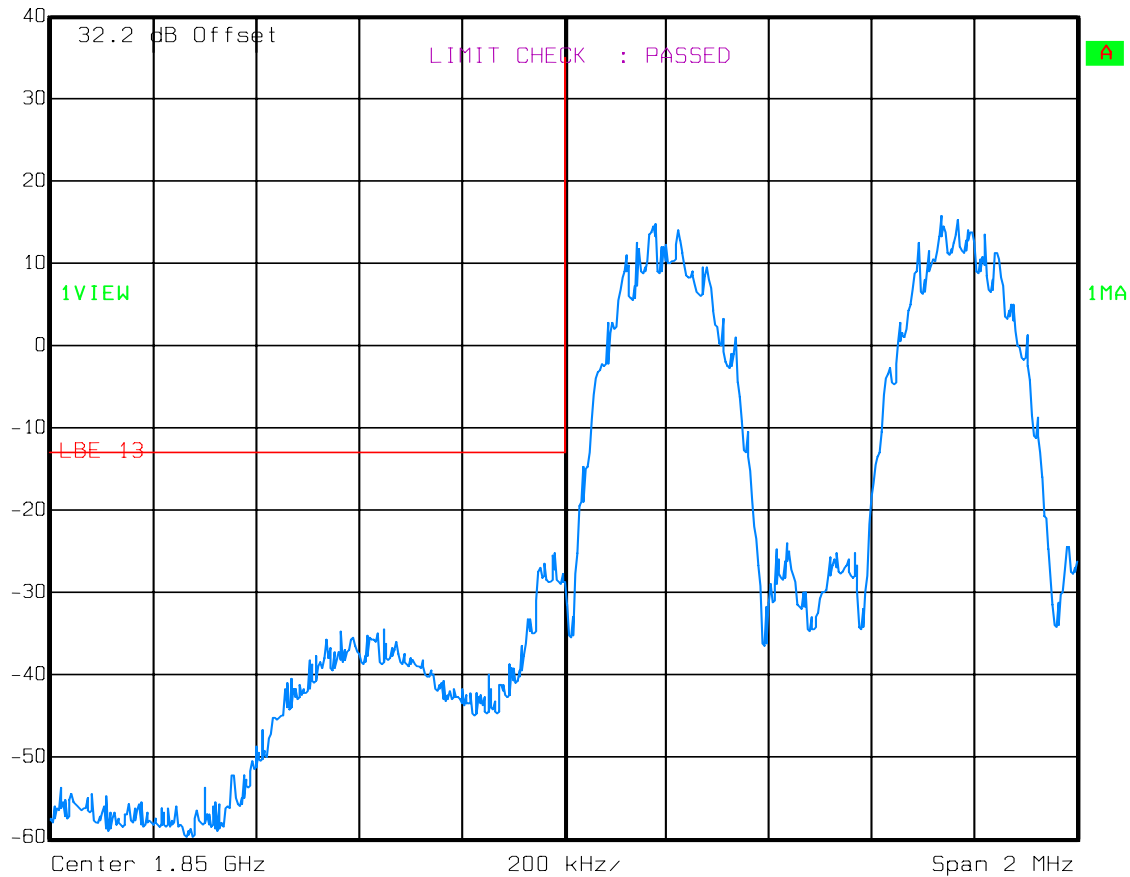Ref Lvl
40 dBmRBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 560 ms Unit dBm


Date: 06.OCT.2008 13:08:26

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

EDGE

HIGH BAND EDGE

Uplink

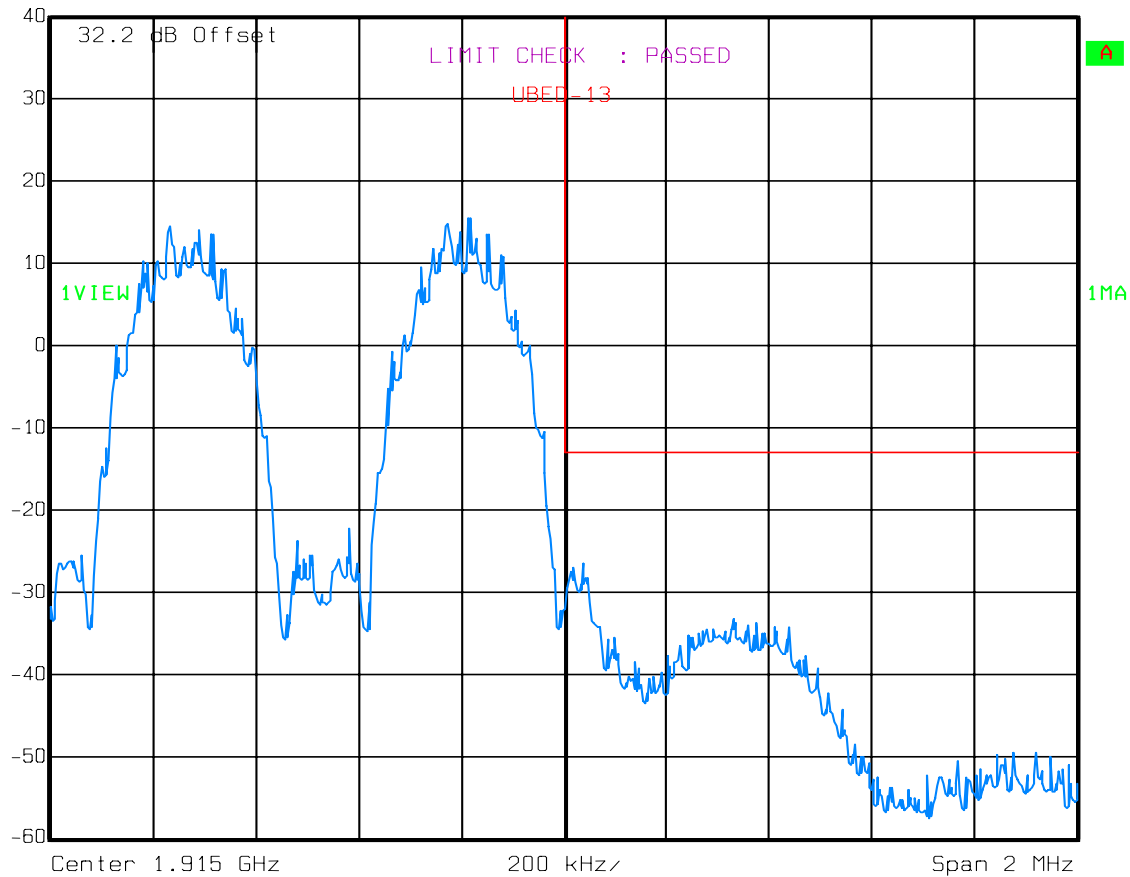Ref Lvl
40 dBmRBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 560 ms Unit dBm


Date: 06.OCT.2008 13:09:25

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

GSM

LOW BANDEDGE INTERMOD

Uplink

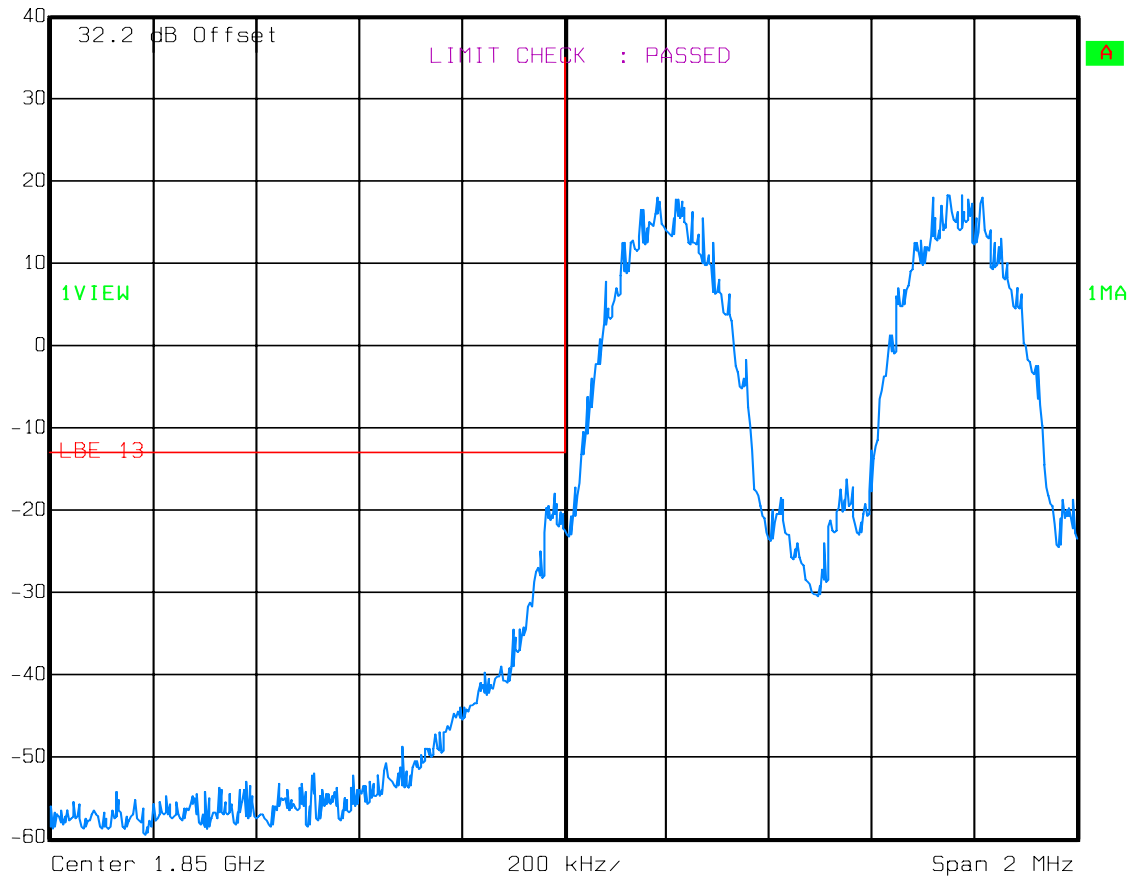Ref Lvl
40 dBmRBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 560 ms Unit dBm

Date: 06.OCT.2008 13:05:54

EQUIPMENT: **AF1927**

Test Data – Spurious Emissions at Antenna Terminals

GSM


HIGH BAND EDGE

Uplink



Ref Lvl
40 dBm

RBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 560 ms Unit dBm

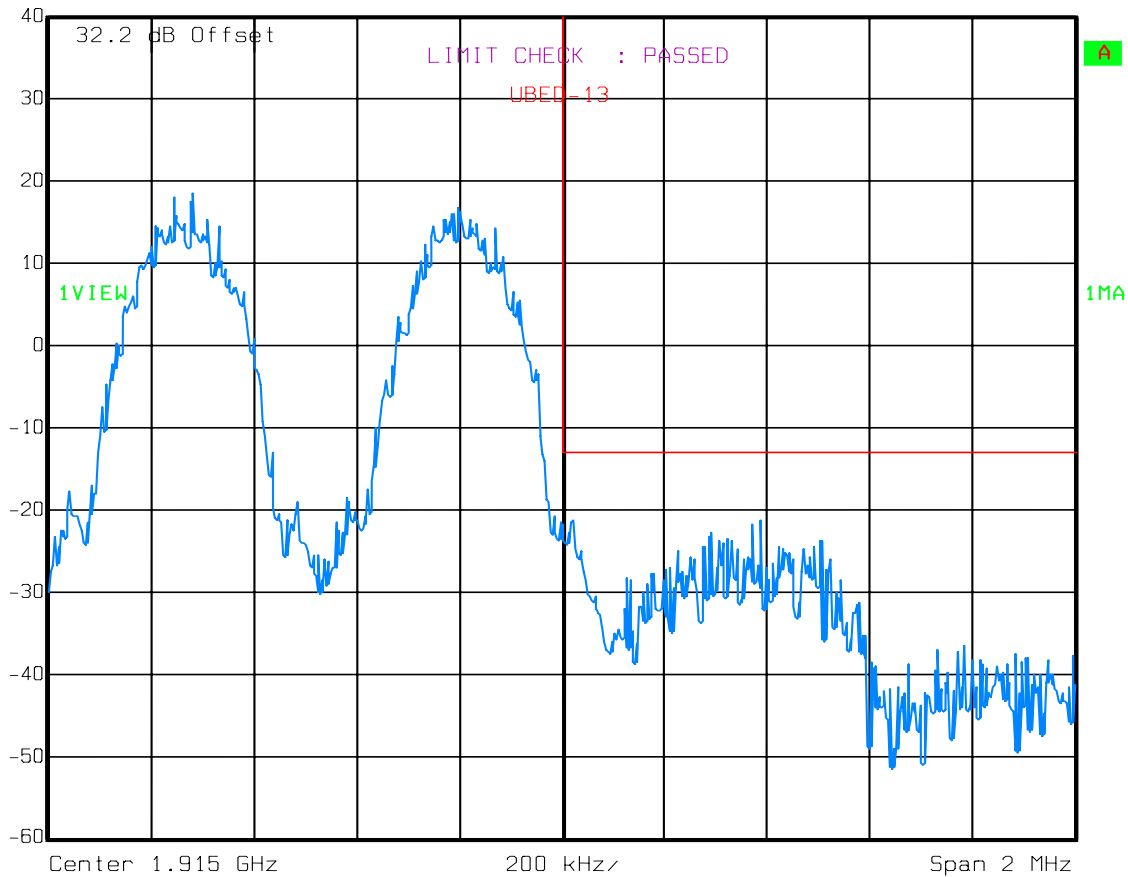


Date: 06.OCT.2008 13:04:33

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**


WCDMA/HSDPA

LOW BANDEDGE INTERMOD

Uplink

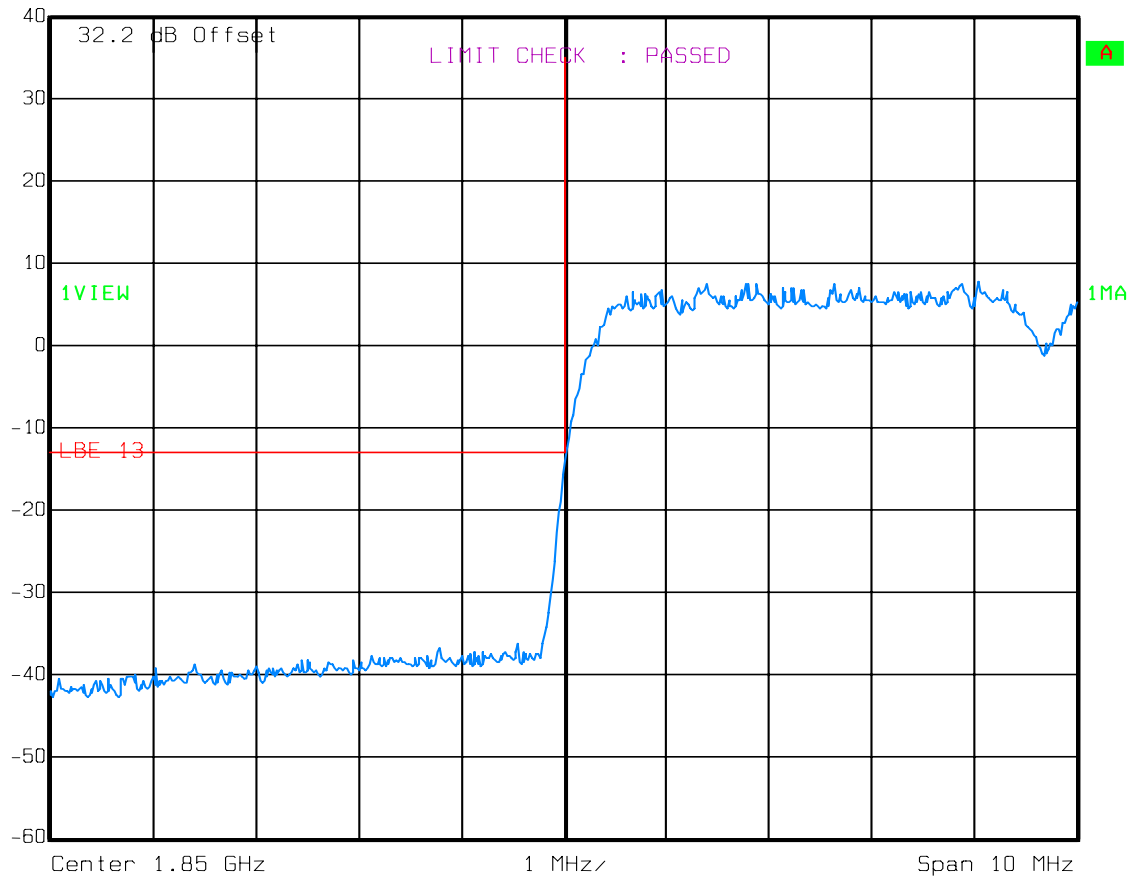Ref Lvl
40 dBmRBW 50 kHz RF Att 20 dB
VBW 50 kHz
SWT 10 ms Unit dBm

Date: 06.OCT.2008 13:26:04

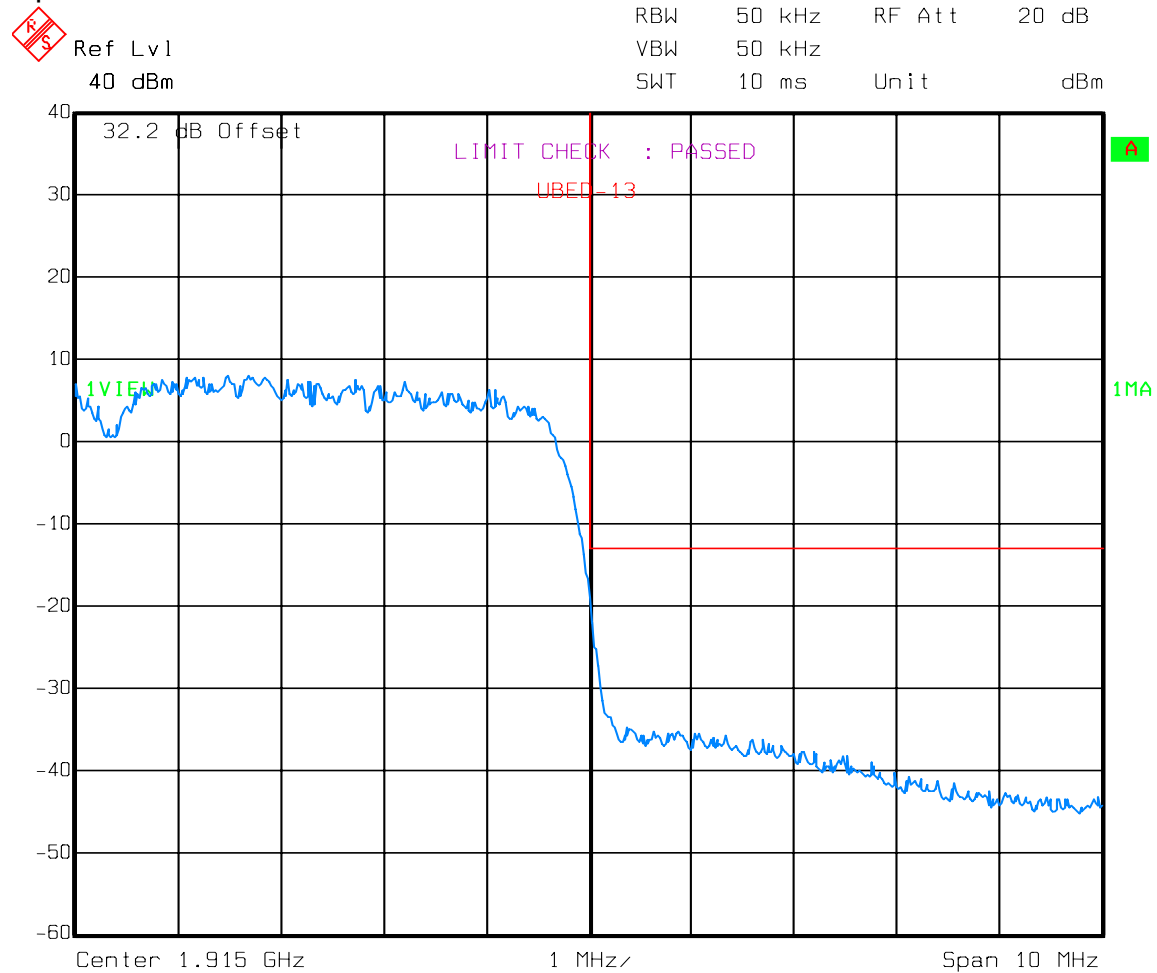EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**WCDMA/HSDPA
HIGH BAND EDGE
Uplink


Date: 06.OCT.2008 13:23:51

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

CDMA/EV-DO

SPURS


Uplink

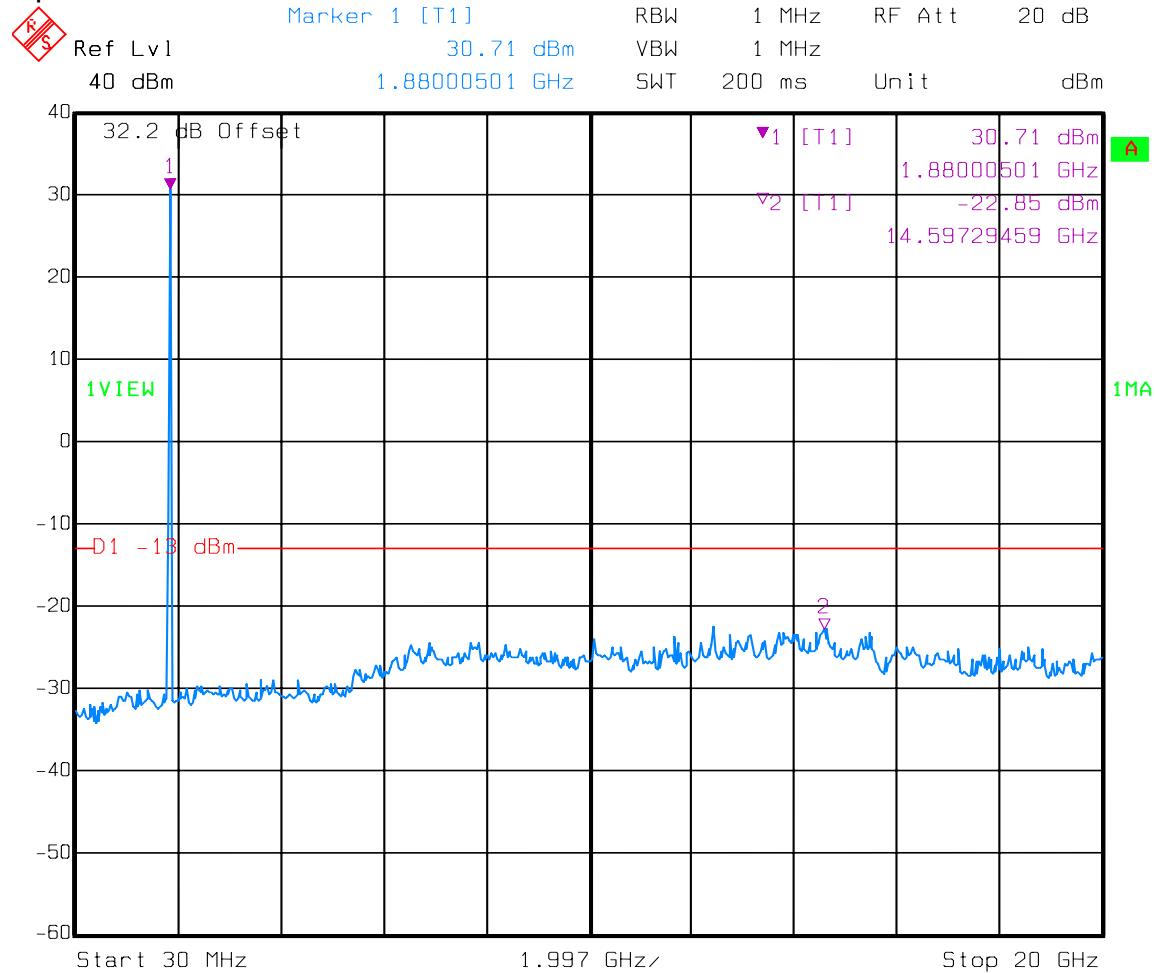

Date: 06.OCT.2008 12:57:30

EQUIPMENT: **AF1927**


Test Data – Spurious Emissions at Antenna Terminals

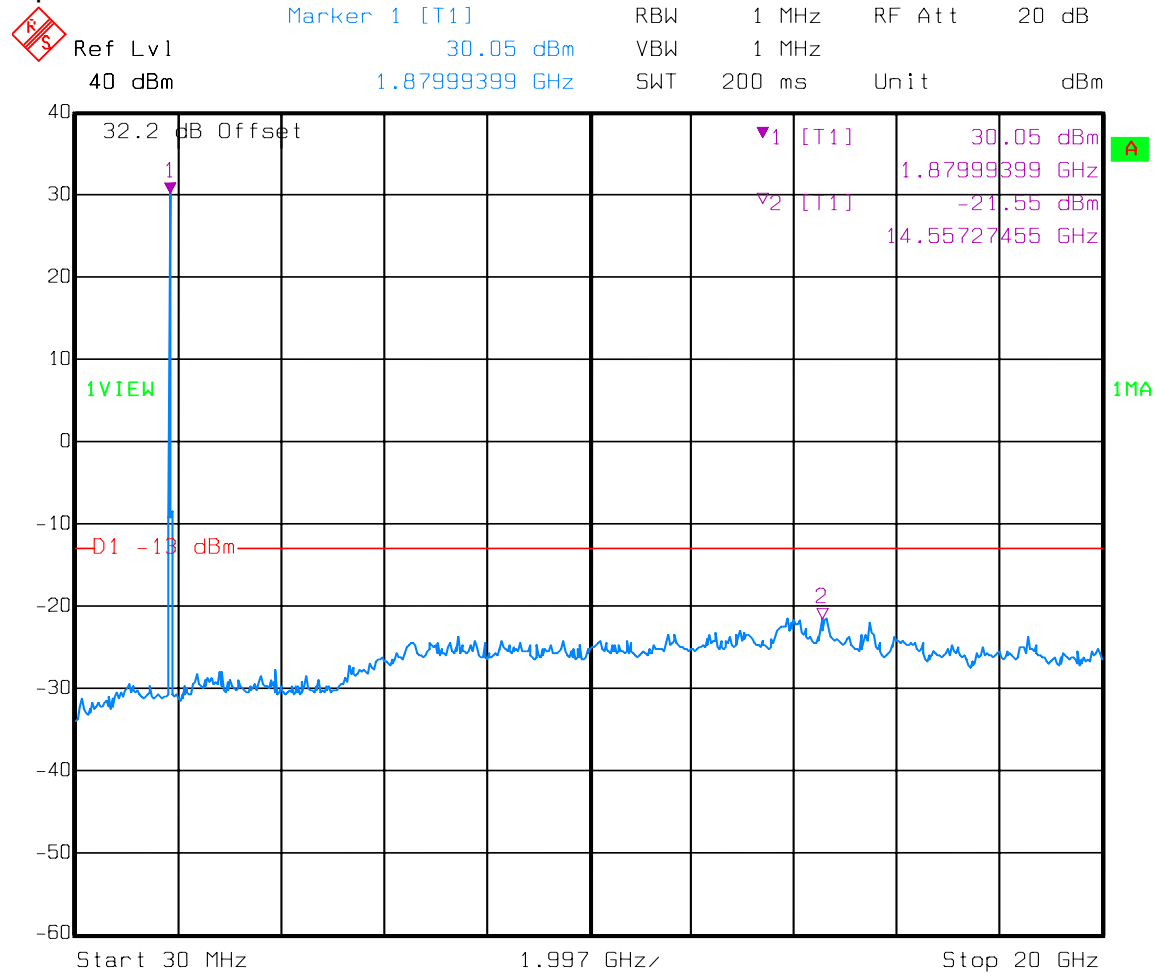EDGE
SPURS
Uplink

Date: 06.OCT.2008 13:10:45

EQUIPMENT: **AF1927**

Test Data – Spurious Emissions at Antenna Terminals

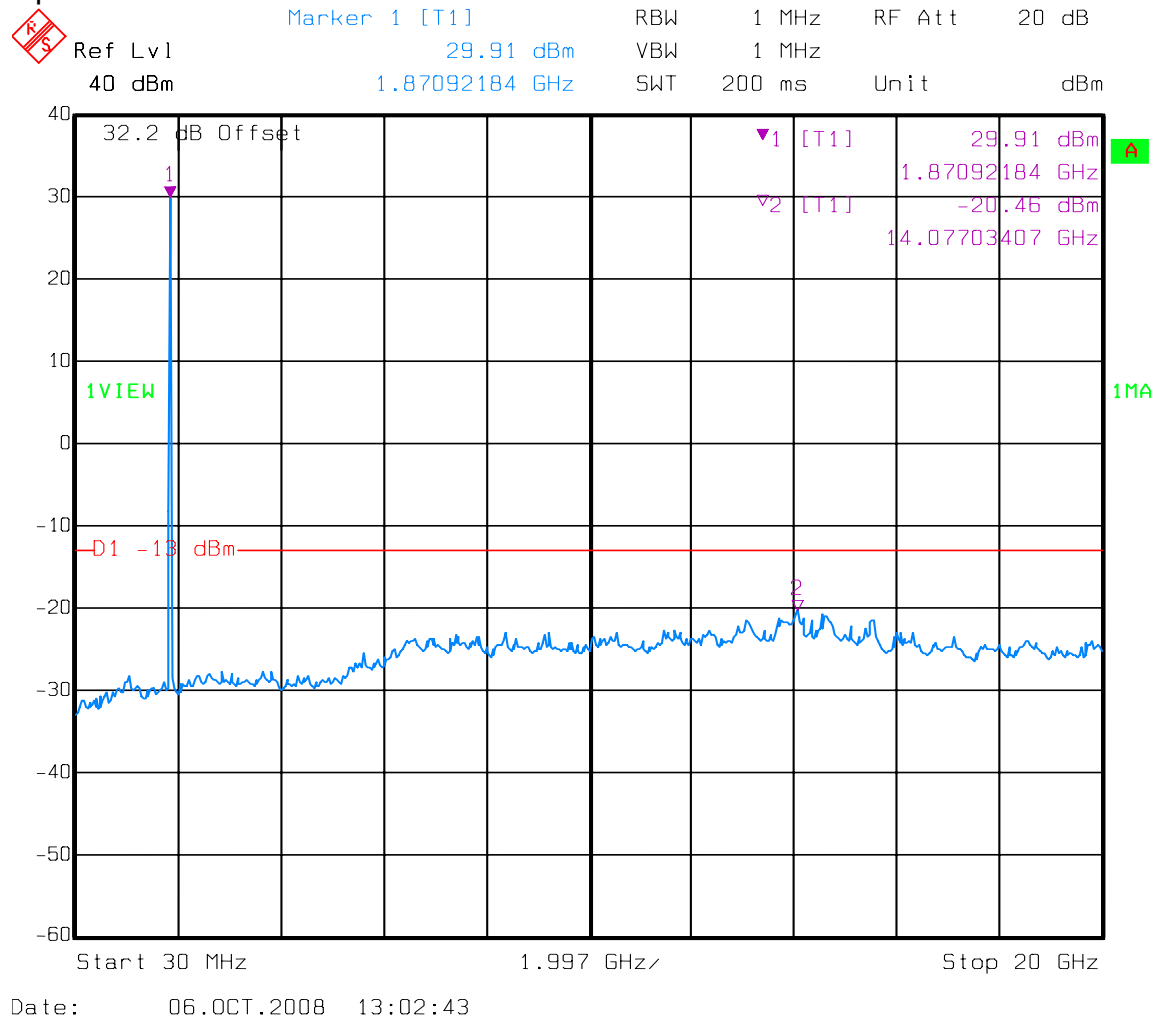
GSM
SPURS
Uplink

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

WCDMA/HSDPA

SPURS

Uplink

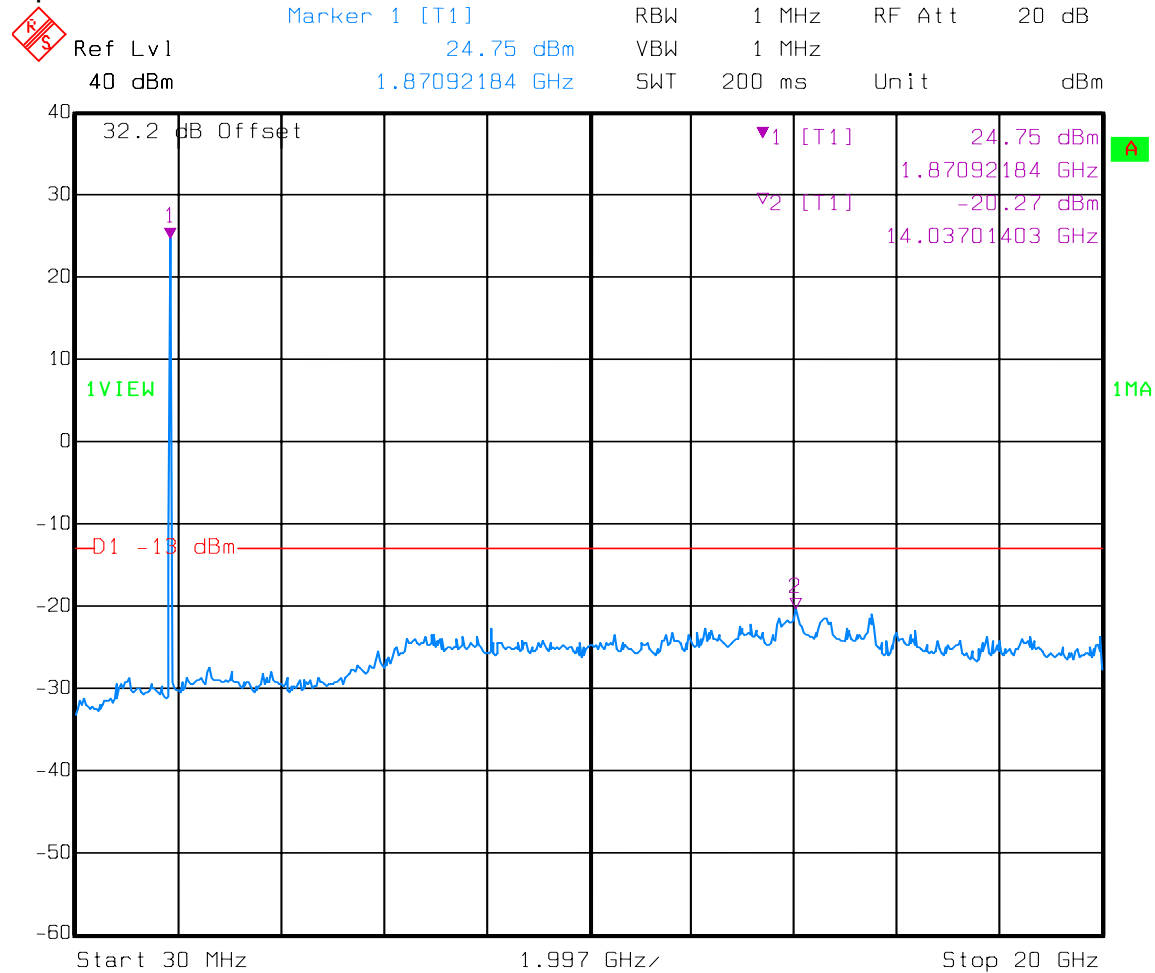

Date: 06.OCT.2008 13:16:30

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**


CDMA/EV-DO

LOW BANDEDGE INTERMOD

Downlink

Ref Lvl
40 dBm


RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

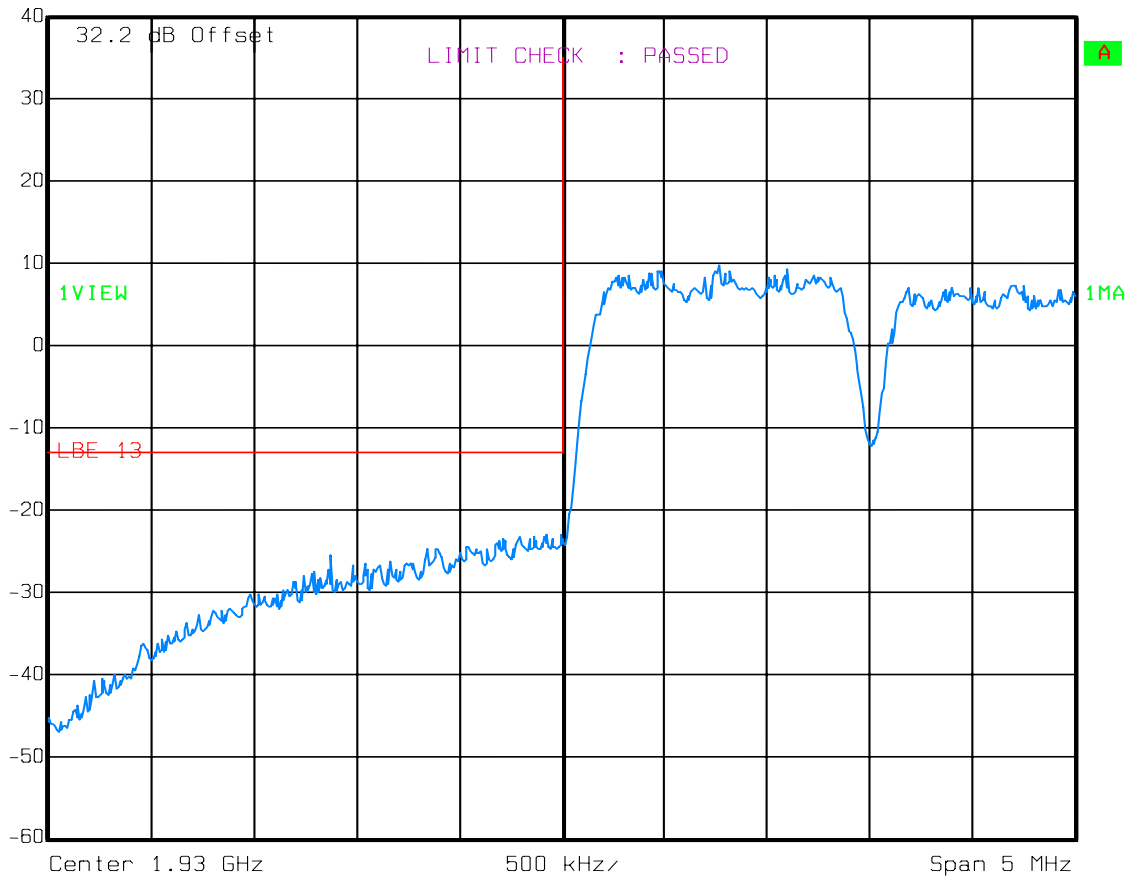

Date: 06.OCT.2008 15:28:16

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**CDMA/EV-DO
HIGH BAND EDGE
DownlinkRef Lvl
40 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

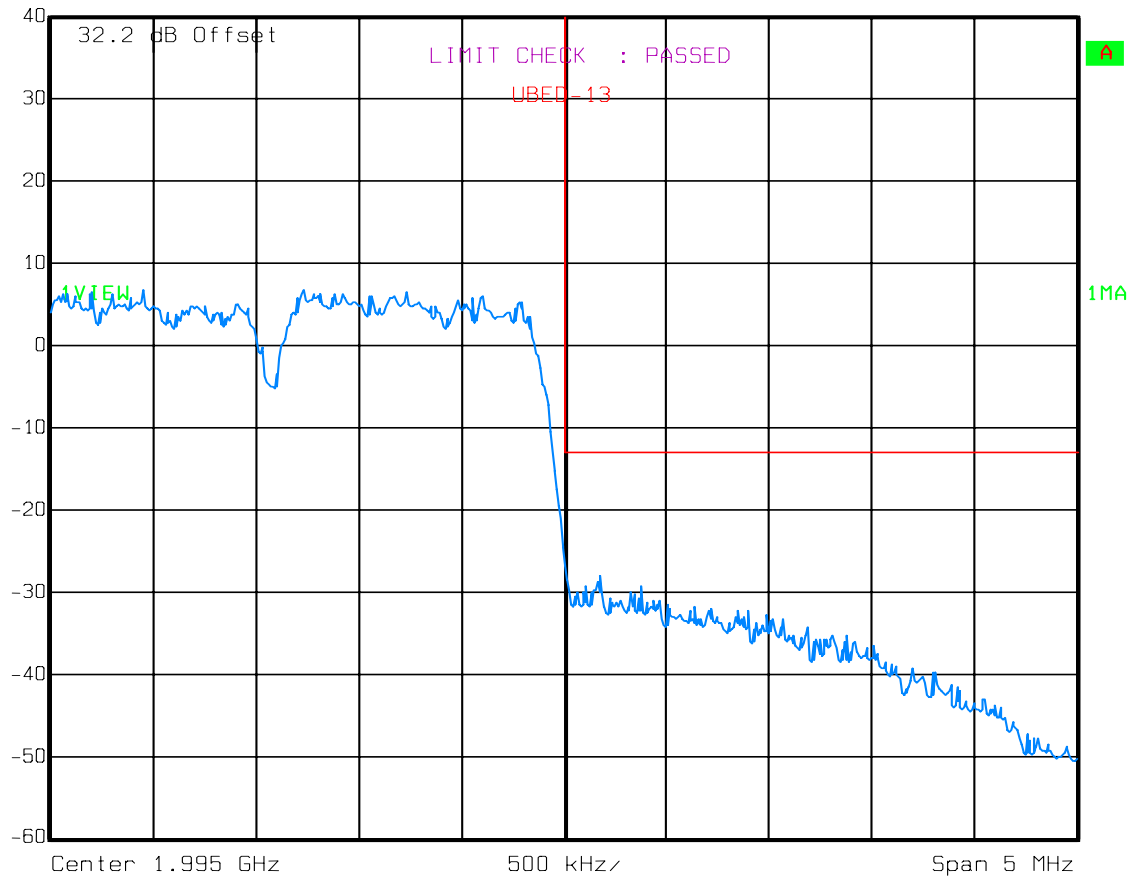


Date: 06.OCT.2008 15:26:44

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

EDGE

LOW BANDEDGE INTERMOD

Downlink

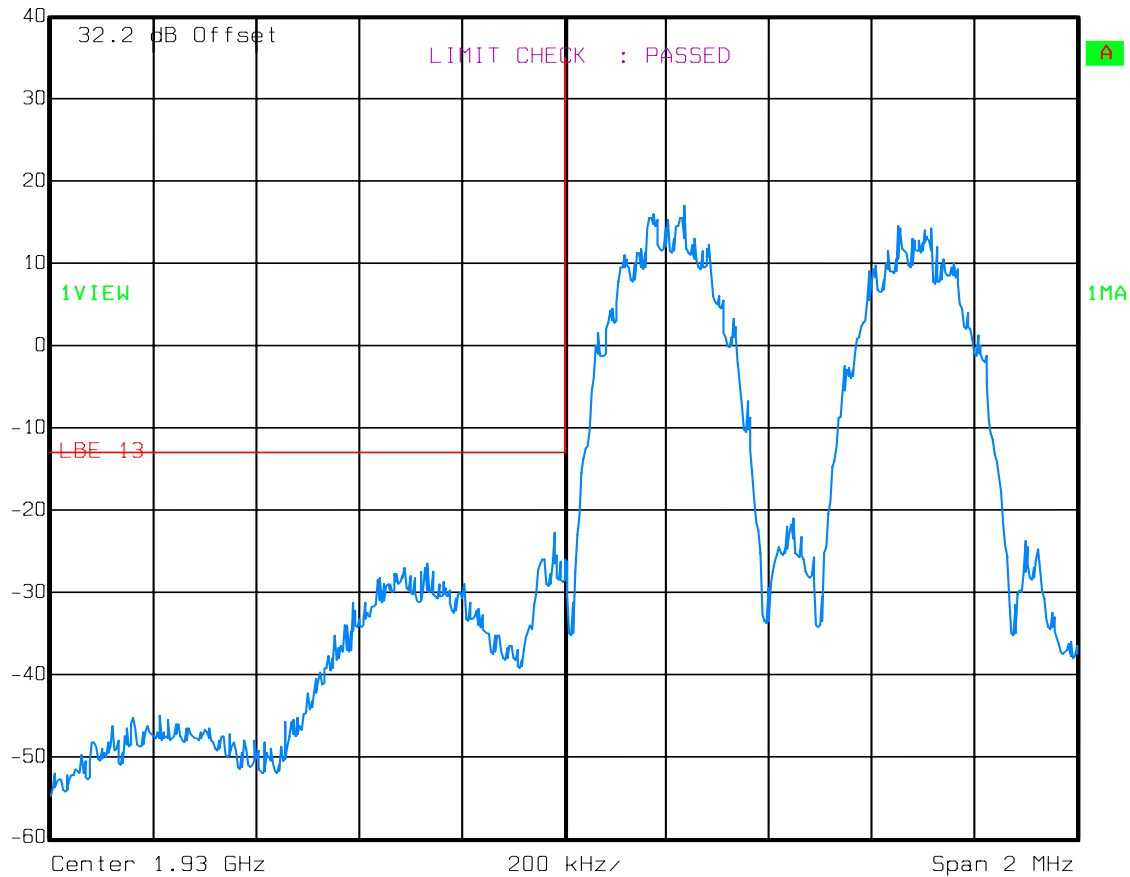Ref Lvl
40 dBmRBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 560 ms Unit dBm


Date: 06.OCT.2008 15:12:32

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

EDGE

HIGH BAND EDGE

Downlink

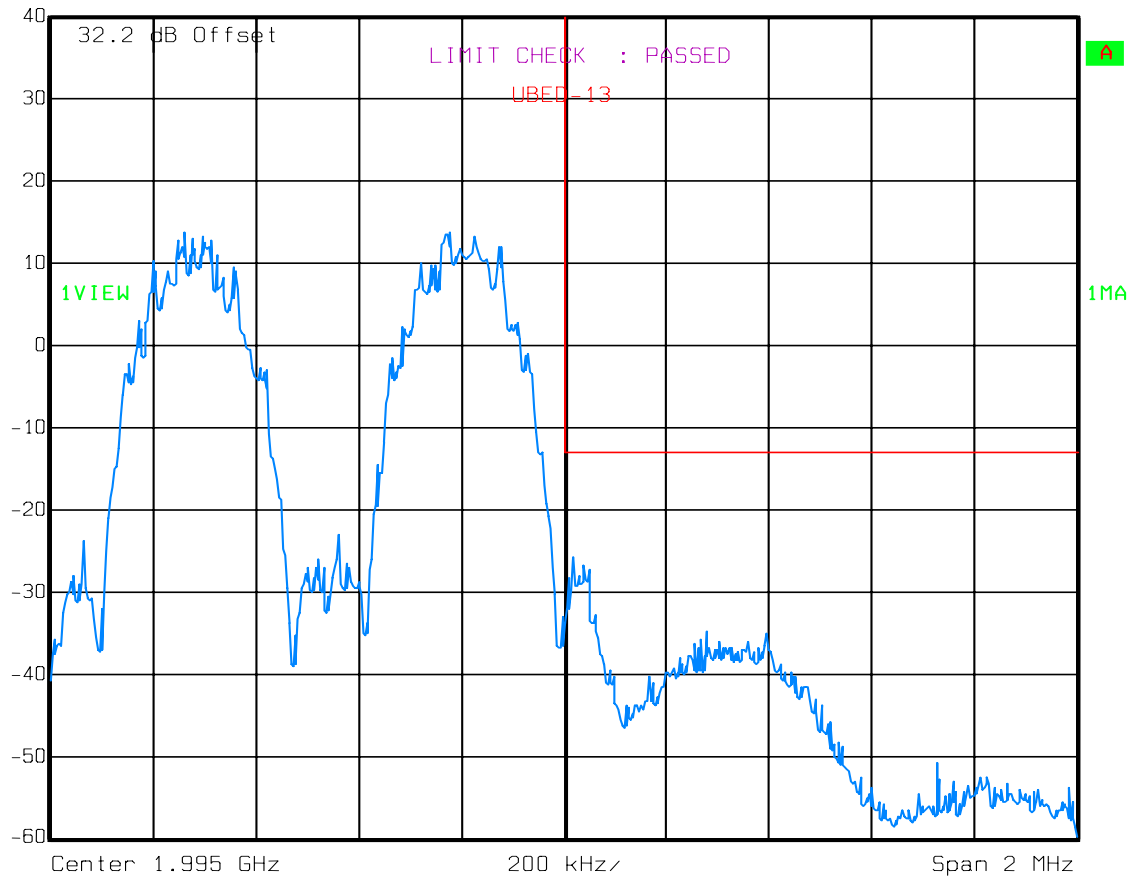Ref Lvl
40 dBmRBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 560 ms Unit dBm


Date: 06.OCT.2008 15:11:45

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

GSM

LOW BANDEDGE INTERMOD

Downlink

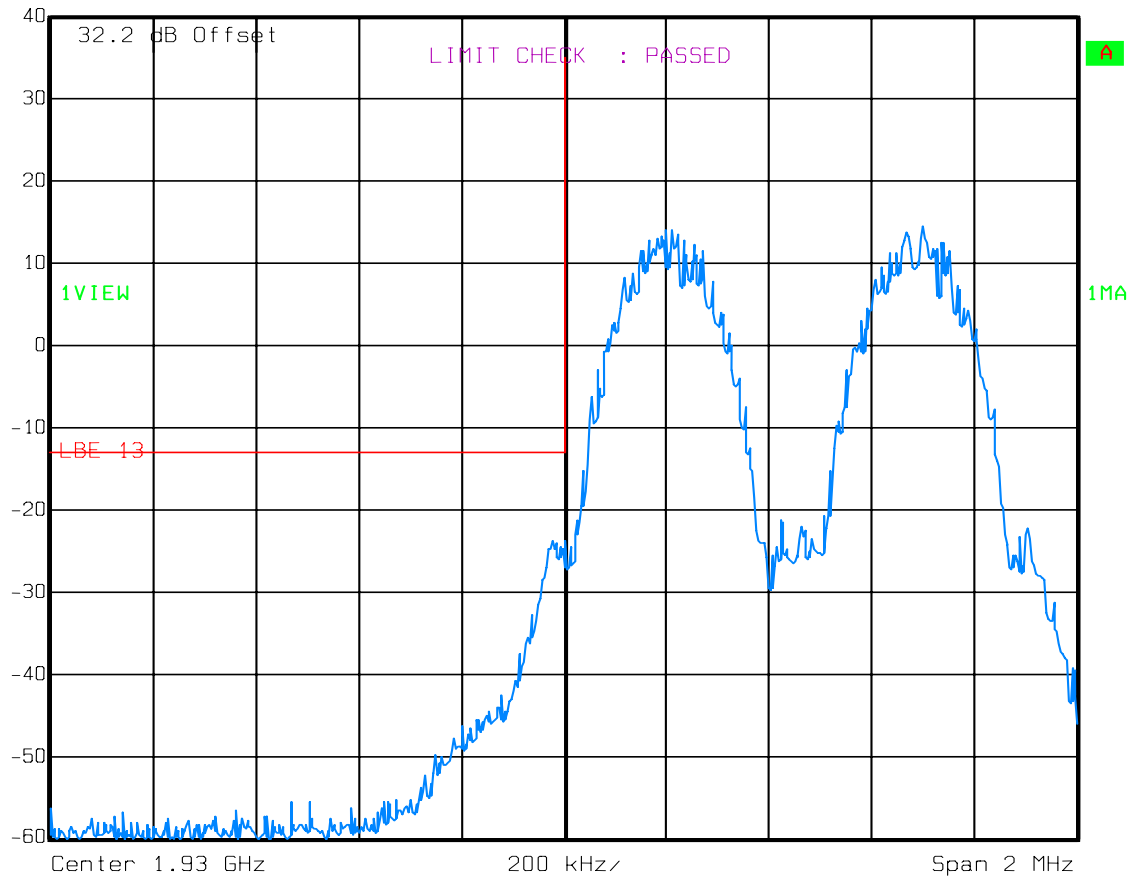Ref Lvl
40 dBmRBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 560 ms Unit dBm


Date: 06.OCT.2008 15:14:16

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

GSM

HIGH BAND EDGE

Downlink

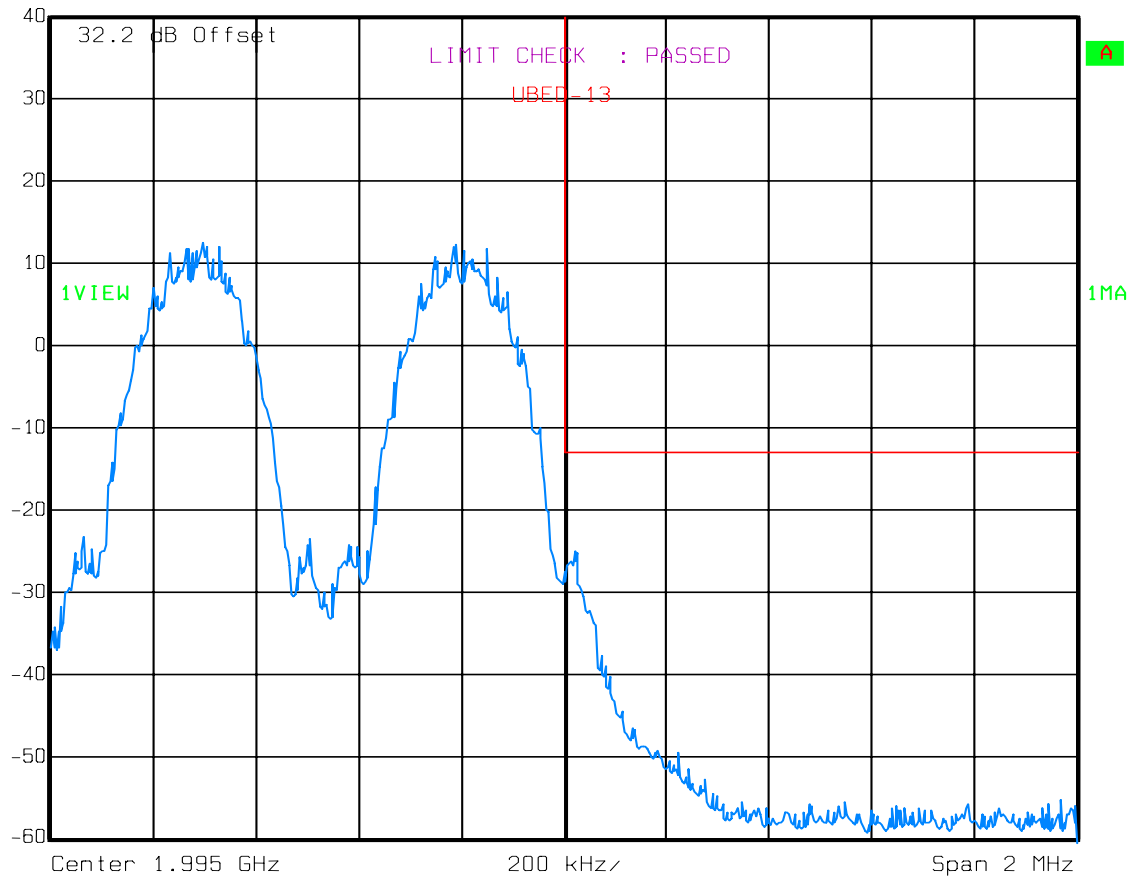Ref Lvl
40 dBmRBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 560 ms Unit dBm

Date: 06.OCT.2008 15:15:39


EQUIPMENT: **AF1927**


Test Data – Spurious Emissions at Antenna Terminals

WCDMA/HSDPA

LOW BANDEDGE INTERMOD

Downlink

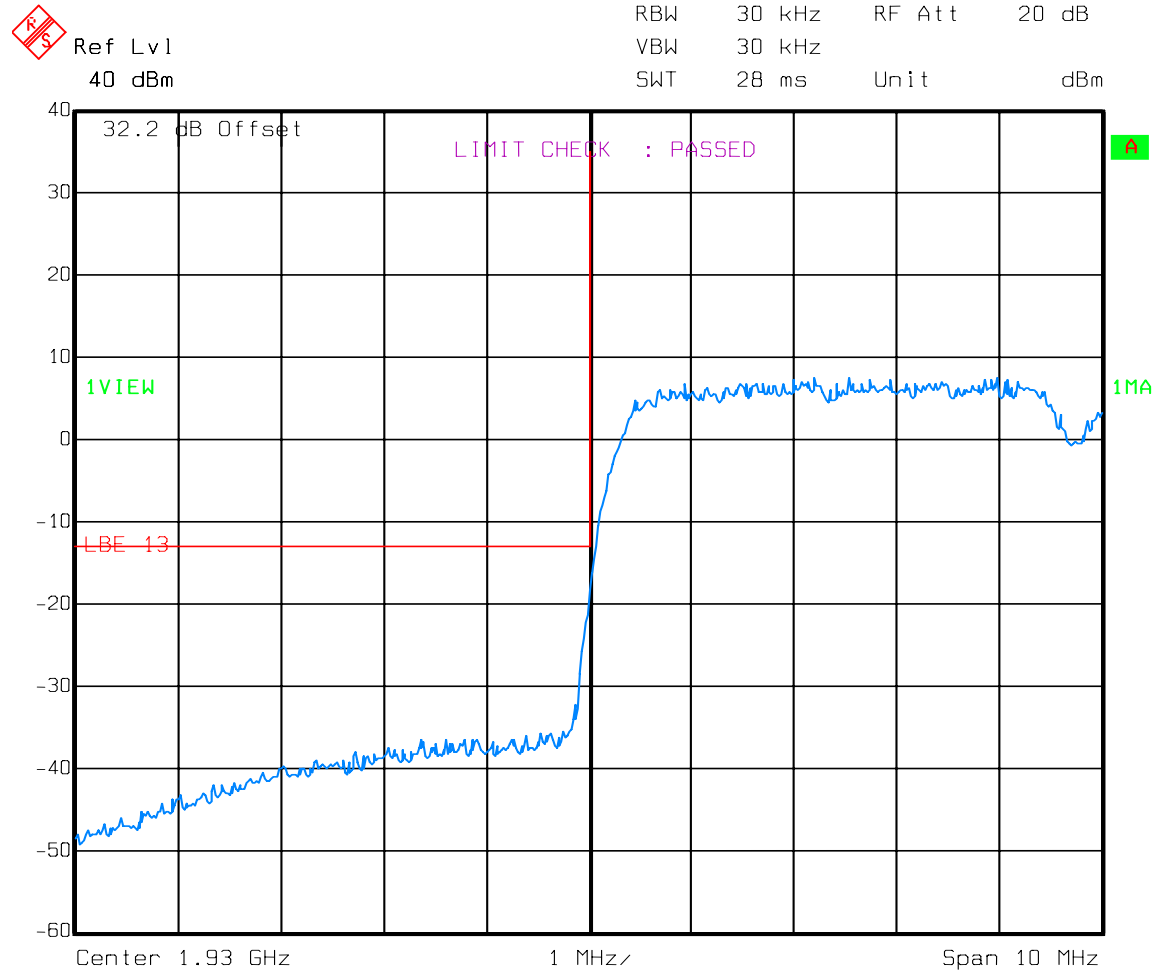

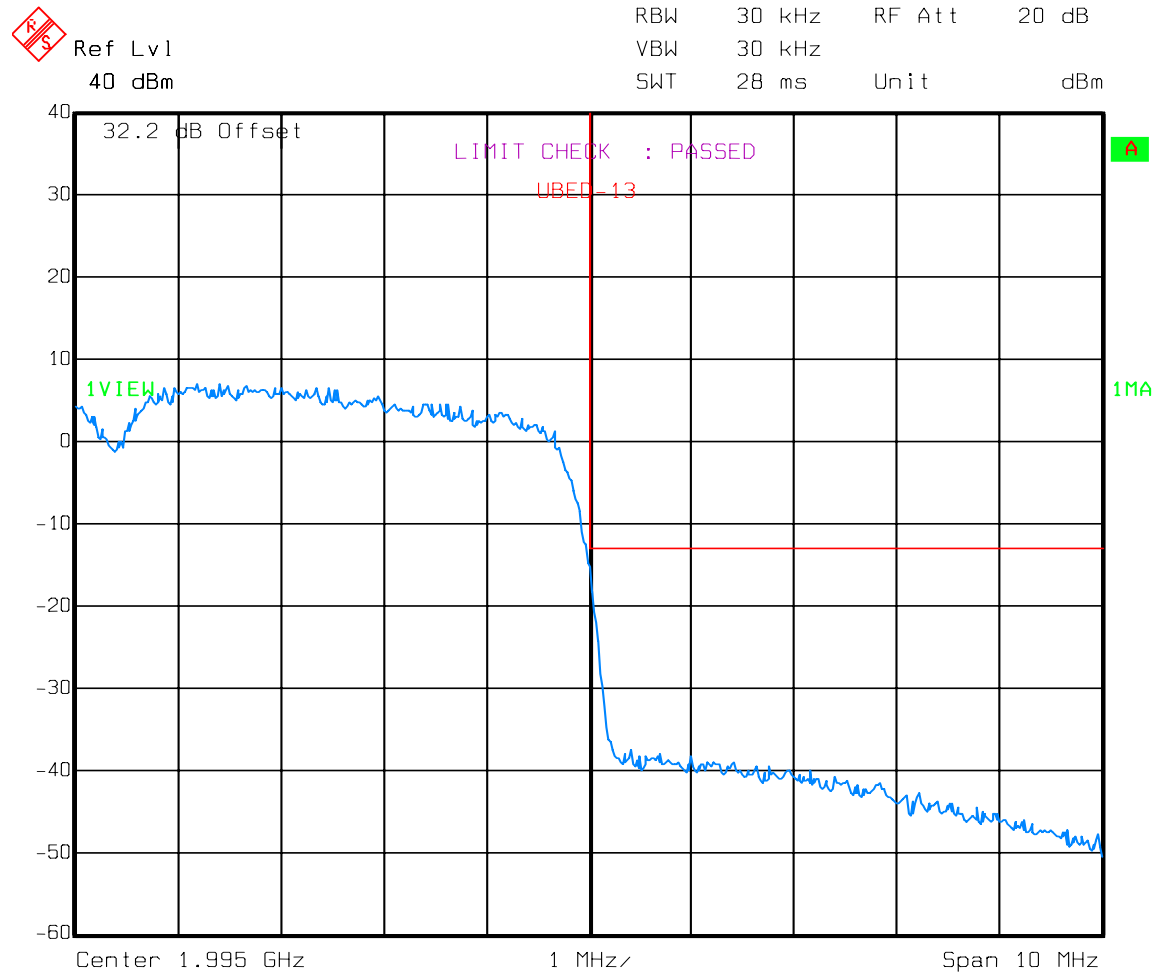EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**WCDMA/HSDPA
HIGH BAND EDGE
Downlink

Date: 06.OCT.2008 15:00:12

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**


CDMA/EV-DO

SPURS

Downlink



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 27.63 dBm VBW 1 MHz Mixer -10 dBm
40 dBm 1.95096192 GHz SWT 200 ms Unit dBm

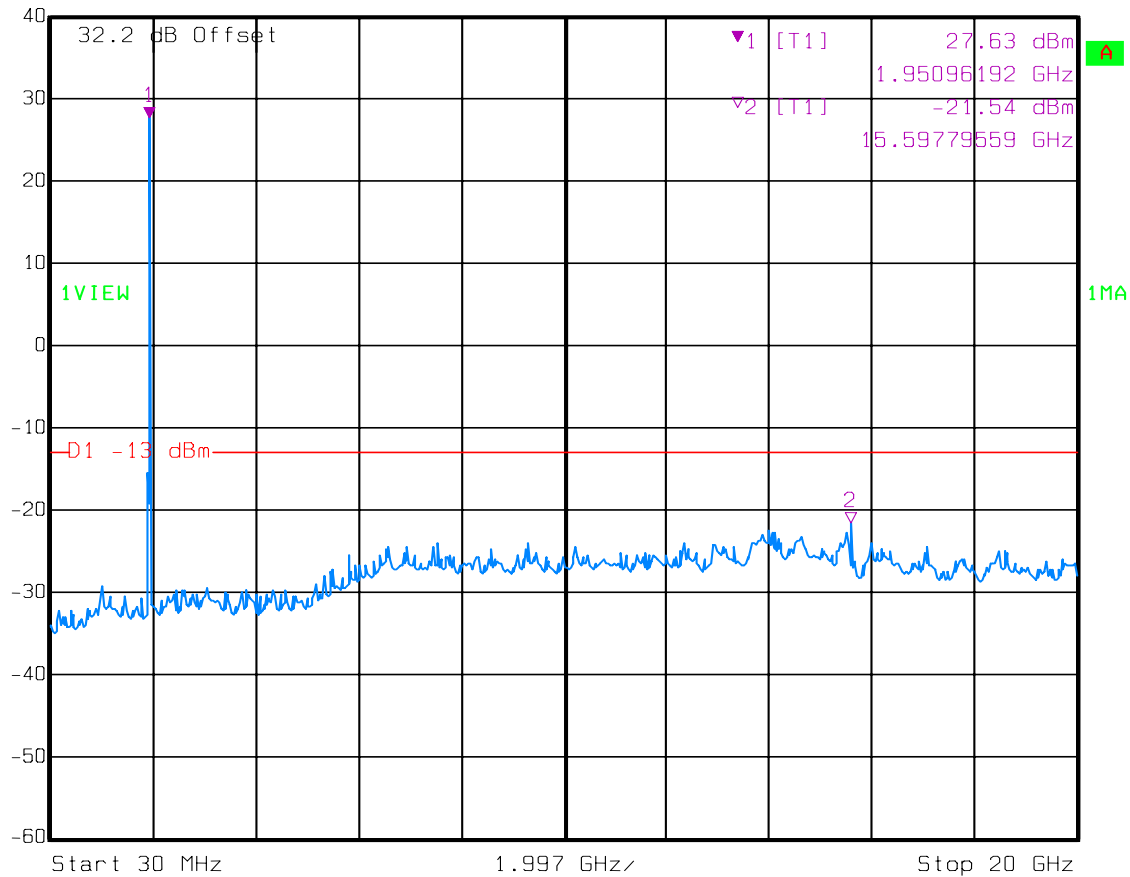


Date: 06.OCT.2008 15:21:58

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

EDGE

SPURS

Downlink

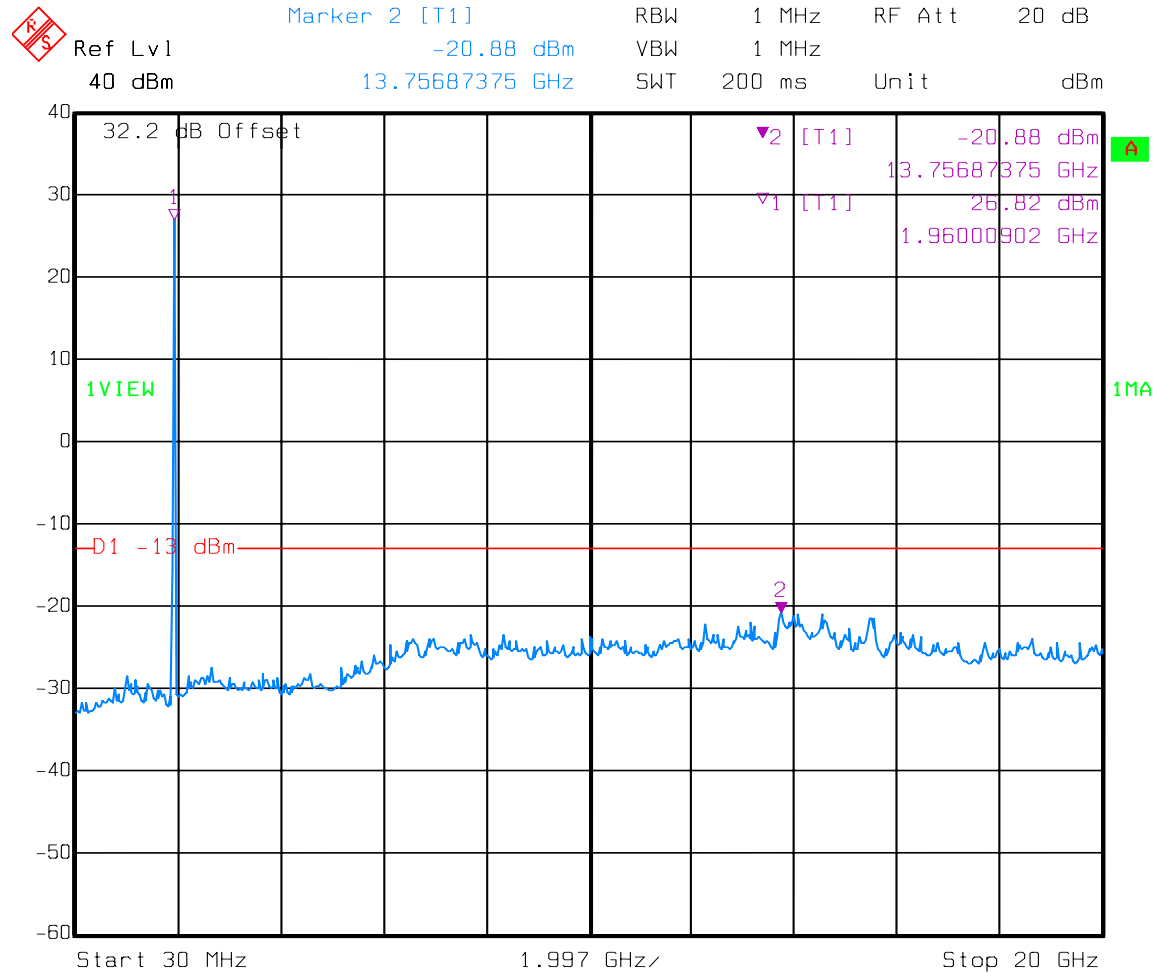

Date: 06.OCT.2008 15:07:44


EQUIPMENT: **AF1927**

Test Data – Spurious Emissions at Antenna Terminals

GSM

SPURS

Downlink

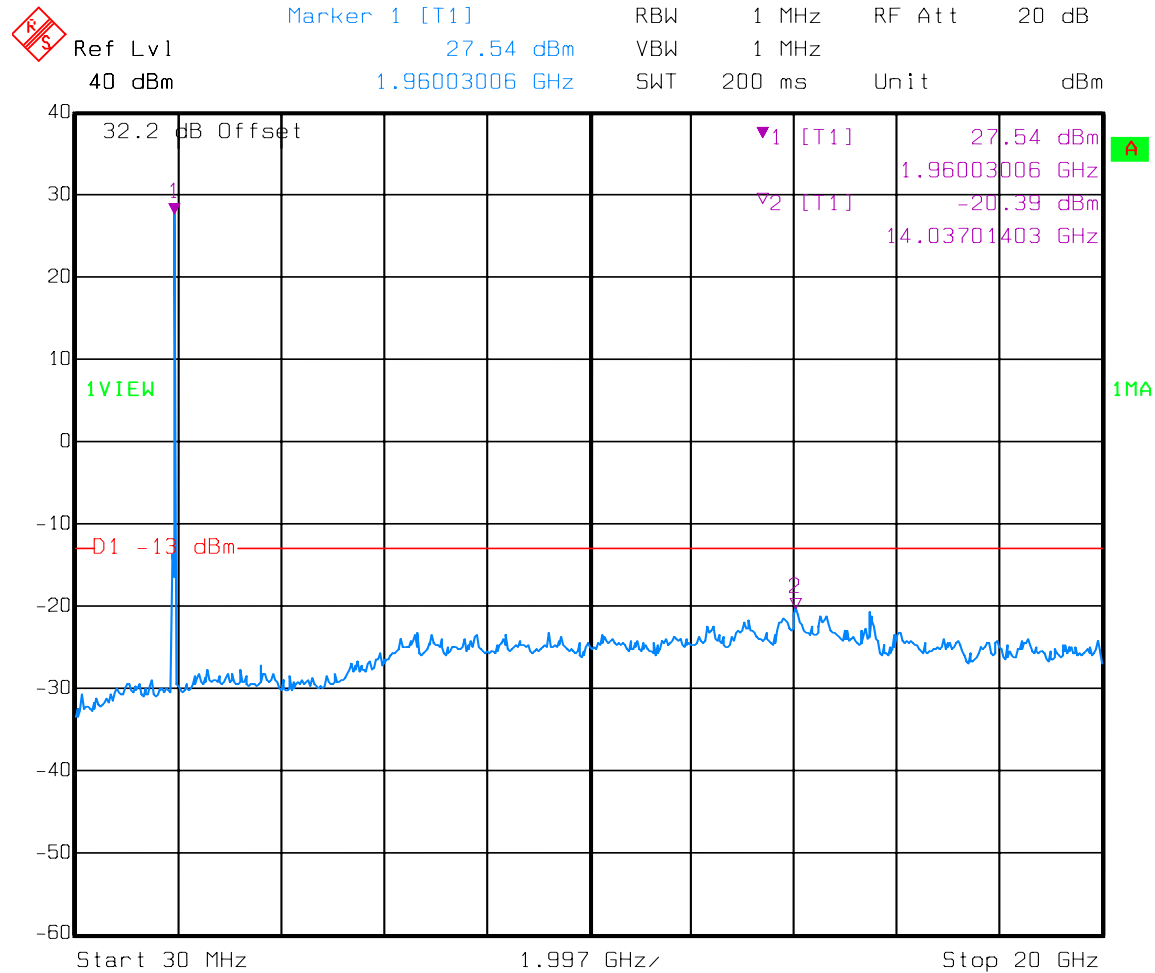


Date: 06.OCT.2008 15:16:51

EQUIPMENT: **AF1927****Test Data – Spurious Emissions at Antenna Terminals**

WCDMA/HSDPA

SPURS

Downlink

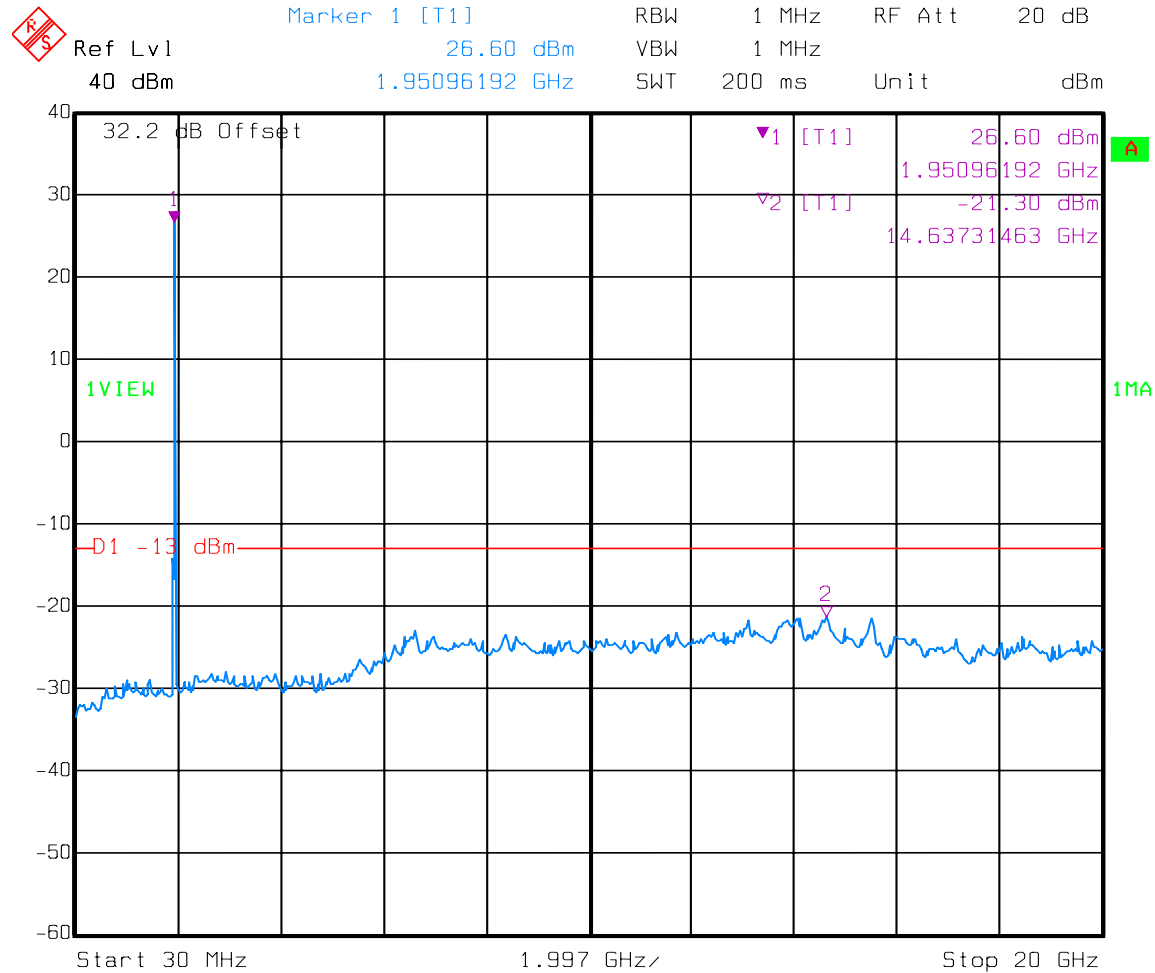

Date: 06.OCT.2008 15:01:50

EQUIPMENT: AF1927**Section 6. Field Strength of Spurious**

NAME OF TEST: Field Strength of Spurious Emissions	PARA. NO.: 24.238
TESTED BY: David Light	DATE: 06 October 2008

Test Results: Complies.

Test Data: The spectrum was searched from 30 MHz to the tenth harmonic of the carrier. There were no emissions detected above the noise floor which was at least 20 dB below the specification limit.

Analyzer Settings: RBW = VBW = 1 MHz / Peak detector**Equipment Used:** 1464-1484-1485-1016-993-791-1763**Measurement Uncertainty:** +/-1.7 dB**Temperature:** 22 °C**Relative Humidity:** 48 %

EQUIPMENT: **AF1927****Section 7. Test Equipment List**

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1065	ATTENUATOR	NARDA 776B-10	NONE	CBU	N/A
1604	ATTENUATOR	NARDA 776B-20	NONE	N/A	N/A
1659	Spectrum Analyzer	Rhode & Schwarz FSP	973353	01/24/07	01/24/09
1082	CABLE 2m	Astrolab 32027-2-29094-72TC	N/A	CBU	N/A
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	01/24/07	01/24/09
1484	Cable	Storm PR90-010-072	N/A	05/07/08	05/07/09
1485	Cable	Storm PR90-010-216	N/A	05/07/08	05/07/09
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	05/07/08	05/07/09
993	Horn antenna	A.H. Systems SAS-200/571	XXX	08/31/07	08/30/09
791	PREAMP, 25dB	Nemko USA, Inc. LNA25	398	05/07/08	05/07/09
1763	Bilog Antenna	Schaffner CBL 6111D	22926	10/21/07	10/20/08

ANNEX A - TEST DETAILS

NAME OF TEST: RF Power Output

PARA. NO.: 2.1046

Minimum Standard: Para. No.24.232. Base stations are limited to 1640 watts peak E.I.R.P. with an antenna height up to 300 meters HAAT. In no case may the peak output power of a base station transmitter exceed 100 watts.

Method Of Measurement:

Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter or spectrum analyzer. Power output is measured with the maximum rated input level.

Integral Antenna:

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic radiator.

EQUIPMENT: **AF1927**

NAME OF TEST: Occupied Bandwidth

PARA. NO.: 2.1049

Minimum Standard: Input/Output

Method Of Measurement:

CDMA

Spectrum analyzer settings:

RBW=VBW=30 kHz

Span: 5 MHz

Sweep: Auto

GSM / EDGE

RBW=VBW= 3 kHz

Span: 1 MHz

Sweep: Auto

TDMA

RBW=VBW= 1 kHz

Span: 1 MHz

Sweep: Auto

W-CDMA

RBW=VBW= 100 kHz

Span: 10 MHz

Sweep: Auto

NAME OF TEST: Spurious Emission at Antenna Terminals PARA. NO.: 24.238
--

Minimum Standard: Para. No.24.238(a). On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power by at least 43 + 10 log (P) dB.

Method Of Measurement:

Spectrum analyzer settings:

CDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 30 kHz (< 1MHz from Band Edge)
VBW: ≥ RBW
Sweep: Auto
Video Avg: 6 Sweeps

GSM / EDGE

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 3 kHz (< 1 MHz from Band Edge)
VBW: ≥ RBW
Sweep: Auto
Video Avg: Disabled

TDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 3 kHz (< 1 MHz from Band Edge)
VBW: ≥ RBW
Sweep: Auto
Video Avg: Disabled

W-CDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 100 kHz (< 1MHz from Band Edge)
VBW: ≥ RBW
Sweep: Auto
Video Avg: 6 Sweeps

To demonstrate compliance at band edges the frequency of the input signal is set to the lowest and highest assigned channel and the center frequency of the spectrum analyzer is set to the upper and lower edges of the appropriate frequency block.

NAME OF TEST: Field Strength of Spurious Radiation	PARA. NO.: 24.238
---	--------------------------

Minimum Standard: Para. No.24.238(a). On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power by at least $43 + 10 \log (P)$ dB.


Method of Measurement TIA/EIA-603-1992

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic radiator.


ANNEX B - TEST DIAGRAMS

EQUIPMENT: **AF1927**

Para. No. 2.985 - R.F. Power Output


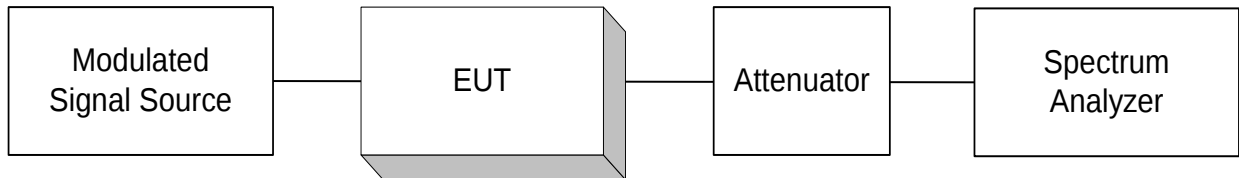


Para. No. 2.989 - Occupied Bandwidth

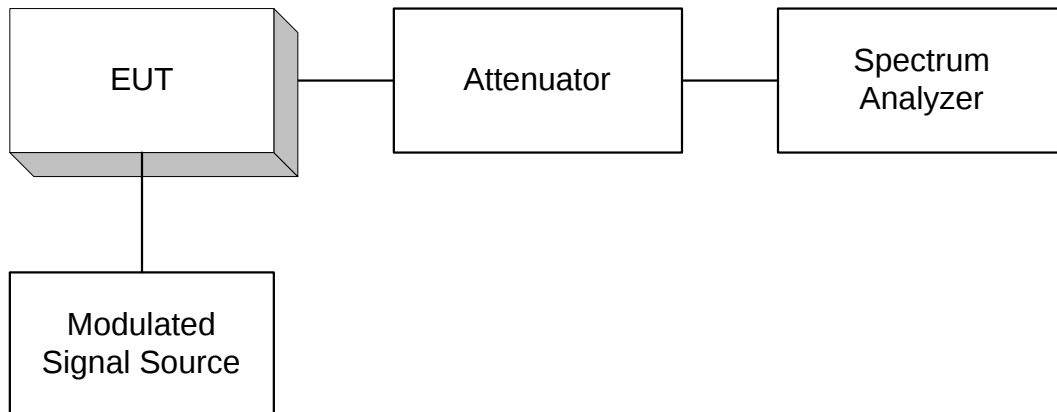


EQUIPMENT: **AF1927**

Para. No. 2.991 Spurious Emissions at Antenna Terminals

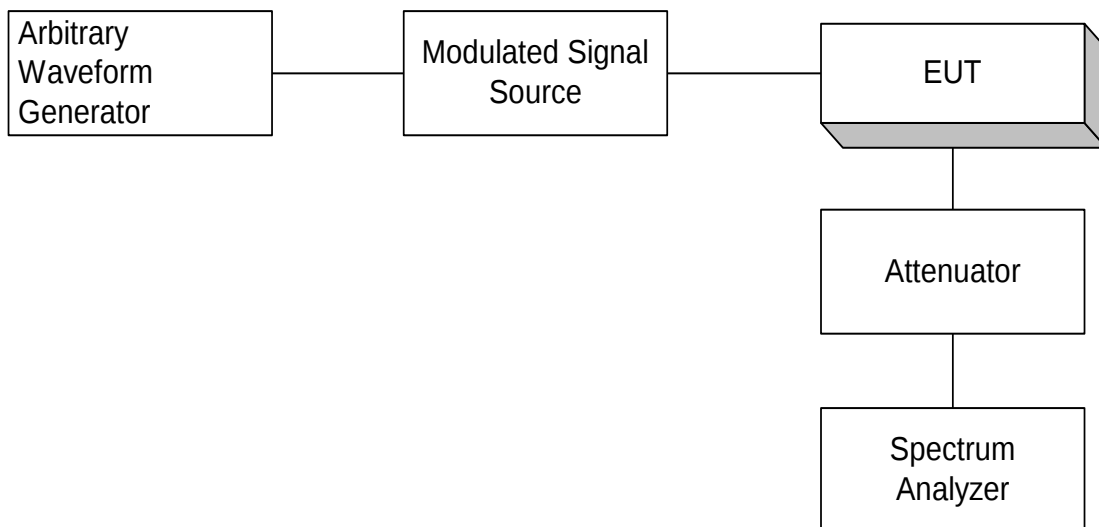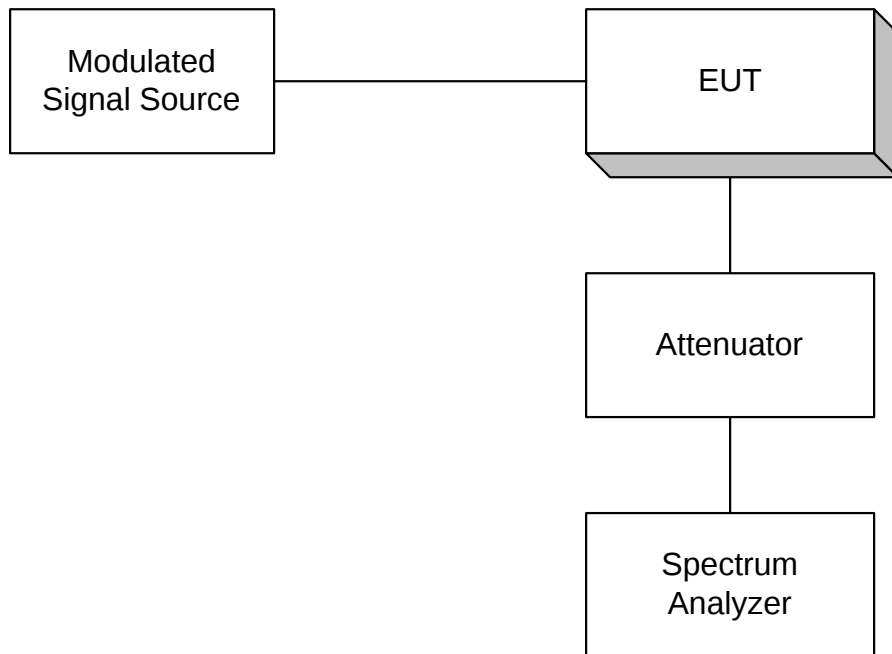

EQUIPMENT: **AF1927**

Para. No. 2.993 - Field Strength of Spurious Radiation

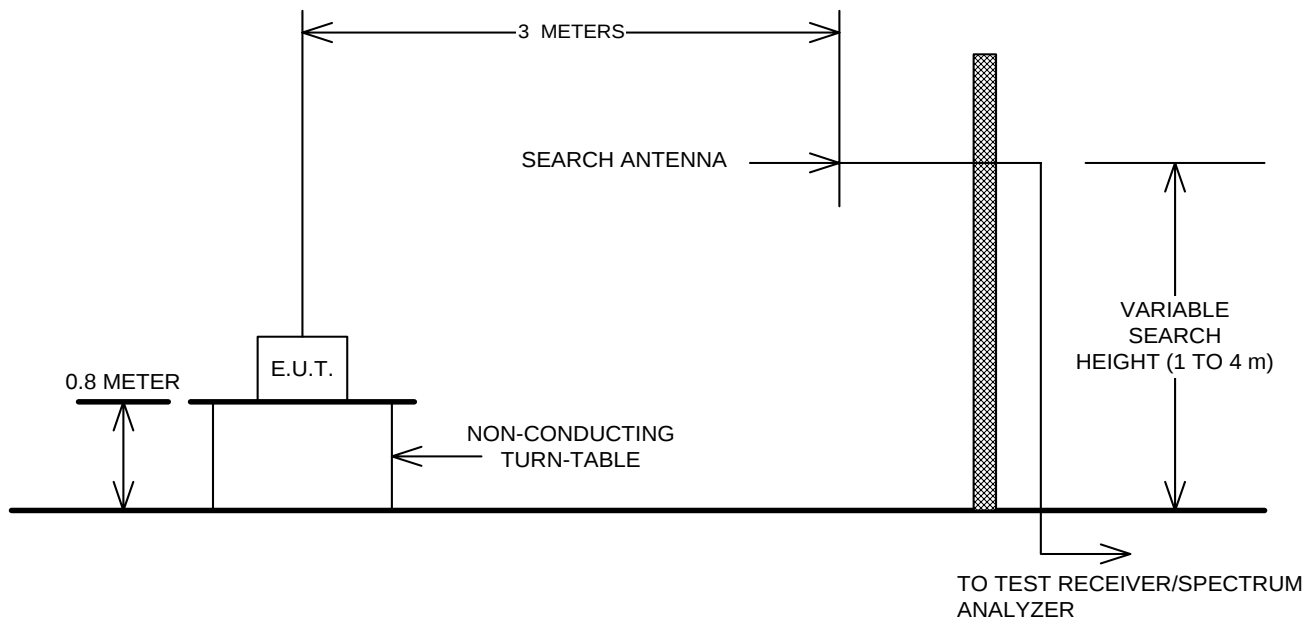

Para. No. 2.995 - Frequency Stability

