

Nemko Test Report: 4L0571RUS1

Applicant: Andrew Corporation
108 Rand Park Drive
Garner, NC 27529

Equipment Under Test: TFAH 80/85/19
(E.U.T.)

In Accordance With: **FCC Part 22, Subpart H**
Cellular Band Repeaters

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, TX
75057-3136

Authorized By: 
Tom Tidwell, Frontline Group Manager

Date: 9/1/04

Total Number of Pages: 53

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Table of Contents

SECTION 1.	SUMMARY OF TEST RESULTS	3
SECTION 2.	GENERAL EQUIPMENT SPECIFICATION.....	5
SECTION 3.	RF POWER OUTPUT	7
SECTION 4.	OCCUPIED BANDWIDTH	8
SECTION 5.	SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	19
SECTION 6.	FIELD STRENGTH OF SPURIOUS	35
SECTION 7.	TEST EQUIPMENT LIST	37
ANNEX A -	TEST DETAILS.....	38
ANNEX B -	TEST DIAGRAMS	47

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Section 1. Summary of Test Results

Manufacturer: [Andrew Corporation](#)

Model No.: [TFAH 80/85/19](#)

Serial No.: [043003403](#)

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 22, Subpart H.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. NONE

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
RF Power Output	22.913(a)	500W ERP	Complies
Occupied Bandwidth	22.917(c)	Input/Output	Complies
Spurious Emissions at Antenna Terminals	22.917	-13 dBm	Complies
Field Strength of Spurious Emissions	22.917	-13 dBm E.I.R.P.	Complies
Frequency Stability	22.355	1.5 ppm	NA

Footnotes:**Measurement uncertainty for each test configuration is expressed to 95% probability.**

.

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Section 2. General Equipment Specification

Supply Voltage Input:	115 Vac		
Frequency Range:	Downlink:	869 – 894 MHz	
Frequency Range:	Uplink:	NA	
Type of Modulation and Designator:	CDMA (F9W) ☒	GSM (GXW) ☒	NADC (D7W) ☒
	EDGE (D7W) ☒	AMPS (F8W, F1D) ☒	
Output Impedance:	50 ohms		
RF Output (Rated):	Downlink:	Modulation	1 Carrier
		Analog	24
		CDMA	21.5
		GSM	24
		EDGE	22
		TDMA	22.5
Frequency Translation:	F1-F1	F1-F2	N/A
	☒	☐	☐
Band Selection:	Software	Duplexer Change	Fullband Coverage
	☐	☐	☒


EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Description of Operation

TFAH 80/58/19 is a fiber based tri-band repeater operating in the 800 MHz SMR, the 800 MHz cellular and the 1900 MHz PCS bands

System Diagram

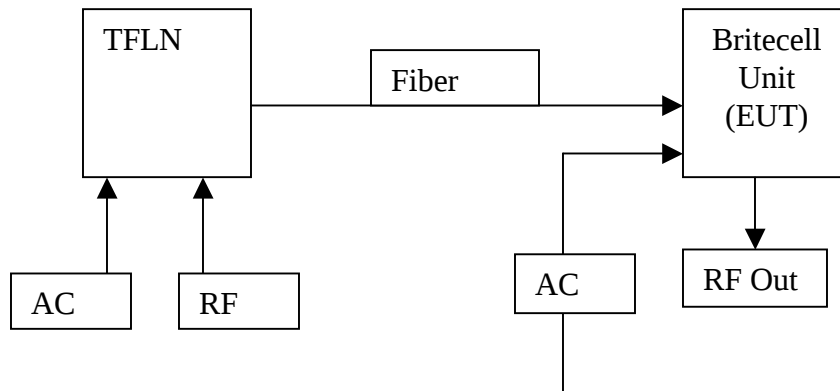

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Section 3. RF Power Output

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
TESTED BY: David Light	DATE: 8/30/04

Test Results: Complies.**Test Data:**

Direction	Modulation Type	Per Channel Power Output (dBm)	Composite Power Output (dBm)
Downlink	AMPS	24	27
Downlink	CDMA	21.5	24.5
Downlink	GSM	24	27
Downlink	NADC	22	25
Downlink	CDPD	22.5	25.5

Equipment Used: 1036-1065-1604-1629**Measurement Uncertainty:** +/- 1.7 dB**Temperature:** 25 °C**Relative Humidity:** 40 %

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Section 4. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.1049
TESTED BY: David Light	DATE: 8/30/04

Test Results: [Complies.](#)

Test Data: [See attached plots](#)

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

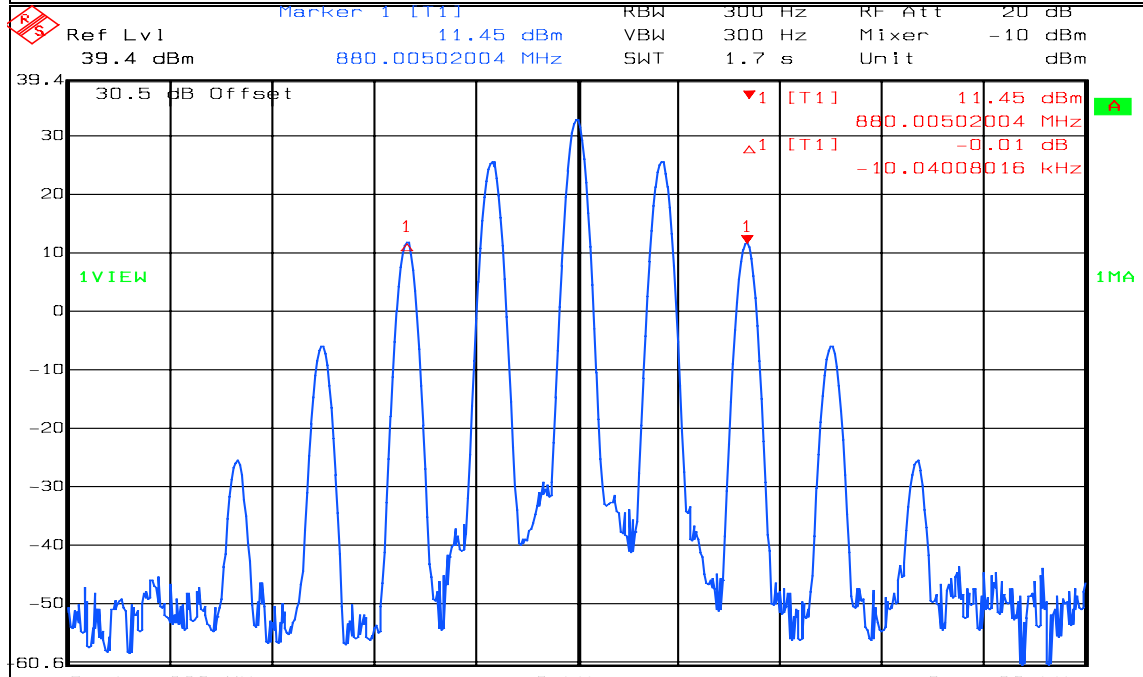Data Plot		Occupied Bandwidth	
Page <u>1</u> of <u>2</u>			
Job No.: 4L0571	Date: 8/30/2004	Complete: <u>X</u>	
Specification: PT22	Temperature(°C): 25	Preliminary: _____	
Tested By: David Light	Relative Humidity(%): 40		
E.U.T.: CELL BAND AMPLIFIER			
Configuration: TX			
Sample Number: 1			
Location: Lab 1	RBW: Refer to plots	Measurement	
Detector Type: Peak	VBW: Refer to plots	Distance: <u>NA</u> m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: 1629		
Filter: _____	Cable #2: _____		
Receiver: 1036	Cable #3: _____		
Attenuator #1: 1065	Cable #4: _____		
Attenuator #2: 1604	Mixer: _____		
Additional equipment used: _____			
Measurement Uncertainty: +/-1.7 dB			
			
Ref Lvl 39.4 dBm 11.45 dBm 880.00502004 MHz RBW 300 Hz RF Att 20 dB VBW 300 Hz Mixer -10 dBm Unit dBm SWT 1.7 s			
Marker 1 [T1] 11.45 dBm 880.00502004 MHz -0.01 dB -10.04008016 kHz			
Center 880 MHz 3 kHz/ Span 30 kHz			
Date: 30.AUG.2004 10:48:10			
Notes: ANALOG OUTPUT MAX POWER 34 dBm 2 kHz Tone - 2.5 kHz Deviation			

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

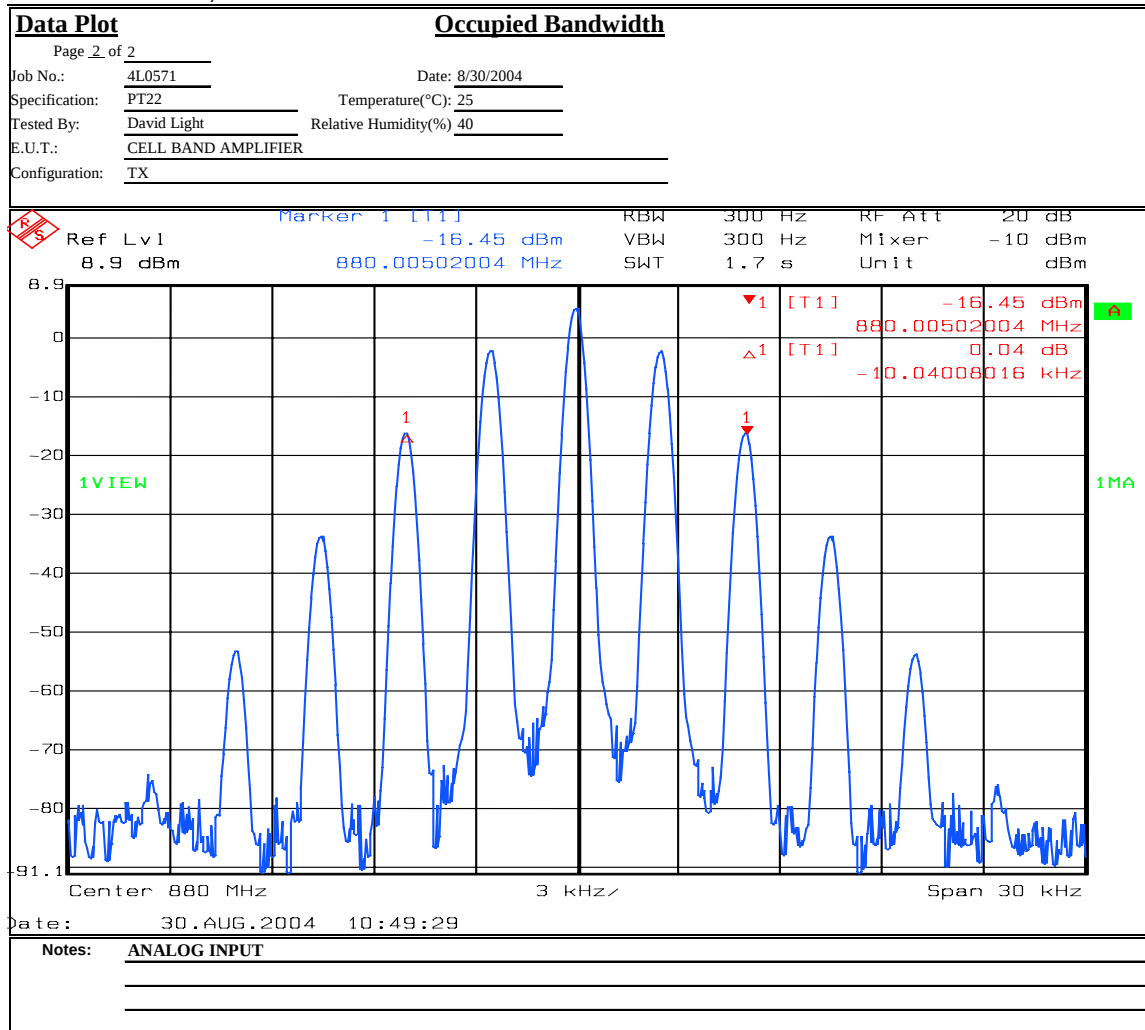

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

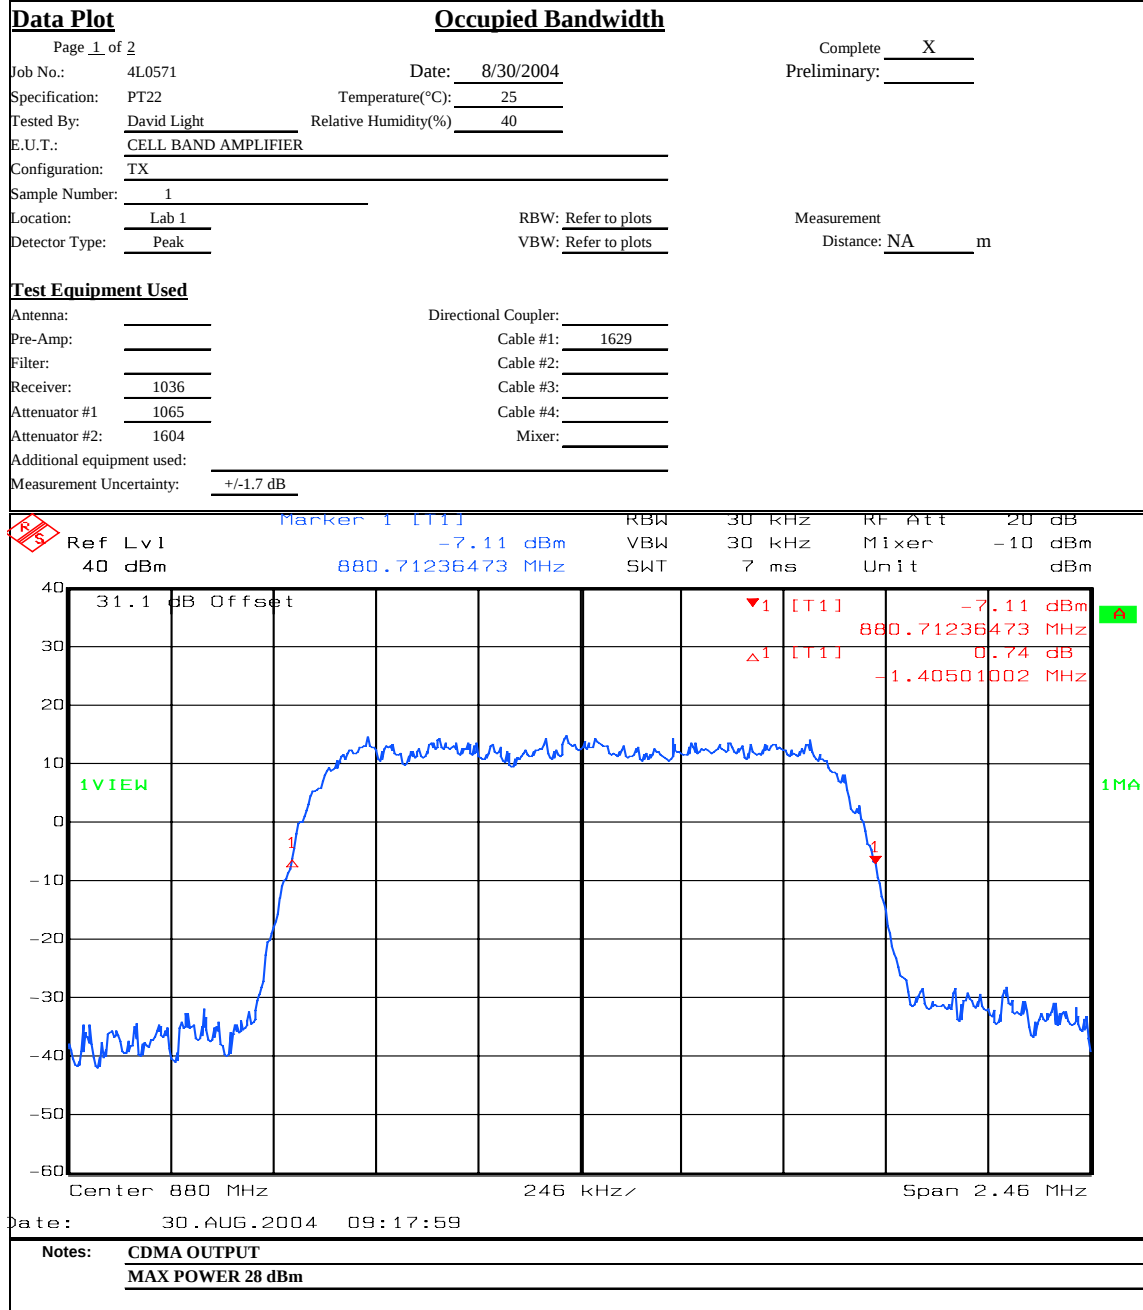

EQUIPMENT: TFAH 80/85/19


Test Report No.: 4L0571RUS1

Test Data – Occupied Bandwidth



Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

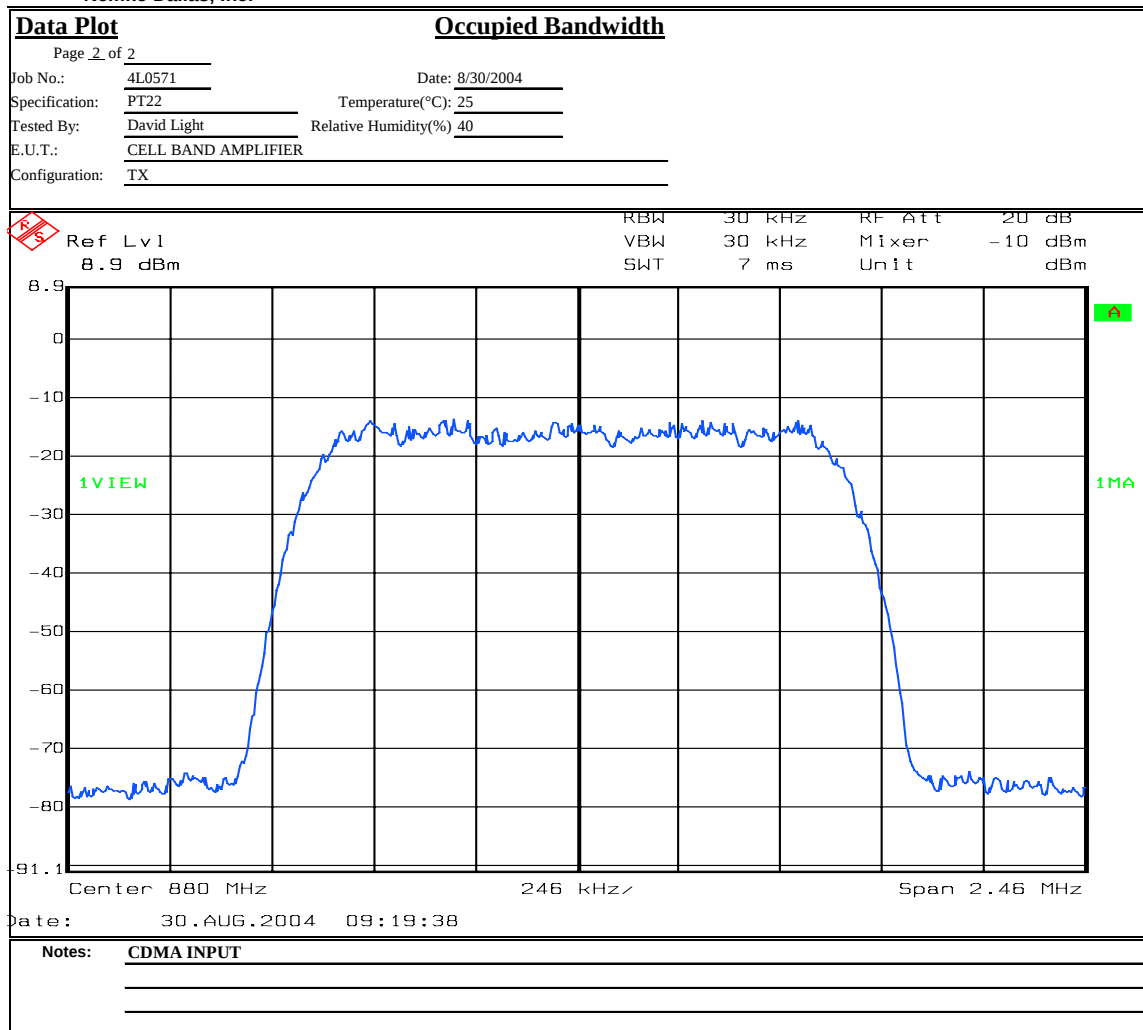

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

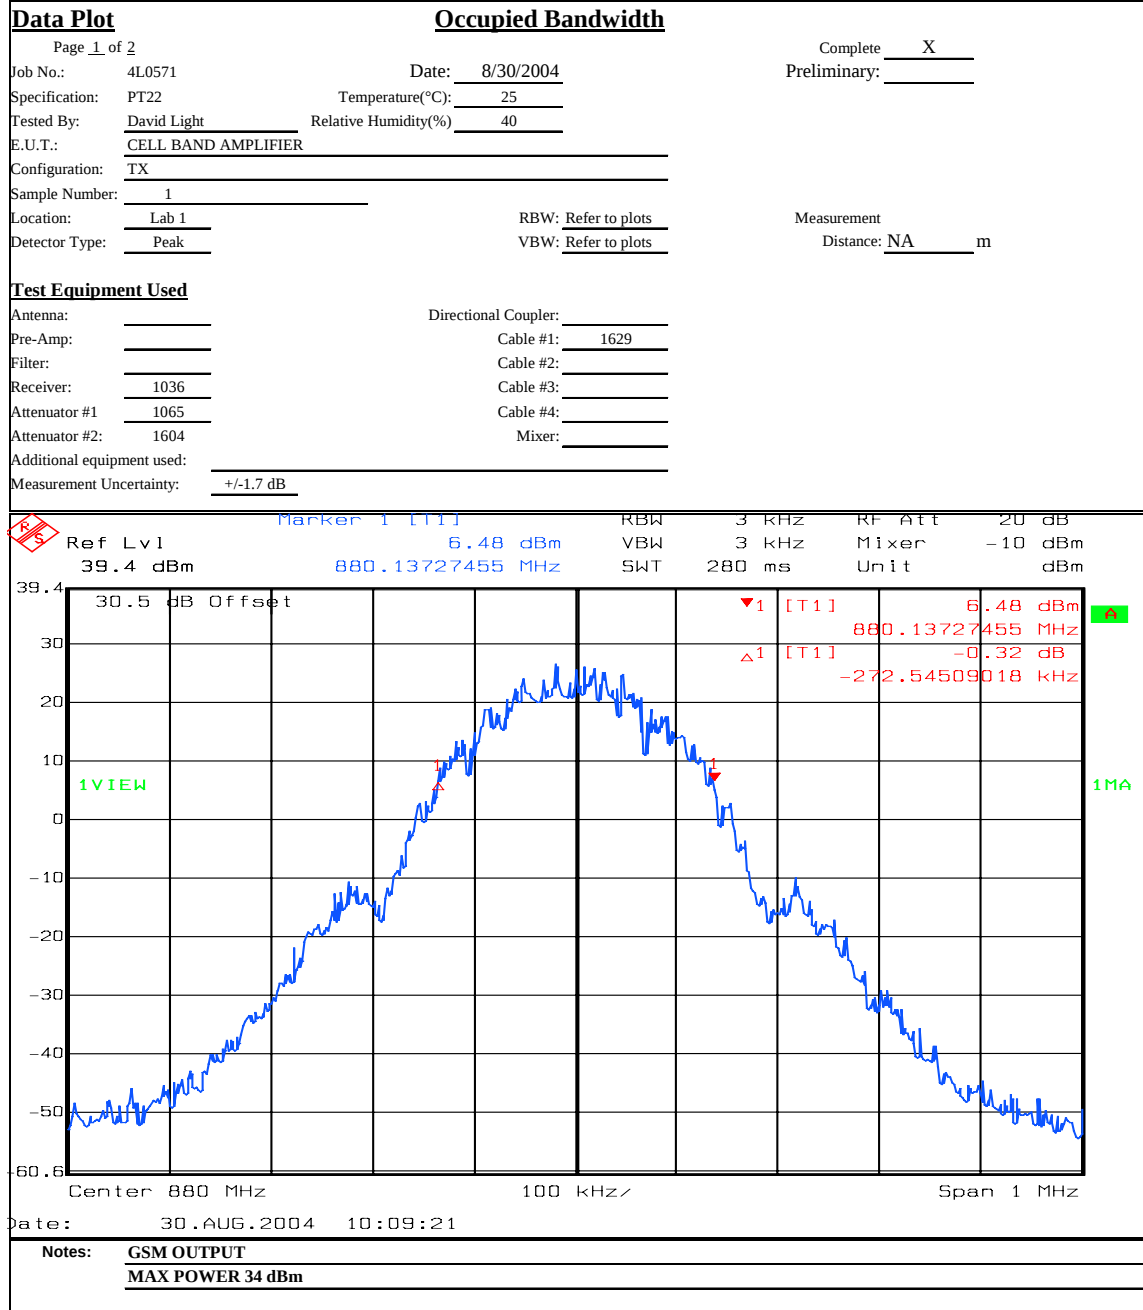

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

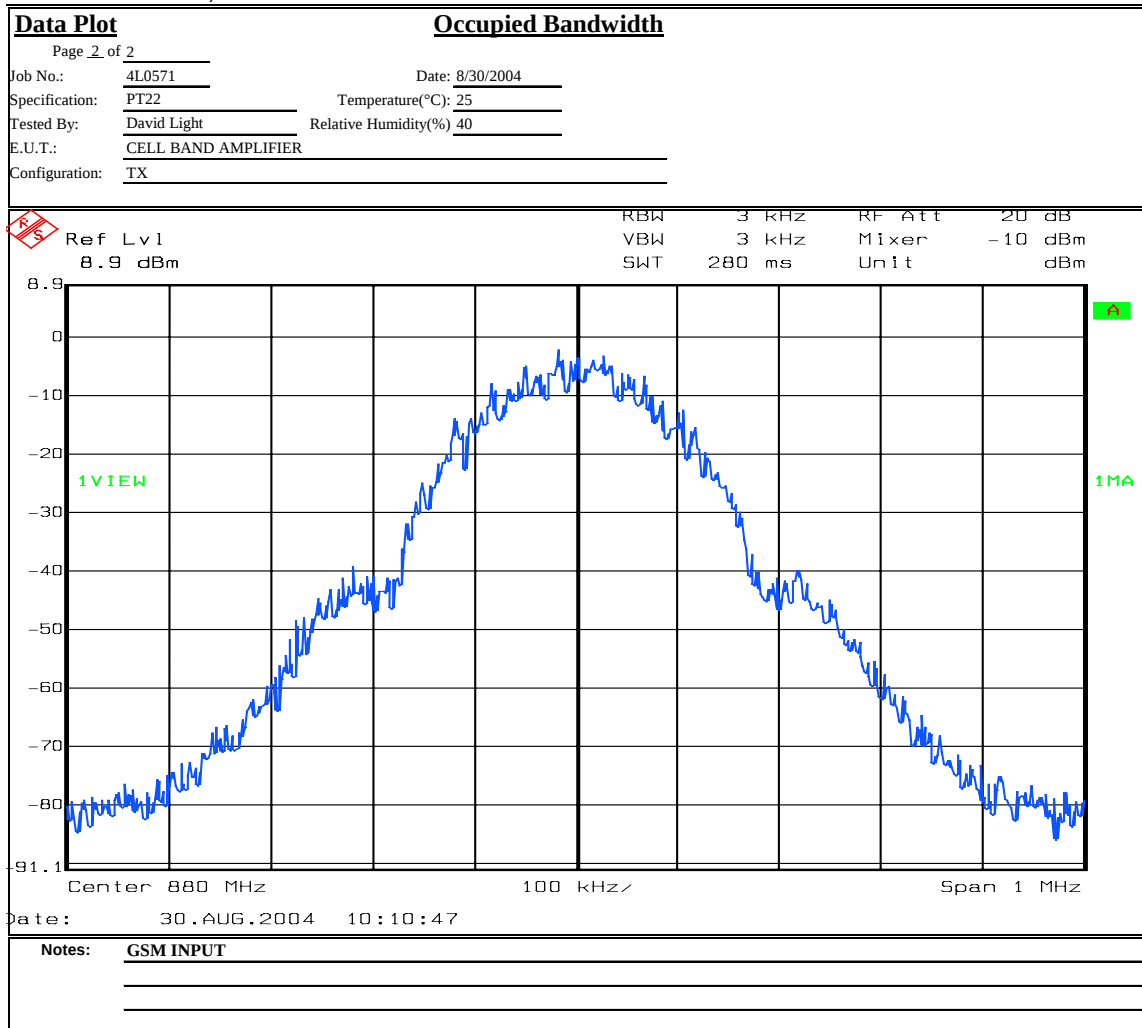

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

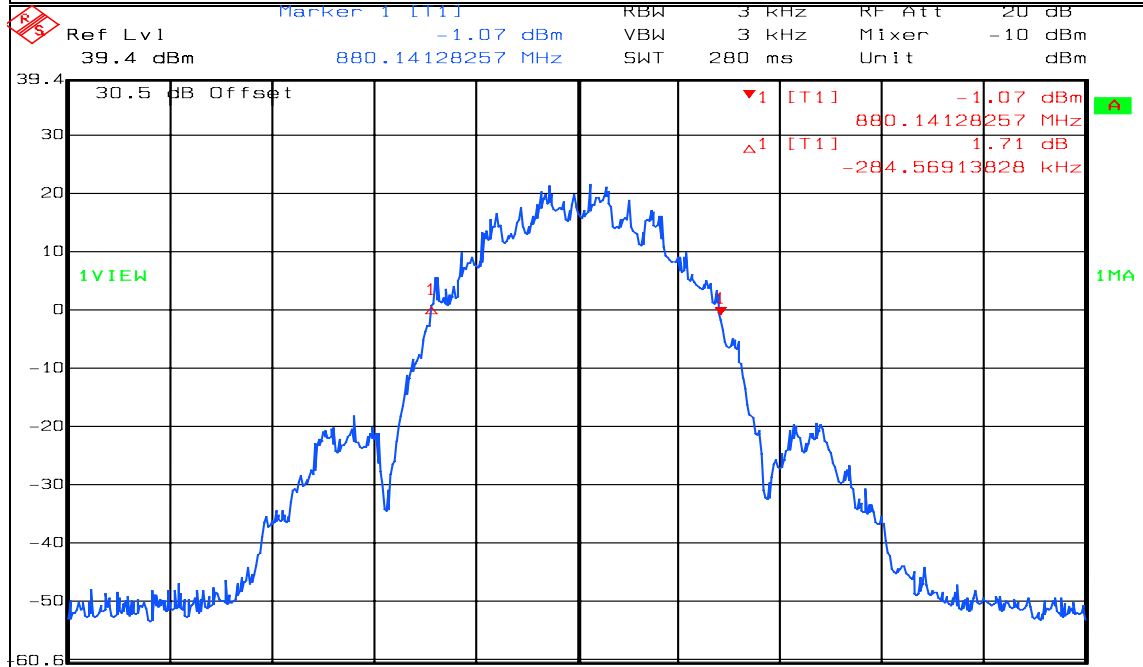Data Plot		Occupied Bandwidth	
Page <u>1</u> of <u>2</u>			
Job No.: 4L0571	Date: 8/30/2004	Complete: <u>X</u>	
Specification: PT22	Temperature(°C): 25	Preliminary: _____	
Tested By: David Light	Relative Humidity(%): 40		
E.U.T.: CELL BAND AMPLIFIER			
Configuration: TX			
Sample Number: 1			
Location: Lab 1	RBW: Refer to plots	Measurement	
Detector Type: Peak	VBW: Refer to plots	Distance: <u>NA</u> m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: 1629		
Filter: _____	Cable #2: _____		
Receiver: 1036	Cable #3: _____		
Attenuator #1: 1065	Cable #4: _____		
Attenuator #2: 1604	Mixer: _____		
Additional equipment used: _____			
Measurement Uncertainty: +/-1.7 dB			
			
Date: 30.AUG.2004 10:21:24			
Notes: <u>EDGE OUTPUT</u>			
<u>MAX POWER 30.5 dBm</u>			

EQUIPMENT: TFAH 80/85/19


Test Report No.: 4L0571RUS1

Test Data – Occupied Bandwidth



Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

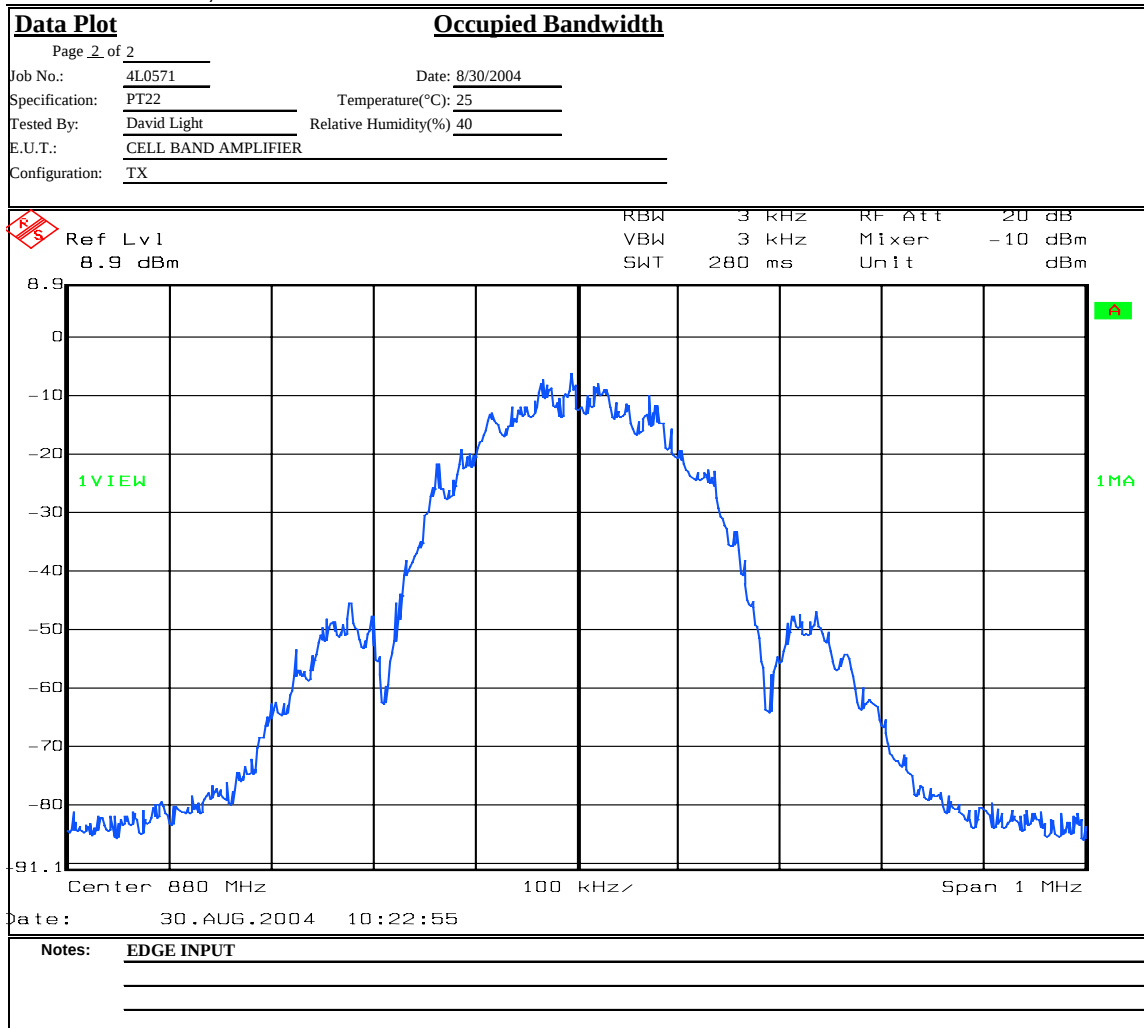

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		Occupied Bandwidth			
Page <u>1</u> of <u>2</u>		Date: <u>8/30/2004</u>		Complete <u>X</u>	
Job No.: <u>4L0571</u>	Specification: <u>PT22</u>	Temperature(°C): <u>25</u>	Preliminary: _____		
Tested By: <u>David Light</u>	Relative Humidity(%) <u>40</u>				
E.U.T.: <u>CELL BAND AMPLIFIER</u>					
Configuration: <u>TX</u>					
Sample Number: <u>1</u>					
Location: <u>Lab 1</u>	RBW: <u>1 kHz</u>	Measurement			
Detector Type: <u>Peak</u>	VBW: <u>1 kHz</u>	Distance: <u>NA</u> m			
Test Equipment Used					
Antenna: _____	Directional Coupler: _____				
Pre-Amp: _____	Cable #1: <u>1629</u>				
Filter: _____	Cable #2: _____				
Receiver: <u>1036</u>	Cable #3: _____				
Attenuator #1: <u>1065</u>	Cable #4: _____				
Attenuator #2: <u>1604</u>	Mixer: _____				
Additional equipment used: _____					
Measurement Uncertainty: <u>+/-1.7 dB</u>					
Ref Lvl 1 39.4 dBm Marker 1 [T1] 1.72 dBm 880.01515531 MHz RBW 1 kHz VBW 1 kHz SWT 320 ms RF Att 20 dB Mixer -10 dBm Unit dBm Center 880 MHz 12.5 kHz Span 125 kHz Date: 30.AUG.2004 10:38:37					
Notes: <u>TDMA OUTPUT</u> <u>MAX POWER 31.5 dBm</u>					

EQUIPMENT: TFAH 80/85/19


Test Report No.: 4L0571RUS1

Test Data – Occupied Bandwidth



Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

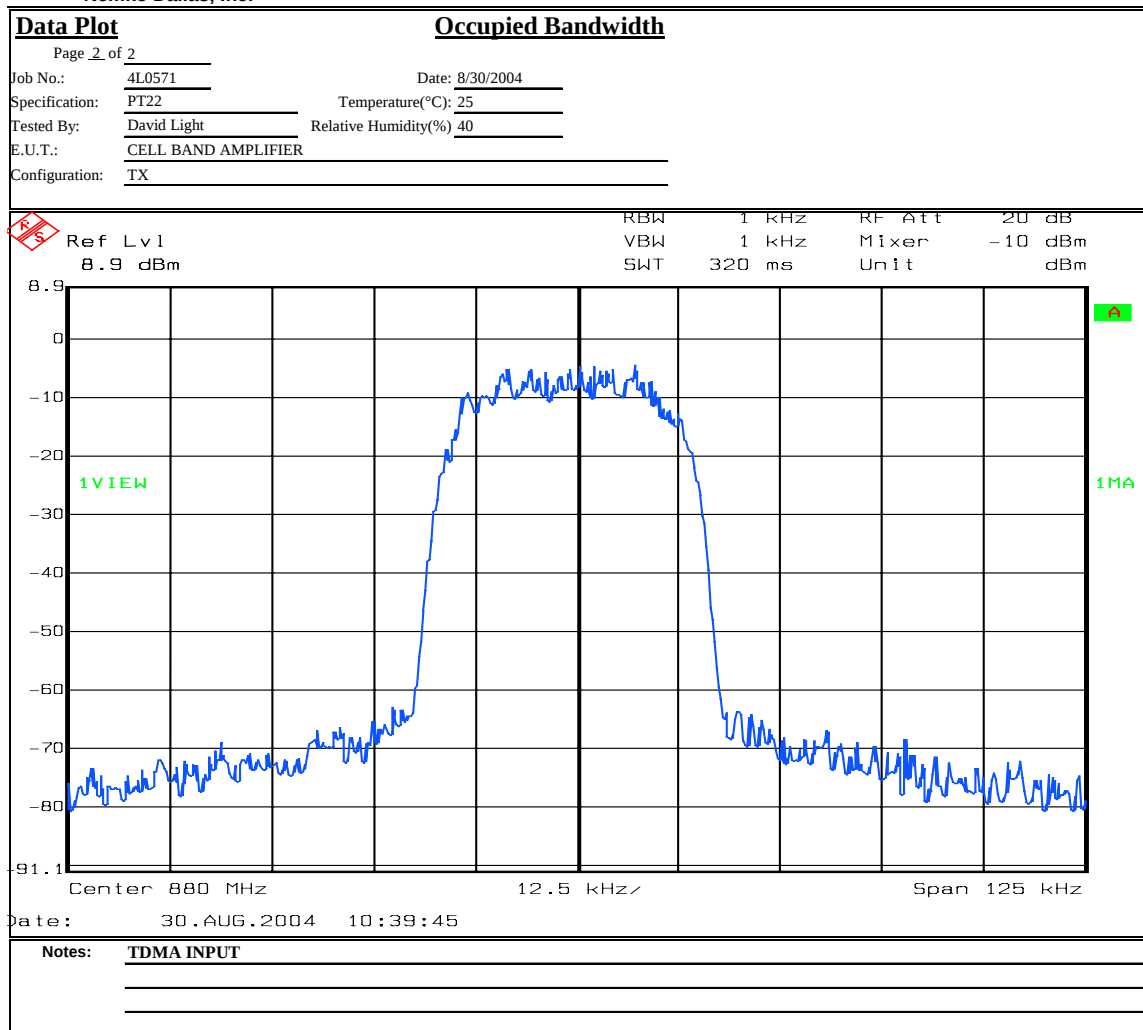

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Section 5. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA. NO.: 2.1051
TESTED BY: David Light	DATE: 8/30/04

Test Results: [Complies.](#)

Test Data: [See attached plots](#)

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot

Page 1 of 3

Job No.: 4L0571

Specification: PT22

Tested By: David Light

E.U.T.:	<u>CELL BAND AMPLIFIER</u>
---------	----------------------------

Configuration: TX

Sample Number: 1

Location:	Lab
-----------	-----

Detector Type:	Peak
----------------	------

Spurious Emissions at Antenna Terminals

Date: 8/30/2004

Temperature(°C): 25

Relative Humidity(%)	40
----------------------	----

Complete X

Preliminary:

Measurement

Distance: NA m

Test Equipment Used

Antenna: _____

Pre-Amp: _____

Filter:

Receiver:	1036
-----------	------

Attenuator #1	1065
---------------	------

Attenuator #2:	1604
----------------	------

Additional equipment used:

Measurement Uncertainty:	+/-1.7 dB
--------------------------	-----------

Directional Coupler: _____


Cable #1: 1629

Cable #2:

Cable #3: _____

Cable #4: _____

Mixer: _____

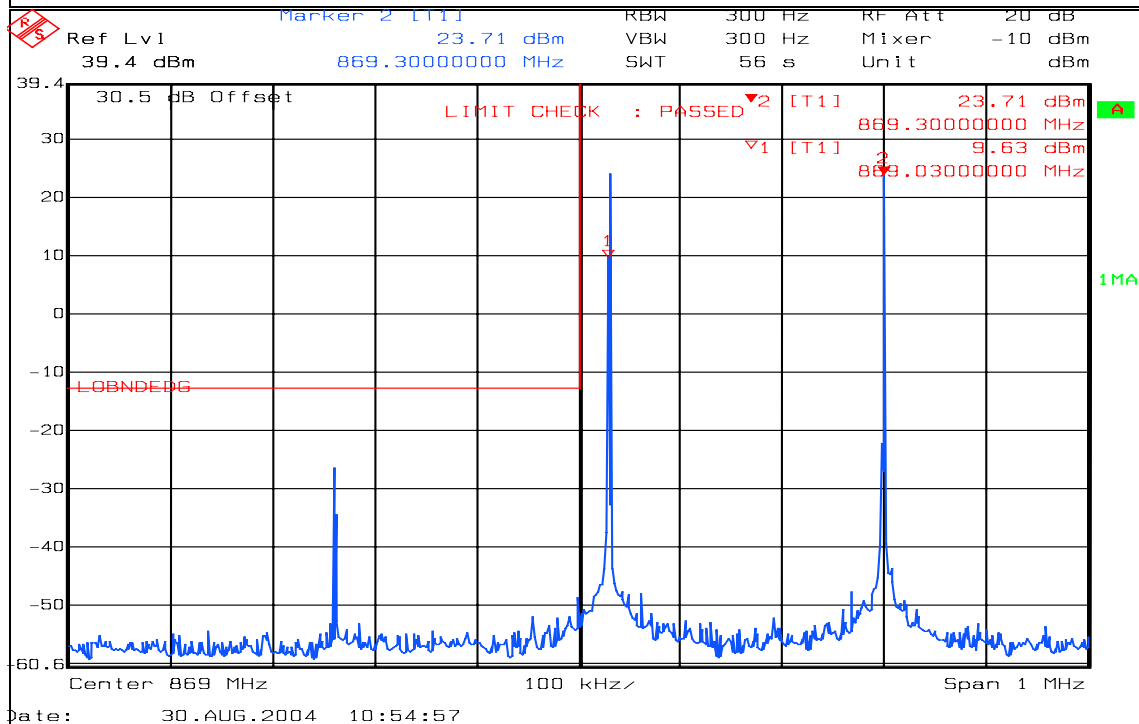

Notes: LOWER BAND EDGE
2 CHANNELS AT 24 dBm EACH
ANALOG

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

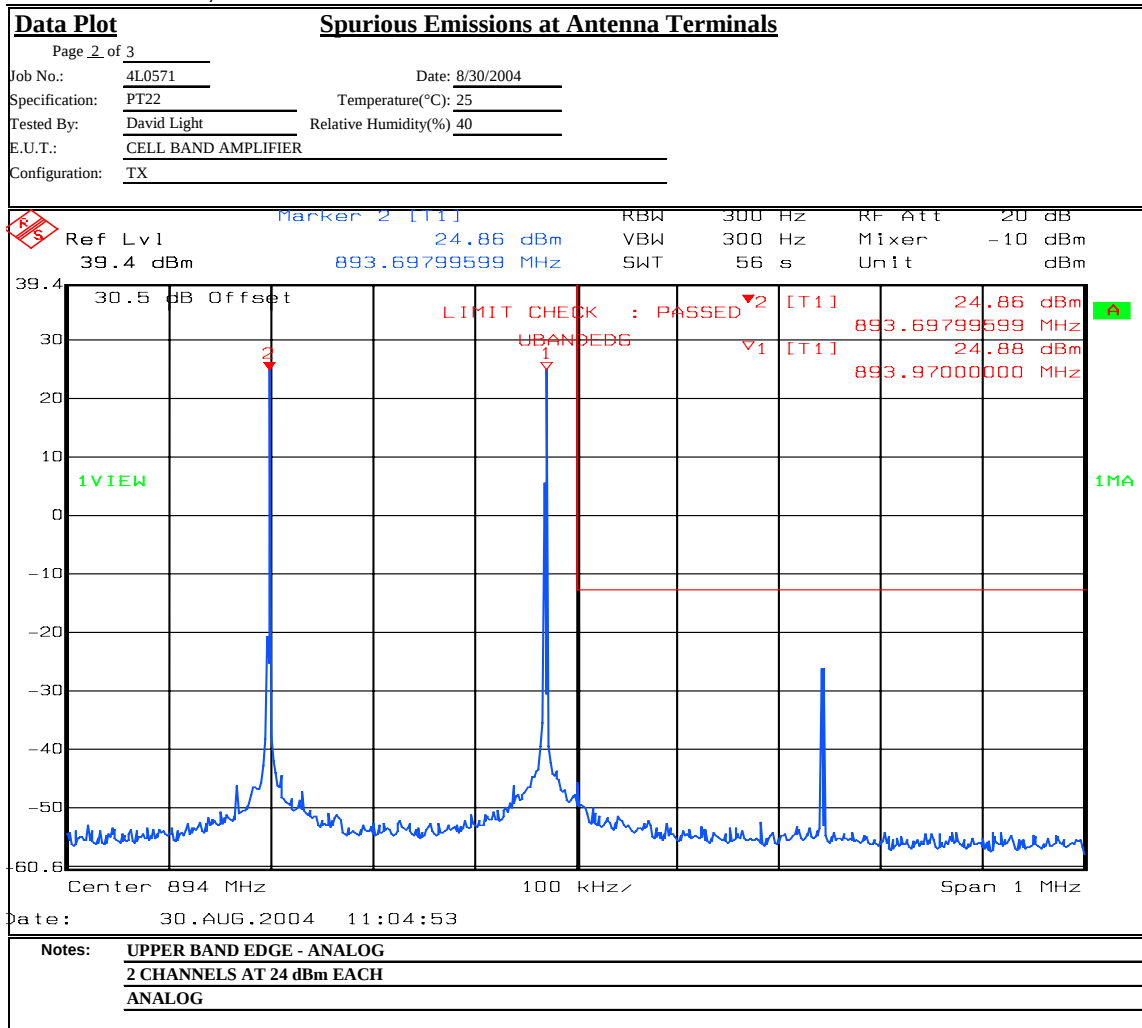

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

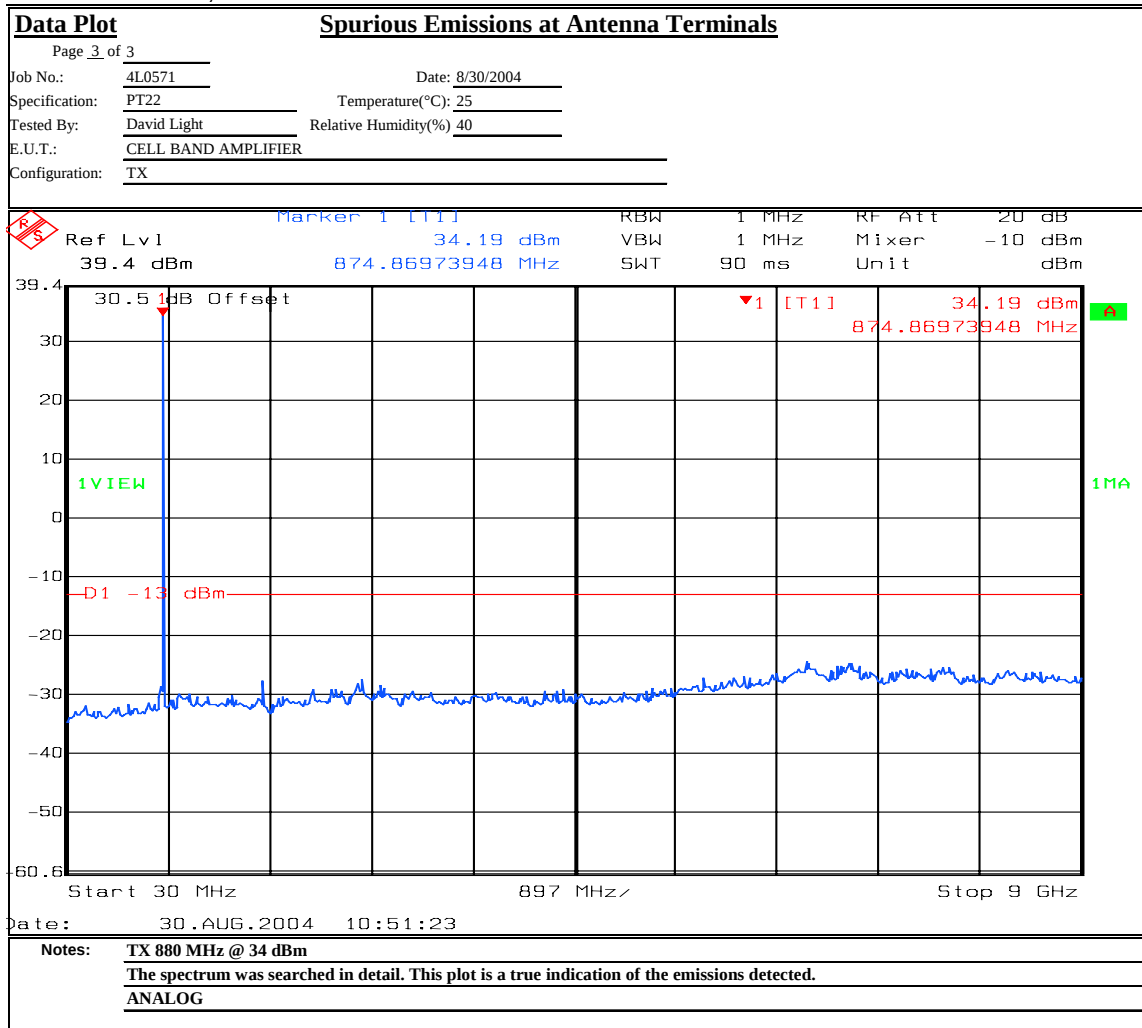

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u>X</u>	
Page <u>1</u> of <u>3</u>		Date: <u>8/30/2004</u>		Preliminary: <u> </u>	
Job No.: <u>4L0571</u>		Temperature(°C): <u>25</u>			
Specification: <u>PT22</u>		Relative Humidity(%): <u>40</u>			
Tested By: <u>David Light</u>					
E.U.T.: <u>CELL BAND AMPLIFIER</u>					
Configuration: <u>TX</u>					
Sample Number: <u>1</u>					
Location: <u>Lab 1</u>		RBW: <u>Refer to plots</u>		Measurement	
Detector Type: <u>Peak</u>		VBW: <u>Refer to plots</u>		Distance: <u>NA</u> m	
Test Equipment Used					
Antenna: <u> </u>		Directional Coupler: <u> </u>			
Pre-Amp: <u> </u>		Cable #1: <u>1629</u>			
Filter: <u> </u>		Cable #2: <u> </u>			
Receiver: <u>1036</u>		Cable #3: <u> </u>			
Attenuator #1: <u>1065</u>		Cable #4: <u> </u>			
Attenuator #2: <u>1604</u>		Mixer: <u> </u>			
Additional equipment used: <u> </u>					
Measurement Uncertainty: <u>+/-1.7 dB</u>					
Date: <u>30.AUG.2004 09:57:40</u>					
Notes: <u>LOWER BAND EDGE</u> <u>2 CHANNELS AT 21.5 dBm EACH</u> <u>CDMA</u>					

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

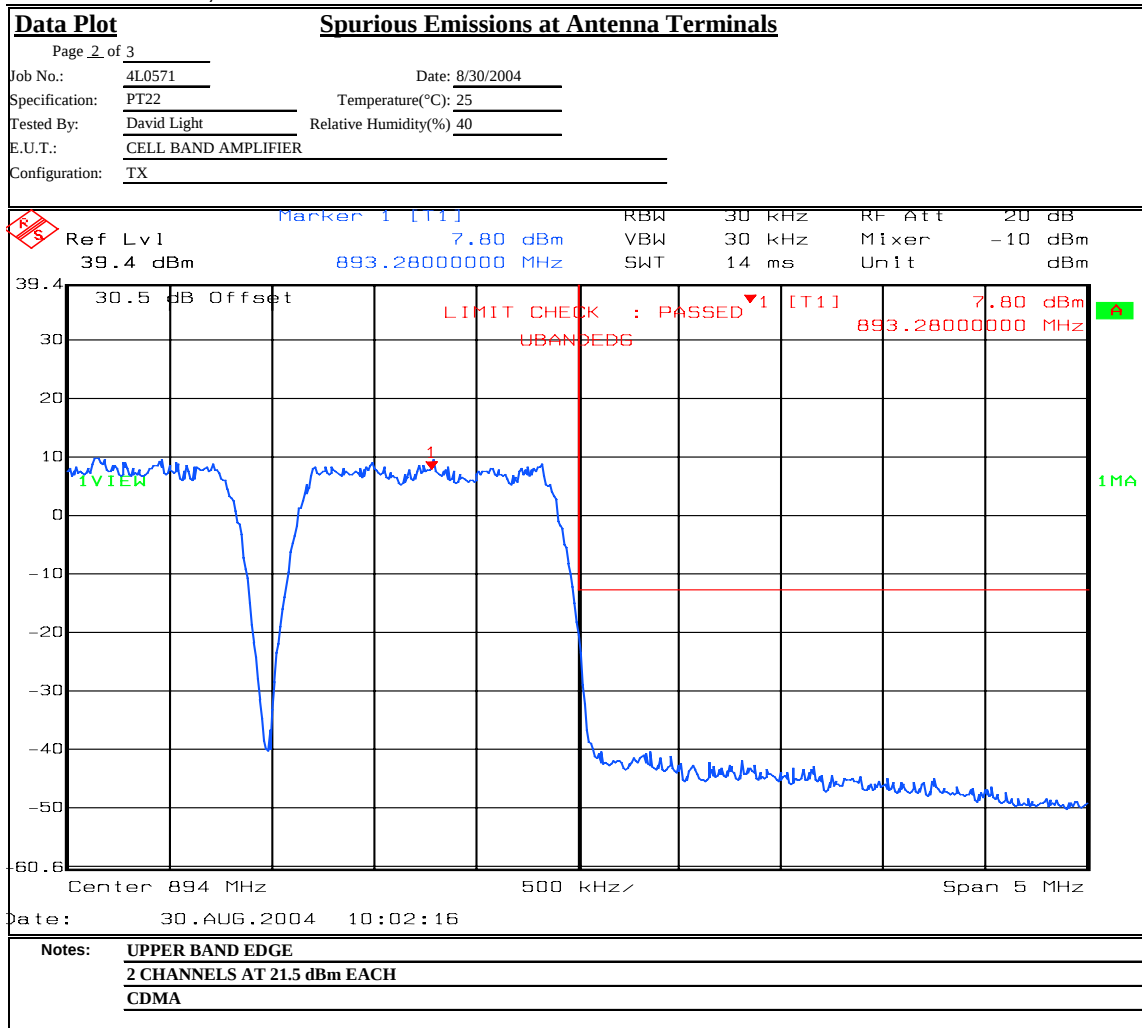

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

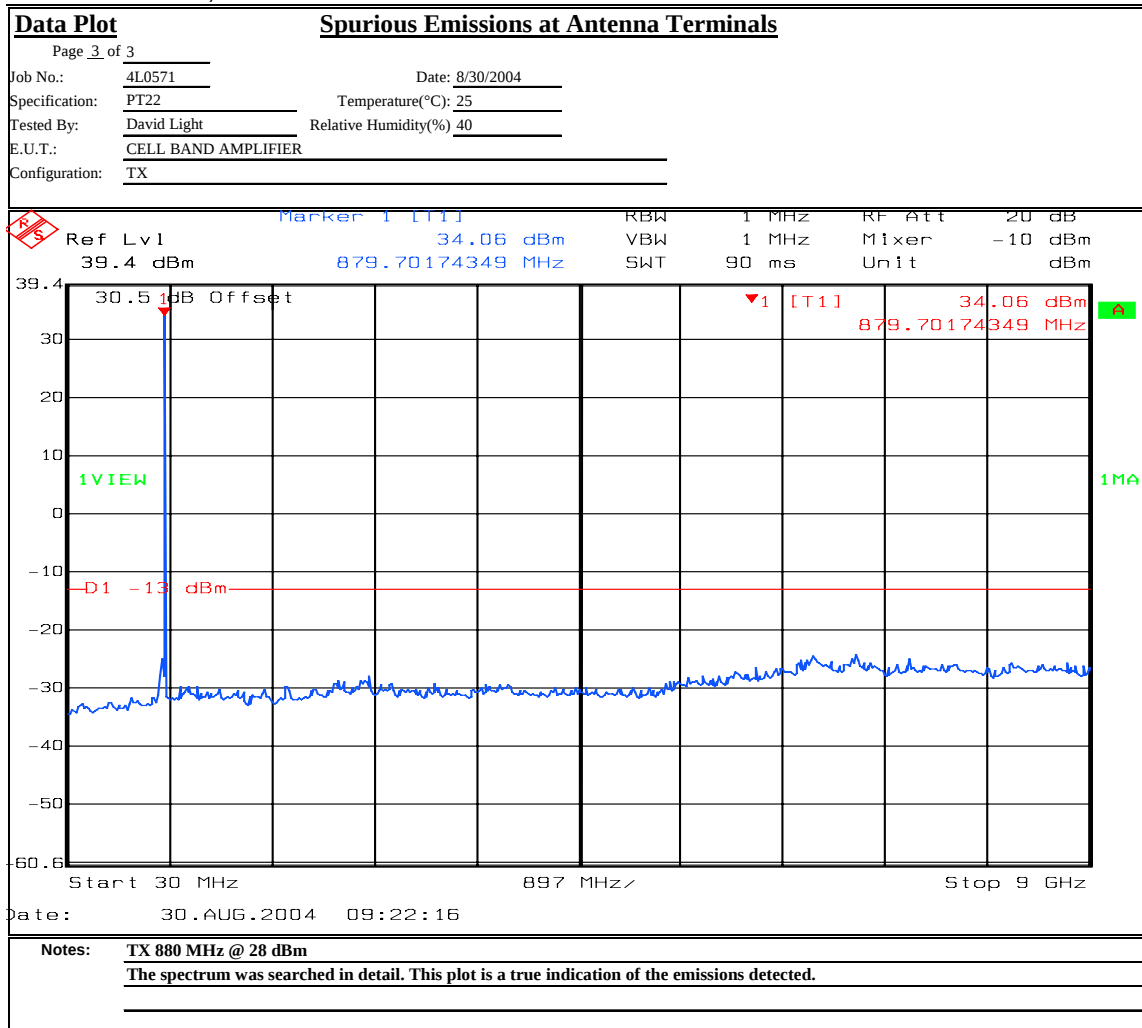

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

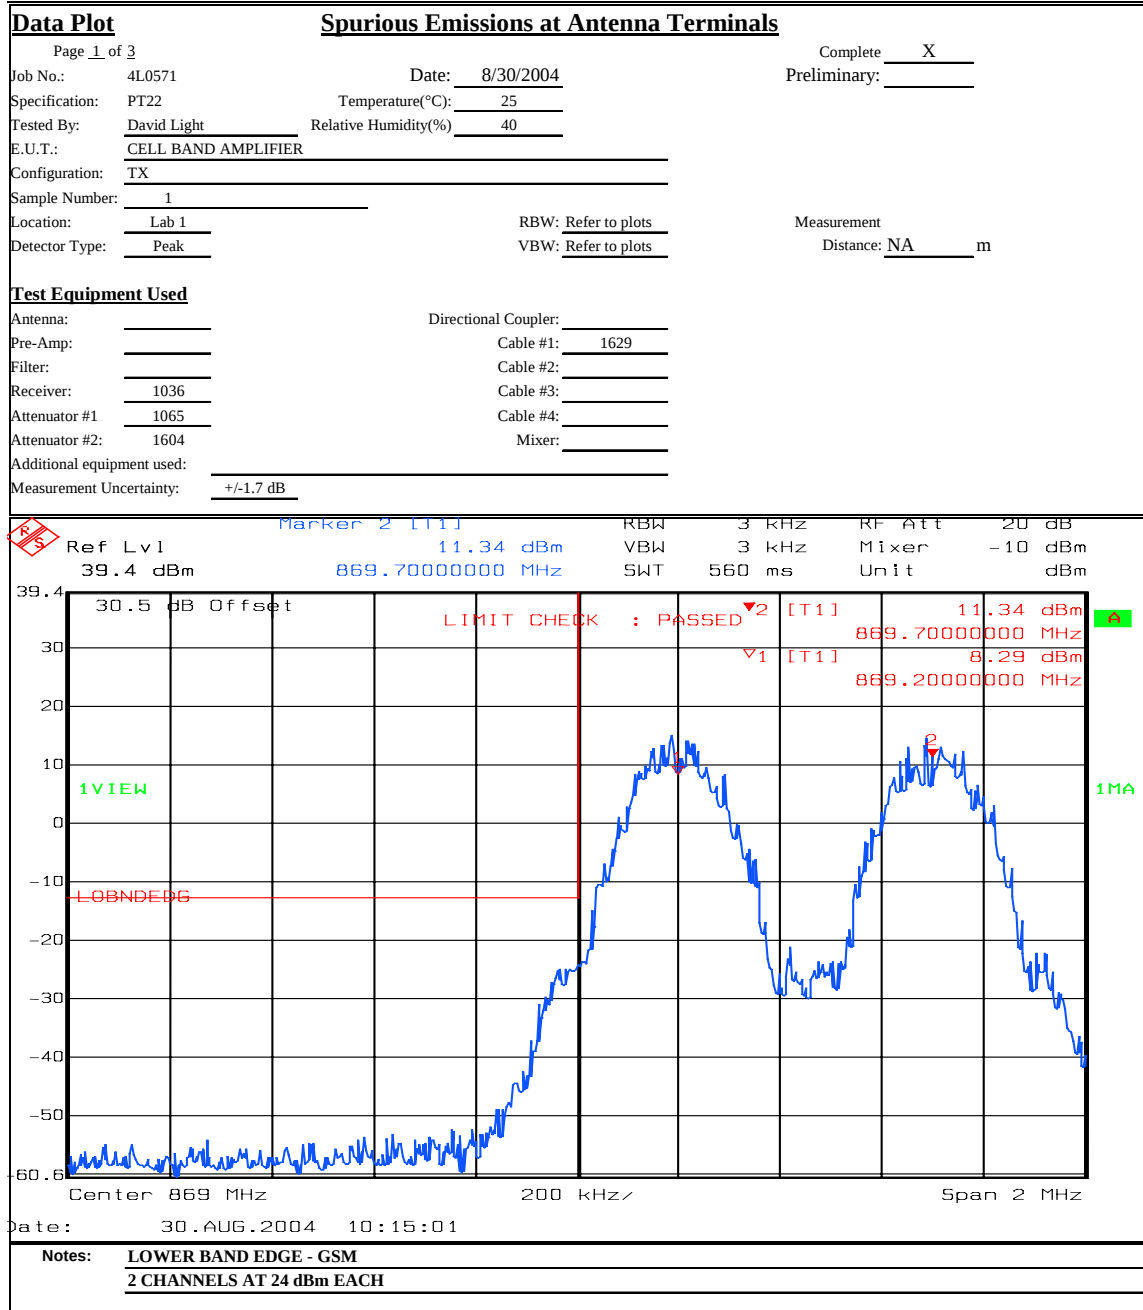

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

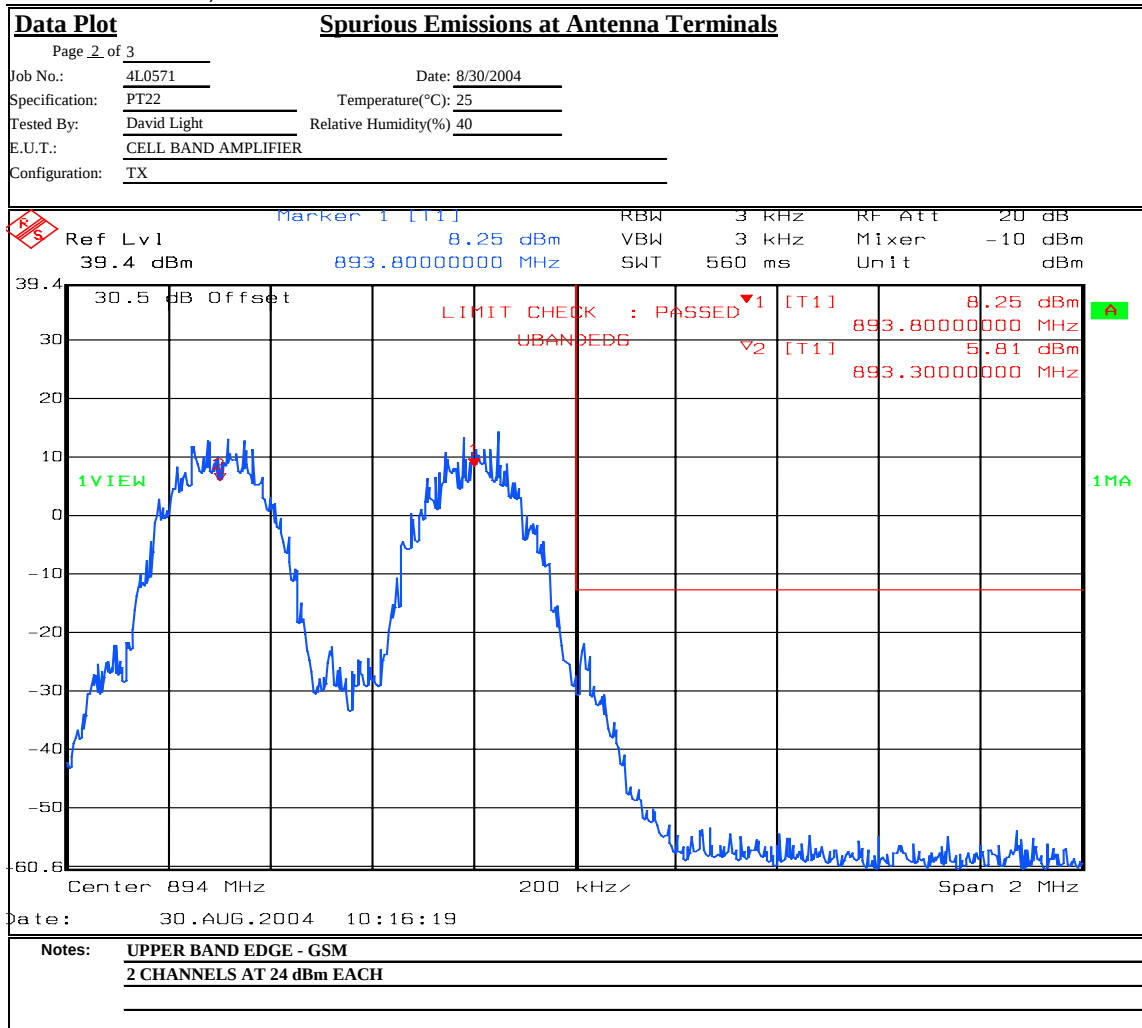

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

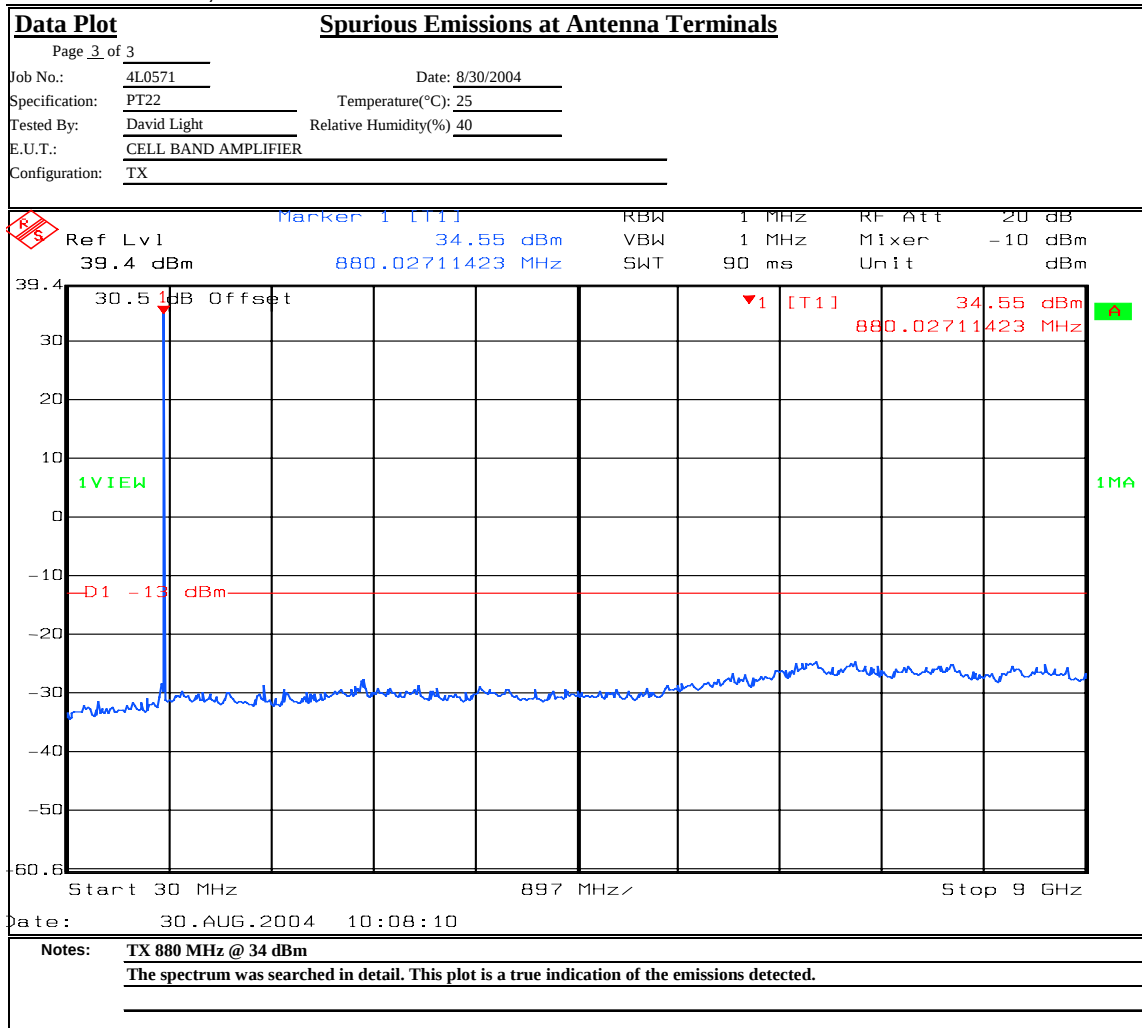

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot

Page 1 of 3

Job No.: 4L0571

Specification:

Tested By:

E.U.T.:

Configuration:

Sample Number:

Location:

Detector Type:

Spurious Emissions at Antenna Terminals

Date: 8/30/2004

Temperature(°C): 25

Relative Humidity(%)	40
----------------------	----

Complete X

Preliminary: _____

Test Equipment Used

Antenna:

Pre-Amp:

Filter:

Receiver:

Attenuator #1

Attenuator #2:

Additional equipment used:

Measurement Uncertainty:

Directional Coupler:


Cable #1:	1629
-----------	------

Cable #2:

Cable #3:

Cable #4:

Mixer:

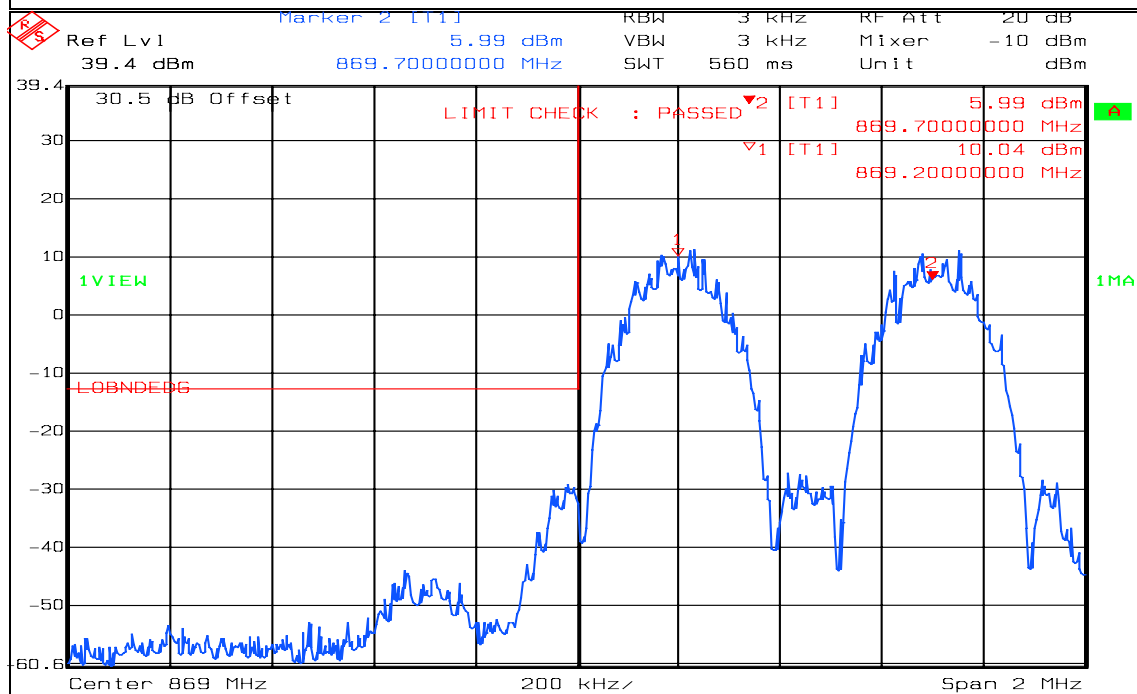

Date: 30.AUG.2004 10:27:46

Notes: LOWER BAND EDGE
2 CHANNELS AT 22 dBm EACH

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

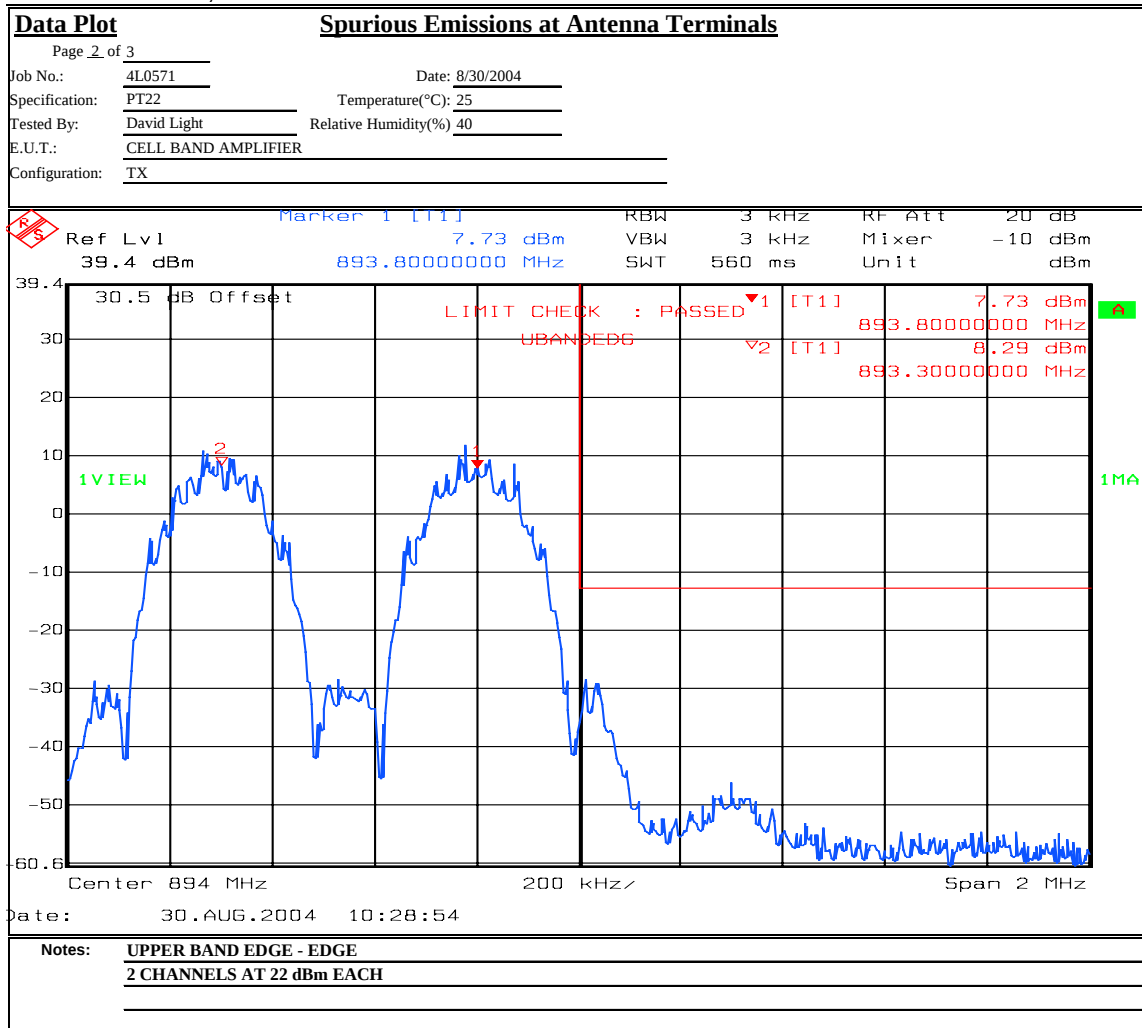

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

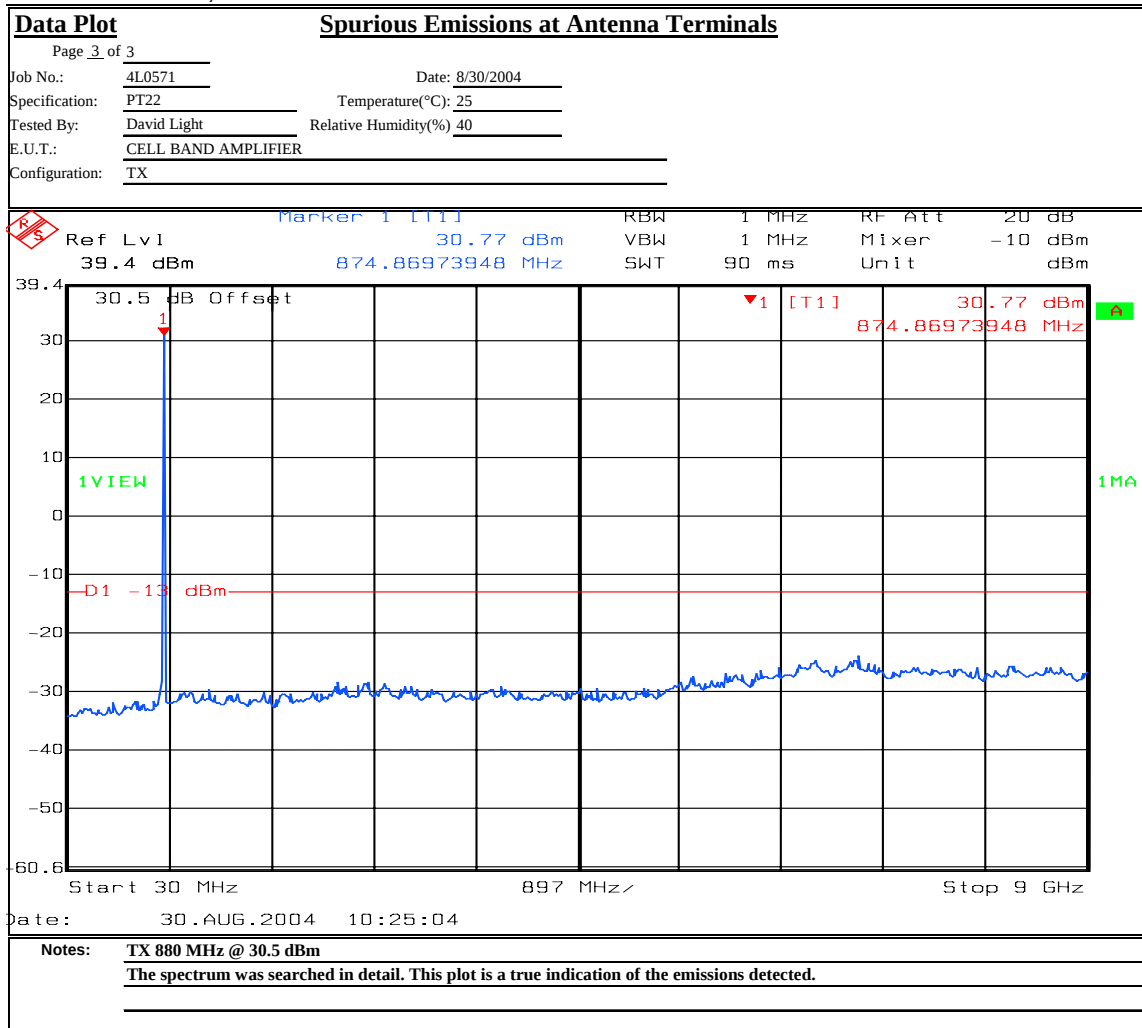

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

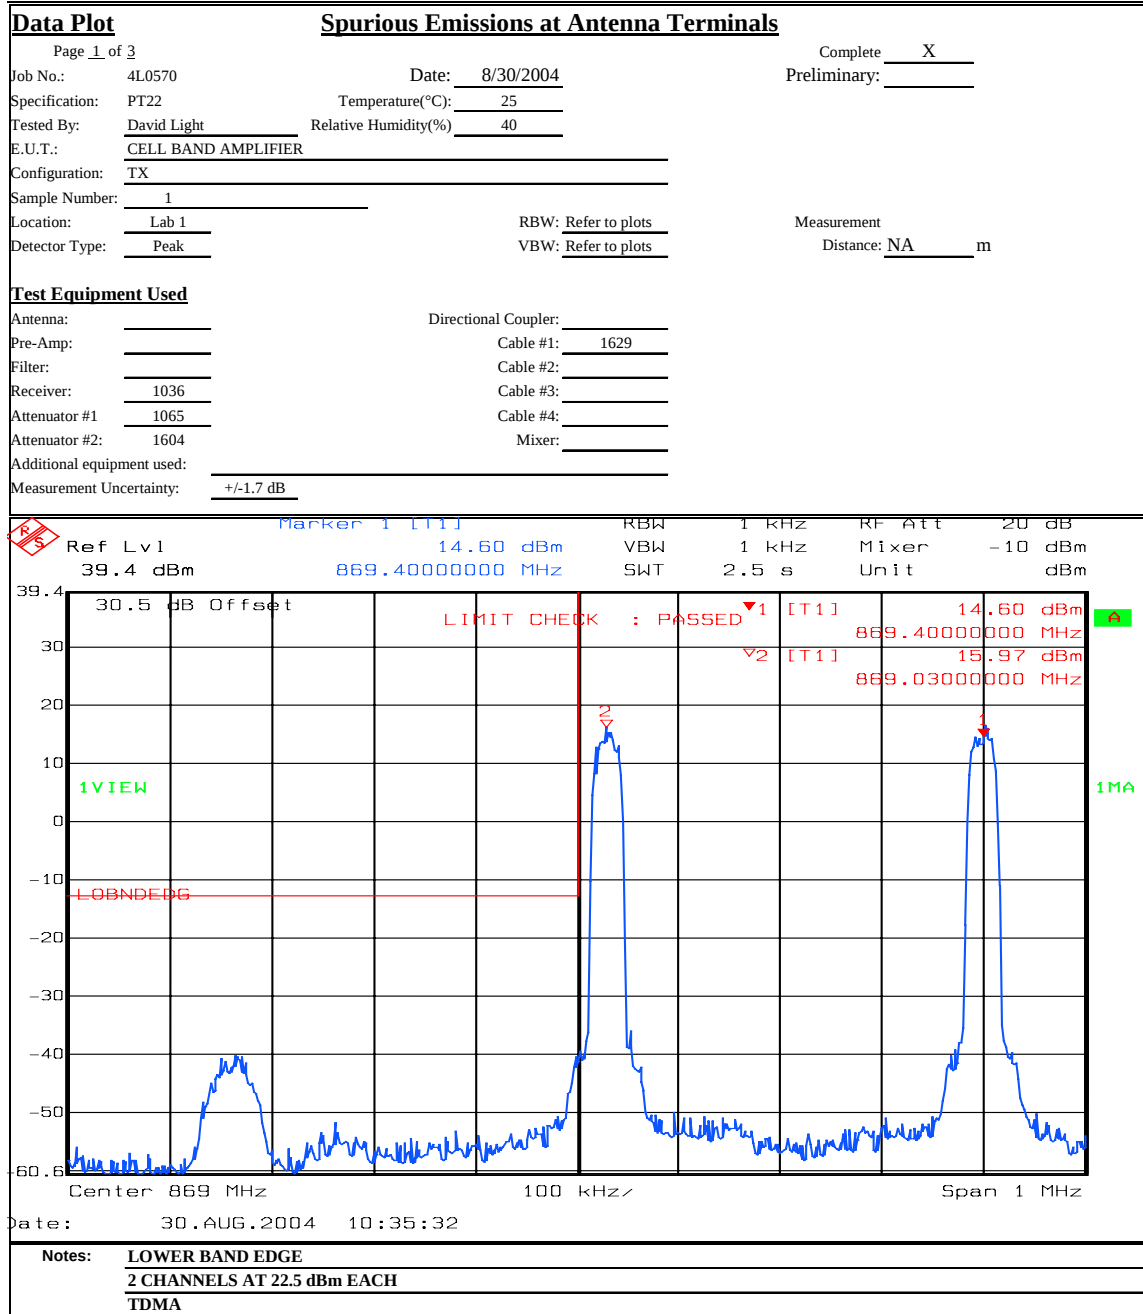

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

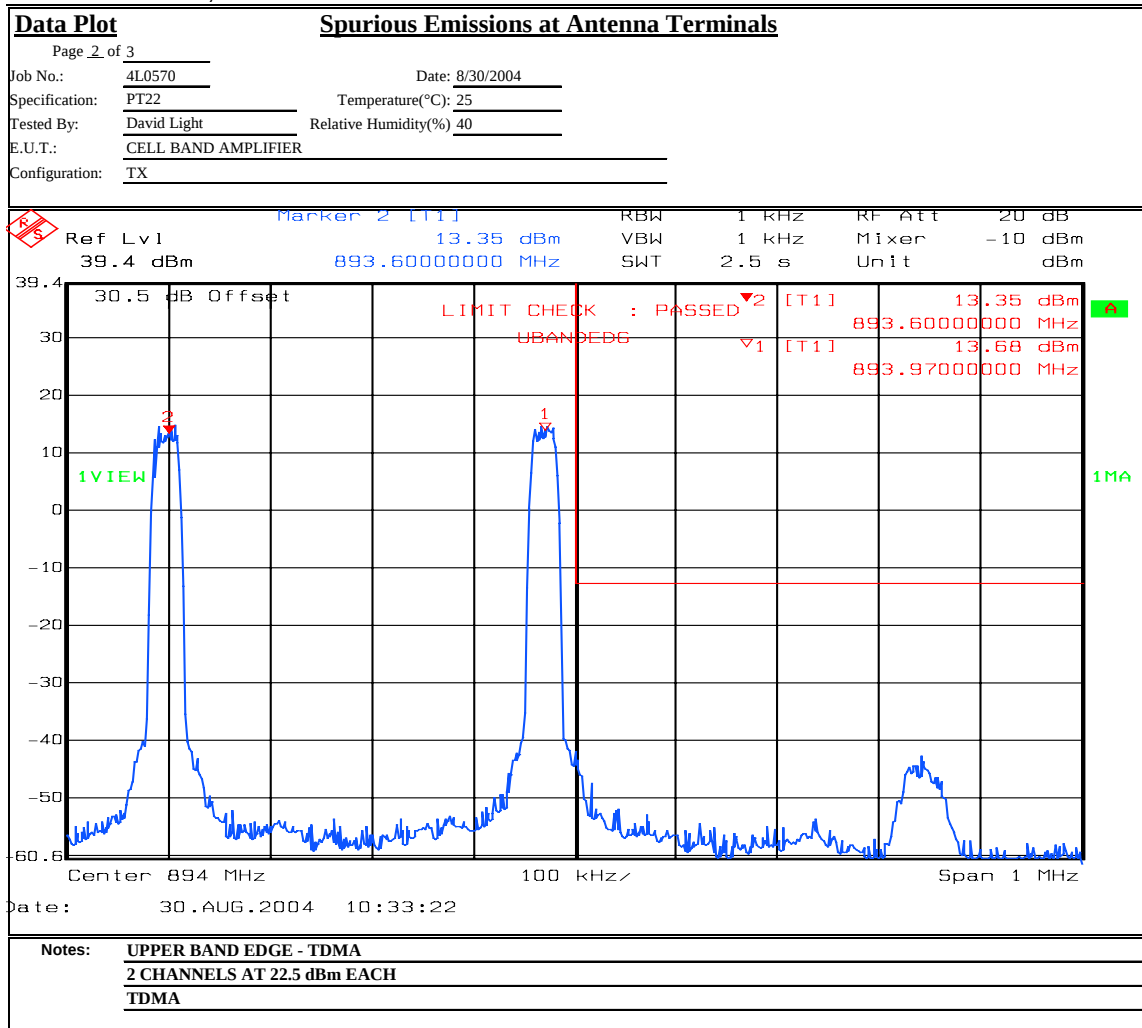

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

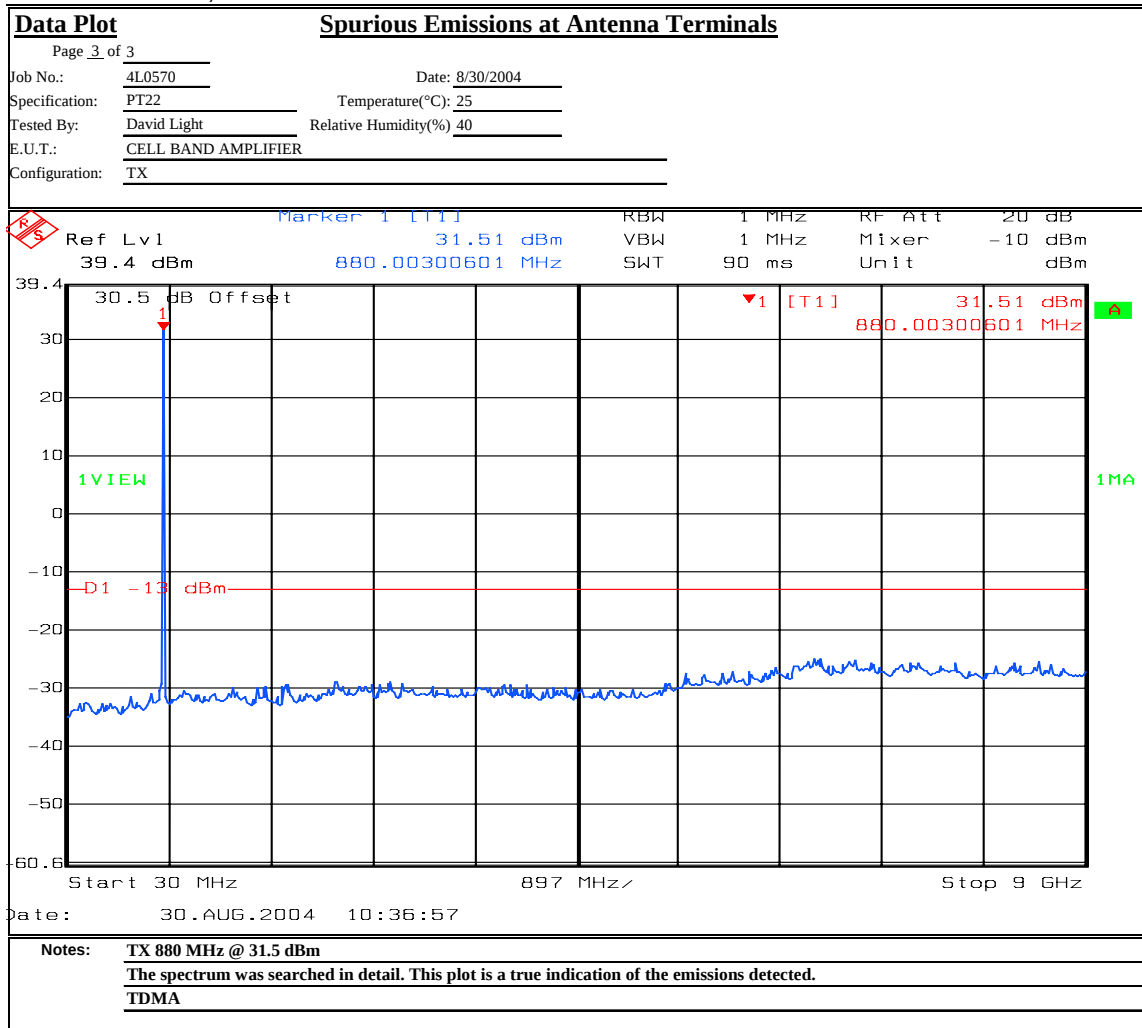

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Section 6. Field Strength of Spurious



NAME OF TEST: Field Strength of Spurious	PARA. NO.: 2.1053
TESTED BY: Brian Boyea	DATE: 8/31/04

Test Results: [Complies.](#)**Test Data:** [There were no emissions detected within 20 dB of the specification of -13 dBm. The spectrum was searched to the 10th harmonic of the carrier \(880 MHz\) with the amplifier operating at full rated power.](#)**Equipment Used:** [1304-1016-1464-1484-1485](#)**Measurement Uncertainty:** [+/- 1.7](#) dB**Temperature:** [25](#) °C**Relative Humidity:** [40](#) %

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Test Setup Photos

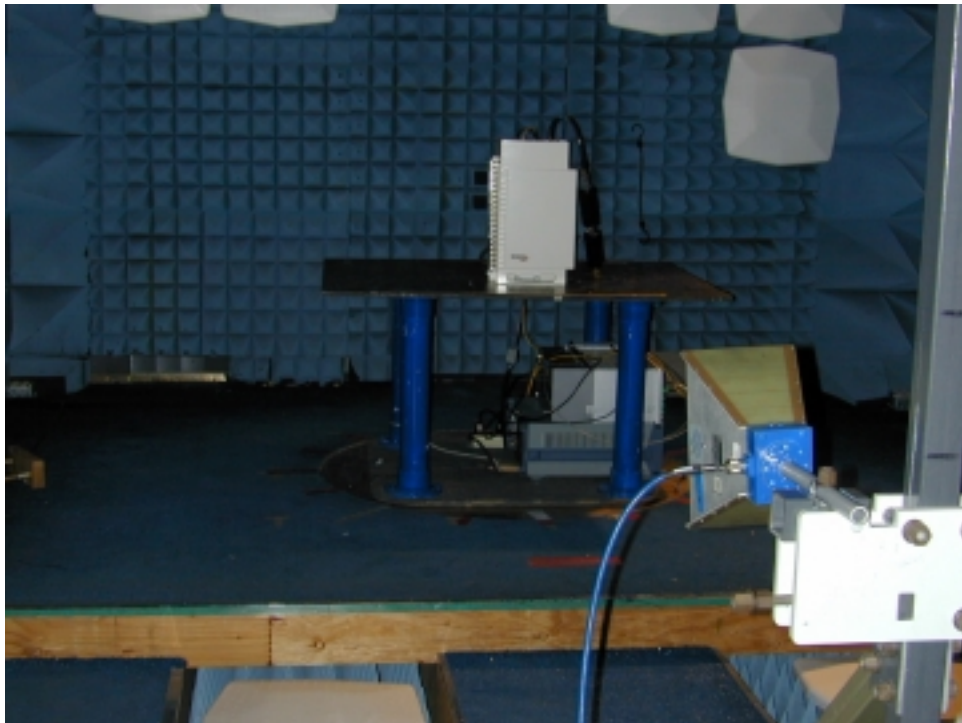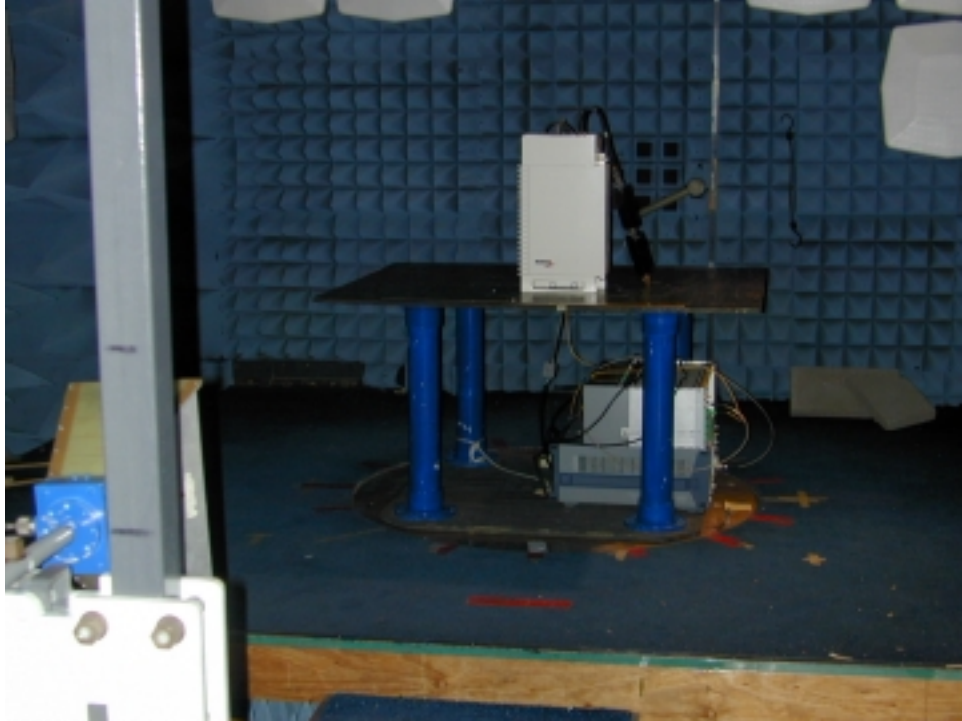

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Section 7. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	10/27/03	10/26/04
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	07/30/04	07/31/06
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	08/26/04	08/26/05
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	08/02/04	08/02/05
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	09/22/03	09/22/05
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	03/22/04	03/23/06
1065	ATTENUATOR	NARDA 776B-10	NONE	CBU	N/A
1604	ATTENUATOR	NARDA 776B-20	NONE	N/A	N/A
1629	CABLE, 6 ft	MEGAPHASE 10311 1GVT4	N/A	CBU	N/A

Nemko Dallas

FCC PART 22, SUBPART H
CELLULAR BAND REPEATERS

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

ANNEX A - TEST DETAILS

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

NAME OF TEST: RF Power Output**PARA. NO.: 2.1046**

Minimum Standard: Para. No. 22.913(a). The maximum effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 watts.

Method Of Measurement:Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter. Power output is measured with the maximum rated input level.

Integral Antenna:

If the antenna is not detachable from the circuit then the Peak Power Output is derived from the peak radiated field strength of the fundamental emission by using the plane wave relation $GP/4\pi R^2 = E^2/120\pi$ and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent isotropic radiated power in watts

E = the maximum measured field strength in V/m

R = the measurement range (3 meters)

G = the numeric gain of the transmit antenna in relation to an isotropic radiator

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

NAME OF TEST: Occupied Bandwidth (Voice & SAT)	PARA. NO.: 2.1049
--	-------------------

Minimum Standard: 22.917(c) The mean power of any emission removed from the carrier frequency by a displacement frequency (f_d in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

- (i) On any frequency removed from the carrier frequency by more than 12 kHz but not more than 20 kHz:

at least $117 \log(f_d/12)$

- (ii) On any frequency removed from the carrier frequency by more than 20 kHz, up to the first multiple of the carrier frequency:

at least $100 \log(f_d/11)$ dB or $43 + 10 \log(P)$ dB, whichever is the lesser attenuation.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 300 Hz

VBW: $\geq$ RBW

Span: 100 kHz

Sweep: Auto

Input Signal Characteristics (F3E/F3D):

RF level: Maximum recommended by manufacturer

AF1 frequency: 6 kHz

AF1 level: sufficient to produce 2 kHz deviation

AF2 frequency: 2.5 kHz

AF2 level: sufficient to produce 12 kHz deviation.

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

NAME OF TEST: Occupied Bandwidth (WB Data)

PARA. NO.: 2.1049

Minimum Standard: 22.917(c) The mean power of any emission removed from the carrier frequency by a displacement frequency (f_d in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

(1) On any frequency removed from the carrier frequency by more than 20 kHz but not more than 45 kHz:

at least 26 dB

(2) On any frequency removed from the carrier frequency by more than 45 kHz but not more than 90 kHz:

at least 45 dB

(3) On any frequency removed from the carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency:

at least 60 dB or $43 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 300 Hz

VBW: $\geq$ RBW

Span: 200 kHz

Sweep: Auto

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer

AF1 frequency: 10 kHz, random bit sequence

AF1 level: sufficient to produce 8 kHz deviation

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

NAME OF TEST: Occupied Bandwidth (ST)**PARA. NO.: 2.1049**

Minimum Standard: 22.917(c) The mean power of any emission removed from the carrier frequency by a displacement frequency (f_d in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

(1) On any frequency removed from the carrier frequency by more than 20 kHz but not more than 45 kHz:

at least 26 dB

(2) On any frequency removed from the carrier frequency by more than 45 kHz but not more than 90 kHz:

at least 45 dB

(3) On any frequency removed from the carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency:

at least 60 dB or $43 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 300 Hz

VBW: $\geq$ RBW

Span: 200 kHz

Sweep: Auto

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer

AF1 frequency: 10 kHz tone

AF1 level: sufficient to produce 8 kHz deviation

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

NAME OF TEST: Occupied Bandwidth (Digital Modulation)	PARA. NO.: 2.1049
--	--------------------------

Minimum Standard: Not defined by FCC. Input vs. Output.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: CDMA (30 kHz), GSM (30 kHz), NADC (1 kHz) and CDPD (1 kHz)

VBW: $\geq$ RBW

Span: As required

Sweep: Auto

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

NAME OF TEST: Spurious Emission at Antenna Terminals	PARA. NO.: 2.1051
---	--------------------------

Minimum Standard: Para. No. 22.917(e). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least $43 + 10 \log P$. This is equivalent to -13 dBm absolute power.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 30 kHz (AMPS). As required for digital modulations.

VBW: $\geq$ RBW

Start Frequency: 0 MHz

Stop Frequency: 10 GHz

Sweep: Auto

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

NAME OF TEST: Field Strength of Spurious Radiation**PARA. NO.: 2.1053****Minimum Standard:**

Para. No. 22.917(e). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least $43 + 10 \log P$. This is equivalent to -13 dBm absolute power.

Test Method:

The maximum field strength of the spurious emission is measured at a distance of 3 meters. The device under test is then replaced with a substitution antenna of known gain with respect to a $\frac{1}{4}$ wave dipole antenna. A calibrated signal source is used to feed the substitution antenna. The rf level to the substitution antenna is adjusted to repeat the previously measured field strength. The rf input level to the substitution antenna is the effective radiated power of the spurious emission after any correction for substitution antenna gain against a $\frac{1}{4}$ wave dipole.

The spectrum is searched to 10 GHz.

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

NAME OF TEST: Frequency Stability**PARA. NO.: 2.1055**

Minimum Standard: Para. No. 22.355. The transmitter carrier frequency shall remain within the tolerances given in Table C-1.

Table C-1

Freq. Range (MHz)	Base, fixed	Mobile > 3 W	Mobile $\leq$ 3 W
821 to 896	1.5	2.5	2.5

Method Of Measurement:Frequency Stability With Voltage Variation:

The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. The frequency counter and signal generator are phase locked with the same 10 MHz reference frequency by connecting the 10 MHz ref. out of the counter to the 10 MHz ref, in of the signal generator. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation:

The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.

Nemko Dallas

FCC PART 22, SUBPART H
CELLULAR BAND REPEATERS

EQUIPMENT: TFAH 80/85/19


Test Report No.: 4L0571RUS1

ANNEX B - TEST DIAGRAMS


EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Para. No. 2.1046 - R.F. Power Output

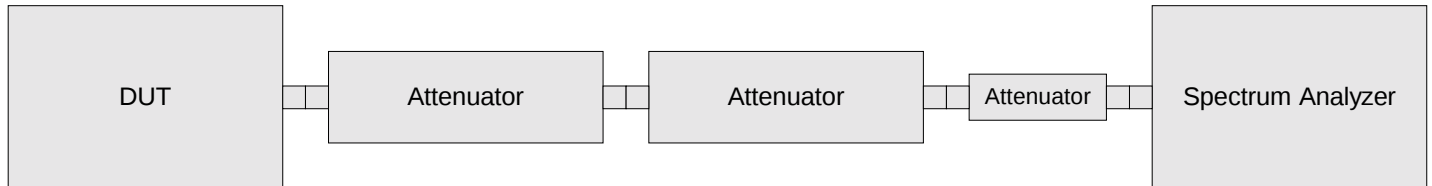


Para. No. 2.1049 - Occupied Bandwidth

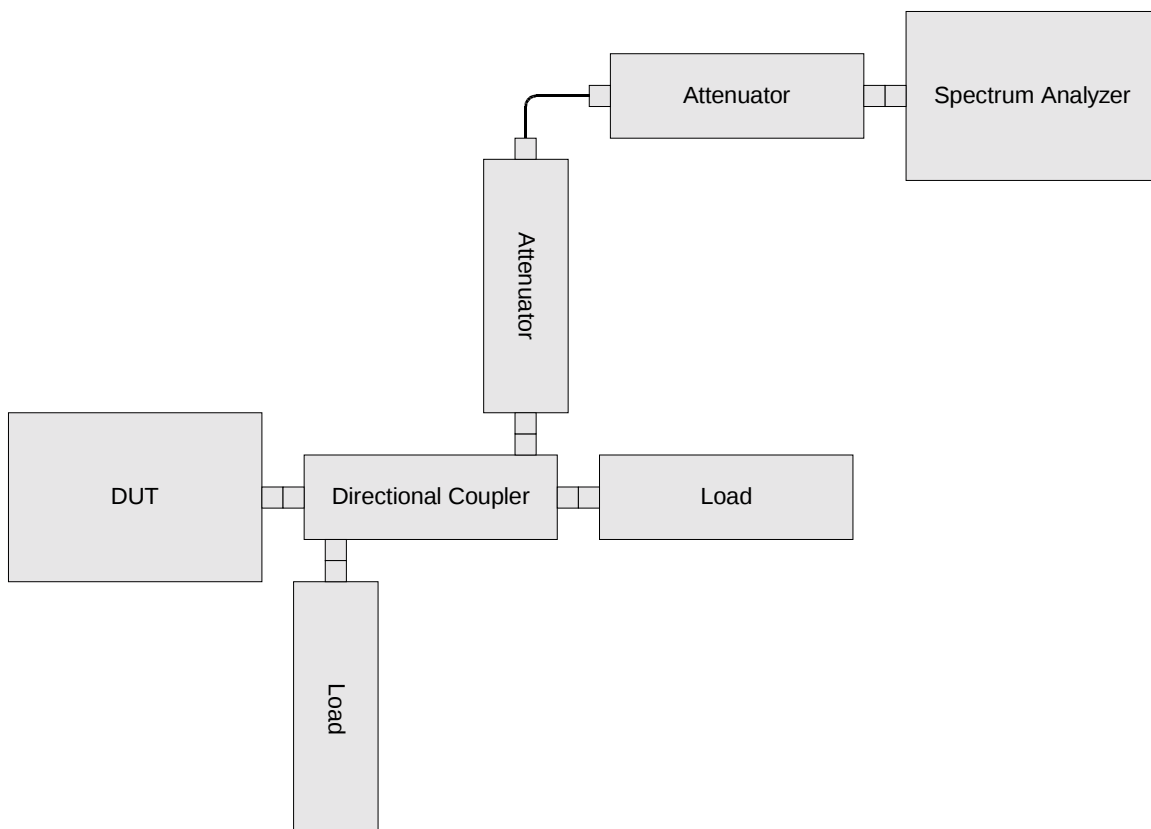


EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Para. No. 2.1051 Spurious Emissions at Antenna Terminals

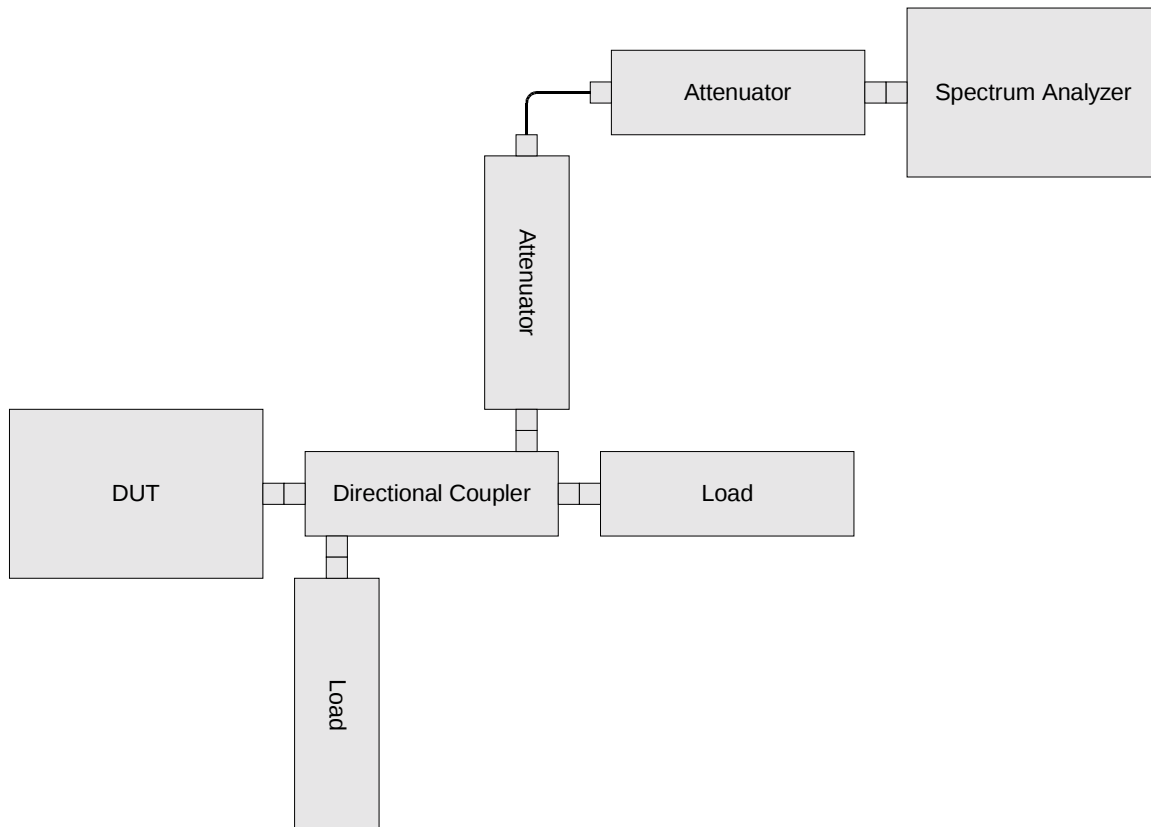


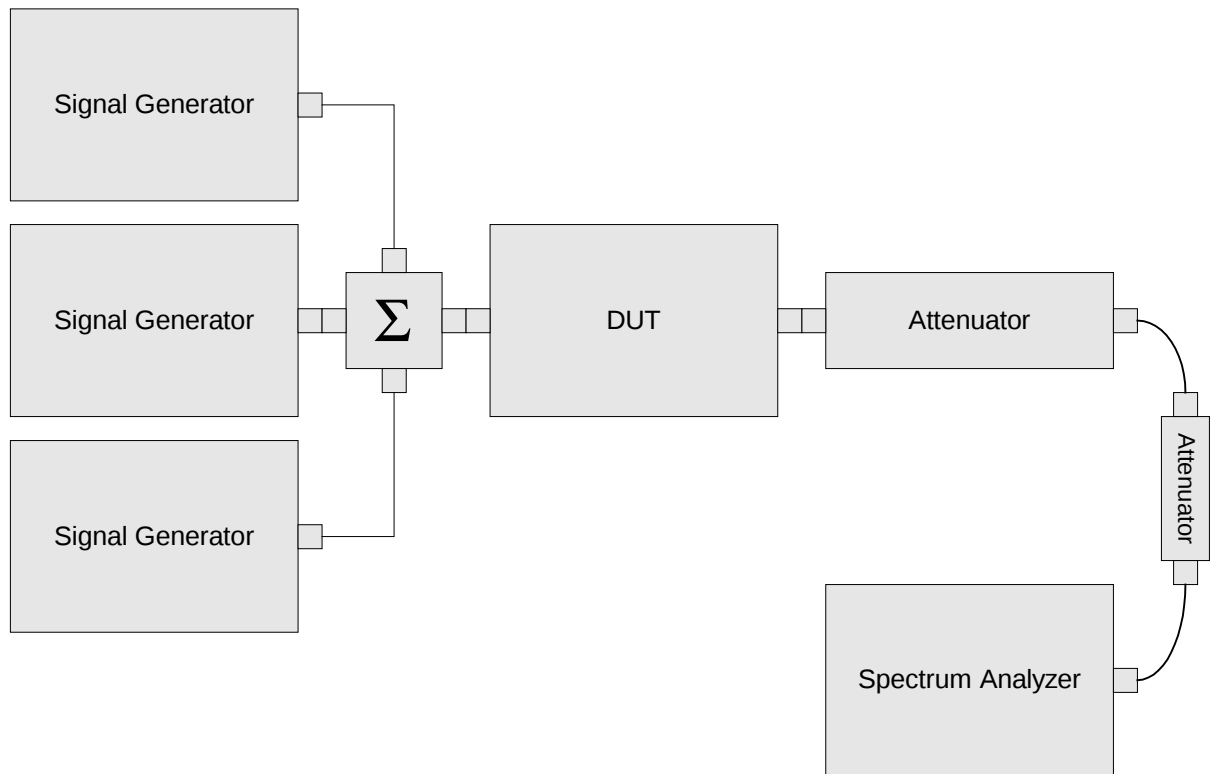


EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Para. No. 2.1053 - Field Strength of Spurious Radiation

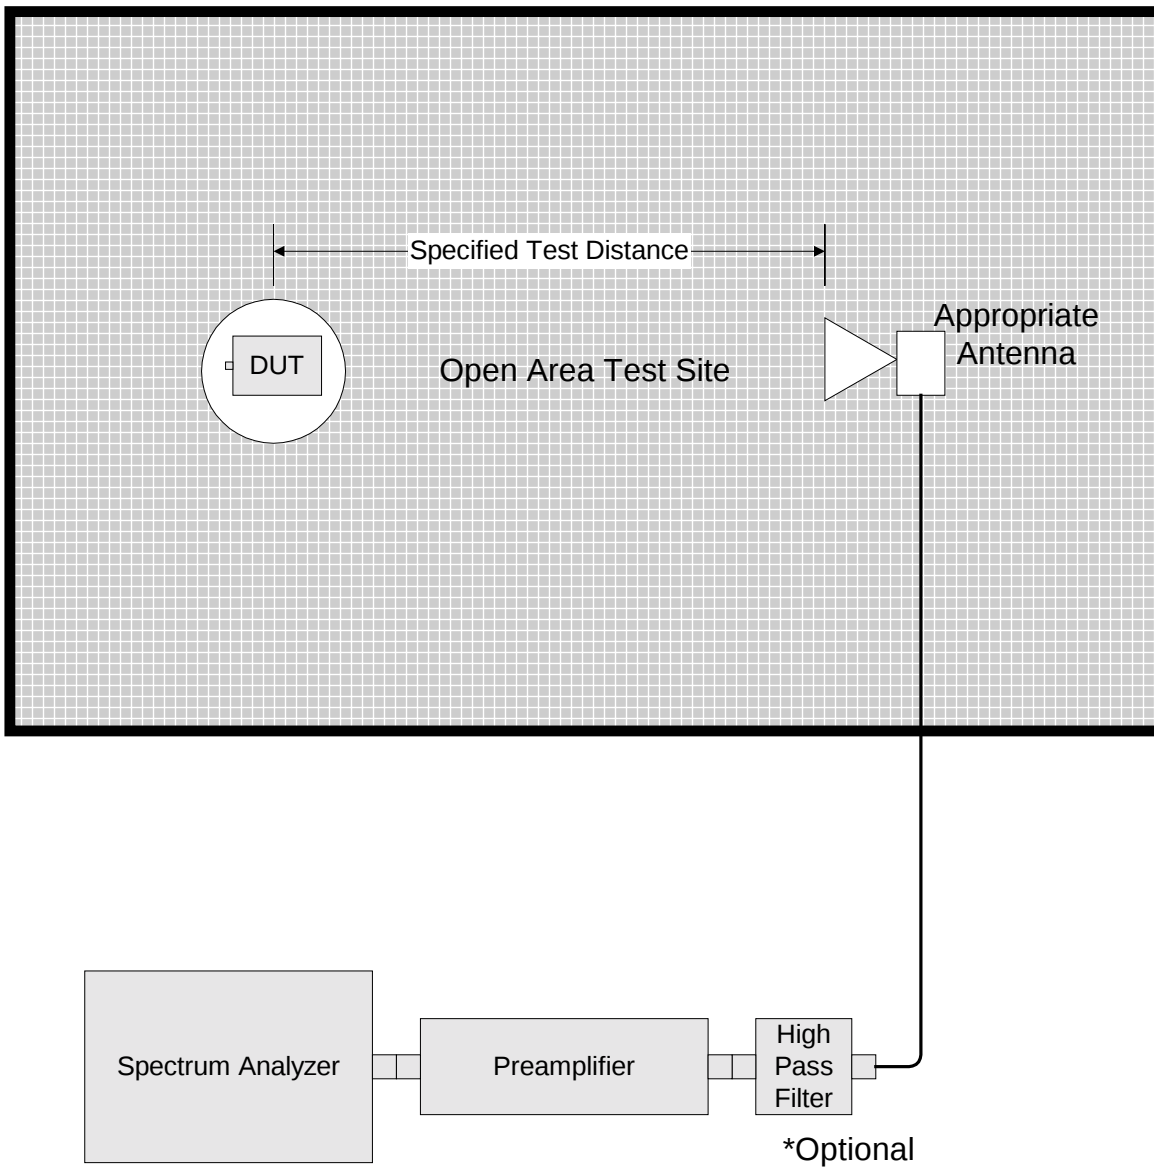

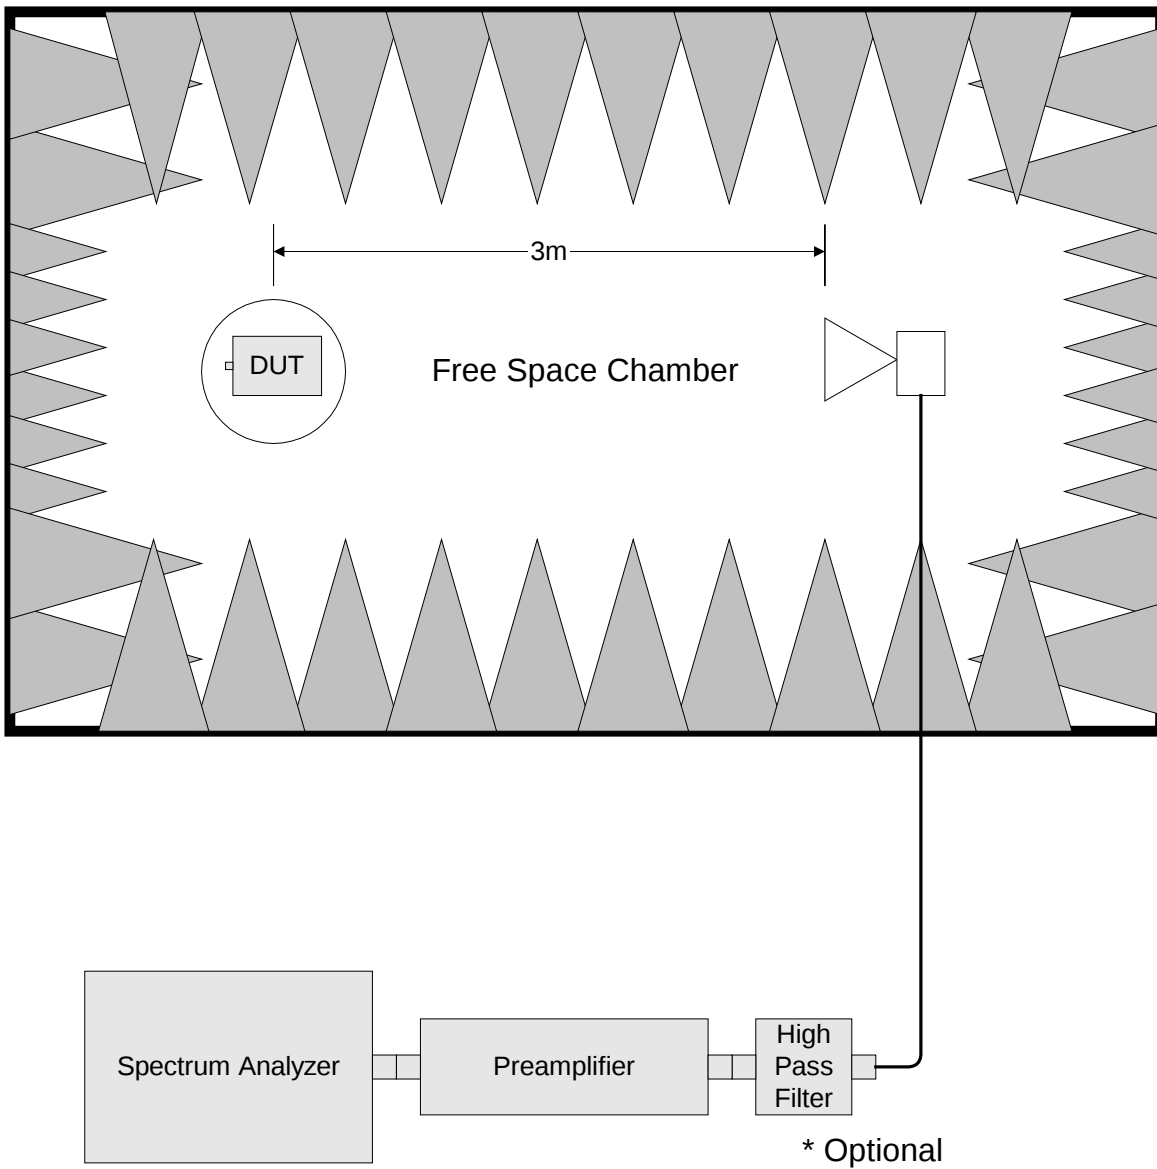

EQUIPMENT: TFAH 80/85/19

Test Report No.: 4L0571RUS1

Para. No. 2.1055 - Frequency Stability

