

Nemko Test Report: 4L0571RUS3

Applicant: Andrew Corporation
108 Rand Park Drive
Garner, NC 27529

Equipment Under Test: TFAH 80/85/19
(E.U.T.)

In Accordance With: **FCC Part 90, Subpart I**
Private Land Mobile Repeater

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, TX 75057-3136

Authorized By: 
Tom Tidwell, Frontline Group Manager

Date: 11/16/04

Total Number of Pages: 34

Table of Contents

Section 1.	Summary of Test Results.....	3
Section 2.	General Equipment Specification.....	5
Section 3.	RF Power Output.....	7
Section 4.	Occupied Bandwidth	8
Section 5.	Spurious Emissions at Antenna Terminals.....	13
Section 6.	Field Strength of Spurious Emissions	22
Section 7.	Test Equipment List	24
ANNEX A - TEST METHODOLOGIES		25
ANNEX B - TEST DIAGRAMS		31

EQUIPMENT: TFAH 80/85/19

Section 1. Summary of Test Results

Manufacturer: Andrew Corporation

Model No.: TFAH 80/85/19

Serial No.: 043003403

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 90, Subpart I.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. NONE

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
RF Power Output	90.205		Complies
Audio Frequency Response	TIA EIA-603.3.2.6	N/A	N/A
Audio Low-Pass Filter Response	TIA EIA-603.3.2.6	N/A	N/A
Modulation Limiting	TIA EIA-603.3.2.6	N/A	N/A
Occupied Bandwidth	90.210	Plots	Complies
Spurious Emissions at Antenna Terminals	90.210	Plots	Complies
Field Strength of Spurious Emissions	90.210		Complies
Frequency Stability	90.213		N/A
Transient Frequency Behavior	90.214	N/A	N/A

Footnotes For N/A's:

- (1) Since the E.U.T. does not contain modulation circuitry modulation testing was not performed.
- (2) Since the E.U.T. is not a keyed carrier system, Transient Frequency Behavior was not performed.

EQUIPMENT: TFAH 80/85/19

Section 2. General Equipment Specification

Supply Voltage Input: 115 Vac

Frequency Range: 851 to 869 MHz (Downlink only)

Tunable Bands: Full band coverage

Type(s) of Modulation:	F3E (Voice)	F1D	F2D	D7W (QAM)	Other
	☒	☒	☒	☒	☐

Output Impedance: 50 ohms

RF Power Output (rated):	Single:	2.5 Watts Analog – 631 mW iDEN
	Composite:	0.5 Watt Analog – 282 mW iDEN

Operator Selection of Operating Frequency: None

Power Output Adjustment Capability: None

Frequency Translation:	F1-F1	F1-F2	N/A
	☒	☐	☐


Band Selection:	Software	Duplexer Change	Fullband Coverage
	☐	☐	☒

EQUIPMENT: TFAH 80/85/19

Description of Operation

TFAH 80/58/19 is a fiber based tri-band repeater operating in the 800 MHz SMR, the 800 MHz cellular and the 1900 MHz PCS bands

System Diagram

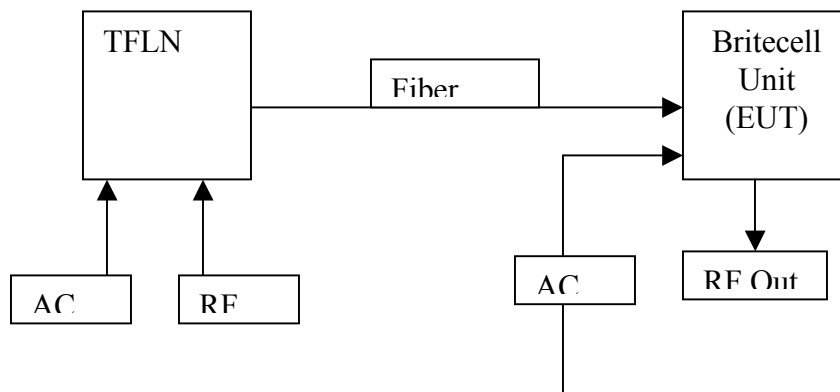

Section 3. RF Power Output

NAME OF TEST: RF Power Output	PARA. NO.: 2.985
TESTED BY: David Light	DATE: 8/30/04

Test Results: Complies.**Measurement Data:**

Modulation	Frequency (MHz)	Measured Power (dBm/Carrier)	Composite Power (dBm)
Analog	860	24	27
iDEN	860	21.5	24.5

Nemko Dallas

EQUIPMENT: TFAH 80/85/19

FCC PART 90, SUBPART I
PRIVATE LAND MOBILE REPEATER
Test Report No.: 4L0571RUS3

Section 4. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.989
TESTED BY: David Light	DATE: 8/30/04

Test Results: Complies.

Test Data: See attached graph(s).

EQUIPMENT: TFAH 80/85/19

Test Data – Occupied Bandwidth



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Data Plot

Page 1 of 4

Job No.: 4L0571

Specification: PT90

Tested By: David Light

E.U.T.:	PCS AMPLIFIER
---------	---------------

Configuration:	TX
----------------	----

Sample Number: 1

Location:	Lab 1
-----------	-------

Detector Type:	Peak
----------------	------

Date: 8/30/2004

Temperature(°C): 25

Relative Humidity(%)	40
----------------------	----

RBW: Refer to plots

VBW: Refer to plots

Complete X
Preliminary: _____

Preliminary: _____

Measurement
Distance: NA m

Test Equipment Used

Antenna: _____

Pre-Amp: _____

Filter: _____

Receiver: 1036

Attenuator #1	<u>1065</u>
---------------	-------------

Attenuator #2: 1604

Additional equipment used:

Directional Coupler: _____

Cable #1:	1629
-----------	------

Cable #2: _____


Cable #3: _____

Cable #4: _____

Mixer: _____

Additional equipment used:

Measurement Uncertainty: +/-1.7 dB

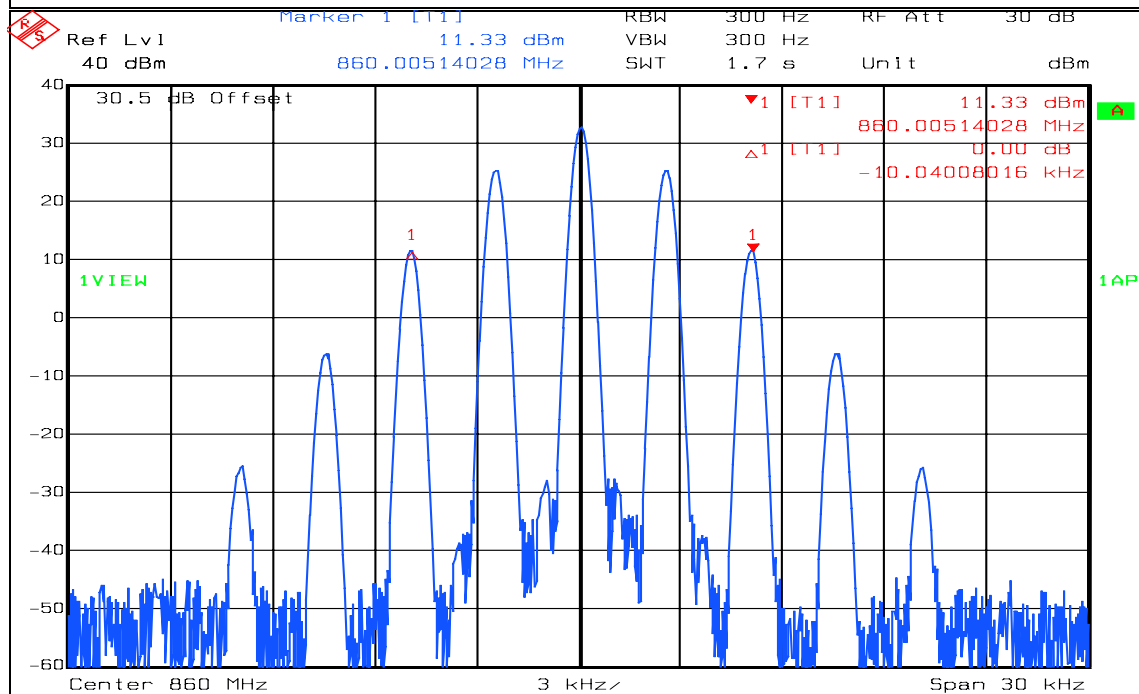

Date: 30.AUG.2004 13:51:28

Notes:

ANALOG OUTPUT

MAX POWER 34 dBm


2 kHz Tone - 2.5 kHz Deviation

Test Data – Occupied Bandwidth



Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

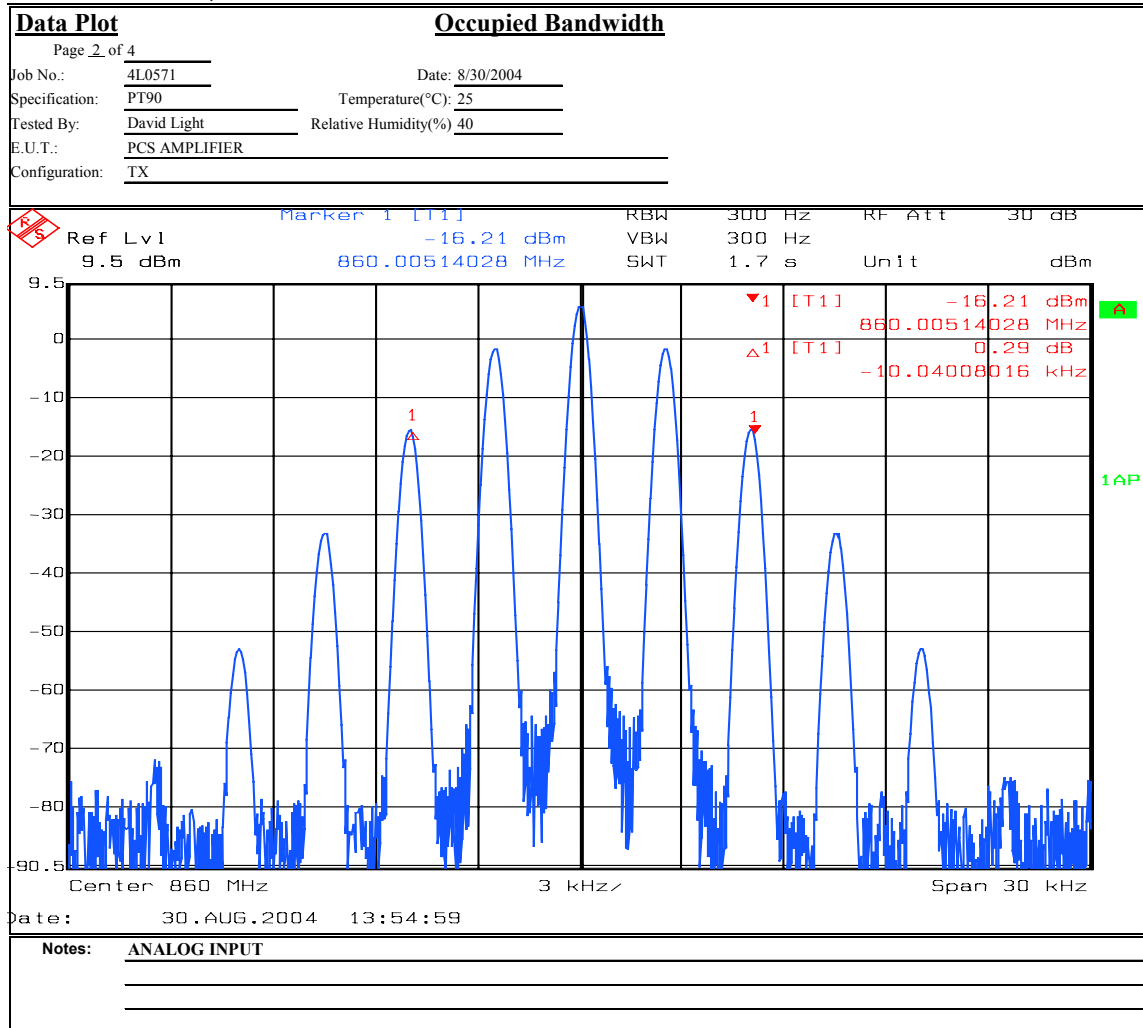

EQUIPMENT: TFAH 80/85/19

Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667


Nemko Dallas, Inc.

Data Plot

Page 3 of 4

Job No.:	4L0571	Date:	8/30/2004
Specification:	PT90	Temperature(°C):	25
Tested By:	David Light	Relative Humidity(%)	40
E.U.T.:	PCS AMPLIFIER		
Configuration:	TX		

Occupied Bandwidth

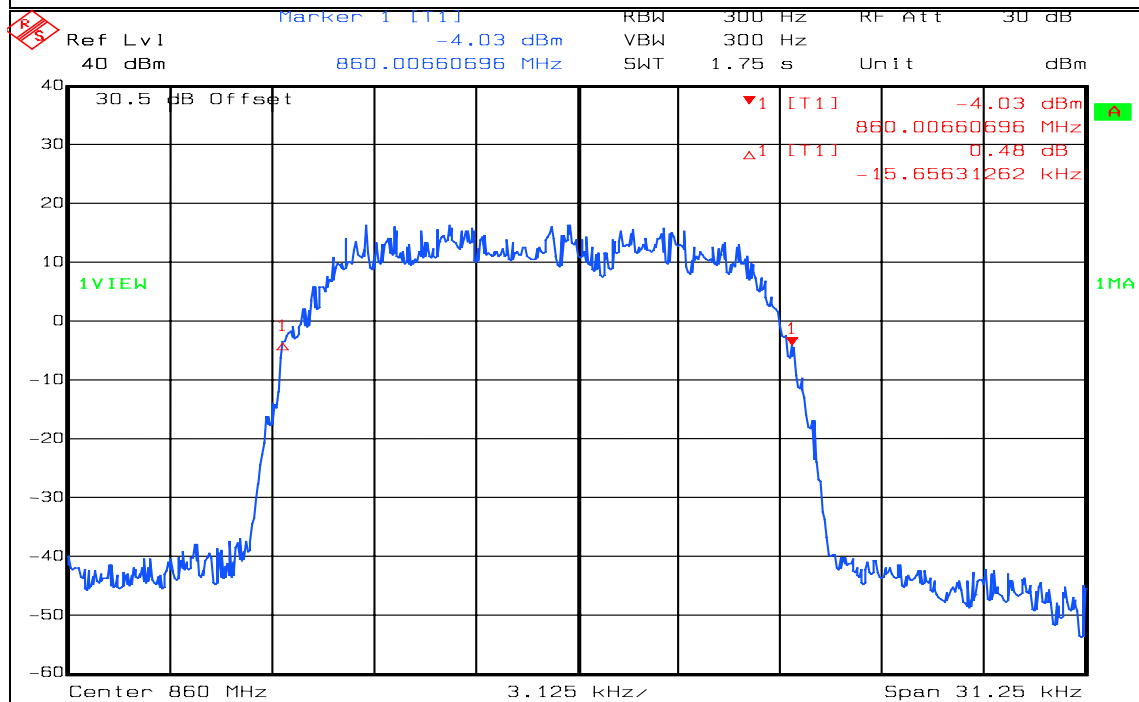

Date: 30.AUG.2004 14:14:48

Notes: iDEN Output
28 dBm


Test Data – Occupied Bandwidth



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

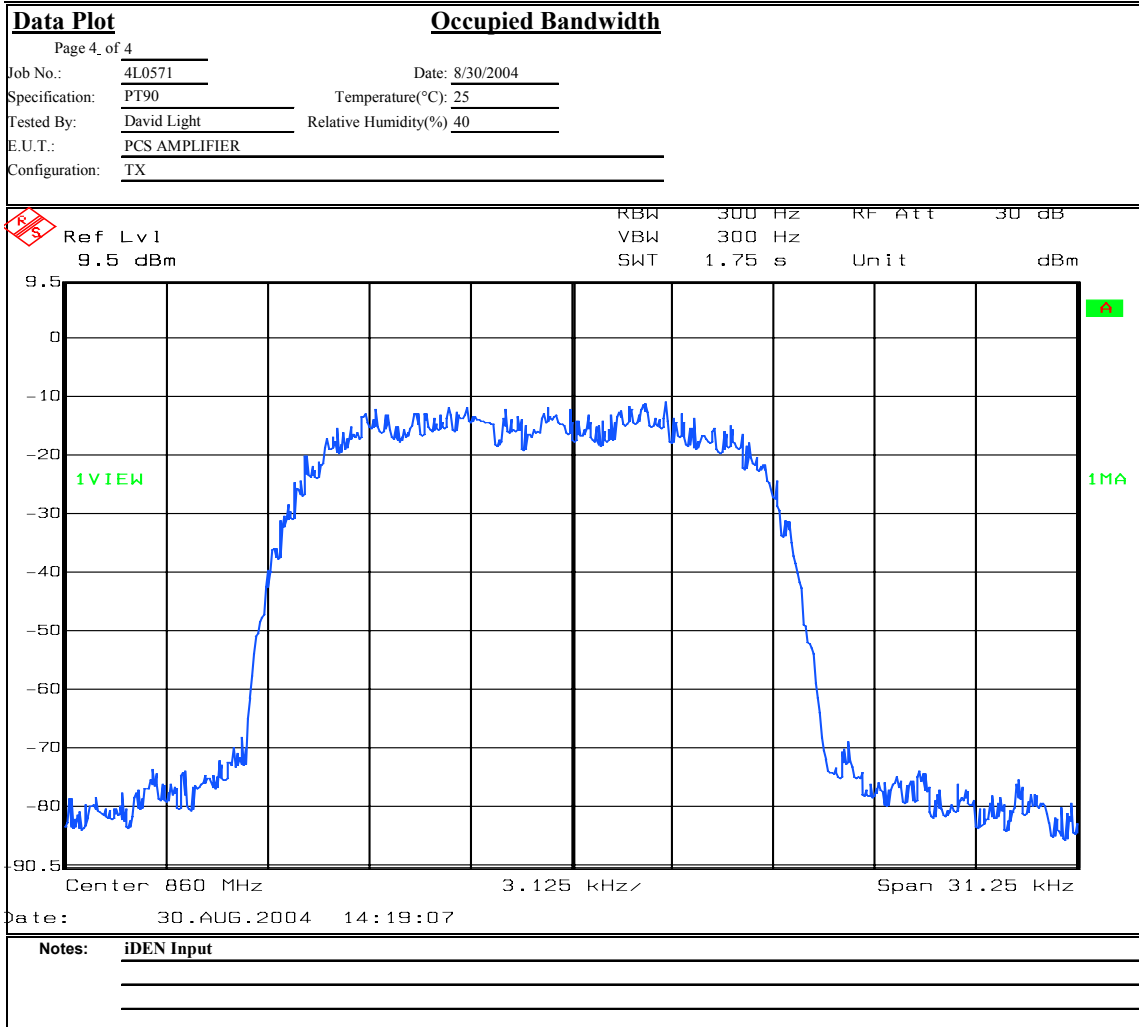

Nemko Dallas

FCC PART 90, SUBPART I
PRIVATE LAND MOBILE REPEATER
Test Report No.: 4L0571RUS3

EQUIPMENT: TFAH 80/85/19

Section 5. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA. NO.: 2.991
TESTED BY: David Light	DATE: 8/30/04

Test Results: Complies.

Test Data: See attached graph(s).

EQUIPMENT: TFAH 80/85/19

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot		Spurious Emissions at Antenna Terminals	
Page 1 of 6		Complete <u>X</u>	
Job No.: 4L0571	Date: 8/30/2004	Preliminary: _____	
Specification: PT90	Temperature(°C): 25		
Tested By: David Light	Relative Humidity(%): 40		
E.U.T.: SMR Band AMPLIFIER			
Configuration: TX			
Sample Number: 1			
Location: Lab 1	RBW: Refer to plots	Measurement	
Detector Type: Peak	VBW: Refer to plots	Distance: NA m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: 1629		
Filter: _____	Cable #2: _____		
Receiver: 1036	Cable #3: _____		
Attenuator #1: 1065	Cable #4: _____		
Attenuator #2: 1604	Mixer: _____		
Additional equipment used: _____			
Measurement Uncertainty: +/-1.7 dB			
Ref Lvl 1 24.04 dBm RBW 300 Hz RF Att 30 dB 40 dBm 851.14879760 MHz VBW 300 Hz Unit dBm 28 s			
Marker 2 [T1] 24.04 dBm 851.14879760 MHz 24.13 dBm 851.01252505 MHz			
LIMIT CHECK : PASSED 1VIEW 1MA LOBNDG Center 851 MHz 50 kHz Span 500 kHz			
Date: 30.AUG.2004 14:04:36			
Notes: LOWER BAND EDGE 2 CHANNELS AT 24 dBm EACH ANALOG			


EQUIPMENT: TFAH 80/85/19

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

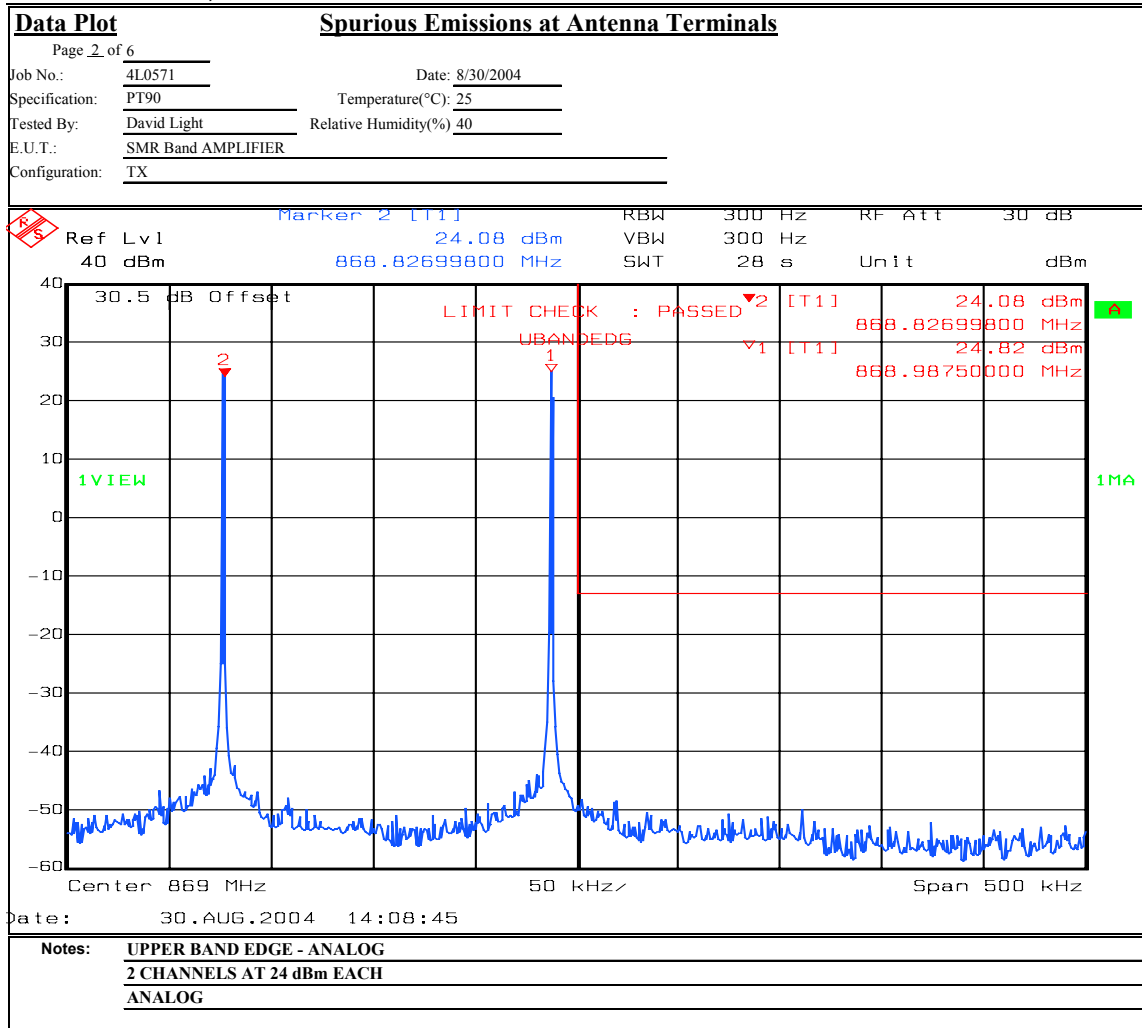


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

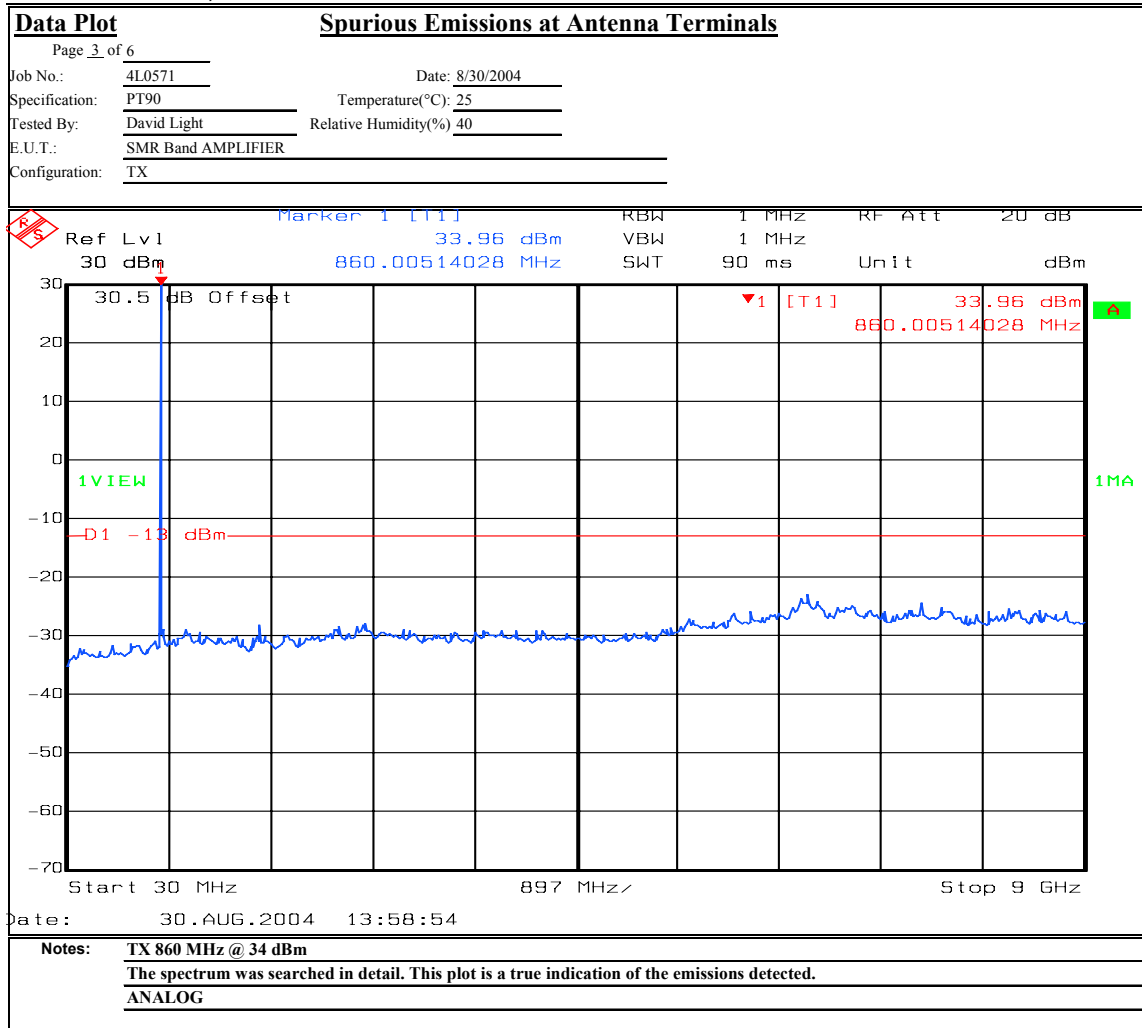


EQUIPMENT: TFAH 80/85/19

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

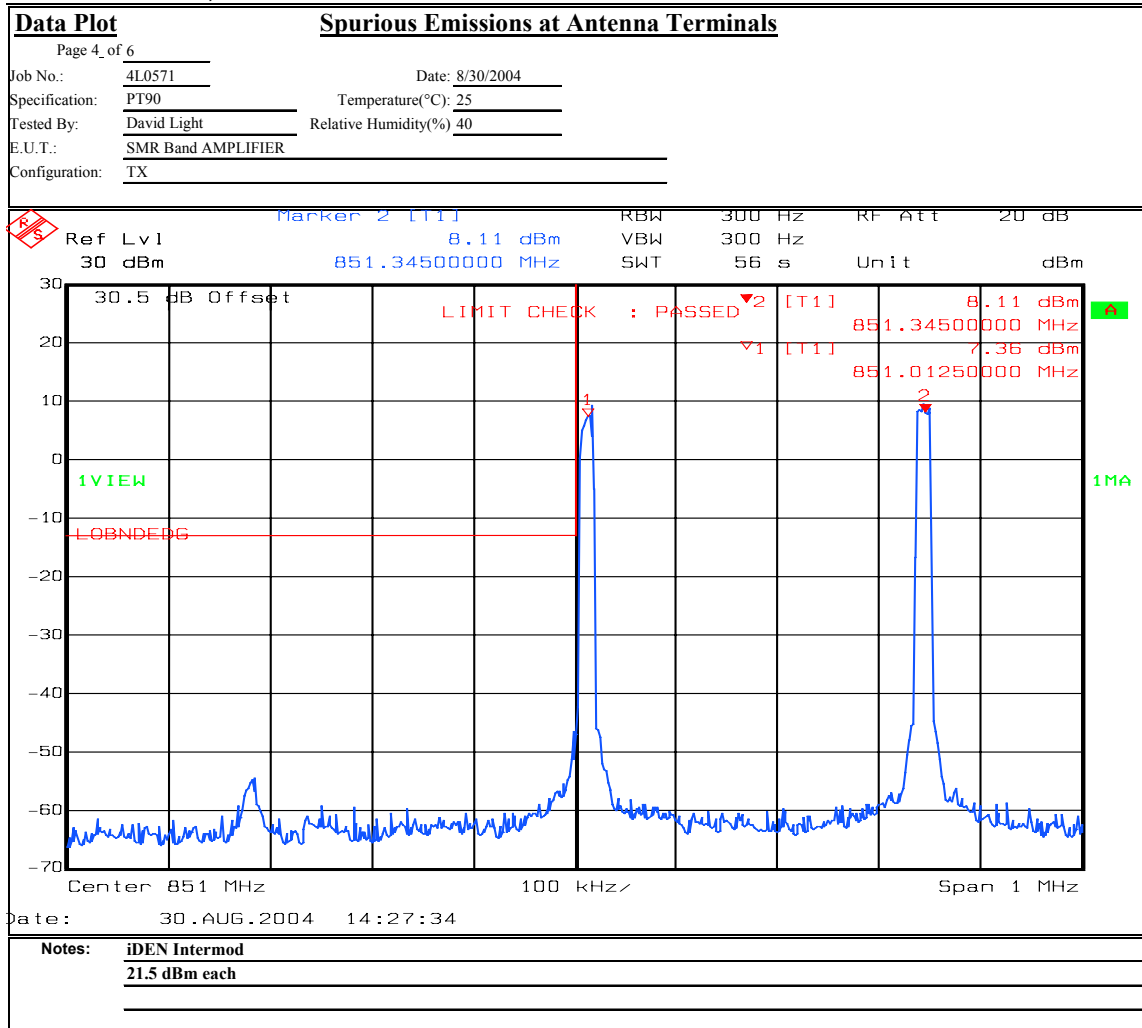


EQUIPMENT: TFAH 80/85/19

Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

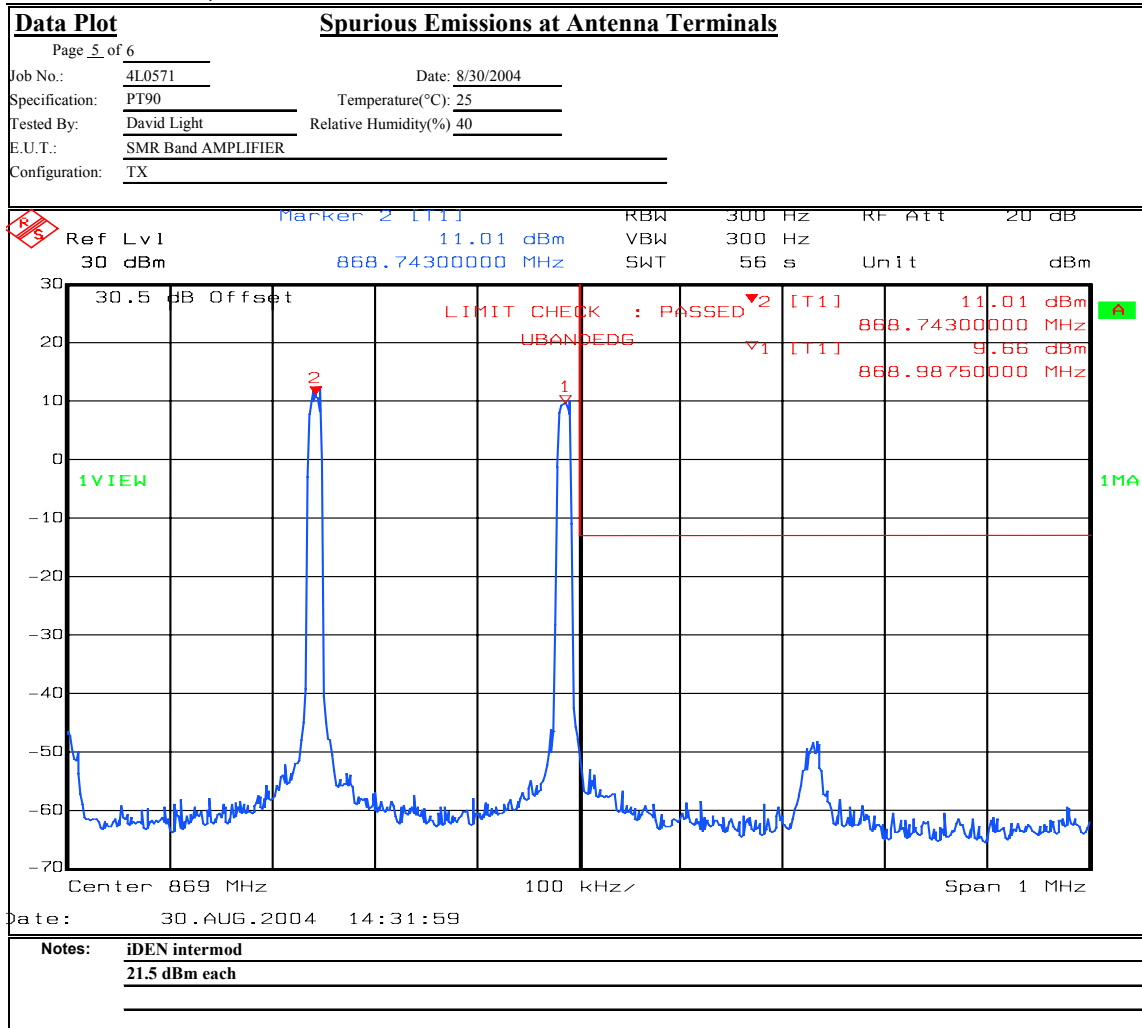


Test Data – Spurious Emissions at Antenna Terminals



Dallas Headquarters:
802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

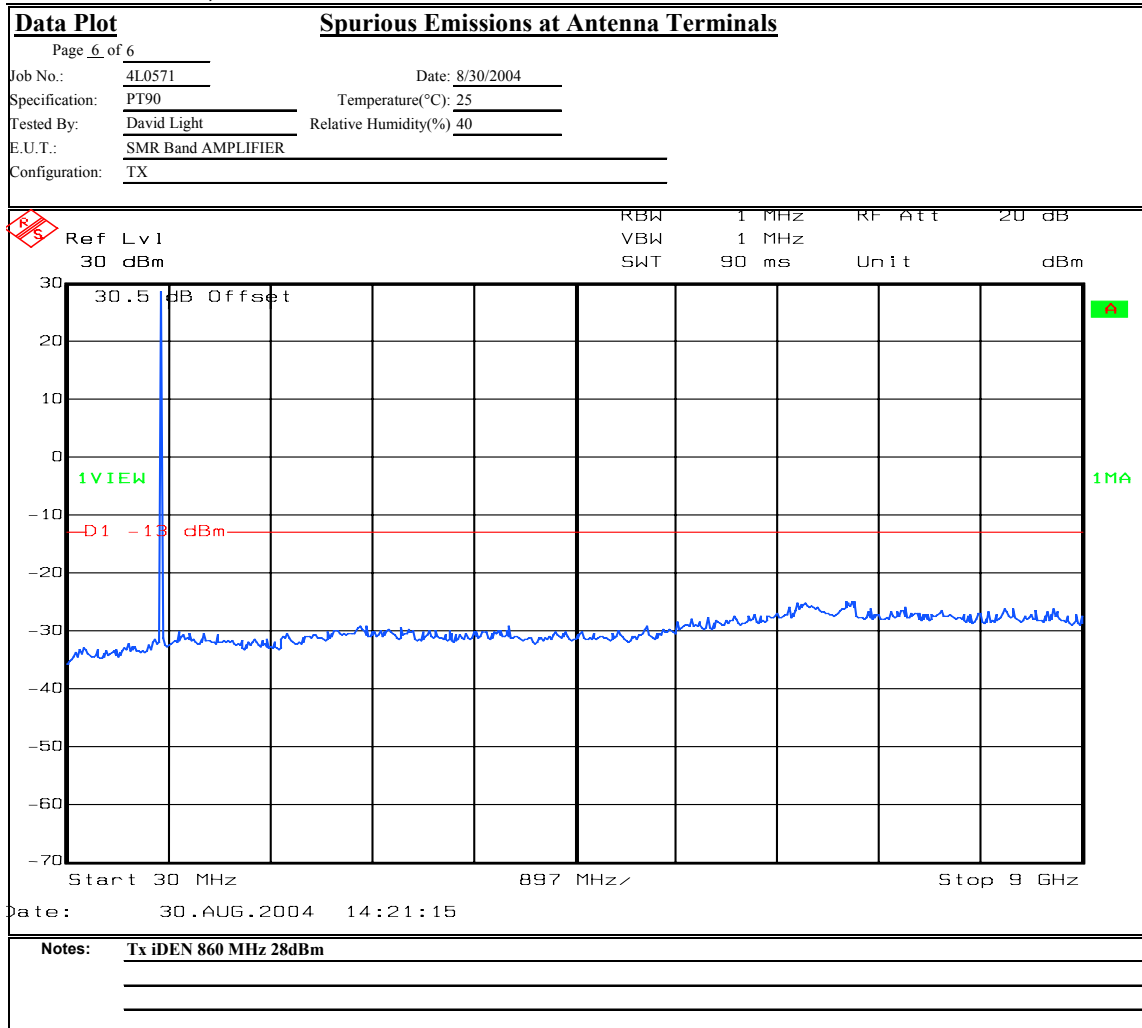


MASK

Analog



Ref Lvl
25 dBm

RBW 500 Hz RF Att 30 dB
VBW 500 Hz
SWT 1 s Unit dBm

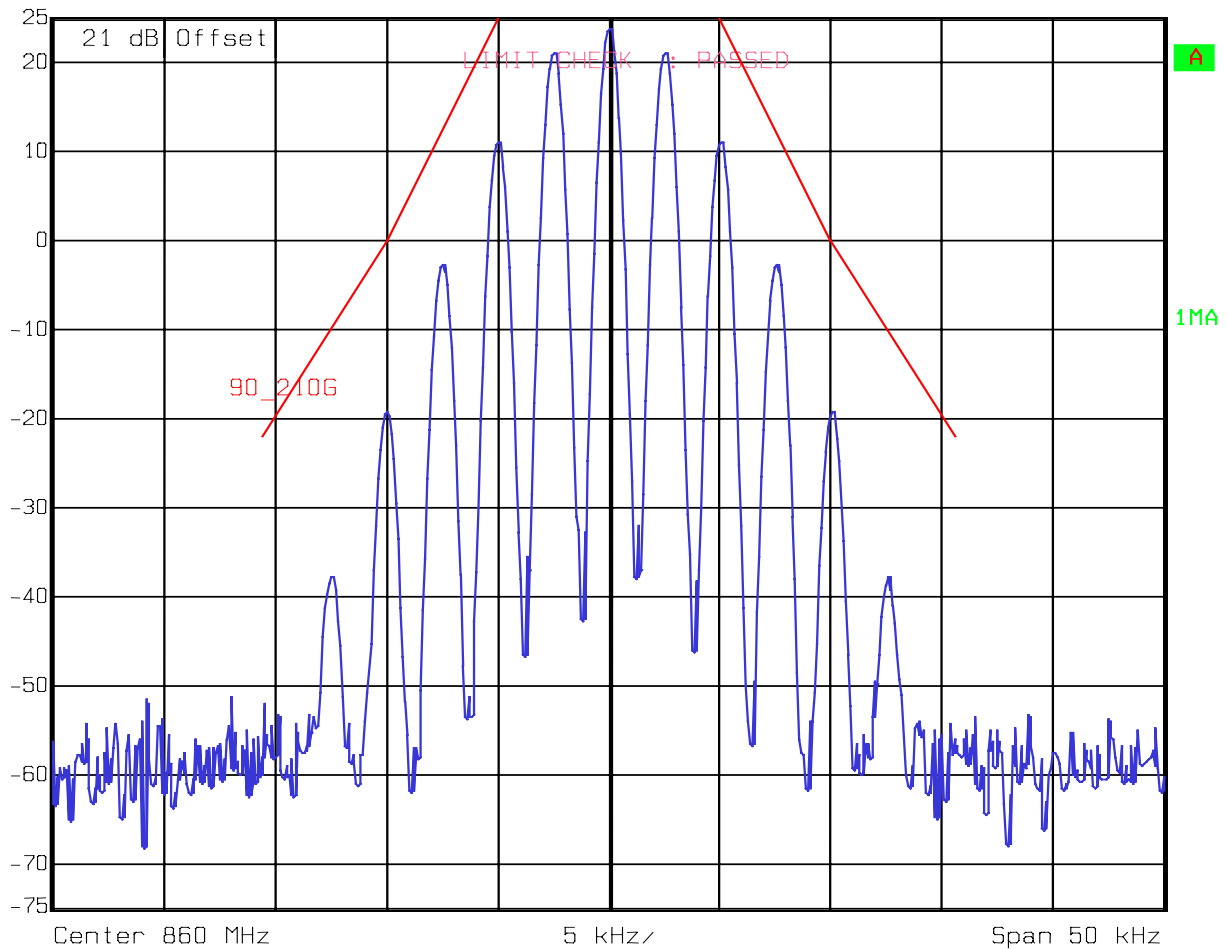


Date: 16.NOV.2004 11:23:32

iDEN



Ref Lvl
21.5 dBm

RBW 500 Hz RF Att 20 dB
VBW 500 Hz
SWT 1.55 s Unit dBm

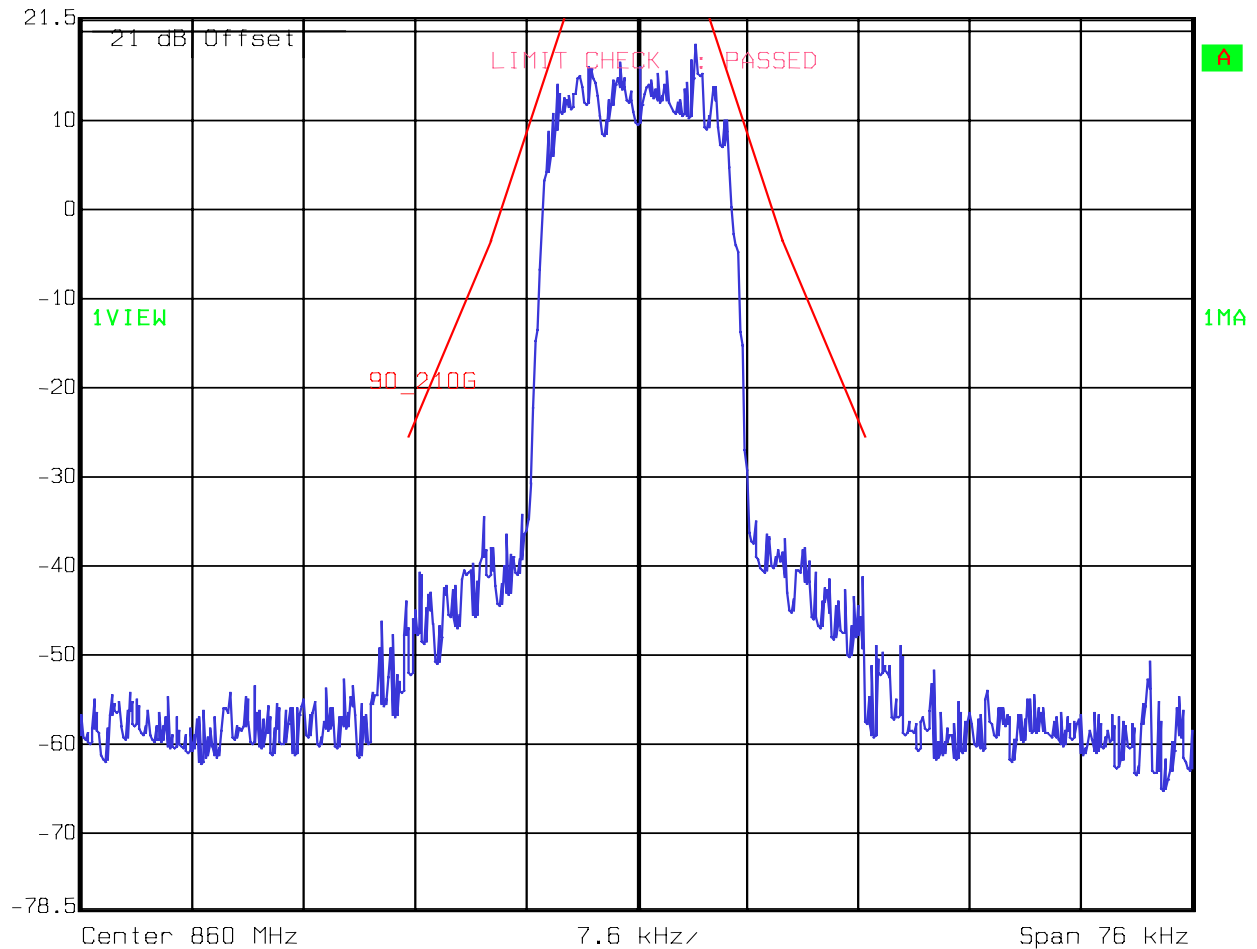

Date: 16.NOV.2004 11:00:17

EQUIPMENT: TFAH 80/85/19

Section 6. Field Strength of Spurious Emissions

NAME OF TEST: Field Strength of Spurious Emissions	PARA. NO.: 2.993
TESTED BY: Brian Boyea	DATE: 8/31/04

Test Results: Complies.

Test Data: There were no emissions detected within 20 dB of the specification of -13 dBm. The spectrum was searched to the 10th harmonic of the carrier (860 MHz) with the amplifier operating at full rated power.

Equipment Used: [1304-1016-1464-1484-1485](#)



Measurement Uncertainty: +/- [1.7](#) dB

Temperature: [25](#) °C

Relative Humidity: [40](#) %

Note: See page A5 for applicable limit.

Photographs of Test Setup

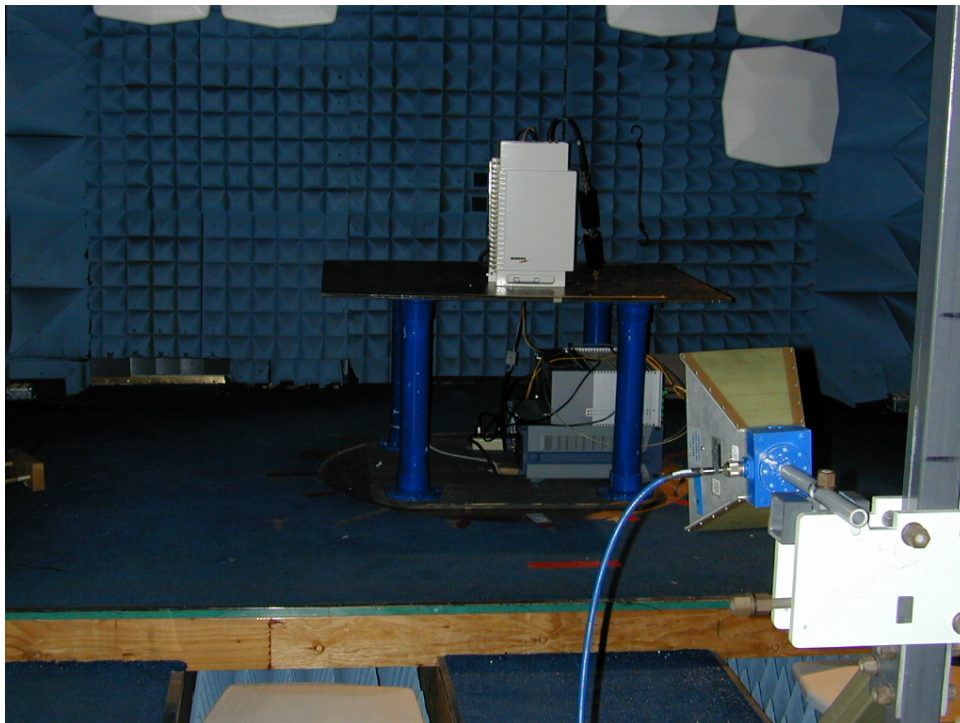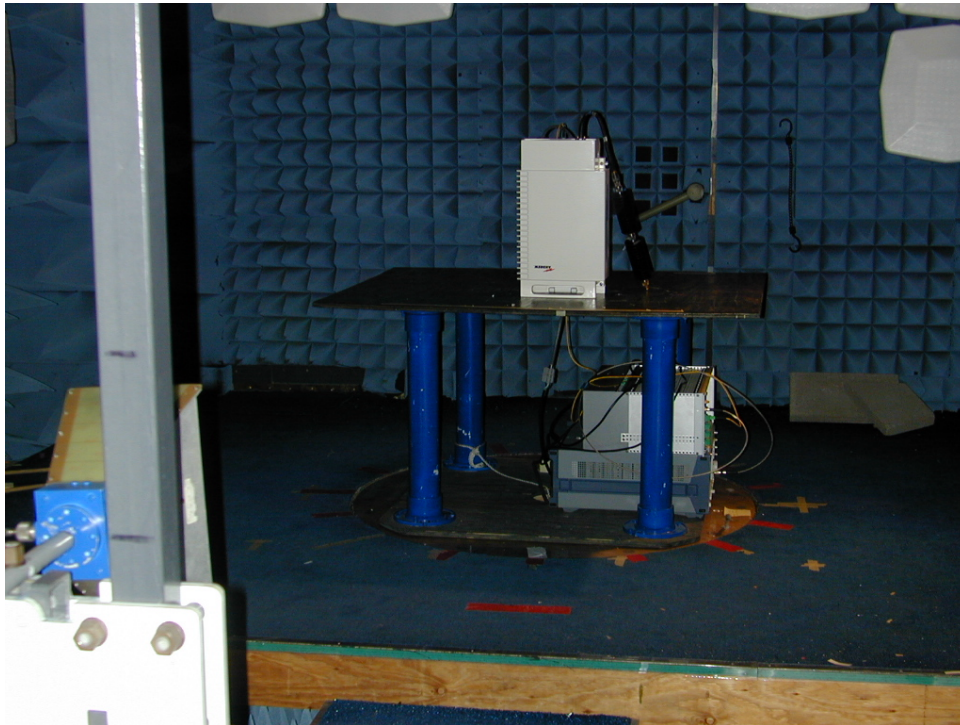

Section 7. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	10/27/03	10/26/04
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	07/30/04	07/31/06
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	08/26/04	08/26/05
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	08/02/04	08/02/05
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	09/22/03	09/22/05
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	03/22/04	03/23/06
1065	ATTENUATOR	NARDA 776B-10	NONE	CBU	N/A
1604	ATTENUATOR	NARDA 776B-20	NONE	N/A	N/A
1629	CABLE, 6 ft	MEGAPHASE 10311 1GVT4	N/A	CBU	N/A

Nemko Dallas

EQUIPMENT: TFAH 80/85/19

FCC PART 90, SUBPART I
PRIVATE LAND MOBILE REPEATER
Test Report No.: 4L0571RUS3

ANNEX A - TEST METHODOLOGIES

*EQUIPMENT: TFAH 80/85/19***NAME OF TEST: RF Power Output****PARA. NO.: 2.985**

Minimum Standard: Para. No. 90.205(a). The maximum allowable station ERP is dependent upon the stations HAAT and required service area and will be authorized in accordance with Table 1 of 90.205(d).

Method Of Measurement:Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter. Power output is measured with the maximum rated input level.

Integral Antenna:

If the antenna is not detachable from the circuit then the Peak Power Output is derived from the peak radiated field strength of the fundamental emission by using the plane wave relation $GP/4\pi R^2 = E^2/120\pi$ and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent isotropic radiated power in watts

E = the maximum measured field strength in V/m

R = the measurement range (3 meters)

G = the numeric gain of the transmit antenna in relation to an isotropic radiator

EQUIPMENT: TFAH 80/85/19

NAME OF TEST: Spurious Emissions at Antenna Terminals	PARA. NO.: 2.991
--	-------------------------

Test Method: RBW: 1% of emission bandwidth in the 0 - 1 GHz range.
1 MHz at frequencies above 1 GHz.

VBW: $\Rightarrow$ RBW

The spectrum is searched up to 10 times the fundamental frequency.

EQUIPMENT: TFAH 80/85/19

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.989
---	-------------------------

Minimum Standard: Para. No. 90.210, see table 1 below for applicable mask.

Table 1

Frequency Band (MHz)	Mask for equipment with Low Pass Filter	Mask for equipment without Low Pass Filter
Below 25	A or B	A or C
25 - 50	B	C
72 - 76	B	C
150 - 174	B, D or E	C, D or E
150 Paging only	B	C
220 - 222	F	F
421 - 512	B, D or E	C, D or E
450 paging only	B	H
806 - 821/ 851 - 866	B	G
821 - 824/ 866 - 869	B	H
896 - 901/ 935 - 940	I	J
902 - 928	K	K
929 - 930	B	G
Above 940	B	C
All other bands	B	C

NAME OF TEST: Field Strength of Spurious	PARA. NO.: 2.993
---	-------------------------

Minimum Standard: Para. No. 90.210, see table 1 for applicable mask.

Test Method:

The maximum field strength of the spurious emission is measured at a distance of 3 meters. The device under test is then replaced with a substitution antenna of known gain with respect to a $\frac{1}{4}$ wave dipole antenna. A calibrated signal source is used to feed the substitution antenna. The rf level to the substitution antenna is adjusted to repeat the previously measured field strength. The rf input level to the substitution antenna is the effective radiated power of the spurious emission after any correction for substitution antenna gain against a $\frac{1}{4}$ wave dipole.

The spectrum was searched up to the 10th harmonic of the highest frequency generated in the device.

NAME OF TEST: Frequency Stability**PARA. NO.: 2.995**

Minimum Standard: Para. No. 990.213. The transmitter carrier frequency shall remain within the assigned frequency below in ppm.

Table 2

Frequency Band (MHz)	Fixed And Base Stations	Mobile Stations	
		> 2 Watts o/p pwr	< 2 Watts o/p pwr
Below 25	100	100	200
25 - 50	20	20	50
72 - 76	5	-	50
150 - 174	5	5	5
220 - 222	0.1	1.5	1.5
421 - 512	2.5	5	5
806 - 821	1.5	2.5	2.5
821 - 824	1.0	1.5	15
851 - 866	1.5	2.5	2.5
866 - 869	1.0	1.5	1.5
869 - 901	0.1	1.5	1.5
902 - 928	2.5	2.5	2.5
929 - 930	1.5	-	-
935 - 940	0.1	1.5	1.5
1427 - 1435	300	300	300
Above 2450	-	-	-

Nemko Dallas


EQUIPMENT: TFAH 80/85/19

FCC PART 90, SUBPART I
PRIVATE LAND MOBILE REPEATER
Test Report No.: 4L0571RUS3


ANNEX B - TEST DIAGRAMS

EQUIPMENT: TFAH 80/85/19

Para. No. 2.985 - R.F. Power Output

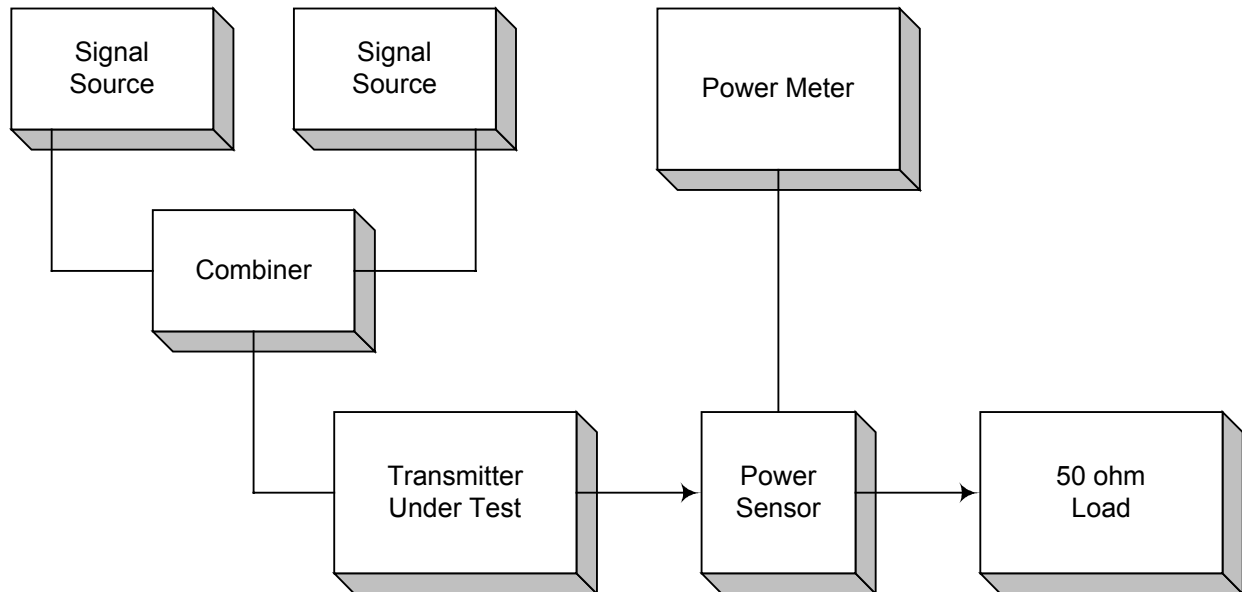


Para. No. 2.989 - Occupied Bandwidth

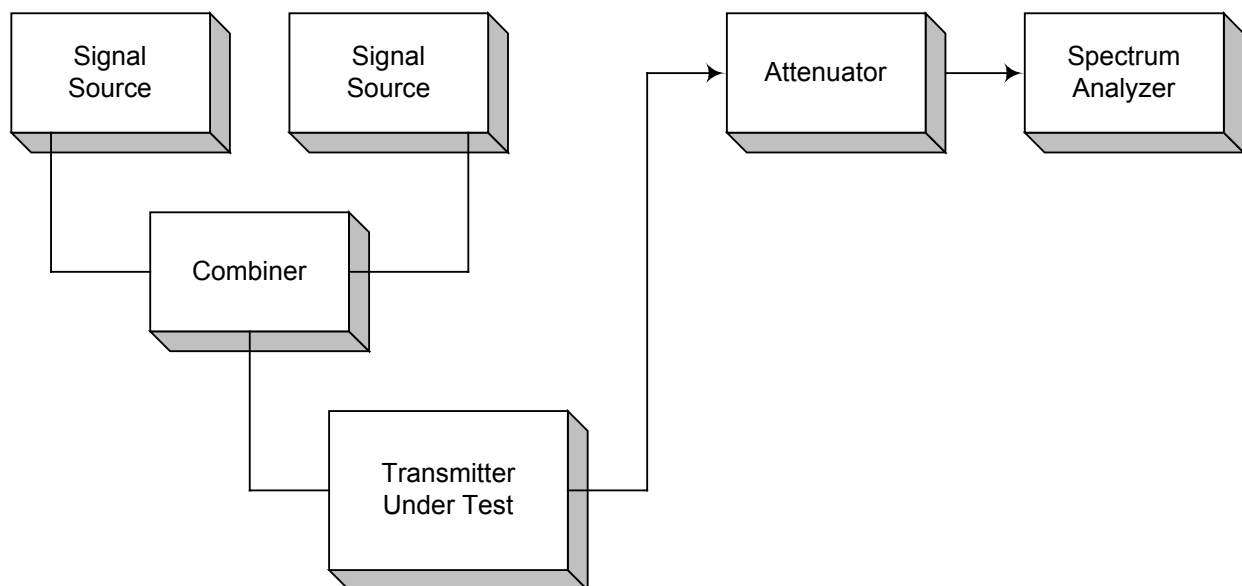


EQUIPMENT: TFAH 80/85/19

Para. No. 2.991 - Spurious Emissions at Antenna Terminals

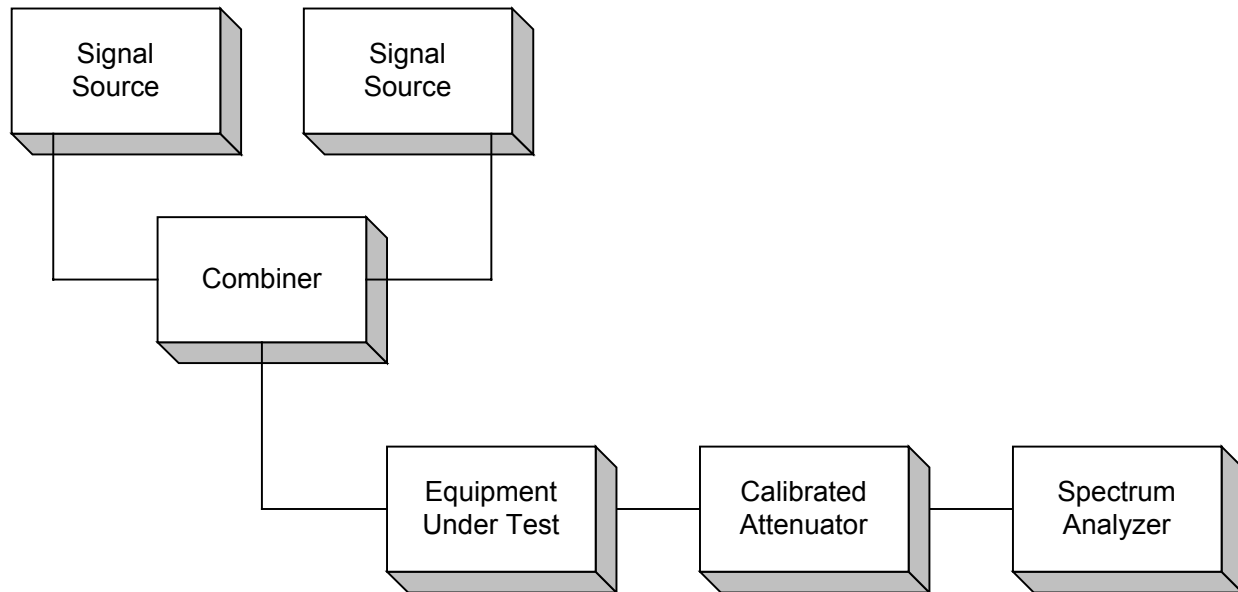

Para. No. 2.993 - Field Strength of Spurious Radiation

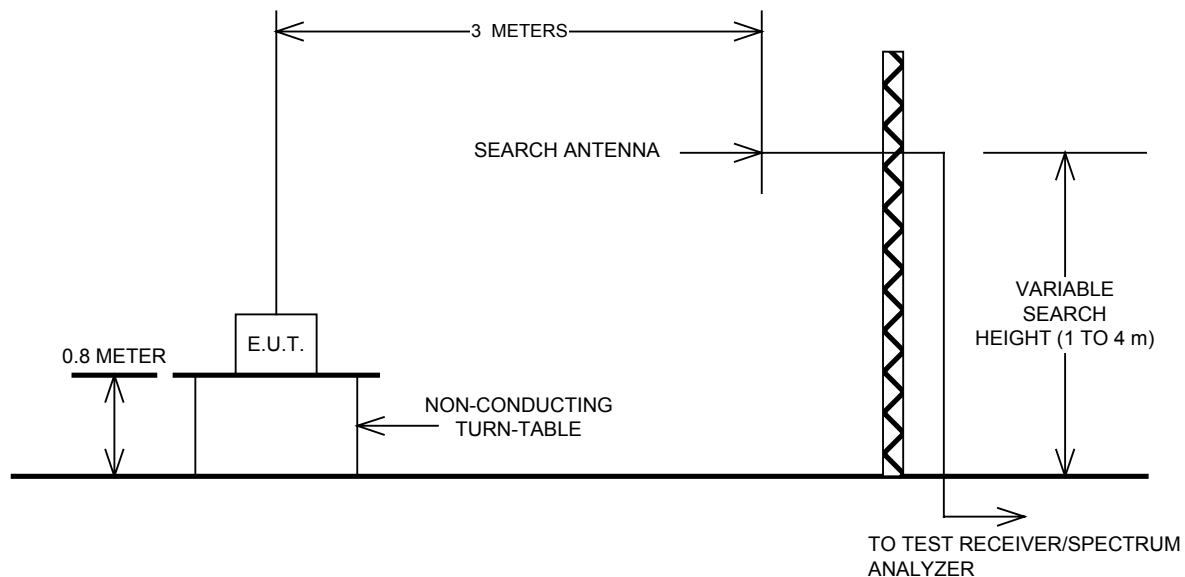

Para. No. 2.995 - Frequency Stability

