



Nemko Test Report: 12249RUS2

Applicant: Andrew Corporation
108 Rand Park Drive
Garner, NC 27529
USA

**Equipment Under Test:
(E.U.T.)** ION-B TFAH-US85/19

In Accordance With: **CFR 47, Part 24, Subpart E**
Broadband PCS Repeaters

Tested By: Nemko USA, Inc.
802 N. Kealy
Lewisville, TX 75057-3136

TESTED BY:

David Light, Senior Wireless Engineer

DATE

: 14 April, 2008

APPROVED BY:

Mike Cantwell, Frontline Manager

DATE

: 21 April, 2008

Number of Pages: 41

Table of Contents

| | | |
|--------------------------------|--|-----------|
| SECTION 1. | SUMMARY OF TEST RESULTS | 3 |
| SECTION 2. | GENERAL EQUIPMENT SPECIFICATION | 5 |
| SECTION 3. | RF POWER OUTPUT | 7 |
| SECTION 4. | OCCUPIED BANDWIDTH | 8 |
| SECTION 5. | SPURIOUS EMISSIONS AT ANTENNA TERMINALS | 17 |
| SECTION 6. | FIELD STRENGTH OF SPURIOUS | 30 |
| SECTION 7. | TEST EQUIPMENT LIST | 31 |
| ANNEX A - TEST DETAILS | | 32 |
| ANNEX B - TEST DIAGRAMS | | 38 |

EQUIPMENT: ION-B TFAH-US85/19

Section 1. Summary of Test Results

Manufacturer: Andrew Corporation
Model No.: ION-B TFAH-US85/19
Serial No.: 074605735

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with CFR 47, Part 24, Subpart E.

| | | | |
|-------------------------------------|----------------------------|-------------------------------------|---------------------|
| <input checked="" type="checkbox"/> | New Submission | <input checked="" type="checkbox"/> | Production Unit |
| <input type="checkbox"/> | Class II Permissive Change | <input type="checkbox"/> | Pre-Production Unit |

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

| NAME OF TEST | PARA. NO. | SPEC. | RESULT |
|--|--------------|---------------------|----------|
| RF Power Output | 24.232 | 100W | Complies |
| Occupied Bandwidth | 2.1049 | Input/Output | Complies |
| Spurious Emissions at Antenna Terminals | 24.238(a) | -13 dBm | Complies |
| Field Strength of Spurious Emissions | 24.238(a) | -13 dBm E.I.R.P. | Complies |
| Frequency Stability | 24.235 | | NA |


Footnotes:

Section 2. General Equipment Specification

| | | | | | |
|---|------------------|--------------------------------------|---|--|-----------------------|
| Supply Voltage Input: | | 120 Vac | | | |
| Frequency Range: | Downlink: | 869 to 894 MHz 1930 to 1995 MHz | | | |
| Frequency Range: | Uplink: | NA | | | |
| Type of Modulation and Designator: | | CDMA (G7W) | GSM (GXW) | EDGE (G7W) | AMPS (F8W, F1D) |
| Output Impedance: | | 50 ohms | | | |
| RF Output (Rated): | Downlink | 31 dBm (1.26 Watts) | | | |
| RF Output (Rated): | Uplink | NA | | | |
| Frequency Translation: | | F1-F1 <input type="checkbox"/> | F1-F2 <input type="checkbox"/> | N/A <input checked="" type="checkbox"/> | |
| Band Selection: | | Software <input type="checkbox"/> | Duplexer Change <input type="checkbox"/> | Fullband Coverage <input checked="" type="checkbox"/> | |

Description of EUT

The TFAH-US85/19 is a dual band high power remote unit designed to distribute Cellular850 and PCS1900 band signals along the same fiber.

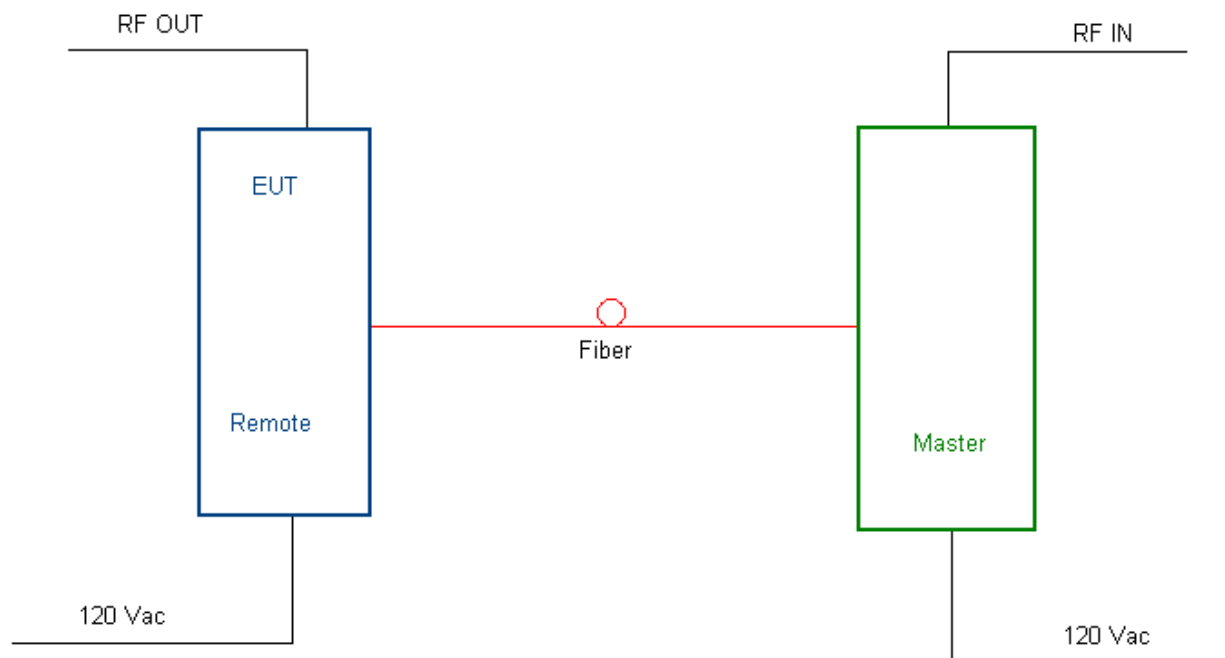System Diagram

Section 3. RF Power Output

| | |
|-------------------------------|---------------------|
| NAME OF TEST: RF Power Output | PARA. NO.: 24.232 |
| TESTED BY: David Light | DATE: 14 April 2008 |

Test Results: Complies.**Measurement Data:**

| | Modulation | Output per Channel (dBm) | Composite Power (dBm) | Composite Power (W) |
|--|------------|--------------------------|-----------------------|---------------------|
| | CDMA | 27 | 30 | 1.0 |
| | EDGE | 28 | 31 | 1.26 |
| | GSM | 28 | 31 | 1.26 |
| | W-CDMA | 25 | 28 | 0.631 |

Equipment Used: 1036-1082-1472-1469***Measurement Uncertainty:** +/- 1.7 dB**Temperature:** 22 °C**Relative Humidity:** 32 %

Section 4. Occupied Bandwidth

| | |
|----------------------------------|---------------------|
| NAME OF TEST: Occupied Bandwidth | PARA. NO.: 24.238 |
| TESTED BY: David Light | DATE: 14 April 2008 |

Test Results: Complies.

Test Data: See attached plot(s).

Equipment Used: 1036-1082-1472-1469

Measurement Uncertainty: 1X10⁻⁷ ppm

Temperature: 22 °C

Relative Humidity: 32 %

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Occupied Bandwidth

CDMA - Output



Ref Lvl
40 dBm

| | | | |
|-----|---------|--------|---------|
| RBW | 30 kHz | RF Att | 30 dB |
| VBW | 300 kHz | Mixer | -10 dBm |
| SWT | 3 s | Unit | dBm |

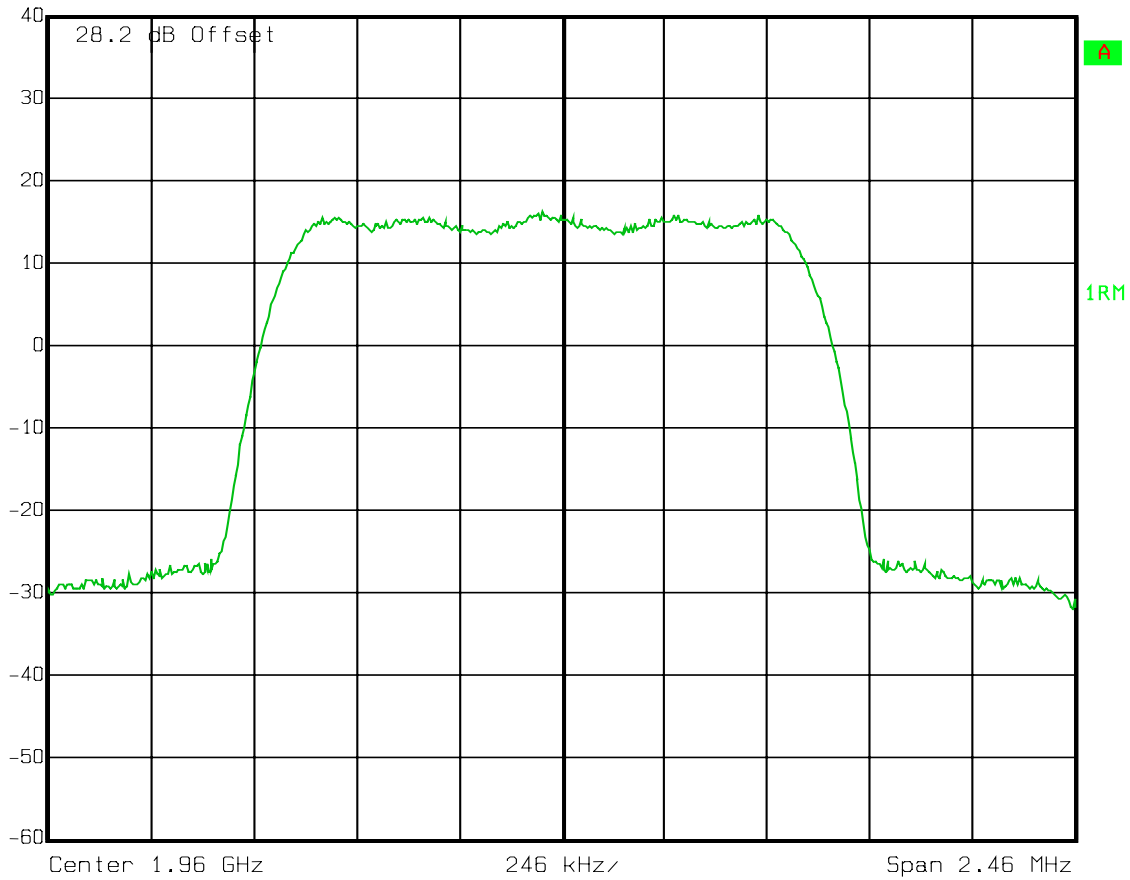


Date: 14.APR.2008 09:11:22

EQUIPMENT: ION-B TFAH-US85/19

Test Data – Occupied Bandwidth

CDMA - Input

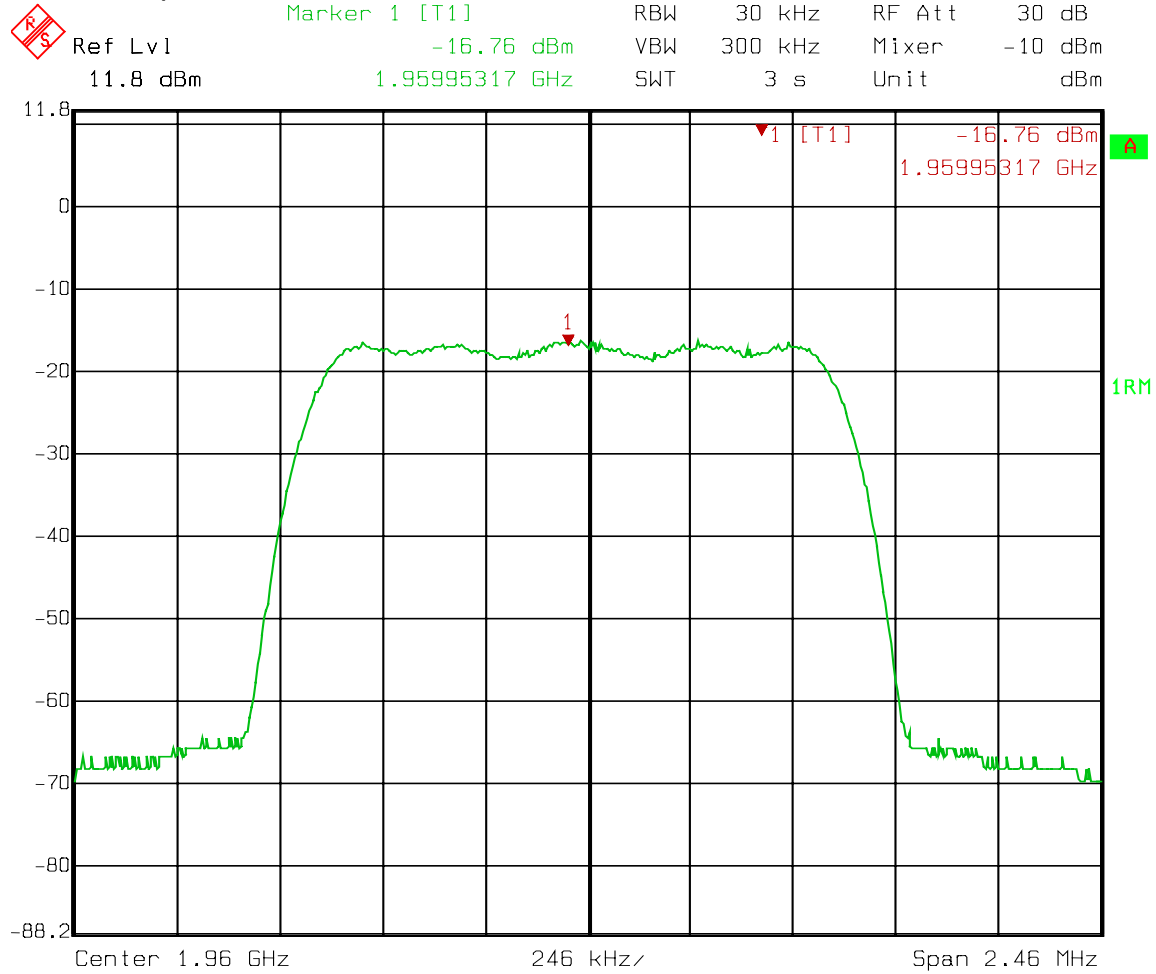

Date: 14.APR.2008 09:12:31

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Occupied Bandwidth

EDGE - Output



Ref Lvl
40 dBm

| | | | |
|-----|--------|--------|---------|
| RBW | 3 kHz | RF Att | 30 dB |
| VBW | 3 kHz | Mixer | -10 dBm |
| SWT | 280 ms | Unit | dBm |

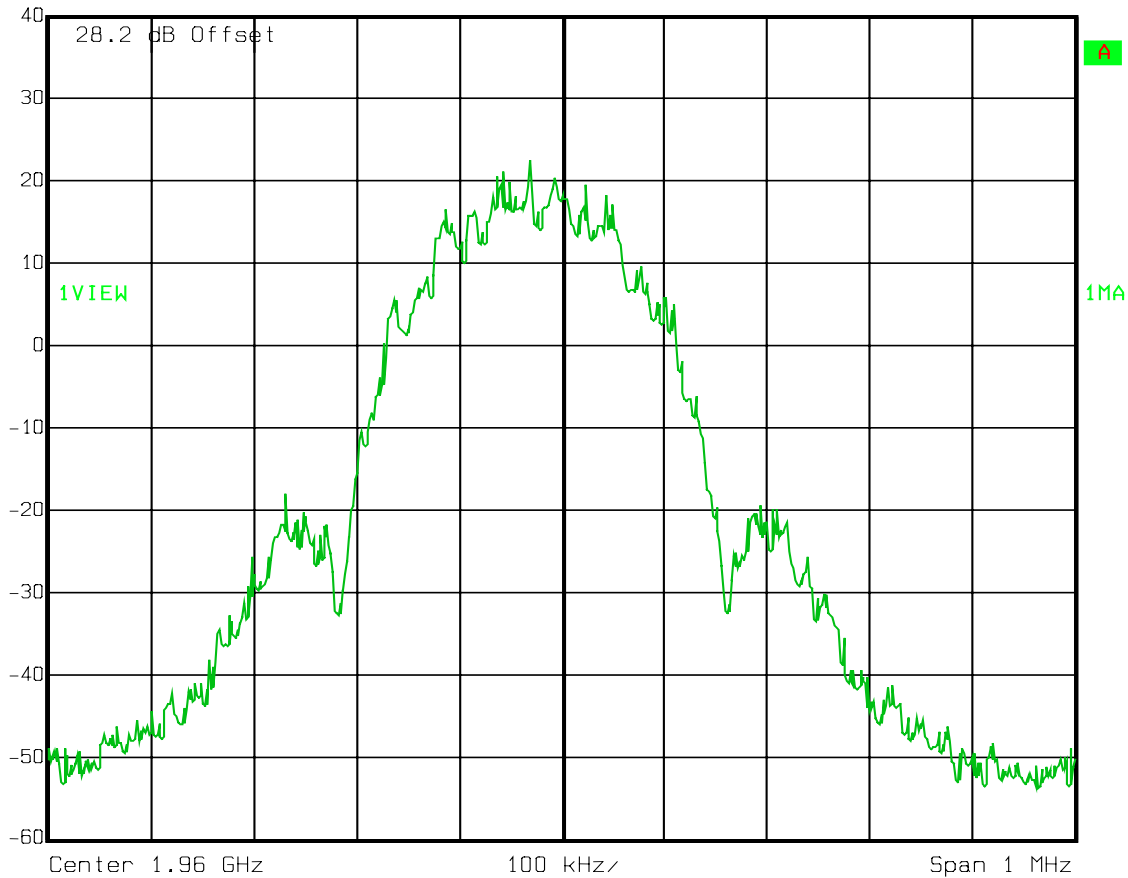

Date: 14.APR.2008 09:33:42

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Occupied Bandwidth

EDGE - Input



Ref Lvl
11.8 dBm

| | | | |
|-----|--------|--------|---------|
| RBW | 3 kHz | RF Att | 30 dB |
| VBW | 3 kHz | Mixer | -10 dBm |
| SWT | 280 ms | Unit | dBm |

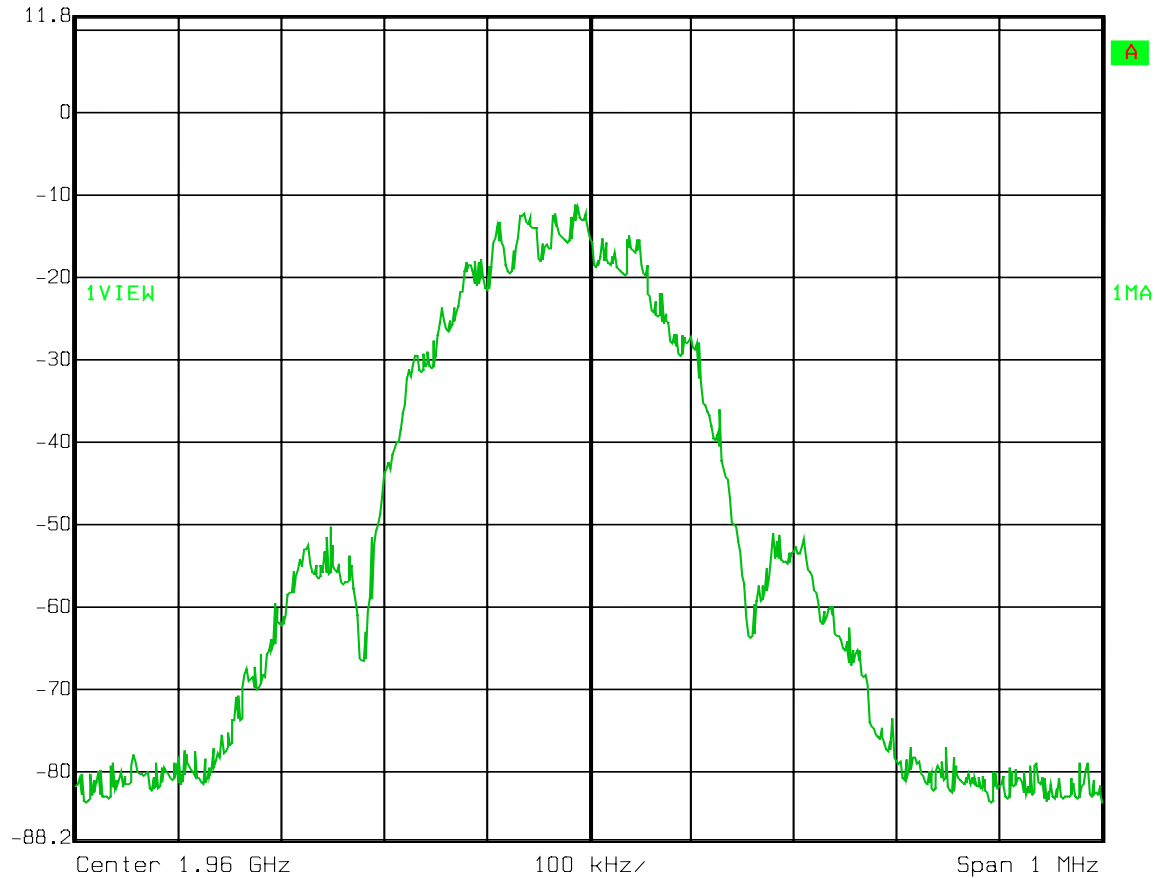

Date: 14.APR.2008 09:34:45

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Occupied Bandwidth

GSM - Output



Ref Lvl
40 dBm

| | | | |
|-----|--------|--------|---------|
| RBW | 3 kHz | RF Att | 30 dB |
| VBW | 3 kHz | Mixer | -10 dBm |
| SWT | 280 ms | Unit | dBm |

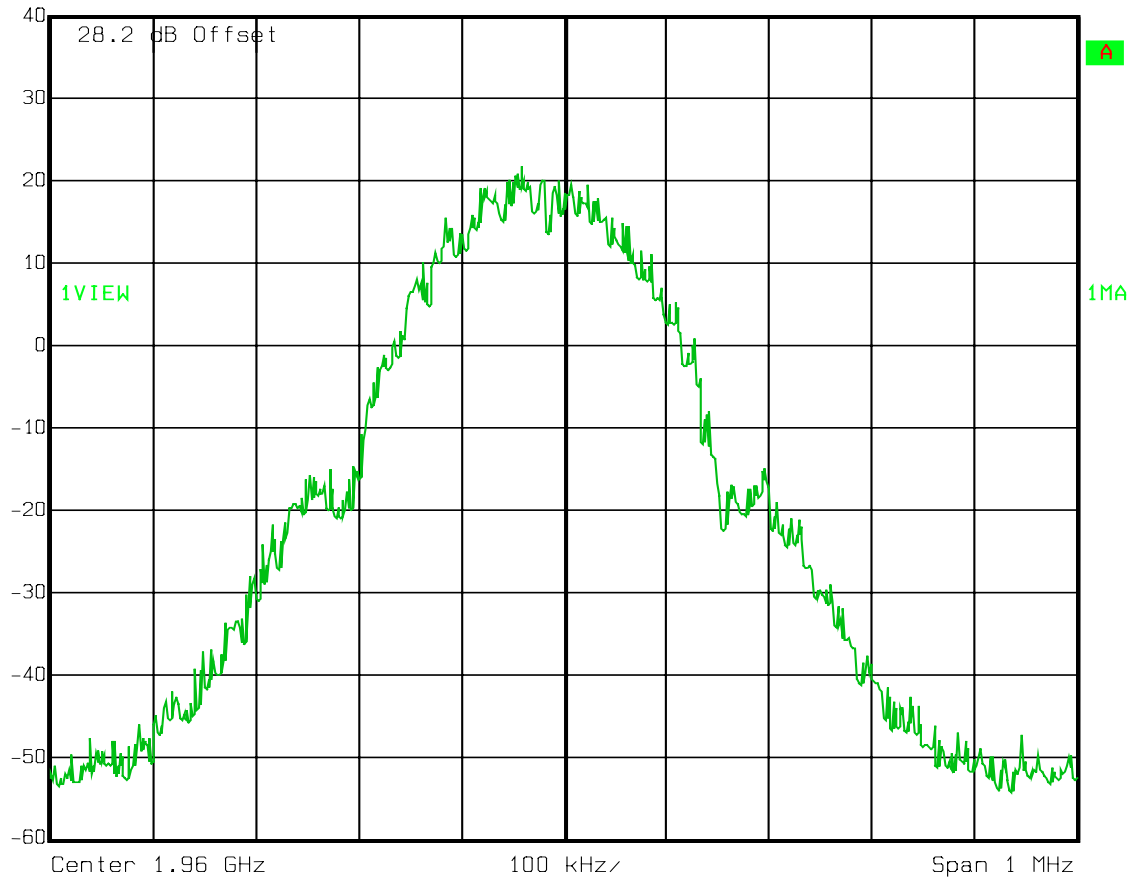

Date: 14.APR.2008 09:38:05

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Occupied Bandwidth

GSM - Input



Ref Lvl
11.8 dBm

| | | | |
|-----|--------|--------|---------|
| RBW | 3 kHz | RF Att | 30 dB |
| VBW | 3 kHz | Mixer | -10 dBm |
| SWT | 280 ms | Unit | dBm |

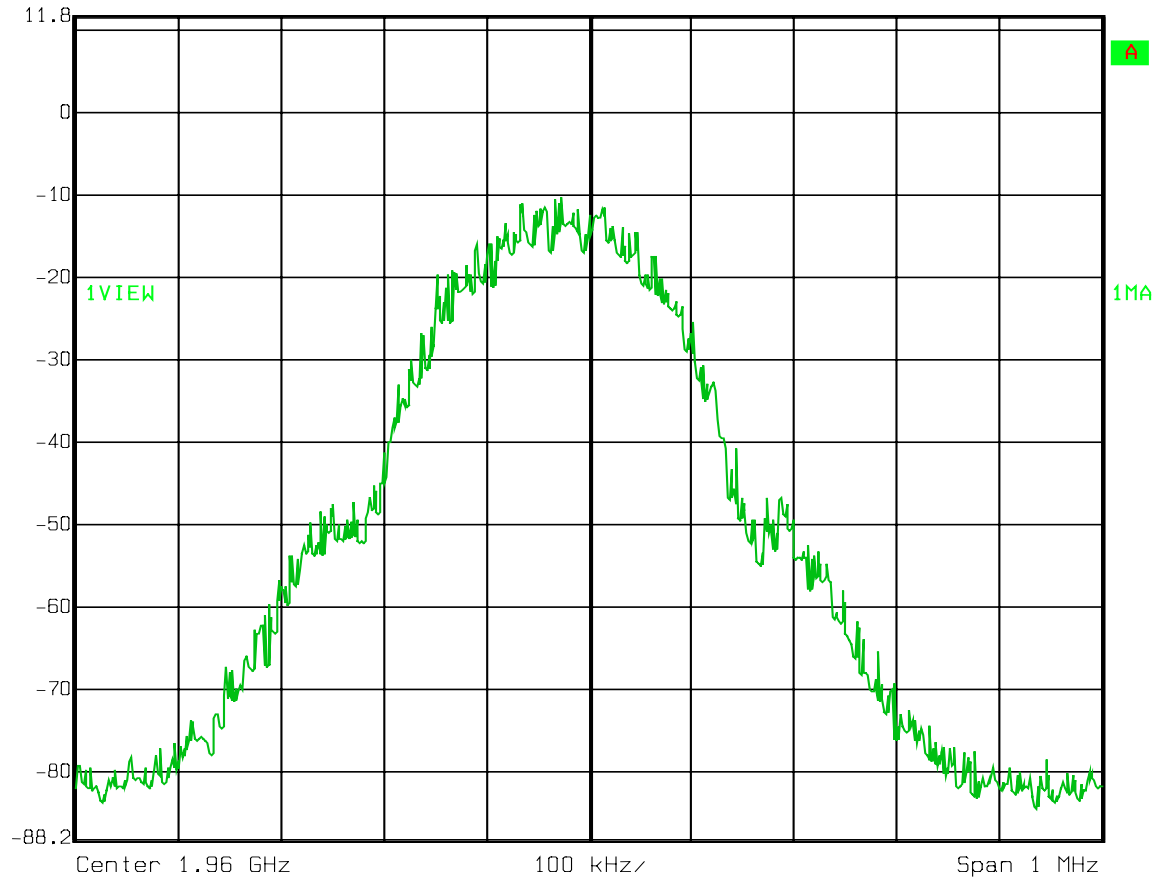

Date: 14.APR.2008 09:39:09

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Occupied Bandwidth

W-CDMA - Output



Ref Lvl
30 dBm

| | | | |
|-----|---------|--------|---------|
| RBW | 100 kHz | RF Att | 20 dB |
| VBW | 300 kHz | Mixer | -10 dBm |
| SWT | 5 ms | Unit | dBm |

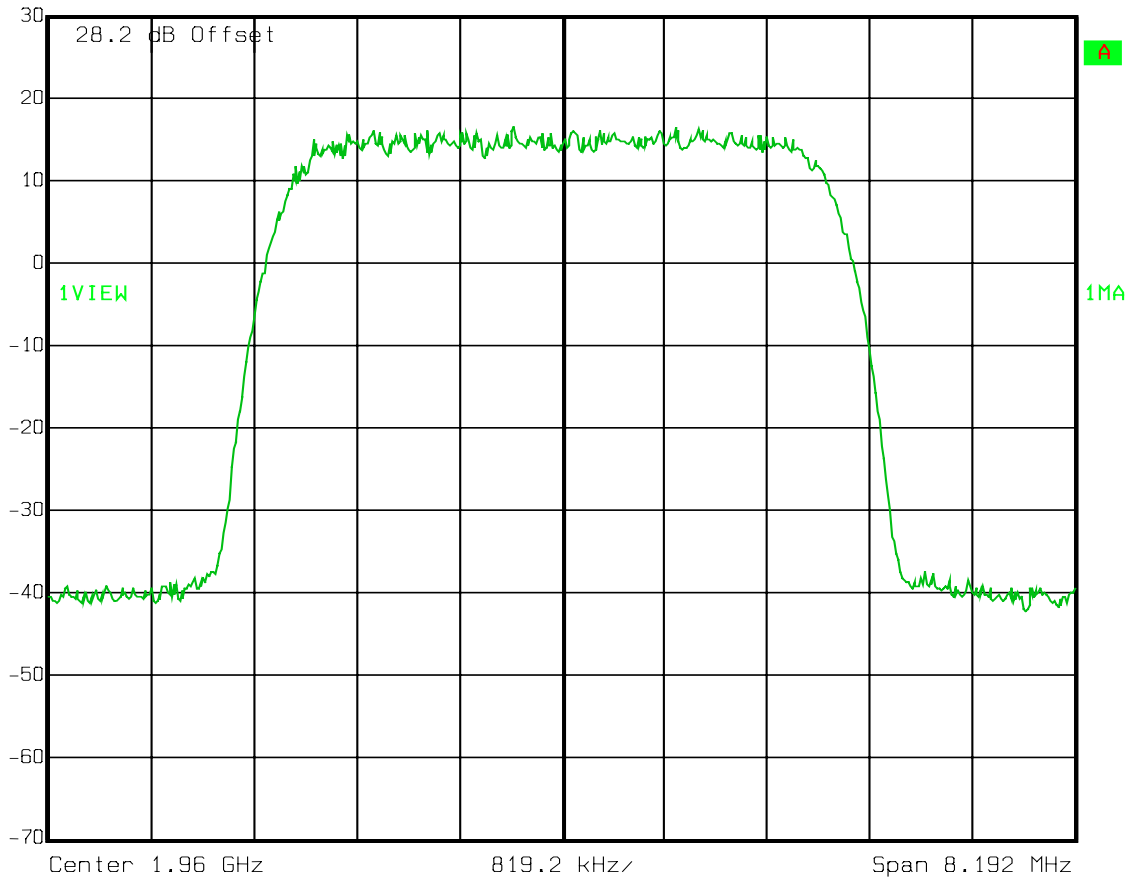

Date: 14.APR.2008 10:01:38

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Occupied Bandwidth

W-CDMA - Input



Ref Lvl
1.8 dBm

| | | | |
|-----|---------|--------|---------|
| RBW | 100 kHz | RF Att | 20 dB |
| VBW | 300 kHz | Mixer | -10 dBm |
| SWT | 5 ms | Unit | dBm |

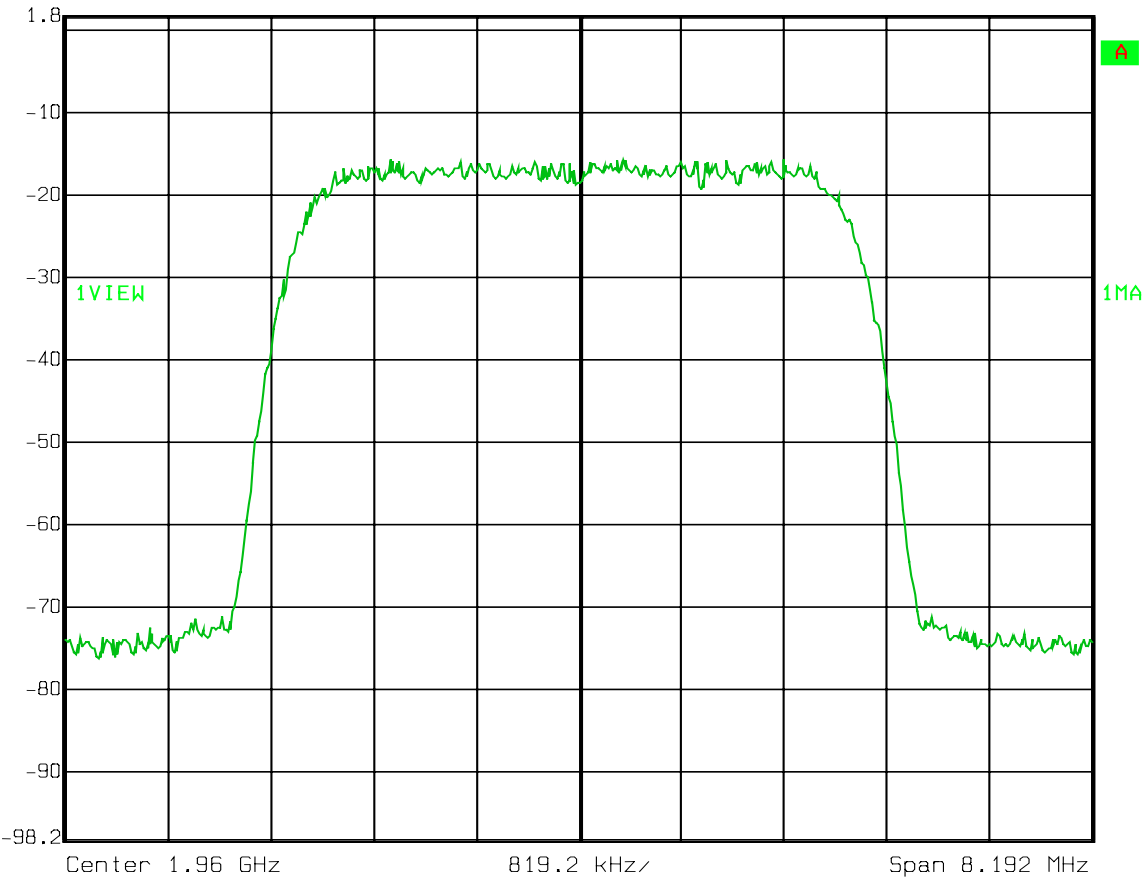

Date: 14.APR.2008 10:09:15

Section 5. Spurious Emissions at Antenna Terminals

| | |
|--|---------------------|
| NAME OF TEST: Spurious Emissions @ Antenna Terminals | PARA. NO.: 24.238 |
| TESTED BY: David Light | DATE: 14 April 2008 |

Test Results: Complies.

Test Data: See attached plot(s).

Equipment Used: 1036-1082-1472-1469

Measurement Uncertainty: +/- 1.7 dB

Temperature: 22 °C

Relative Humidity: 32 %

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Spurious Emissions at Antenna Terminals

Lower Bandedge Intermodulation

CDMA

Ref Lvl
30 dBm

| | | | |
|-----|--------|--------|---------|
| RBW | 30 kHz | RF Att | 20 dB |
| VBW | 30 kHz | Mixer | -10 dBm |
| SWT | 28 ms | Unit | dBm |

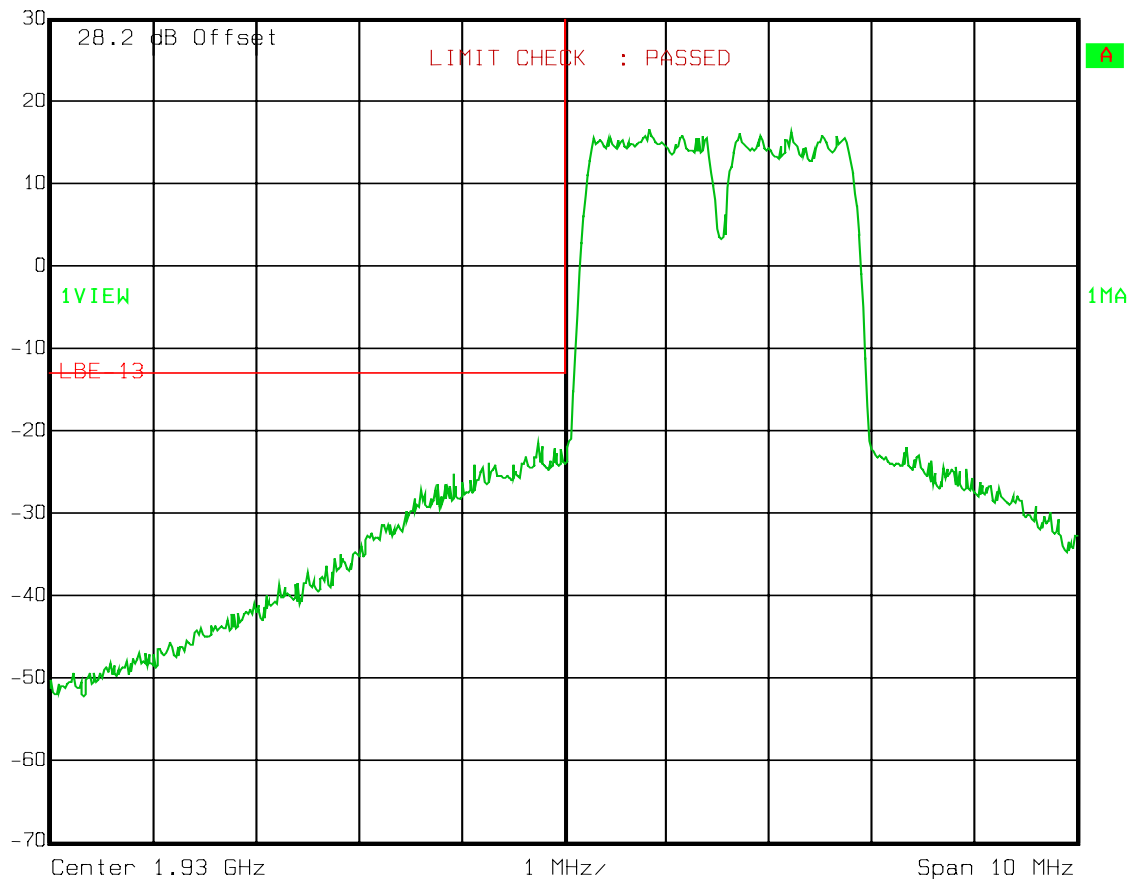

Date: 14.APR.2008 09:22:02

EQUIPMENT: ION-B TFAH-US85/19

Test Data – Spurious Emissions at Antenna Terminals


Upper Bandedge Intermodulation

CDMA



Ref Lvl
30 dBm

| | | | |
|-----|--------|--------|---------|
| RBW | 30 kHz | RF Att | 20 dB |
| VBW | 30 kHz | Mixer | -10 dBm |
| SWT | 28 ms | Unit | dBm |

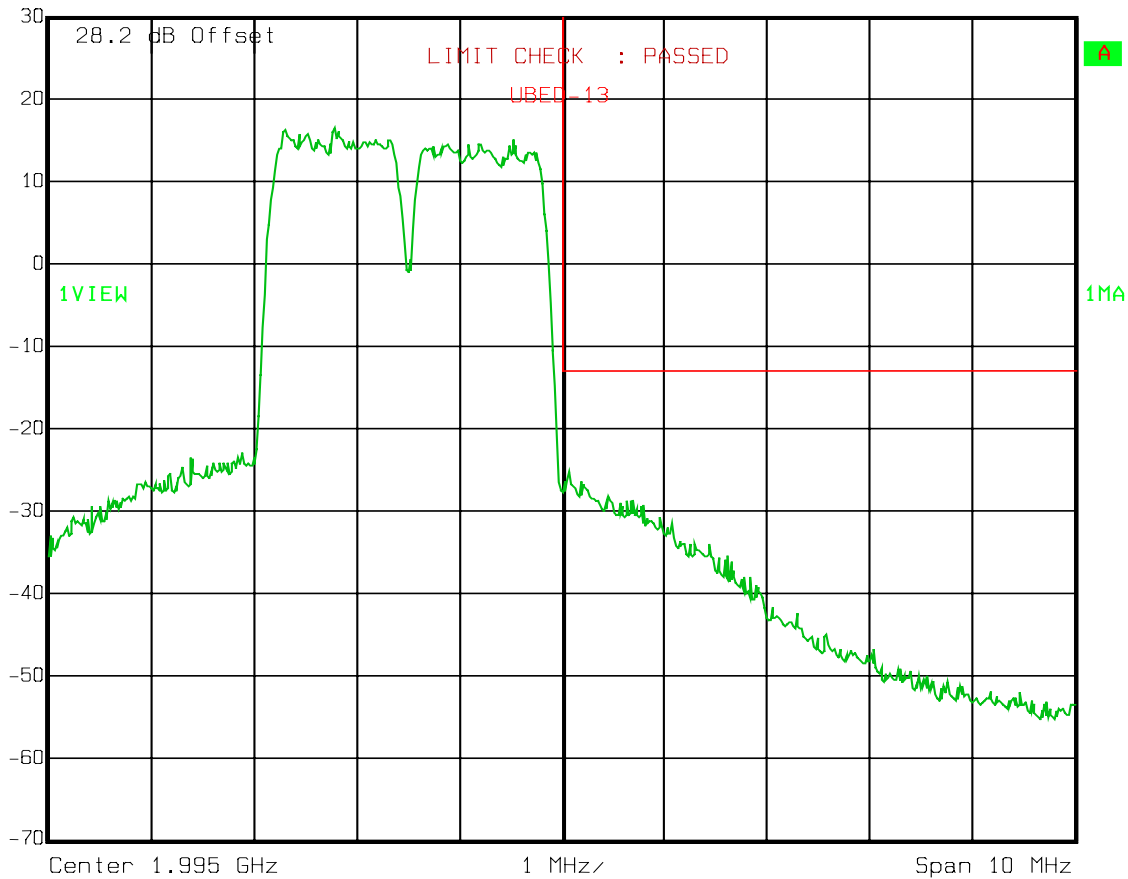


Date: 14.APR.2008 09:25:46

EQUIPMENT: ION-B TFAH-US85/19

Test Data – Spurious Emissions at Antenna Terminals

Spurs – CDMA

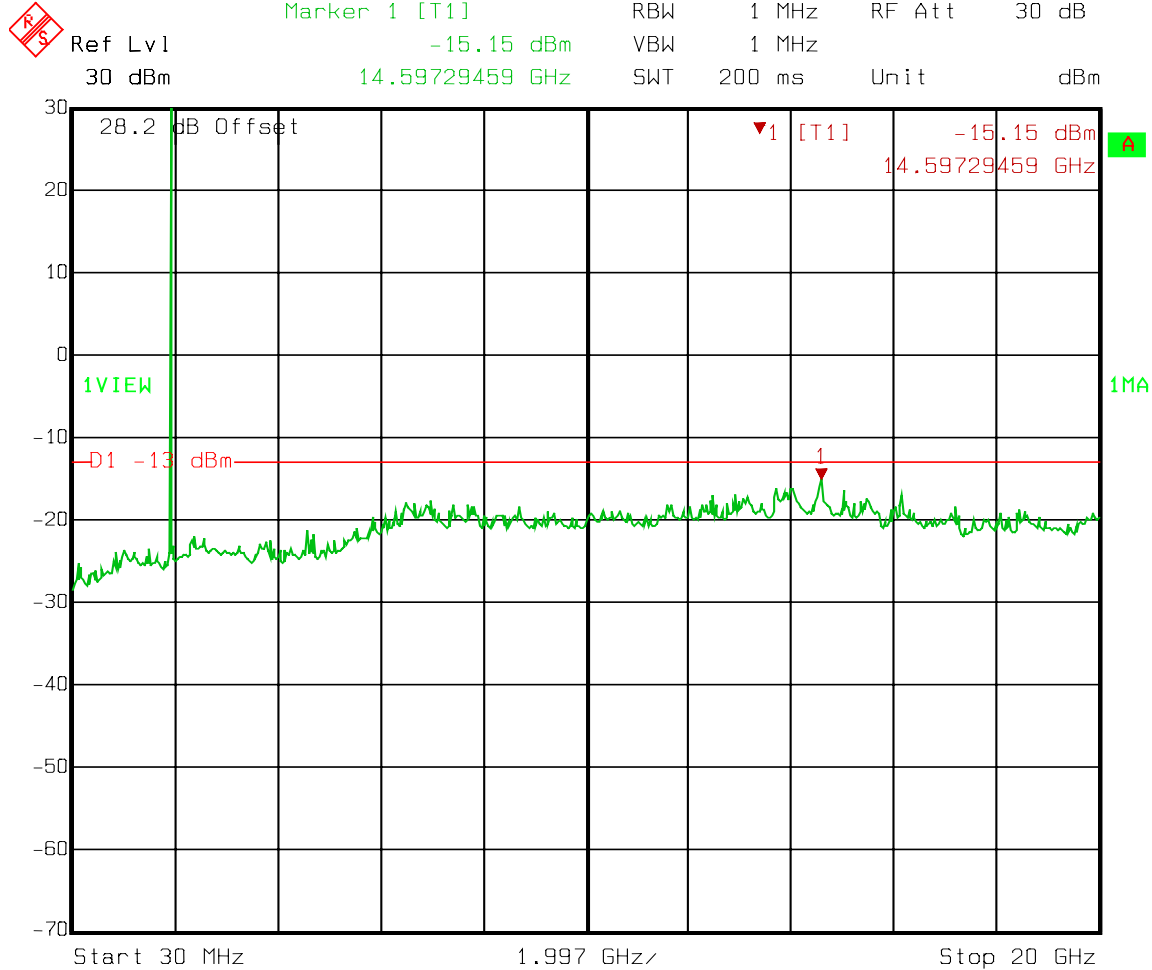

Date: 14.APR.2008 09:17:04

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Spurious Emissions at Antenna Terminals

Lower Bandedge Intermodulation EDGE



Ref Lvl
40 dBm

| | | | |
|-----|--------|--------|---------|
| RBW | 3 kHz | RF Att | 30 dB |
| VBW | 3 kHz | Mixer | -10 dBm |
| SWT | 560 ms | Unit | dBm |

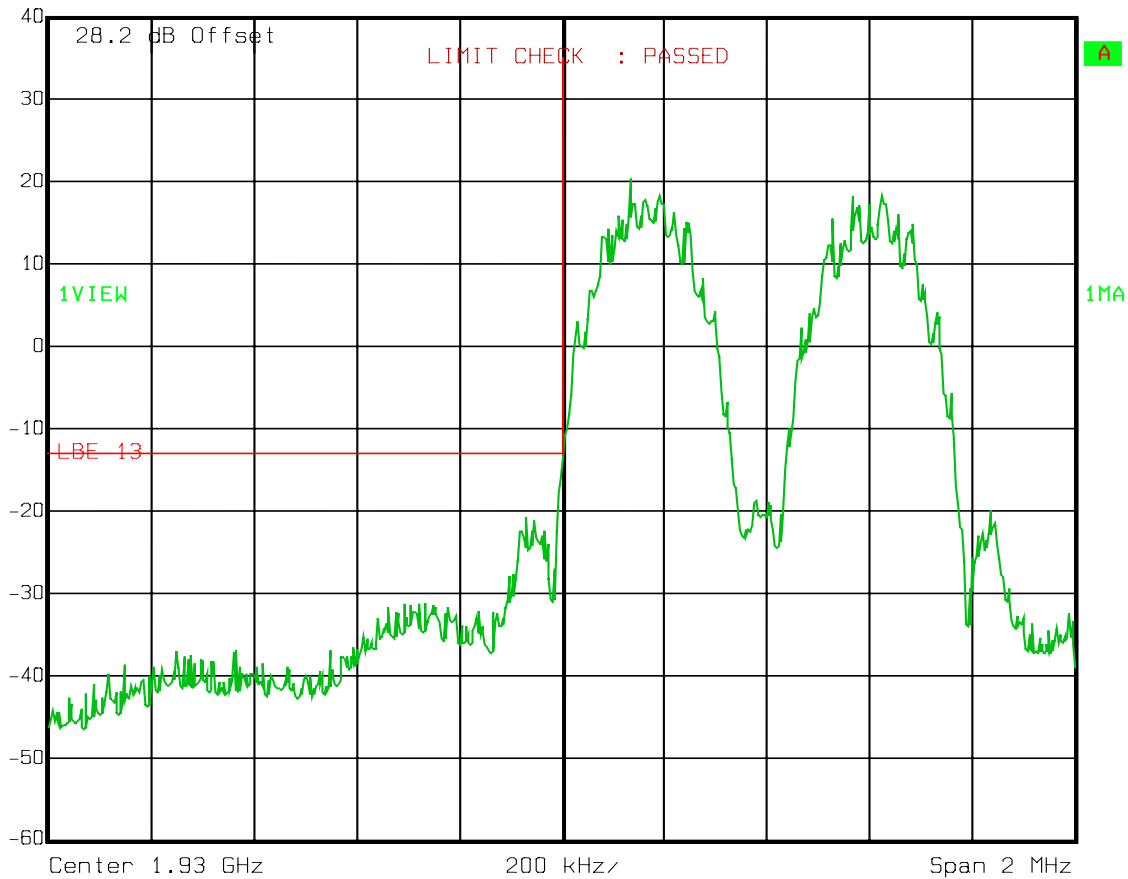


Date: 14.APR.2008 09:31:18

EQUIPMENT: ION-B TFAH-US85/19

Test Data – Spurious Emissions at Antenna Terminals

Upper Bandedge Intermodulation
EDGE

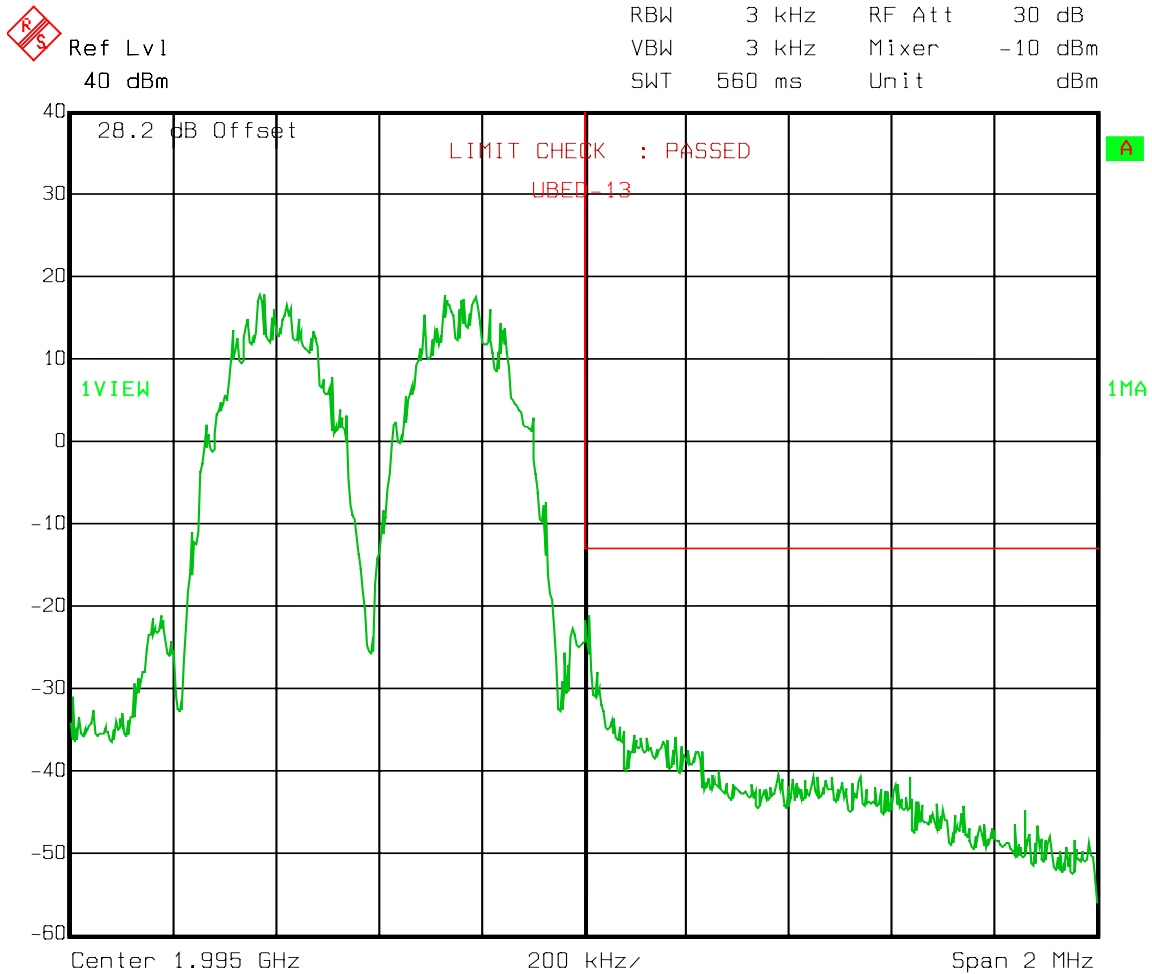


Date: 14.APR.2008 09:30:14

EQUIPMENT: ION-B TFAH-US85/19

Test Data – Spurious Emissions at Antenna Terminals

Spurs – EDGE

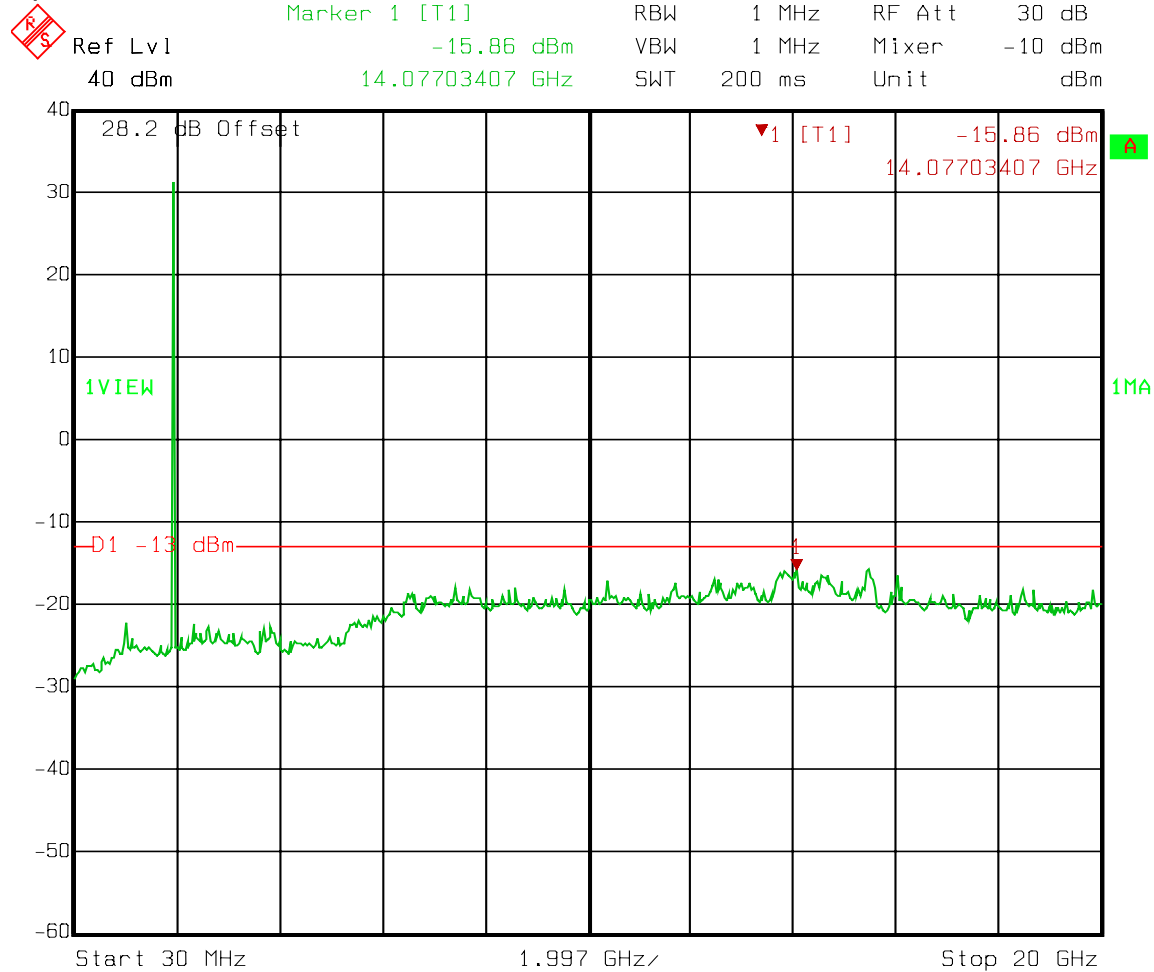

Date: 14.APR.2008 09:33:03

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Spurious Emissions at Antenna Terminals

Lower Bandedge Intermodulation

GSM

Ref Lvl
40 dBm

| | | | |
|-----|--------|--------|---------|
| RBW | 3 kHz | RF Att | 30 dB |
| VBW | 3 kHz | Mixer | -10 dBm |
| SWT | 560 ms | Unit | dBm |

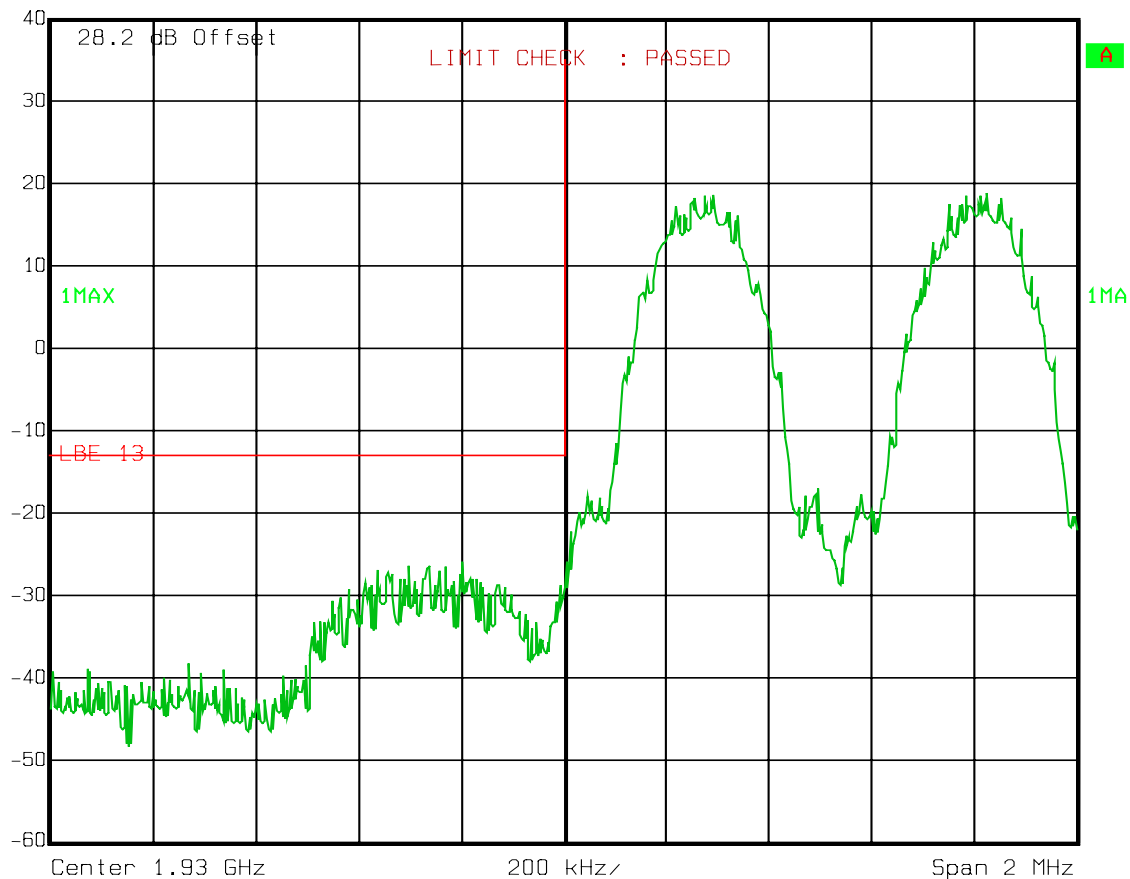

Date: 14.APR.2008 09:43:01

EQUIPMENT: ION-B TFAH-US85/19


Test Data – Spurious Emissions at Antenna Terminals

Upper Bandedge Intermodulation

GSM


Ref Lvl
40 dBm

| | | | |
|-----|--------|--------|---------|
| RBW | 3 kHz | RF Att | 30 dB |
| VBW | 3 kHz | Mixer | -10 dBm |
| SWT | 560 ms | Unit | dBm |

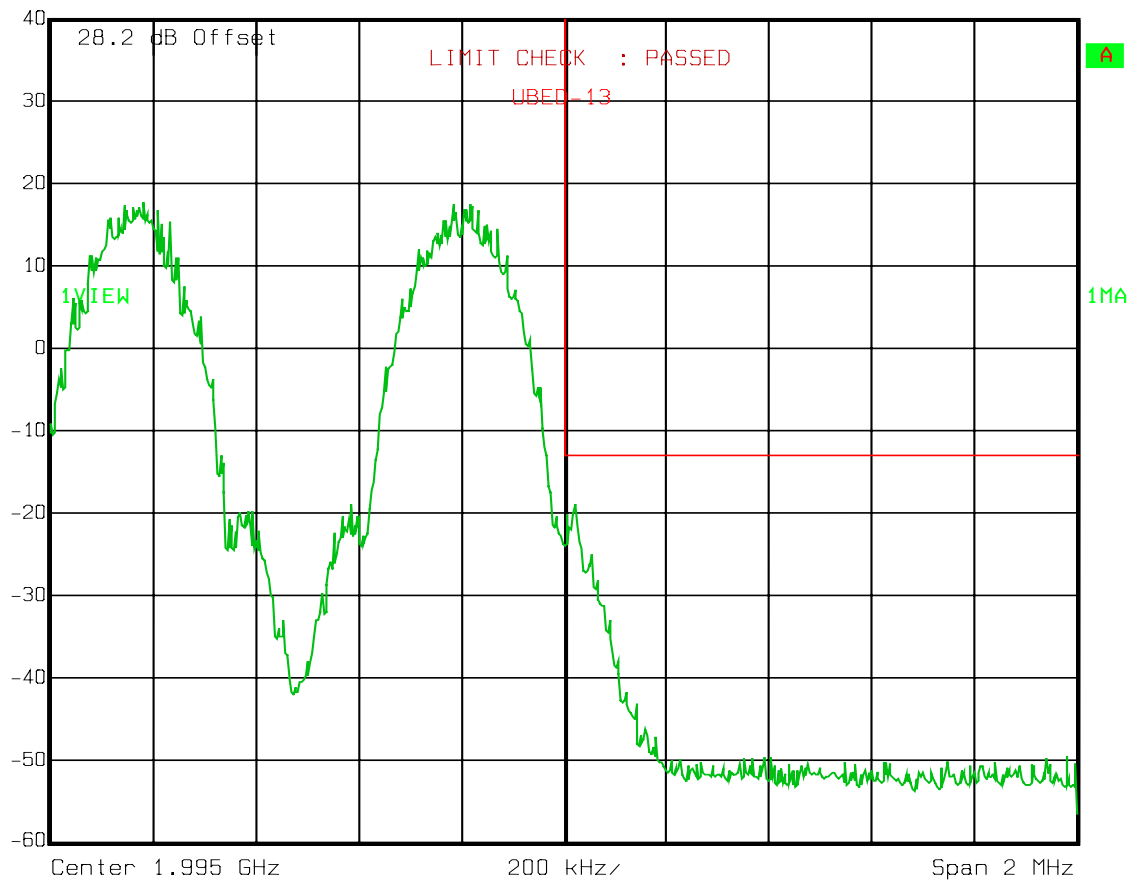

Date: 14.APR.2008 09:44:31

EQUIPMENT: ION-B TFAH-US85/19

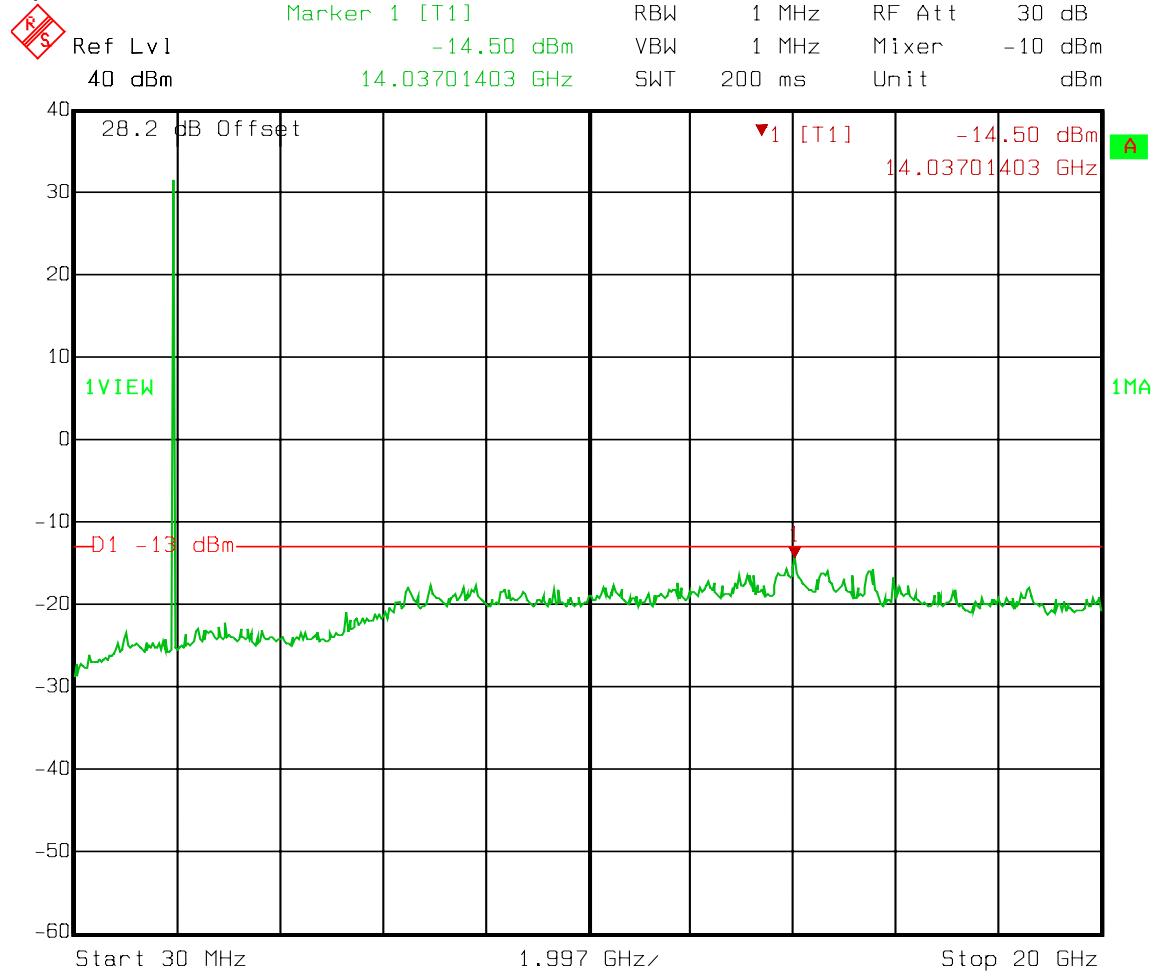Test Data – Spurious Emissions at Antenna Terminals**Spurs – GSM**

Date: 14.APR.2008 09:40:31

EQUIPMENT: ION-B TFAH-US85/19

Test Data – Spurious Emissions at Antenna Terminals


Lower Bandedge Intermodulation

W-CDMA



Ref Lvl
30 dBm

| | | | |
|-----|---------|--------|---------|
| RBW | 100 kHz | RF Att | 20 dB |
| VBW | 100 kHz | Mixer | -10 dBm |
| SWT | 5 ms | Unit | dBm |

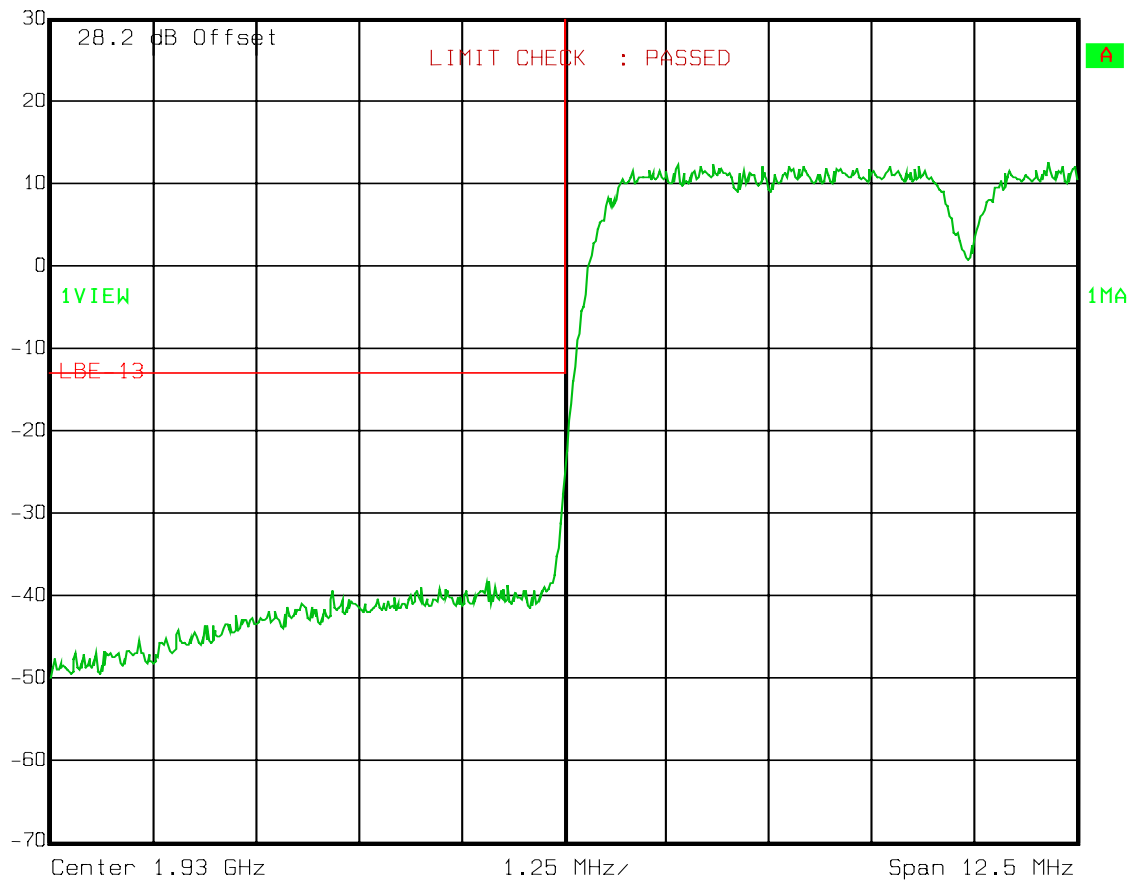

Date: 14.APR.2008 09:59:17

EQUIPMENT: ION-B TFAH-US85/19

Test Data – Spurious Emissions at Antenna Terminals


Upper Bandedge Intermodulation

W-CDMA



Ref Lvl
30 dBm

| | | | |
|-----|---------|--------|---------|
| RBW | 100 kHz | RF Att | 20 dB |
| VBW | 100 kHz | Mixer | -10 dBm |
| SWT | 5 ms | Unit | dBm |

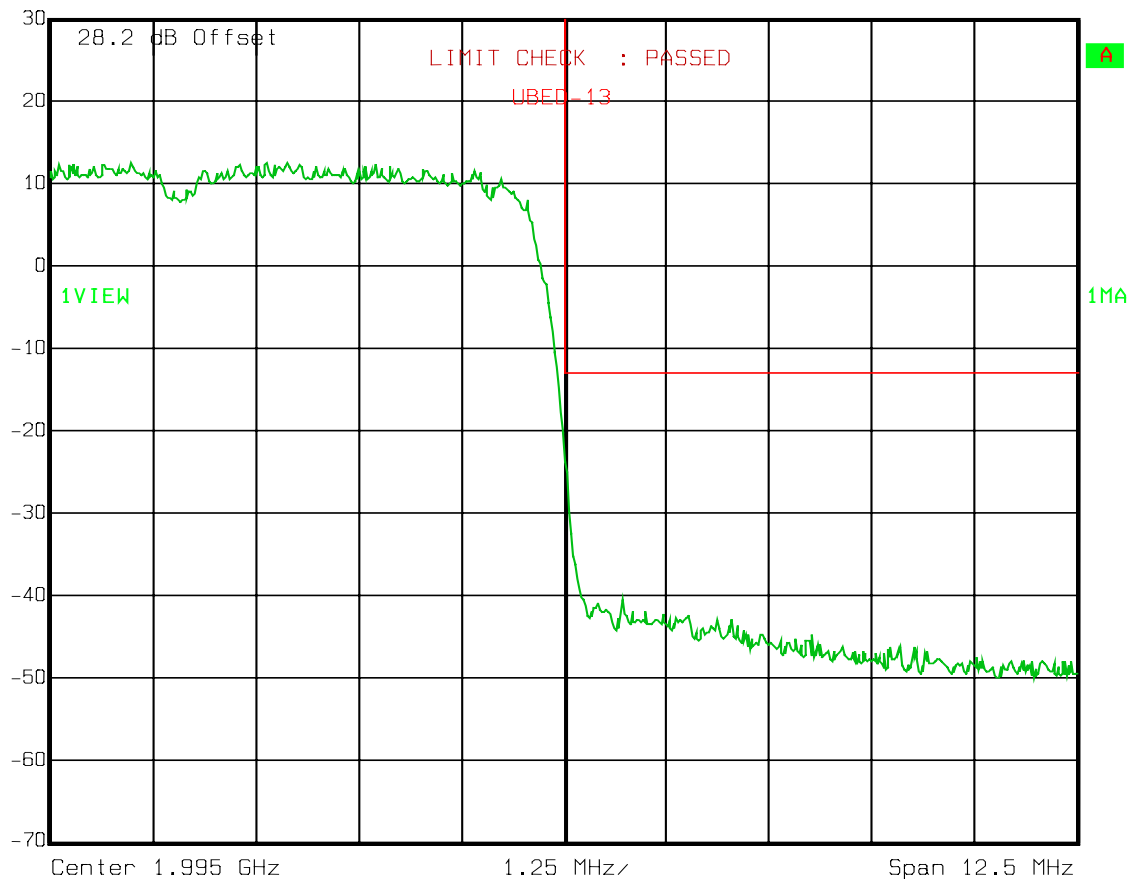


Date: 14.APR.2008 09:54:26

EQUIPMENT: ION-B TFAH-US85/19

Test Data – Spurious Emissions at Antenna Terminals

Spurs – W-CDMA -

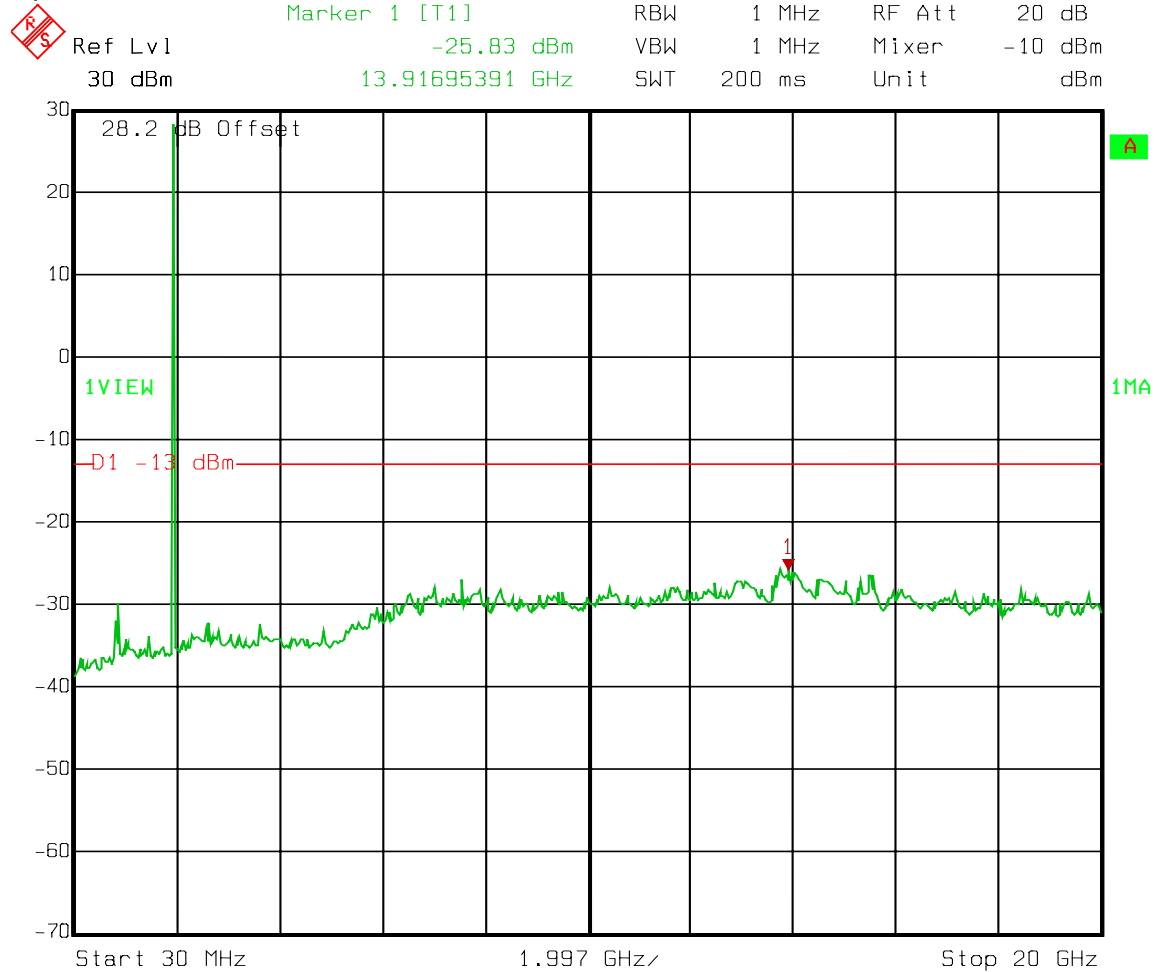

Date: 14.APR.2008 10:11:05

Section 6. Field Strength of Spurious

| | |
|--|---------------------|
| NAME OF TEST: Field Strength of Spurious Emissions | PARA. NO.: 24.238 |
| TESTED BY: David Light | DATE: 10 April 2008 |

Test Results: Complies.

Test Data: There were no emissions detected above the noise floor which was at least 20 dB below the specification limit of -13 dBm.

The spectrum was searched from 30 MHz to 10 GHz

RBW = VBW = 1 MHz, Peak detector

Equipment Used: 993-1016-1464-1484-1485

Measurement Uncertainty: +/-1.7 dB

Temperature: 20 °C

Relative Humidity: 30 %

EQUIPMENT: ION-B TFAH-US85/19

Section 7. Test Equipment List

| Nemko ID | Description | Manufacturer Model Number | Serial Number | Calibration Date | Calibration Due |
|----------|----------------------------|--------------------------------|---------------|---------------------|--------------------|
| 1036 | SPECTRUM ANALYZER | ROHDE & SCHWARZ FSEK30 | 830844/006 | 05/26/06 | 05/26/08 |
| 1082 | CABLE 2m | Astrolab 32027-2-29094-72TC | N/A | CBU | N/A |
| 1472 | 20db Attenuator DC 18 Ghz | Omni Spectra 20600-20db | NONE | CBU | N/A |
| 1469 | 10 db Attenuator DC 18 Ghz | MCL Inc. BW-S10W2 10db-2WDC | NONE | CBU | N/A |
| 1464 | Spectrum analyzer | Hewlett Packard 8563E | 3551A04428 | 01/24/07 | 01/24/09 |
| 1484 | Cable | Storm PR90-010-072 | N/A | 05/02/07 | 05/01/08 |
| 1485 | Cable | Storm PR90-010-216 | N/A | 05/02/07 | 05/01/08 |
| 993 | Horn antenna | A.H. Systems SAS-200/571 | XXX | 08/31/07 | 08/30/08 |
| 1016 | Pre-Amp | HEWLETT PACKARD 8449A | 2749A00159 | 05/01/07 | 04/30/08 |

ANNEX A - TEST DETAILS

NAME OF TEST: RF Power Output**PARA. NO.: 2.1046**

Minimum Standard: Para. No.24.232. Base stations are limited to 1640 watts peak E.I.R.P. with an antenna height up to 300 meters HAAT. In no case may the peak output power of a base station transmitter exceed 100 watts.

Method Of Measurement:Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter or spectrum analyzer. Power output is measured with the maximum rated input level.

Integral Antenna:

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic radiator.

NAME OF TEST: Occupied Bandwidth

PARA. NO.: 2.1049

Minimum Standard: Input/Output

Method Of Measurement:

CDMA

Spectrum analyzer settings:

RBW=VBW=30 kHz

Span: 5 MHz

Sweep: Auto

GSM / EDGE

RBW=VBW= 3 kHz

Span: 1 MHz

Sweep: Auto

TDMA

RBW=VBW= 1 kHz

Span: 1 MHz

Sweep: Auto

W-CDMA

RBW=VBW= 100 kHz

Span: 10 MHz

Sweep: Auto

NAME OF TEST: Spurious Emission at Antenna Terminals PARA. NO.: 24.238

Minimum Standard: Para. No.24.238(a). On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power by at least $43 + 10 \log (P)$ dB.

Method Of Measurement:

Spectrum analyzer settings:

CDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 30 kHz (< 1MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: 6 Sweeps

GSM / EDGE

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 3 kHz (< 1 MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: Disabled

TDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 3 kHz (< 1 MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: Disabled

W-CDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 100 kHz (< 1MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: 6 Sweeps

To demonstrate compliance at band edges the frequency of the input signal is set to the lowest and highest assigned channel and the center frequency of the spectrum analyzer is set to the upper and lower edges of the appropriate frequency block.

NAME OF TEST: Field Strength of Spurious Radiation PARA. NO.: 24.238

Minimum Standard: Para. No.24.238(a). On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power by at least $43 + 10 \log (P)$ dB.

Method of Measurement TIA/EIA-603-1992

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic radiator.

NAME OF TEST: Frequency Stability**PARA. NO.: 2.1055**

Minimum Standard: Para. No. 24.235. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Method Of Measurement:Frequency Stability With Voltage Variation


The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. The frequency counter and signal generator are phase locked with the same 10 MHz reference frequency by connecting the 10 MHz ref. out of the counter to the 10 MHz ref, in of the signal generator. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation


The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.

ANNEX B - TEST DIAGRAMS



Para. No. 2.985 - R.F. Power Output

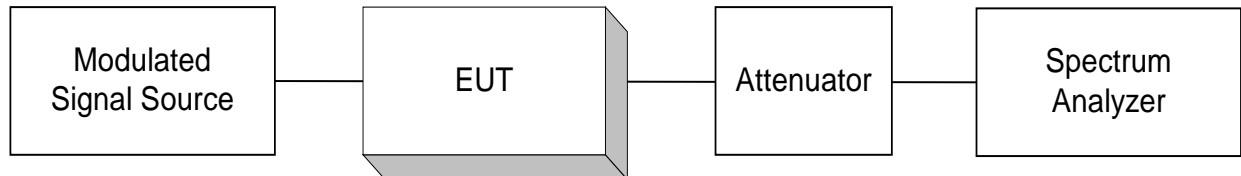


Para. No. 2.989 - Occupied Bandwidth

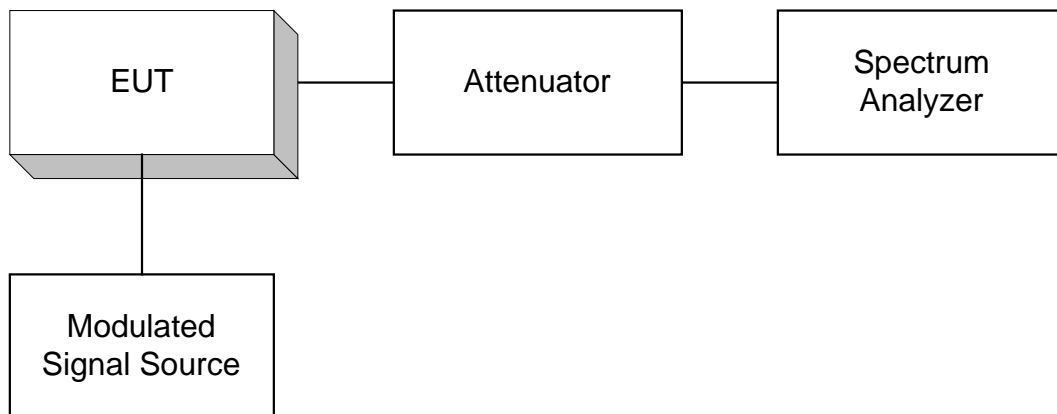

Para. No. 2.991 Spurious Emissions at Antenna Terminals

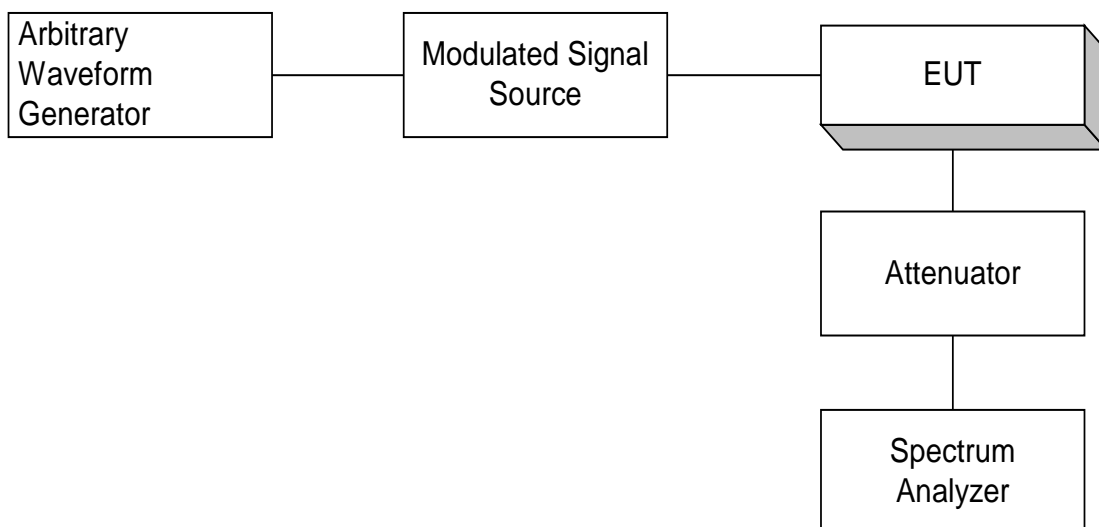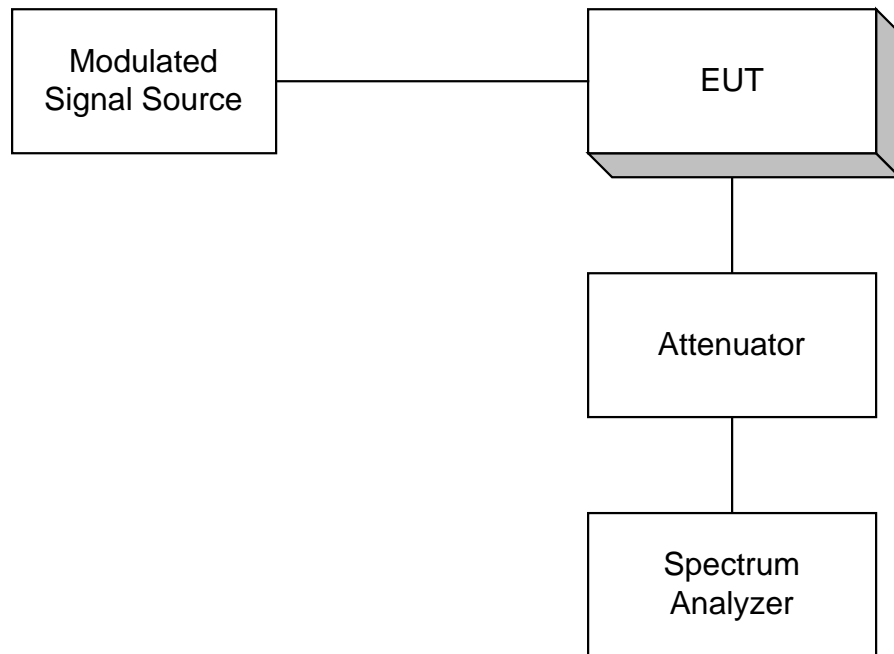

Para. No. 2.993 - Field Strength of Spurious Radiation

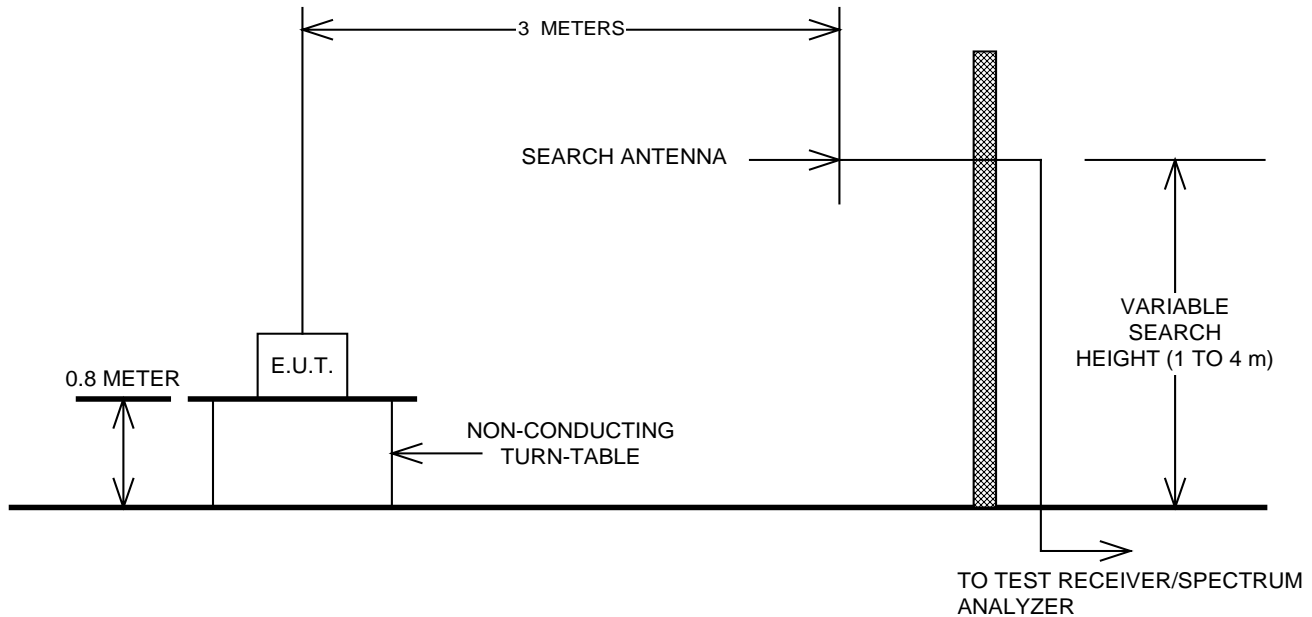

Para. No. 2.995 - Frequency Stability

