



Nemko Test Report: 1028403RUS1

Applicant: Andrew Corporation
620 N. Greenfield Parkway
Garner, NC 27529
USA

**Equipment Under Test:
(E.U.T.)** TFAH-US4B

FCC Identifier: BCR-TFAHUS4B

In Accordance With: **CFR 47, Part 24, Subpart E**
Broadband PCS Repeaters

Tested By: Nemko USA, Inc.
802 N. Kealy
Lewisville, TX 75057-3136

TESTED BY:

A handwritten signature in black ink, appearing to read 'David Light', written over a horizontal line.

David Light, Senior Wireless Engineer

DATE: 01 June 2011

APPROVED BY:

A handwritten signature in black ink, appearing to read 'Mike Cantwell', written over a horizontal line.

Mike Cantwell, GM

DATE: 03 June 2011

Number of Pages: 46

Table of Contents

Section 1. Summary of Test Results	3
Section 2. General Equipment Specification	5
Section 3. RF Power Output.....	7
Section 4. Occupied Bandwidth.....	8
Section 5. Spurious Emissions at Antenna Terminals.....	19
Section 6. Field Strength of Spurious	35
Section 7. Test Equipment List.....	36
ANNEX A - TEST DETAILS	37
ANNEX B - TEST DIAGRAMS	43

EQUIPMENT: TFAH-US4B

Section 1. Summary of Test Results

Manufacturer: Andrew Corporation

Model No.: TFAH-US4B

Serial No.: 10

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with CFR 47, Part 24, Subpart E.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



NVLAP Lab Code 100426-0

Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.
This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
RF Power Output	24.232	100W	Complies
Occupied Bandwidth	2.1049	Input/Output	Complies
Spurious Emissions at Antenna Terminals	24.238(a)	-13 dBm	Complies
Field Strength of Spurious Emissions	24.238(a)	-13 dBm E.I.R.P.	Complies
Frequency Stability	24.235		NA


Footnotes:

Section 2. General Equipment Specification

Supply Voltage Input:	120 Vac		
Frequency Range:	Downlink:	1930 to 1995 MHz	
Frequency Range:	Uplink:	NA	
Type of Modulation	CDMA WCDMA LTE	GSM	EDGE W-CDMA
Designator:	(F9W)	(GXW)	(G7W) (F9W)
Output Impedance:	50 ohms		
RF Output (Rated):	Downlink	31 dBm (1.25 W)	
RF Output (Rated):	Uplink	NA	
Frequency Translation:	F1-F1 <input checked="" type="checkbox"/>	F1-F2 <input type="checkbox"/>	N/A <input type="checkbox"/>
Band Selection:	Software <input type="checkbox"/>	Duplexer Change <input type="checkbox"/>	Fullband Coverage <input checked="" type="checkbox"/>

Description of EUT

The TFAH-US4B is a four band high power remote unit designed to distribute Cell700, Cell850, AWS, and Extended PCS1900 band signals along the same fiber.

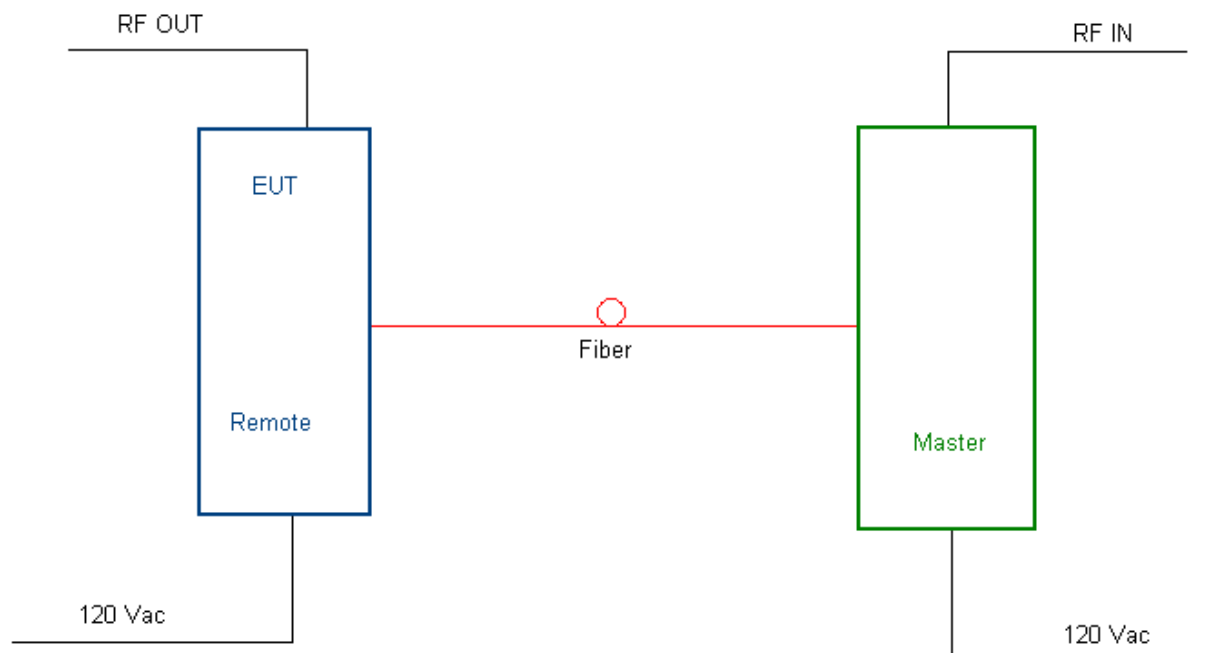System Diagram

EQUIPMENT: TFAH-US4B

Section 3. RF Power Output

NAME OF TEST: RF Power Output	PARA. NO.: 24.232
TESTED BY: David Light	DATE: 23 May 2011

Test Results: Complies.**Measurement Data:**

Direction	Modulation	Output per Channel (dBm)	Composite Power (dBm)	Composite Power (W)
Uplink	CDMA	NA	NA	NA
Downlink	CDMA	28	31	1.25
Uplink	LTE	NA	NA	NA
Downlink	LTE	28	31	1.25
Uplink	EDGE	NA	NA	NA
Downlink	EDGE	28	31	1.25
Uplink	GSM	NA	NA	NA
Downlink	GSM	28	31	1.25
Uplink	W-CDMA	NA	NA	NA
Downlink	W-CDMA	28	31	1.25

Equipment Used: 1767-1082-1472-1469**Measurement Uncertainty:** +/- 1.7 dB**Temperature:** 22 °C**Relative Humidity:** 45 %

Section 4. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 24.238
TESTED BY: David Light	DATE: 23 May 2011

Test Results: Complies.

Test Data: See attached plot(s).

Equipment Used: 1767-1082-1472-1469

Measurement Uncertainty: 1X10⁻⁷ ppm

Temperature: 22 °C

Relative Humidity: 45 %

EQUIPMENT: TFAH-US4B


Test Data – Occupied Bandwidth

CDMA - Output
Downlink



Ref Lvl
40 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

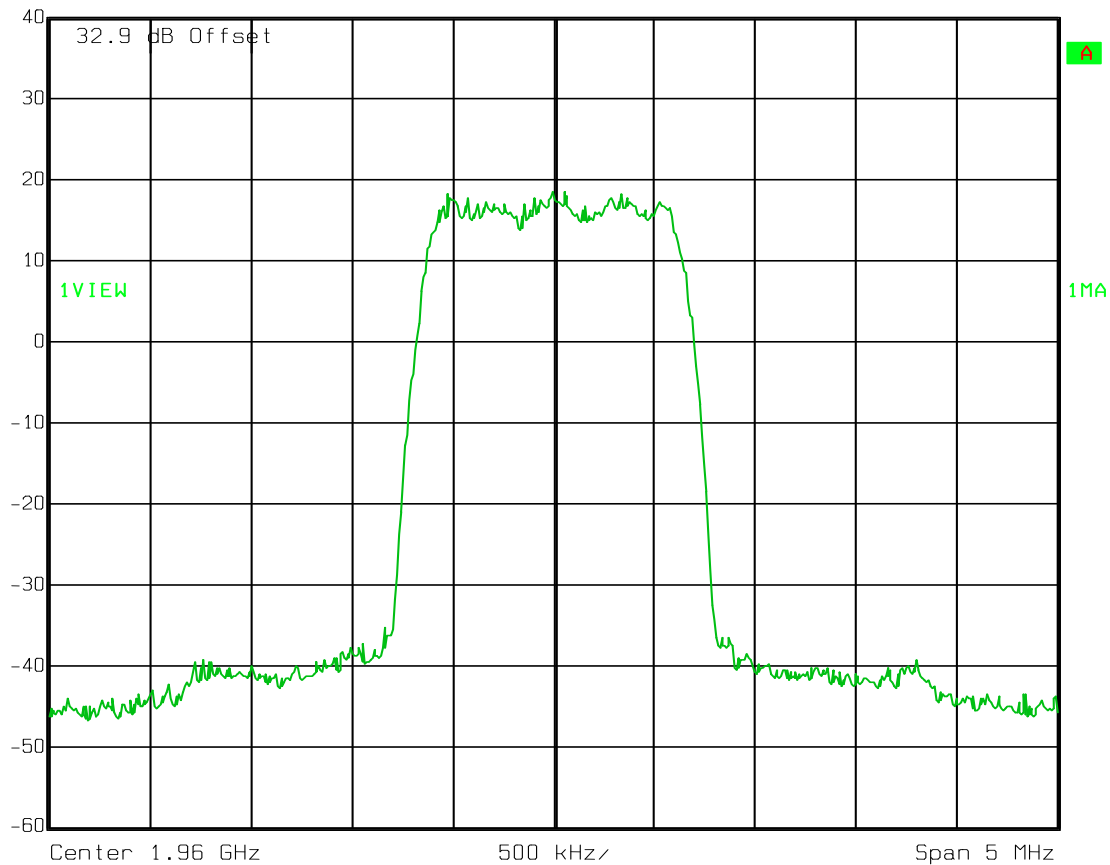

EQUIPMENT: TFAH-US4B


Test Data – Occupied Bandwidth

CDMA - Input
Downlink



Ref Lvl
7.1 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

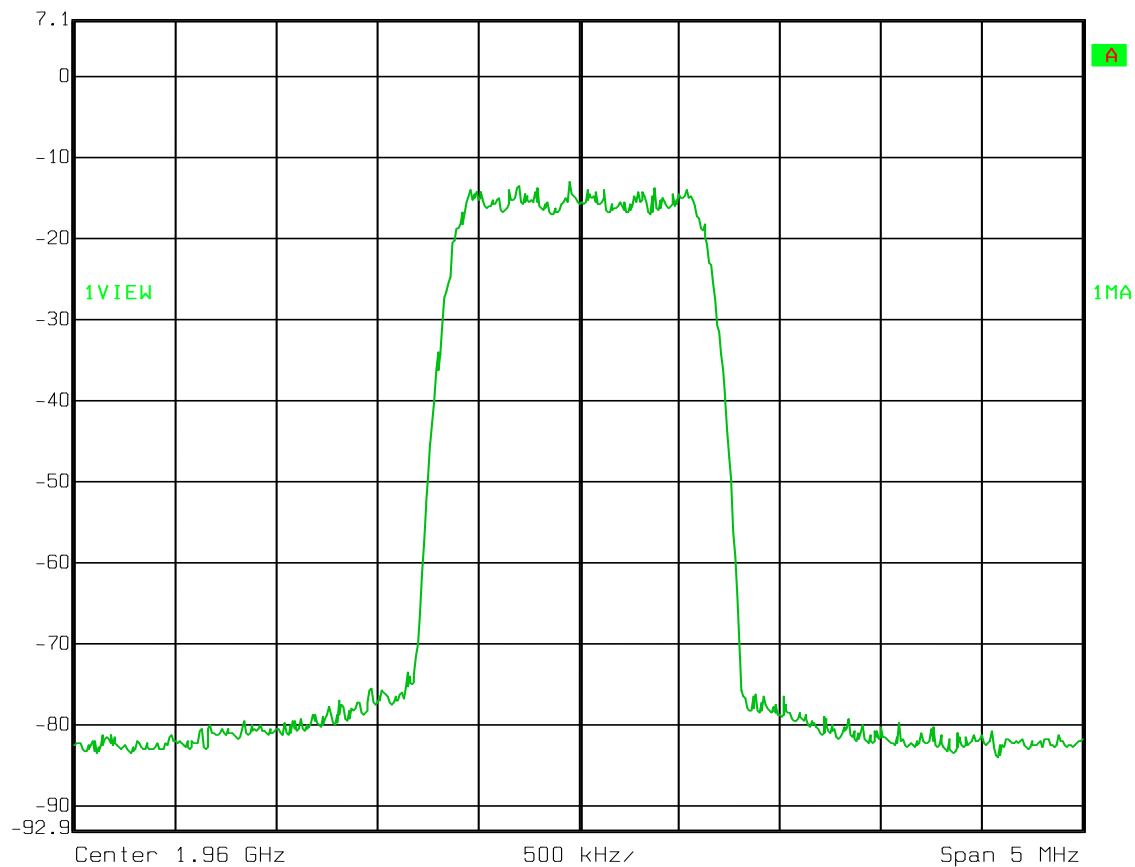

EQUIPMENT: TFAH-US4B


Test Data – Occupied Bandwidth

EDGE - Output
Downlink



Ref Lvl
40 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz	Mixer	-10 dBm
SWT	280 ms	Unit	dBm

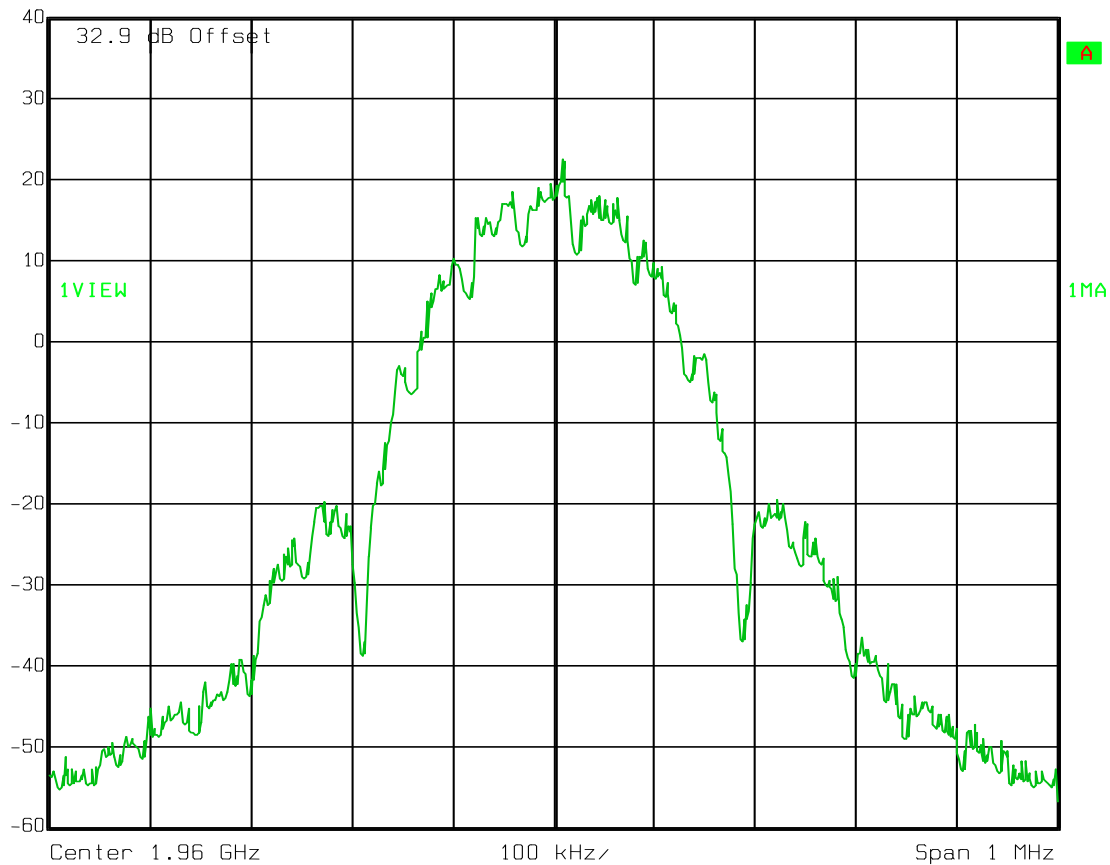

EQUIPMENT: TFAH-US4B


Test Data – Occupied Bandwidth

EDGE - Input
Downlink



Ref Lvl
7.1 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz	Mixer	-10 dBm
SWT	280 ms	Unit	dBm

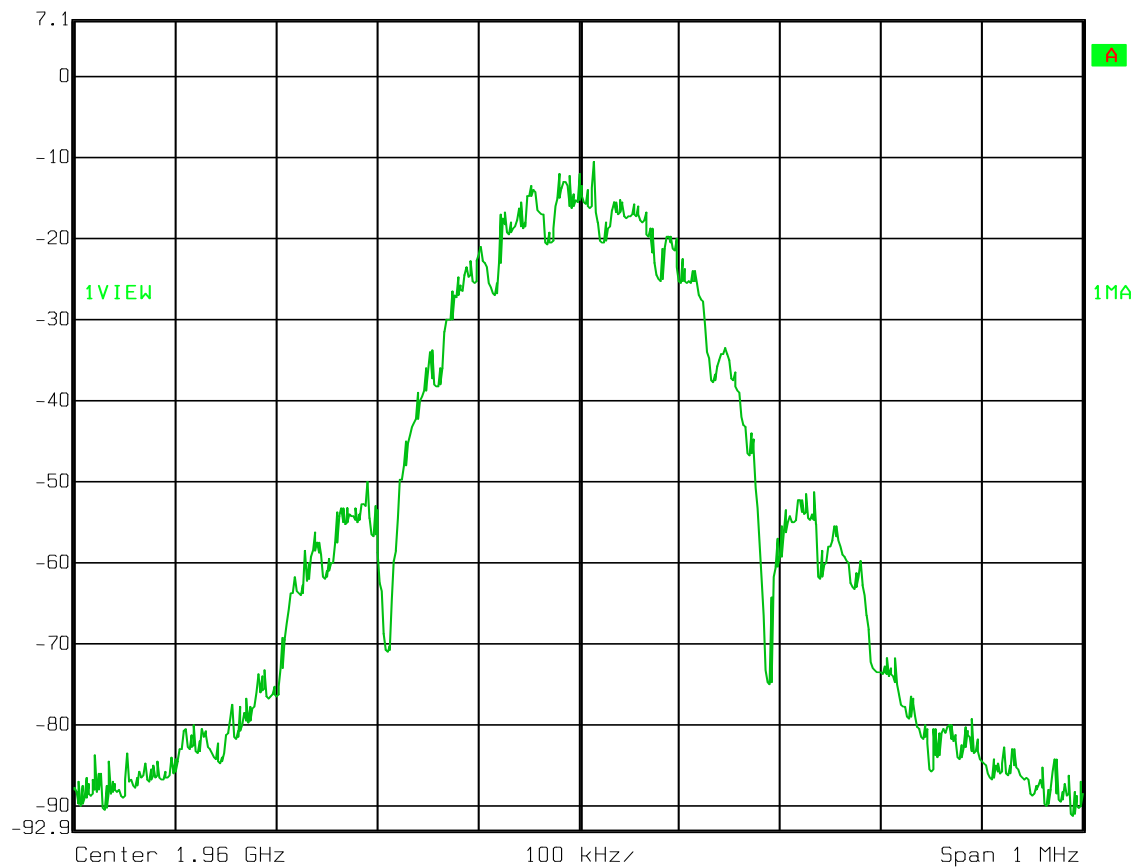

EQUIPMENT: TFAH-US4B


Test Data – Occupied Bandwidth

GSM - Output
Downlink



Ref Lvl
40 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz	Mixer	-10 dBm
SWT	280 ms	Unit	dBm

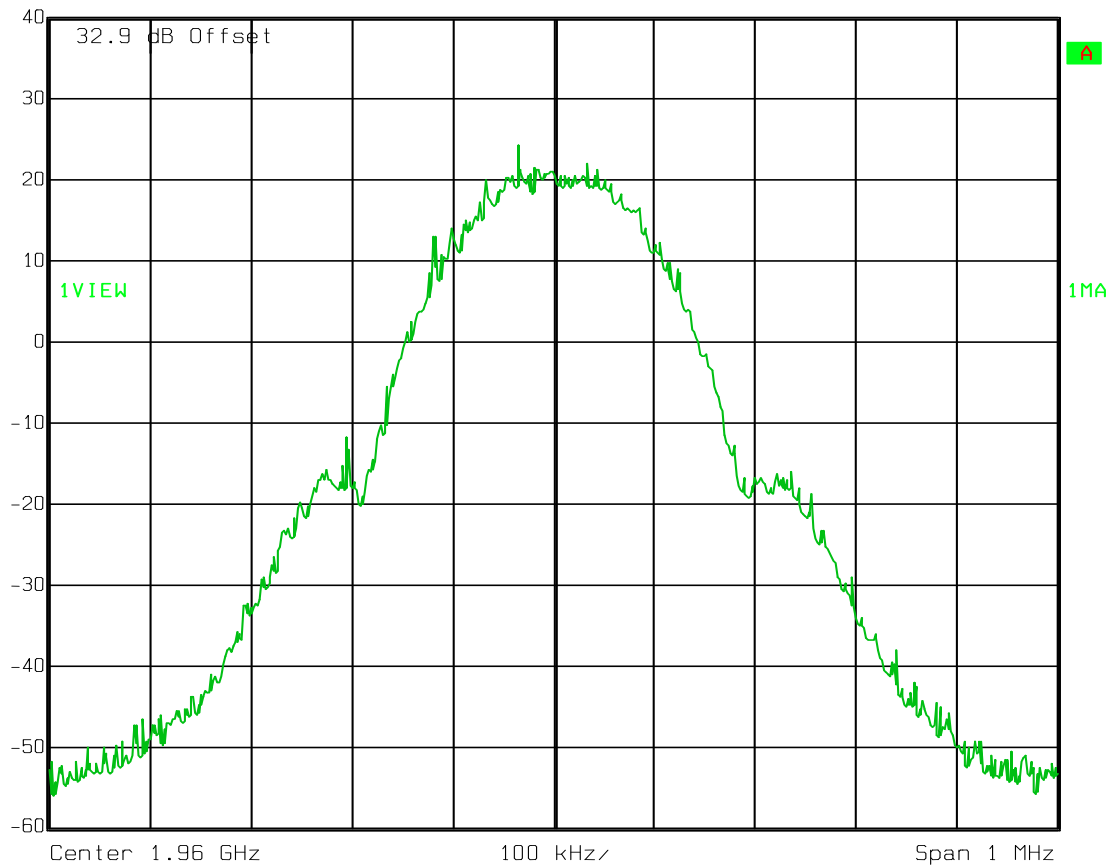


EQUIPMENT: TFAH-US4B

Test Data – Occupied Bandwidth

GSM - Input
DownlinkRef Lvl
7.1 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz	Mixer	-10 dBm
SWT	280 ms	Unit	dBm

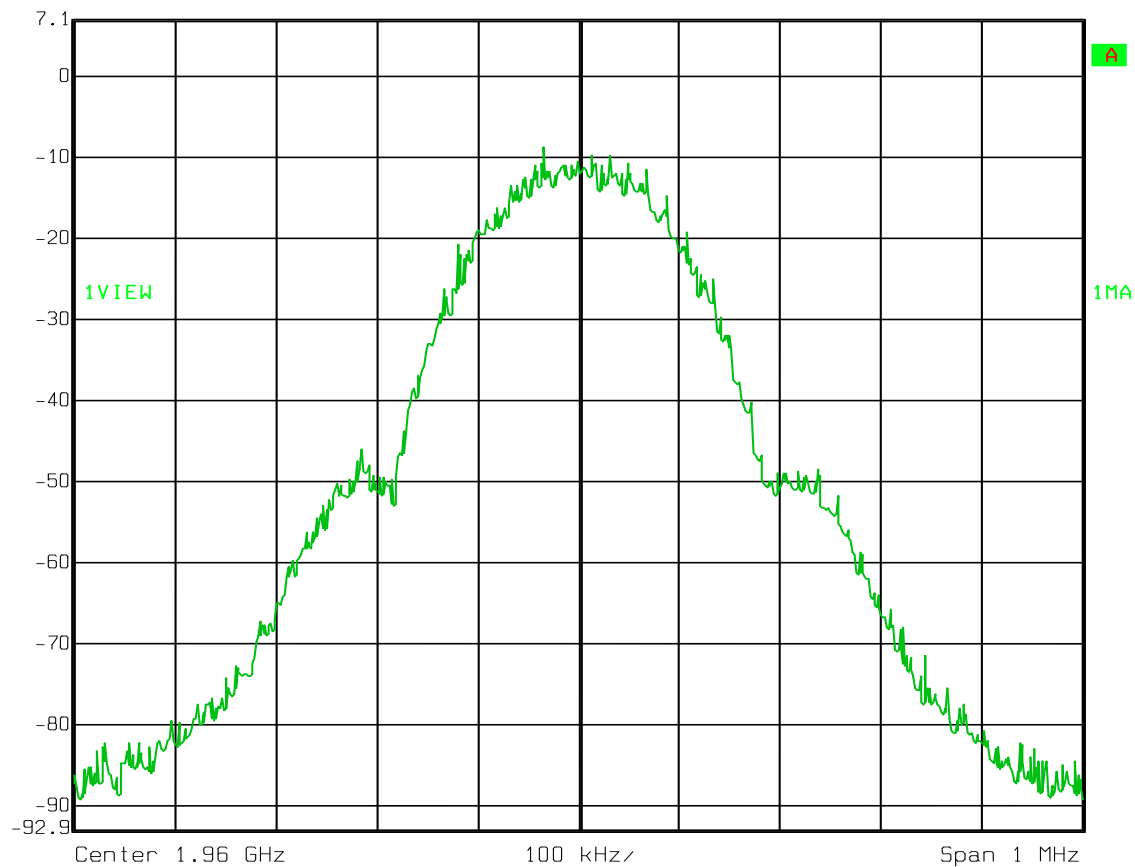

EQUIPMENT: TFAH-US4B

Test Data – Occupied Bandwidth


W-CDMA - Output

Downlink



Ref Lvl
40 dBm


RBW	50 kHz	RF Att	20 dB
VBW	50 kHz	Mixer	-10 dBm
SWT	10 ms	Unit	dBm

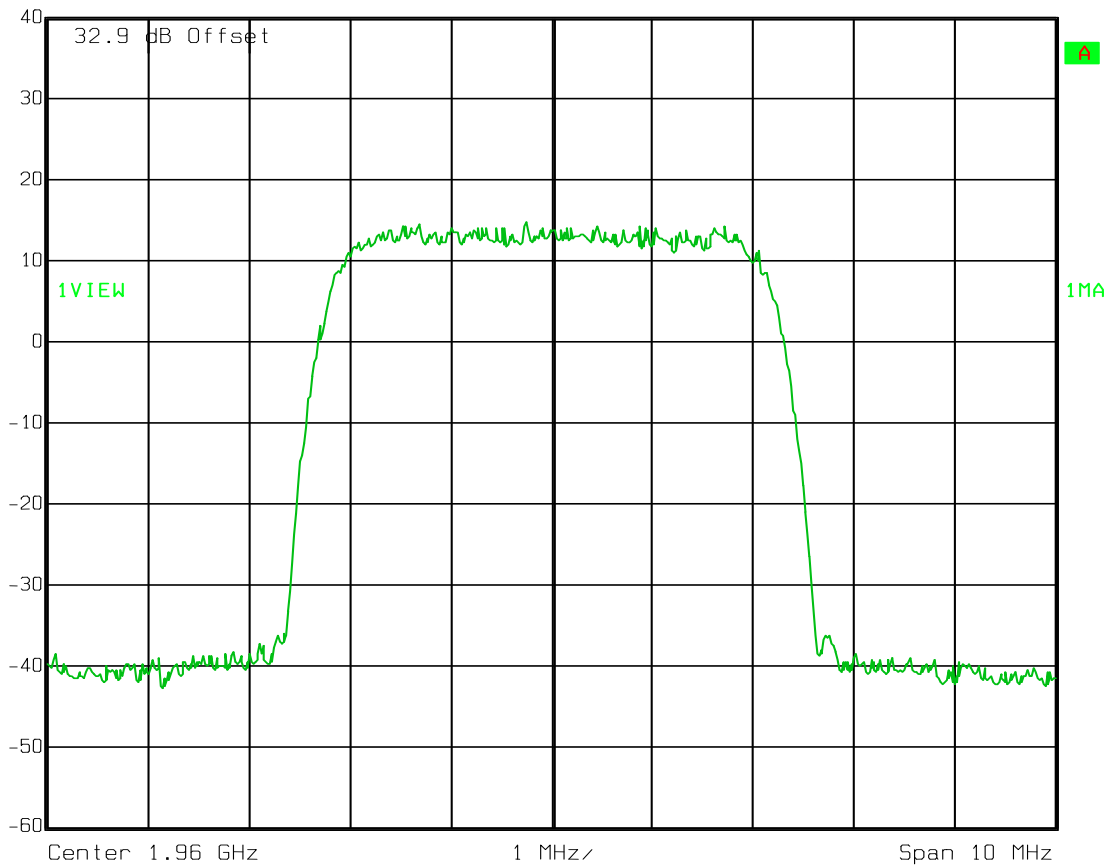

EQUIPMENT: TFAH-US4B

Test Data – Occupied Bandwidth

W-CDMA - Input
Downlink

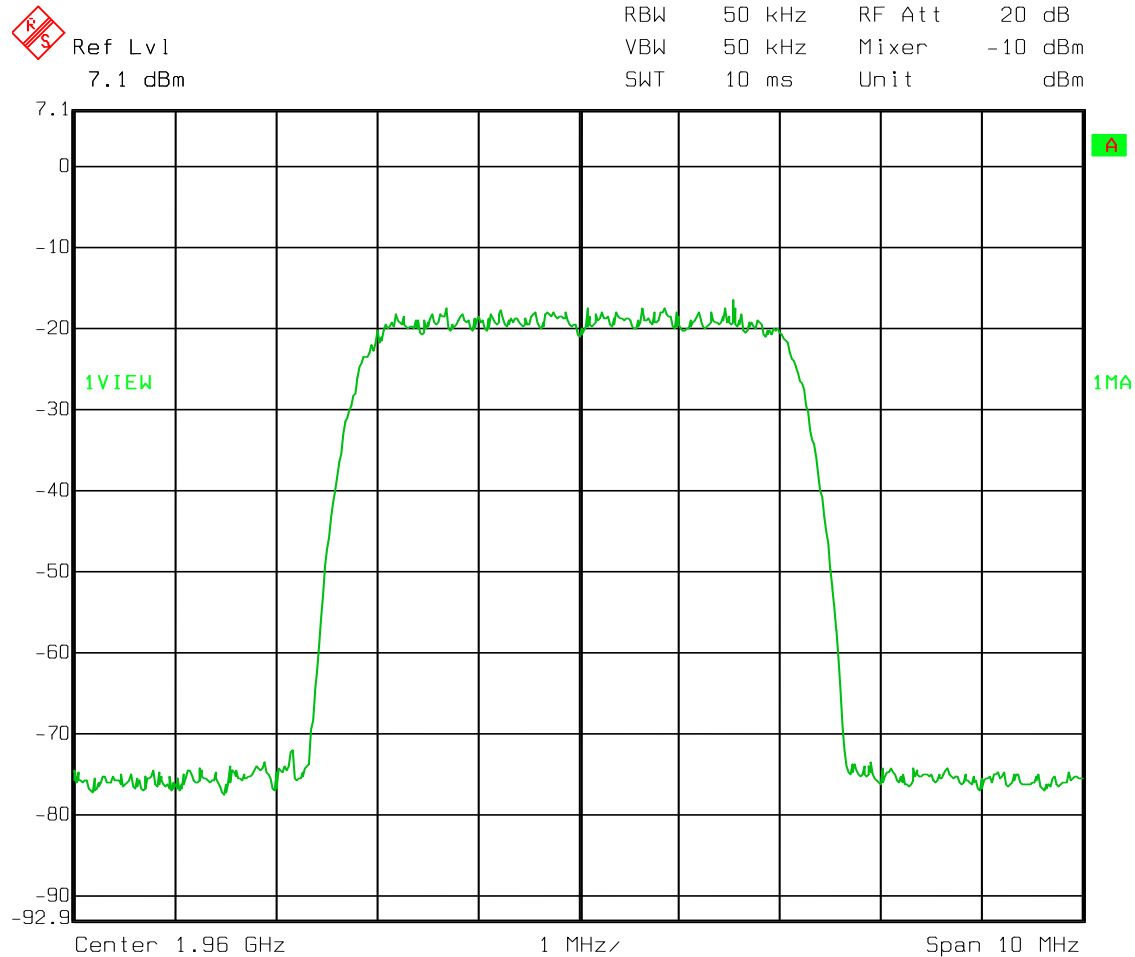

EQUIPMENT: TFAH-US4B


Test Data – Occupied Bandwidth

LTE Output



Ref Lvl
40 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	19.5 ms	Unit	dBm

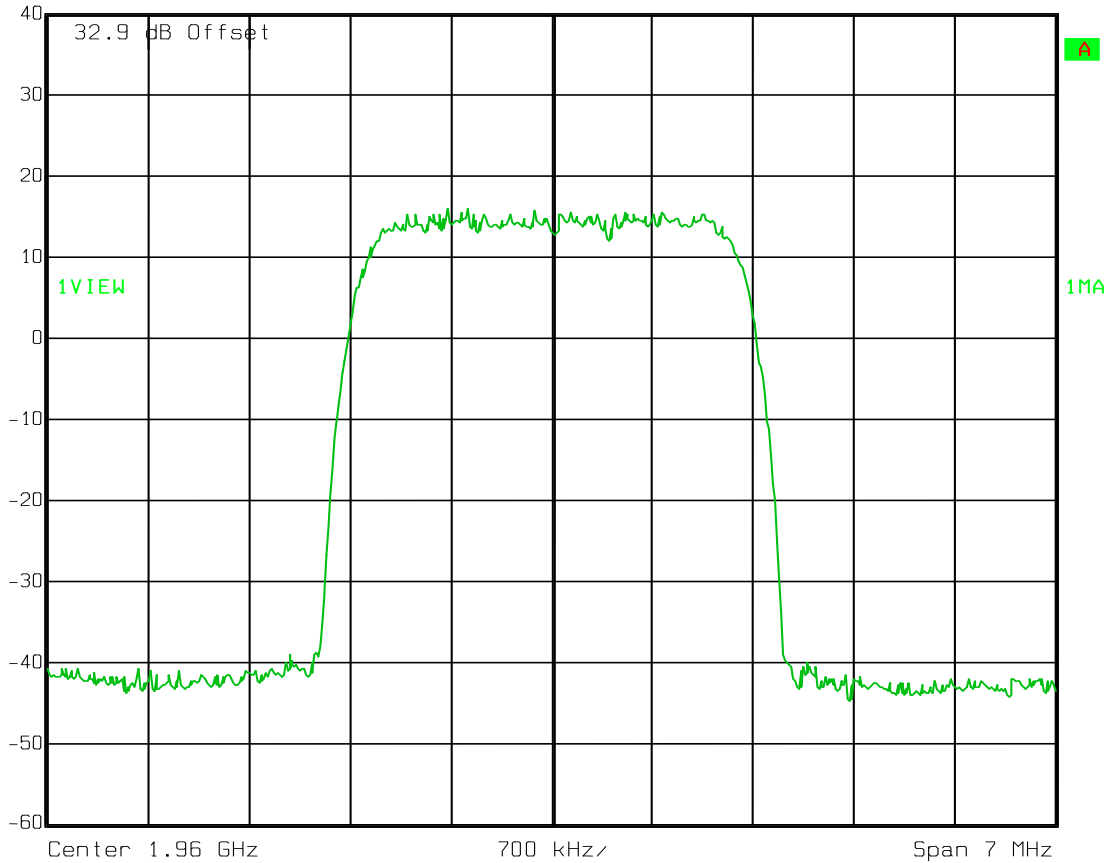

EQUIPMENT: TFAH-US4B


Test Data – Occupied Bandwidth

LTE Input



Ref Lvl
7.1 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	19.5 ms	Unit	dBm

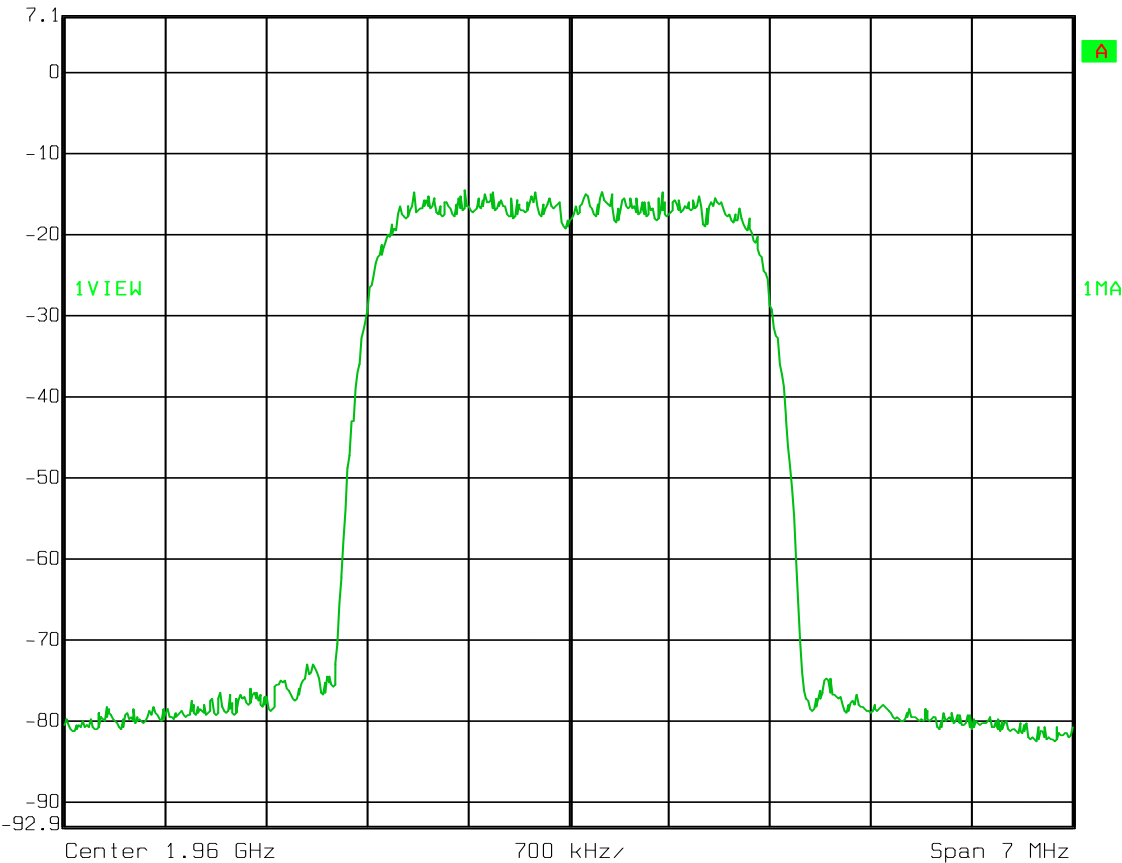

Section 5. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA. NO.: 24.238
TESTED BY: David Light	DATE: 23 May 2011

Test Results: Complies.

Test Data: See attached plot(s).

Equipment Used: 1767-1082-1472-1469

Measurement Uncertainty: +/- 1.7 dB

Temperature: 22 °C

Relative Humidity: 45 %

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals

Lower Bandedge Intermodulation


CDMA

Downlink



Ref Lvl
40 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

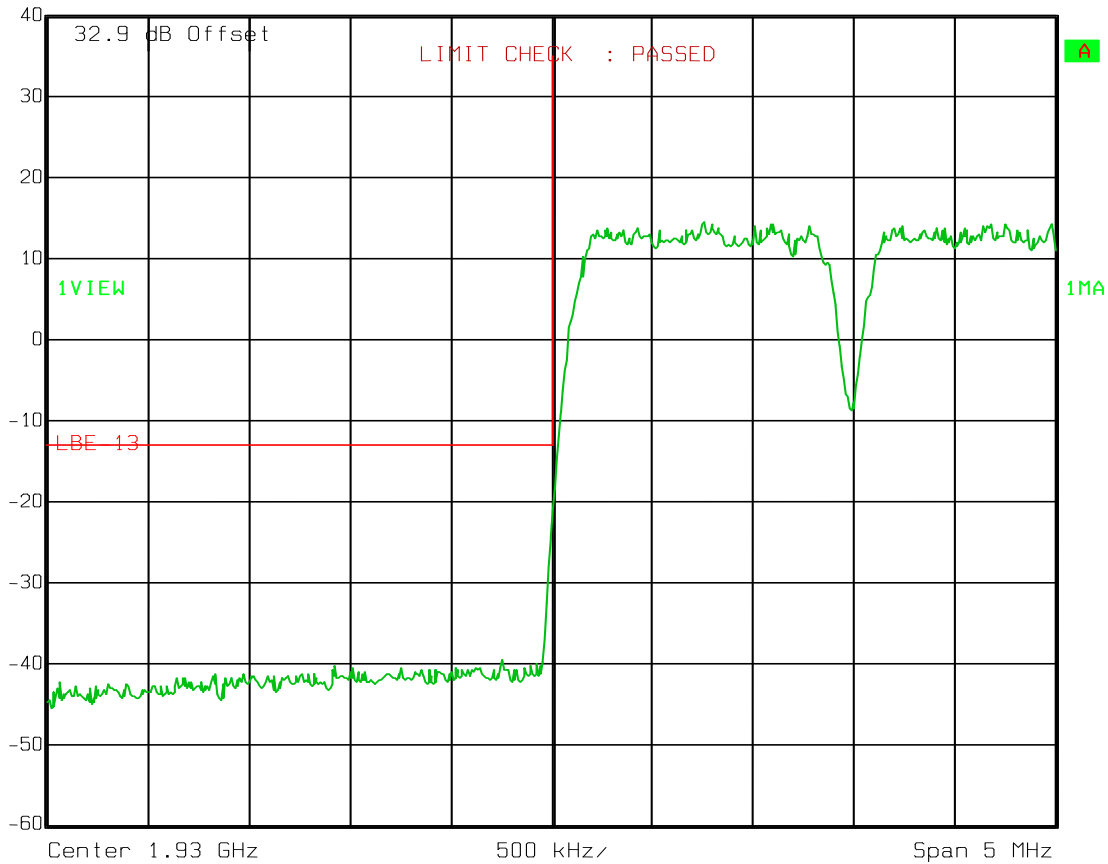

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals

Upper Bandedge Intermodulation


CDMA

Downlink



Ref Lvl
40 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	14 ms	Unit	dBm

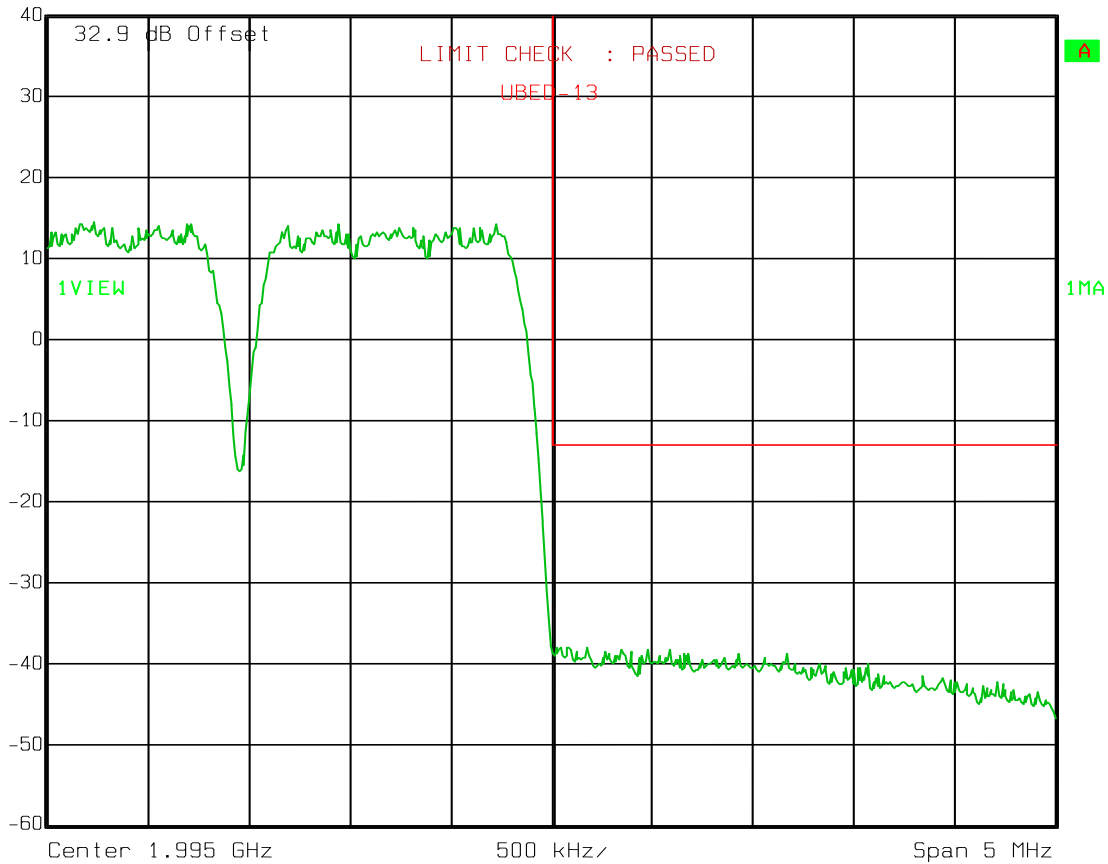

EQUIPMENT: TFAH-US4B


Test Data – Spurious Emissions at Antenna Terminals

Spurs – CDMA

Downlink



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
40 dBm	-20.99 dBm	VBW	1 MHz	Mixer	-10 dBm
	14.55727455 GHz	SWT	200 ms	Unit	dBm

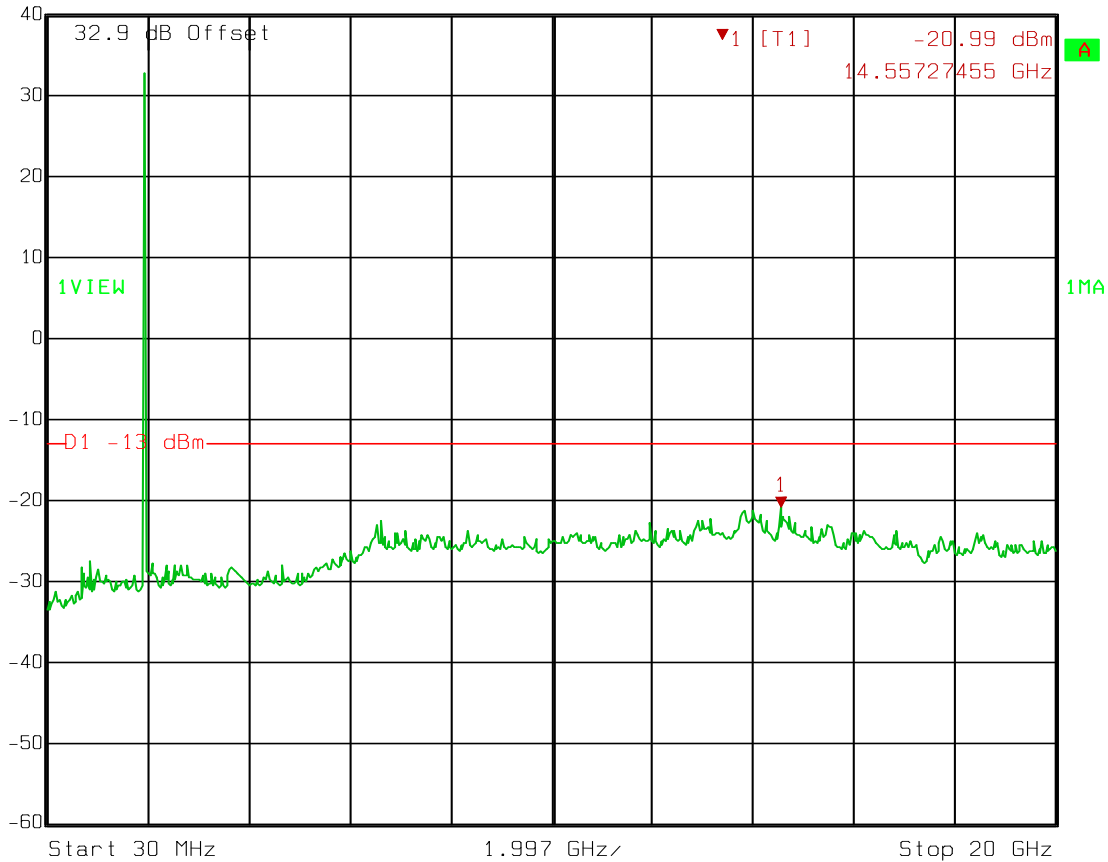

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals


Lower Bandedge Intermodulation

EDGE

Downlink

Ref Lvl
40 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz	Mixer	-10 dBm
SWT	560 ms	Unit	dBm

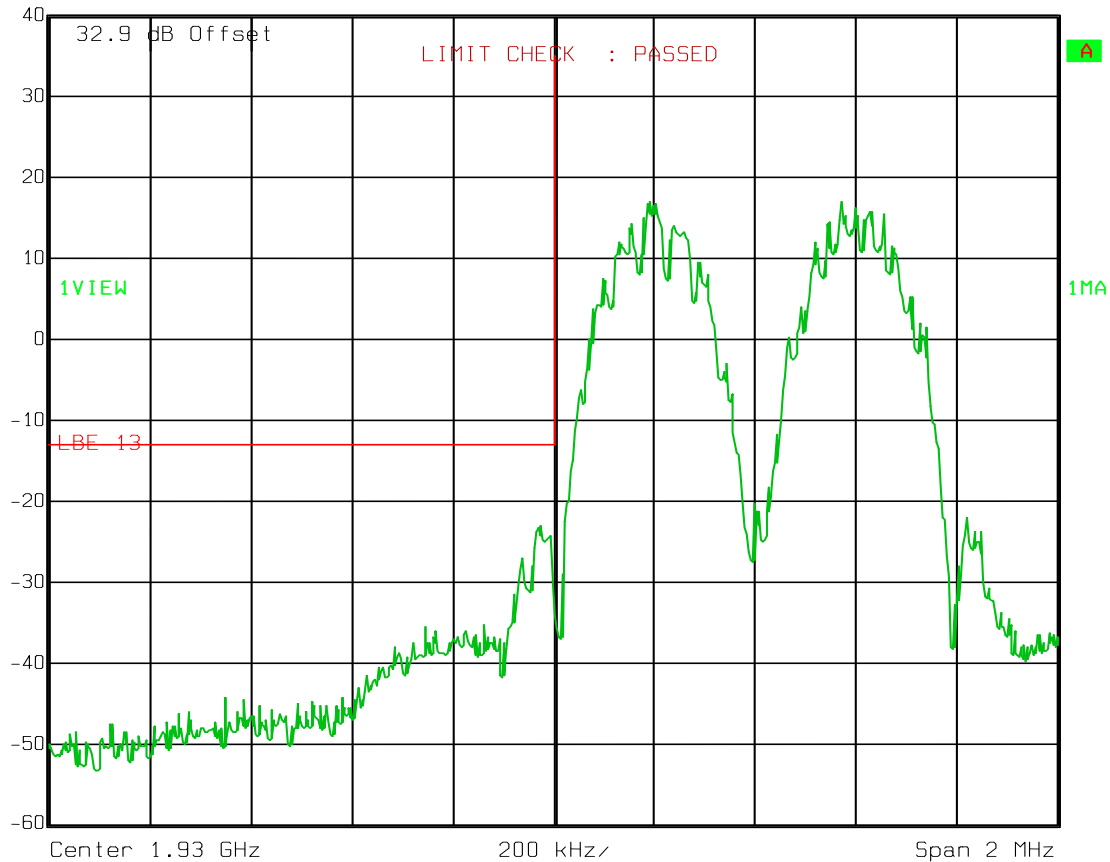

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals

Upper Bandedge Intermodulation


EDGE

Downlink



Ref Lvl
40 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz	Mixer	-10 dBm
SWT	560 ms	Unit	dBm

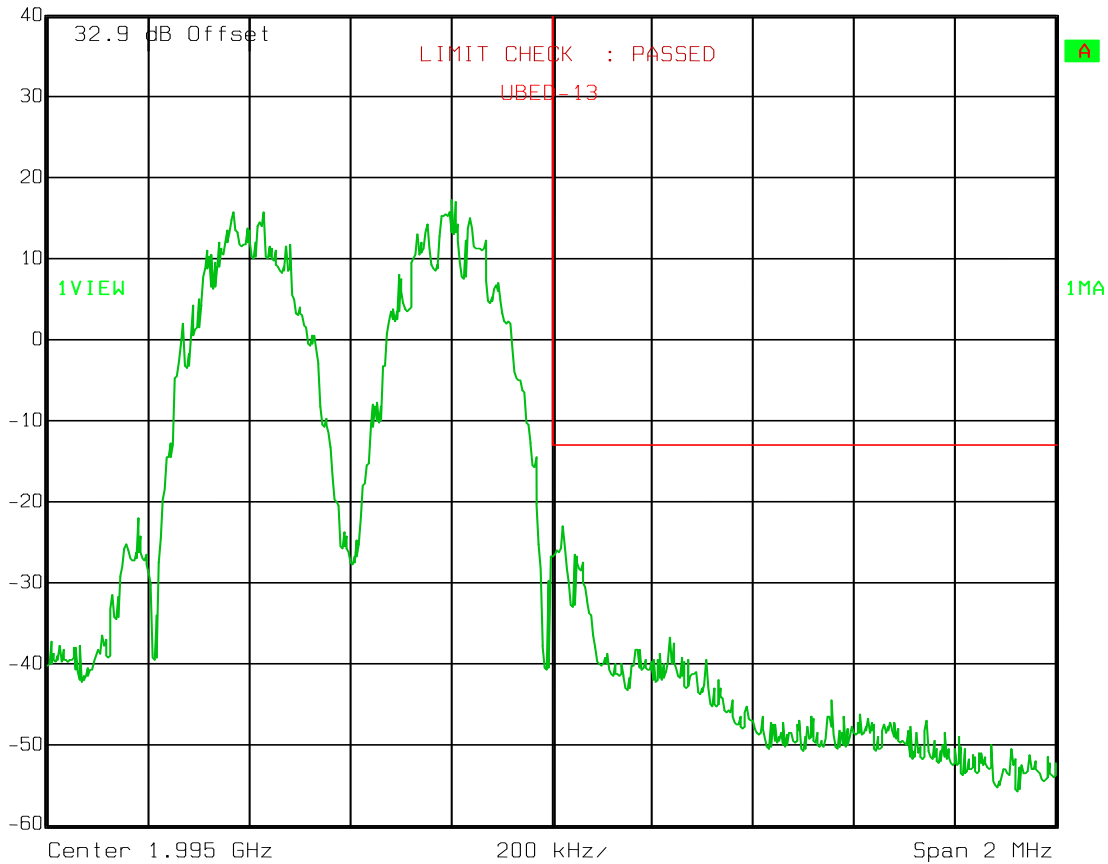

EQUIPMENT: TFAH-US4B


Test Data – Spurious Emissions at Antenna Terminals

Spurs – EDGE

Downlink



Ref Lvl 40 dBm
Marker 1 [T1] -20.97 dBm
14.03701403 GHz
RBW 1 MHz
VBW 1 MHz
SWT 200 ms
RF Att 20 dB
Mixer -10 dBm
Unit dBm

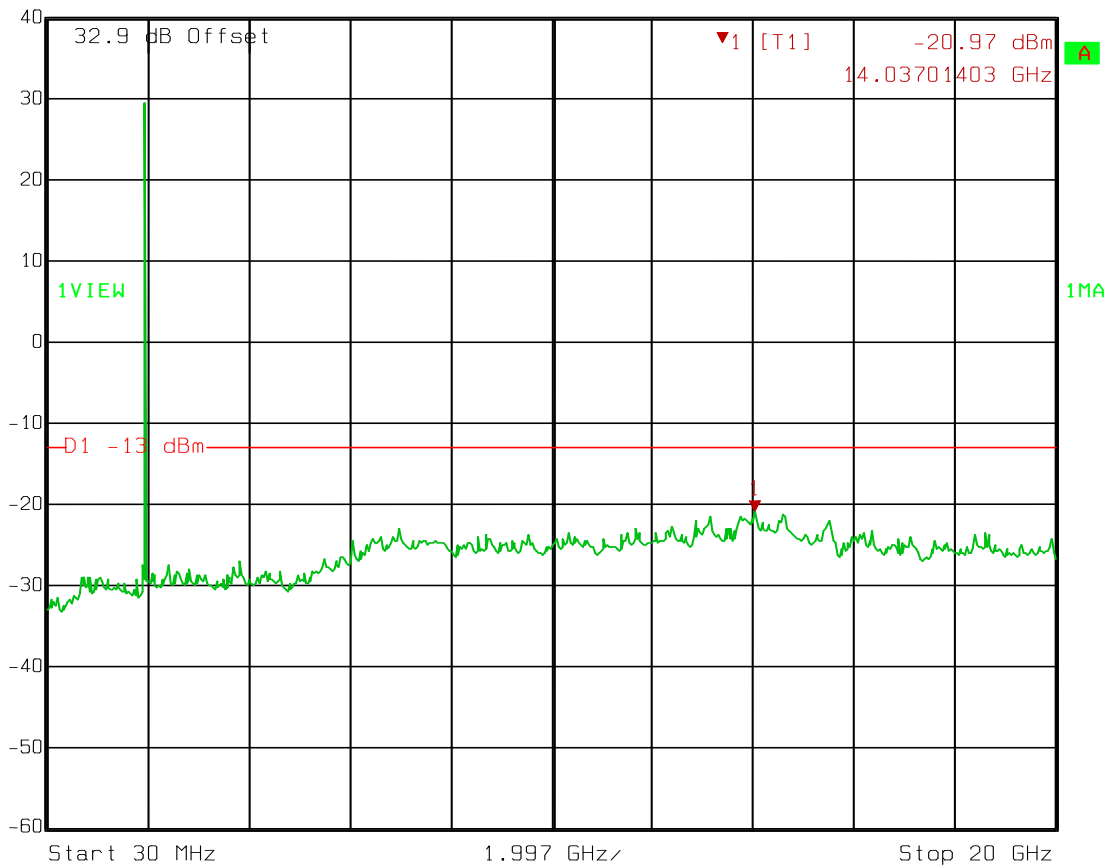

Date: 18.MAY 2011 09:04:04

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals


Lower Bandedge Intermodulation

GSM

Downlink



Ref Lvl	RBW	3 kHz	RF Att	20 dB
40 dBm	VBW	3 kHz	Mixer	-10 dBm
	SWT	560 ms	Unit	dBm

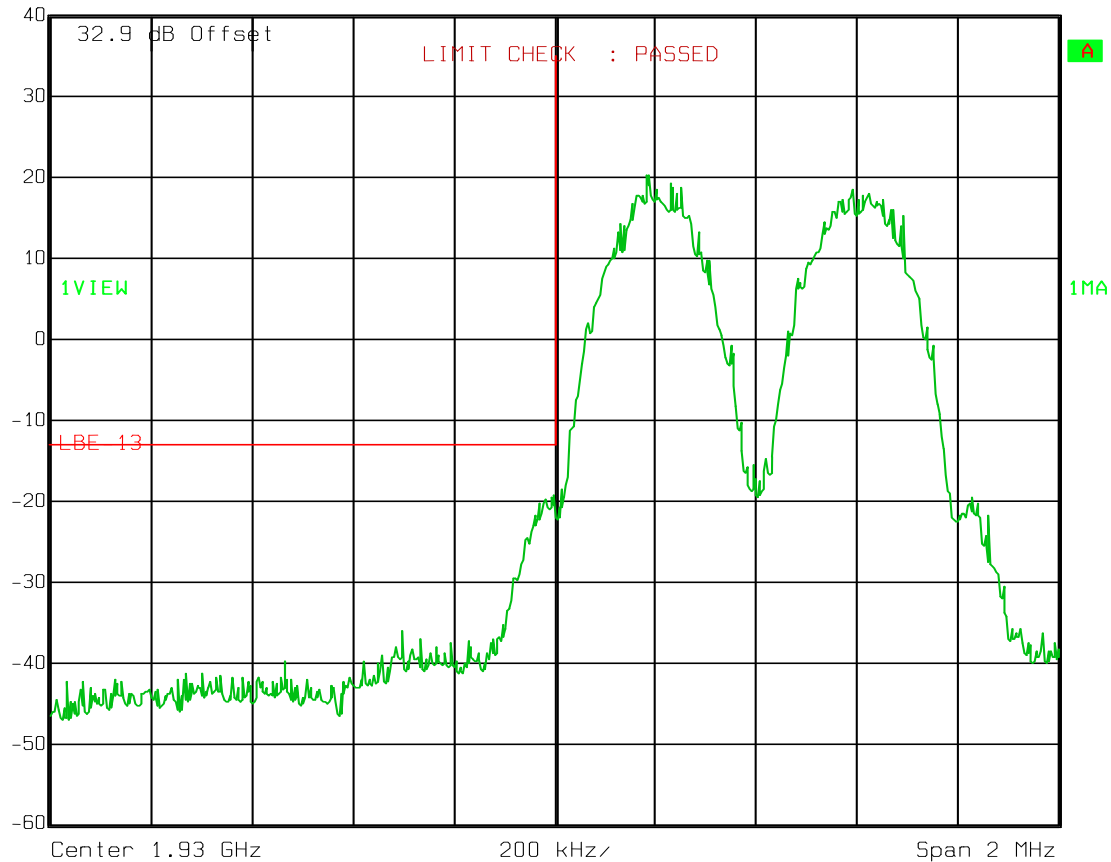

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals


Upper Bandedge Intermodulation

GSM

Downlink

Ref Lvl
40 dBm

RBW	3 kHz	RF Att	20 dB
VBW	3 kHz	Mixer	-10 dBm
SWT	560 ms	Unit	dBm

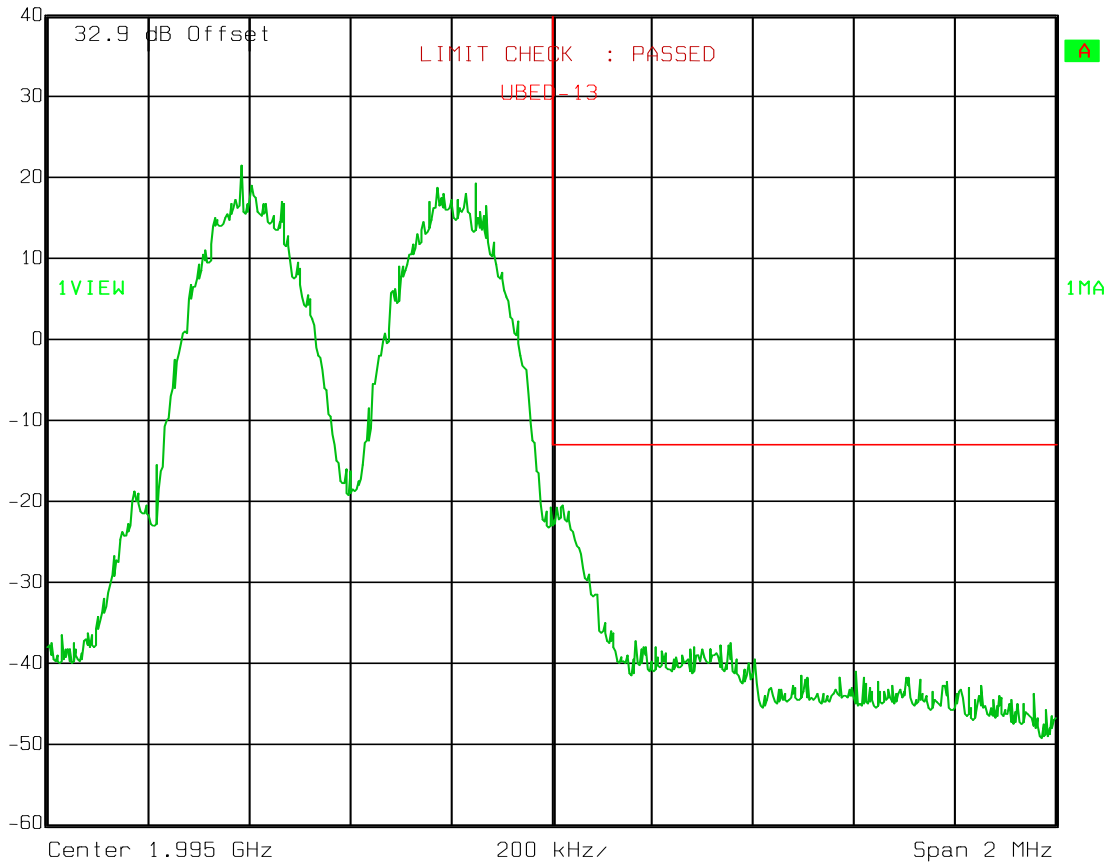

EQUIPMENT: TFAH-US4B


Test Data – Spurious Emissions at Antenna Terminals

Spurs – GSM

Downlink



Ref Lvl 40 dBm
Marker 1 [T1] -20.68 dBm
14.63731463 GHz
RBW 1 MHz
VBW 1 MHz
SWT 200 ms
RF Att 20 dB
Mixer -10 dBm
Unit dBm

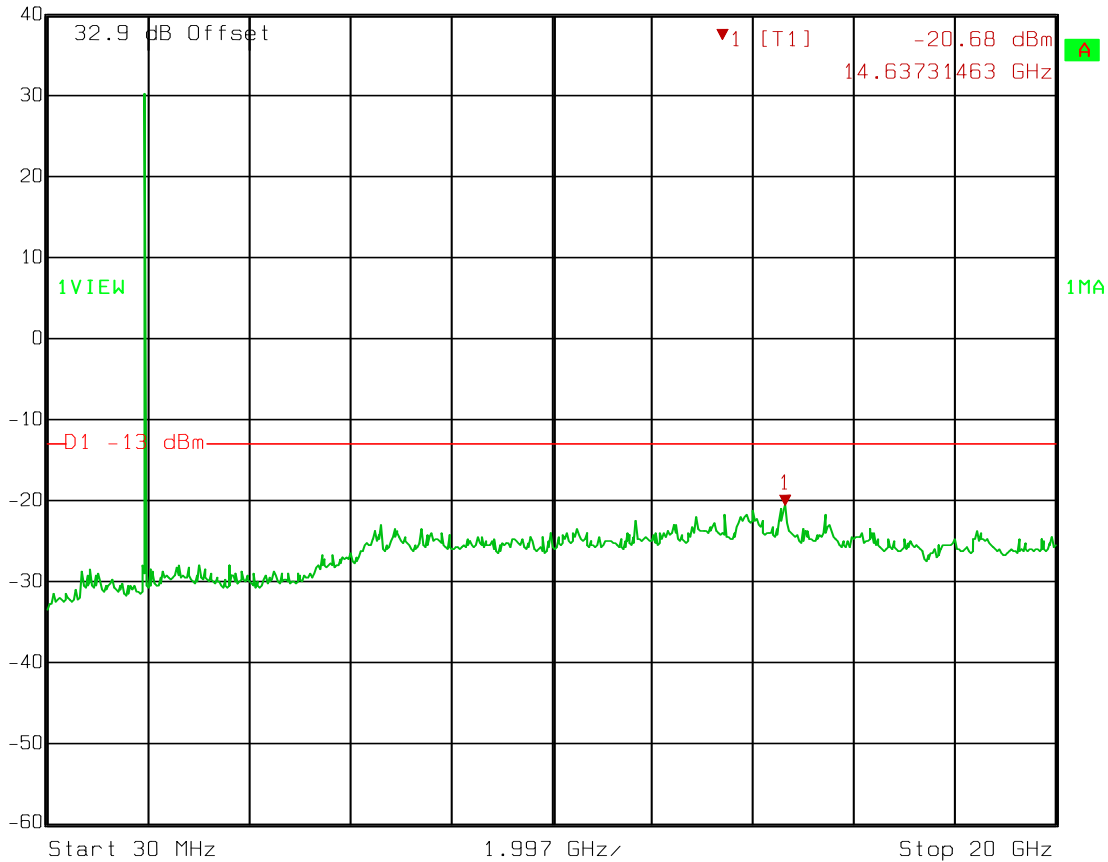

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals

Lower Bandedge Intermodulation


W-CDMA

Downlink



Ref Lvl
40 dBm

RBW	50 kHz	RF Att	20 dB
VBW	50 kHz	Mixer	-10 dBm
SWT	12 ms	Unit	dBm

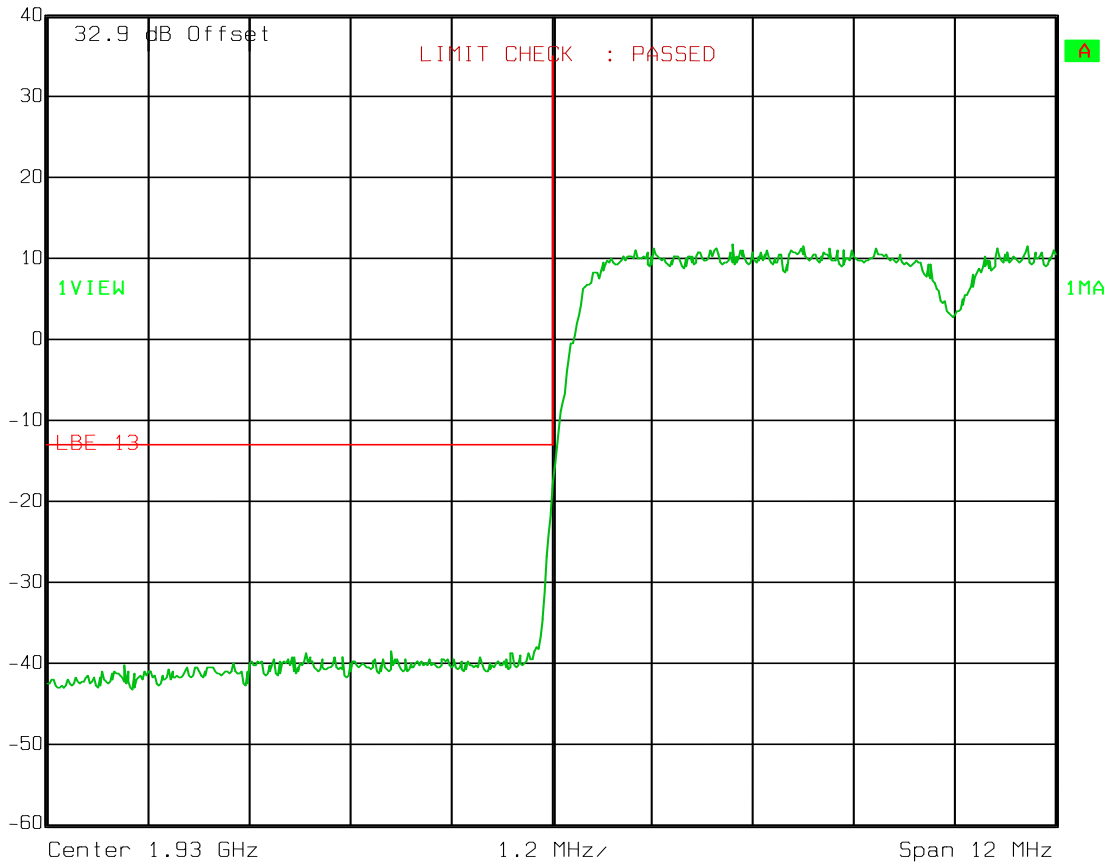

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals


Upper Bandedge Intermodulation

W-CDMA

Downlink

Ref Lvl
40 dBm


RBW	50 kHz	RF Att	20 dB
VBW	50 kHz	Mixer	-10 dBm
SWT	12 ms	Unit	dBm

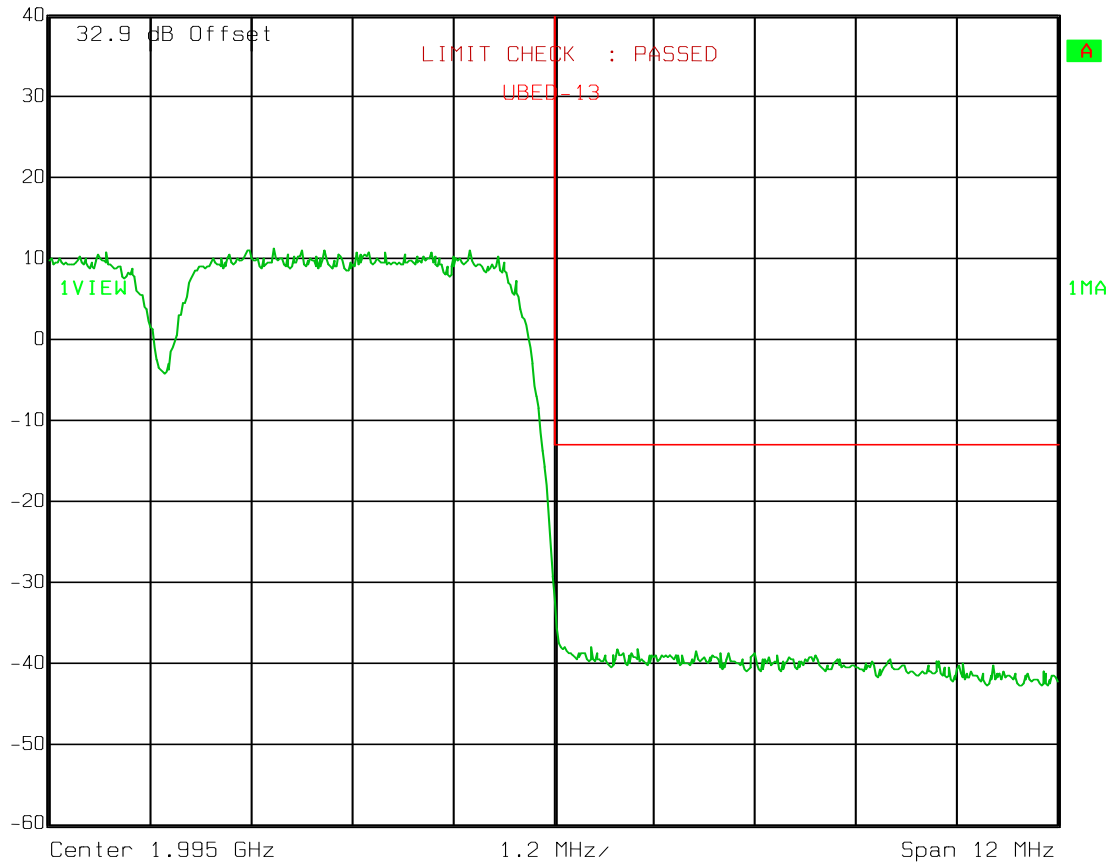

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals

Spurs – W-CDMA -
Downlink

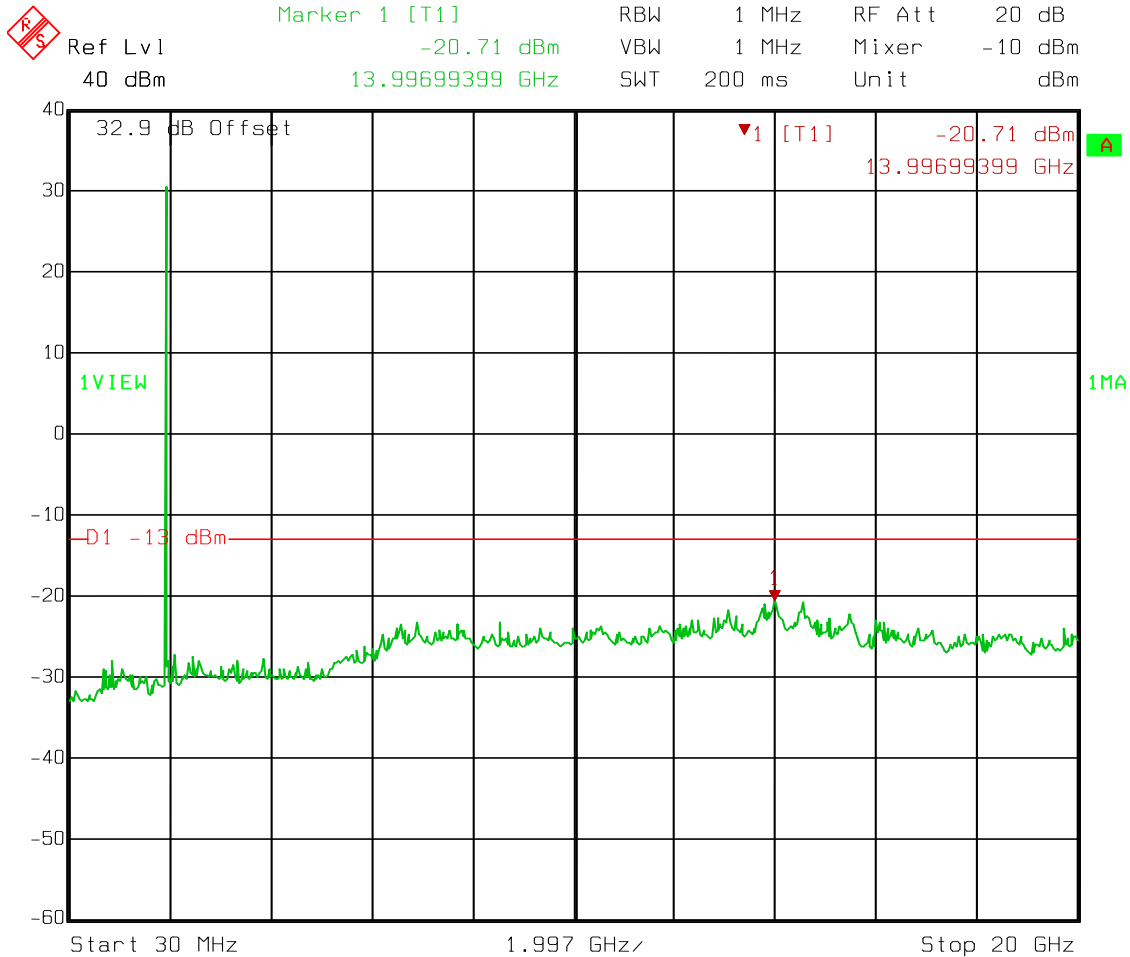

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals


Lower Bandedge Intermodulation

LTE



Ref Lvl
40 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	28 ms	Unit	dBm

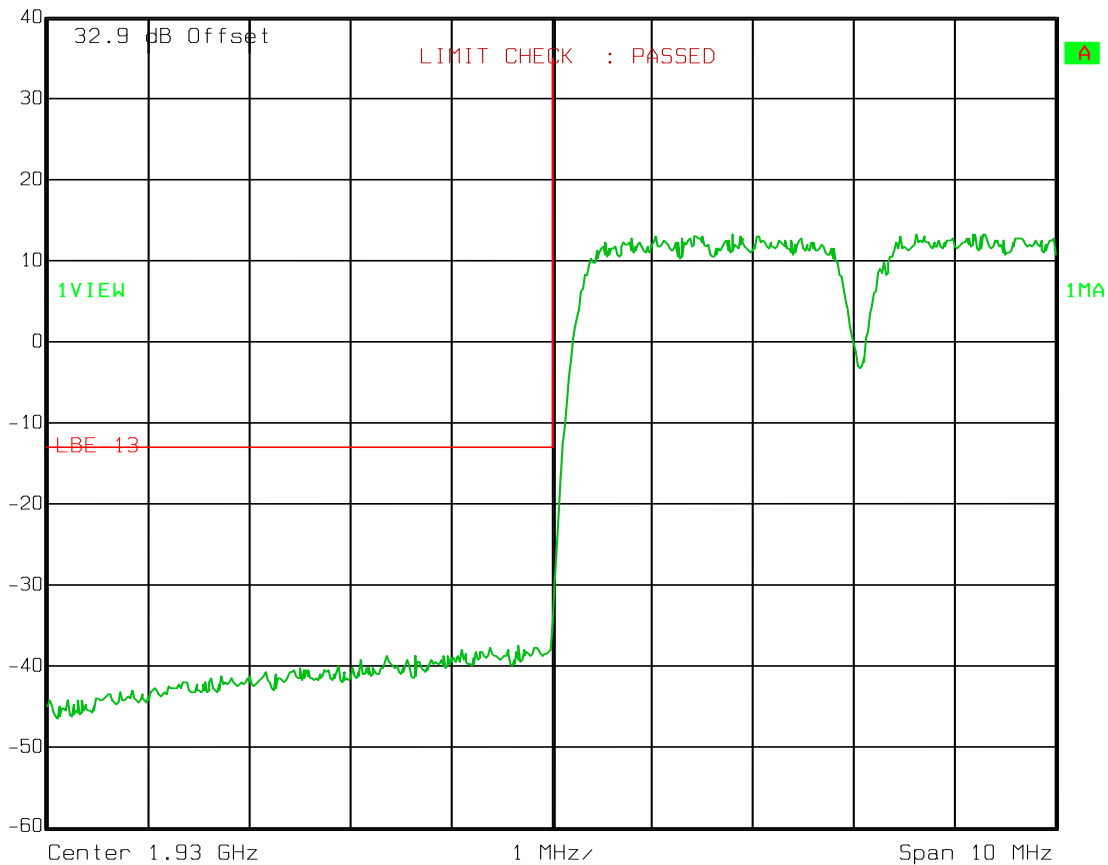

EQUIPMENT: TFAH-US4B

Test Data – Spurious Emissions at Antenna Terminals


Upper Band edge Intermodulation

LTE



Ref Lvl
40 dBm

RBW	30 kHz	RF Att	20 dB
VBW	30 kHz	Mixer	-10 dBm
SWT	28 ms	Unit	dBm

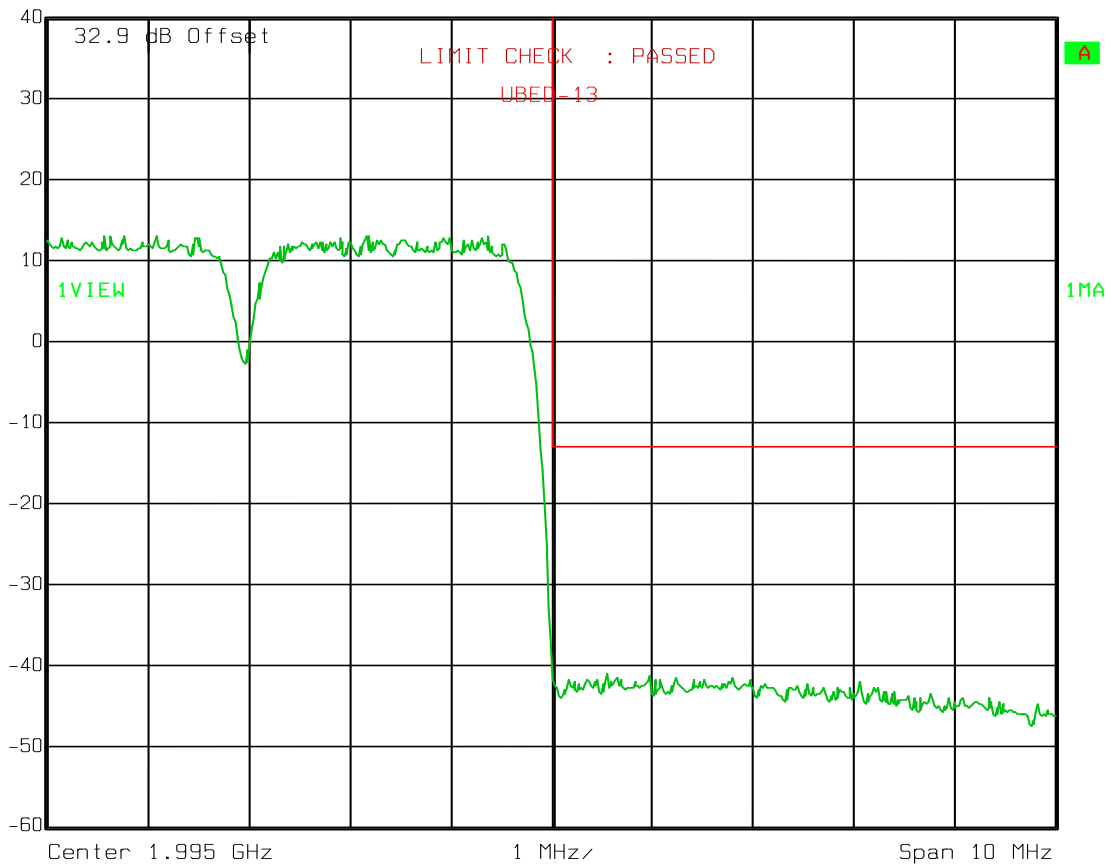

EQUIPMENT: TFAH-US4B


Test Data – Spurious Emissions at Antenna Terminals

Spurs

LTE



Ref Lvl 40 dBm
Marker 1 [T1] -21.39 dBm
13.87693387 GHz
RBW 1 MHz
VBW 1 MHz
SWT 200 ms
RF Att 20 dB
Mixer -10 dBm
Unit dBm

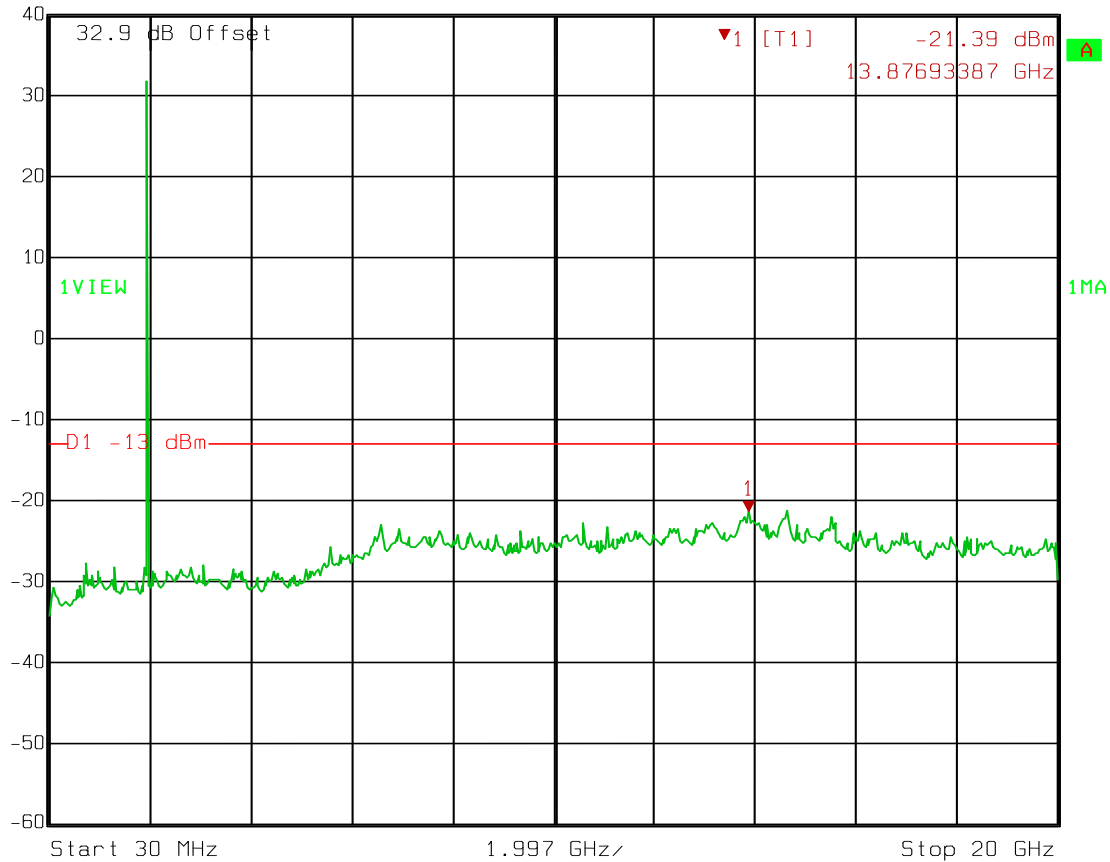

Section 6. Field Strength of Spurious

NAME OF TEST: Field Strength of Spurious Emissions	PARA. NO.: 24.238
TESTED BY: David Light	DATE: 24 May 2011

Test Results: Complies.**Test Data:** The spectrum was searched from 30 MHz to the tenth harmonic of the carrier. There were no emissions detected above the noise floor which was at least 20 dB below the specification limit.

RBW=VBW=100 kHz below 1000 MHz

RBW=VBW=1 MHz above 1000 MHz

Peak detector

Equipment Used: 1767-1484-1485-1016-993-791-1763**Measurement Uncertainty:** +/-1.7 dB**Temperature:** 24 °C**Relative Humidity:** 49 %

Section 7. Test Equipment List

Asset Tag	Description	Manufacturer	Model	Serial #	Last Cal	Next Cal
993	Antenna, Horn	A.H. Systems	SAS-200/571	162	09-Sep-2009	09-Sep-2011
1016	Preamplifier	Hewlett Packard	8449A	2749A00159	19-Jun-2010	19-Jun-2011
1082	Cable	Astrolab	32027-2- 29094-72TC		N/R	
1469	Attenuator,	MCL Inc.	BW-S10W2 10db-2WDC		N/R	
1472	Attenuator,	Omni Spectra	20600-20db		N/R	
1484	Cable	Storm	PR90-010- 072		19-Jun-2010	19-Jun-2011
1485	Cable	Storm	PR90-010- 216		19-Jun-2010	19-Jun-2011
1763	Antenna, Bilog	Schaffner	CBL 6111D	22926	11-Feb-2011	11-Feb-2012
1767	Receiver	Rohde & Schwartz	ESIB26	837491/0002	01-Dec-2010	01-Dec-2011
791	Pre Amplifier	Nemko, USA	CRA69 321003 9605	119	19-May-2011	19-May-2012

ANNEX A - TEST DETAILS

NAME OF TEST: RF Power Output

PARA. NO.: 2.1046

Minimum Standard: Para. No.24.232. Base stations are limited to 1640 watts peak E.I.R.P. with an antenna height up to 300 meters HAAT. In no case may the peak output power of a base station transmitter exceed 100 watts.

Method Of Measurement:

Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter or spectrum analyzer. Power output is measured with the maximum rated input level.

Integral Antenna:

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic radiator.

NAME OF TEST: Occupied Bandwidth

PARA. NO.: 2.1049

Minimum Standard: Input/Output

Method Of Measurement:

CDMA

Spectrum analyzer settings:

RBW=VBW=30 kHz

Span: 5 MHz

Sweep: Auto

GSM / EDGE

RBW=VBW= 3 kHz

Span: 1 MHz

Sweep: Auto

TDMA

RBW=VBW= 1 kHz

Span: 1 MHz

Sweep: Auto

W-CDMA

RBW=VBW= 100 kHz

Span: 10 MHz

Sweep: Auto

NAME OF TEST: Spurious Emission at Antenna Terminals PARA. NO.: 24.238

Minimum Standard: Para. No.24.238(a). On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power by at least $43 + 10 \log (P)$ dB.

Method Of Measurement:

Spectrum analyzer settings:

CDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 30 kHz (< 1MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: 6 Sweeps

GSM / EDGE

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 3 kHz (< 1 MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: Disabled

TDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 3 kHz (< 1 MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: Disabled

W-CDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 100 kHz (< 1MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: 6 Sweeps

To demonstrate compliance at band edges the frequency of the input signal is set to the lowest and highest assigned channel and the center frequency of the spectrum analyzer is set to the upper and lower edges of the appropriate frequency block.

NAME OF TEST: Field Strength of Spurious Radiation	PARA. NO.: 24.238
---	--------------------------

Minimum Standard: Para. No.24.238(a). On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power by at least $43 + 10 \log (P)$ dB.

Method of Measurement TIA/EIA-603-1992

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic radiator.

NAME OF TEST: Frequency Stability**PARA. NO.: 2.1055**

Minimum Standard: Para. No. 24.235. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Method Of Measurement:Frequency Stability With Voltage Variation


The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. The frequency counter and signal generator are phase locked with the same 10 MHz reference frequency by connecting the 10 MHz ref. out of the counter to the 10 MHz ref, in of the signal generator. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation


The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.

ANNEX B - TEST DIAGRAMS



Para. No. 2.985 - R.F. Power Output

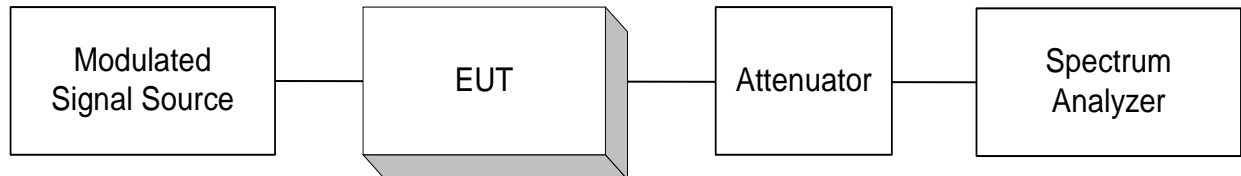


Para. No. 2.989 - Occupied Bandwidth

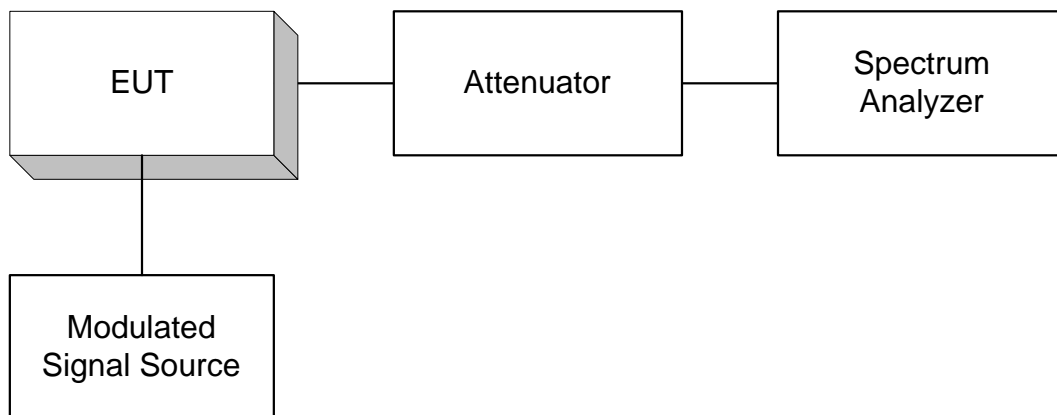

Para. No. 2.991 Spurious Emissions at Antenna Terminals

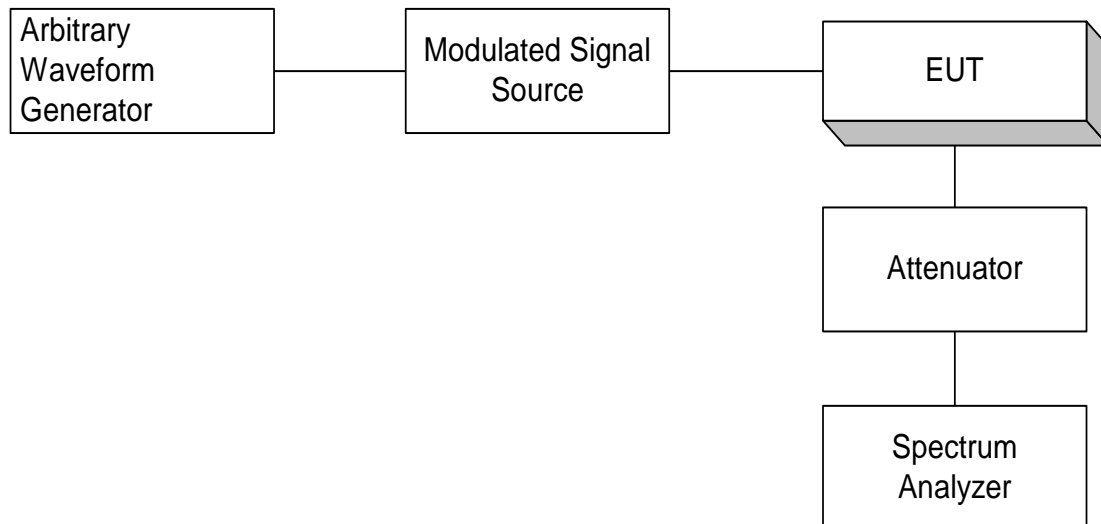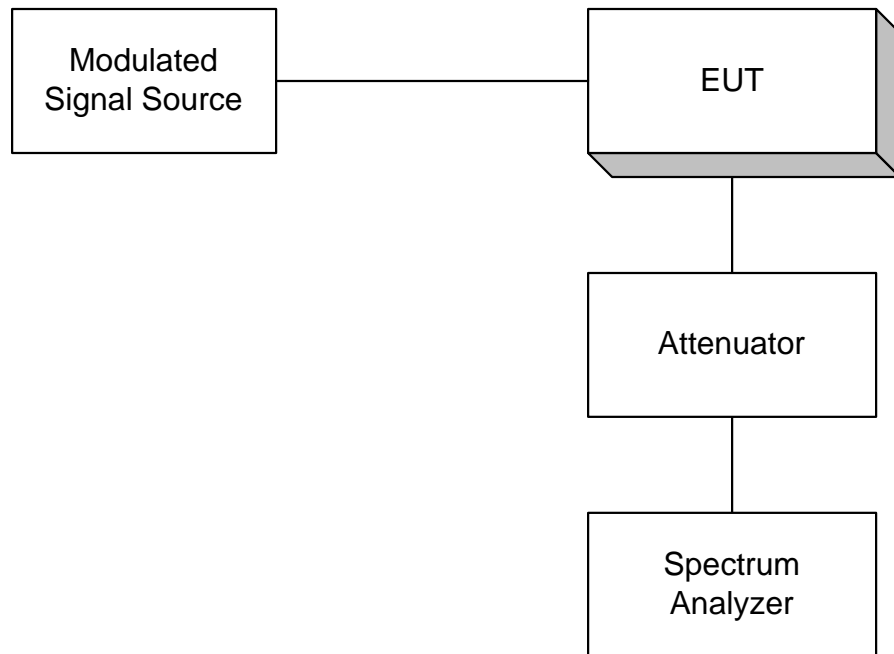

Para. No. 2.993 - Field Strength of Spurious Radiation

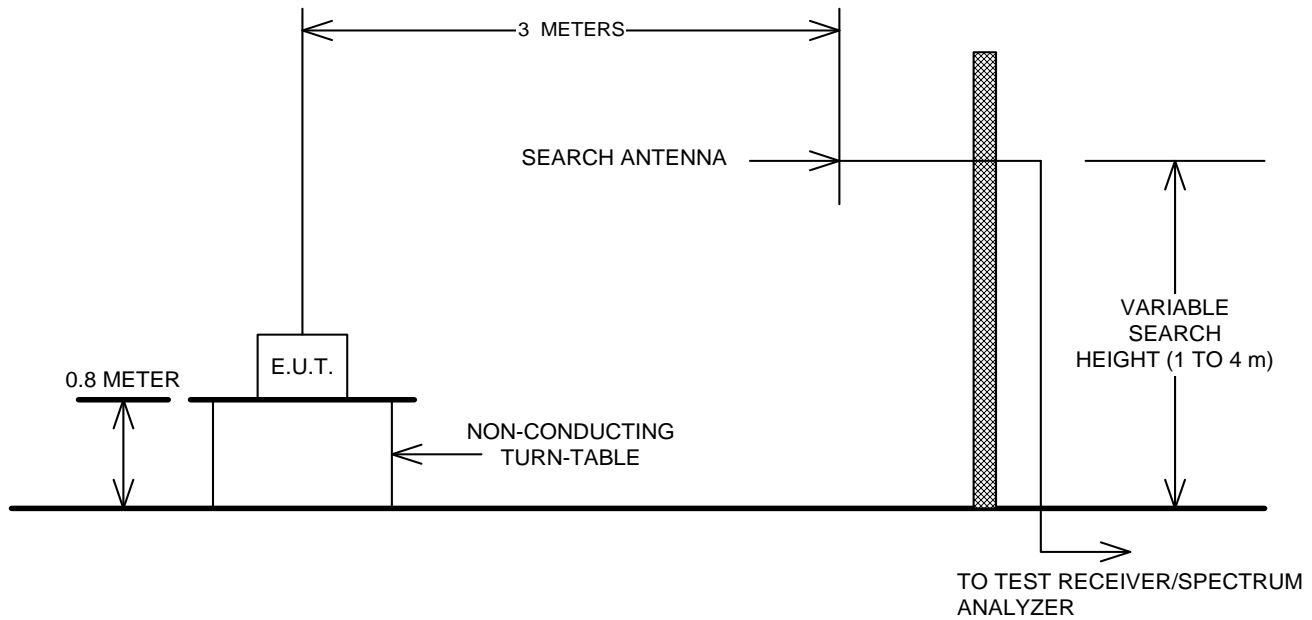

Para. No. 2.995 - Frequency Stability

