

System Check_Body_835MHz_100714

DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850_100714 Medium parameters used: $f = 835$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.22, 8.22, 8.22); Calibrated: 2009/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM3; Type: QD OVA 001 BB; Serial: 1079
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.998 mW/g



Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.7 V/m; Power Drift = -0.00112 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.923 mW/g; SAR(10 g) = 0.610 mW/g

Maximum value of SAR (measured) = 0.995 mW/g

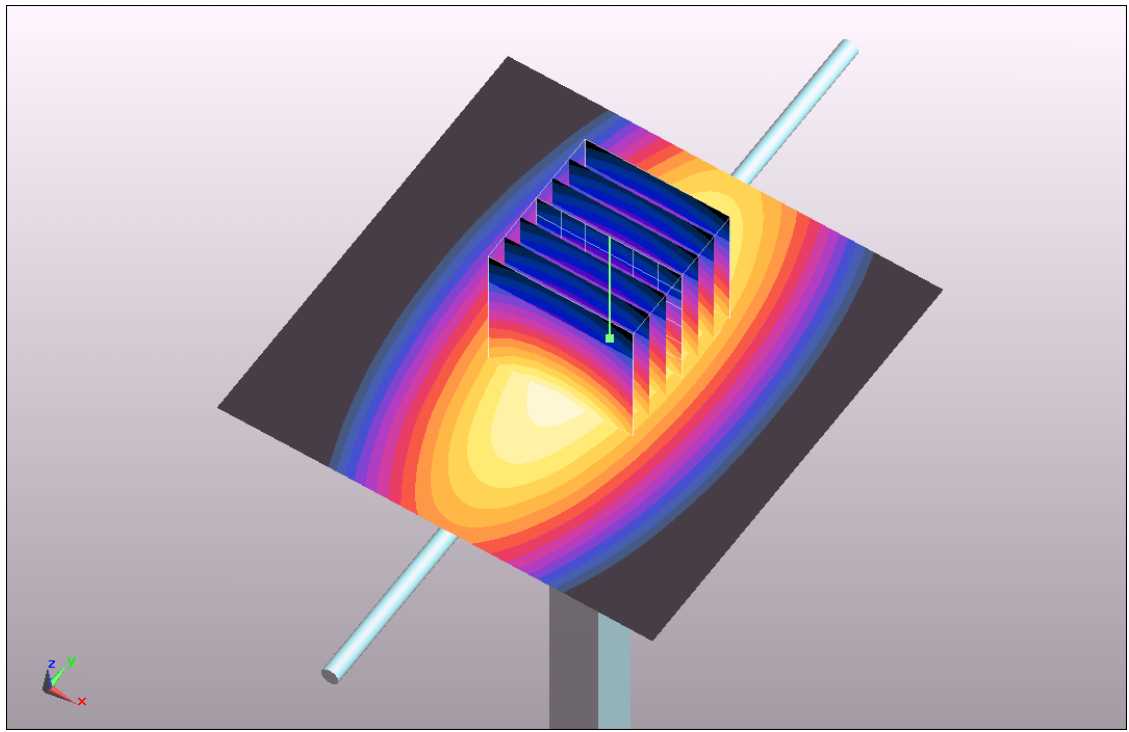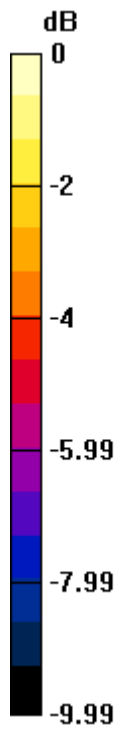

0 dB = 0.995mW/g

System Check_Body_1800MHz_100725

DUT: Dipole 1800 MHz

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: MSL_1800_100725 Medium parameters used: $f = 1800$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³



Ambient Temperature : 23.7 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.37, 7.37, 7.37); Calibrated: 2009/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 4.21 mW/g

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 50.7 V/m; Power Drift = -0.014 dB
Peak SAR (extrapolated) = 6.82 W/kg
SAR(1 g) = 3.63 mW/g; SAR(10 g) = 1.86 mW/g
Maximum value of SAR (measured) = 4.09 mW/g

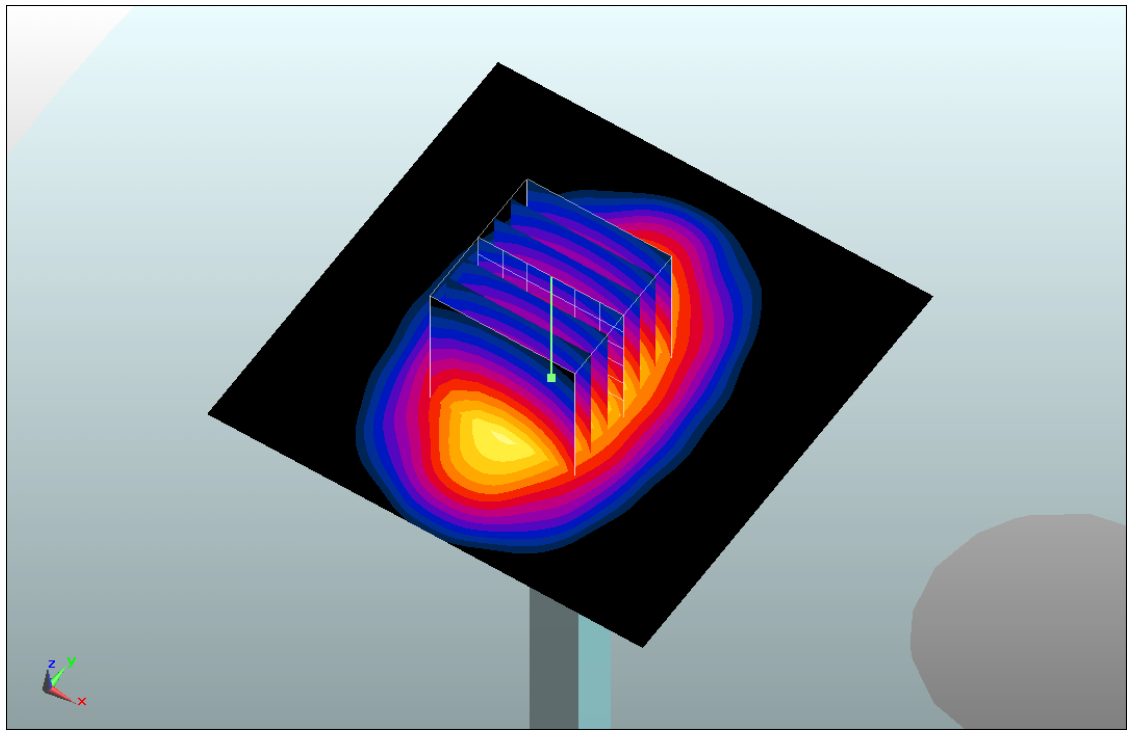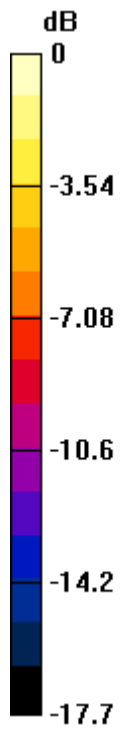

0 dB = 4.09mW/g

System Check_Body_1900MHz_100725

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_100725 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³



Ambient Temperature : 23.7 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.04, 7.04, 7.04); Calibrated: 2009/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 4.59 mW/g

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.5 V/m; Power Drift = -0.035 dB
Peak SAR (extrapolated) = 7.58 W/kg
SAR(1 g) = 4.03 mW/g; SAR(10 g) = 2.07 mW/g
Maximum value of SAR (measured) = 4.59 mW/g

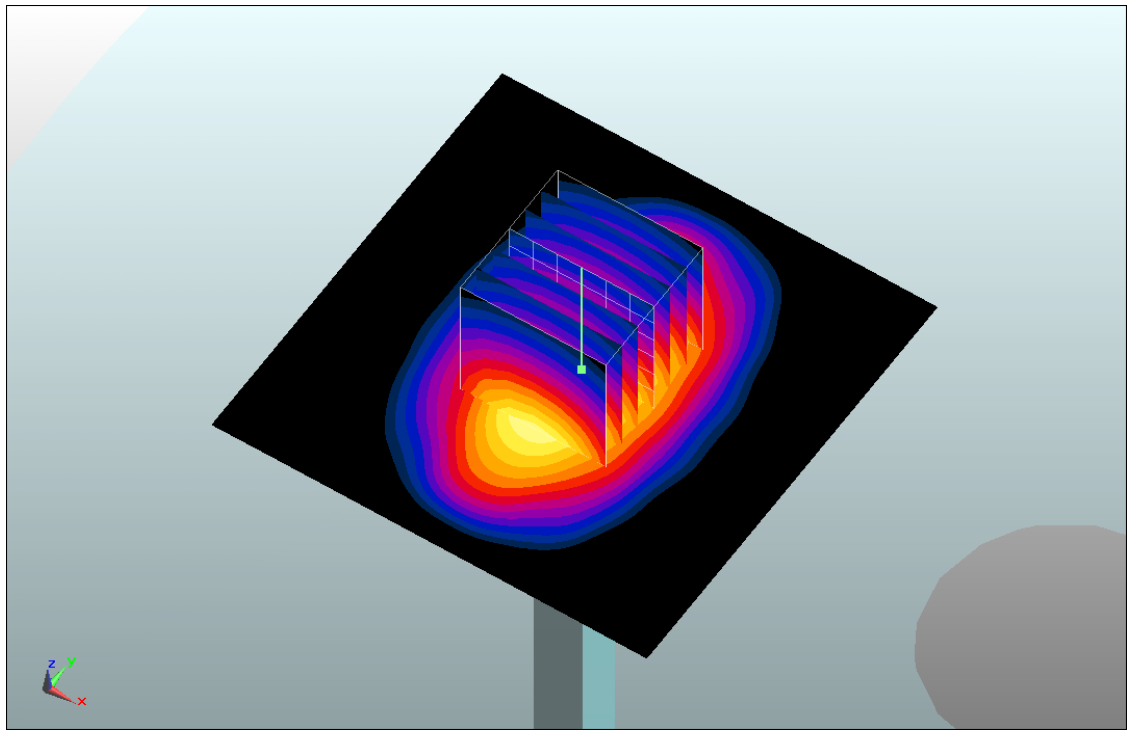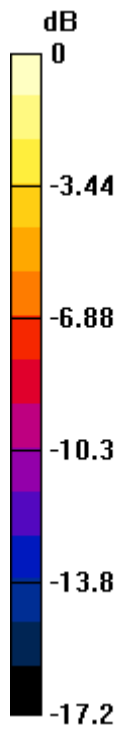

0 dB = 4.59mW/g