

# FCC RF Test Report

**APPLICANT** : Zoom Telephonics Inc.  
**EQUIPMENT** : We3G  
**BRAND NAME** : Zoom  
**MODEL NAME** : Series 1086  
Model 4520XY where X = A,B,C,D,E,F,G or  
Nothing and Y = A,B,C,D,E,F,G or Nothing  
**FCC ID** : BDN3GM1086  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : Digital Transmission System (DTS)

The product was received on Sep. 27, 2010 and completely tested on Oct. 11, 2010. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Anderson Chiu / Deputy Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# TABLE OF CONTENTS

**REVISION HISTORY.....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

    1.1 Applicant .....5

    1.2 Manufacturer.....5

    1.3 Feature of Equipment Under Test .....5

    1.4 Testing Site.....6

    1.5 Applied Standards .....6

    1.6 Ancillary Equipment List .....6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....7**

    2.1 RF Power.....7

    2.2 Test Mode.....8

    2.3 Connection Diagram of Test System.....9

    2.4 RF Utility .....9

**3 TEST RESULT.....10**

    3.1 6dB Bandwidth Measurement .....10

    3.2 Output Power Measurement.....15

    3.3 Band Edges Measurement .....17

    3.4 Spurious Emission Measurement.....23

    3.5 Power Spectral Density Measurement .....30

    3.6 AC Conducted Emission Measurement.....35

    3.7 Radiated Emission Measurement.....39

    3.8 Antenna Requirements .....54

**4 LIST OF MEASURING EQUIPMENT .....55**

**5 UNCERTAINTY OF EVALUATION.....56**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR092732	Rev. 01	Initial issue of report	Nov. 01, 2010

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	A8.4	Power Output	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.4	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.5	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.6	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 12.23 dB at 0.45 MHz
3.7	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.13 dB at 2488.22 MHz
3.8	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Zoom Telephonics Inc.**

No. 207, South Street, Boston, Ma 02111, USA

## 1.2 Manufacturer

**Zoom Telephonics Inc.**

No. 207, South Street, Boston, Ma 02111, USA

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	We3G
Brand Name	Zoom
Model Name	Series 1086 Model 4520XY where X = A,B,C,D,E,F,G or Nothing and Y = A,B,C,D,E,F,G or Nothing
FCC ID	BDN3GM1086
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Channel Spacing	5 MHz
Maximum Output Power to Antenna	802.11b : 18.75 dBm (0.075 W) 802.11g : 20.74 dBm (0.119 W)
Antenna Type	PIFA Antenna with gain 1.7 dBi
HW Version	LQTMG93
SW Version	LQT0001.1.1_MG93
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g : OFDM (BPSK / QPSK / 16QAM / 64QAM)
EUT Stage	Identical Prototype

### Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Transmission System (DTS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.	
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	CO01-KS	03CH01-KS

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 (Measurement Guidelines of DTS)
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 7

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Dell	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 1.84m DC O/P: Shielded, 0.9m

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF power output in the following table:

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		At DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	17.91	17.78	17.76	17.83
CH 06	2437 MHz	<b>18.75</b>	18.74	18.68	18.73
CH 11	2462 MHz	17.16	17.30	17.17	17.24

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		At OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	20.22	19.81	20.42	19.97	20.18	19.92	19.93	20.52
CH 06	2437 MHz	<b>20.74</b>	20.35	20.67	20.42	20.73	20.40	20.57	20.72
CH 11	2462 MHz	19.72	18.91	19.57	19.47	19.50	19.30	19.27	19.71

**Remark:**

1. The data rates of WLAN 802.11b/g were set in 1Mbps for 802.11b and 6Mbps for 802.11g, for all the test cases due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

## 2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations, laptop / tablet modes.


The following tables are showing the test modes as the worst cases and recorded in this report.

<b>Test Cases</b>		
<b>Test Item</b>	<b>802.11b</b>	<b>802.11g</b>
<b>Conducted TCs</b>	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz	Mode 4 : 802.11g CH01_2412 MHz Mode 5 : 802.11g CH06_2437 MHz Mode 6 : 802.11g CH11_2462 MHz
<b>Radiated TCs</b>	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz	Mode 4 : 802.11g CH01_2412 MHz Mode 5 : 802.11g CH06_2437 MHz Mode 6 : 802.11g CH11_2462 MHz
<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + WLAN Idle + Adapter	




## 2.3 Connection Diagram of Test System

<WLAN Tx Mode>

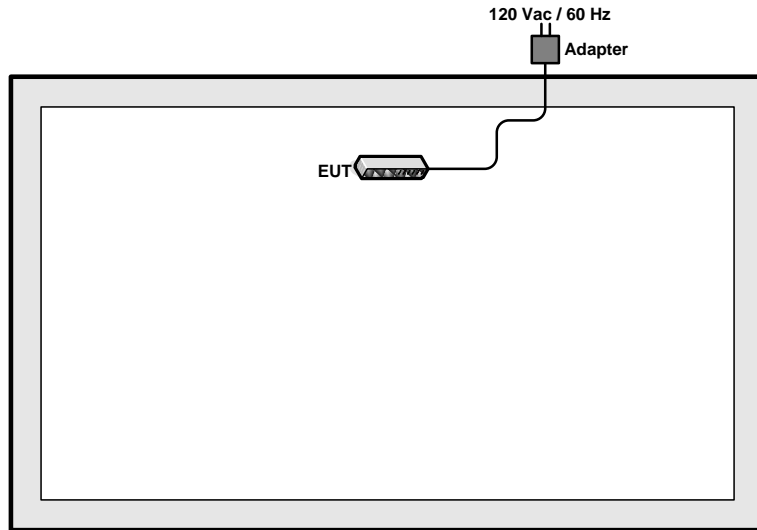

<EUT with Adapter Mode>

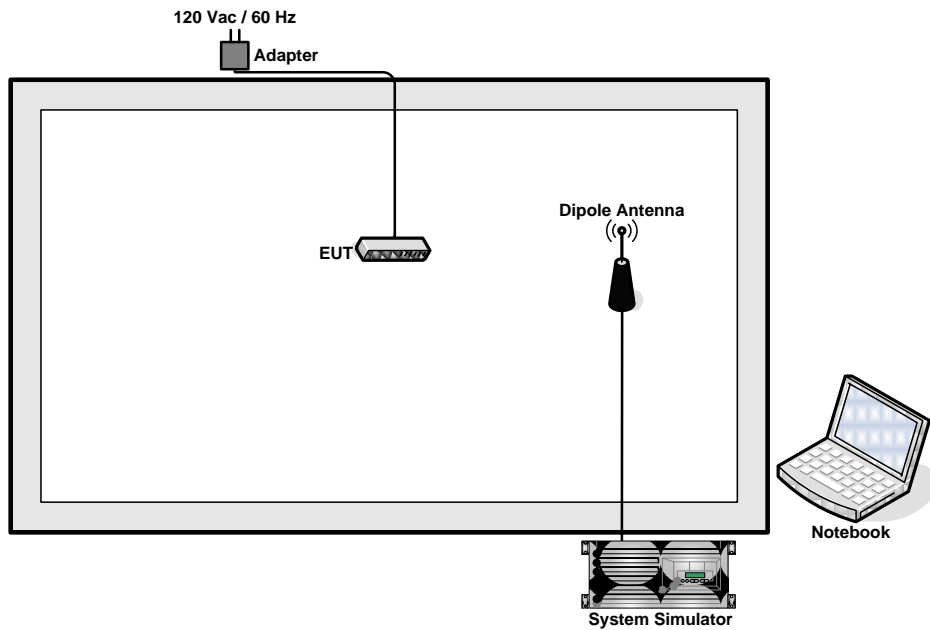

## 2.4 RF Utility

The programmed RF utility is installed in notebook to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

##### 3.1.4 Test Setup

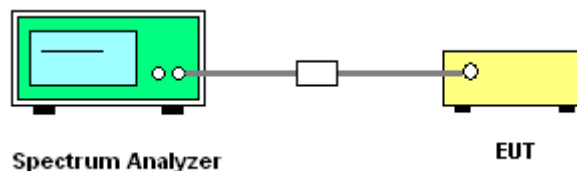


3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	21~22°C
Test Engineer :	Sky Liu	Relative Humidity :	42~43%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	12.72	0.5	Pass
06	2437	12.60	0.5	Pass
11	2462	12.68	0.5	Pass


Mode 1 : 6 dB Bandwidth Plot on 802.11b Channel 01

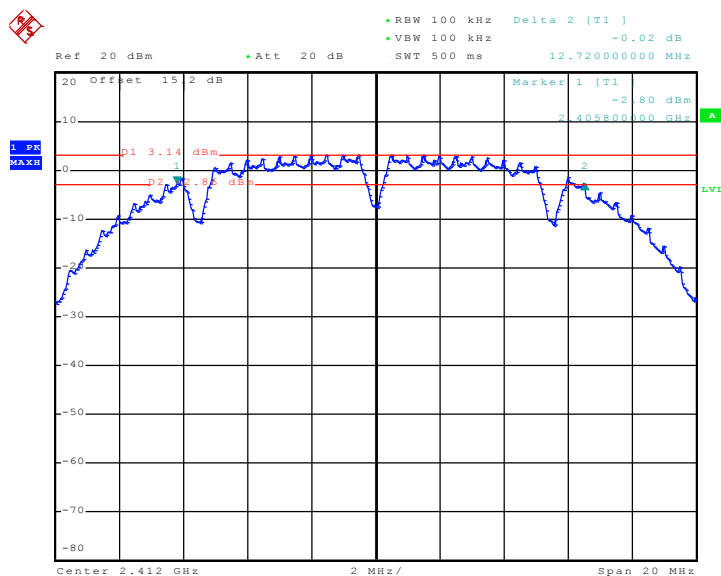

Date: 10.OCT.2010 05:33:33




Mode 2 : 6 dB Bandwidth Plot on 802.11b Channel 06

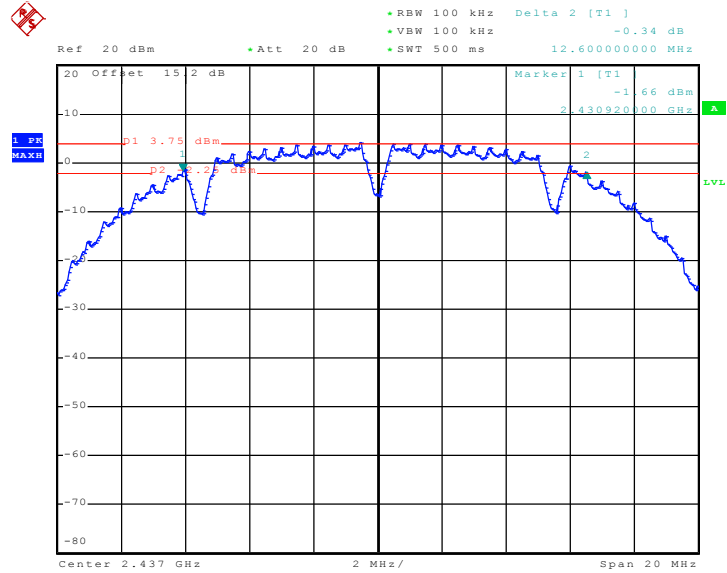

Date: 10.OCT.2010 05:36:50

Mode 3 : 6 dB Bandwidth Plot on 802.11b Channel 11

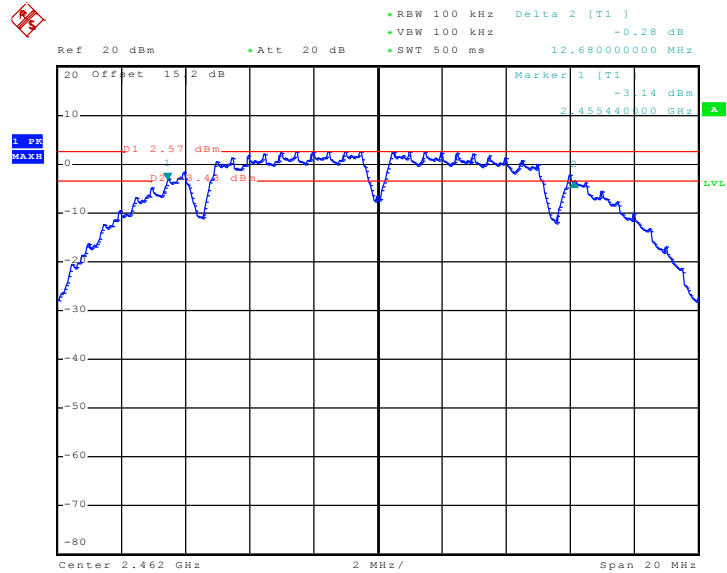


Date: 10.OCT.2010 05:40:04



Test Mode :	Mode 4, 5, 6	Temperature :	21~22°C
Test Engineer :	Sky Liu	Relative Humidity :	42~43%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.36	0.5	Pass
06	2437	16.48	0.5	Pass
11	2462	16.52	0.5	Pass


Mode 4 : 6 dB Bandwidth Plot on 802.11g Channel 01

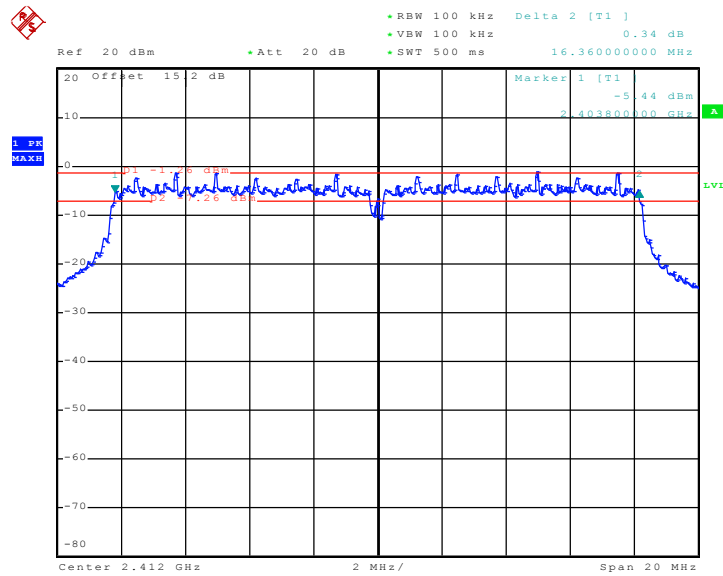

Date: 10.OCT.2010 06:02:06




Mode 5 : 6 dB Bandwidth Plot on 802.11g Channel 06

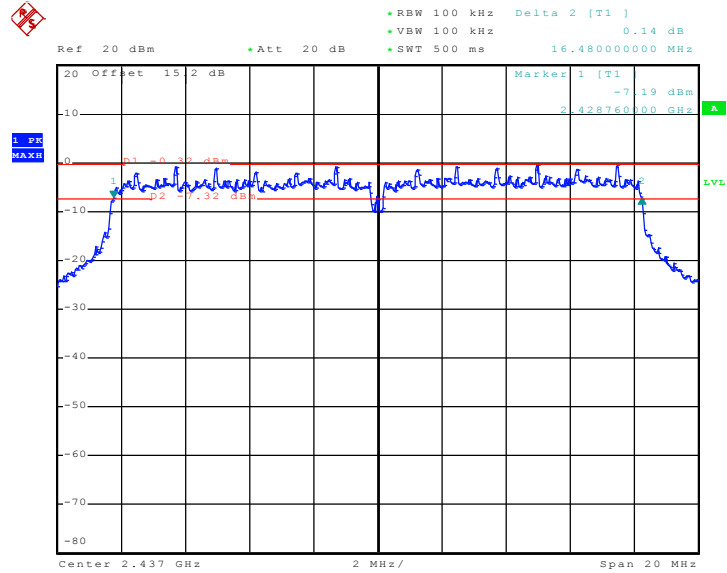

Date: 10.OCT.2010 06:03:38

Mode 6 : 6 dB Bandwidth Plot on 802.11g Channel 11

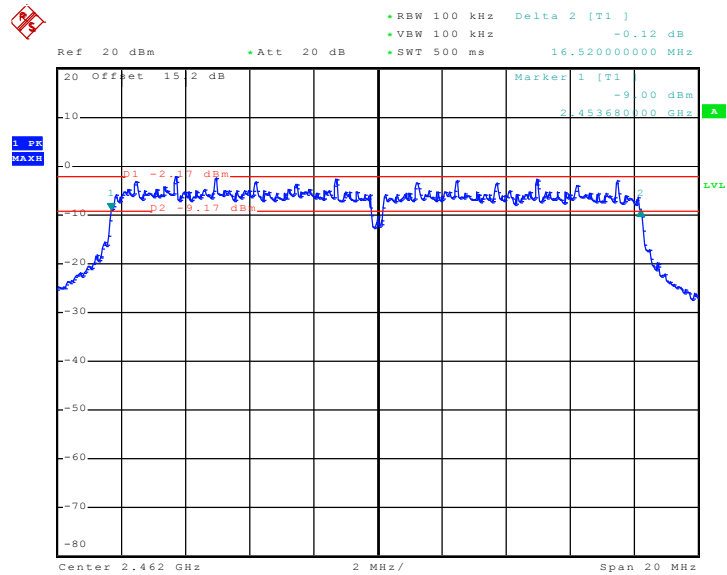

Date: 10.OCT.2010 06:05:33

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the power meter by a low loss cable.
3. Measure the power by power meter.

### 3.2.4 Test Setup

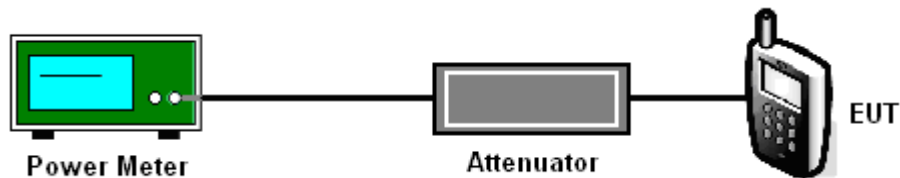



3.2.5 Test Result of Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	21~22°C
Test Engineer :	Sky Liu	Relative Humidity :	42~43%

Channel	Frequency (MHz)	802.11b Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	17.91	30	Pass
06	2437	18.75	30	Pass
11	2462	17.16	30	Pass

Test Mode :	Mode 4, 5, 6	Temperature :	21~22°C
Test Engineer :	Sky Liu	Relative Humidity :	42~43%

Channel	Frequency (MHz)	802.11g Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	20.22	30	Pass
06	2437	20.74	30	Pass
11	2462	19.72	30	Pass





### **3.3 Band Edges Measurement**

#### **3.3.1 Limit of Band Edges**

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

#### **3.3.2 Measuring Instruments**


See list of measuring instruments of this test report.

#### **3.3.3 Test Procedures**


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c).

### 3.3.4 Test Setup

#### <Radiated Band Edges>

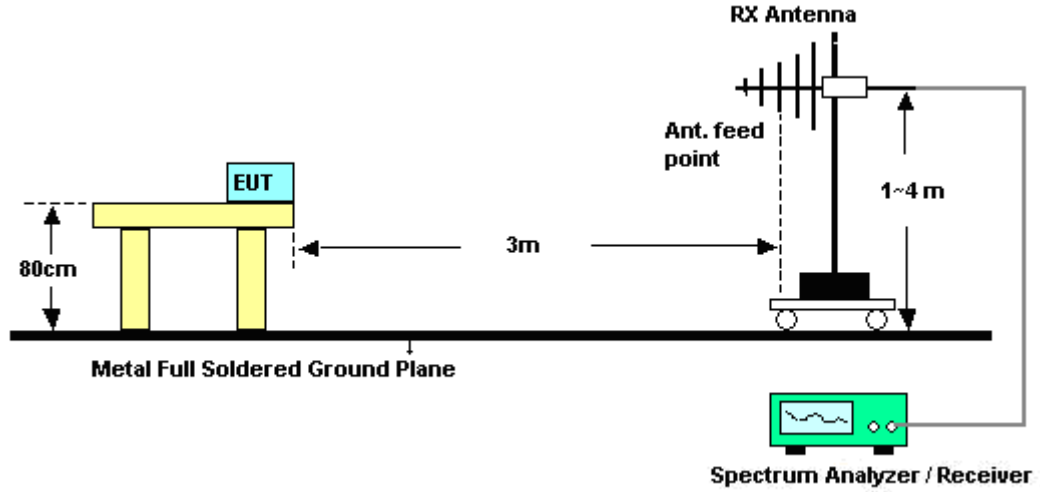

#### <Conducted Band Edges>

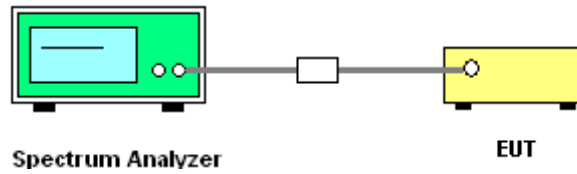



3.3.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	22~23°C
Test Band :	802.11b	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Lewis Lu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2386.19	53.65	-20.35	74.00	52.63	32.86	3.13	34.97	181	0	Peak
2386.19	47.10	-6.90	54.00	46.08	32.86	3.13	34.97	181	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2386.19	51.51	-22.49	74.00	50.49	32.86	3.13	34.97	126	35	Peak
2386.19	45.13	-8.87	54.00	44.11	32.86	3.13	34.97	126	35	Average

Test Mode :	Mode 3	Temperature :	22~23°C
Test Band :	802.11b	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Lewis Lu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2487.84	53.02	-20.98	74.00	51.71	33.05	3.20	34.94	101	90	Peak
2487.84	44.27	-9.73	54.00	42.96	33.05	3.20	34.94	101	90	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2488.22	53.35	-20.65	74.00	52.04	33.05	3.20	34.94	132	61	Peak
2488.22	47.87	-6.13	54.00	46.56	33.05	3.20	34.94	132	61	Average



Test Mode :	Mode 4	Temperature :	22~23°C
Test Band :	802.11g	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Lewis Lu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.80	57.75	-16.25	74.00	56.72	32.86	3.15	34.98	120	35	Peak
2389.80	42.13	-11.87	54.00	41.10	32.86	3.15	34.98	120	35	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.04	58.03	-15.97	74.00	57.01	32.86	3.13	34.97	100	10	Peak
2389.04	40.33	-13.67	54.00	39.31	32.86	3.13	34.97	100	10	Average

Test Mode :	Mode 6	Temperature :	22~23°C
Test Band :	802.11g	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Lewis Lu


ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.66	58.48	-15.52	74.00	57.21	33.01	3.20	34.94	100	348	Peak
2483.66	39.08	-14.92	54.00	37.81	33.01	3.20	34.94	100	348	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2485.18	57.15	-16.85	74.00	55.88	33.01	3.20	34.94	100	344	Peak
2485.18	39.41	-14.59	54.00	38.14	33.01	3.20	34.94	100	344	Average

### 3.3.6 Test Plots of Conducted Band Edges


Test Mode :	Mode 1 and 3	Temperature :	21~22°C
Test Band :	802.11b	Relative Humidity :	42~43%
Test Channel :	01 and 11	Test Engineer :	Sky Liu

Low Band Edge Plot on 802.11b Channel 01

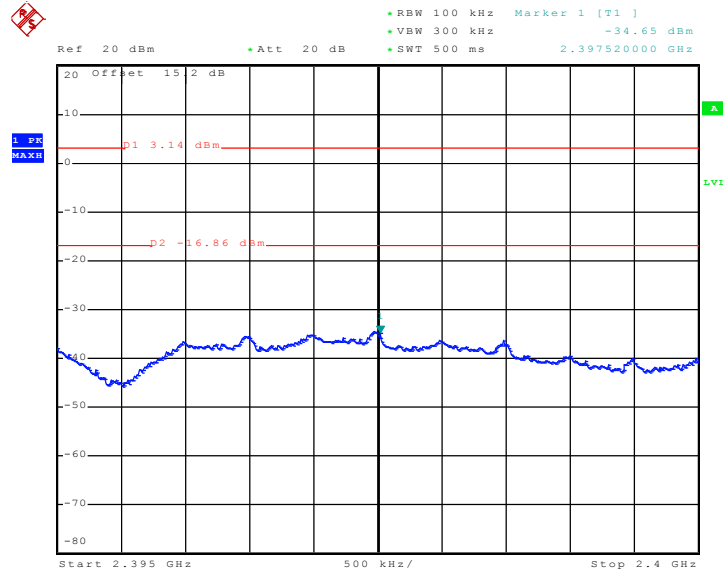

Date: 10.OCT.2010 05:53:46

High Band Edge Plot on 802.11b Channel 11

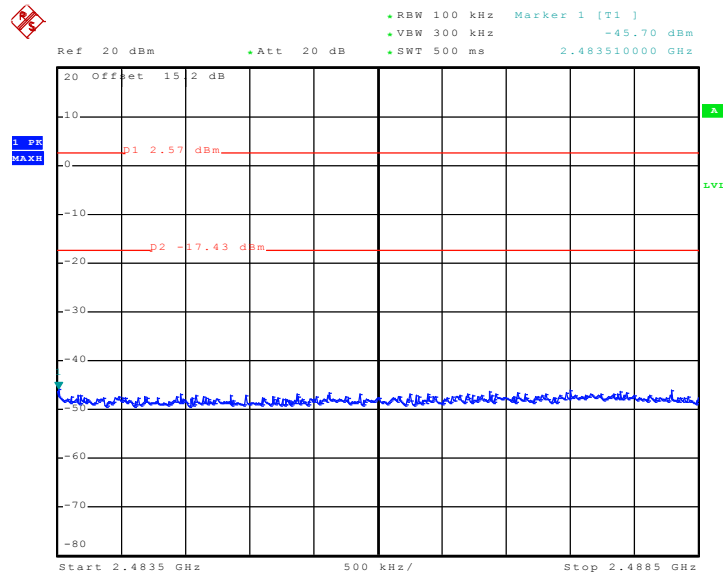


Date: 10.OCT.2010 05:51:29




Test Mode :	Mode 4 and 6	Temperature :	21~22°C
Test Band :	802.11g	Relative Humidity :	42~43%
Test Channel :	01 and 11	Test Engineer :	Sky Liu

Low Band Edge Plot on 802.11g Channel 01

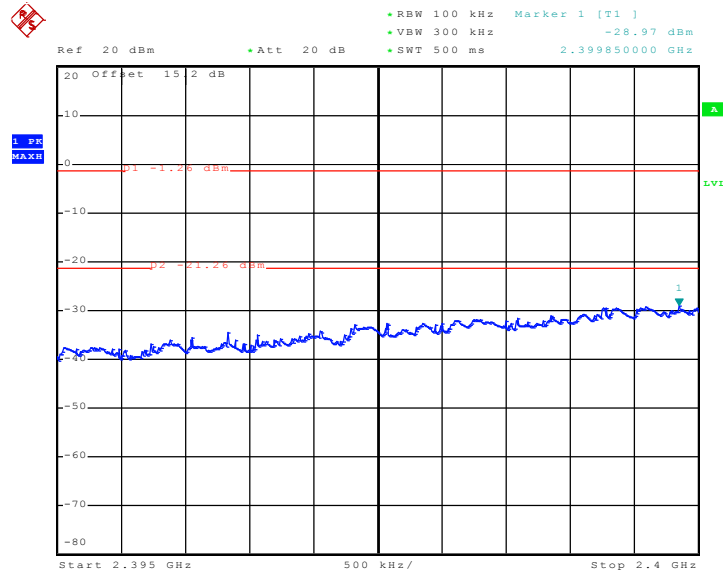

Date: 10.OCT.2010 06:23:07

High Band Edge Plot on 802.11g Channel 11

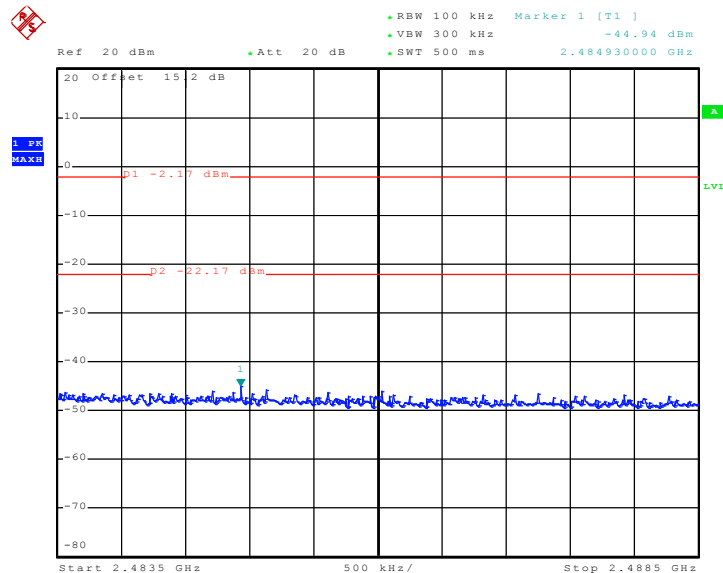

Date: 10.OCT.2010 06:10:13

## 3.4 Spurious Emission Measurement

### 3.4.1 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.4.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


### 3.4.4 Test Setup

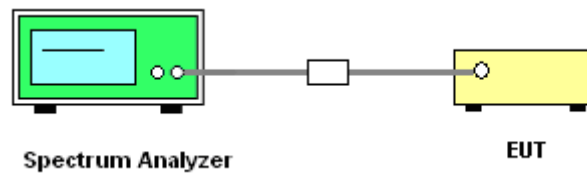

### 3.4.5 Test Plots of Spurious Emission


Test Mode :	Mode 1	Temperature :	21~22°C
Test Band :	802.11b	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

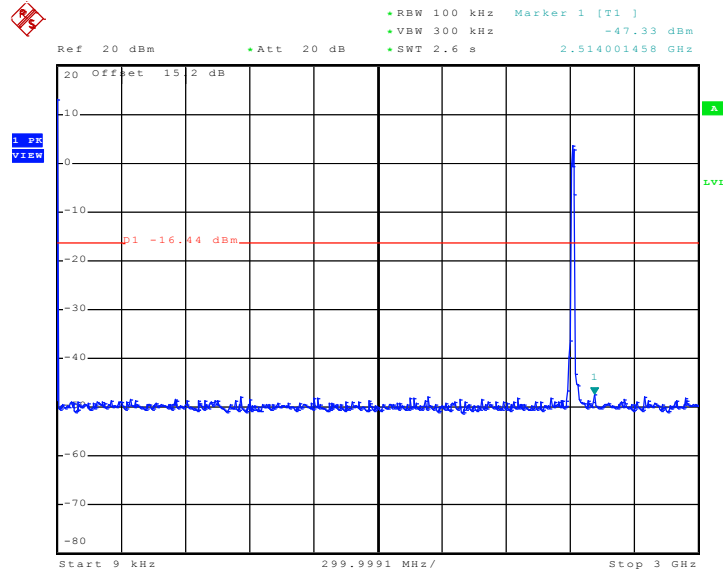

Date: 10.OCT.2010 07:04:49

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

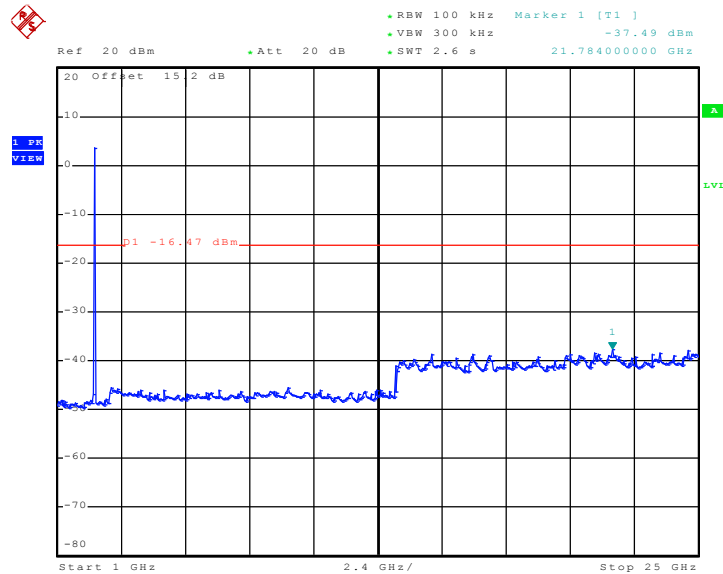


Date: 10.OCT.2010 06:52:50






Test Mode :	Mode 2	Temperature :	21~22°C
Test Band :	802.11b	Relative Humidity :	42~43%
Test Channel :	06	Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

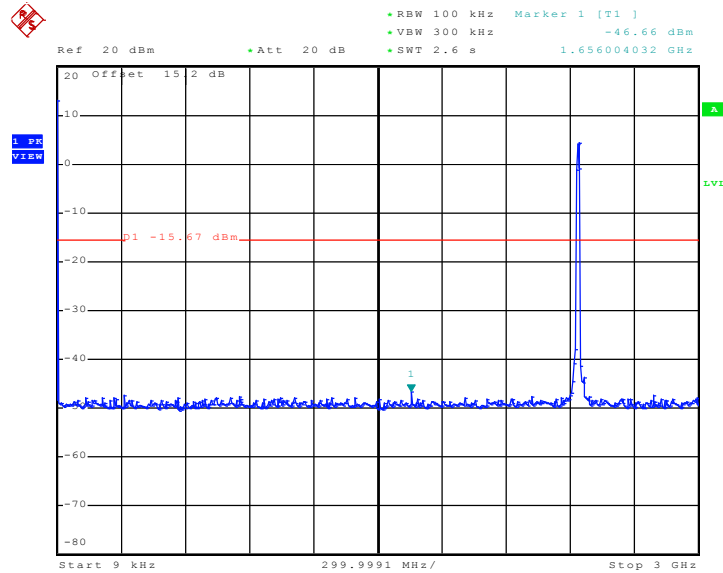

Date: 10.OCT.2010 07:02:29

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

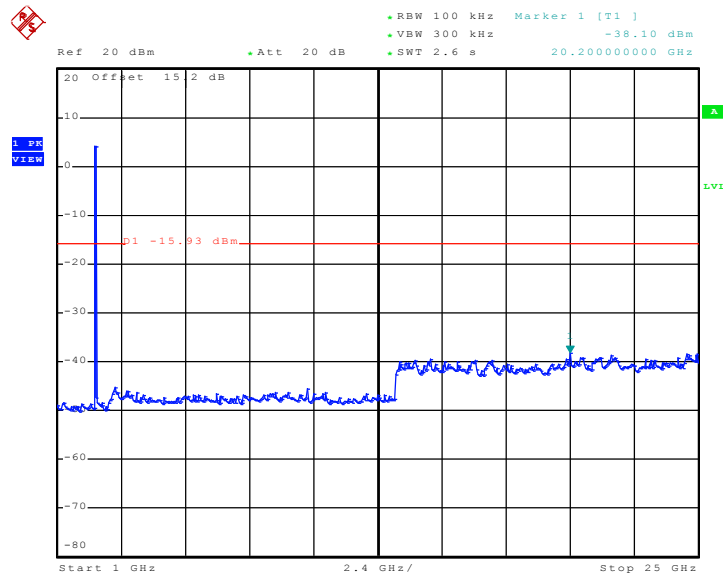


Date: 10.OCT.2010 06:55:22




Test Mode :	Mode 3	Temperature :	21~22°C
Test Band :	802.11b	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

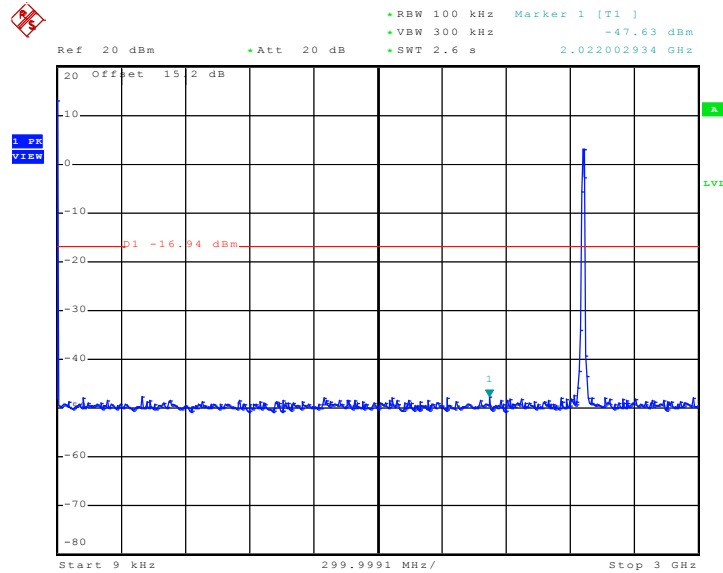

Date: 10.OCT.2010 07:00:21

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

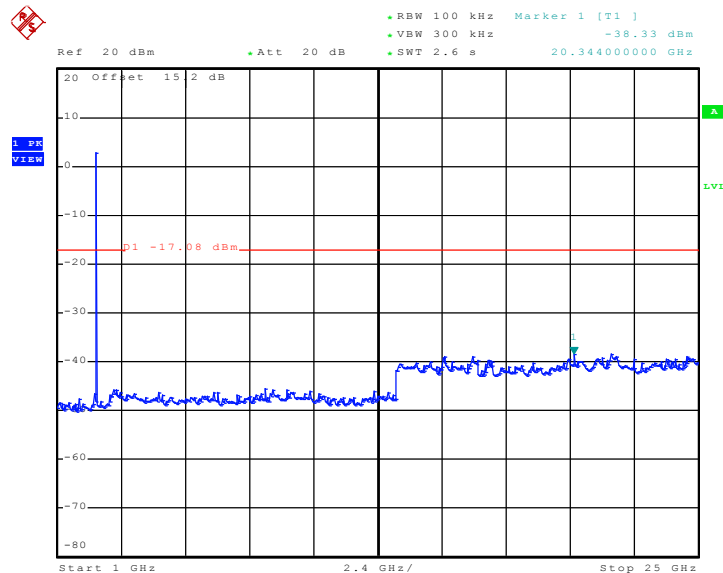


Date: 10.OCT.2010 06:56:51




Test Mode :	Mode 4	Temperature :	21~22°C
Test Band :	802.11g	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

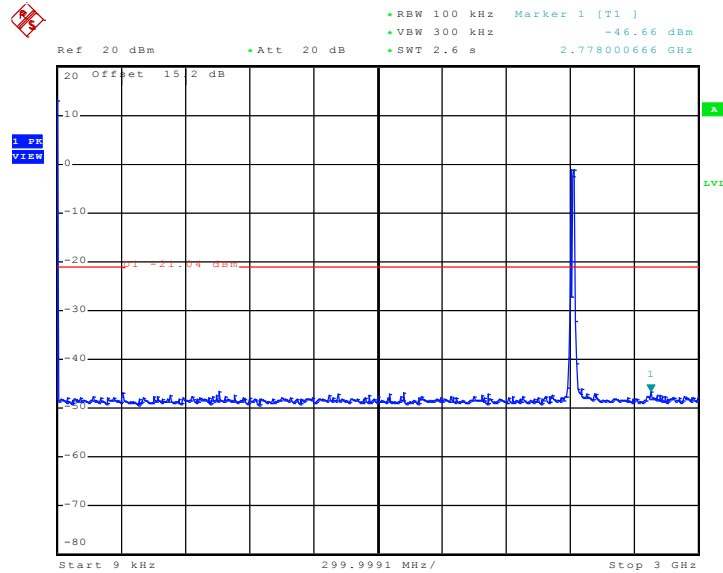

Date: 10.OCT.2010 07:08:51

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

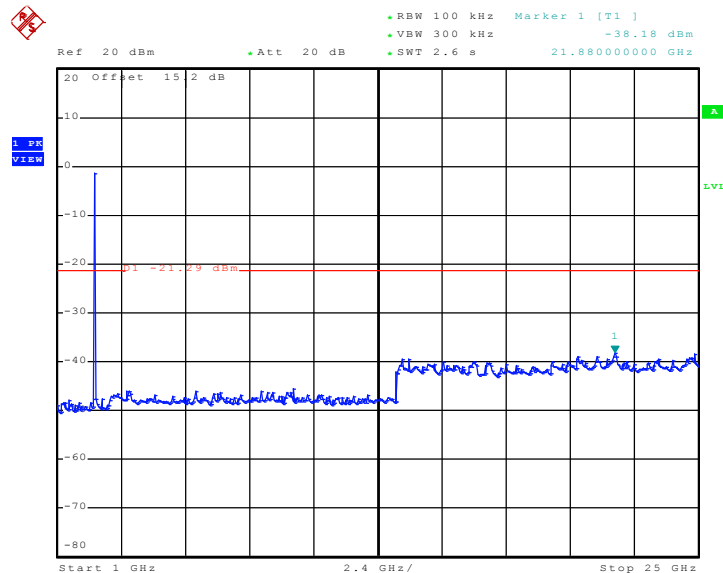


Date: 10.OCT.2010 07:18:39




Test Mode :	Mode 5	Temperature :	21~22°C
Test Band :	802.11g	Relative Humidity :	42~43%
Test Channel :	06	Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

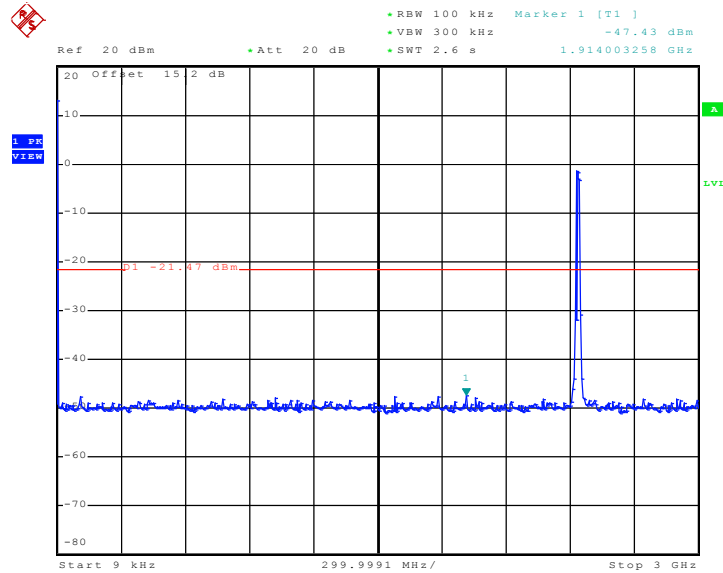

Date: 10.OCT.2010 07:10:14

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

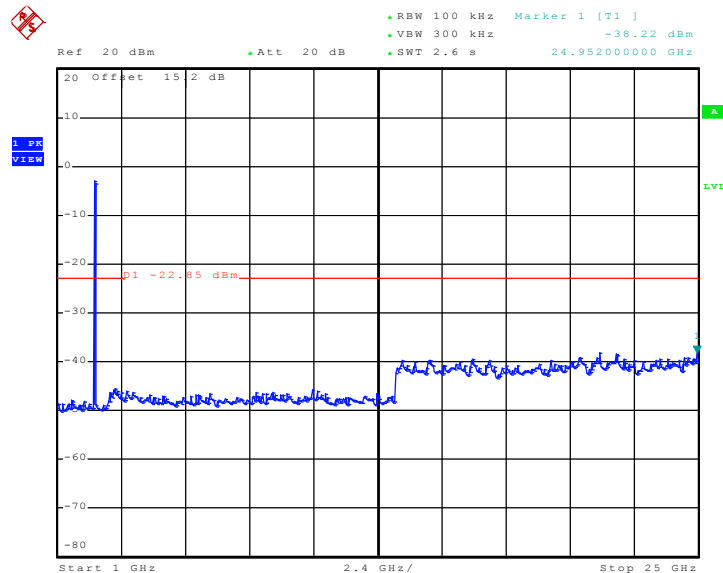


Date: 10.OCT.2010 07:14:59




Test Mode :	Mode 6	Temperature :	21~22°C
Test Band :	802.11g	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

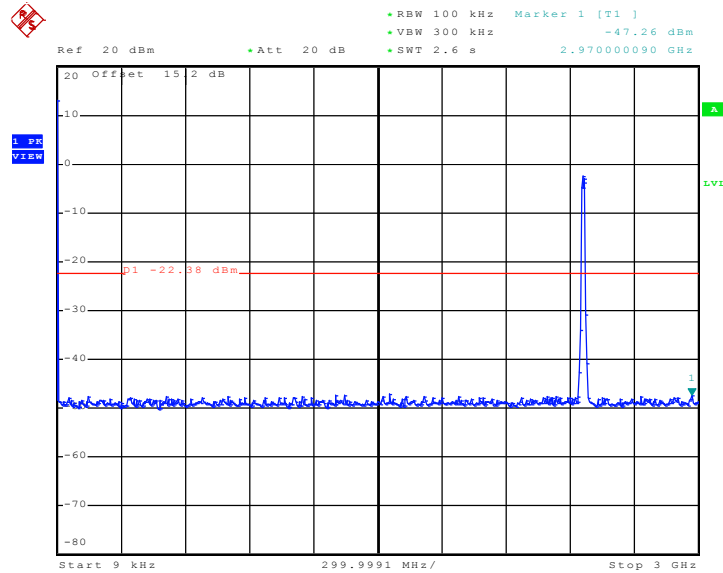

Date: 10.OCT.2010 07:27:14

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

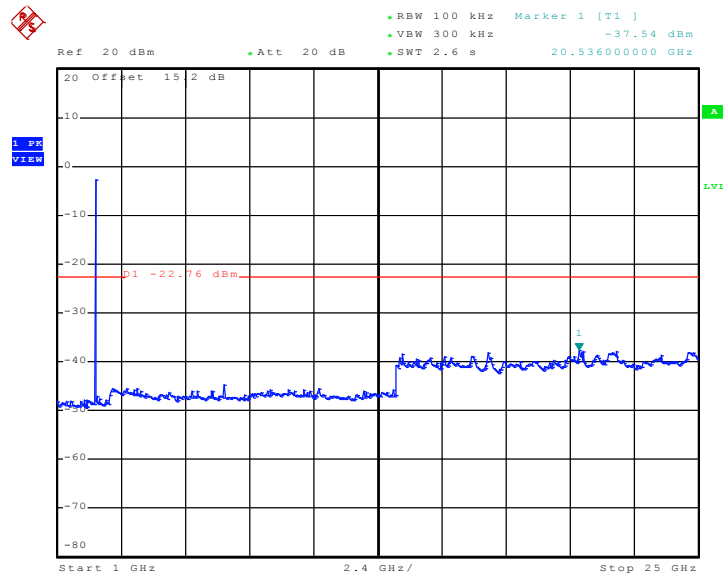

Date: 10.OCT.2010 07:24:13

## 3.5 Power Spectral Density Measurement

### 3.5.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Test Procedures

1. The test follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Take the measured data from spectrum analyzer.

### 3.5.4 Test Setup

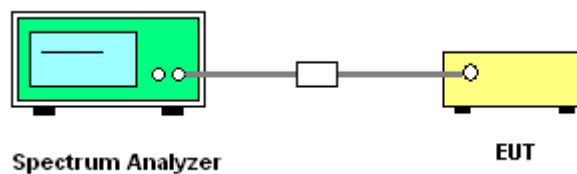


3.5.5 Test Result of Power Spectral Density

Test Mode :	Mode 1, 2, 3	Temperature :	21~22°C
Test Engineer :	Sky Liu	Relative Humidity :	42~43%

Channel	Frequency (MHz)	802.11b Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-10.58	8	Pass
06	2437	-9.15	8	Pass
11	2462	-10.58	8	Pass


Mode 1 : PSD Plot on 802.11b Channel 01

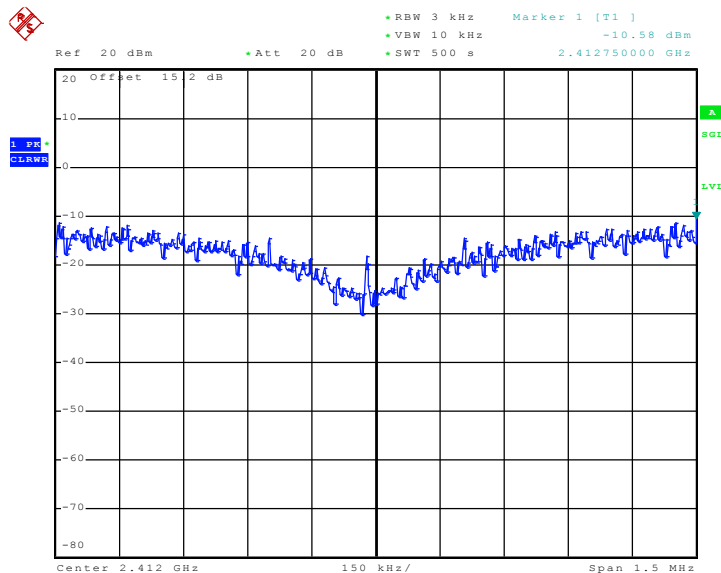

Date: 10.OCT.2010 07:39:53




Mode 2 : PSD Plot on 802.11b Channel 06

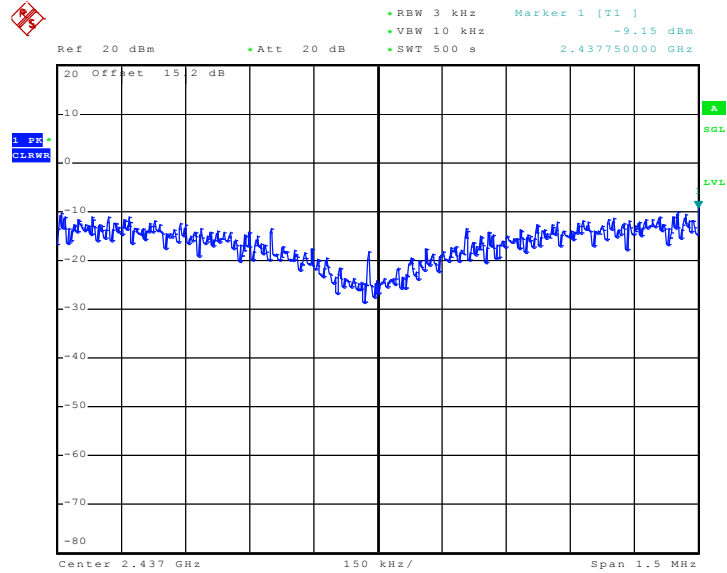

Date: 10.OCT.2010 07:50:17

Mode 3 : PSD Plot on 802.11b Channel 11

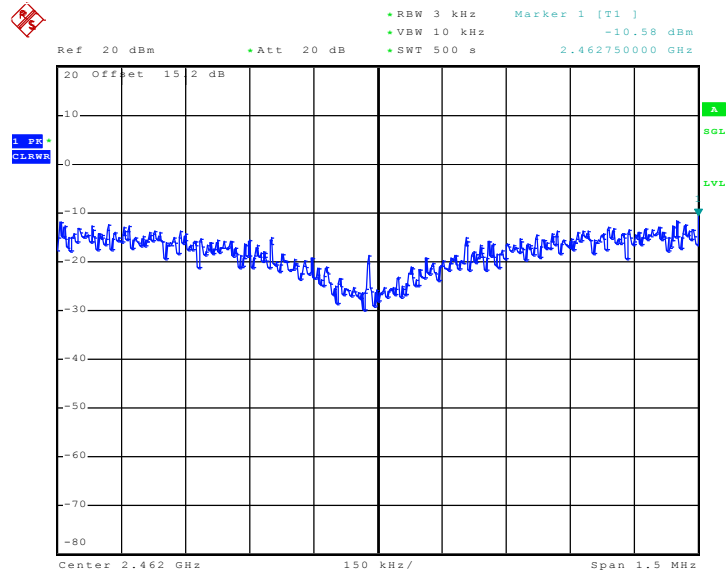

Date: 10.OCT.2010 08:01:16






Test Mode :	Mode 4, 5, 6	Temperature :	21~22°C
Test Engineer :	Sky Liu	Relative Humidity :	42~43%

Channel	Frequency (MHz)	802.11g Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-12.58	8	Pass
06	2437	-10.91	8	Pass
11	2462	-16.26	8	Pass


Mode 4 : PSD Plot on 802.11g Channel 01

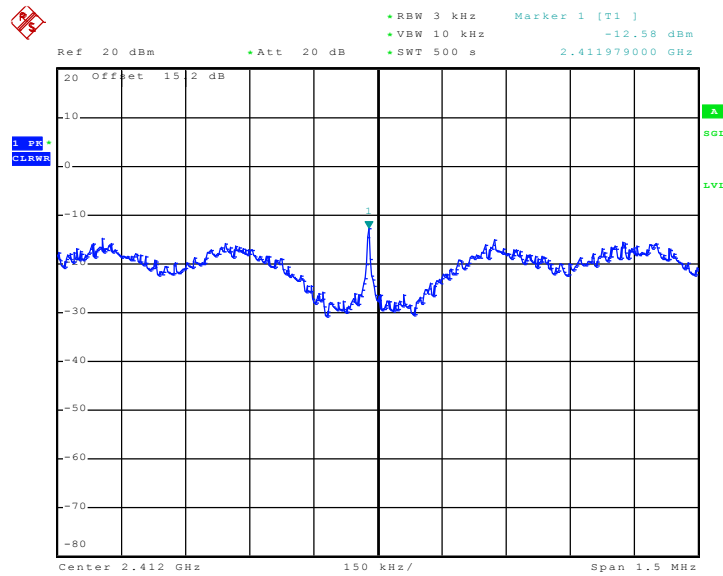

Date: 10.OCT.2010 08:10:47




Mode 5 : PSD Plot on 802.11g Channel 06

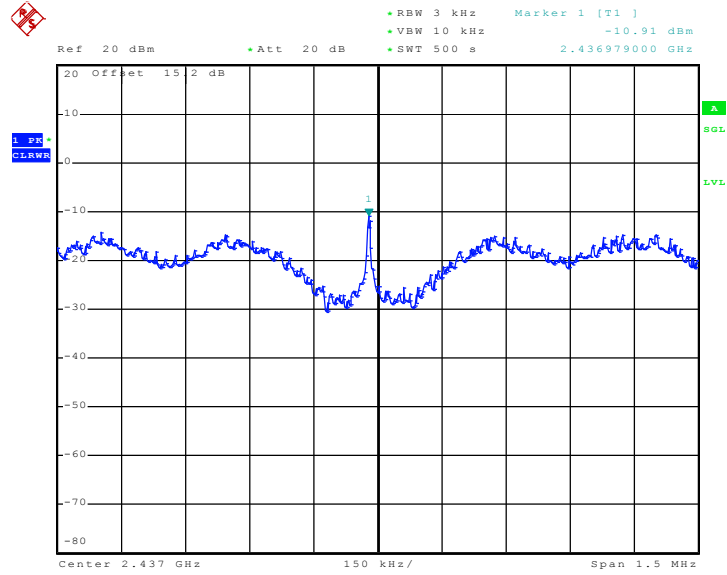

Date: 10.OCT.2010 08:20:01

Mode 6 : PSD Plot on 802.11g Channel 11

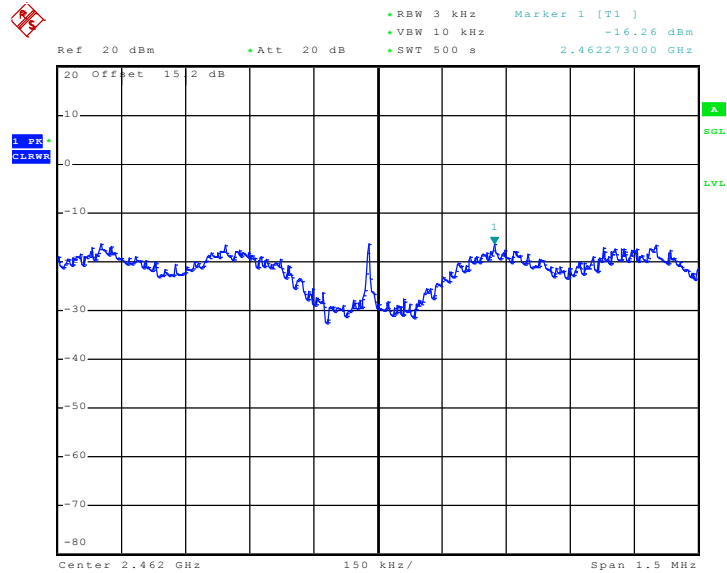

Date: 10.OCT.2010 08:33:19

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

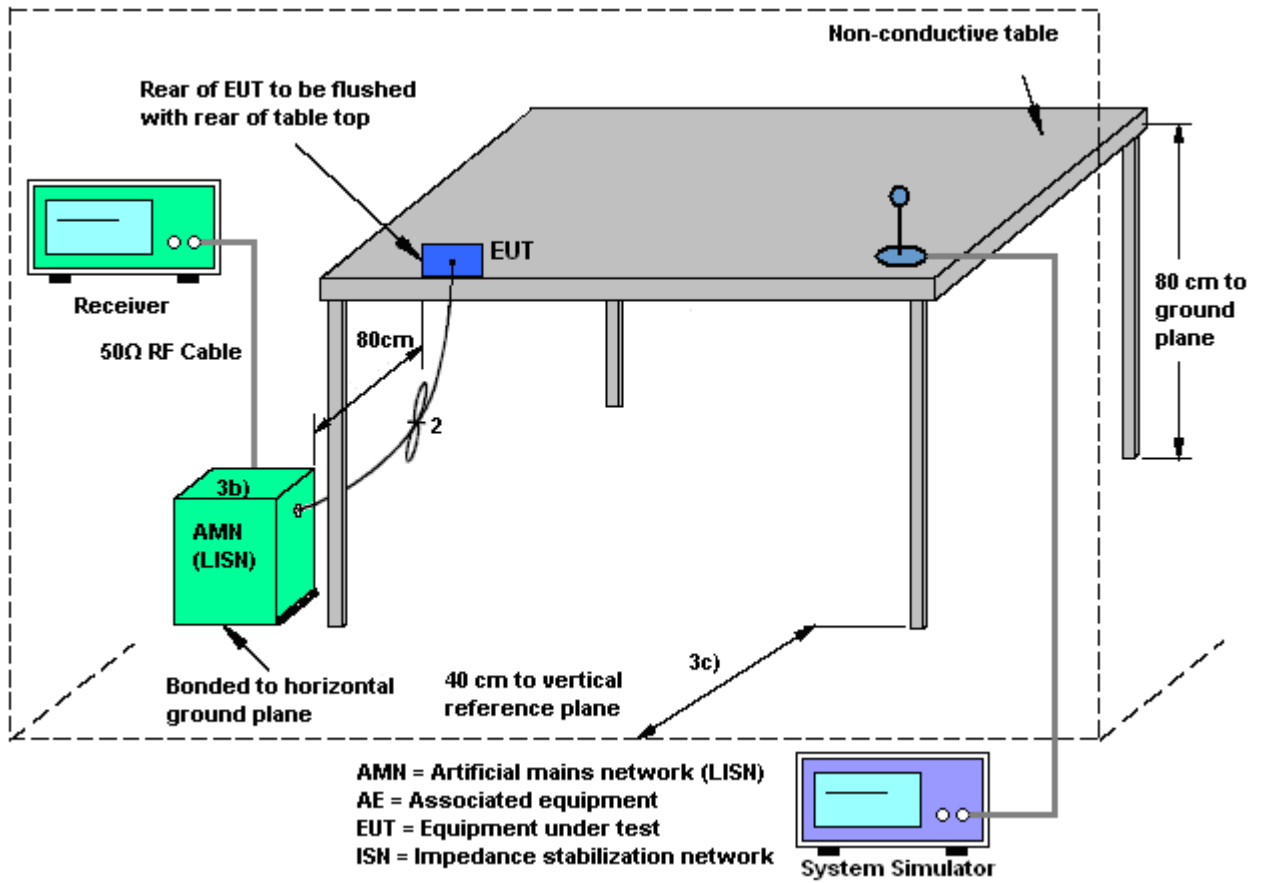

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Feixiang Rui	Relative Humidity :	43~44%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + WLAN Idle + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

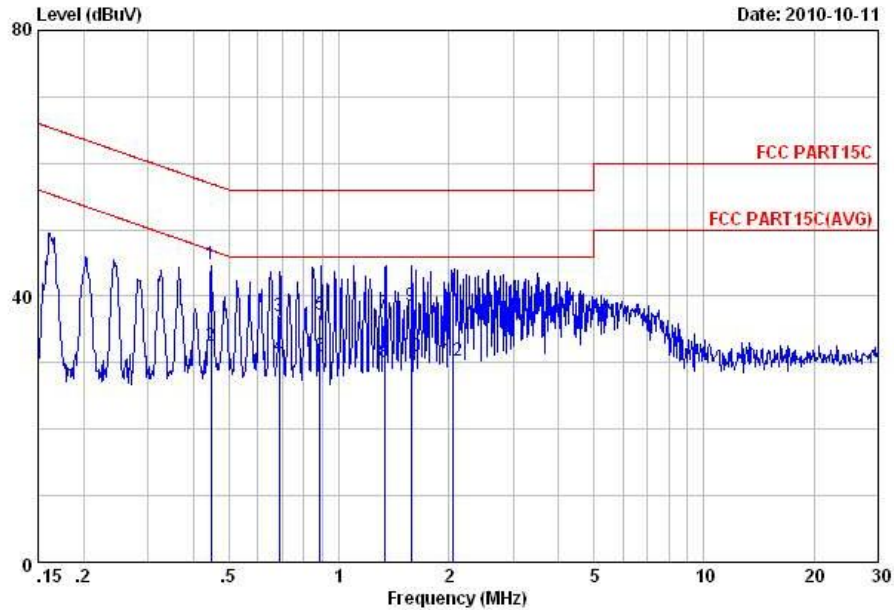


Site : C001-KS  
 Condition: FCC PART15C LISN-100807 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.45	44.72	-12.23	56.95	34.60	-0.08	10.20	QP
2	0.45	32.62	-14.33	46.95	22.50	-0.08	10.20	Average
3	0.69	37.04	-18.96	56.00	26.90	-0.09	10.23	QP
4	0.69	31.04	-14.96	46.00	20.90	-0.09	10.23	Average
5	0.89	37.26	-18.74	56.00	27.11	-0.10	10.25	QP
6	0.89	31.06	-14.94	46.00	20.91	-0.10	10.25	Average
7	1.33	37.39	-18.61	56.00	27.20	-0.10	10.29	QP
8	1.33	30.09	-15.91	46.00	19.90	-0.10	10.29	Average
9	1.58	38.50	-17.50	56.00	28.30	-0.11	10.31	QP
10	1.58	31.00	-15.00	46.00	20.80	-0.11	10.31	Average
11	2.06	37.92	-18.08	56.00	27.70	-0.11	10.33	QP
12	2.06	30.22	-15.78	46.00	20.00	-0.11	10.33	Average



Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Feixiang Rui	Relative Humidity :	43~44%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + WLAN Idle + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

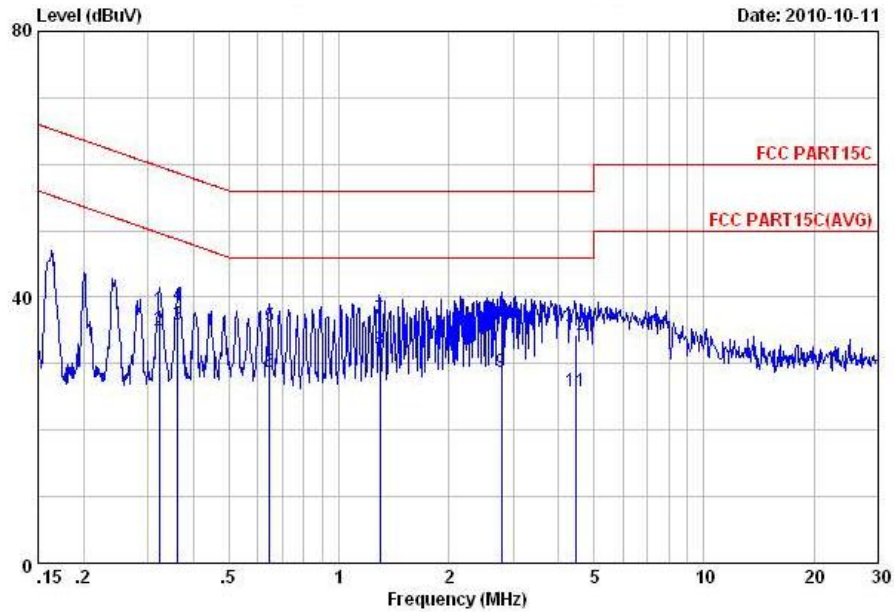

Site : C001-K5  
 Condition: FCC PART15C LISN-100807 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.32	38.00	-21.65	59.65	27.90	-0.08	10.18	QP
2	0.32	34.90	-14.75	49.65	24.80	-0.08	10.18	Average
3	0.36	35.91	-12.76	48.67	25.81	-0.08	10.18	Average
4	0.36	38.71	-19.96	58.67	28.61	-0.08	10.18	QP
5	0.65	35.75	-20.25	56.00	25.60	-0.08	10.23	QP
6	0.65	28.65	-17.35	46.00	18.50	-0.08	10.23	Average
7	1.29	36.79	-19.21	56.00	26.60	-0.10	10.29	QP
8	1.29	31.99	-14.01	46.00	21.80	-0.10	10.29	Average
9	2.79	28.85	-17.15	46.00	18.61	-0.12	10.36	Average
10	2.79	35.95	-20.05	56.00	25.71	-0.12	10.36	QP
11	4.45	25.76	-20.24	46.00	15.50	-0.13	10.39	Average
12	4.45	34.36	-21.64	56.00	24.10	-0.13	10.39	QP

### 3.7 Radiated Emission Measurement

#### 3.7.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.7.3 Test Procedures


- The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
- Use the following spectrum analyzer settings:
  - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

### 3.7.4 Test Setup

For radiated emissions below 30MHz

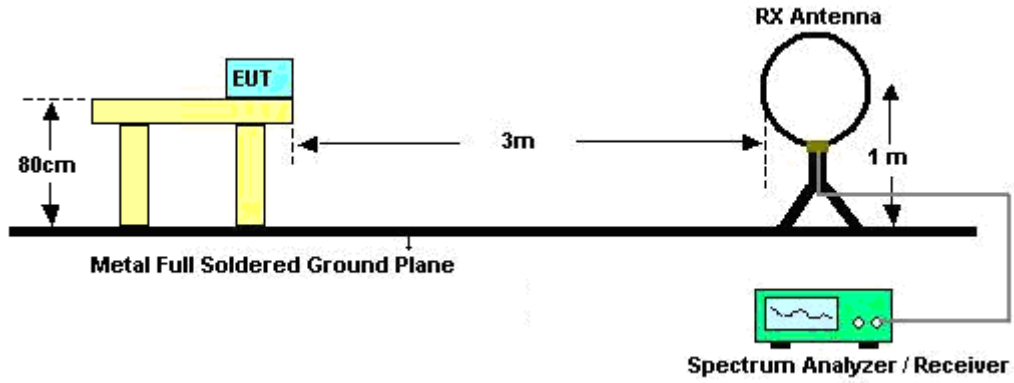

For radiated emissions above 30MHz

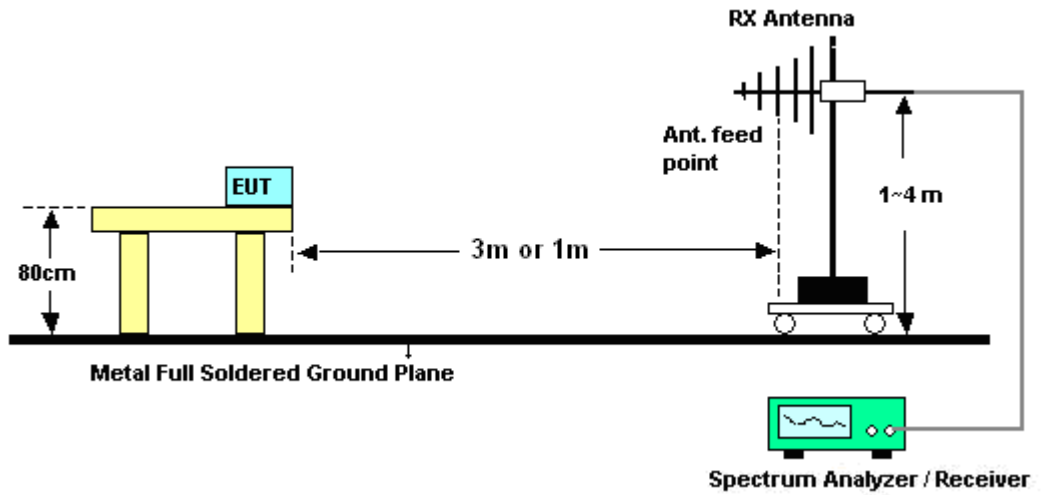





3.7.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Lewis Lu	Temperature :	22~23°C	
		Relative Humidity :	41~42%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.7.6 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	22~23°C
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Lewis Lu	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
47.28	20.80	-19.20	40.00	41.25	8.50	0.31	29.26	-	-	Peak
150.15	24.54	-18.96	43.50	43.31	10.00	0.59	29.36	100	251	Peak
256.26	23.30	-22.70	46.00	40.08	12.09	0.74	29.61	-	-	Peak
447.70	16.64	-29.36	46.00	29.34	16.29	0.93	29.92	-	-	Peak
724.20	20.43	-25.57	46.00	28.81	19.60	1.16	29.14	-	-	Peak
917.40	22.64	-23.36	46.00	28.72	20.54	1.30	27.92	-	-	Peak
2386.19	53.65	-20.35	74.00	52.63	32.86	3.13	34.97	181	0	Peak
2386.19	47.10	-6.90	54.00	46.08	32.86	3.13	34.97	181	0	Average
2412.00	97.61	-	-	96.55	32.89	3.15	34.98	170	0	Average
2412.00	101.61	-	-	100.55	32.89	3.15	34.98	170	0	Peak
2490.50	47.54	-26.46	74.00	46.23	33.05	3.20	34.94	126	18	Peak
2490.50	40.51	-13.49	54.00	39.20	33.05	3.20	34.94	126	18	Average



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Lewis Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
46.57	31.31	-8.69	40.00	51.41	8.88	0.30	29.28	100	0	QP
71.04	28.48	-11.52	40.00	51.96	5.38	0.37	29.23	-	-	Peak
183.90	26.42	-17.08	43.50	46.74	8.44	0.64	29.40	-	-	Peak
478.50	17.77	-28.23	46.00	29.92	16.83	0.96	29.94	-	-	Peak
725.60	20.32	-25.68	46.00	28.67	19.62	1.16	29.13	-	-	Peak
825.70	21.36	-24.64	46.00	28.59	20.18	1.24	28.65	-	-	Peak
2386.19	51.51	-22.49	74.00	50.49	32.86	3.13	34.97	126	35	Peak
2386.19	45.13	-8.87	54.00	44.11	32.86	3.13	34.97	126	35	Average
2412.00	96.19	-	-	95.13	32.89	3.15	34.98	102	249	Average
2412.00	100.27	-	-	99.21	32.89	3.15	34.98	102	249	Peak
2492.78	46.25	-27.75	74.00	44.92	33.05	3.21	34.93	100	135	Peak
2492.78	35.14	-18.86	54.00	33.81	33.05	3.21	34.93	100	135	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Lewis Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	29.12	-10.88	40.00	40.14	18.00	0.25	29.27	141	253	Peak
98.31	21.97	-21.53	43.50	40.67	10.15	0.44	29.29	-	-	Peak
149.34	24.29	-19.21	43.50	43.01	10.07	0.58	29.37	-	-	Peak
654.90	18.77	-27.23	46.00	28.31	18.93	1.11	29.58	-	-	Peak
837.60	21.42	-24.58	46.00	28.30	20.38	1.25	28.51	-	-	Peak
970.60	22.16	-31.84	54.00	27.44	20.87	1.34	27.49	-	-	Peak
2334.70	46.60	-27.40	74.00	45.65	32.78	3.10	34.93	118	238	Peak
2334.70	32.05	-21.95	54.00	31.10	32.78	3.10	34.93	118	238	Average
2437.00	95.78	-	-	94.63	32.95	3.17	34.97	104	350	Average
2437.00	101.42	-	-	100.27	32.95	3.17	34.97	104	350	Peak
2485.56	46.55	-27.45	74.00	45.28	33.01	3.20	34.94	187	304	Peak
2485.56	34.98	-19.02	54.00	33.71	33.01	3.20	34.94	187	304	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Lewis Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
47.78	32.64	-7.36	40.00	53.09	8.50	0.31	29.26	100	170	QP
92.37	29.17	-14.33	43.50	48.67	9.35	0.42	29.27	-	-	Peak
184.71	25.35	-18.15	43.50	45.67	8.44	0.64	29.40	-	-	Peak
578.60	18.23	-27.77	46.00	28.42	18.56	1.05	29.80	-	-	Peak
711.60	19.57	-26.43	46.00	28.21	19.41	1.15	29.20	-	-	Peak
893.60	21.76	-24.24	46.00	28.14	20.46	1.29	28.13	-	-	Peak
2389.42	46.73	-27.27	74.00	45.71	32.86	3.13	34.97	102	234	Peak
2389.42	38.03	-15.97	54.00	37.01	32.86	3.13	34.97	102	234	Average
2437.00	101.83	-	-	100.68	32.95	3.17	34.97	134	339	Peak
2437.00	98.23	-	-	97.08	32.95	3.17	34.97	134	339	Average
2486.61	47.88	-26.12	74.00	46.61	33.01	3.20	34.94	135	147	Peak
2486.61	32.48	-21.52	54.00	31.21	33.01	3.20	34.94	135	147	Average



Test Mode :	Mode 3	Temperature :	22~23°C
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Lewis Lu	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
47.82	18.48	-21.52	40.00	38.93	8.50	0.31	29.26	-	-	Peak
97.50	21.64	-21.86	43.50	40.34	10.15	0.44	29.29	-	-	Peak
149.07	23.94	-19.56	43.50	42.66	10.07	0.58	29.37	241	20	Peak
467.30	16.86	-29.14	46.00	29.26	16.57	0.96	29.93	-	-	Peak
729.80	20.61	-25.39	46.00	28.88	19.68	1.16	29.11	-	-	Peak
905.50	22.08	-23.92	46.00	28.37	20.47	1.29	28.05	-	-	Peak
2357.88	46.62	-27.38	74.00	45.65	32.81	3.12	34.96	100	231	Peak
2357.88	36.07	-17.93	54.00	35.10	32.81	3.12	34.96	100	231	Average
2462.00	99.89	-	-	98.68	32.98	3.18	34.95	114	41	Average
2462.00	103.78	-	-	102.57	32.98	3.18	34.95	114	41	Peak
2487.84	53.02	-20.98	74.00	51.71	33.05	3.20	34.94	101	90	Peak
2487.84	44.27	-9.73	54.00	42.96	33.05	3.20	34.94	101	90	Average



Test Mode :	Mode 3	Temperature :	22~23°C
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Lewis Lu	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
47.10	31.94	-8.06	40.00	52.39	8.50	0.31	29.26	100	184	QP
93.72	29.99	-13.51	43.50	49.18	9.66	0.43	29.28	-	-	Peak
184.44	26.03	-17.47	43.50	46.35	8.44	0.64	29.40	-	-	Peak
398.00	16.47	-29.53	46.00	29.44	15.96	0.88	29.81	-	-	Peak
681.50	20.28	-25.72	46.00	29.34	19.17	1.13	29.36	-	-	Peak
890.80	21.32	-24.68	46.00	27.72	20.46	1.29	28.15	-	-	Peak
2356.93	46.71	-27.29	74.00	45.74	32.81	3.12	34.96	126	45	Peak
2356.93	37.77	-16.23	54.00	36.80	32.81	3.12	34.96	126	45	Average
2462.00	99.91	-	-	98.70	32.98	3.18	34.95	131	62	Average
2462.00	103.36	-	-	102.15	32.98	3.18	34.95	131	62	Peak
2488.22	53.35	-20.65	74.00	52.04	33.05	3.20	34.94	132	61	Peak
2488.22	47.87	-6.13	54.00	46.56	33.05	3.20	34.94	132	61	Average



<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Lewis Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.09	19.64	-20.36	40.00	40.46	8.12	0.31	29.25	-	-	Peak
97.50	22.51	-20.99	43.50	41.21	10.15	0.44	29.29	-	-	Peak
149.34	24.09	-19.41	43.50	42.81	10.07	0.58	29.37	101	23	Peak
512.10	19.59	-26.41	46.00	31.09	17.45	0.99	29.94	-	-	Peak
739.60	20.42	-25.58	46.00	28.50	19.81	1.17	29.06	-	-	Peak
854.40	21.33	-24.67	46.00	27.96	20.51	1.26	28.40	-	-	Peak
2389.80	57.75	-16.25	74.00	56.72	32.86	3.15	34.98	120	35	Peak
2389.80	42.13	-11.87	54.00	41.10	32.86	3.15	34.98	120	35	Average
2412.00	90.12	-	-	89.06	32.89	3.15	34.98	125	29	Average
2412.00	100.26	-	-	99.20	32.89	3.15	34.98	125	29	Peak
2485.18	47.52	-26.48	74.00	46.25	33.01	3.20	34.94	100	74	Peak
2485.18	34.08	-19.92	54.00	32.81	33.01	3.20	34.94	100	74	Average





Test Mode :	Mode 4	Temperature :	22~23°C
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Lewis Lu	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.06	31.27	-8.73	40.00	52.09	8.12	0.31	29.25	100	172	QP
92.10	28.96	-14.54	43.50	48.46	9.35	0.42	29.27	-	-	Peak
183.63	25.23	-18.27	43.50	45.57	8.43	0.63	29.40	-	-	Peak
588.40	18.56	-27.44	46.00	28.69	18.58	1.05	29.76	-	-	Peak
696.90	20.31	-25.69	46.00	29.14	19.28	1.14	29.25	-	-	Peak
892.90	21.59	-24.41	46.00	27.97	20.46	1.29	28.13	-	-	Peak
2389.04	58.03	-15.97	74.00	57.01	32.86	3.13	34.97	100	10	Peak
2389.04	40.33	-13.67	54.00	39.31	32.86	3.13	34.97	100	10	Average
2412.00	90.66	-	-	89.60	32.89	3.15	34.98	128	0	Average
2412.00	100.99	-	-	99.93	32.89	3.15	34.98	128	0	Peak
2497.34	48.63	-25.37	74.00	47.30	33.05	3.21	34.93	102	36	Peak
2497.34	38.84	-15.16	54.00	37.51	33.05	3.21	34.93	102	36	Average



<b>Test Mode :</b>	Mode 5	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Lewis Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
46.47	18.76	-21.24	40.00	38.86	8.88	0.30	29.28	-	-	Peak
97.50	22.62	-20.88	43.50	41.32	10.15	0.44	29.29	-	-	Peak
149.61	23.74	-19.76	43.50	42.46	10.07	0.58	29.37	100	36	Peak
467.30	16.02	-29.98	46.00	28.42	16.57	0.96	29.93	-	-	Peak
681.50	19.14	-26.86	46.00	28.20	19.17	1.13	29.36	-	-	Peak
911.10	21.99	-24.01	46.00	28.20	20.50	1.29	28.00	-	-	Peak
2389.23	46.50	-27.50	74.00	45.48	32.86	3.13	34.97	102	236	Peak
2389.23	39.23	-14.77	54.00	38.21	32.86	3.13	34.97	102	236	Average
2437.00	89.84	-	-	88.69	32.95	3.17	34.97	100	14	Average
2437.00	99.57	-	-	98.42	32.95	3.17	34.97	100	14	Peak
2490.88	47.10	-26.90	74.00	45.79	33.05	3.20	34.94	134	124	Peak
2490.88	32.81	-21.19	54.00	31.50	33.05	3.20	34.94	134	124	Average



Test Mode :	Mode 5	Temperature :	22~23°C
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Lewis Lu	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.36	31.27	-8.73	40.00	52.09	8.12	0.31	29.25	100	170	QP
92.91	30.23	-13.27	43.50	49.58	9.51	0.42	29.28	-	-	Peak
183.63	24.60	-18.90	43.50	44.94	8.43	0.63	29.40	-	-	Peak
587.70	19.29	-26.71	46.00	29.42	18.58	1.05	29.76	-	-	Peak
782.30	21.32	-24.68	46.00	29.16	19.86	1.22	28.92	-	-	Peak
898.50	22.56	-23.44	46.00	28.93	20.45	1.29	28.11	-	-	Peak
2377.07	46.54	-27.46	74.00	45.55	32.83	3.13	34.97	102	21	Peak
2377.07	37.10	-16.90	54.00	36.11	32.83	3.13	34.97	102	21	Average
2437.00	100.56	-	-	99.41	32.95	3.17	34.97	131	0	Peak
2437.00	90.84	-	-	89.69	32.95	3.17	34.97	131	0	Average
2486.13	48.83	-25.17	74.00	47.56	33.01	3.20	34.94	124	46	Peak
2486.13	34.48	-19.52	54.00	33.21	33.01	3.20	34.94	124	46	Average



<b>Test Mode :</b>	Mode 6	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	41~42%
<b>Test Engineer :</b>	Lewis Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	33.81	-6.19	40.00	44.83	18.00	0.25	29.27	101	141	Peak
99.12	22.99	-20.51	43.50	41.51	10.33	0.44	29.29	-	-	Peak
149.34	24.45	-19.05	43.50	43.17	10.07	0.58	29.37	-	-	Peak
480.60	16.55	-29.45	46.00	28.63	16.89	0.97	29.94	-	-	Peak
827.80	20.07	-25.93	46.00	27.23	20.22	1.24	28.62	-	-	Peak
944.00	21.73	-32.27	54.00	27.28	20.71	1.31	27.57	-	-	Peak
2381.82	45.73	-28.27	74.00	44.74	32.83	3.13	34.97	102	245	Peak
2381.82	39.72	-14.28	54.00	38.73	32.83	3.13	34.97	102	245	Average
2462.00	99.58	-	-	98.37	32.98	3.18	34.95	172	31	Peak
2462.00	90.53	-	-	89.32	32.98	3.18	34.95	172	31	Average
2483.66	58.48	-15.52	74.00	57.21	33.01	3.20	34.94	100	348	Peak
2483.66	39.08	-14.92	54.00	37.81	33.01	3.20	34.94	100	348	Average



Test Mode :	Mode 6	Temperature :	22~23°C
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Lewis Lu	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.09	31.67	-8.33	40.00	52.49	8.12	0.31	29.25	100	168	QP
70.23	28.79	-11.21	40.00	52.35	5.30	0.37	29.23	-	-	Peak
184.98	26.71	-16.79	43.50	47.03	8.45	0.64	29.41	-	-	Peak
515.60	17.72	-28.28	46.00	29.12	17.55	0.99	29.94	-	-	Peak
753.60	20.88	-25.12	46.00	28.81	19.90	1.19	29.02	-	-	Peak
902.70	29.90	-16.10	46.00	36.23	20.46	1.29	28.08	-	-	Peak
2362.44	46.47	-27.53	74.00	45.50	32.81	3.12	34.96	145	214	Peak
2362.44	39.20	-14.80	54.00	38.23	32.81	3.12	34.96	145	214	Average
2462.00	89.59	-	-	88.38	32.98	3.18	34.95	100	312	Average
2462.00	98.97	-	-	97.76	32.98	3.18	34.95	100	312	Peak
2485.18	57.15	-16.85	74.00	55.88	33.01	3.20	34.94	100	344	Peak
2485.18	39.41	-14.59	54.00	38.14	33.01	3.20	34.94	100	344	Average



## **3.8 Antenna Requirements**

### **3.8.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.8.2 Antenna Connected Construction**

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

### **3.8.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 24, 2010	Aug. 23, 2011	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 24, 2010	Aug. 23, 2011	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 17, 2009	Nov. 16, 2010	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Jan. 18, 2010	Jan. 17, 2011	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Jan. 18, 2010	Jan. 17, 2011	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 26, 2009	Nov. 25, 2010	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	Full-Band	Jan. 08, 2009	Jan. 07, 2011	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESCI	100724	9kHz – 2.75GHz	Mar. 09, 2010	Mar. 08, 2011	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Feb. 02, 2010	Feb. 01, 2011	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Actice hore antenna	com-power	AHA-118	701023	1G-18GHz	Nov. 18, 2009	Nov. 17, 2010	Radiation (03CH01-KS)
Signal Generator	R&S	SMR40	100455	10MHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15-40GHz	Oct. 22, 2009	Oct. 21, 2010	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH01-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		



**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP092732 as below.