

EMISSIONS TEST REPORT

Report Number: 101276754BOX-001

Project Number: G101276754

Report Issue Date: 08/18/2013

Product Designation: Troy 2.0 (Part of 7000C Wireless Communicator)

Standards: FCC 47CFR Part 15:2013 Subpart C 15.249
FCC 47CFR Part 15:2013 Subpart B Class B
RSS-210 Issue 8 December 2010
ICES-003 Issue 5 August 2012

Tested by:
Intertek Testing Services NA, Inc.
70 Codman Hill Road
Boxborough, MA 01719
USA

Client:
Lifeline System Inc.
111 Lawrence Street
Framingham, MA 01702-8156
USA

Report prepared by Reviewer



Kouma Sinn / Senior Project Engineer

Report reviewed by



Michael F. Murphy / Sr. Staff Engineer, EMC

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

2 Test Summary

Section	Test full name	Result
3	Client Information	--
4	Description of Equipment Under Test	--
5	System Setup and Method	--
6	Fundamental Frequency Radiated Emissions FCC 47CFR Part 15:2013 Subpart C 15.249, RSS-210 Issue 8 December 2010	Pass
--	AC Mains Conducted Emissions	N/A
7	Transmitter Spurious Radiated Emissions FCC 47CFR Part 15:2013 Subpart C 15.249, 15.209 RSS-210 Issue 8 December 2010, ICES-003 Issue 5 August 2012	Pass
8	Receiver Spurious Radiated Emissions FCC 47CFR Part 15:2013 Subpart B Class B ICES-003 Issue 5 August 2012	Pass
9	20 dB Bandwidth FCC 47CFR Part 15:2013 Subpart C 15.249, RSS-210 Issue 8 December 2010	Pass
10	Revision History	--

3 Client Information

This EUT was tested at the request of:

Client: Lifeline System Inc.
111 Lawrence Street
Framingham, MA 01702-8156 USA

Contact: Escipion Baez
Telephone: (508) 988-3032
Fax: (508) 988-1384
Email: Escipion.Baez@philips.com

4 Description of Equipment Under Test

Manufacturer: Lifeline System Inc.
111 Lawrence Street
Framingham, MA 01702-8156 USA

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Alert Pendant	Lifeline System Inc.	Troy 2.0	0002

Receive Date:	08/05/2013
Received Condition:	Good
Type:	Production

Description of Equipment Under Test (provided by client)

The EUT is an alert pendant (Help Button). It is part of the Philips Lifeline Medical Alert Service HomeSafe System. It normal uses with the 7000C Wireless Communicator.

Equipment Under Test Power Configuration			
Rated Voltage	Rated Current	Rated Frequency	Number of Phases
3.6VDC (Internal Battery)	N/A	N/A	N/A

Operating modes of the EUT:

No.	Descriptions of EUT Exercising
1	Transmit Mode at 917 MHz, 919 MHz, and 921 MHz
2	Idle/Receive

Software used by the EUT:

No.	Descriptions of EUT Exercising
1	None

5 System Setup and Method



Cables					
ID	Description	Length (m)	Shielding	Ferrites	Termination
	None				

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
None			

5.1 Method:

Configuration as required by FCC 47CFR Part 15:2013 Subpart C 15.249, FCC 47CFR Part 15:2013 Subpart B Class B, RSS-210 Issue 8 December 2010 ICES-003 Issue 5 August 2012, and ANSI C63.4:2009.

5.2 EUT Block Diagram:

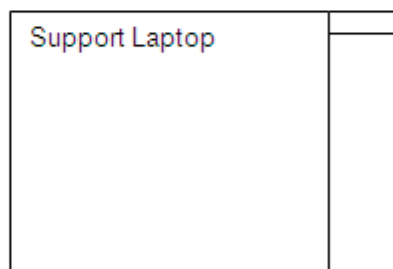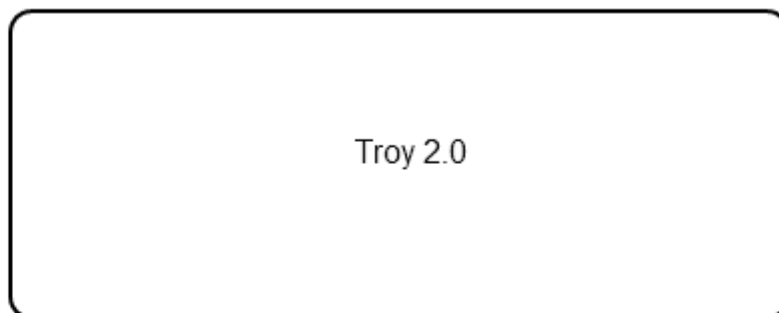

6 Fundamental Frequency Radiated Emissions

6.1 Method

Tests are performed in accordance with FCC 47CFR Part 15:2013 Subpart C 15.249, RSS-210 Issue 8 December 2010 ICES-003 Issue 5 August 2012, and ANSI C63.4:2009.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A Styrofoam table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) < U_{CISPR} (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
 AF = 7.4 dB/m
 CF = 1.6 dB
 AG = 29.0 dB
 FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

$$NF = \text{Net Reading in dB}\mu\text{V}$$

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

6.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV004'	Weather Station	Davis Instruments	7400	PE80529A61A	09/25/2012	09/25/2014
145106'	Bilog Antenna (30MHz - 5GHz)	Sunol Sciences	JB5	A111003	09/04/2012	09/04/2013
145-410'	Cables 145-400 145-403 145-405 145-406 145-407	Huber + Suhner	10m Track A Cables	multiple	10/04/2012	10/04/2013
145003'	Preamplifier (150 KHz to 1.3 GHz)	Hewlett Packard	8447D	2443A04077	10/04/2012	10/04/2013
145128'	EMI Receiver 40 GHz (20 Hz - 40 Ghz)	Rohde & Schwarz	ESI	8392831001	09/28/2012	09/28/2013

Software Utilized:

Name	Manufacturer	Version
C5	Teseq	5.26.46.46

6.3 Results:

The sample tested found to Comply.

6.4 Setup Photographs:

This Picture Can be found in a different Exhibit:
Troy2 – Pictures for EMC
Test Setups(7000AHB)

Y-Axis (EUT on its long side)

This Picture Can be found in a different Exhibit:
Troy2 – Pictures for EMC
Test Setups(7000AHB)

6.5 Plots/Data:


X-Axis (EUT on its short side)

Test Information

Test Details User Entry
 Test: Radiated - FCC15.249 & IC RSS-210 A2.9 902-928MHz @ 10m
 Project: Lifeline System, Inc.
 Test Notes: Troy, Serial # 002, EUT on its short side
 Temperature: 23C
 Humidity: 43%, 1010mbar
 Tested by: Kouma Sinn
 Test Started: 6 Aug 2013 13 : 47

Additional Information

Prescan Emission Graph

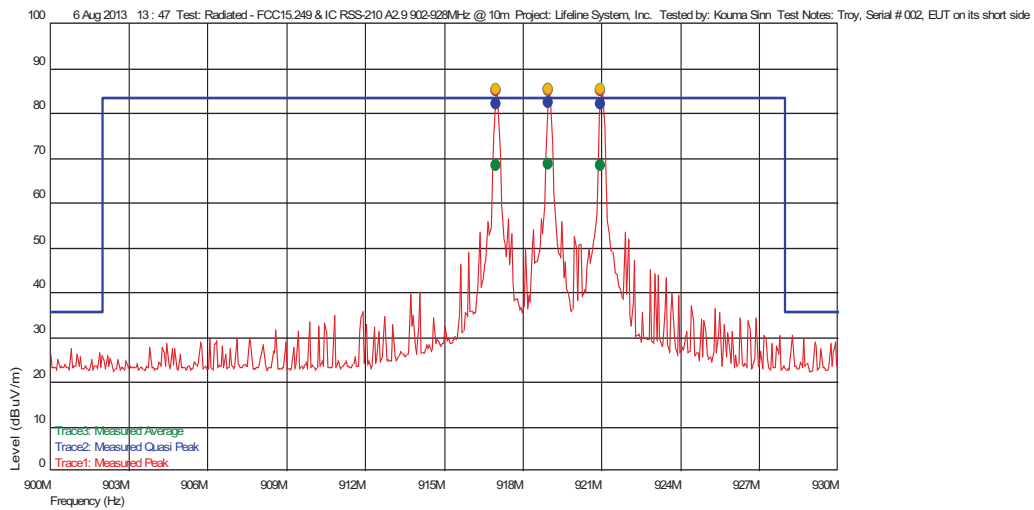

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace1: Measured Peak

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
917.006011968 M	84.91	22.800	-22.883	--	--		115	1.98	120 k	
920.983567206 M	85.00	22.820	-22.892	--	--		106	1.87	120 k	
918.991583174 M	85.12	22.800	-22.887	--	--		115	1.98	120 k	


Trace2: Measured Quasi Peak

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
917.006011968 M	82.03	22.800	-22.883	83.520	-1.49		115	1.98	120 k	
920.983567206 M	82.08	22.820	-22.892	83.520	-1.44		106	1.87	120 k	
918.991583174 M	82.24	22.800	-22.887	83.520	-1.28		115	1.98	120 k	

Azimuth Plots

Turntable Plot (917.006011968 MHz)

Level (dBuV/m)

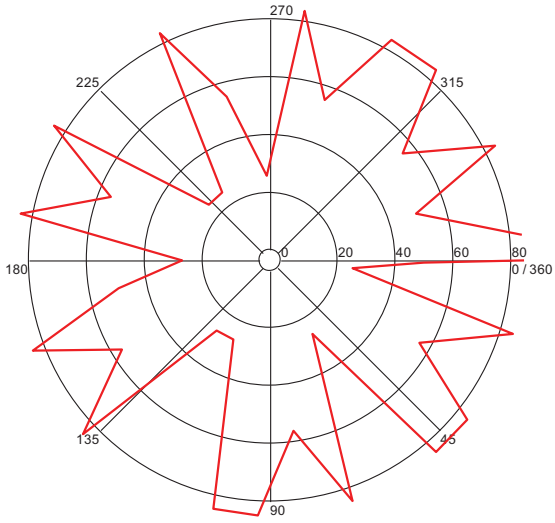


All Polarities

Azimuth (Degrees)


Turntable Plots

Height Plot (917.006011968 MHz)



Turntable Plot (918.991583174 MHz)


Level (dBuV/m)

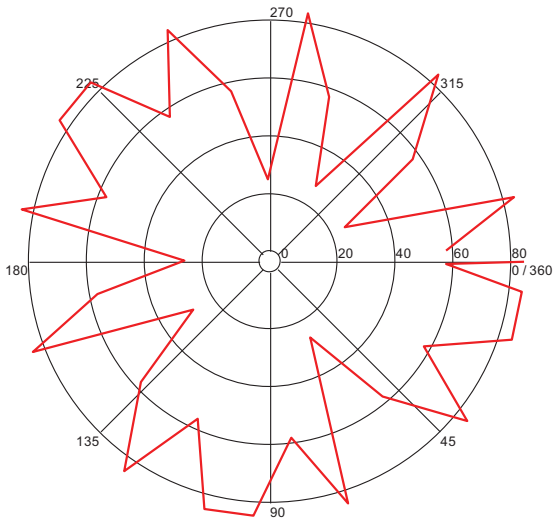

All Polarities


Azimuth (Degrees)

Height Plot (918.991583174 MHz)

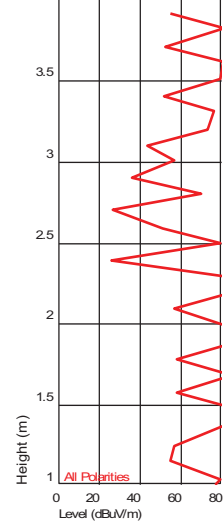

Turntable Plot (920.983567206 MHz)


Level (dBuV/m)

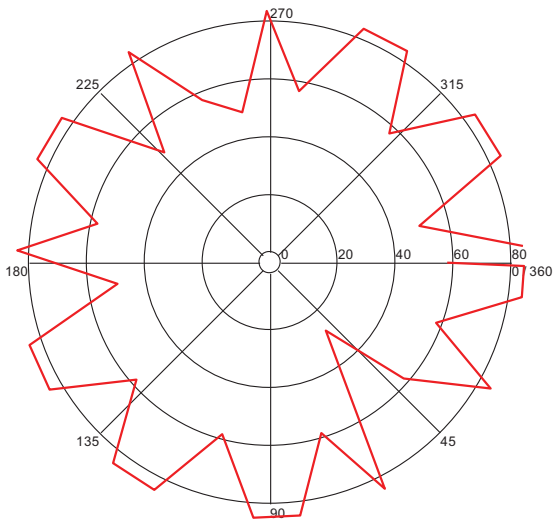

All Polarities

Azimuth (Degrees)

Height Plot (920.983567206 MHz)

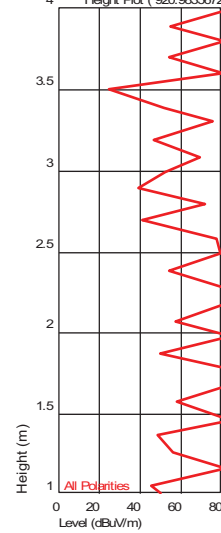

All Polarities

Level (dBuV/m)


Y-Axis (EUT on its long side)

Test Information

Test Details User Entry
 Test: Radiated - FCC15.249 & IC RSS-210 A2.9 902-928MHz @ 10m
 Project: Lifeline System, Inc.
 Test Notes: Troy, Serial # 002, EUT on its long side
 Temperature: 23C
 Humidity: 43%, 1010mbar
 Tested by: Kouma Sinn
 Test Started: 6 Aug 2013 13 : 28

Additional Information

Prescan Emission Graph

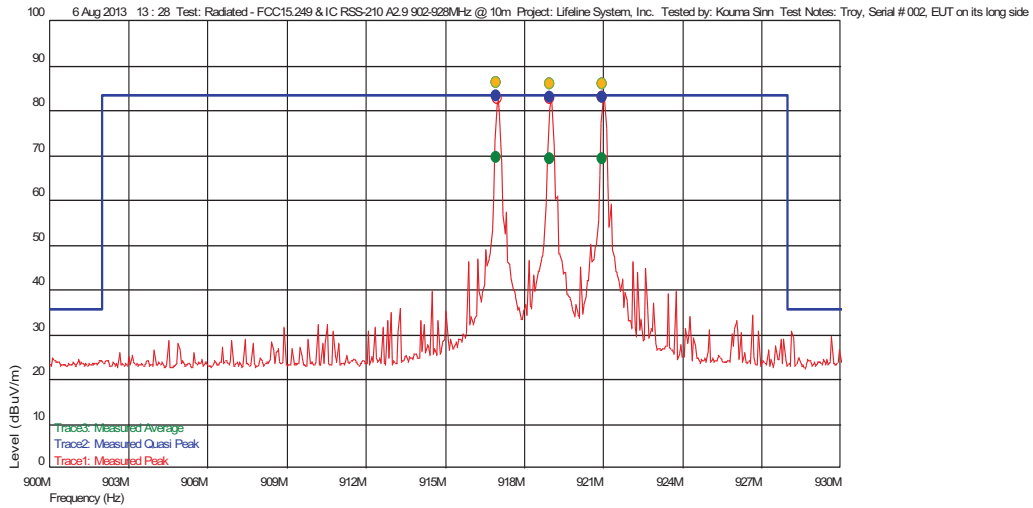

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace1: Measured Peak

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
920.987575222 M	85.76	22.820	-22.892	--	--	--	188	1.05	120 k	
918.987575158 M	85.78	22.800	-22.887	--	--	--	191	1.04	120 k	
916.988376697 M	86.01	22.800	-22.882	--	--	--	182	1.04	120 k	


Trace2: Measured Quasi Peak

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
920.987575222 M	82.86	22.820	-22.892	83.520	-0.66	--	188	1.05	120 k	
918.987575158 M	82.87	22.800	-22.887	83.520	-0.65	--	191	1.04	120 k	
916.988376697 M	83.15	22.800	-22.882	83.520	-0.37	--	182	1.04	120 k	

Azimuth Plots

Turntable Plot (916.988376697 MHz)

Level (dBuV/m)

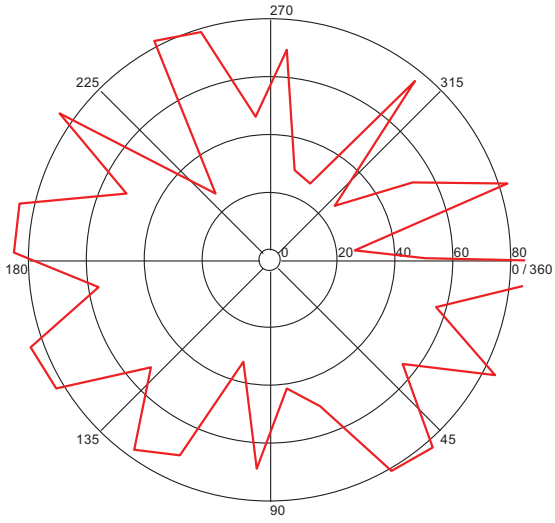


All Polarities

Azimuth (Degrees)

Turntable Plot (918.987575158 MHz)

Level (dBuV/m)

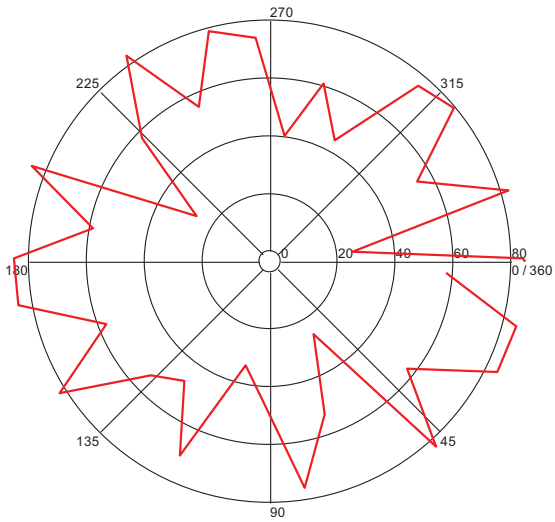


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (916.988376697 MHz)

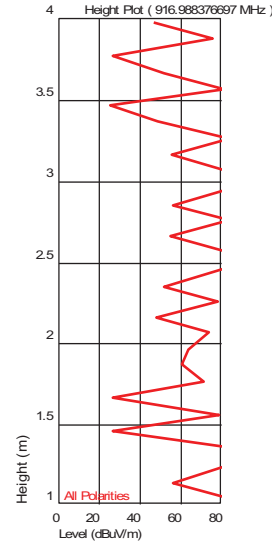


Height Plot (918.987575158 MHz)

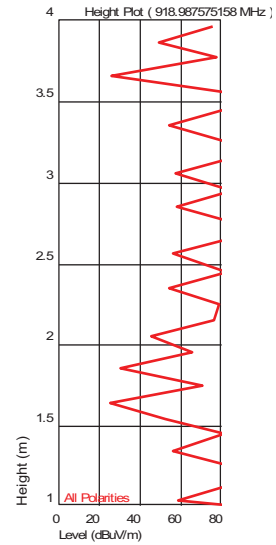

Turntable Plot (920.987575222 MHz)


Level (dBuV/m)

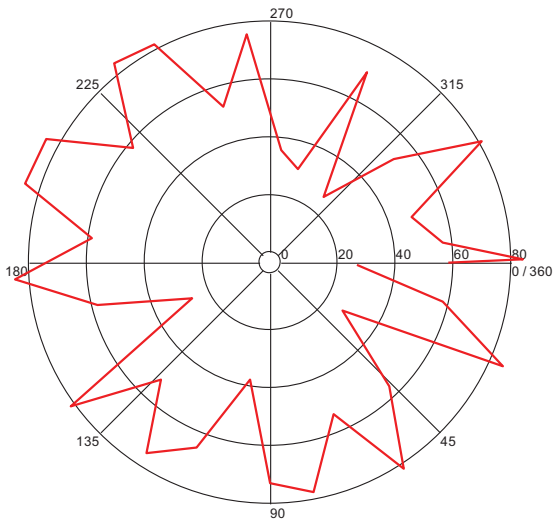

All Polarities

Azimuth (Degrees)

Height Plot (920.987575222 MHz)



All Polarities


Z-Axis (EUT on its back)

Test Information

Test Details User Entry
 Test: Radiated - FCC15.249 & IC RSS-210 A2.9 902-928MHz @ 10m
 Project: Lifeline System, Inc.
 Test Notes: Troy, Serial # 002, EUT on its back
 Temperature: 23C
 Humidity: 43%, 1010mbar
 Tested by: Kouma Sinn
 Test Started: 6 Aug 2013 14 : 05

Additional Information

Prescan Emission Graph

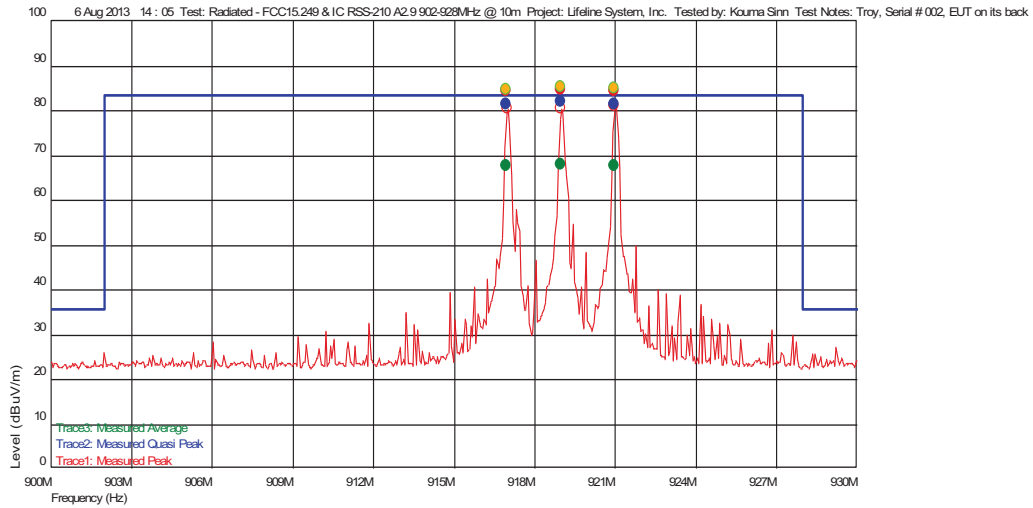

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace1: Measured Peak

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
920.994789651 M	84.30	22.820	-22.892	--	--	--	164	1.14	120 k	
916.985971888 M	84.37	22.800	-22.882	--	--	--	159	1.14	120 k	
918.993186381 M	84.77	22.800	-22.887	--	--	--	168	1.05	120 k	


Trace2: Measured Quasi Peak

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
920.994789651 M	81.39	22.820	-22.892	83.520	-2.13	--	164	1.14	120 k	
916.985971888 M	81.41	22.800	-22.882	83.520	-2.11	--	159	1.14	120 k	
918.993186381 M	81.88	22.800	-22.887	83.520	-1.64	--	168	1.05	120 k	

Azimuth Plots

Turntable Plot (916.985971888 MHz)

Level (dBuV/m)

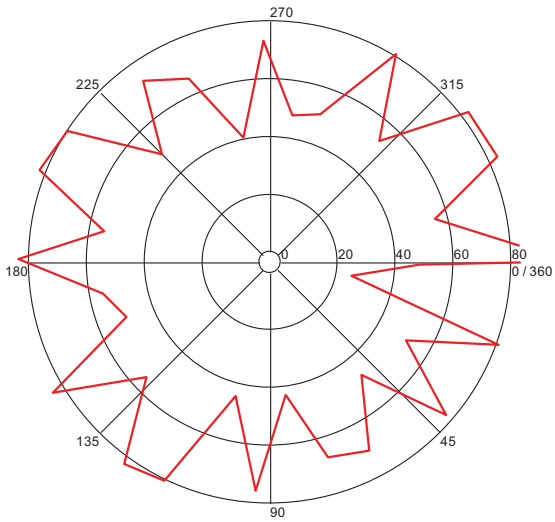


All Polarities

Azimuth (Degrees)

Turntable Plot (918.993186381 MHz)

Level (dBuV/m)

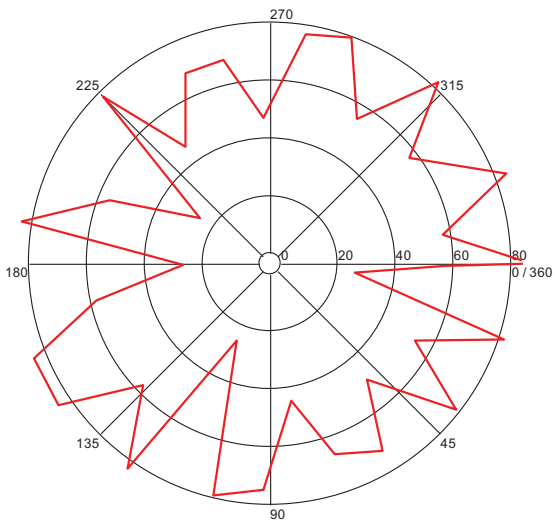


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (916.985971888 MHz)

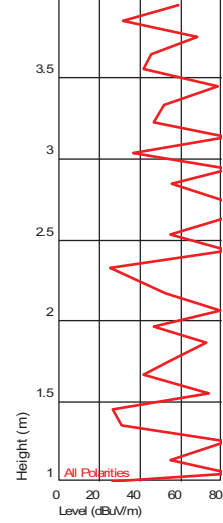


Height Plot (918.993186381 MHz)

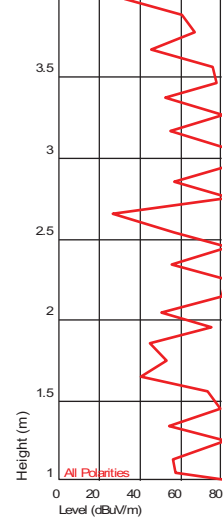

Turntable Plot (920.994789651 MHz)


Level (dBuV/m)

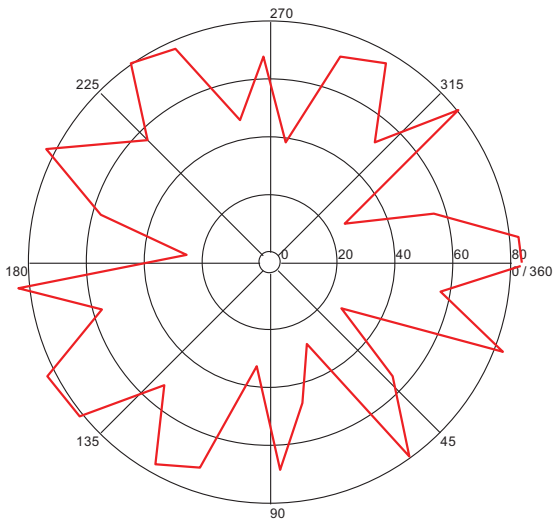

All Polarities

Azimuth (Degrees)

Height Plot (920.994789651 MHz)

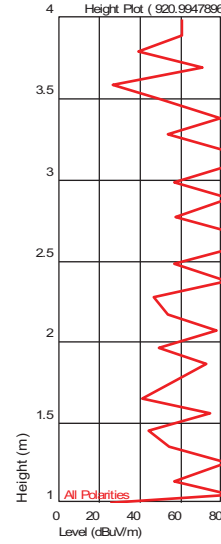

Test Personnel: Kouma Sinn *KPS*
Supervising/Reviewing Engineer: N/A
(Where Applicable) Product Standard: FCC 15.249, RSS-210
Input Voltage: Battery power
Pretest Verification w/ Ambient Signals or BB Source: Yes

Test Date: 08/06/2013

Limit Applied: 83.52 dBuV/m at 10 meters

Ambient Temperature: 23 °C

Relative Humidity: 43 %

Atmospheric Pressure: 1010 mbars

Deviations, Additions, or Exclusions: None

7 Transmitter Spurious Radiated Emissions

7.1 Method

Tests are performed in accordance with FCC 47CFR Part 15:2013 Subpart C 15.249 & 15.209, RSS-210 Issue 8 December 2010 ICES-003 Issue 5 August 2012, and ANSI C63.4:2009.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A Styrofoam table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) < U_{CISPR} (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
 AF = 7.4 dB/m
 CF = 1.6 dB
 AG = 29.0 dB
 FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

$$NF = \text{Net Reading in dB}\mu\text{V}$$

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

7.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV004'	Weather Station	Davis Instruments	7400	PE80529A61A	09/25/2012	09/25/2014
145106'	Bilog Antenna (30MHz - 5GHz)	Sunol Sciences	JB5	A111003	09/04/2012	09/04/2013
145-410'	Cables 145-400 145-403 145-405 145-406 145-407	Huber + Suhner	10m Track A Cables	multiple	10/04/2012	10/04/2013
145003'	Preamplifier (150 KHz to 1.3 GHz)	Hewlett Packard	8447D	2443A04077	10/04/2012	10/04/2013
145128'	EMI Receiver 40 GHz (20 Hz - 40 Ghz)	Rohde & Schwarz	ESI	8392831001	09/28/2012	09/28/2013
ETS001'	1-18GHz DRG Horn Antenna	ETS-Lindgren	3117	00143259	12/17/2012	12/17/2013
145-416'	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	10/04/2012	10/04/2013
145014'	Preamplifier (1 GHz to 26.5 GHz)	Hewlett Packard	8449B	3008A00232	12/13/2012	12/13/2013
REA003'	1GHz High Pass Filter	Reactel, Inc	7HS-1G/10G-S11	06-1	11/30/2011	11/30/2013

Software Utilized:

Name	Manufacturer	Version
C5	Teseq	5.26.46.46

7.3 Results:

The sample tested was found to Comply.

7.4 Setup Photographs:

X-Axis (EUT on its short side), 30-1000 MHz

**This Picture Can be found in a different Exhibit:
Troy2 – Pictures for EMC
Test Setups(7000AHB)**

Y-Axis (EUT on its long side), 30-1000 MHz

This Picture Can be found in a different Exhibit:
Troy2 – Pictures for EMC
Test Setups(7000AHB)

X-Axis (EUT on its short side). 1-10 GHz

This Picture Can be found in a different Exhibit:
Troy2 – Pictures for EMC
Test Setups(7000AHB)

Y-Axis (EUT on its long side), 1-10 GHz

This Picture Can be found in a different Exhibit:
Troy2 – Pictures for EMC
Test Setups(7000AHB)

Z-Axis (EUT on its back), 1-10 GHz

This Picture Can be found in a different Exhibit:
Troy2 – Pictures for EMC
Test Setups(7000AHB)

7.5 Plots/Data:


X-Axis (EUT on its short side), 30-1000 MHz

Test Information

Test Details User Entry
 Test: Radiated - FCC15.249 & IC RSS-210 A2.9 902-928MHz @ 10m
 Project: Lifeline System, Inc.
 Test Notes: Troy 2, Serial # 002, Transmits Mode, short Side
 Temperature: 23C
 Humidity: 43%, 1010mbar
 Tested by: Vathana Ven
 Test Started: 6 Aug 2013 17 : 11

Additional Information

Prescan Emission Graph

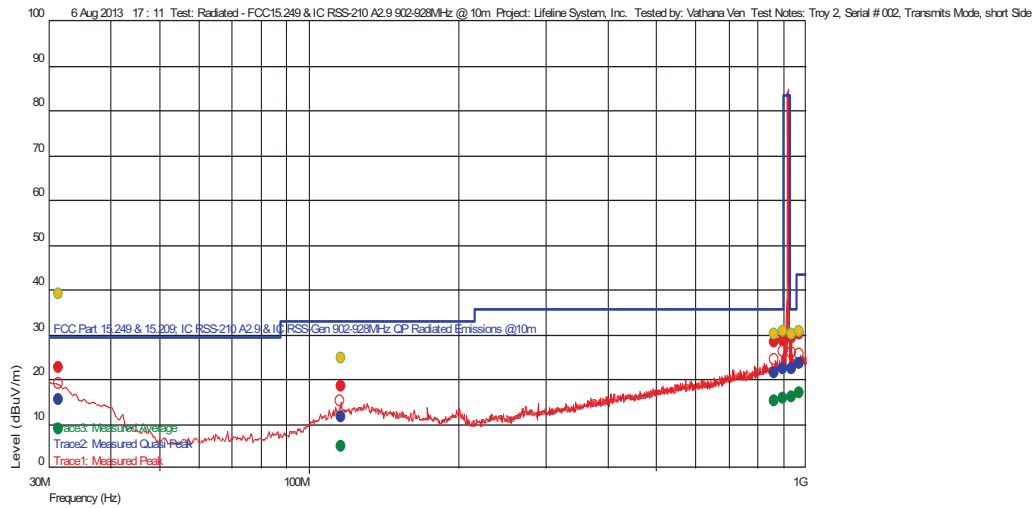

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data


Trace2: Measured Quasi Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (-), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)	Comment
116.277555042 M	11.54	13.402	-24.681	33.040	-21.50	--	244	3.68	120 k	
971.567334359 M	23.43	23.469	-22.855	43.540	-20.11	--	180	2.98	120 k	
31.457114397 M	15.39	19.780	-26.444	29.540	-14.15		30	3.58	120 k	
867.668737156 M	21.43	22.253	-23.095	35.540	-14.11		211	1.55	120 k	
900.978957525 M	22.16	22.620	-22.842	35.540	-13.38		113	4.00	120 k	
937.989779433 M	22.30	22.960	-22.935	35.540	-13.24		105	2.37	120 k	

Azimuth Plots

Turntable Plot (31.457114397 MHz)

Level (dBuV/m)

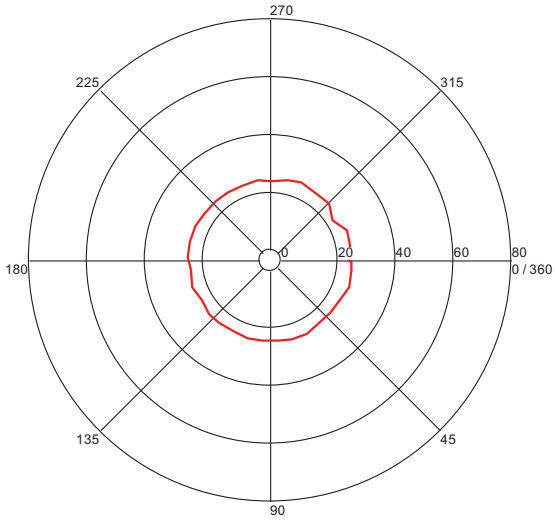


All Polarities

Azimuth (Degrees)

Turntable Plot (116.277555042 MHz)

Level (dBuV/m)

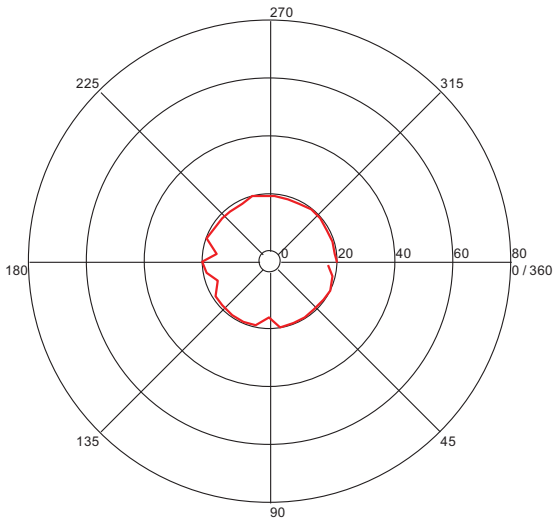


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (31.457114397 MHz)




Height Plot (116.277555042 MHz)

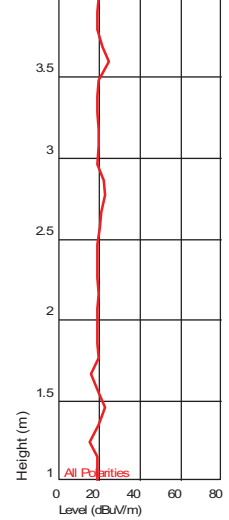


Turntable Plot (867.668737156 MHz)

Level (dBuV/m)

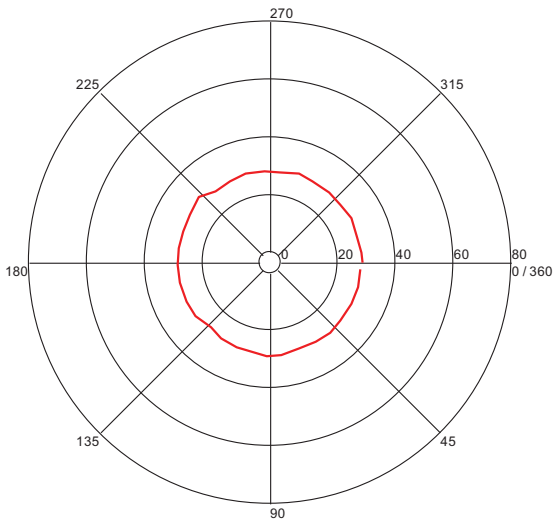


All Polarities

Azimuth (Degrees)

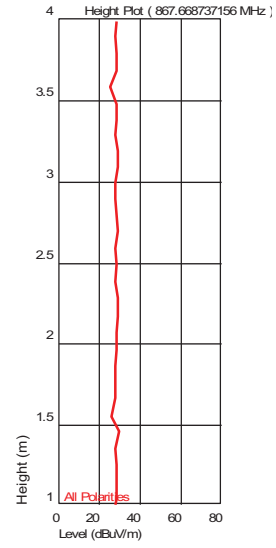


Turntable Plot (900.978957525 MHz)

Level (dBuV/m)

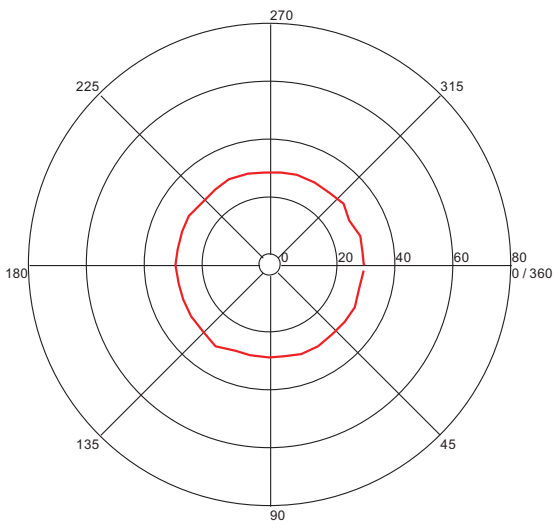


All Polarities

Azimuth (Degrees)

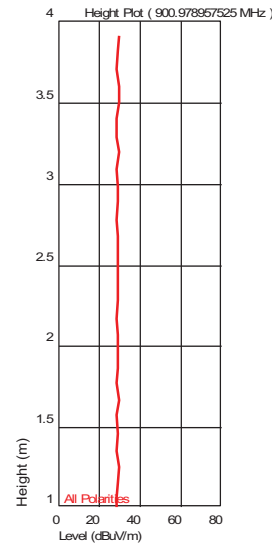

Turntable Plot (937.989779433 MHz)


Level (dBuV/m)

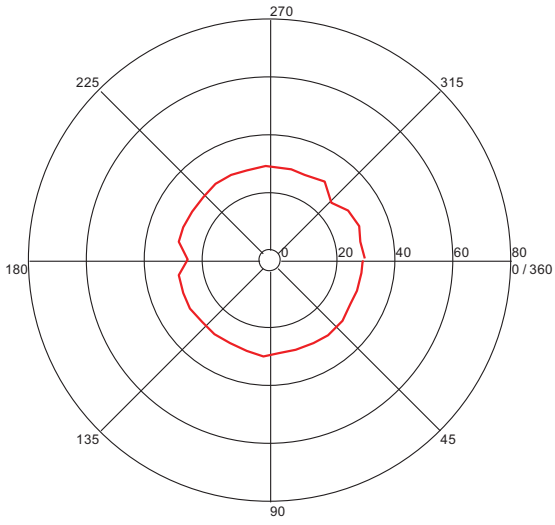

All Polarities


Azimuth (Degrees)

Height Plot (937.989779433 MHz)

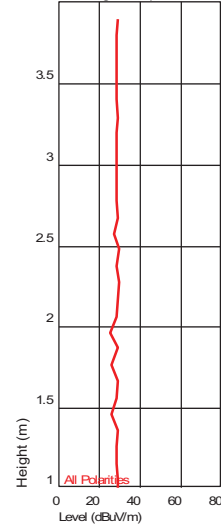

Turntable Plot (971.567334359 MHz)


Level (dBuV/m)

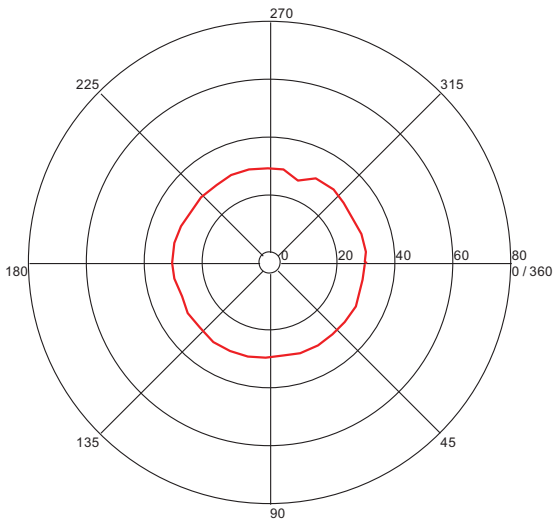

All Polarities

Azimuth (Degrees)

Height Plot (971.567334359 MHz)

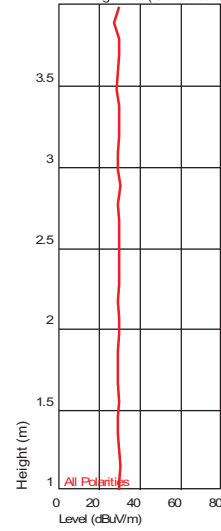


X-Axis (EUT on its short side), 1-10 GHz

Test Information

Test Details User Entry
 Test: Radiated - FCC15.249 & IC RSS-210 A2.9 902-928MHz @ 3m
 Project: Lifeline Systems
 Test Notes: Troy 2.0, SN:0002, Tx Mode. EUT on its short side
 Temperature: 22C
 Humidity: 51%, 1014mbar
 Tested by: Kouma Sinn
 Test Started: 18 Aug 2013 11 : 19

Additional Information

Prescan Emission Graph

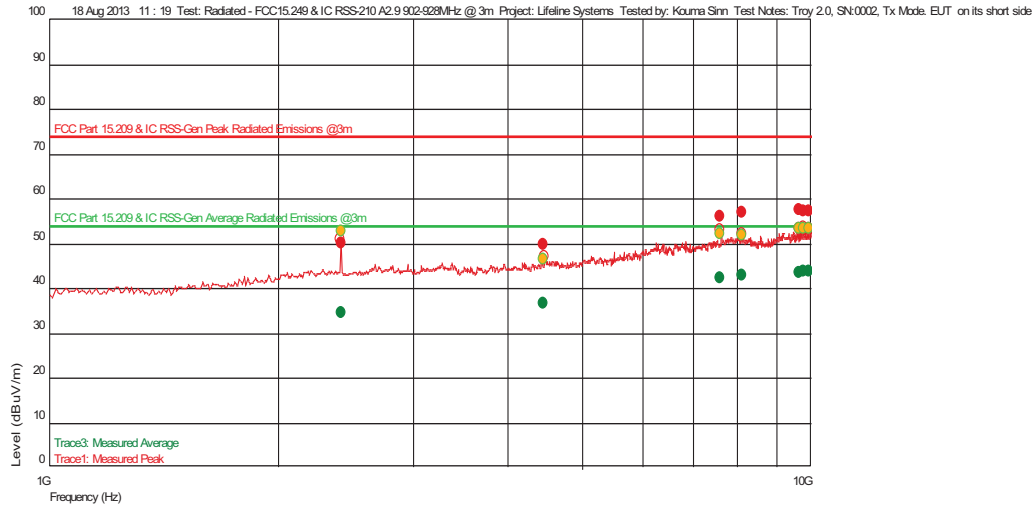

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace1: Measured Peak

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (-), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
4.463814295 G	49.84	34.342	-26.501	74.000	-24.16	--	205	1.52	1 M	
2.418964595 G	50.07	32.370	-27.516	74.000	-23.93		207	3.54	1 M	
7.615337341 G	55.91	36.192	-22.951	74.000	-18.09		269	4.01	1 M	
8.136840347 G	56.76	36.445	-22.481	74.000	-17.24		73	4.01	1 M	
9.802117568 G	57.19	37.663	-22.617	74.000	-16.81		278	3.36	1 M	
9.937047429 G	57.31	37.824	-22.660	74.000	-16.69		94	2.80	1 M	
9.667181028 G	57.35	37.534	-22.573	74.000	-16.65		342	3.49	1 M	


Trace3: Measured Average

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (-), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
2.418964595 G	34.41	32.370	-27.516	54.000	-19.59		207	3.54	1 M	
4.463814295 G	36.43	34.342	-26.501	54.000	-17.57	--	205	1.52	1 M	
7.615337341 G	42.32	36.192	-22.951	54.000	-11.68		269	4.01	1 M	
8.136840347 G	42.72	36.445	-22.481	54.000	-11.28		73	4.01	1 M	
9.667181028 G	43.37	37.534	-22.573	54.000	-10.63		342	3.49	1 M	
9.802117568 G	43.63	37.663	-22.617	54.000	-10.37		278	3.36	1 M	
9.937047429 G	43.75	37.824	-22.660	54.000	-10.25		94	2.80	1 M	

Azimuth Plots

Turntable Plot (2.418964595 GHz)

Level (dBuV/m)

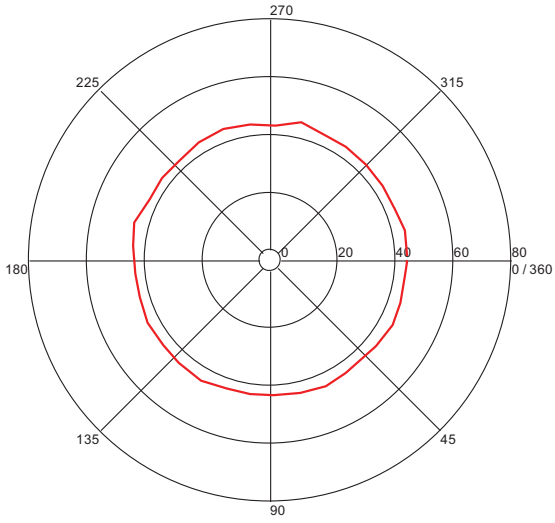


All Polarities

Azimuth (Degrees)


Turntable Plots

Height Plot (2.418964595 GHz)

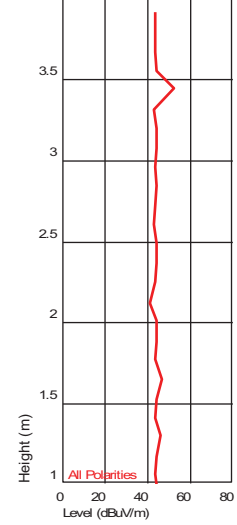

Turntable Plot (4.463814295 GHz)


Level (dBuV/m)

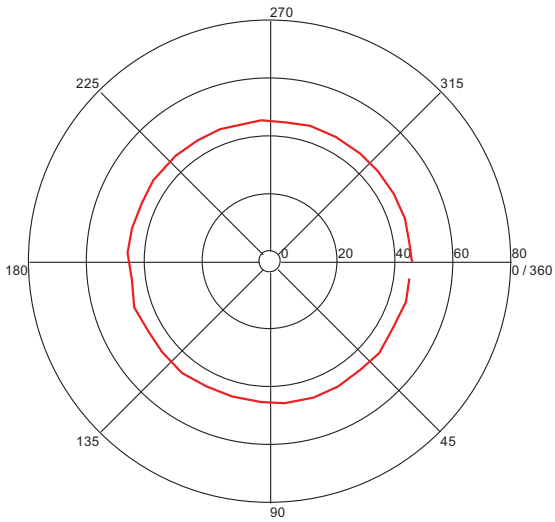

All Polarities


Azimuth (Degrees)

Height Plot (4.463814295 GHz)

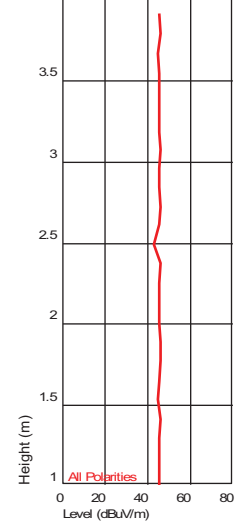

Turntable Plot (7.615337341 GHz)


Level (dBuV/m)

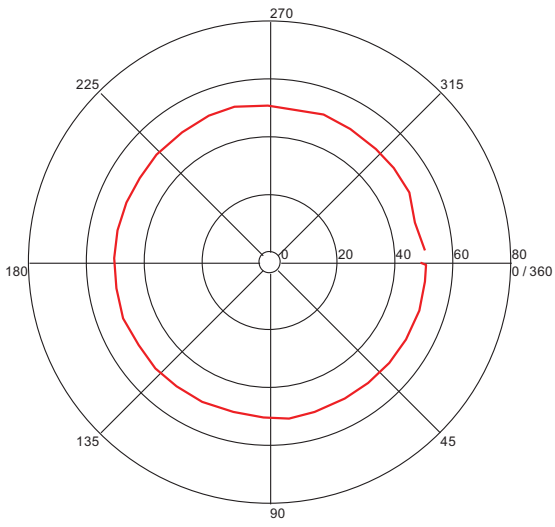

All Polarities


Azimuth (Degrees)

Height Plot (7.615337341 GHz)

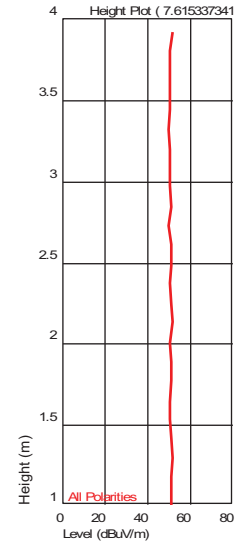

Turntable Plot (8.136840347 GHz)


Level (dBuV/m)

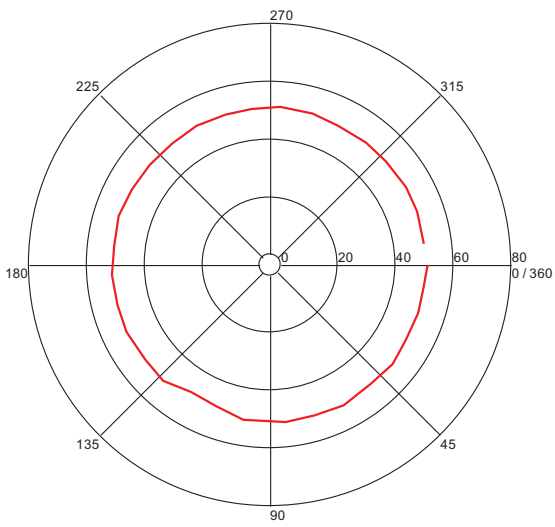

All Polarities


Azimuth (Degrees)

Height Plot (8.136840347 GHz)

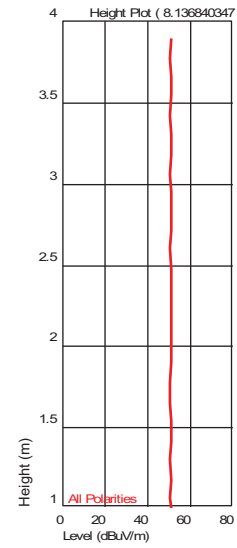

Turntable Plot (9.667181028 GHz)


Level (dBuV/m)

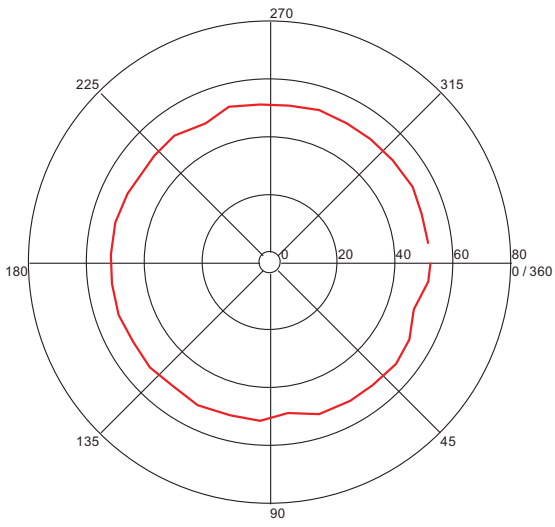

All Polarities


Azimuth (Degrees)

Height Plot (9.667181028 GHz)

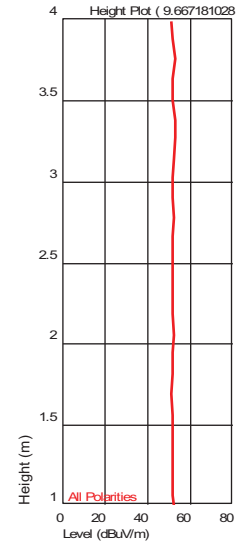

Turntable Plot (9.802117568 GHz)


Level (dBuV/m)

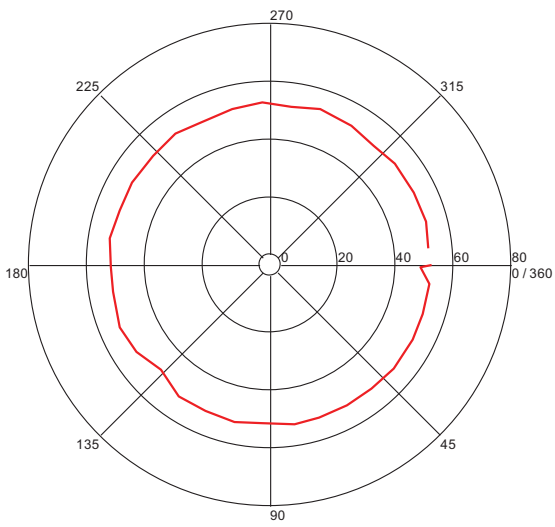

All Polarities


Azimuth (Degrees)

Height Plot (9.802117568 GHz)

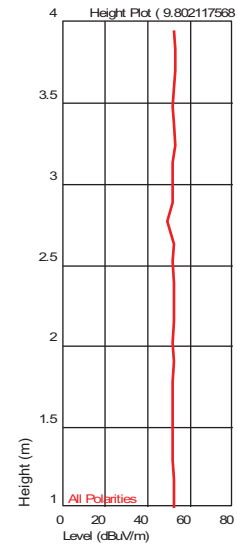

Turntable Plot (9.937047429 GHz)


Level (dBuV/m)

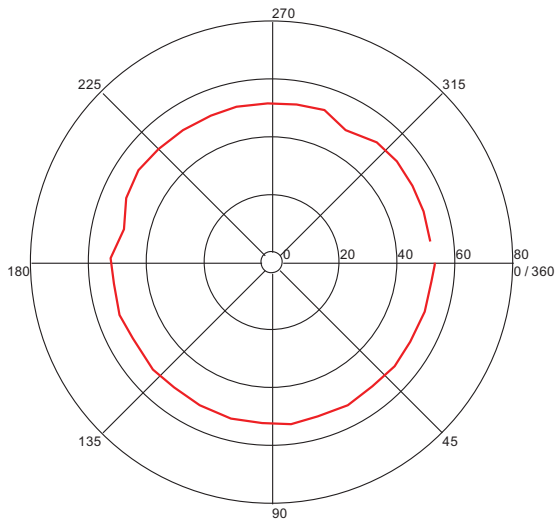

All Polarities

Azimuth (Degrees)

Height Plot (9.937047429 GHz)

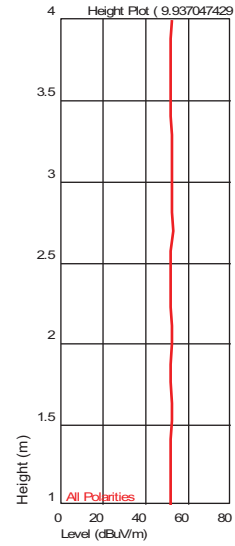

All Polarities


Y-Axis (EUT on its long side), 30-1000 MHz

Test Information

Test Details User Entry
 Test: Radiated - FCC15.249 & IC RSS-210 A2.9 902-928MHz @ 10m
 Project: Lifeline System, Inc.
 Test Notes: Troy 2, Serial # 002, Transmits Mode, Long Side
 Temperature: 23C
 Humidity: 43%, 1010mbar
 Tested by: Kouma Sinn
 Test Started: 6 Aug 2013 16 : 33

Additional Information

Prescan Emission Graph

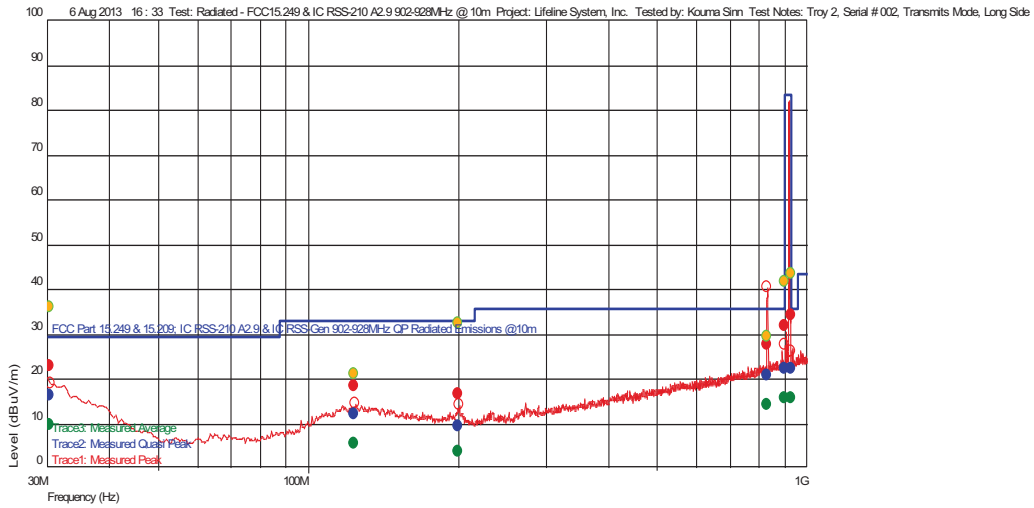

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data


Trace2: Measured Quasi Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)	Comment
200.186572842 M	9.49	13.048	-24.379	33.040	-23.55		191	2.47	120 k	
123.823246379 M	11.97	13.929	-24.667	33.040	-21.07	--	75	2.59	120 k	
831.027053637 M	20.83	22.079	-23.411	35.540	-14.71		117	4.00	120 k	
901.900400523 M	22.18	22.638	-22.845	35.540	-13.36	--	170	1.14	120 k	
30.422645347 M	16.21	20.504	-26.462	29.540	-13.33	--	354	2.70	120 k	
929.829458894 M	22.37	22.900	-22.915	35.540	-13.17	--	180	1.14	120 k	

Azimuth Plots

Turntable Plot (30.422645347 MHz)

Level (dBuV/m)

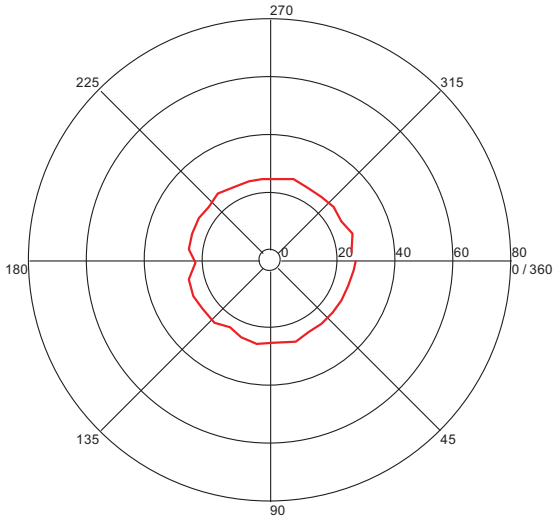


All Polarities

Azimuth (Degrees)

Turntable Plot (123.823246379 MHz)

Level (dBuV/m)

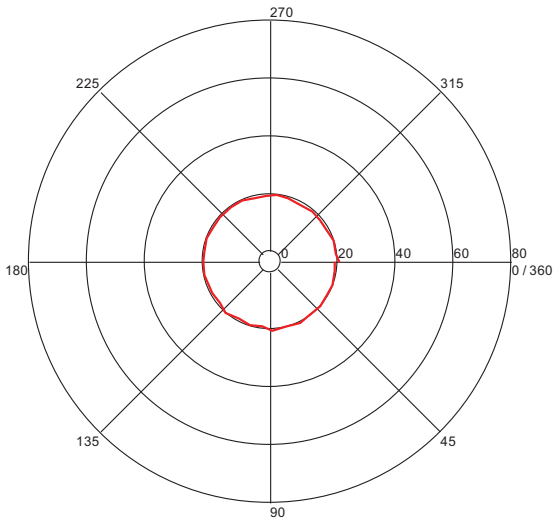


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (30.422645347 MHz)

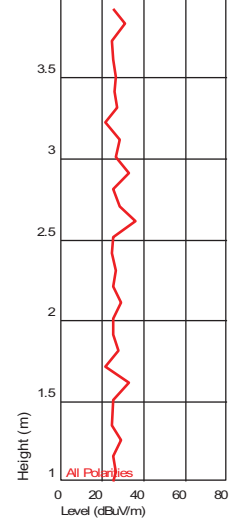


Height Plot (123.823246379 MHz)

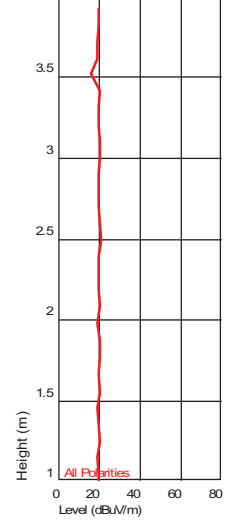

Turntable Plot (200.186572842 MHz)


Level (dBuV/m)

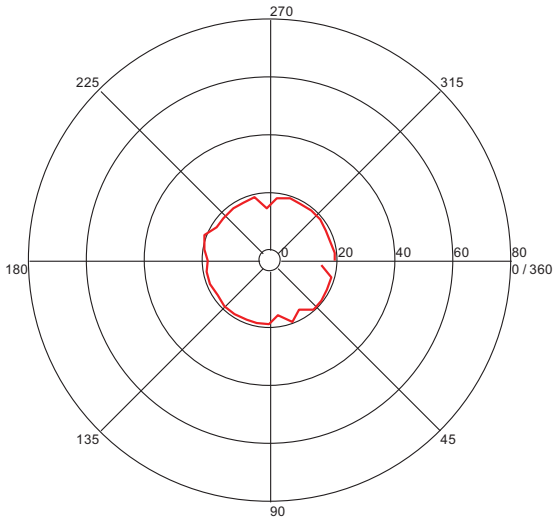

All Polarities


Azimuth (Degrees)

Height Plot (200.186572842 MHz)

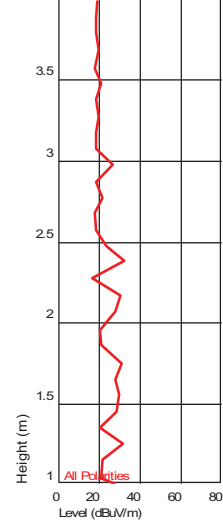

Turntable Plot (831.027053637 MHz)


Level (dBuV/m)

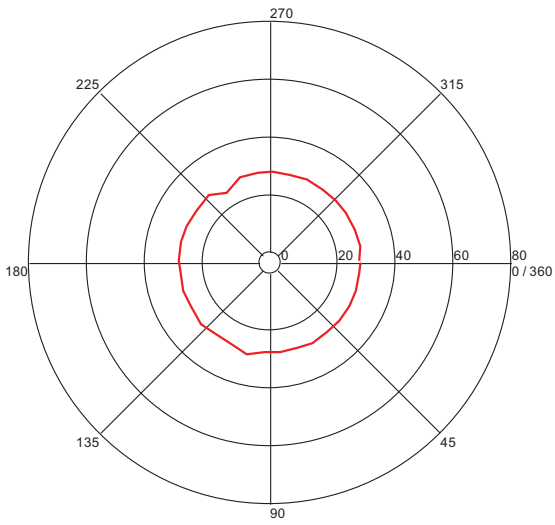

All Polarities


Azimuth (Degrees)

Height Plot (831.027053637 MHz)

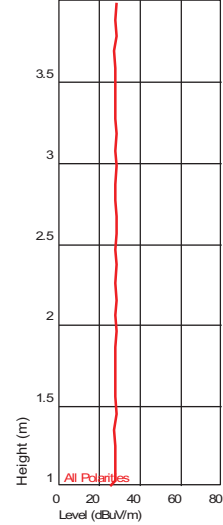

Turntable Plot (901.900400523 MHz)


Level (dBuV/m)

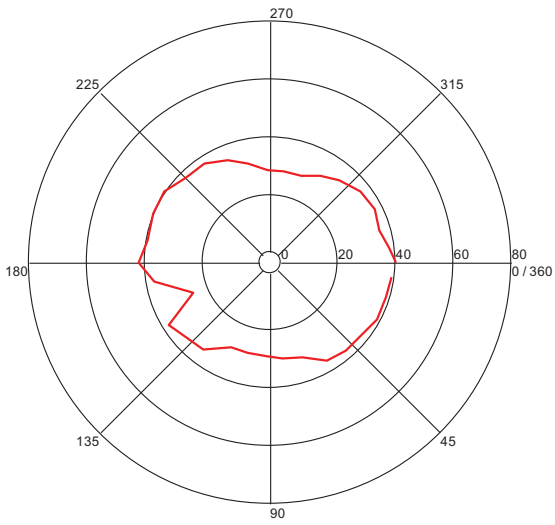

All Polarities


Azimuth (Degrees)

Height Plot (901.900400523 MHz)

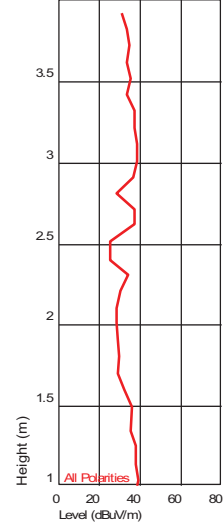

Turntable Plot (929.829458894 MHz)


Level (dBuV/m)

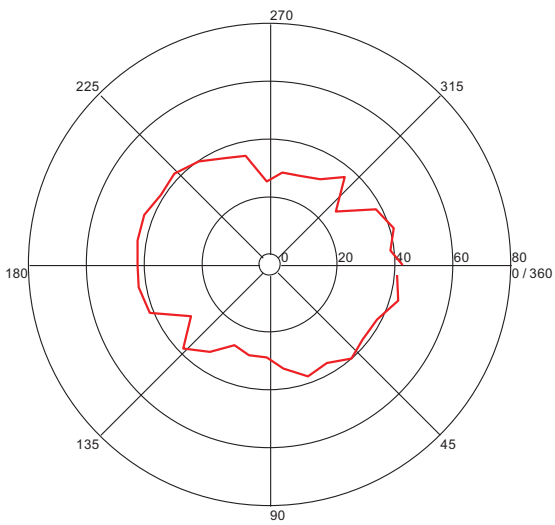

All Polarities

Azimuth (Degrees)

Height Plot (929.829458894 MHz)

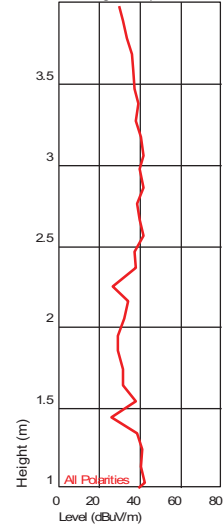


Y-Axis (EUT on its long side), 1-10 GHz

Test Information

Test Details User Entry
 Test: Radiated - FCC15.249 & IC RSS-210 A2.9 902-928MHz @ 3m
 Project: Lifeline Systems
 Test Notes: Troy 2.0, SN:0002, Tx Mode. EUT on its long side
 Temperature: 22C
 Humidity: 51%, 1014mbar
 Tested by: Kouma Sinn
 Test Started: 18 Aug 2013 11 : 58

Additional Information

Prescan Emission Graph

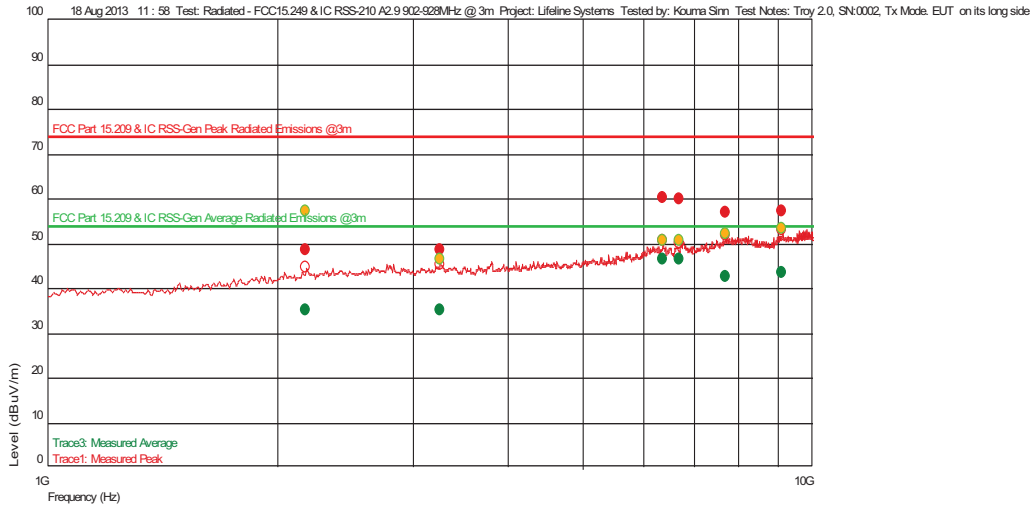

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace1: Measured Peak

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (-), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
2.178383433 G	48.51	32.014	-27.742	74.000	-25.49		7	1.94	1 M	
3.261229125 G	48.63	33.396	-27.293	74.000	-25.37		324	2.73	1 M	
7.698022713 G	56.76	36.258	-22.815	74.000	-17.24		7	1.52	1 M	
9.128056112 G	57.06	37.002	-22.334	74.000	-16.94		9	1.18	1 M	
6.715597863 G	59.80	35.814	-23.665	74.000	-14.20		360	4.01	1 M	
6.371910488 G	60.01	35.849	-23.637	74.000	-13.99	--	360	2.91	1 M	


Trace3: Measured Average

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (-), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
2.178383433 G	34.96	32.014	-27.742	54.000	-19.04		7	1.94	1 M	
3.261229125 G	35.02	33.396	-27.293	54.000	-18.98		324	2.73	1 M	
7.698022713 G	42.69	36.258	-22.815	54.000	-11.31		7	1.52	1 M	
9.128056112 G	43.42	37.002	-22.334	54.000	-10.58		9	1.18	1 M	
6.715597863 G	46.32	35.814	-23.665	54.000	-7.68		360	4.01	1 M	
6.371910488 G	46.38	35.849	-23.637	54.000	-7.62	--	360	2.91	1 M	

Azimuth Plots

Turntable Plot (2.178383433 GHz)

Level (dBuV/m)

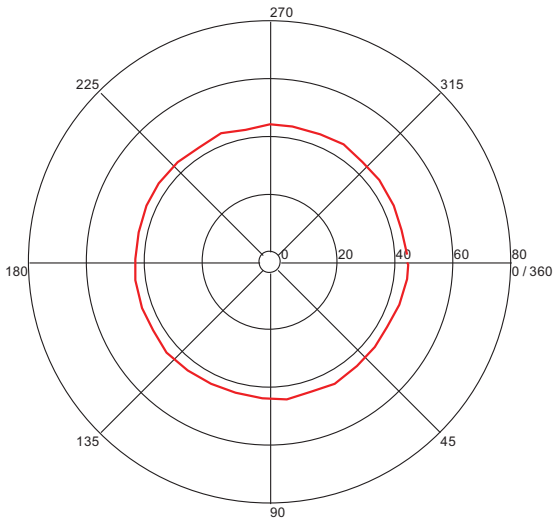


All Polarities

Azimuth (Degrees)


Turntable Plots

Height Plot (2.178383433 GHz)

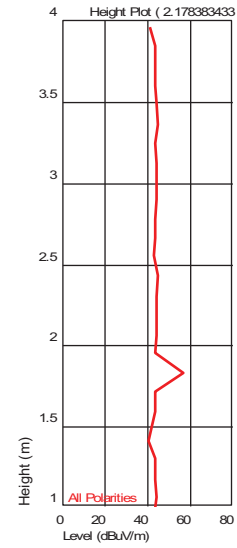

Turntable Plot (3.261229125 GHz)


Level (dBuV/m)

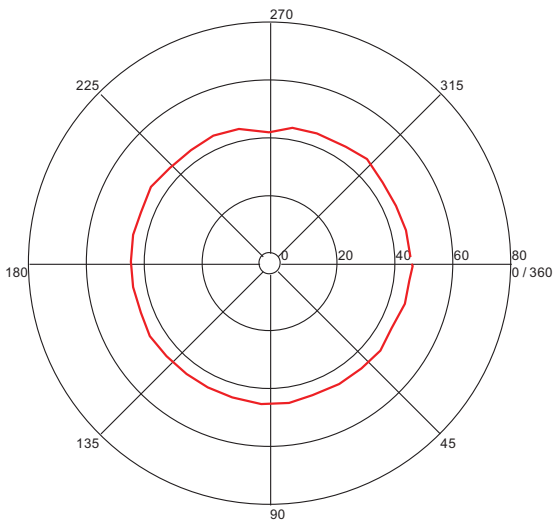

All Polarities


Azimuth (Degrees)

Height Plot (3.261229125 GHz)

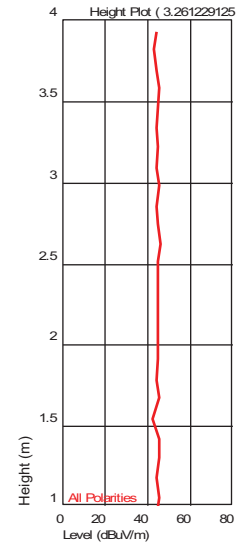


Turntable Plot (6.371910488 GHz)

Level (dBuV/m)

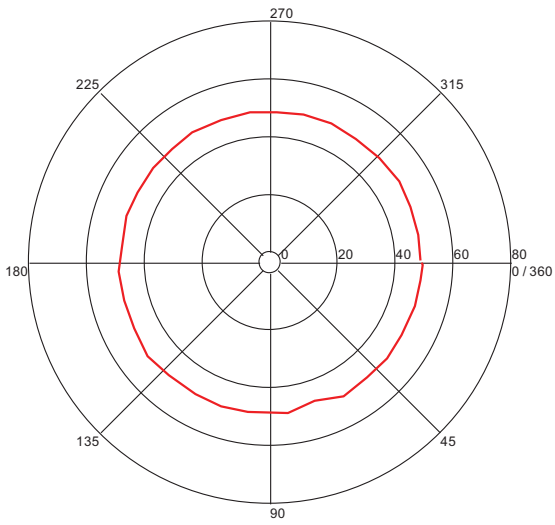


All Polarities

Azimuth (Degrees)

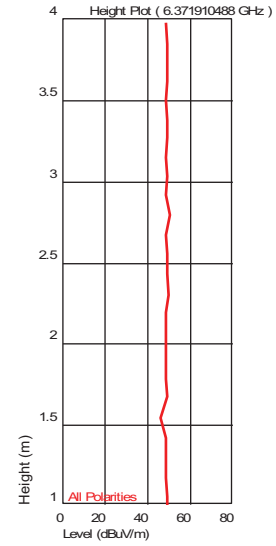


Turntable Plot (6.715597863 GHz)

Level (dBuV/m)

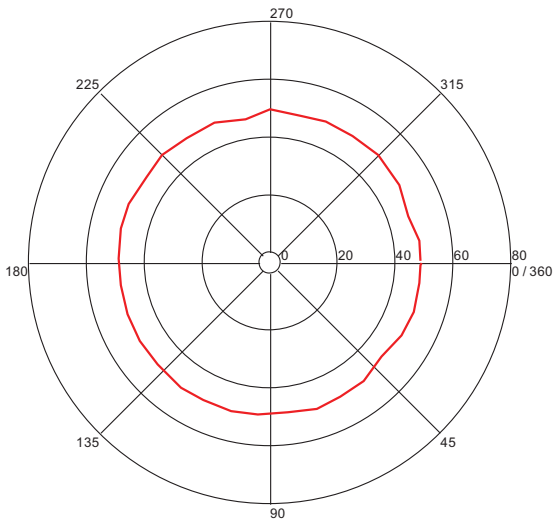


All Polarities

Azimuth (Degrees)

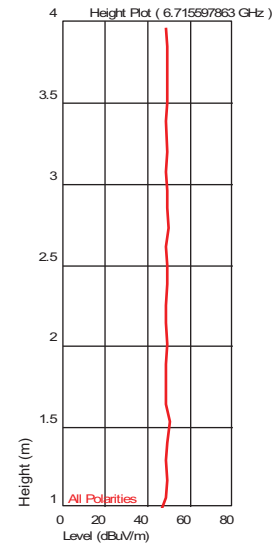

Turntable Plot (7.698022713 GHz)


Level (dBuV/m)

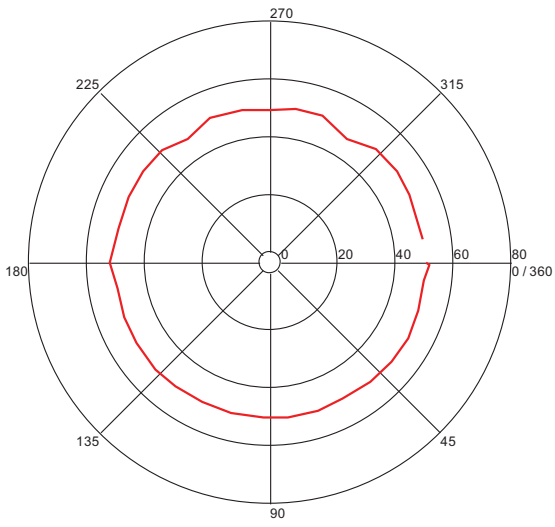

All Polarities


Azimuth (Degrees)

Height Plot (7.698022713 GHz)

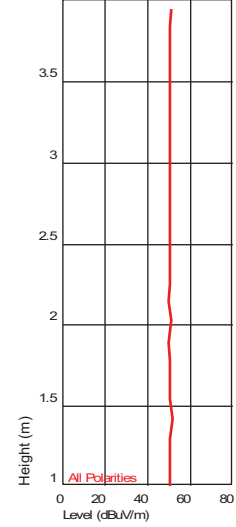

Turntable Plot (9.128056112 GHz)


Level (dBuV/m)

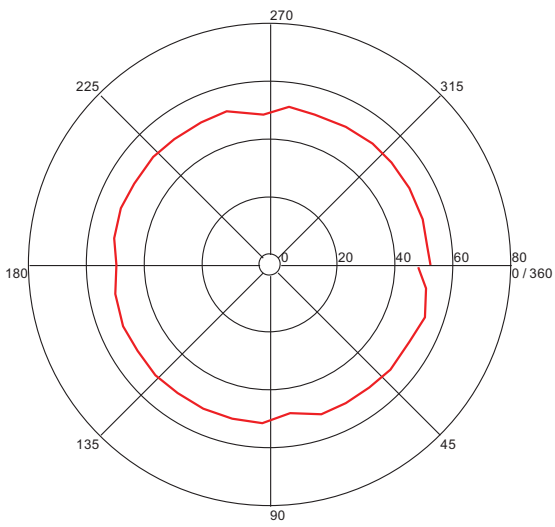

All Polarities

Azimuth (Degrees)

Height Plot (9.128056112 GHz)

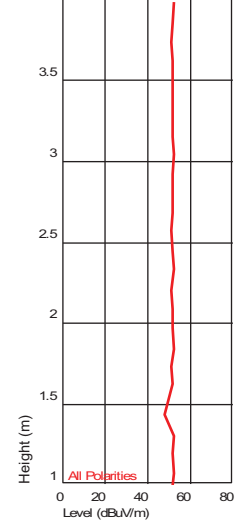


Z-Axis (EUT on its back), 30-1000 MHz

Test Information

Test Details User Entry
 Test: Radiated - FCC15.249 & IC RSS-210 A2.9 902-928MHz @ 10m
 Project: Lifeline System, Inc.
 Test Notes: Troy 2, Serial # 002, Transmits Mode, EUT on its back
 Temperature: 23C
 Humidity: 43%, 1010mbar
 Tested by: Vathana Ven
 Test Started: 6 Aug 2013 18 : 31

Additional Information

Prescan Emission Graph

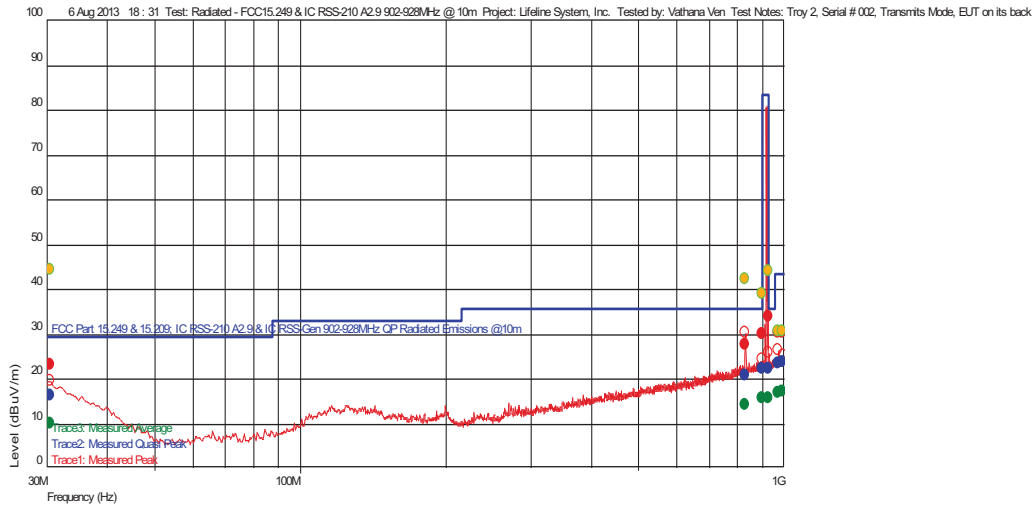

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data


Trace2: Measured Quasi Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)	Comment
972.958917749 M	23.41	23.441	-22.848	43.540	-20.13		360	4.00	120 k	
994.900601641 M	23.79	23.502	-22.736	43.540	-19.75		146	3.08	120 k	
830.640481435 M	20.84	22.087	-23.415	35.540	-14.70		221	2.12	120 k	
30.525250557 M	16.14	20.432	-26.461	29.540	-13.40	--	202	3.61	120 k	
901.188376419 M	22.17	22.624	-22.843	35.540	-13.37	--	168	2.98	120 k	
928.507815439 M	22.27	22.900	-22.911	35.540	-13.27	--	0	2.88	120 k	

Azimuth Plots

Turntable Plot (30.525250557 MHz)

Level (dBuV/m)

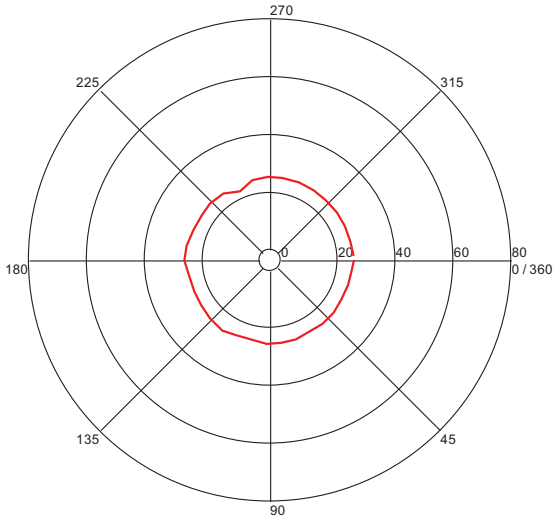


All Polarities

Azimuth (Degrees)

Turntable Plot (830.640481435 MHz)

Level (dBuV/m)

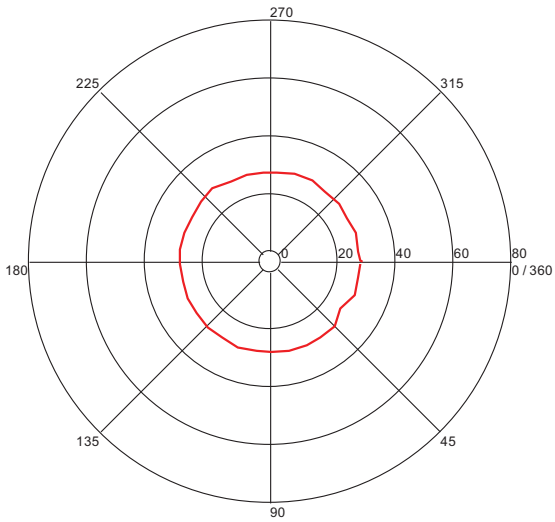


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (30.525250557 MHz)

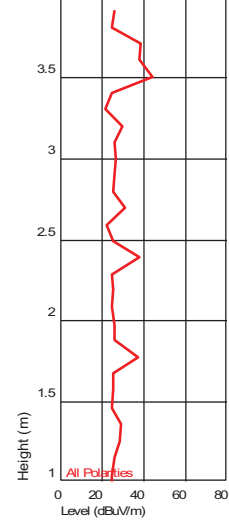


Height Plot (830.640481435 MHz)

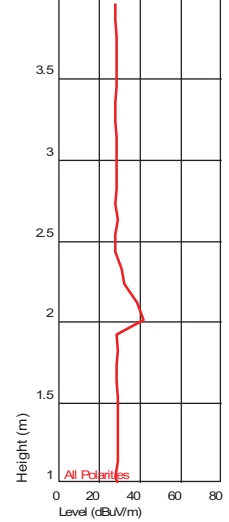

Turntable Plot (901.188376419 MHz)


Level (dBuV/m)

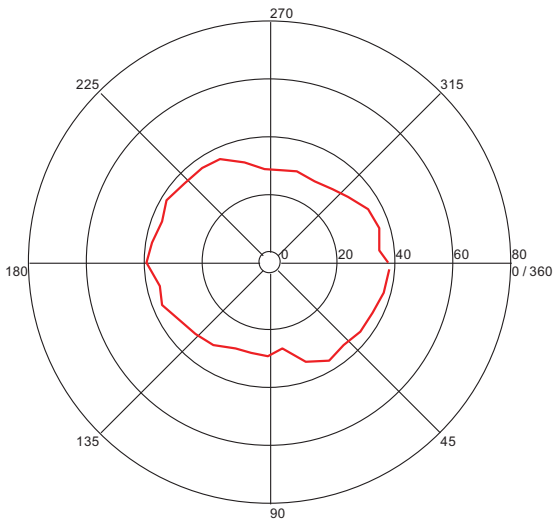

All Polarities


Azimuth (Degrees)

Height Plot (901.188376419 MHz)

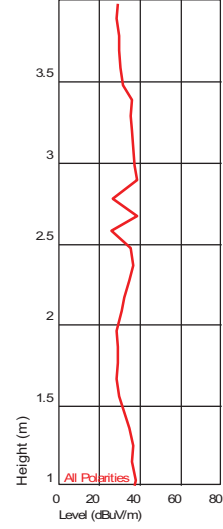

Turntable Plot (928.507815439 MHz)


Level (dBuV/m)

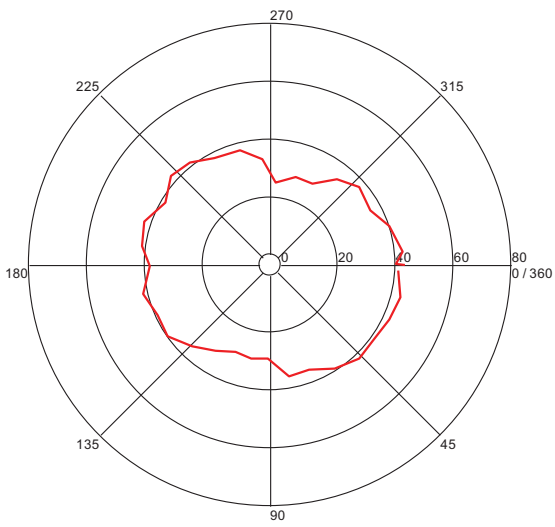

All Polarities


Azimuth (Degrees)

Height Plot (928.507815439 MHz)

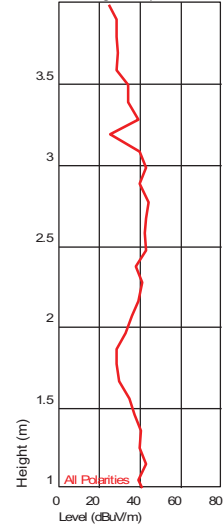

Turntable Plot (972.958917749 MHz)


Level (dBuV/m)

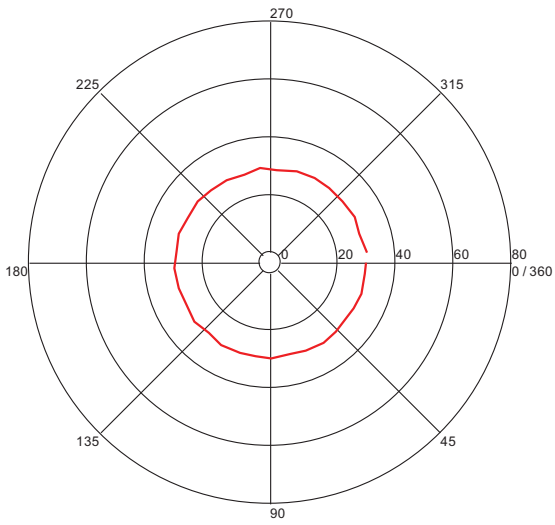

All Polarities


Azimuth (Degrees)

Height Plot (972.958917749 MHz)

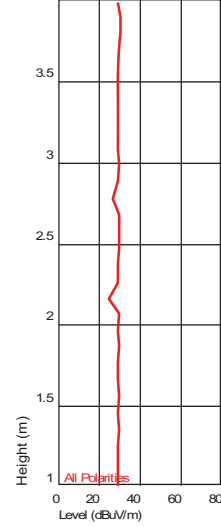

Turntable Plot (994.900601641 MHz)


Level (dBuV/m)

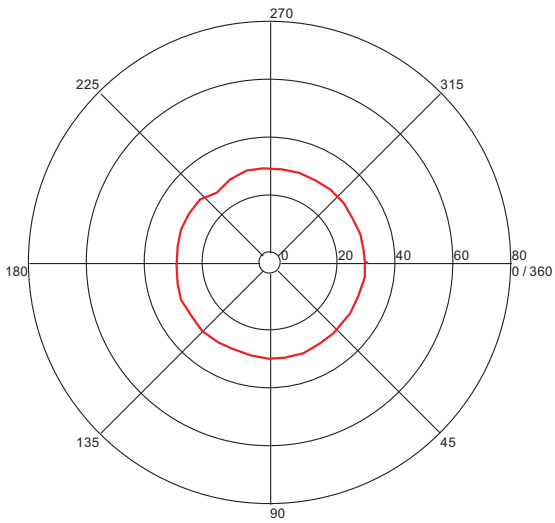

All Polarities

Azimuth (Degrees)

Height Plot (994.900601641 MHz)

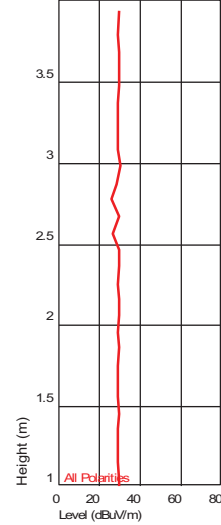


Z-Axis (EUT on its back), 1-10 GHz

Test Information

Test Details User Entry
 Test: Radiated - FCC15.249 & IC RSS-210 A2.9 902-928MHz @ 3m
 Project: Lifeline Systems
 Test Notes: Troy 2.0, SN:0002, Tx Mode. EUT on its back
 Temperature: 22C
 Humidity: 51%, 1014mbar
 Tested by: Kouma Sinn
 Test Started: 18 Aug 2013 12 : 40

Additional Information

Prescan Emission Graph

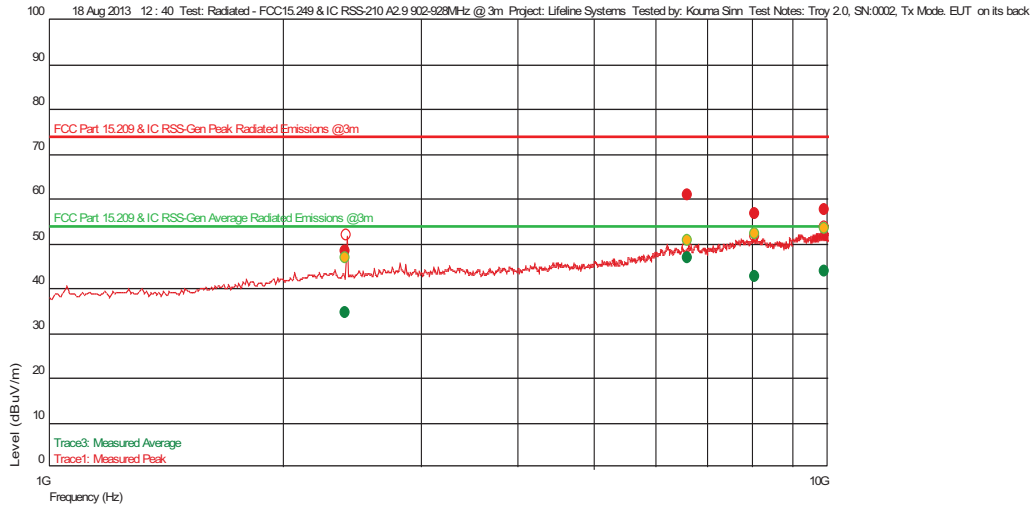

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace1: Measured Peak

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
2.408436874 G	48.14	32.353	-27.526	74.000	-25.86		50	1.90	1 M	
8.067862392 G	56.60	36.473	-22.400	74.000	-17.40	--	234	1.04	1 M	
9.932324649 G	57.41	37.819	-22.658	74.000	-16.59	--	315	3.77	1 M	
6.613152973 G	60.68	35.855	-23.515	74.000	-13.32	--	0	3.45	1 M	


Trace3: Measured Average

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
2.408436874 G	34.38	32.353	-27.526	54.000	-19.62		50	1.90	1 M	
8.067862392 G	42.66	36.473	-22.400	54.000	-11.34	--	234	1.04	1 M	
9.932324649 G	43.75	37.819	-22.658	54.000	-10.25	--	315	3.77	1 M	
6.613152973 G	46.77	35.855	-23.515	54.000	-7.23	--	0	3.45	1 M	

Azimuth Plots

Turntable Plot (2.408436874 GHz)

Level (dBuV/m)

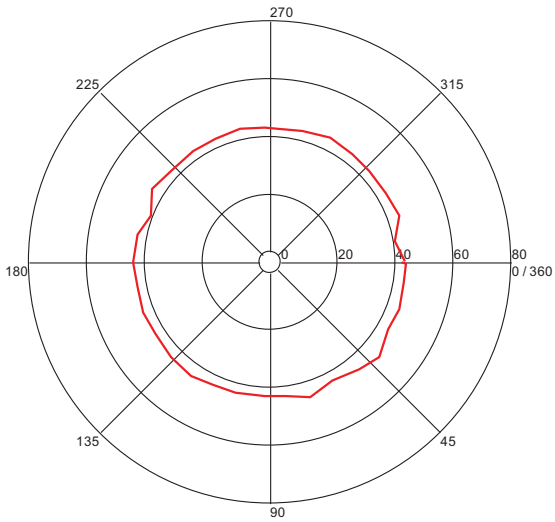


All Polarities

Azimuth (Degrees)


Turntable Plots

Height Plot (2.408436874 GHz)

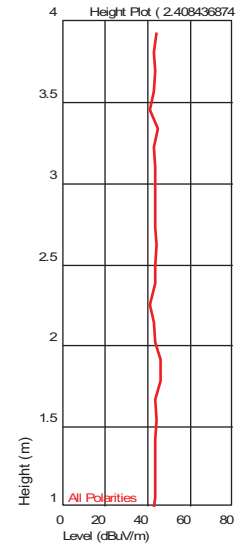

Turntable Plot (6.613152973 GHz)


Level (dBuV/m)

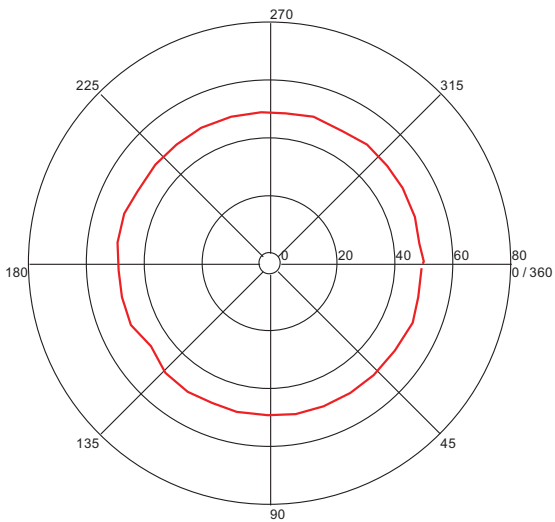

All Polarities


Azimuth (Degrees)

Height Plot (6.613152973 GHz)

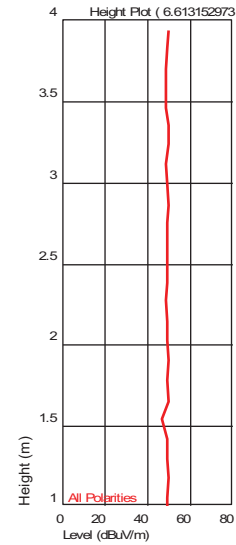

Turntable Plot (8.067862392 GHz)


Level (dBuV/m)

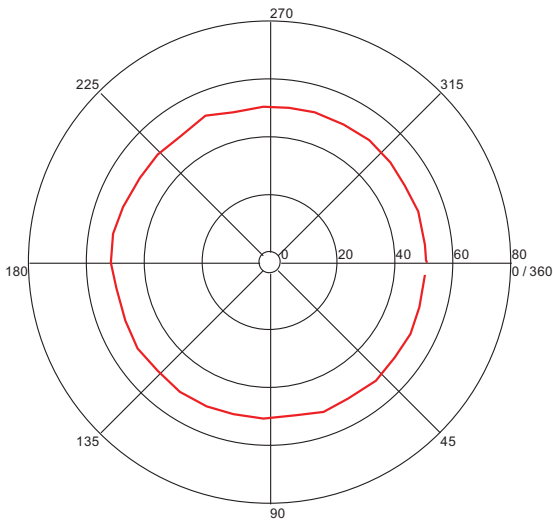

All Polarities


Azimuth (Degrees)

Height Plot (8.067862392 GHz)

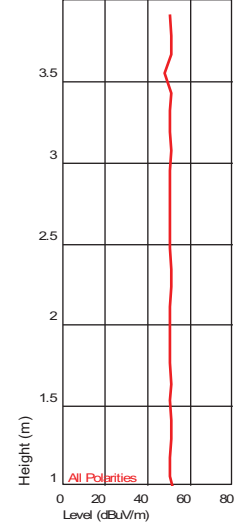

Turntable Plot (9.932324649 GHz)


Level (dBuV/m)

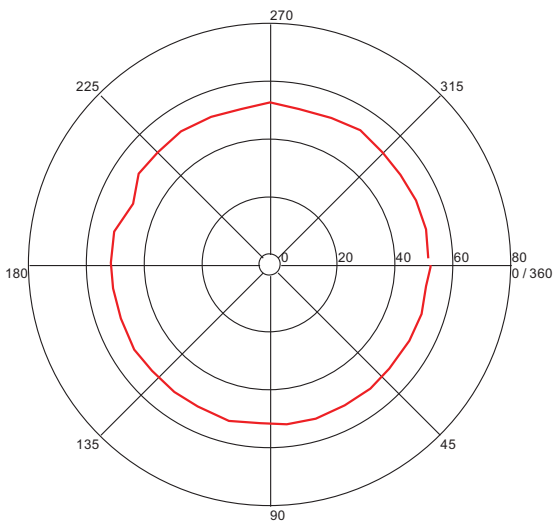

All Polarities

Azimuth (Degrees)

Height Plot (9.932324649 GHz)

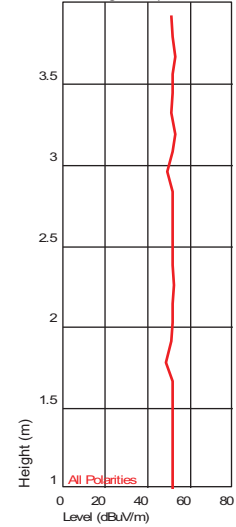

Test Personnel: Kouma Sinn *KPS*

Test Date: 08/06/2013 (1 shift), 08/18/2013

Vathana Ven *VJV*

08/06/2013 (2nd shift)

Supervising/Reviewing Engineer:

(Where Applicable) N/A

Product Standard: FCC 15 Subpart B, ICES-003

Input Voltage: 3.6V (internal battery)

Limit Applied: All Class B

Pretest Verification w/ Ambient Signals or

BB Source: Ambient Signals

Ambient Temperature: 23, 23, 22 °C

Relative Humidity: 43, 43, 51 %

Atmospheric Pressure: 1010, 1010, 1014 mbars

Deviations, Additions, or Exclusions: None

8 Receiver Spurious Radiated Emissions

8.1 Method

Tests are performed in accordance with FCC 47CFR Part 15:2013 Subpart B Class B, ICES-003 Issue 5 August 2012, and ANSI C63.4:2009.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A Styrofoam table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) < U_{CISPR} (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
 AF = 7.4 dB/m
 CF = 1.6 dB
 AG = 29.0 dB
 FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

$$NF = \text{Net Reading in dB}\mu\text{V}$$

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

8.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV004'	Weather Station	Davis Instruments	7400	PE80529A61A	09/25/2012	09/25/2014
145106'	Bilog Antenna (30MHz - 5GHz)	Sunol Sciences	JB5	A111003	09/04/2012	09/04/2013
145-410'	Cables 145-400 145-403 145-405 145-406 145-407	Huber + Suhner	10m Track A Cables	multiple	10/04/2012	10/04/2013
145003'	Preamplifier (150 KHz to 1.3 GHz)	Hewlett Packard	8447D	2443A04077	10/04/2012	10/04/2013
145128'	EMI Receiver 40 GHz (20 Hz - 40 Ghz)	Rohde & Schwarz	ESI	8392831001	09/28/2012	09/28/2013
ETS001'	1-18GHz DRG Horn Antenna	ETS-Lindgren	3117	00143259	12/17/2012	12/17/2013
145-416'	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	10/04/2012	10/04/2013
145014'	Preamplifier (1 GHz to 26.5 GHz)	Hewlett Packard	8449B	3008A00232	12/13/2012	12/13/2013

Software Utilized:

Name	Manufacturer	Version
C5	Teseq	5.26.46.46

8.3 Results:

The sample tested was found to Comply.

8.4 Setup Photographs:

30-1000 MHz

This Picture Can be found in a different Exhibit:
Troy2 – Pictures for EMC
Test Setups(7000AHB)

1-10 GHz

This Picture Can be found in a different Exhibit:
Troy2 – Pictures for EMC
Test Setups(7000AHB)


8.5 Plots/Data:

Idle/Receiver Mode, 30-1000 MHz

Test Information

Test Details	User Entry	Additional Information
Test:	Radiated - FCC15 Class B @ 10m	
Project:	Lifeline System, Inc.	
Test Notes:	Troy 2, Serial # 002, Rx/Idle Mode	
Temperature:	23C	
Humidity:	43%, 1010mbar	
Tested by:	Vathana Ven	
Test Started:	6 Aug 2013 19 : 18	

Prescan Emission Graph

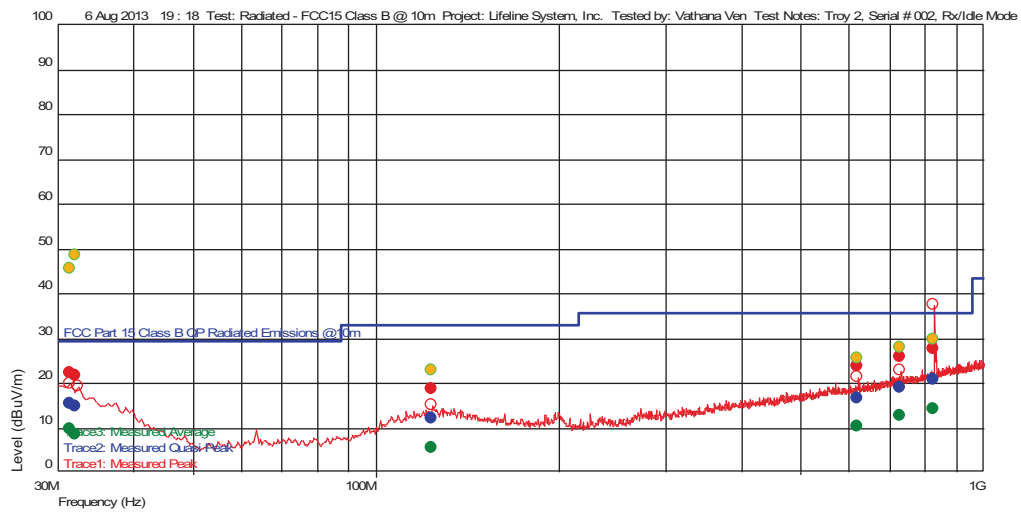

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data


Trace2: Measured Quasi Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limi t(dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)	Comment
124.053907645 M	12.09	13.943	-24.667	33.040	-20.95	--	212	2.19	120 k	
620.099599263 M	16.68	19.404	-24.548	35.540	-18.86	--	276	4.00	120 k	
730.385170255 M	19.06	20.992	-23.986	35.540	-16.48		29	2.58	120 k	
828.933867984 M	20.79	22.057	-23.431	35.540	-14.75		29	2.37	120 k	
32.195791864 M	14.88	19.263	-26.430	29.540	-14.66	--	159	3.94	120 k	
31.489980128 M	15.48	19.757	-26.443	29.540	-14.06		1	1.75	120 k	

Azimuth Plots

Turntable Plot (31.489980128 MHz)

Level (dBuV/m)

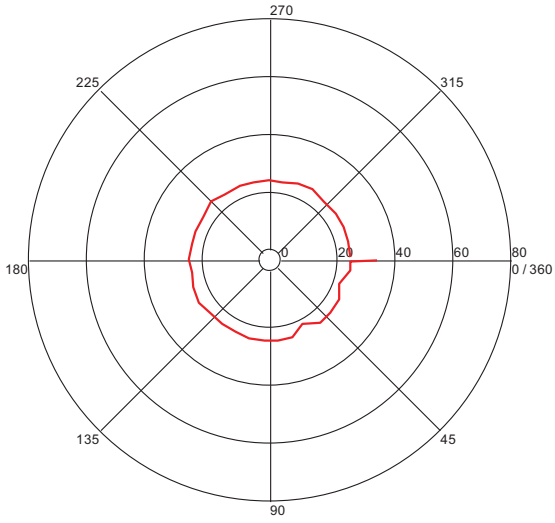


All Polarities

Azimuth (Degrees)

Turntable Plot (32.195791864 MHz)

Level (dBuV/m)

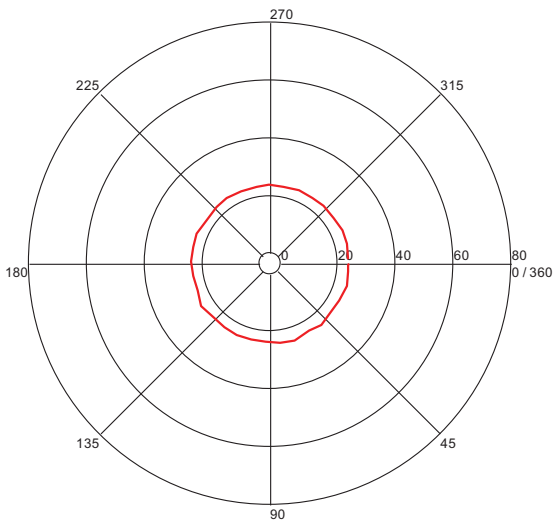


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (31.489980128 MHz)

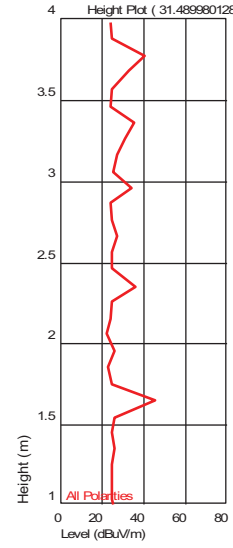


Height Plot (32.195791864 MHz)

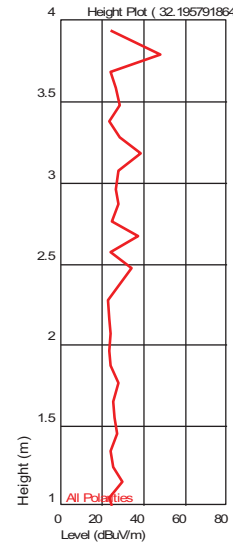

Turntable Plot (124.053907645 MHz)


Level (dBuV/m)

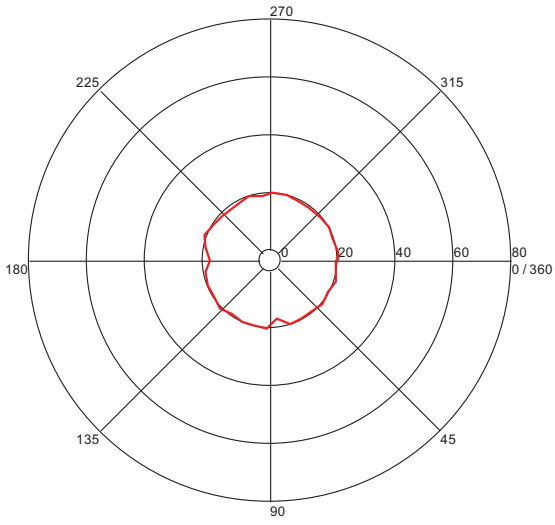

All Polarities


Azimuth (Degrees)

Height Plot (124.053907645 MHz)

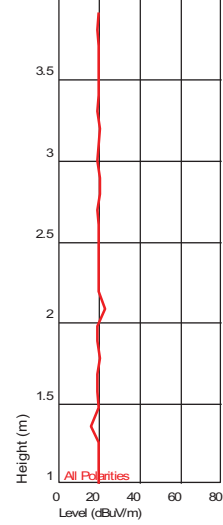

Turntable Plot (620.099599263 MHz)


Level (dBuV/m)

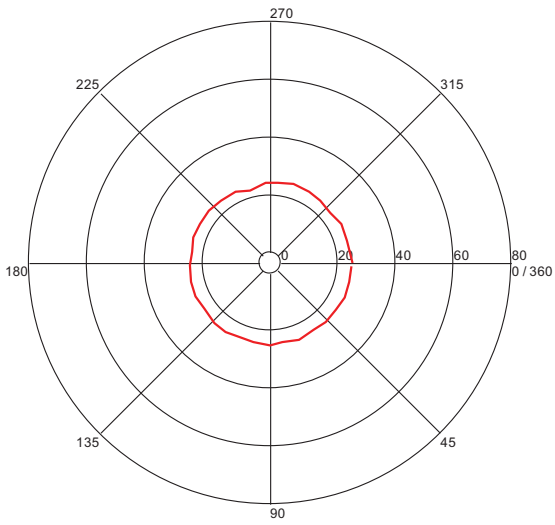

All Polarities


Azimuth (Degrees)

Height Plot (620.099599263 MHz)

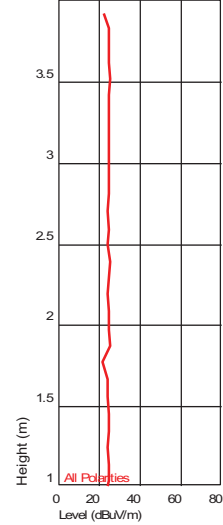

Turntable Plot (730.385170255 MHz)


Level (dBuV/m)

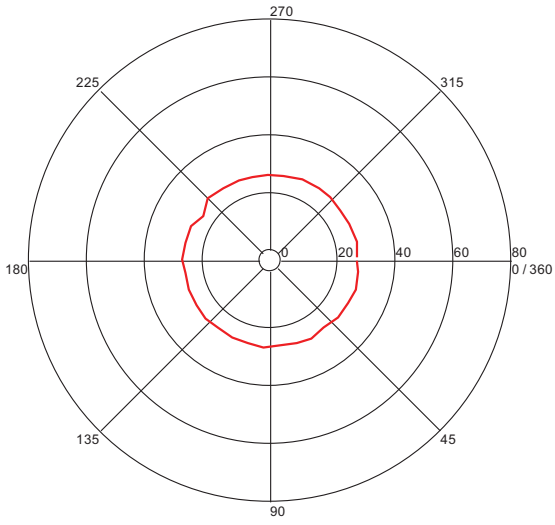

All Polarities


Azimuth (Degrees)

Height Plot (730.385170255 MHz)

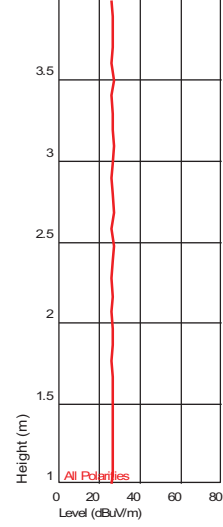

Turntable Plot (828.933867984 MHz)


Level (dBuV/m)

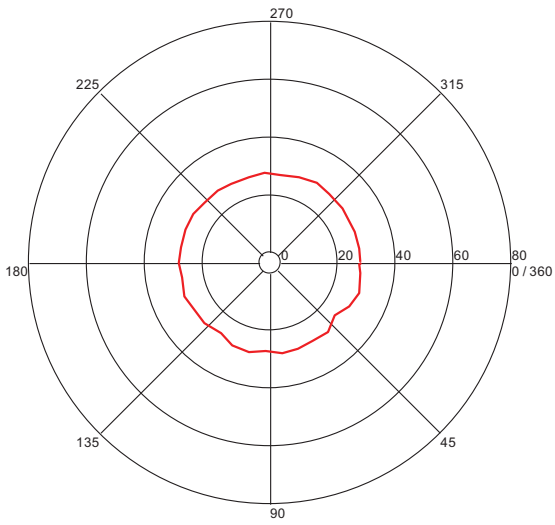

All Polarities

Azimuth (Degrees)

Height Plot (828.933867984 MHz)

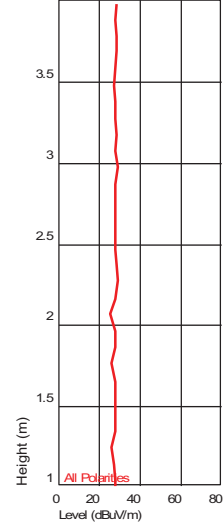


Idle/Receiver Mode, 1-10 GHz

Test Information

Test Details User Entry
 Test: Radiated - FCC15.249 & IC RSS-210 A2.9 902-928MHz @ 3m
 Project: Lifeline Systems
 Test Notes: Troy 2.0, SN:0002, Idle/Receive mode
 Temperature: 22C
 Humidity: 51%, 1014mbar
 Tested by: Kouma Sinn
 Test Started: 18 Aug 2013 13 : 45

Additional Information

Prescan Emission Graph

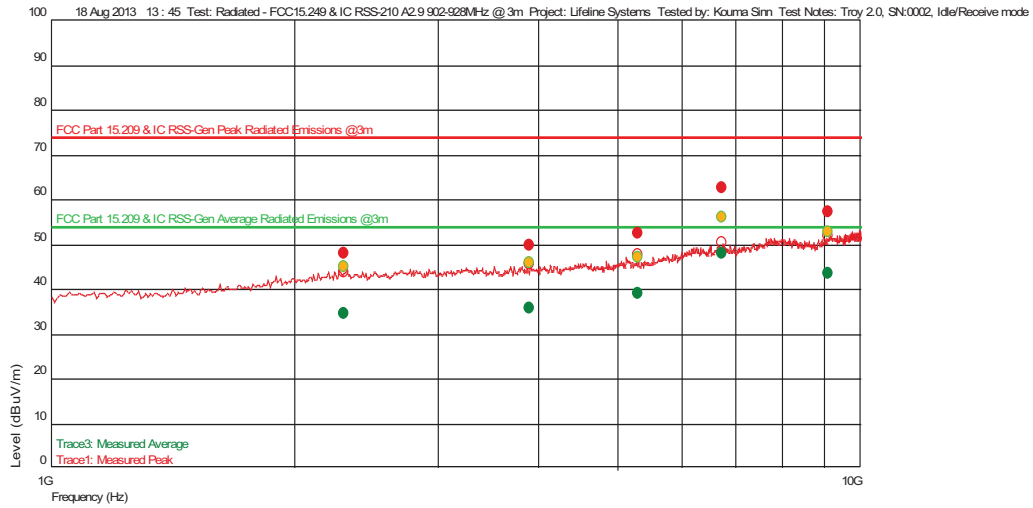

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace1: Measured Peak

Frequency(Hz)	Level(dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
2.300921843 G	48.02	32.181	-27.627	74.000	-25.98		55	1.54	1 M	
3.905210421 G	49.58	33.800	-26.754	74.000	-24.42	--	192	1.16	1 M	
5.309011356 G	52.39	34.900	-25.307	74.000	-21.61	--	295	2.97	1 M	
9.137374749 G	57.06	37.010	-22.339	74.000	-16.94		0	1.84	1 M	
6.74496994 G	62.68	35.802	-23.708	74.000	-11.32		106	1.16	1 M	


Trace3: Measured Average

Frequency(Hz)	Level(dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg)(Deg)	Mast Height(m)	RBW(Hz)	Comment
2.300921843 G	34.41	32.181	-27.627	54.000	-19.59		55	1.54	1 M	
3.905210421 G	35.80	33.800	-26.754	54.000	-18.20	--	192	1.16	1 M	
5.309011356 G	38.99	34.900	-25.307	54.000	-15.01	--	295	2.97	1 M	
9.137374749 G	43.43	37.010	-22.339	54.000	-10.57		0	1.84	1 M	
6.74496994 G	48.04	35.802	-23.708	54.000	-5.96		106	1.16	1 M	

Azimuth Plots

Turntable Plot (2.300921843 GHz)

Level (dBuV/m)

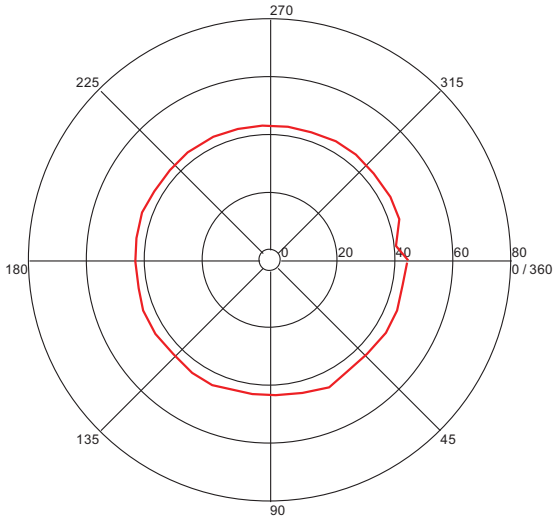


All Polarities

Azimuth (Degrees)


Turntable Plots

Height Plot (2.300921843 GHz)

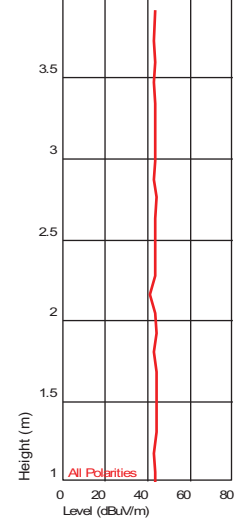

Turntable Plot (3.905210421 GHz)


Level (dBuV/m)

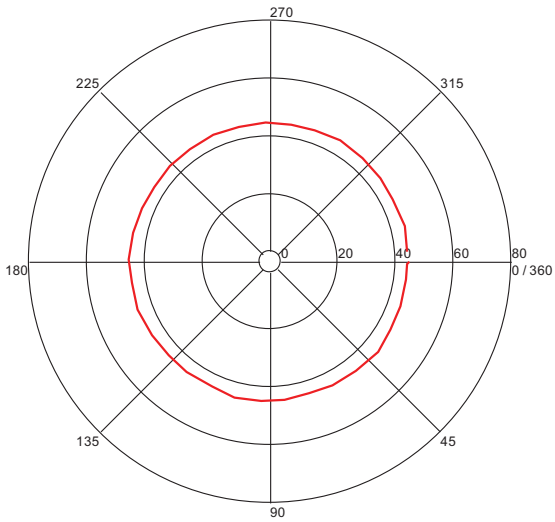

All Polarities


Azimuth (Degrees)

Height Plot (3.905210421 GHz)

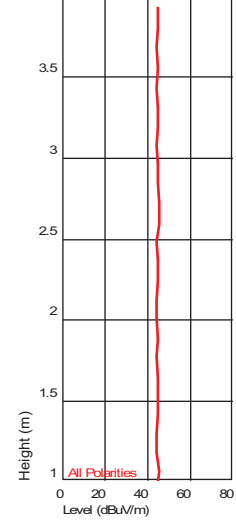

Turntable Plot (5.309011356 GHz)


Level (dBuV/m)

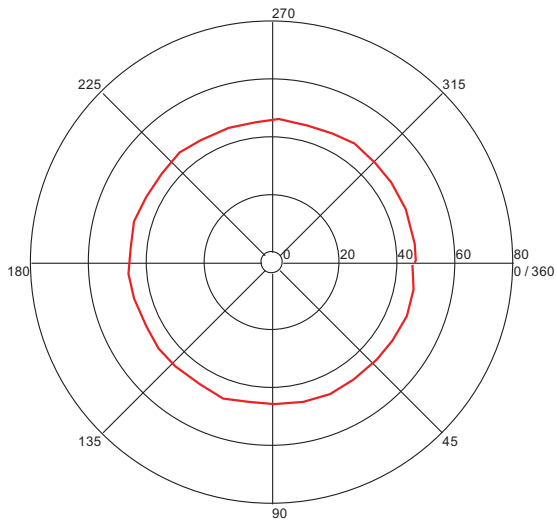

All Polarities


Azimuth (Degrees)

Height Plot (5.309011356 GHz)

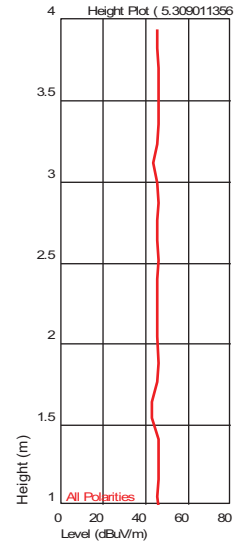

Turntable Plot (6.74496994 GHz)


Level (dBuV/m)

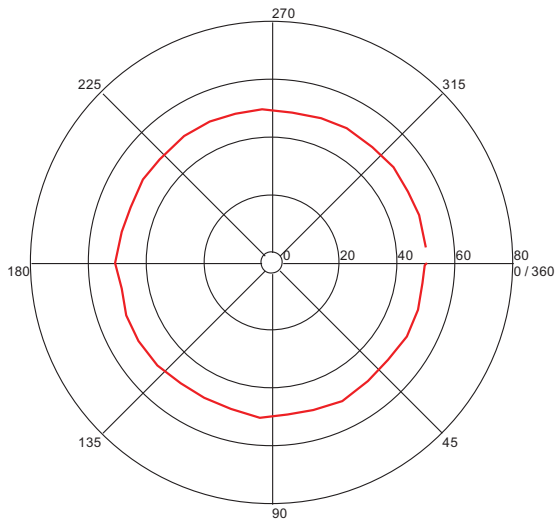

All Polarities


Azimuth (Degrees)

Height Plot (6.74496994 GHz)

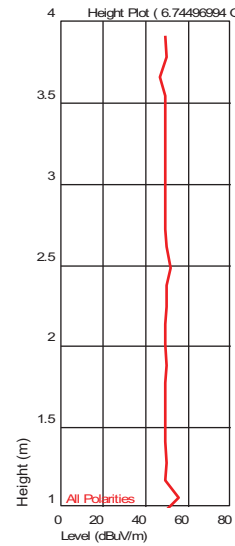

Turntable Plot (9.137374749 GHz)


Level (dBuV/m)

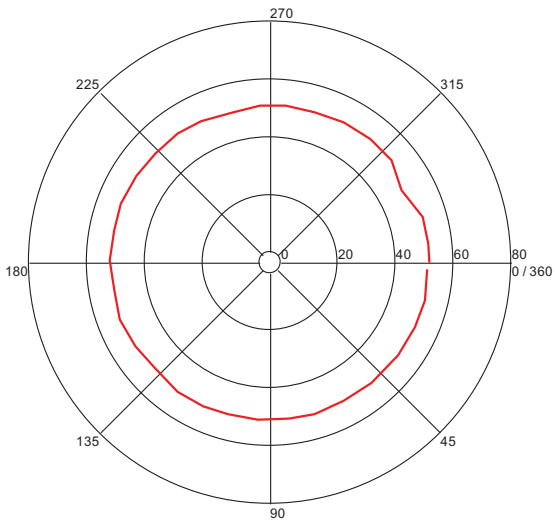

All Polarities

Azimuth (Degrees)

Height Plot (9.137374749 GHz)

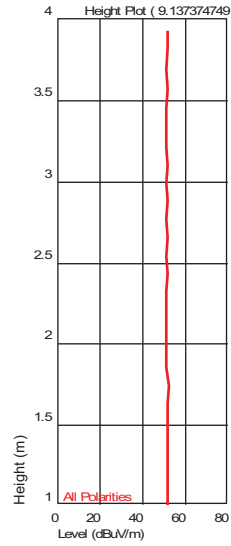

All Polarities

Level (dBuV/m)

Test Personnel: Vathana Ven *VSV*

Test Date: 08/06/2013 (2nd shift)

Kouma Sinn *VSV*

08/18/2013

Supervising/Reviewing

Engineer: N/A

(Where Applicable) FCC 15 Subpart B, ICES-003

Product Standard: 3.3V (internal battery)

Input Voltage: Ambient Signals

Pretest Verification w/

Ambient Signals or

BB Source: Ambient Signals

Limit Applied: All Class B

Ambient Temperature: 23, 22 °C

Relative Humidity: 43, 51 %

Atmospheric Pressure: 1010, 1014 mbars

Deviations, Additions, or Exclusions: None

9 20 dB Bandwidth

9.1 Method

Tests are performed in accordance with FCC 47CFR Part 15:2013 Subpart C 15.249, RSS-210 Issue 8 December 2010, and ANSI C63.4:2009.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A Styrofoam table 80 cm high is used for table-top equipment.

9.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV004'	Weather Station	Davis Instruments	7400	PE80529A61A	09/25/2012	09/25/2014
145106'	Bilog Antenna (30MHz - 5GHz)	Sunol Sciences	JB5	A111003	09/04/2012	09/04/2013
145-410'	Cables 145-400 145-403 145-405 145-406 145-407	Huber + Suhner	10m Track A Cables	multiple	10/04/2012	10/04/2013
145003'	Preamplifier (150 KHz to 1.3 GHz)	Hewlett Packard	8447D	2443A04077	10/04/2012	10/04/2013
145128'	EMI Receiver 40 GHz (20 Hz - 40 Ghz)	Rohde & Schwarz	ESI	8392831001	09/28/2012	09/28/2013

Software Utilized:

Name	Manufacturer	Version
None		

9.3 Results:


The sample tested was found to Comply.

9.4 Setup Photograph:

This Picture Can be found in a different Exhibit:
Troy2 – Pictures for EMC
Test Setups(7000AHB)

9.5 Plots/Data:

Fundamental Frequency, 917 MHz, 20 dB Bandwidth

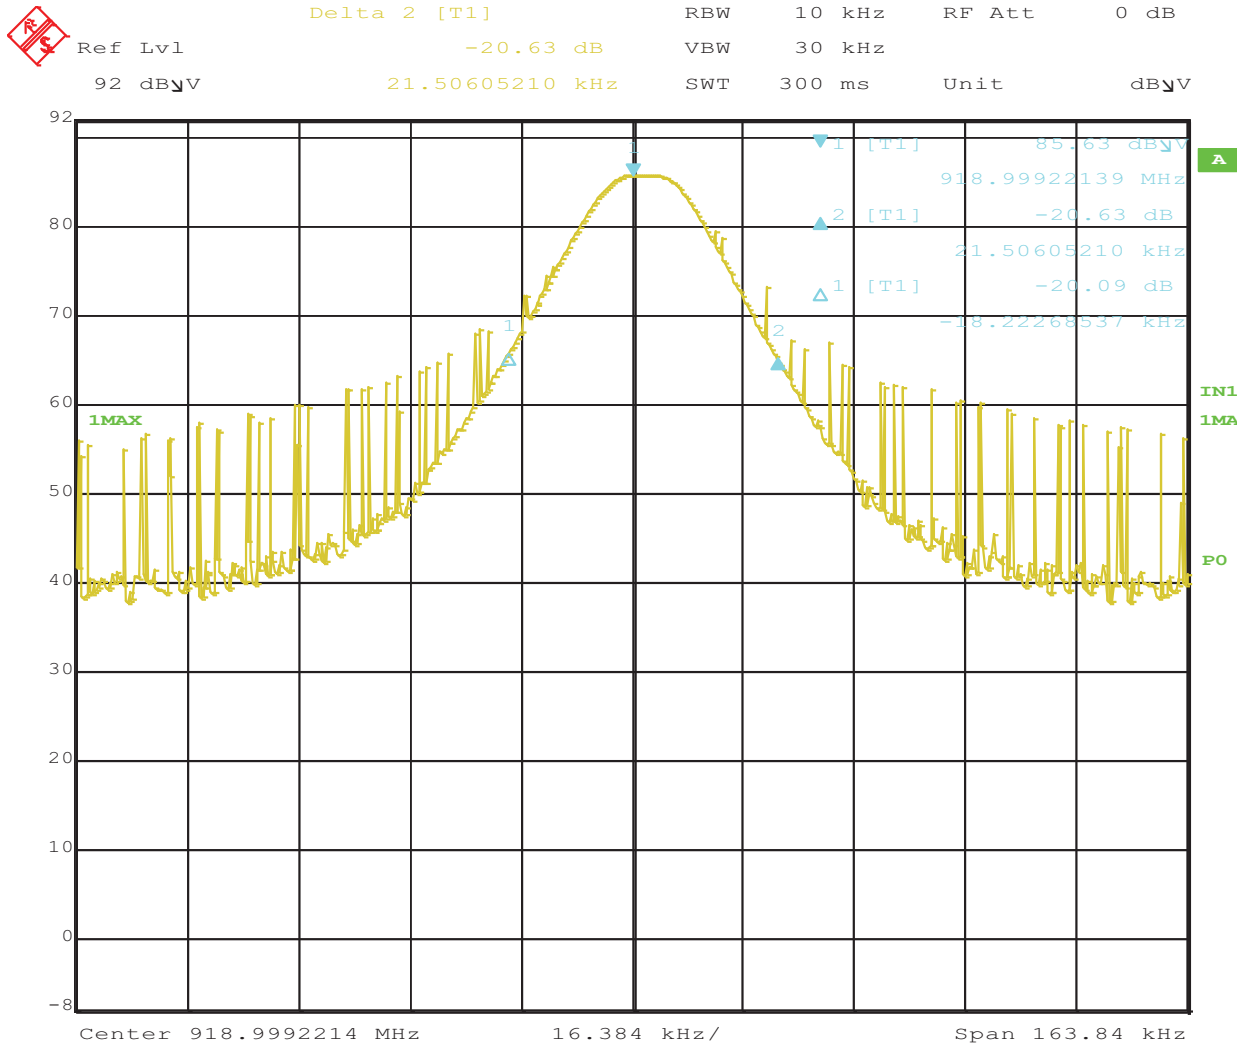


Date: 6.AUG.2013 00:40:35

Fundamental Frequency, 919 MHz, 20 dB Bandwidth



Ref Lvl	Delta 2 [T1]	RBW	10 kHz	RF Att	0 dB
92 dB μ V	-20.63 dB	VBW	30 kHz		
	21.50605210 kHz	SWT	300 ms	Unit	dB μ V

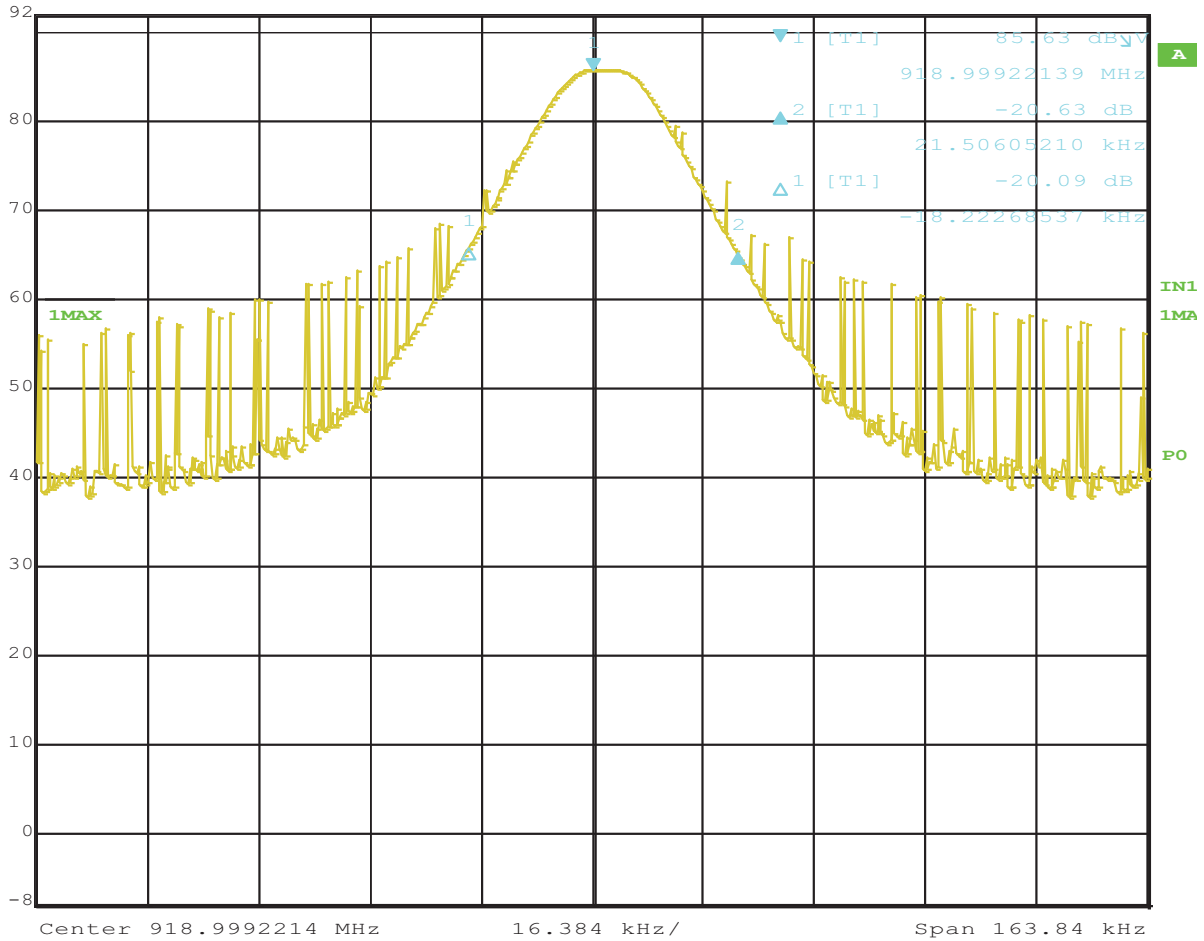


Date: 6.AUG.2013 00:40:35

Fundamental Frequency, 921 MHz, 20 dB Bandwidth



Ref Lvl	Delta 2 [T1]	RBW	10 kHz	RF Att	0 dB
92 dB μ V	-20.15 dB	VBW	30 kHz	SWT	300 ms
	30.20697395 kHz	Unit			dB μ V

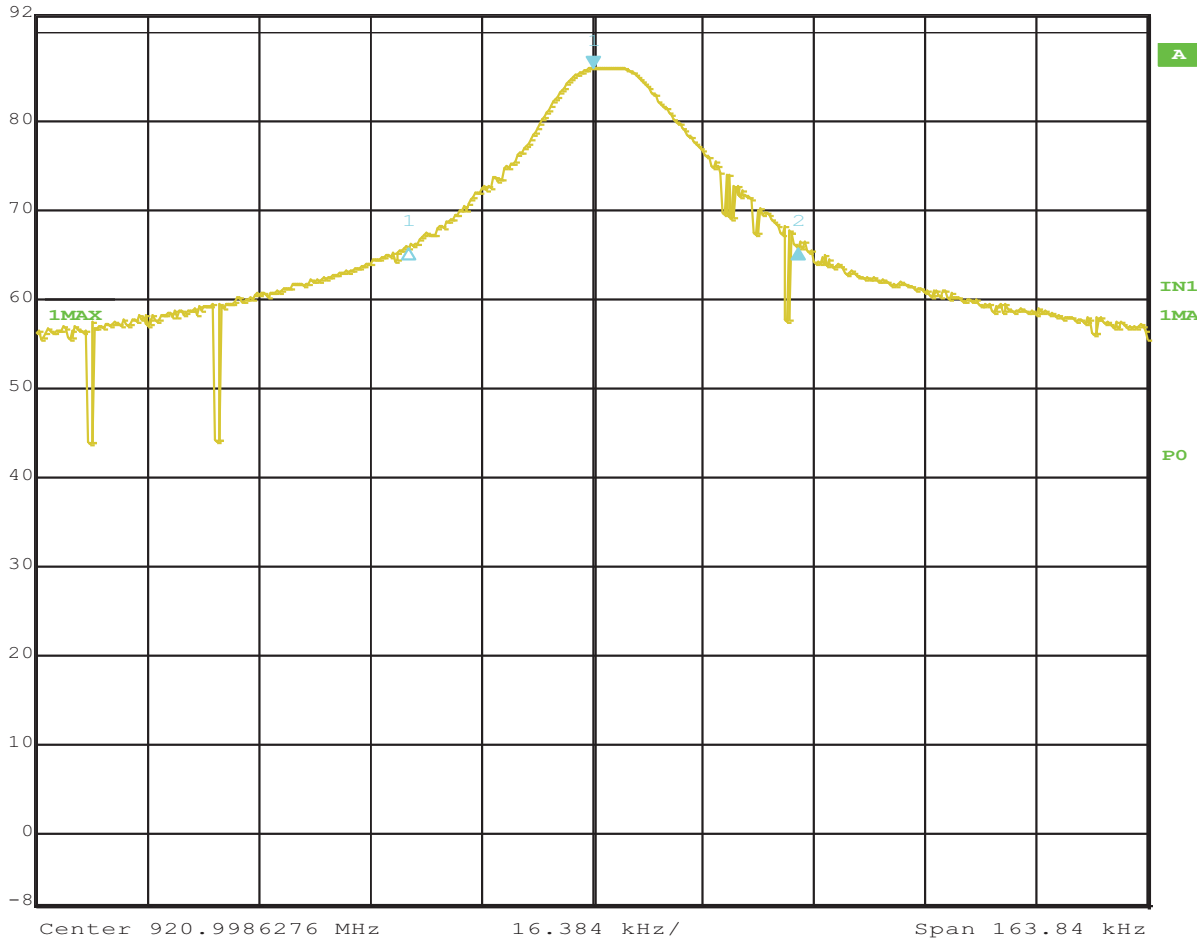

Date: 6.AUG.2013 00:10:52

Test Personnel: Vathana F. Ven *VSV*
 Supervising/Reviewing Engineer: _____
 (Where Applicable) Product Standard: N/A
 Input Voltage: 3.6V (internal battery)
 Pretest Verification w/ Ambient Signals or BB Source: Ambient Signals

Test Date: 08/06/2013 (2nd shift)
 Limit Applied: No limit
 Ambient Temperature: 23 °C
 Relative Humidity: 43 %
 Atmospheric Pressure: 1010 mbars

Deviations, Additions, or Exclusions: None

10 Revision History

Revision Level	Date	Report Number	Prepared By	Reviewed By	Notes
0	08/18/2013	101276754BOX-001	KPS <i>KPS</i>	MFM <i>MFM</i>	Original Issue