

TEST REPORT

of

FCC Part 15 Subpart C §15.247 FCC ID: BEJ-AIGC92W

Equipment Under Test	:	LG IoT Hub
Model Name	:	AIGC92W
Variant Model Name	:	AIGB92W
Applicant	:	LG Electronics USA
Manufacturer	:	LG Electronics Inc.
Date of Receipt	:	2018.11.08
Date of Test(s)	÷	2018.11.08 ~2019.02.19
Date of Issue	:	2019.08.30

In the configuration tested, the EUT complied with the standards specified above.

Teste

Tested By:	13	Date:	2019.08.30	
	Murphy Kim			
Technical Manager:	Jun	Date:	2019.08.30	
	Jungmin Yang			

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)



INDEX

Table of Contents

1. General Information	3
2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission	9
3. 6 dB Bandwidth	64
4. Maximum Peak Conducted Output Power	70
5. Power Spectral Density	74
6. AC Conducted Power Line Emissions	85
7. Antenna Requirement	89



1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- -10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u>. Phone No. : +82 31 688 0901 Fax No. : +82 31 688 0921

1.2. Details of Applicant

Applicant	:	LG Electronics USA, Inc.
Address	:	1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States, 07632
Contact Person	:	Han Kyung-su
Phone No.	:	201-266-2215

1.3. Details of Manufacturer

Company	: LG Electronics Inc.
Address	: 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea (Republic of)

1.4. Description of EUT

Kind of Produ	ct	LG IoT Hub
Model Name		AIGC92W
Variant Model	Name	AIGB92W
Power Supply	,	DC 5 V
Frequency Ra	nge	2 412 M批 ~ 2 462 M批 (11b/g/n_HT20)
Modulation Te	echnique	DSSS, OFDM
Number of Ch	annels	11 channels (11b/g/n_HT20)
Antenna Type		PCB antenna
Antenna	ANT 1	1.43 dB i
Gain	ANT 2	1.53 dB i

Note;

WLAN_ANT 1 and WLAN_ANT 2 are simultaneously transmitted.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <u>http://www.sgsgroup.kr</u>



1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	R&S	SMR40	100272	Jun. 07, 2019	Annual	Jun. 07, 2020
Signal Generator	R&S	SMBV100A	255834	Jun. 10, 2019	Annual	Jun. 10, 2020
Spectrum Analyzer	R&S	FSV30	103210	Dec. 05, 2018	Annual	Dec. 05, 2019
Spectrum Analyzer	Agilent	N9020A	MY53421758	Sep. 21, 2018	Annual	Sep. 21, 2019
Attenuator	MCLI	FAS-23-20	23835	Jun. 07, 2019	Annual	Jun. 07, 2020
High Pass Filter	Wainwright Instrument GmbH	WHK3.0/18G-10SS	344	May 21, 2019	Annual	May 21, 2020
High Pass Filter	Wainwright Instrument GmbH	WHNX7.5/26.5G-6SS	15	Jun. 05, 2019	Annual	Jun. 05, 2020
Low Pass Filter	Mini-Circuits	NLP-1200+	V 8979400903-2	Feb. 19, 2019	Annual	Feb. 19, 2020
Power Sensor	R&S	NRP-Z81	100748	Jun. 05, 2019	Annual	Jun. 05, 2020
DC Power Supply	R&S	HMP2020	019258024	Nov. 06, 2018	Annual	Nov. 06, 2019
Preamplifier	H.P.	8447F	2944A03909	Aug. 07, 2018	Annual	Aug. 07, 2019
Signal Conditioning Unit	R&S	SCU-18	102244	Jun. 12, 2019	Annual	Jun. 12, 2020
Preamplifier	MITEQ Inc.	JS44-18004000-35-8P	1546891	May 13, 2019	Annual	May 13, 2020
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-039	Aug. 23, 2017	Biennial	Aug. 23, 2019
Bilog Antenna	Schwarzbeck Mess-Elektronik	VULB 9163	01126	Mar. 26, 2018	Biennial	Mar. 26, 2020
Horn Antenna	R&S	HF906	100326	Feb. 14, 2018	Biennial	Feb. 14, 2020
Horn Antenna	Schwarzbeck Mess-Elektronik	BBHA 9170	BBHA9170431	Sep. 10, 2018	Biennial	Sep. 10, 2020
Test Receiver	R&S	ESU26	100109	Jan. 31, 2019	Annual	Jan. 31, 2020
Test Receiver	R&S	ESCI 7	100911	Feb. 20, 2019	Annual	Feb. 20, 2020
Two-Line V-Network	R&S	ENV216	100190	May 14, 2019	Annual	May 14, 2020
Shield Room	SY Corporation	L × W × H (6.5 m × 3.5 m × 3.5 m)	N/A	N.C.R.	N/A	N.C.R.
Turn Table	Innco systems GmbH	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/383 30516/L	N.C.R.	N/A	N.C.R.
Antenna Mast	Innco systems GmbH	MA4640-XP-ET	MA4640/536/383 30516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Coaxial Cable	SUCOFLEX	104 (3 m)	MY3258414	Jan. 04, 2019	Semi- annual	Jul. 04, 2019
Coaxial Cable	SUCOFLEX	104 (10 m)	MY3145814	Jan. 04, 2019	Semi- annual	Jul. 04, 2019
Coaxial Cable	Rosenberger	LA1-C006-1500	131014 01/20	Feb. 28, 2019	Semi- annual	Aug. 28, 2019



1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part15 Subpart C					
Section	Section Test Item(s) Resu				
15.205(a) 15.209 15.247(d)	Transmitter Radiated Spurious Emissions and Conducted Spurious Emission	Complied			
15.247(a)(2)	6 dB Bandwidth	Complied			
15.247(b)(3)	Maximum Peak Conducted Output Power	Complied			
15.247(e)	Power Spectral Density	Complied			
15.207	AC Power Line Conducted Emission	Complied			

1.7. Test Procedure(s)

The measurement procedures described in the American National Standard of Procedure for Compliance Testing of unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 15.247 Meas Guidance v05r02 were used in the measurement of the DUT.

1.8. Sample Calculation

Where relevant, the following sample calculation is provided:

1.8.1. Conducted Test

Offset value (dB) = Attenuator (dB) + Cable loss (dB)

1.8.2. Radiation Test

Field strength level (dBµV/m) = Measured level (dBµV) + Antenna factor (dB) + Cable loss (dB) - Amplifier gain (dB)

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



1.9. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
RF Output Power	± 0.52 dB
Conducted Spurious Emission	± 0.76 dB
Power Spectral Density	± 0.41 dB
Occupied Bandwidth	± 9.66 kHz
AC Conducted Emission	± 3.30 dB
Radiated Emission, 9 kHz to 30 MHz	± 3.59 dB
Radiated Emission, below 1 GHz	± 5.88 dB
Radiated Emission, above 1 Glz	± 5.94 dB

Uncertainty figures are valid to a confidence level of 95 %.

1.10. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501/RF-RTL013953	2019.06.18	Initial
1	F690501/RF-RTL013953-1	2019.08.30	Revised information of KDB version and operation mode about 802.11b

1.11. Information of Variant Model

Model Name	Information	
AIGC92W	- Basic Model	
AIGB92W	- Same to basic mode, but variant model name is made for marketing purpose	

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



1.12. Duty Cycle of EUT

Regarding to KDB 558074 D01 15.247 Meas Guidance v05r02, 6, the maximum duty cycle was investigated and set the spectrum analyzer as below;

Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100.


Mode	Data Rate	Duty Cycle (%)	Correction factor (dB)
11b	1 Mbps	99.30	0
11g	6 Mbps	91.51	0.39
11n_HT20	MCS8	93.75	0.28

Remark;

- 1. As measured duty cycles of EUT, all of mode and data rate keep constant period and are converted to log scale (power averaging) to compensate correction factor to result of average test items.
- 2. Duty Cycle (%) = (Tx on time / Tx on + off time) x 100
- 3. Correction factor (dB) = $10 \log (1 / \text{Duty Cycle})$

- Test plots



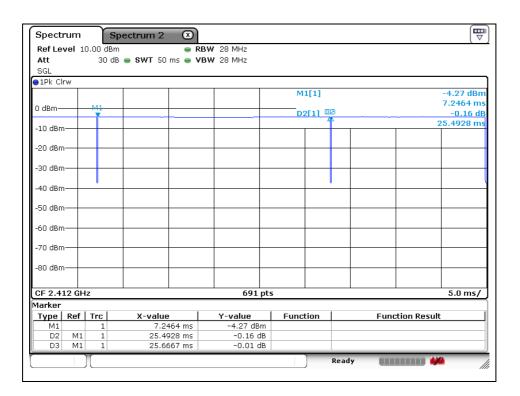


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr RTT5041-19(2019.04.24)(1) Tel. +82 31 428 5700 / Fax. +82 31 427 2370 A4(210 mm × 297 mm)





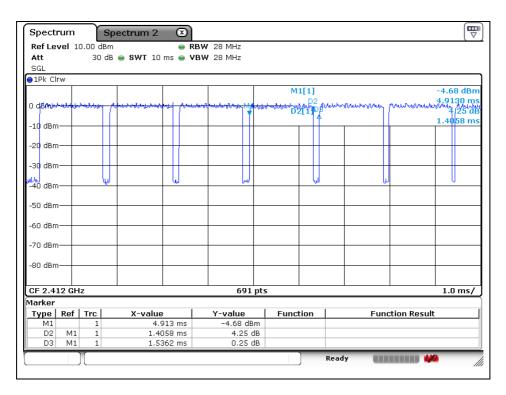

802.11n_HT20

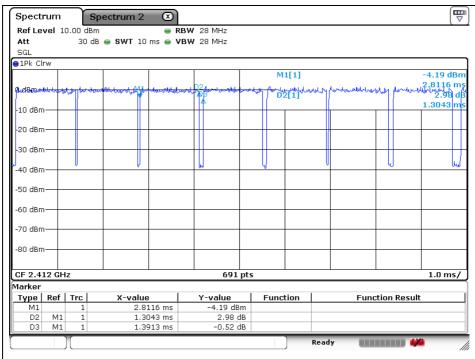




2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission


2.1. Test Setup

2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kt to 30 Mtz emissions.

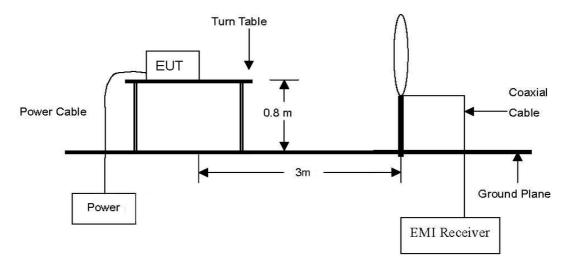

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 Mz to 1 GHz Emissions.

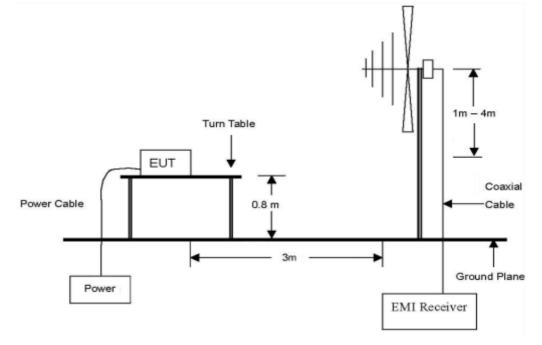


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr RTT5041-19(2019.04.24)(1) Tel. +82 31 428 5700 / Fax. +82 31 427 2370 A4(210 mm × 297 mm)



The diagram below shows the test setup that is utilized to make the measurements for emission .The spurious emissions were investigated form 1 $G_{\mathbb{Z}}$ to the 10th harmonic of the highest fundamental frequency or 40 $G_{\mathbb{Z}}$, whichever is lower.

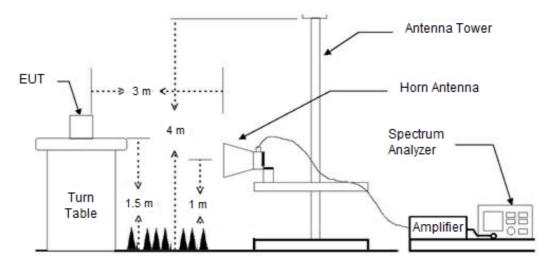

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

 SGS Korea Co., Ltd. (Gunpo Laboratory)
 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
 http://www.sgsgroup.kr

 RTT5041-19(2019.04.24)(1)
 Tel. +82 31 428 5700 / Fax. +82 31 427 2370
 A4(210 mm × 297 mm)



2.1.2. Conducted Spurious Emission



2.2. Limit

According to \$15.247(d), in any 100 klb bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 klb bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section \$15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in section \$15.205(c)).

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (账)	Field Strength (<i>μ</i> ∛/m)	Measurement Distance (Meters)
0.009-0.490	2 400/F(kHz)	300
0.490-1.705	24 000/F(kliz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 Mz, 76-88 Mz, 174-216 Mz or 470-806 Mz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §15.231 and 15.241.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013.

2.3.1. Test Procedures for emission below 30 Mb

- 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- 3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum Hold Mode.

2.3.2. Test Procedures for emission from above 30 $\mbox{ }$

- 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site below 1 GHz and 1.5 meters above the ground at a 3 meter anechoic chamber test site above 1 GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- 3. The antenna is a bi-log antenna, a horn antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



Note;

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

1. Unwanted Emissions into Non-Restricted Frequency Bands

- The Reference Level Measurement refer to section 11.11.2 Set analyzer center frequency to DTS channel center frequency, SPAN \geq 1.5 times the DTS bandwidth, the RBW = 100 klb and VBW \ge 3 × RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold.

- Unwanted Emissions Level Measurement refer to section 11.11.3

Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 km and $VBW \ge 3 \times RBW$, Detector = Peak, Sweep time = Auto couple, Trace = Max hold.

2. Unwanted Emissions into Restricted Frequency Bands

- Peak Power measurement procedure refer to section 11.12.2.4 Set RBW = as specified in Table 9, VBW ≥ 3 x RBW, Detector = Peak, Sweep time = auto, Trace = Max hold.

alon of frequency
RBW
200 Hz to 300 Hz
9 kHz to 10 kHz
100 kHz to 120 kHz
1 MHz

If the peak – detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

- Average Power measurements procedure refer to section 11.12.2.5.2

The EUT shall be configured to operate at the maximum achievable duty cycle. Measure the duty cycle D of the transmitter output signal as described in section 11.6. Set RBW = 1 Mb, VBW \ge 3 x RBW, Detector = RMS, if span / (# of points in sweep) \le (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied then the detector mode shall be set to peak.

Averaging type = power (i.e., RMS).

As an alternative the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used. Sweep time = auto, Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is [10 log (1 / D)], where D is the duty cycle.
- 3) If a specific emission is demonstrated to be continuous ($D \ge 98$ %) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.
- 3. Definition of DUT Axis.

Definition of the test orthogonal plan for EUT was described in the test setup photo. The test orthogonal plan of EUT is **Z** – **axis** during radiation test.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr



2.3.3. Test Procedures for Conducted Spurious Emissions

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

Per the guidance of ANSI C63.10-2013, section 11.11.1 & 11.11.2 & 11.11.3, the reference level for out of band emissions is established from the plots of this section since the band edge emissions are measured with a RBW of 100 ktb. This reference level is then used as the limit in subsequent plots for out of band spurious emissions shown in section 2.4.3. The limit for out of band spurious emission at the band edge is 20 dB below the fundamental emission level measured in a 100 km bandwidth.

- 1. Conducted Emissions at Band Edge
- The Measurement refer to section 11.11.2 Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 kland VBW \ge 3 x RBW, Detector = Peak, Sweep time = Auto couple, Trace mode = Max hold, The trace was allowed to stabilize.
- 2. Conducted Spurious Emissions
- The Measurement refer to section 11.11.3

Start frequency was set to 9 klz and stop frequency was set to 25 GHz (separated into two plots per channel), RBW = 1 Mb, VBW ≥ 3 x RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold, The trace was allowed to stabilize.

- 3. TDF function
 - For plots showing conducted spurious emissions from 9 klz to 25 Glz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as TDF function. So, the reading values shown in plots were final result.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr RTT5041-19(2019.04.24)(1) Tel. +82 31 428 5700 / Fax. +82 31 427 2370 A4(210 mm × 297 mm)



2.4. Test Results

Ambient temperature	:	(23	± 1) °C
Relative humidity	:	47	% R.H.

2.4.1. Radiated Spurious Emission below 1 000 Mb


The frequency spectrum from 9 kl to 1 000 M was investigated. All reading values are peak values.

Radi	ated Emissio	ons	Ant	Correctio	n Factors	Total	Total Limit	
Frequency (Mb)	Reading (dBµV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)			Margin (dB)
35.09	44.30	Peak	н	12.23	-26.68	29.85	40.00	10.15
61.73	45.40	Peak	V	12.02	-26.29	31.13	40.00	8.87
137.79	49.40	Peak	V	8.53	-25.53	32.40	43.50	11.10
238.55	43.30	Peak	н	12.41	-25.39	30.32	46.00	15.68
387.53	41.40	Peak	н	15.43	-25.18	31.65	46.00	14.35
522.92	38.90	Peak	н	17.80	-24.72	31.98	46.00	14.02
Above 600.00	Not detected	-	-	-	-	-	-	-

Remark;

- 1. Spurious emissions for all channels were investigated and almost the same below 1 Gal.
- Reported spurious emissions are in 11n / MCS8 / Middle channel as worst case among other modes. 2.
- Radiated spurious emission measurement as below. 3. (Actual = Reading + AF + AMP + CL)
- 4. According to §15.31(o), emission levels are not report much lower than the limits by over 20 dB.

- Test plot

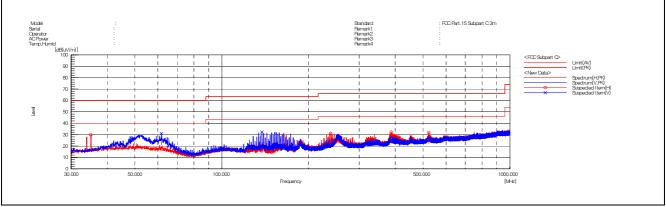

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr RTT5041-19(2019.04.24)(1) Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)



2.4.2. Radiated Spurious Emission above 1 000 Mb

The frequency spectrum above 1 000 Mb was investigated. All reading values are peak and average values.

DSSS: 802.11b (1 Mbps)_ANT 1+ANT 2

Low Channel (2 412 Mtz)

Radi	ated Emissio	ons	Ant.	Corre	ection Fa	ctors	Total	al Limit	
Frequency (쌘)	Reading (dBµN)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
*2 310.00	18.44	Peak	V	27.82	7.54	-	53.80	74.00	20.20
*2 310.00	8.20	Average	V	27.82	7.54	-	43.56	54.00	10.44
*2 358.32	23.79	Peak	V	27.92	7.60	-	59.31	74.00	14.69
*2 385.32	10.96	Average	V	27.97	7.68	-	46.61	54.00	7.39
*2 390.00	20.48	Peak	V	27.98	7.69	-	56.15	74.00	17.85
*2 390.00	10.23	Average	V	27.98	7.69	-	45.90	54.00	8.10

Radiated Emissions		Ant.	Corr	ection Fact	tors	Total	Limit		
Frequency (Mb)	Reading (dBµN)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

Middle Channel (2 437 Mtz)

Radiated Emissions		Ant.	Corr	ection Fact	tors	Total Limit		it	
Frequency (Mb)	Reading (dBµN)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



High Channel (2 462 Mtz)

Radi	Radiated Emissions			Corre	ection Fa	ctors	Total	Limit	
Frequency (畑)	Reading (dB ₄ N)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
*2 483.50	19.53	Peak	V	28.00	7.84	-	55.37	74.00	18.63
*2 483.50	9.88	Average	V	28.00	7.84	-	45.72	54.00	8.28
*2 490.70	22.61	Peak	V	28.00	7.85	-	58.46	74.00	15.54
*2 488.50	11.64	Average	V	28.00	7.85	-	47.49	54.00	6.51
*2 500.00	20.85	Peak	V	28.00	7.87	-	56.72	74.00	17.28
*2 500.00	8.86	Average	V	28.00	7.87	-	44.73	54.00	9.27

Radiated Emissions		Ant.	Correction Factors			Total	Limit		
Frequency (畑)	Reading (dBµV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-



OFDM: 802.11g (6 Mbps)_ANT 1+ANT 2

Low Channel (2 412 Mb)

Radi	ated Emissic	ons	Ant.	Corre	ection Fa	ctors	Total	Limit	
Frequency (쌘)	Reading (dB _# N)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
*2 310.00	18.37	Peak	V	27.82	7.54	-	53.73	74.00	20.27
*2 310.00	8.16	Average	V	27.82	7.54	0.39	43.91	54.00	10.09
*2 389.76	29.14	Peak	V	27.98	7.69	-	64.81	74.00	9.19
*2 389.76	13.53	Average	V	27.98	7.69	0.39	49.59	54.00	4.41
*2 390.00	30.66	Peak	V	27.98	7.69	-	66.33	74.00	7.67
*2 390.00	13.93	Average	V	27.98	7.69	0.39	49.99	54.00	4.01

Radiated Emissions		Ant.	Correction Factors			Total	Limit		
Frequency (肔)	Reading (dB#V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

Middle Channel (2 437 Mtz)

Radiated Emissions		Ant.	Correction Factors			Total	Limit		
Frequency (Mb)	Reading (dBµN)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-



High Channel (2 462 Mz)

Radi	Radiated Emissions			Correction Factors			Total	Limit	
Frequency (畑)	Reading (dBµV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	DF (dB)	Actual (dBµV/m)	Limit (dBµN/m)	Margin (dB)
*2 483.50	28.91	Peak	V	28.00	7.84	-	64.75	74.00	9.25
*2 483.50	12.69	Average	V	28.00	7.84	0.39	48.92	54.00	5.08
*2 483.77	29.08	Peak	V	28.00	7.84	-	64.92	74.00	9.08
*2 483.77	12.77	Average	V	28.00	7.84	0.39	49.00	54.00	5.00
*2 500.00	19.44	Peak	V	28.00	7.87	-	55.31	74.00	18.69
*2 500.00	9.10	Average	V	28.00	7.87	0.39	45.36	54.00	8.64

Radiated Emissions		Ant.	Correction Factors			Total	Limit		
Frequency (Mb)	Reading (dBµV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-



OFDM: 802.11n_HT20 (MCS8)_ANT 1+ANT 2

Low Channel (2 412 Mtz)

Radi	Radiated Emissions			Correction Factors			Total	Limit	
Frequency (畑)	Reading (dBµV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
*2 310.00	17.79	Peak	V	27.82	7.54	-	53.15	74.00	20.85
*2 310.00	7.11	Average	V	27.82	7.54	0.28	42.75	54.00	11.25
*2 388.80	25.65	Peak	V	27.98	7.69	-	61.32	74.00	12.68
*2 389.88	11.92	Average	V	27.98	7.69	0.28	47.87	54.00	6.13
*2 390.00	26.00	Peak	V	27.98	7.69	-	61.67	74.00	12.33
*2 390.00	11.35	Average	V	27.98	7.69	0.28	47.30	54.00	6.70

Radiated Emissions		Ant.	Correction Factors			Total Limit		it	
Frequency (肔)	Reading (dBµV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

Middle Channel (2 437 Mtz)

Radiated Emissions		Ant.	Correction Factors			Total	Limit		
Frequency (Mb)	Reading (dBµN)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-



High Channel (2 462 Mtz)

Radi	Radiated Emissions			Correction Factors			Total	Limit	
Frequency (畑)	Reading (dBµV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
*2 483.50	21.17	Peak	V	28.00	7.84	-	57.01	74.00	16.99
*2 483.50	9.58	Average	V	28.00	7.84	0.28	45.70	54.00	8.30
*2 484.38	23.26	Peak	V	28.00	7.84	-	59.10	74.00	14.90
*2 484.09	10.25	Average	V	28.00	7.84	0.28	46.37	54.00	7.63
*2 500.00	18.14	Peak	V	28.00	7.87	-	54.01	74.00	19.99
*2 500.00	8.41	Average	V	28.00	7.87	0.28	44.56	54.00	9.44

Radiated Emissions		Ant.	Corr	Correction Factors			al Limit		
Frequency (Mb)	Reading (dBµN)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dBµN/m)	Limit (dBµN/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

Remarks;

- 1. "*" means the restricted band.
- 2. Measuring frequencies from 1 \mathbb{G} to the 10th harmonic of highest fundamental frequency.
- 3. Radiated emissions measured in frequency above 1 000 Mb were made with an instrument using peak/average detector mode.
- 4. Actual = Reading + AF + AMP + CL + (DF) or Reading + AF + CL + (DF).
- 5. According to § 15.31(o), emission levels are not reported much lower than the limits by over 20 dB.
- The maximized peak measured value complies with the average limit, to perform an average 6. measurement is unnecessary.


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



- Test plots

DSSS: 802.11b (1 Mbps) _ANT 1+ANT 2

Low channel Band edge (Peak)

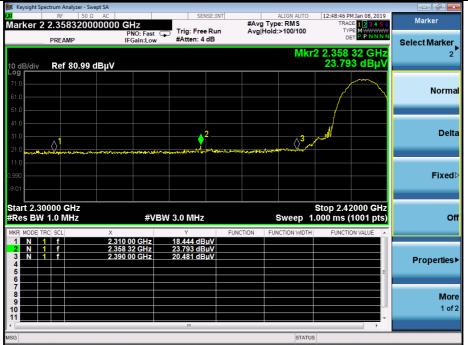

Low channel Band edge (Average)



The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr A4(210 mm × 297 mm)



High channel Band edge (Peak)



High channel Band edge (Average)






OFDM: 802.11g (6 Mbps) _ANT 1+ANT 2

Low channel Band edge (Peak)



Low channel Band edge (Average)

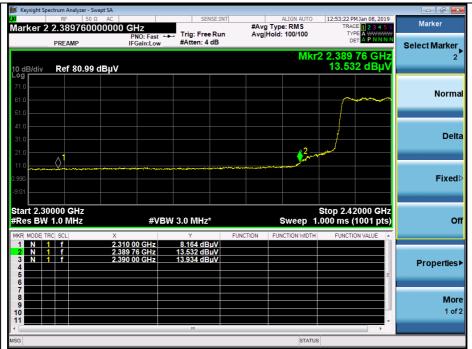



High channel Band edge (Peak)



High channel Band edge (Average)






OFDM: 802.11n_HT20 (MCS8) _ANT 1+ANT 2

Low channel Band edge (Peak)



Low channel Band edge (Average)

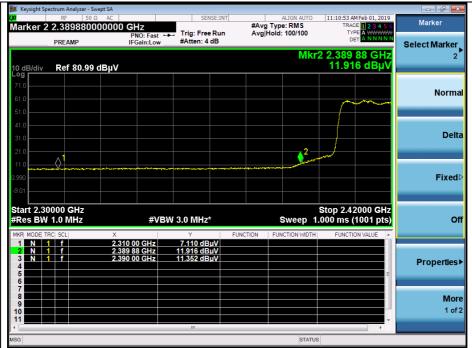



High channel Band edge (Peak)



High channel Band edge (Average)







2.4.3. Plot of Conducted Spurious Emissions

DSSS: 802.11b (1 Mbps) _ANT 1

Low Channel

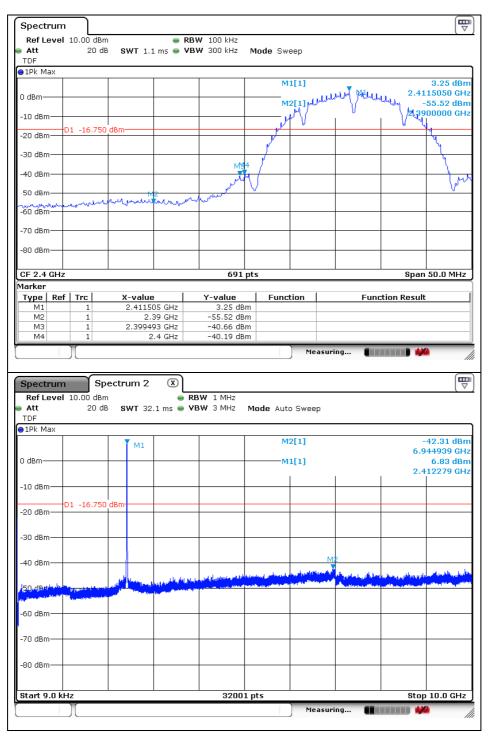



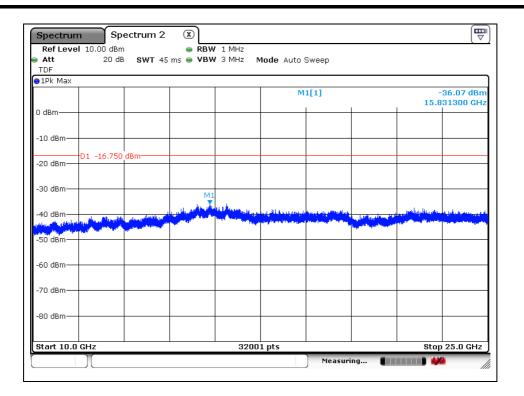


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr RTT5041-19(2019.04.24)(1) Tel. +82 31 428 5700 / Fax. +82 31 427 2370




Middle Channel

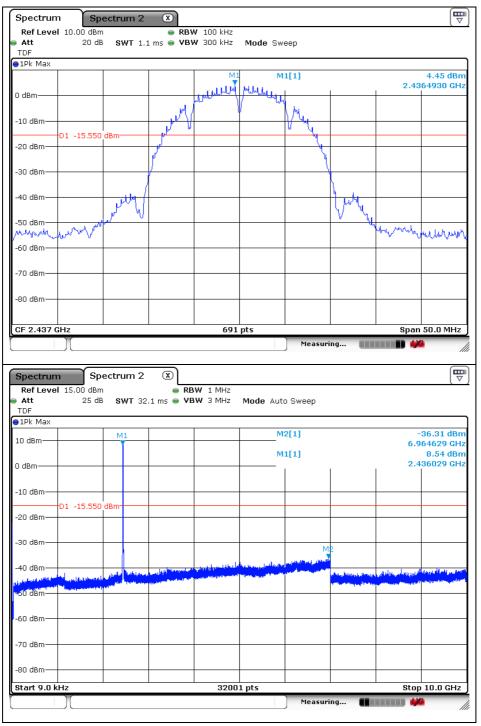

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr RTT5041-19(2019.04.24)(1) Tel. +82 31 428 5700 / Fax. +82 31 427 2370 A4(210 mm × 297 mm)




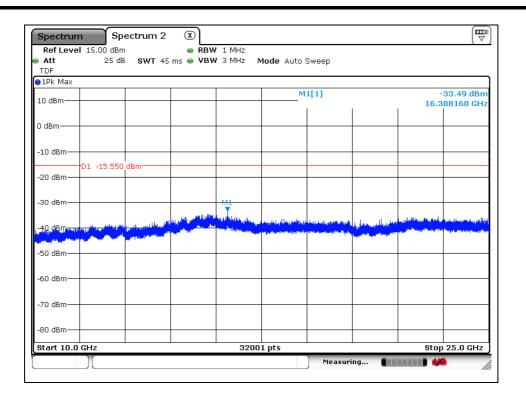


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr RTT5041-19(2019.04.24)(1) A4(210 mm × 297 mm)



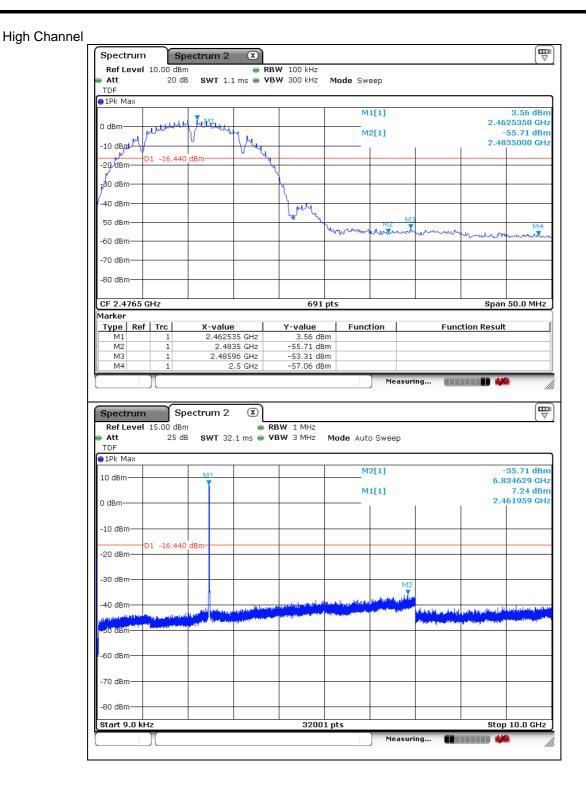





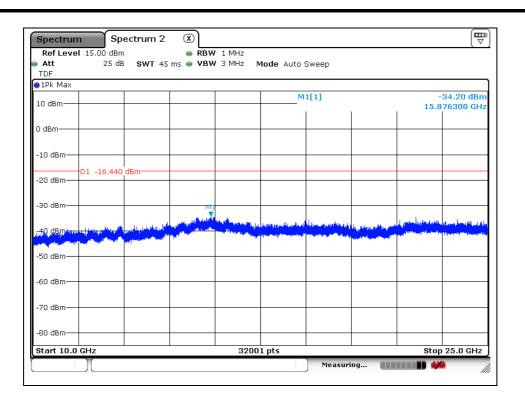


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr A4(210 mm × 297 mm)



DSSS: 802.11b (1 Mbps) _ANT 2




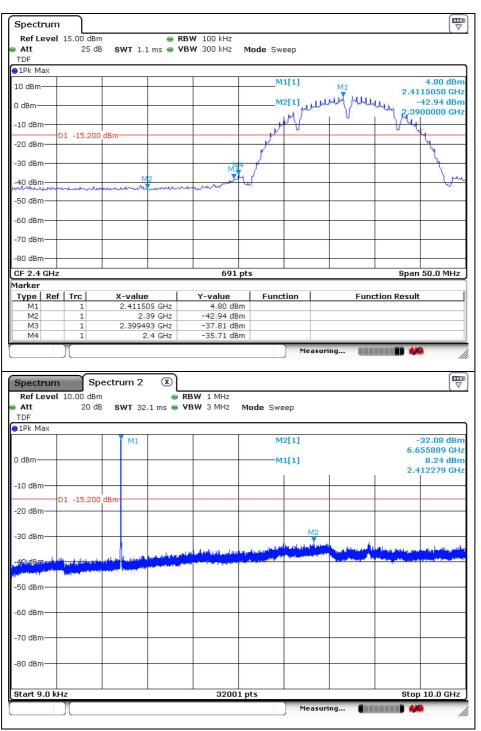

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.





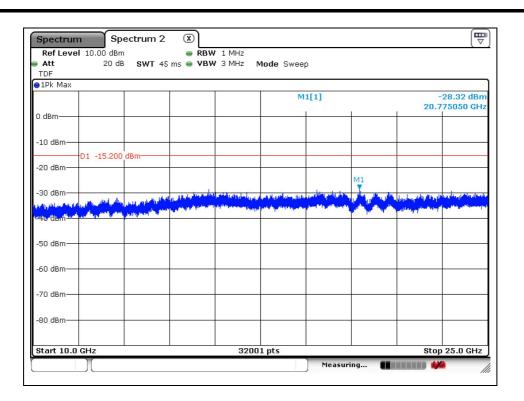


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr A4(210 mm × 297 mm)




Middle Channel

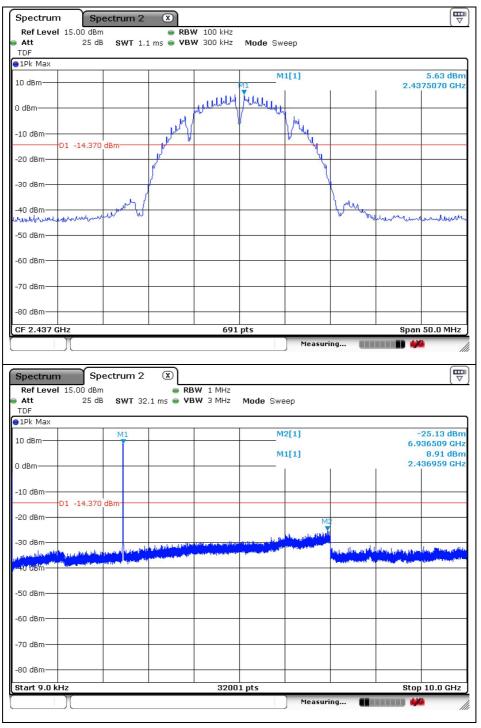

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



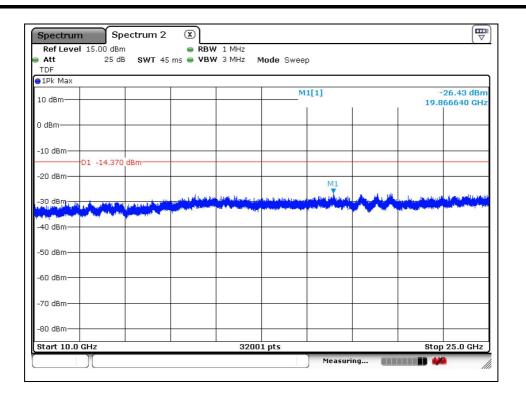


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.









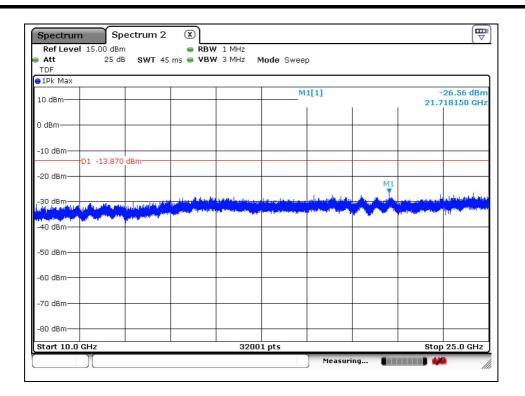


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




OFDM: 802.11g (6 Mbps) _ANT 1

Low Channel

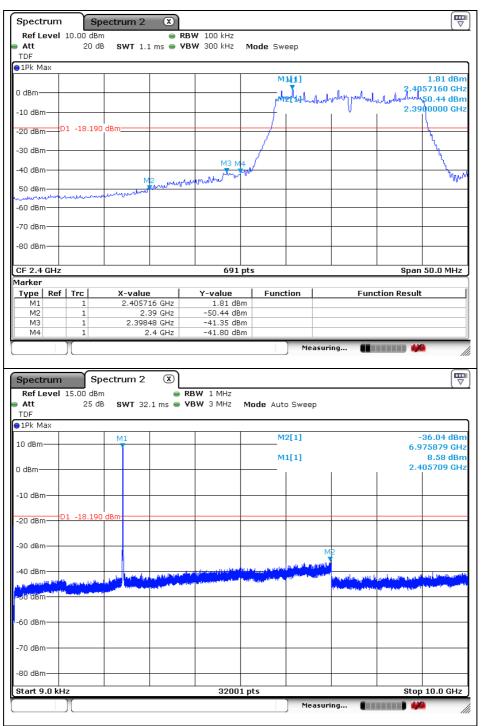




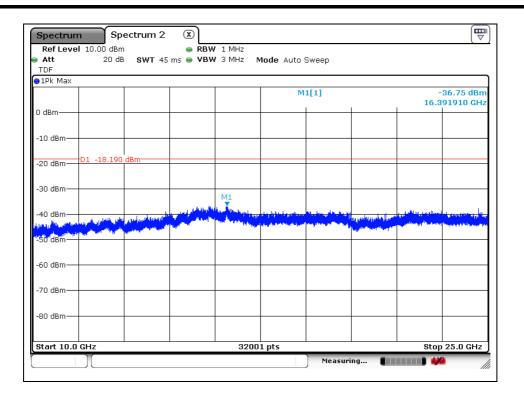




Middle Channel

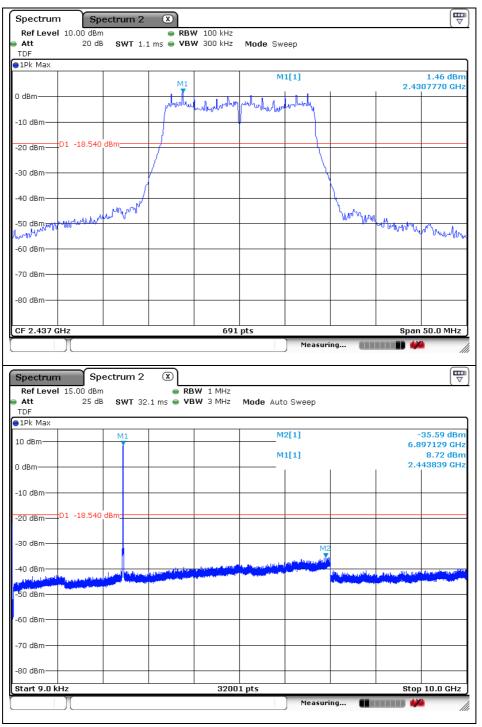

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




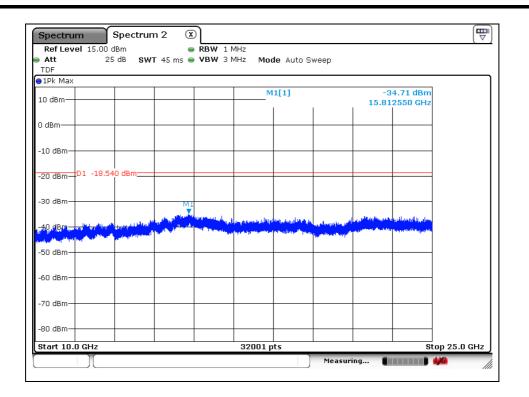


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

A4(210 mm × 297 mm)



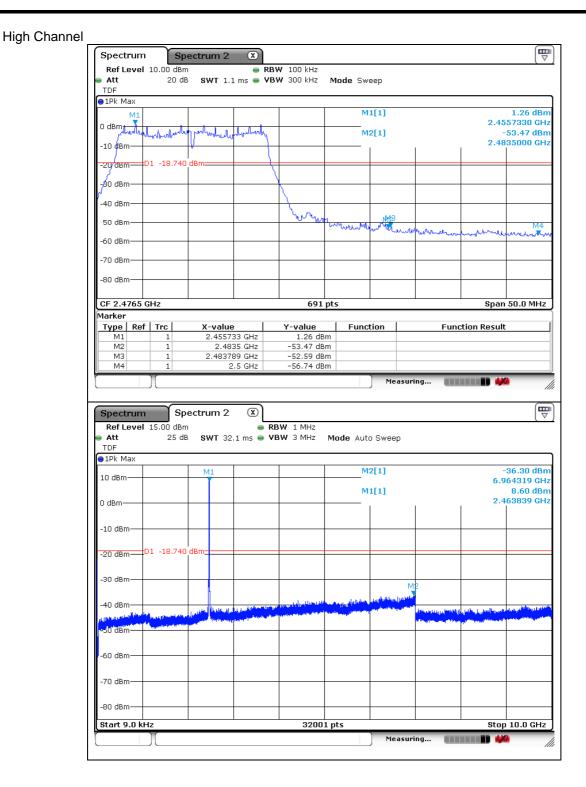



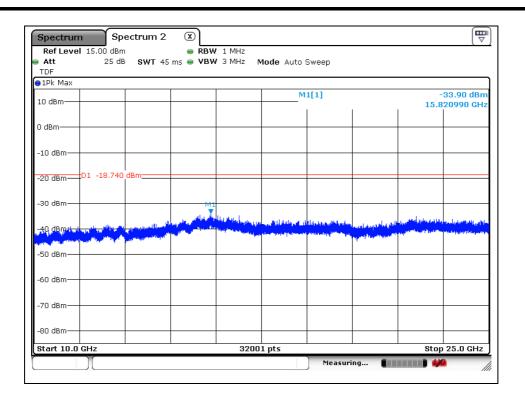

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


 SGS Korea Co., Ltd. (Gunpo Laboratory)
 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
 http://www.sgsgroup.kr

 RTT5041-19(2019.04.24)(1)
 Tel. +82 31 428 5700 / Fax. +82 31 427 2370
 A4(210 mm × 297 mm)




OFDM: 802.11g (6 Mbps) _ANT 2

Low Channel

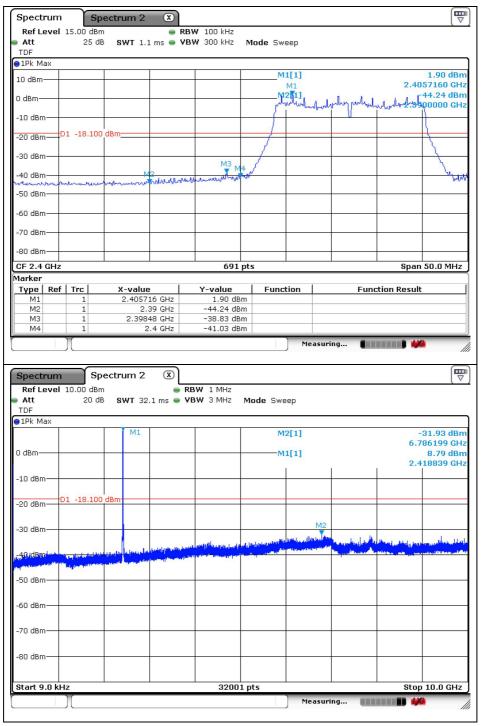




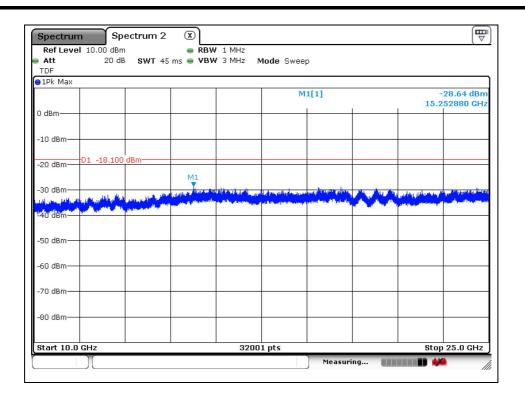

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Middle Channel

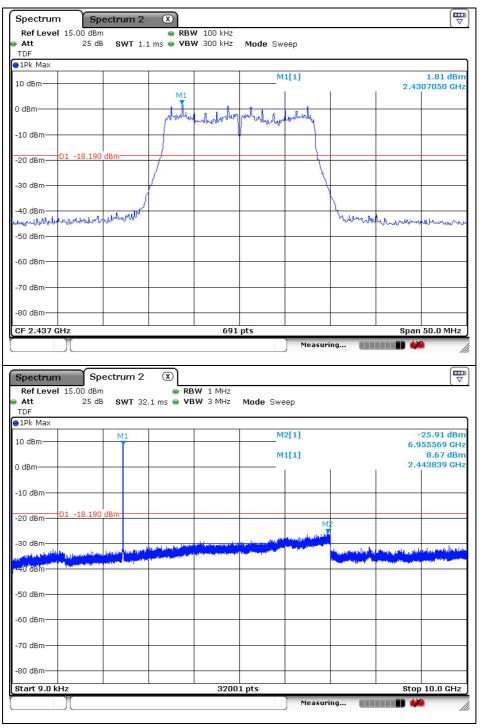


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



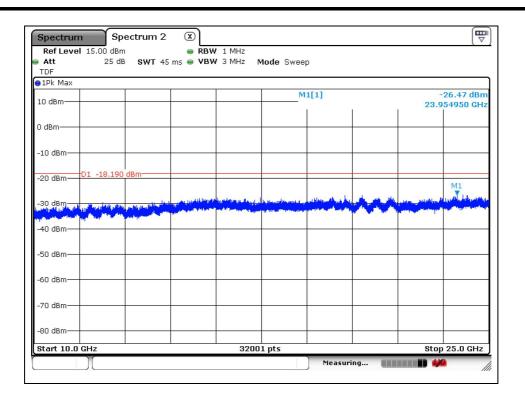


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



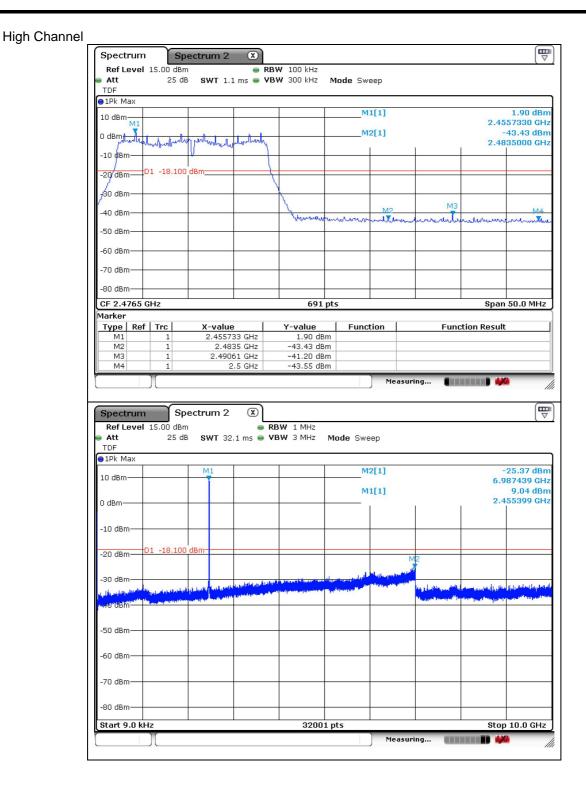



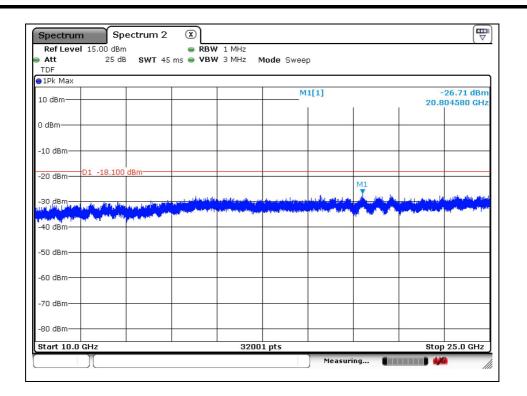

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


 SGS Korea Co., Ltd. (Gunpo Laboratory)
 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
 http://www.sgsgroup.kr

 RTT5041-19(2019.04.24)(1)
 Tel. +82 31 428 5700 / Fax. +82 31 427 2370
 A4(210 mm × 297 mm)





OFDM: 802.11n_HT20 (MCS8)_ANT 1

Low Channel

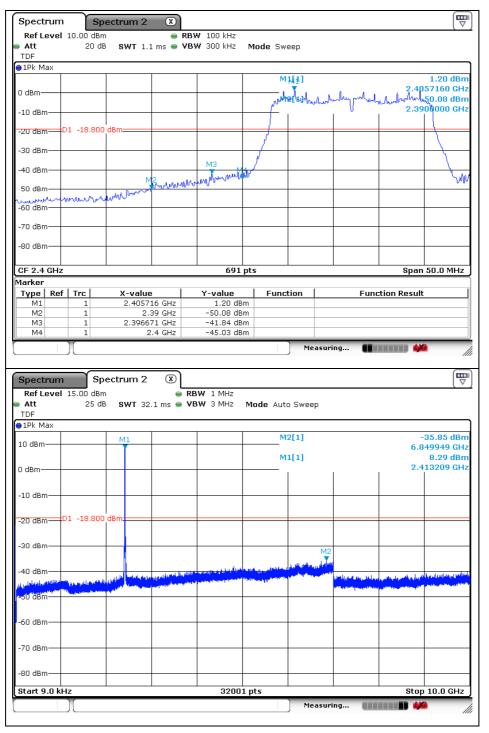





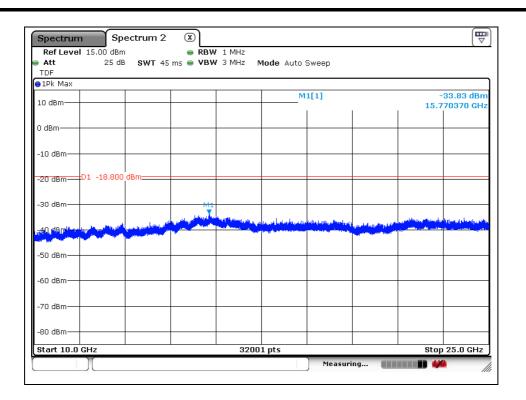


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr A4(210 mm × 297 mm)




Middle Channel

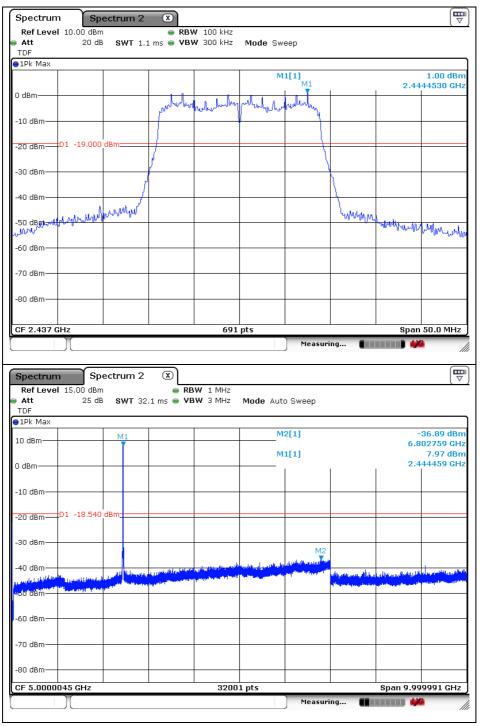


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.





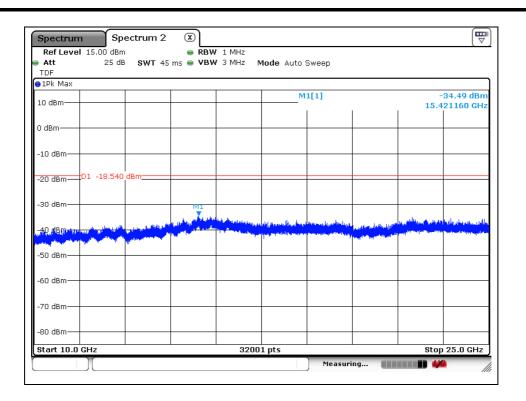




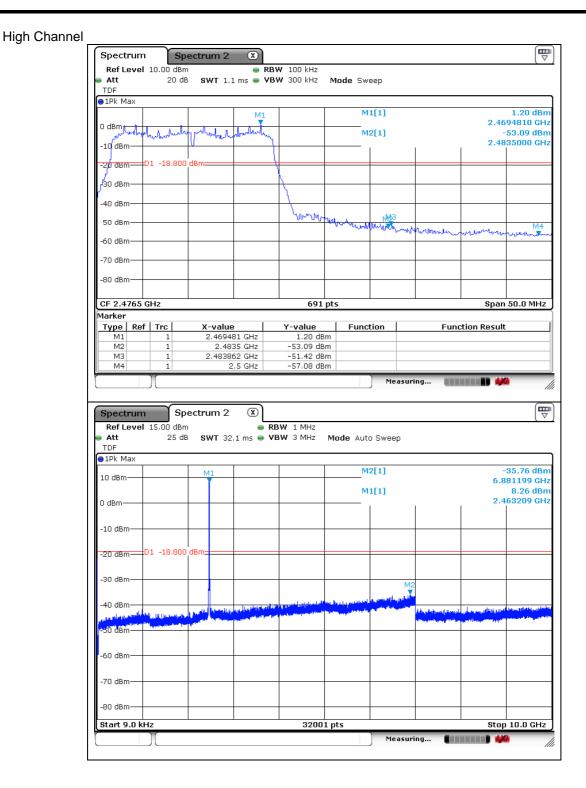





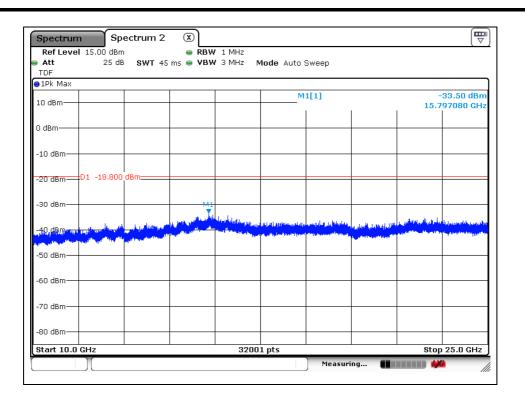


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




OFDM: 802.11n_HT20 (MCS8)_ANT 2

Low Channel

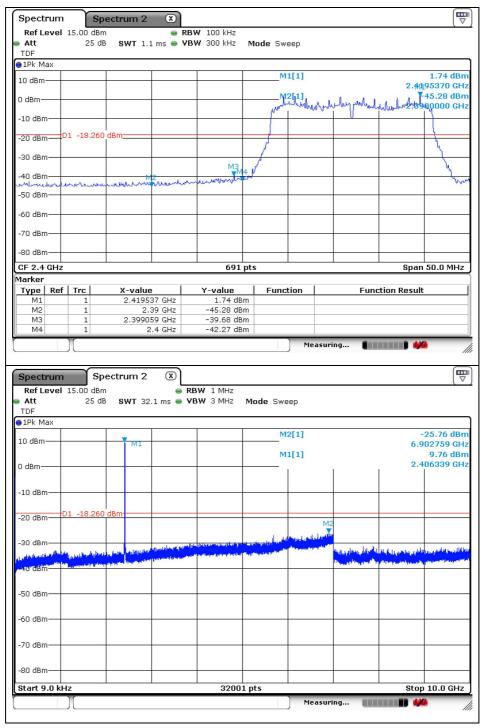




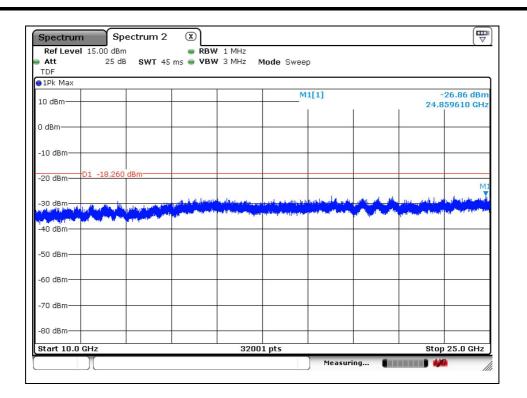

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Middle Channel

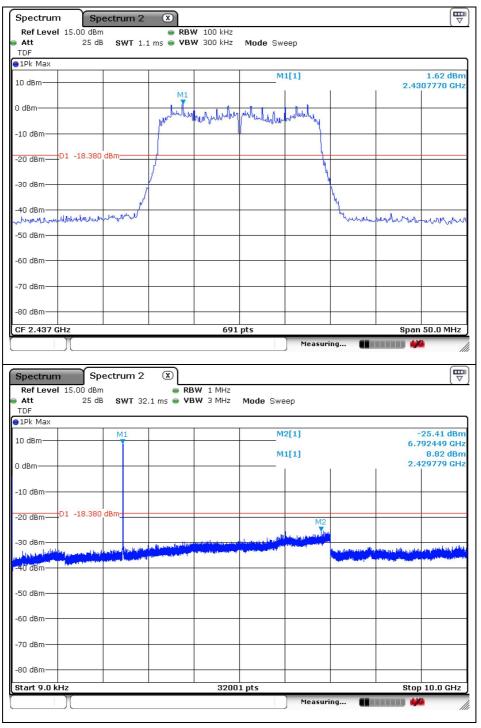

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




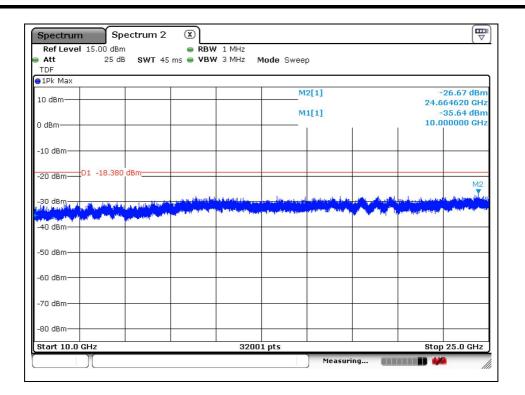


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 http://www.sgsgroup.kr RTT5041-19(2019.04.24)(1) A4(210 mm × 297 mm)



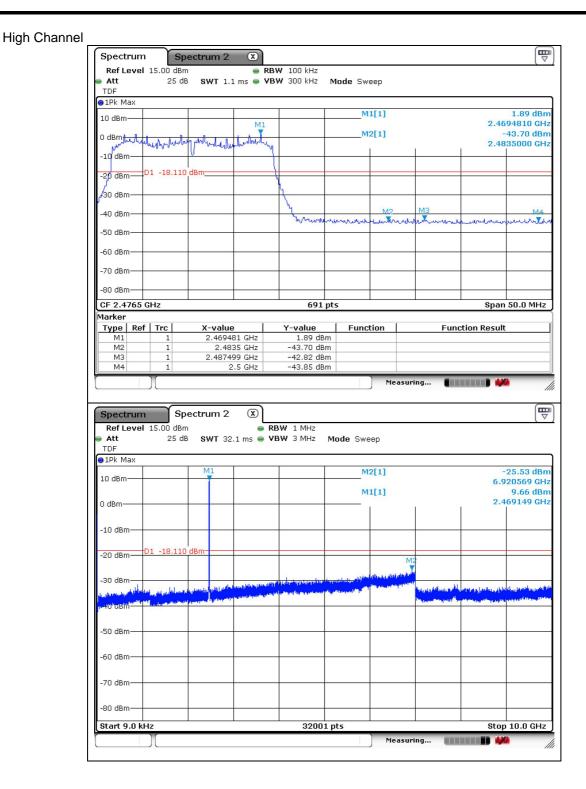



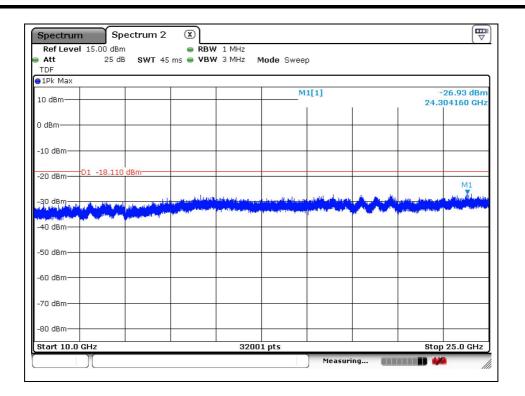

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.