

## **FCC 15.247 & RSS-247 2.4GHz Test Report**

**for**

**LG Electronics Inc.**

**222, LG-ro, Jinwi-myeon Pyeongtaek-Si, Gyeonggi-Do,  
17709 Republic of Korea**

**Product Name : Bluetooth Module**  
**Model Name : GB8773**  
**Brand : LG**  
**FCC ID : BEJ-GB8773**  
**IC : 2703H-GB8773**

**Prepared by: : AUDIX Technology Corporation,  
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

## TABLE OF CONTENTS

Description	Page
TEST REPORT .....	4
<b>1. REVISION RECORD OF TEST REPORT .....</b>	<b>5</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. GENERAL INFORMATION .....</b>	<b>7</b>
3.1. Description of Application .....	7
3.2. Description of EUT .....	7
3.3. Reference Test Guidance .....	8
3.4. Antenna Information .....	8
3.5. EUT Specifications Assessed in Current Report .....	8
3.6. Descriptions of Key Components .....	8
3.7. Test Configuration .....	9
3.8. Output Power Setting .....	10
3.9. Tested Supporting System List .....	11
3.10. Setup Configuration .....	11
3.11. Operating Condition of EUT .....	11
3.12. Description of Test Facility .....	12
3.13. Measurement Uncertainty .....	13
<b>4. MEASUREMENT EQUIPMENT LIST .....</b>	<b>14</b>
4.1. Conducted Emission Measurement .....	14
4.2. Radiated Emission Measurement .....	15
4.3. RF Conducted Measurement .....	15
<b>5. CONDUCTED EMISSION .....</b>	<b>16</b>
5.1. Block Diagram of Test Setup .....	16
5.2. Conducted Emission Limit .....	16
5.3. Test Procedure .....	16
5.4. Test Results .....	16
<b>6. RADIATED EMISSION .....</b>	<b>17</b>
6.1. Block Diagram of Test Setup .....	17
6.2. Radiated Emission Limits .....	18
6.3. Test Procedure .....	19
6.4. Measurement Result Explanation .....	20
6.5. Test Results .....	20
<b>7. DTS/OCCUPIED BANDWIDTH .....</b>	<b>21</b>
7.1. Block Diagram of Test Setup .....	21
7.2. Specification Limits .....	21
7.3. Test Procedure .....	21
7.4. Test Results .....	21
<b>8. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>22</b>
8.1. Block Diagram of Test Setup .....	22
8.2. Specification Limits .....	22
8.3. Test Procedure .....	23
8.4. Test Results .....	23
<b>9. EMISSION LIMITATIONS .....</b>	<b>24</b>
9.1. Block Diagram of Test Setup .....	24



**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

---

9.2. Specification Limits.....	24
9.3. Test Procedure.....	24
9.4. Test Results .....	25
<b>10. POWER SPECTRAL DENSITY .....</b>	<b>26</b>
10.1. Block Diagram of Test Setup .....	26
10.2. Specification Limits.....	26
10.3. Test Procedure .....	26
10.4. Test Results .....	26
<b>11. DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>27</b>

APPENDIX A TEST DATA AND PLOTS  
APPENDIX B TESTPHOTOGRAPHS

## TEST REPORT

Applicant : LG Electronics Inc.  
Manufacturer : LG Electronics Inc.  
Factory : HUIZHOU GAOSHENGDA TECHNOLOGY CO., LTD.  
EUT Description  
(1) Product : Bluetooth Module  
(2) Model : GB8773  
(3) Brand : LG  
(4) Power Supply: DC 3.3V

### Applicable Standards:


Title 47 CFR FCC Part 15 Subpart C  
RSS-Gen (Issue 5), Amendment 2, February 2021  
RSS-247 (Issue 2), February 2017

**Audix Technology Corp.** tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

**Audix Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2023. 08. 01

Reviewed by:



(Annie Yu/Administrator)

Approved by:



(Johnny Hsueh/Section Manager)

## 1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2023. 08. 01	Original Report	EM-F230389

## 2. SUMMARY OF TEST RESULTS

Rule		Description	Results
FCC	IC		
15.207	RSS-Gen §8.8	Conducted Emission	<b>PASS</b>
15.247(d)/ 15.205	RSS-Gen §8.9 RSS-247 §5.5	Radiated Band Edge and Radiated Spurious Emission	<b>PASS</b>
15.247(a)(2)	RSS-247 §5.2(1)	DTS/Occupied Bandwidth	<b>PASS</b>
15.247(b)(3)	RSS-247 §5.4(4)	Maximum Peak Output Power	<b>PASS</b>
15.247(d)	RSS-247 §5.5	Conducted Band Edges and Conducted Spurious Emission	<b>PASS</b>
15.247 (e)	RSS-247 §5.2(2)	Peak Power Spectral Density	<b>PASS</b>
15.203	---	Antenna Requirement	<b>Compliance</b>
Note: 1. Decision rule according to the limit of the test standard chapter, the test value is lower than the limit specified in the test chapter, and it is judged as Pass. 2. The uncertainties value is not used in determining the result. 3. N/A is an abbreviation for Not Applicable.			

### 3. GENERAL INFORMATION

#### 3.1. Description of Application

Applicant	LG Electronics Inc. No. 475, Sec. 4, Chang Ping Road, Daya Dist., Taichung City 428, Taiwan
Manufacturer	LG Electronics Inc. No. 475, Sec. 4, Chang Ping Road, Daya Dist., Taichung City 428, Taiwan
Factory	HUIZHOU GAOSHENGDA TECHNOLOGY CO., LTD. NO.2, JIN-DA ROAD, HUINAN HIGH-TECH INDUSTRIAL PARK, HUI-AO AVENUE, HUIZHOU CITY, GUANGDONG, CHINA
Product	Bluetooth Module
Model	GB8773
Brand	LG

#### 3.2. Description of EUT

Model	GB8773		
Serial Number	N/A		
Software Version	N/A		
Power Rating	DC 3.3V		
RF Features	BT and BLE (BT 5.1)		
Transmit Type	1T1R		
Sample Status	Trial sample		
Test Sample	Sample No.	Test Item	Firmware
	01	Output Power	N/A
	02	AC Conduction, RSE	N/A
Date of Receipt	2023. 07. 14		
Date of Test	2023. 07. 18 ~ 24		
Interface Ports of EUT	None		
Accessories Supplied	None		

Note: Pursuant ISO 17025:2017 section 7.8.2, Audix Technology Corp. does not assume responsibility for all EUT's information including RF features, transmit type, antenna information etc are provided by customer.

### 3.3. Reference Test Guidance

ANSI C63.10:2013

### 3.4. Antenna Information

No.	Model	Manufacture	Antenna Type	Frequency (MHz)	Gain(dBi)
1.	B12	ZXT	PCB	2400-2500	3.10

### 3.5. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
BLE	2402-2480	40	GFSK (1Mbps, 2Mbps)	2

Channel List							
BLE							
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
37	2402	09	2422	18	2442	28	2462
00	2404	10	2424	19	2444	29	2464
01	2406	38	2426	20	2446	30	2466
02	2408	11	2428	21	2448	31	2468
03	2410	12	2430	22	2450	32	2470
04	2412	13	2432	23	2452	33	2472
05	2414	14	2434	24	2454	34	2474
06	2416	15	2436	25	2456	35	2476
07	2418	16	2438	26	2458	36	2478
08	2420	17	2440	27	2460	39	2480


### 3.6. Descriptions of Key Components

Item	Supplier/Brand	Model	Specification
RF IC	Realtek	RTL8773CFL	BT and BLE (BT 5.1)



### 3.7. Test Configuration

Mode	TX <sub>on</sub> (ms)	TX <sub>on+off</sub> (ms)	1/ TX <sub>on</sub> (kHz)	Duty Cycle (x)	Duty Cycle Factor [10log(1/x)] (dB)
BLE (2M)	0.218	0.626	4.587	0.348	4.584
BLE (1M)	0.393	0.624	2.545	0.630	2.007

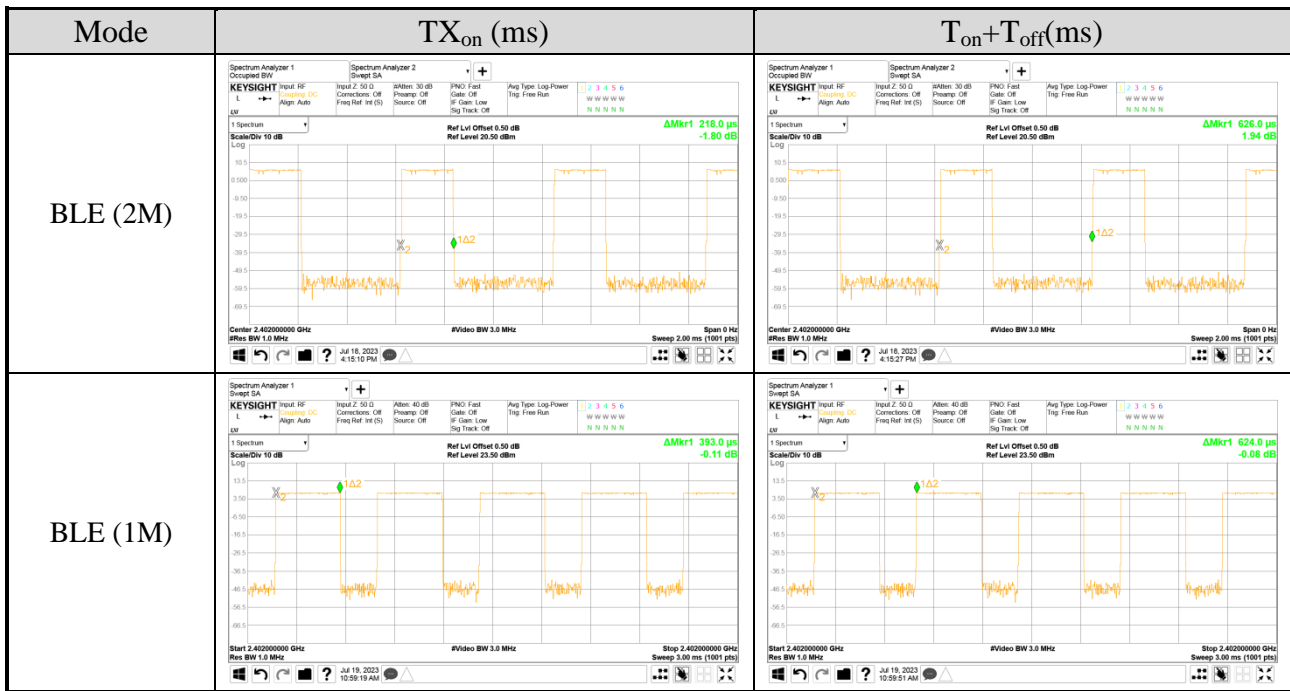

Item		Mode	Data Rate	Test Channel
Radiated Test Case	Radiated Spurious Emission(30MHz~1GHz)	BLE	2Mbps	37
	Radiated Band Edge <sup>Note1</sup>	BLE	2Mbps	37/39
	Radiated Spurious Emission <sup>Note1</sup>	BLE	2Mbps	37/17/39

Item		Mode	Data Rate	Test Channel
Conducted Test Case	DTS/occupied Bandwidth	BLE	1Mbps	37/17/39
			2Mbps	37/17/39
	Peak Output Power	BLE	1Mbps	37/17/39
			2Mbps	37/17/39
	Band Edge	BLE	2Mbps	37/39
	Spurious Emission	BLE	2Mbps	37/17/39
	Peak Power Spectral Density	BLE	2Mbps	37/17/39

Note 1:  Mobile Device  Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:  Lie  Side  Stand

### 3.8. Output Power Setting

Mode	Centre Frequency (MHz)	Power Setting
BLE	2402	Default
	2440	Default
	2480	Default

### 3.9. Tested Supporting System List

#### 3.9.1. Support Peripheral Unit

No.	Product	Brand	Model No.	Serial No.	Approval
1.	Notebook Computer	hp	TPN-Q189	5CD8175992	Contains FCC ID: PD93168NG Contains IC: 1000M-3168NG
2.	Test JIG	N/A	N/A	N/A	N/A

#### 3.9.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	Adapter: hp, M/N PPP-012C-S DC Cord : Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord : Unshielded, Detachable, 1.0m
2.	Bus Cable: Unshielded, Detachable, 0.5m

### 3.10. Setup Configuration

#### 3.10.1. EUT Configuration for Radiated Emission



#### 3.10.2. EUT Configuration for RF Conducted Test Items



### 3.11. Operating Condition of EUT

Test program “RTLBTAPP\_V5.3.3.9” is used for enabling BLE function under continues transmitting and choosing data rate/ channel.

### 3.12. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber

### 3.13.Measurement Uncertainty

The measurement uncertainty levels have been estimated as specified in ETSI TR 100 028-2001

Test Items/Facilities		Frequency Range	Uncertainty
Conduction Test	<input type="checkbox"/>	No. 7 Shielded Room	9kHz-150kHz ±3.7dB
			150kHz-30MHz ±3.4dB
	<input checked="" type="checkbox"/>	No. 8 Shielded Room	9kHz-150kHz ±3.7dB
			150kHz-30MHz ±3.5dB
Radiation Test	<input checked="" type="checkbox"/>	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal ±3.6dB
			200MHz-1000MHz, 3m, Horizontal ±4.3dB
			30MHz-200MHz, 3m, Vertical ±4.4dB
			200MHz-1000MHz, 3m, Vertical ±4.8dB
			1GHz-6GHz, 3m ±4.8dB
			6GHz-18GHz, 3m ±4.5dB
	<input type="checkbox"/>	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal ±4.0dB
			200MHz-1000MHz, 3m, Horizontal ±4.4dB
			30MHz-200MHz, 3m, Vertical ±4.7dB
			200MHz-1000MHz, 3m, Vertical ±4.5dB
			1GHz-6GHz, 3m ±4.8dB
			6GHz-18GHz, 3m ±4.5dB
	<input type="checkbox"/>	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal ±4.3dB
			200MHz-1000MHz, 3m, Horizontal ±4.2dB
			30MHz-200MHz, 3m, Vertical ±4.8dB
			200MHz-1000MHz, 3m, Vertical ±4.7dB
			1GHz-6GHz, 3m ±4.6dB
			6GHz-18GHz, 3m ±4.4dB
	<input type="checkbox"/>	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal ±4.6dB
			200MHz-1000MHz, 3m, Horizontal ±4.4dB
			30MHz-200MHz, 3m, Vertical ±4.5dB
			200MHz-1000MHz, 3m, Vertical ±4.9dB
			1GHz-6GHz, 3m ±4.9dB
			6GHz-18GHz, 3m ±4.6dB
	Radiated emissions (18GHz-40GHz)	18GHz-40GHz, 3m ±3.4dB	

Remark : Uncertainty =  $ku_c(y)$

Test Items	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

## 4. MEASUREMENT EQUIPMENT LIST

### 4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2023. 01. 11	1 Year
2.	A.M.N.	R&S	ENV432	101567	2023. 06. 02	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2022. 12. 19	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2022. 12. 14	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.8 S/R	2023. 04. 13	1 Year
6.	Coaxial Cable	Yeida	RG/58AU	CE-08	2022. 09. 07	1 Year
7.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

## 4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9010A-526	MY53400071	2022.08.24	1 Year
2.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2022.03.29	1 Year
3.	Test Receiver	R&S	ESCS30	100338	2023.06.20	1 Year
4.	Amplifier	HP	8447D	2944A06305	2022.12.29	1 Year
5.	Microwave Amplifier	Agilent	8449B	3008A01284	2023.06.06	1 Year
6.	Microwave Amplifier	Keysight	83051A	MY56480113	2022.09.07	1 Year
7.	Loop Antenna	TESEQ	HLA 6121	60478	2023.02.21	1 Year
8.	Bilog Antenna	TESEQ	CBL6112D	33821	2023.06.30	1 Year
9.	Horn Antenna	EMCO	3115	9112-3775	2023.05.04	1 Year
10.	Horn Antenna	COM-POWER	AH-840	101092	2022.12.30	1 Year
11.	2.4GHz Notch Filter	K&L Microwave	7NSL10-2441.5/ E130.5-O/O	2	2023.07.22	1 Year
12.	3GHz Notch Filter	Microwave	H3G018G1	484796	2023.07.22	1 Year
13.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2023.01.07	1 Year
14.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	RE-14	2023.01.07	1 Year
15.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	RE-30	2022.08.22	1 Year
16.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2023.04.13	1 Year
17.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

## 4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2023.02.22	1 Year
2.	Power Meter	`	ML2495A	2127005	2022. 12. 01	1 Year
3.	Power Sensor	Anritsu	MA2411B	1911360	2022. 12. 07	1 Year
4.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2023.04.13	1 Year


## 5. CONDUCTED EMISSION

### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block Diagram of EUT

Indicated as section 3.10

#### 5.1.2. Shielded Room Setup Diagram

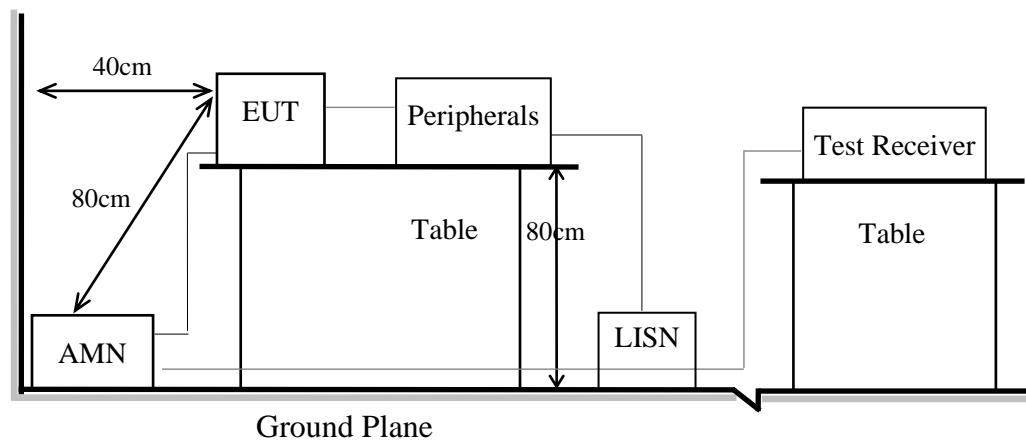

### 5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB $\mu$ V	56 ~ 46 dB $\mu$ V
500kHz ~ 5MHz	56 dB $\mu$ V	46 dB $\mu$ V
5MHz ~ 30MHz	60 dB $\mu$ V	50 dB $\mu$ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

### 5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150kHz to 30 MHz and record the emission which does not have 20 dB below limit.

### 5.4. Test Results

Please refer to Appendix A.




## 6. RADIATED EMISSION

### 6.1. Block Diagram of Test Setup


#### 6.1.1. Block Diagram of EUT

Indicated as section 3.10


#### 6.1.2. Setup Diagram for 9kHz-30MHz

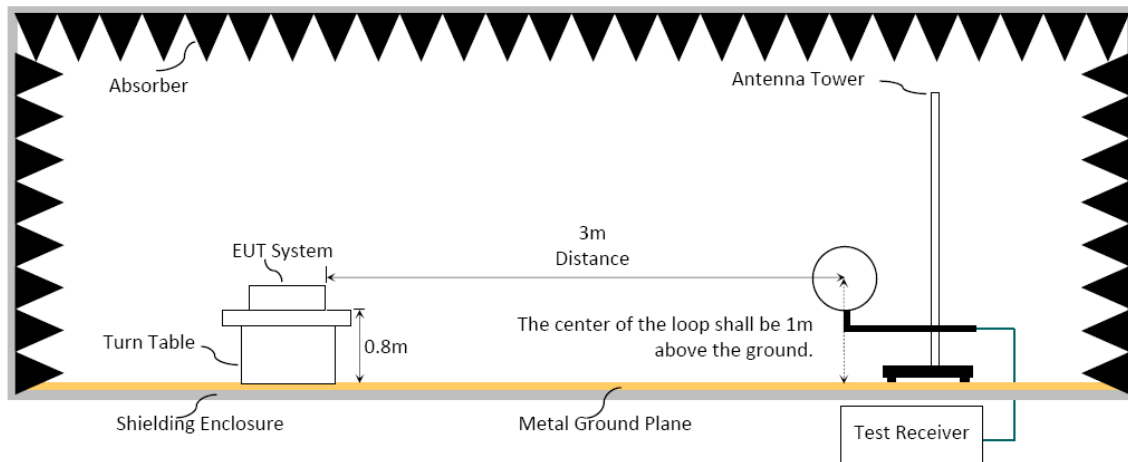

#### 6.1.3. Setup Diagram for 30-1000MHz

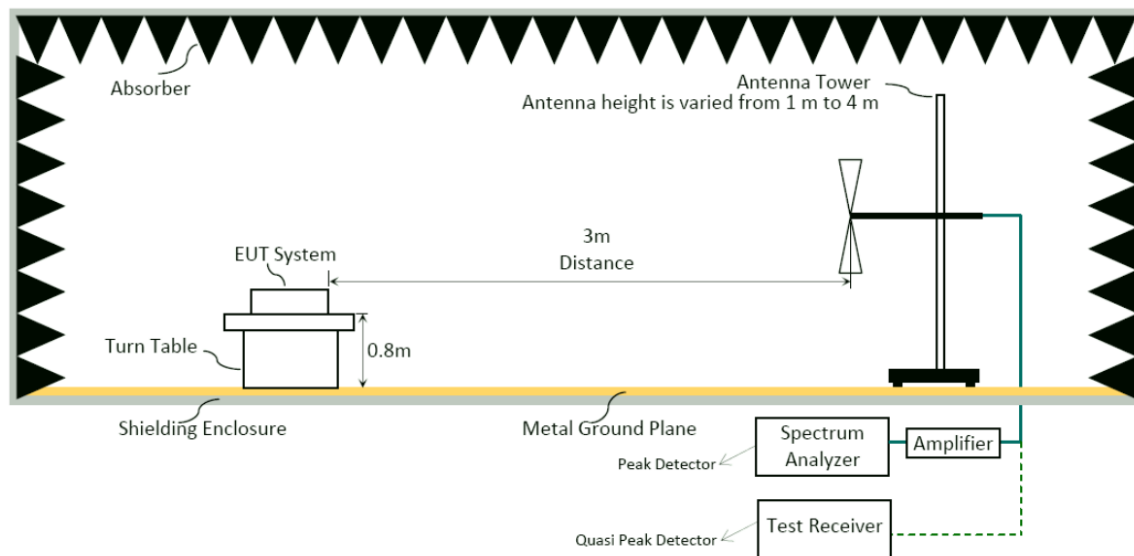

### 6.1.4. Setup Diagram for above 1GHz

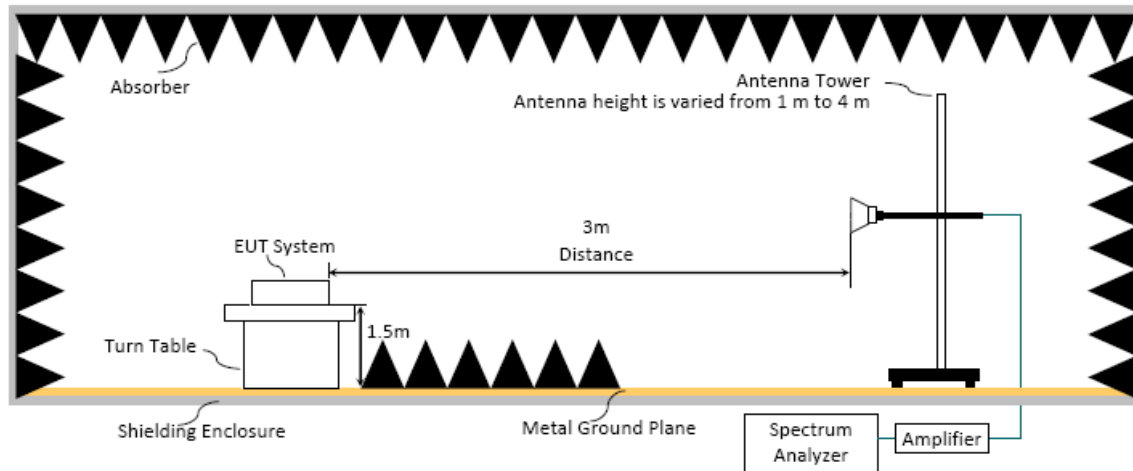

## 6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance(m)	Limits	
		dB $\mu$ V/m	$\mu$ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB $\mu$ V/m (Peak) 54.0 dB $\mu$ V/m (Average)	

Remark : (1) dB $\mu$ V/m = 20 log ( $\mu$ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

### 6.3. Test Procedure

#### Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)  
Q.P. (490kHz-30MHz)

#### Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

#### Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1)RBW = 120KHz
- (2)VBW  $\geq$  3 x RBW.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

#### Frequency above 1GHz to 10th harmonic (up to 25 GHz):

##### Peak Detector:

- (1)RBW = 1MHz
- (2)VBW  $\geq$  3 x RBW.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

**Average Detector:****■ Option 1:**

(1) RBW = 1MHz

(2) VBW  $\geq 1/T$ . (Duty Cycle < 98%, when duty cycle presented in section 3.7)

Modulation Type	VBW Setting (VBW $\geq 1/T$ )
BLE (2M)	4.7 kHz

(3) VBW = 10Hz (Duty Cycle  $\geq 98\%$ , when duty cycle presented in section 3.7)

(4) Detector = Peak.

(5) Sweep time = auto.

(6) Trace mode = max hold.

(7) Allow sweeps to continue until the trace stabilizes.

**□ Option 2:**


Average Emission Level = Peak Emission Level + D.C.C.F.

**6.4. Measurement Result Explanation****■** Peak Emission Level (dB $\mu$ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading (dB $\mu$ V).**■** Average Emission Level (dB $\mu$ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading (dB $\mu$ V).**□** Average Emission Level (dB $\mu$ V/m) = Peak Emission Level (dB $\mu$ V/m) + DCCF (dB) – Duty Cycle Correction Factor (DCCF) (dB) =  $20\log(TX_{on}/TX_{on+off})$  presented in section 3.7.**□** ERP (dBm) = Peak Emission Level (dB $\mu$ V/m) - 95.2 dB - 2.14 dB**6.5. Test Results**

Please refer to Appendix A.

## 7. DTS/OCCUPIED BANDWIDTH

### 7.1. Block Diagram of Test Setup

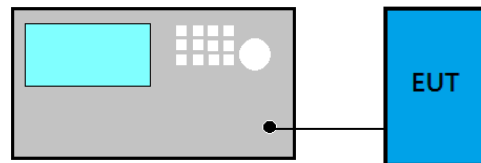

### 7.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

### 7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

#### For DTS Bandwidth

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x to -6dB power to record the final bandwidth..

#### For 99% Occupied Bandwidth


- (1) Set Span range 1.5~5 times the OBW
- (2) Set RBW close to 1% to 5% of OBW.
- (3) Set  $VBW \geq 3 \times RBW$ .
- (4) Detector = Peak.
- (5) Trace mode = Max hold
- (6) Sweep = Auto couple.
- (7) Allow the trace to stabilize.

### 7.4. Test Results

Please refer to Appendix A

## 8. MAXIMUM PEAK OUTPUT POWER

### 8.1. Block Diagram of Test Setup

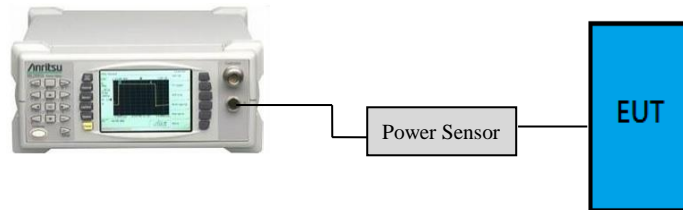

### 8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm), and E.I.R.P.: 4Watt (36dBm)

### 8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

**PKPM1 Peak power meter method:**

EUT is connected to power sensor and record the maximum output power.

**Maximum peak conducted output power method:**

- (1) Set the RBW  $\geq$  DTS bandwidth
- (2) Set VBW  $\geq 3 \times$  RBW
- (3) Set span  $\geq 3 \times$  RBW.
- (4) Sweep time = auto couple
- (5) Detector = peak.
- (6) Trace mode = max hold.
- (7) Allow trace to fully stabilize.
- (8) Use peak marker function to determine the peak amplitude level.

**Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is  $< 98\%$ .

**Method AVGSA-2 (Spectrum channel power)**


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 -5% of OBW
- (3) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is  $< 98\%$ .

### 8.4. Test Results

Please refer to Appendix A

## 9. EMISSION LIMITATIONS

### 9.1. Block Diagram of Test Setup

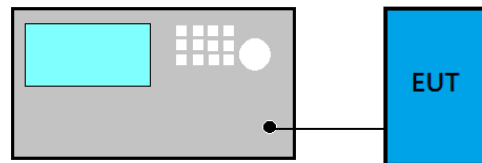

### 9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a)/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 (See Section 15.205(c)).

### 9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

#### ■ Reference Level

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW  $\geq 3 \times$  RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.



#### ■ Emission Level Measurement


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW  $\geq 3 \times$  RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

### 9.4. Test Results

Please refer to Appendix A

## 10. POWER SPECTRAL DENSITY

### 10.1. Block Diagram of Test Setup

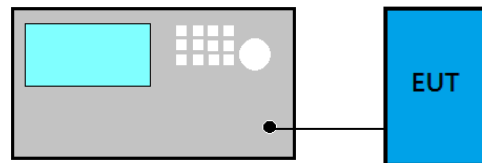

### 10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

### 10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

#### ■ Method PKPSD (peak PSD)

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- (4) Set the VBW  $\geq 3 \times \text{RBW}$ .
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### □ Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector = RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.7 < 98%.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 10.4. Test Results

Please refer to Appendix A



**Audix Technology Corp.**  
No. 491, Zhongfu Rd., Linkou Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

---

## **11.DEVIATION TO TEST SPECIFICATIONS**

**【NONE】**



*Audix Technology Corp.*  
*No. 491, Zhongfu Rd., Linkou Dist.,*  
*New Taipei City 244, Taiwan*

*Tel: +886 2 26099301*  
*Fax: +886 2 26099303*

---

# APPENDIX A

## TEST DATA AND PLOTS

(Model: GB8773)

---


---

## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>4</b>
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	9
A.2.3 Emissions in Non-restricted Frequency Bands:.....	10
<b>A.3 DTS/OCCUPIED BANDWIDTH</b> .....	<b>11</b>
A.3.1 DTS/Occupied Bandwidth Result.....	11
A.3.2 Measurement Plots .....	12
<b>A.4 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>14</b>
A.4.1 Peak Output Power .....	14
A.4.2 Average Output Power (Reporting only).....	14
<b>A.5 EMISSION LIMITATIONS</b> .....	<b>15</b>
<b>A.6 POWER SPECTRAL DENSITY</b> .....	<b>17</b>
A.6.1 Power Spectral Density Result .....	17
A.6.2 Measurement Plots .....	17

## A.1 CONDUCTED EMISSION

Test Date	2023/07/19	Temp./Hum.	25°C/48%
Test Voltage	DC 3.3V (Through jig via Notebook PC)	Tested By	Bruce Tseng

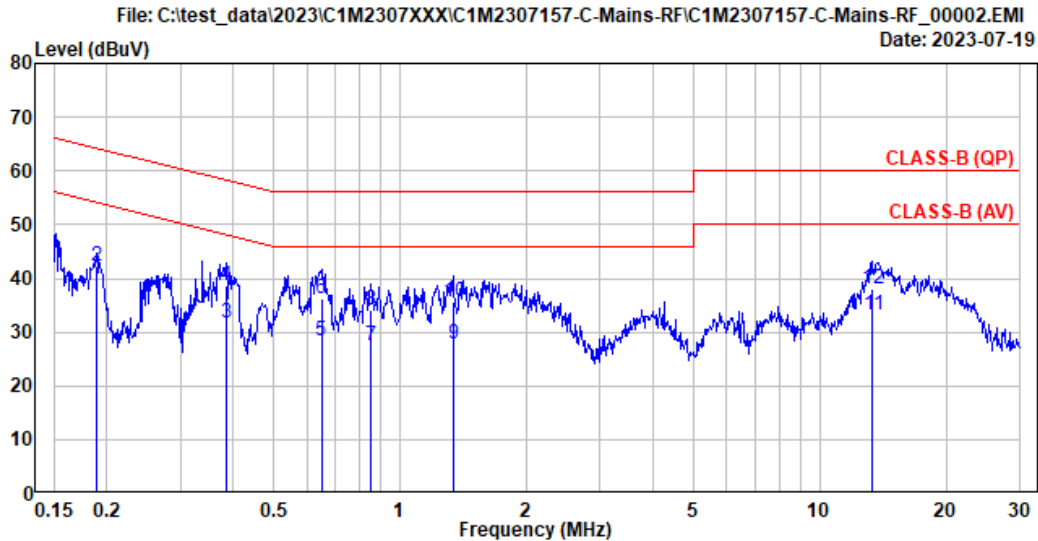


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 25°C/48%	Test Rating	: 5Vdc
EUT Model	: G88773	Engineer	: Bruce
Test Mode	: operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.189	10.29	0.03	9.85	19.70	39.87	54.10	14.23	Average
2	0.189	10.29	0.03	9.85	22.01	42.18	64.10	21.92	QP
3	0.385	10.28	0.03	9.85	11.45	31.61	48.18	16.57	Average
4	0.385	10.28	0.03	9.85	18.60	38.76	58.18	19.42	QP
5	0.649	10.29	0.04	9.85	8.34	28.52	46.00	17.48	Average
6	0.649	10.29	0.04	9.85	15.95	36.13	56.00	19.87	QP
7	0.854	10.29	0.04	9.85	7.19	27.37	46.00	18.63	Average
8	0.854	10.29	0.04	9.85	13.94	34.12	56.00	21.88	QP
9	1.338	10.30	0.05	9.85	7.43	27.63	46.00	18.37	Average
10	1.338	10.30	0.05	9.85	15.39	35.59	56.00	20.41	QP
11	13.380	10.74	0.16	9.90	12.35	33.15	50.00	16.85	Average
12	13.380	10.74	0.16	9.90	17.31	38.11	60.00	21.89	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2023/07/19	Temp./Hum.	25°C/48%
Test Voltage	DC 3.3V (Through jig via Notebook PC)	Tested By	Bruce Tseng

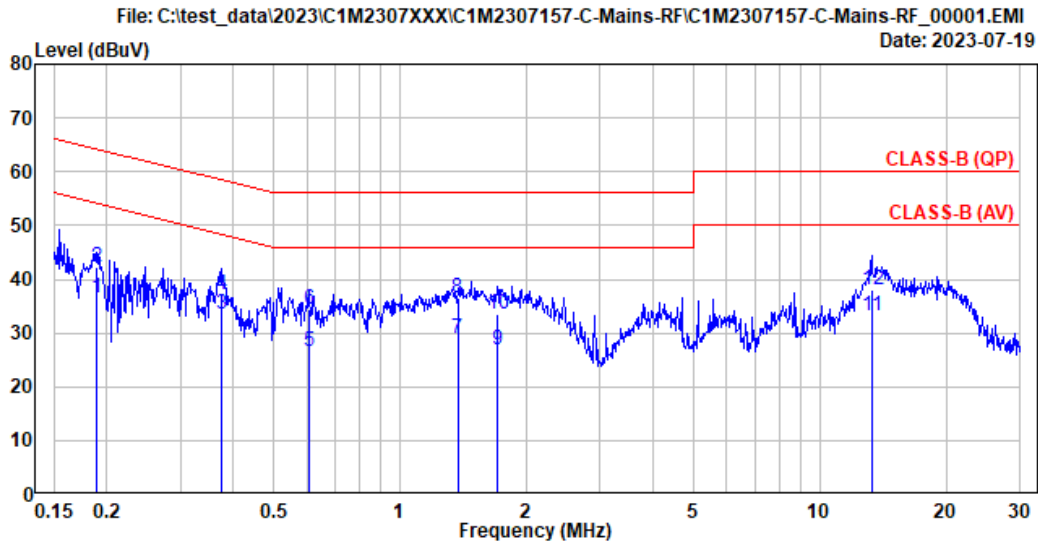

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 25°C/48%	Test Rating	: 5Vdc
EUT Model	: GB8773	Engineer	: Bruce
Test Mode	: operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.190	10.28	0.03	9.85	16.42	36.58	54.05	17.47	Average
2	0.190	10.28	0.03	9.85	22.14	42.30	64.05	21.75	QP
3	0.375	10.27	0.03	9.85	13.39	33.54	48.38	14.84	Average
4	0.375	10.27	0.03	9.85	17.02	37.17	58.38	21.21	QP
5	0.606	10.27	0.03	9.85	6.52	26.67	46.00	19.33	Average
6	0.606	10.27	0.03	9.85	14.36	34.51	56.00	21.49	QP
7	1.372	10.29	0.05	9.85	8.64	28.83	46.00	17.17	Average
8	1.372	10.29	0.05	9.85	16.33	36.52	56.00	19.48	QP
9	1.708	10.30	0.05	9.86	6.77	26.98	46.00	19.02	Average
10	1.708	10.30	0.05	9.86	13.26	33.47	56.00	22.53	QP
11	13.313	10.57	0.16	9.90	12.45	33.08	50.00	16.92	Average
12	13.313	10.57	0.16	9.90	17.41	38.04	60.00	21.96	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

## A.2 RADIATED EMISSION

Test Date	2023/07/24	Temp./Hum.	24°C/43%
Test Voltage	DC 3.3V (Through jig via Notebook PC)	Tested By	Hua Wu

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.716	22.73	1.48	26.48	31.22	28.94	40.00	11.06	Peak
117.882	17.92	2.83	26.17	32.24	26.82	43.50	16.68	Peak
167.934	16.00	3.39	25.92	38.84	32.32	43.50	11.18	Peak
226.910	17.13	4.02	25.73	45.29	40.71	46.00	5.29	Peak
378.036	21.16	5.69	26.28	36.41	36.98	46.00	9.02	Peak
431.968	22.26	6.22	26.68	38.00	39.79	46.00	6.21	Peak

#### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.776	23.66	1.43	26.49	30.80	29.40	40.00	10.60	Peak
141.162	17.11	3.10	26.04	32.95	27.12	43.50	16.38	Peak
279.484	18.59	4.52	25.64	33.97	31.44	46.00	14.56	Peak
378.036	21.04	5.69	26.28	34.77	35.22	46.00	10.78	Peak
431.968	22.10	6.22	26.68	36.34	37.98	46.00	8.02	Peak
540.026	23.63	6.90	27.24	34.35	37.64	46.00	8.36	Peak



A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics


**Band Edge:**

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

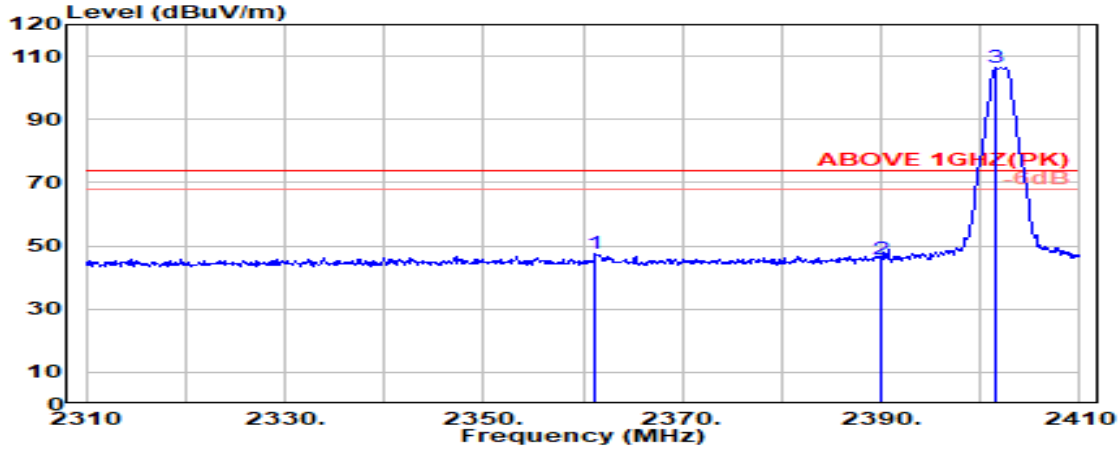

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2361.300	28.28	5.68	39.93	53.58	47.60	74.00	26.40	Peak
2390.000	28.22	5.72	39.93	51.85	45.87	74.00	28.13	Peak
@ 2401.600	28.20	5.74	39.93	112.39	106.40	---	---	Peak

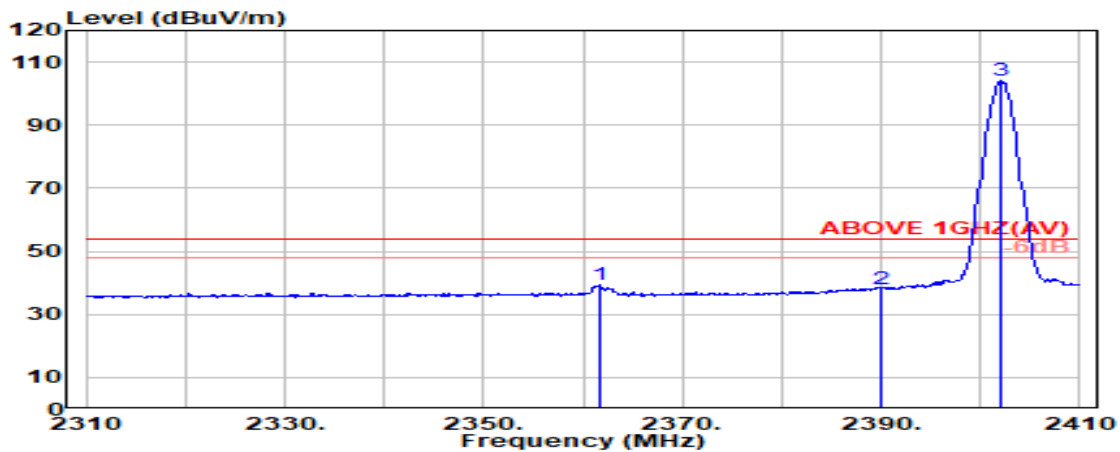


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2361.700	28.28	5.68	39.93	45.28	39.30	54.00	14.70	Average
2390.000	28.22	5.72	39.93	44.16	38.17	54.00	15.83	Average
@ 2402.100	28.20	5.74	39.93	109.98	104.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

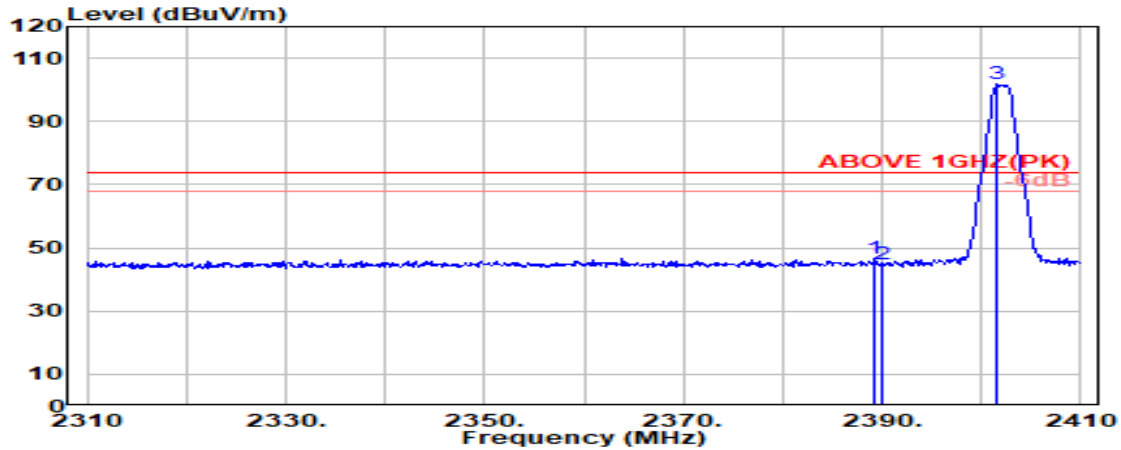

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.22	5.72	39.93	52.50	46.51	74.00	27.49	Peak
2390.000	28.22	5.72	39.93	50.86	44.87	74.00	29.13	Peak
@ 2401.500	28.20	5.74	39.93	107.65	101.67	---	---	Peak

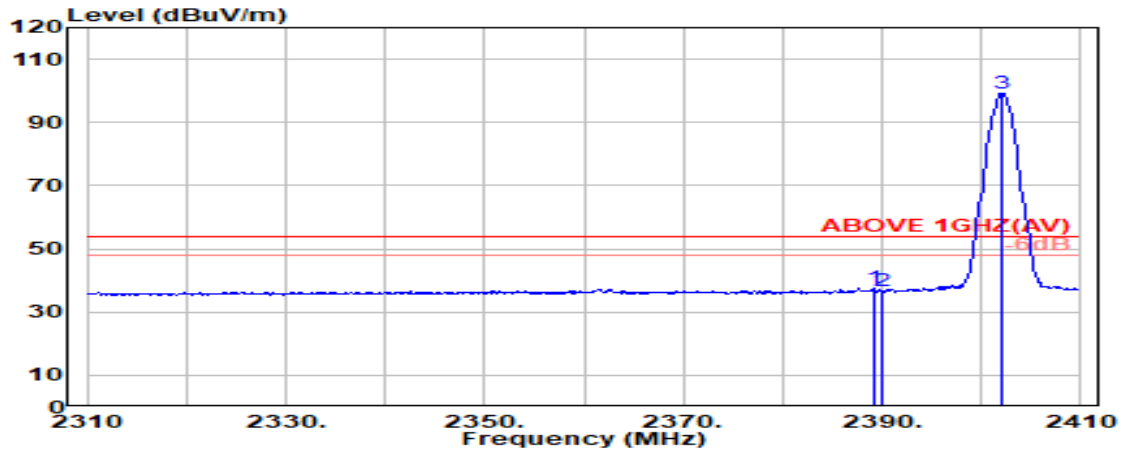


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.22	5.72	39.93	43.39	37.40	54.00	16.60	Average
2390.000	28.22	5.72	39.93	42.70	36.71	54.00	17.29	Average
@ 2402.100	28.20	5.74	39.93	105.34	99.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

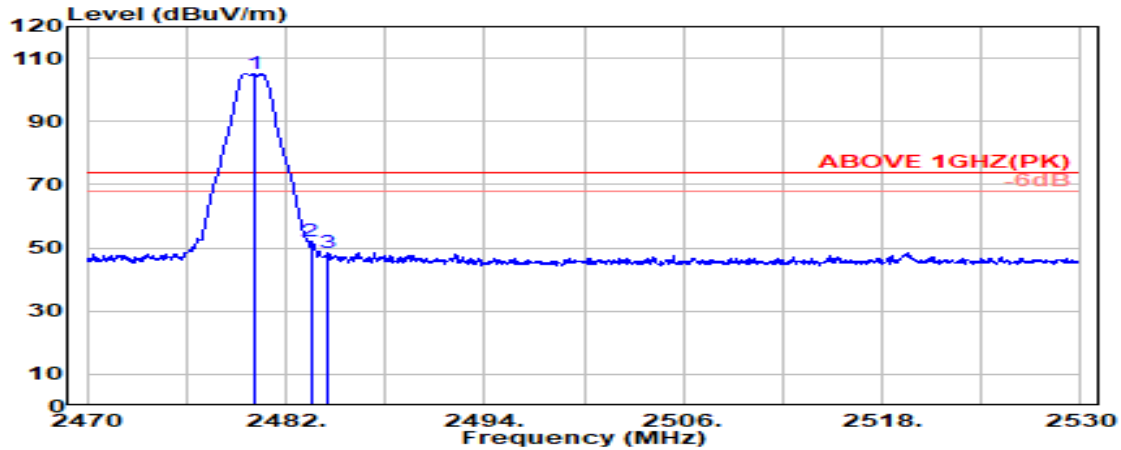

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.86	39.92	110.90	105.20	---	---	Peak
2483.500	28.37	5.87	39.92	57.96	52.27	74.00	21.73	Peak
2484.550	28.37	5.87	39.92	54.36	48.68	74.00	25.32	Peak

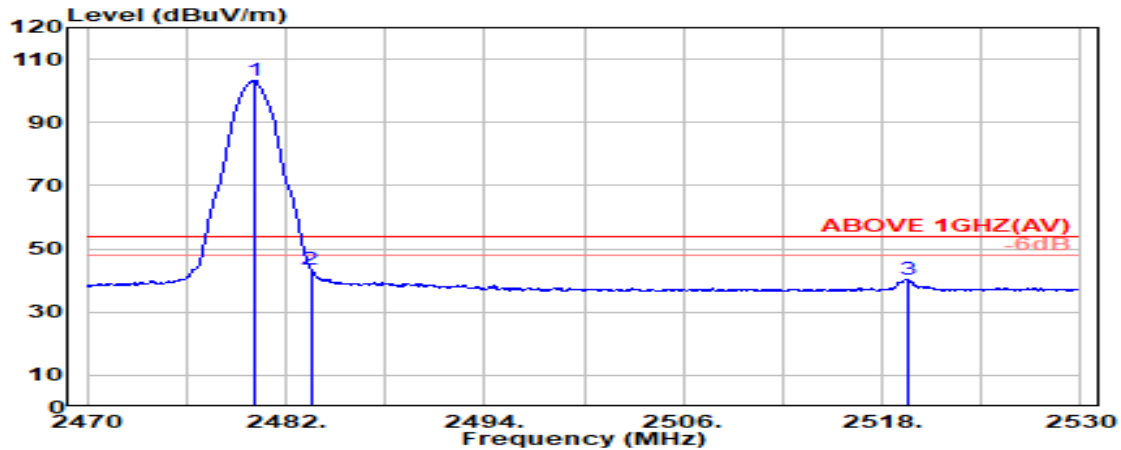


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.36	5.86	39.92	109.01	103.31	---	---	Average
2483.500	28.37	5.87	39.92	49.36	43.67	54.00	10.33	Average
2519.500	28.52	5.94	39.93	45.98	40.51	54.00	13.49	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

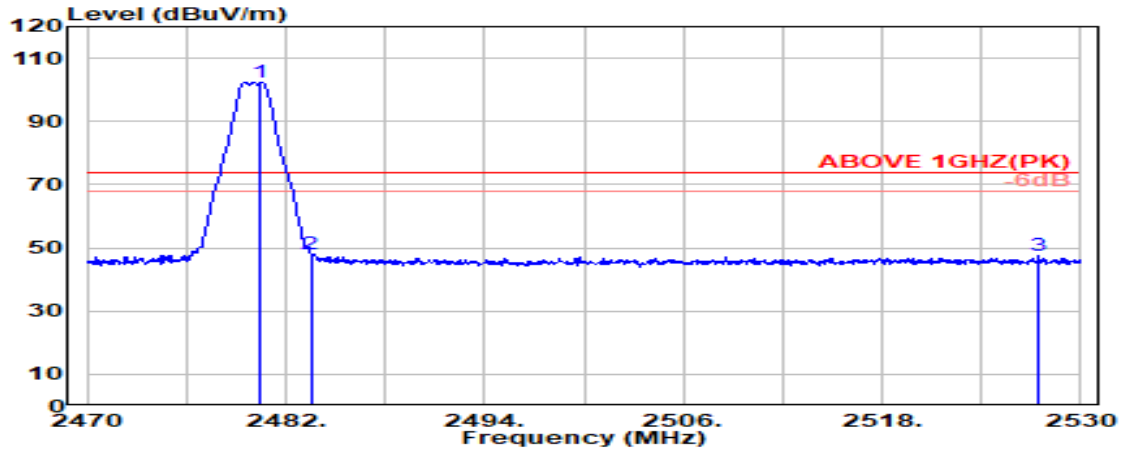

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.36	5.86	39.92	108.12	102.42	---	---	Peak
2483.500	28.37	5.87	39.92	53.89	48.20	74.00	25.80	Peak
2527.450	28.57	5.96	39.93	52.76	47.35	74.00	26.65	Peak

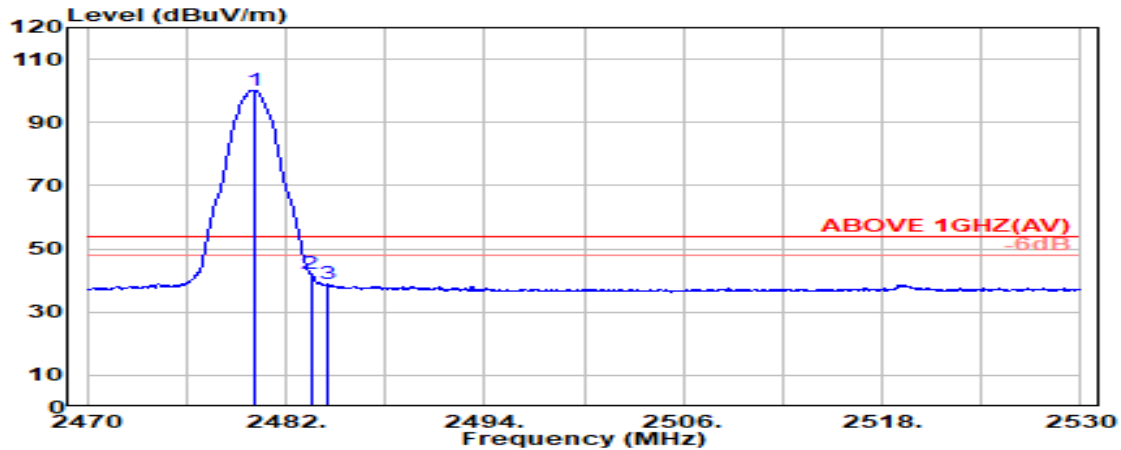

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.86	39.92	106.00	100.30	---	---	Average
2483.500	28.37	5.87	39.92	47.62	41.93	54.00	12.07	Average
2484.550	28.37	5.87	39.92	44.45	38.77	54.00	15.23	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

### A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4804.000	32.92	8.53	39.39	41.75	43.81	54.00	10.19	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4804.000	32.92	8.53	39.39	40.49	42.55	54.00	11.45	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4880.000	33.32	8.63	39.35	41.15	43.75	54.00	10.25	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4880.000	33.32	8.63	39.35	41.02	43.62	54.00	10.38	Peak

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4960.000	33.32	8.75	39.32	42.53	45.28	54.00	8.72	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4960.000	33.32	8.75	39.32	42.18	44.92	54.00	9.08	Peak

### A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

### A.3 DTS/OCCUPIED BANDWIDTH


Test Date	2023/07/18	Temp./Hum.	26°C/54%
Cable Loss	0.50dB	Tested By	Hua Wu
Test Voltage	DC 3.3V (Through jig via Notebook PC)		

#### A.3.1 DTS/Occupied Bandwidth Result

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
BLE (1M)	2402	0.6651	1.0450	>500kHz
	2440	0.6766	1.0409	
	2480	0.6608	1.0548	
BLE (2M)	2402	0.9841	2.0909	
	2440	0.9751	2.0915	
	2480	1.1650	2.0841	


A.3.2 Measurement Plots

- DTS (6dB) Bandwidth

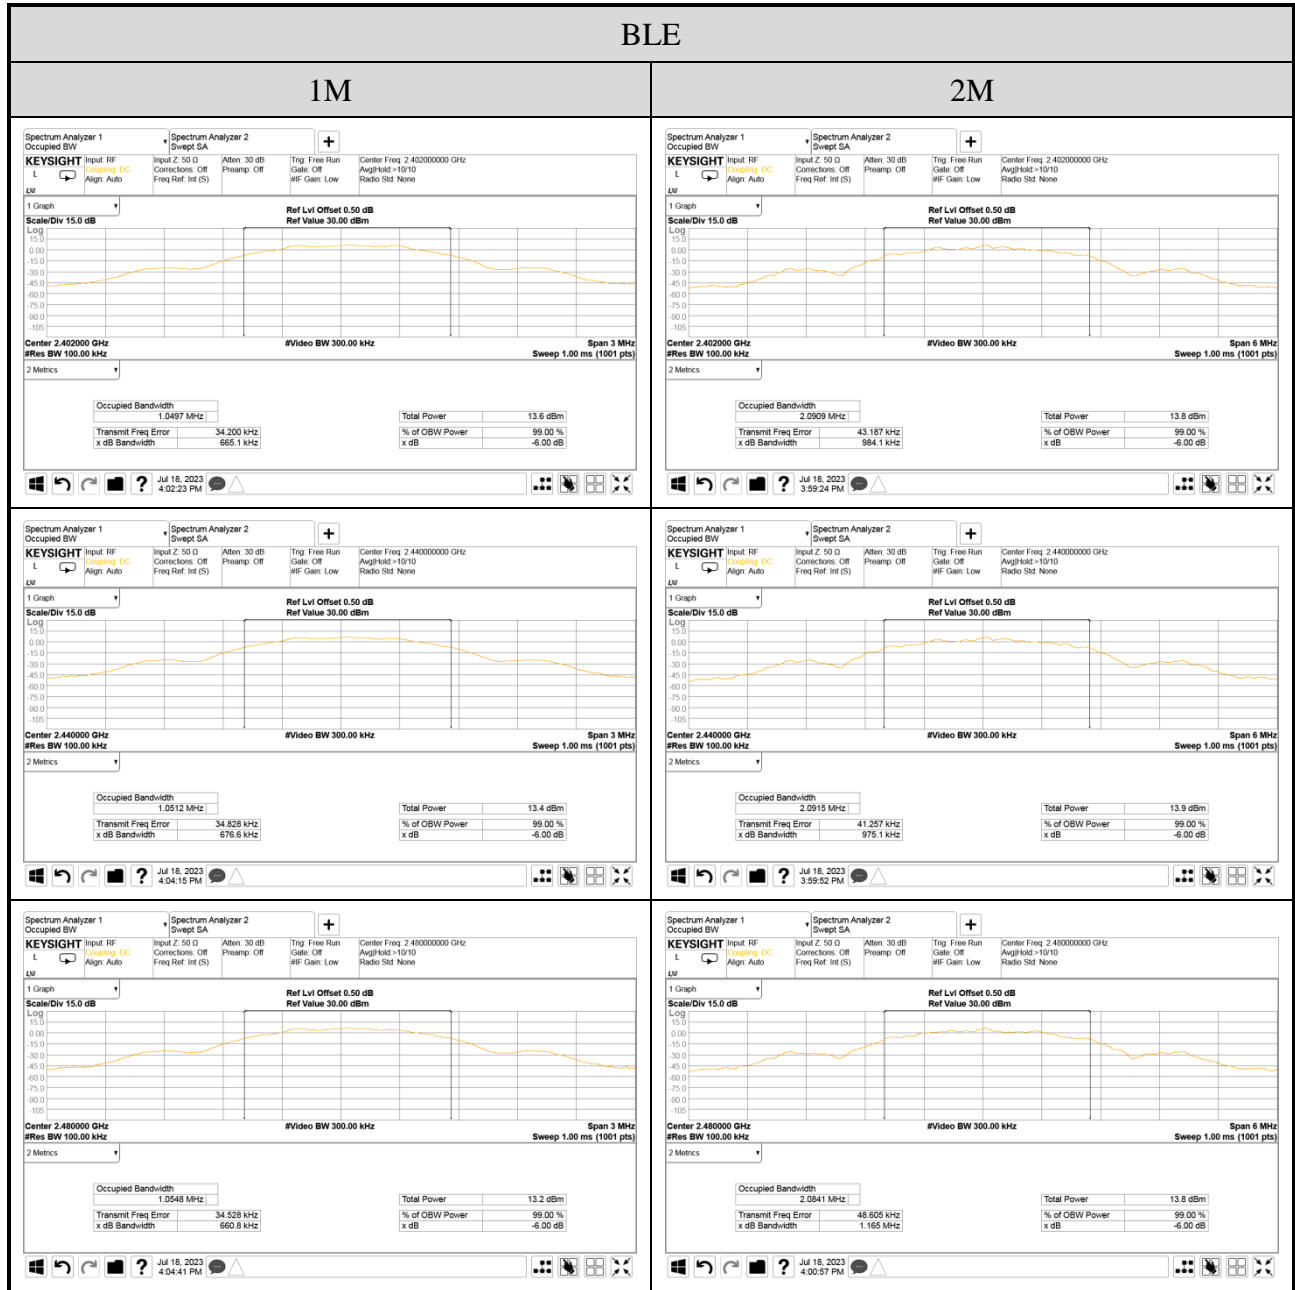



● Occupied (99%) Bandwidth

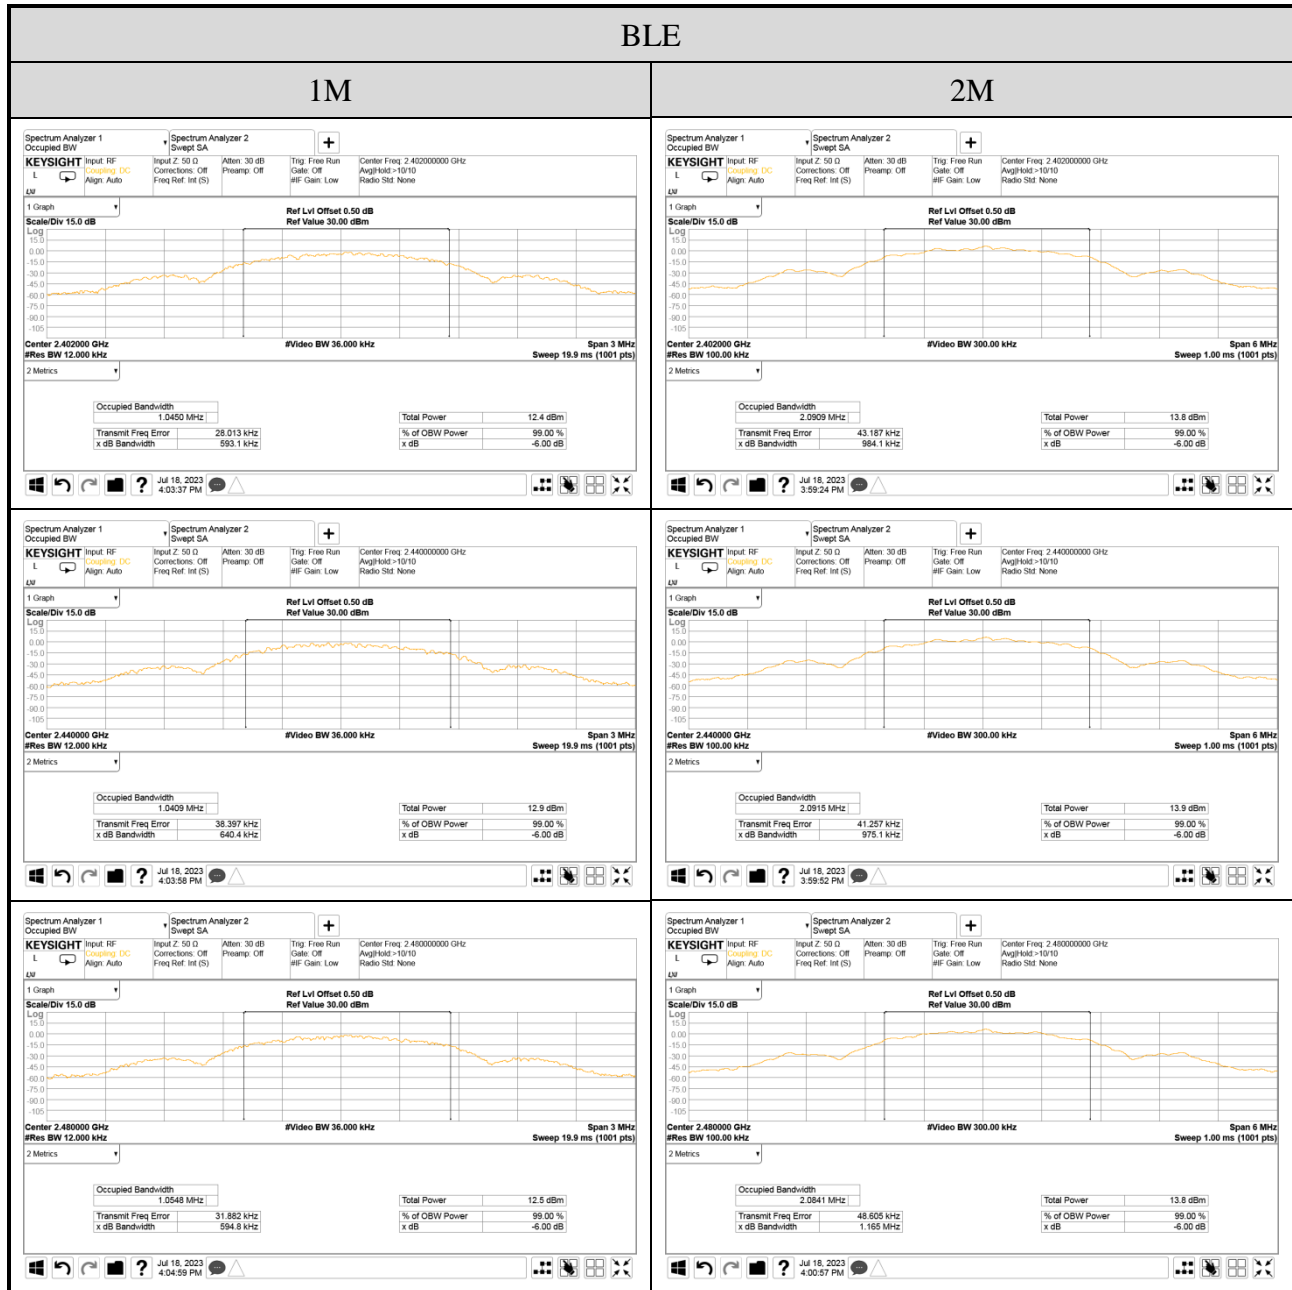

## A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2023/07/18	Temp./Hum.	26°C/54%
Cable Loss	0.50dB	Tested By	Hua Wu
Test Voltage	DC 3.3V (Through jig via Notebook PC)		

### A.4.1 Peak Output Power

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)	Antenna Gain (dBi)	E.I.R.P (dBm) Note 2	Limit
BLE (1M)	2402	7.63	3.10	10.73	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	7.61	3.10	10.71	
	2480	7.58	3.10	10.68	
BLE (2M)	2402	7.65	3.10	10.75	
	2440	7.61	3.10	10.71	
	2480	7.53	3.10	10.63	

- Note: 1. The results have been included cable loss.  
 2. E.I.R.P.= The Peak Output Power (dBm)+ Antenna Gain (dBi).


### A.4.2 Average Output Power (Reporting only)


Mode	Centre Frequency (MHz)	Average Output Power (dBm)	Duty cycle factor (dB) 10log (1/x)	Max. Average Output Power (dBm) Note 3	Antenna Gain (dBi)	E.I.R.P (dBm) Note 2	Limit
BLE (1M)	2402	5.33	2.007	7.34	3.10	10.44	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	5.32	2.007	7.33	3.10	10.43	
	2480	5.27	2.007	7.28	3.10	10.38	
BLE (2M)	2402	2.51	4.584	7.09	3.10	10.19	
	2440	2.53	4.584	7.11	3.10	10.21	
	2480	2.46	4.584	7.04	3.10	10.14	

- Note: 1. The results have been included cable loss.  
 2. E.I.R.P.= The Max. average Output Power (dBm)+ Antenna Gain (dBi).  
 3. Max Average Output Power (dBm) = Average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

## A.5 EMISSION LIMITATIONS

Test Date	2023/07/18	Temp./Hum.	26°C/54%
Cable Loss	0.50dB	Tested By	Hua Wu
Test Voltage	DC 3.3V (Through jig via Notebook PC)		

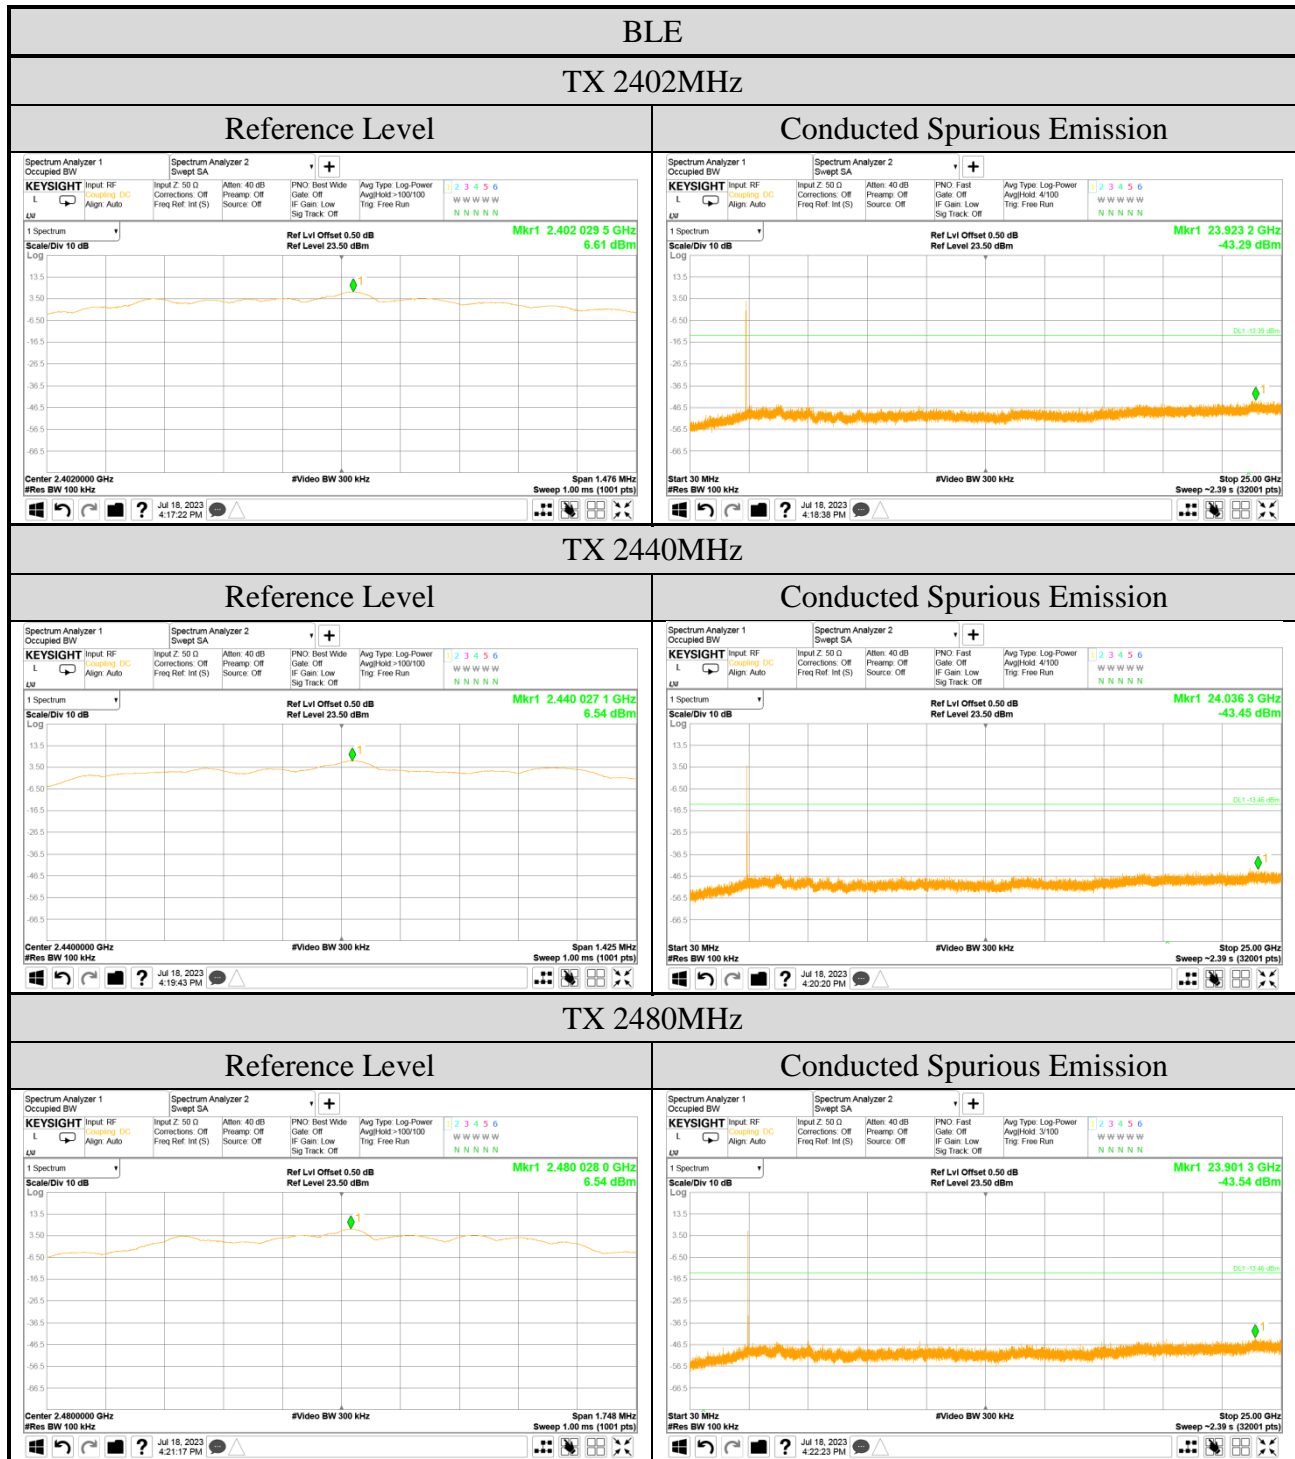

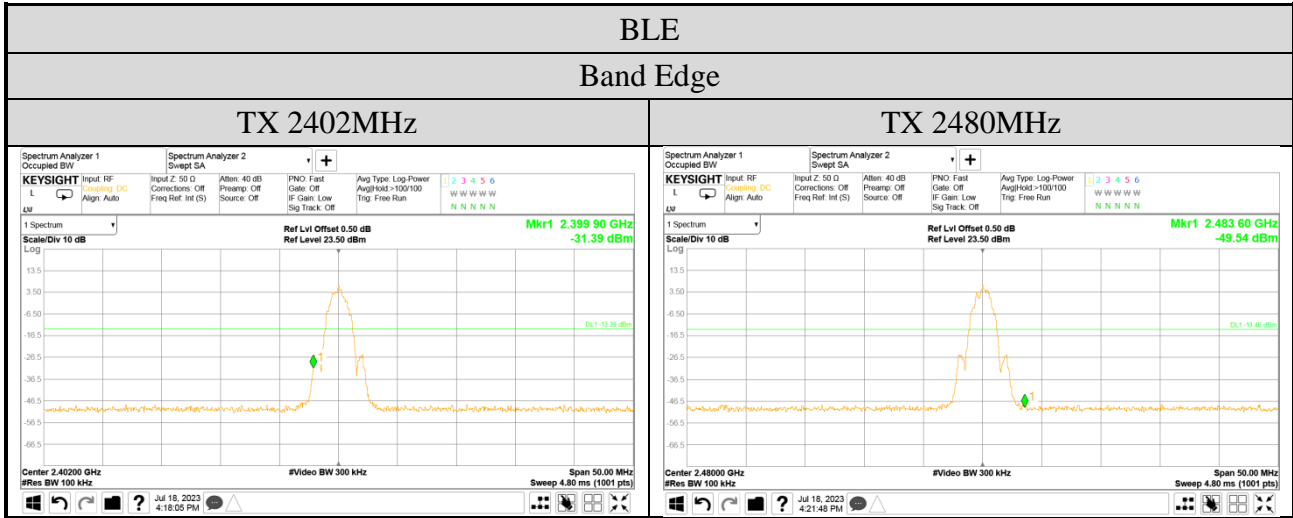

## A.6 POWER SPECTRAL DENSITY


Test Date	2023/07/18	Temp./Hum.	26°C/54%
Cable Loss	0.50dB	Tested By	Hua Wu
Test Voltage	DC 3.3V (Through jig via Notebook PC)		

### A.6.1 Power Spectral Density Result

Mode	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
BLE	2402	6.61	<8 dBm/3kHz
	2440	6.54	
	2480	6.54	

Note: 1. All results have been included cable loss and Simultaneous Factor.  
 2. For KDB558074 D01V04, in the test result, when RBW set at 100kHz is stricter than 3kHz.

### A.6.2 Measurement Plots

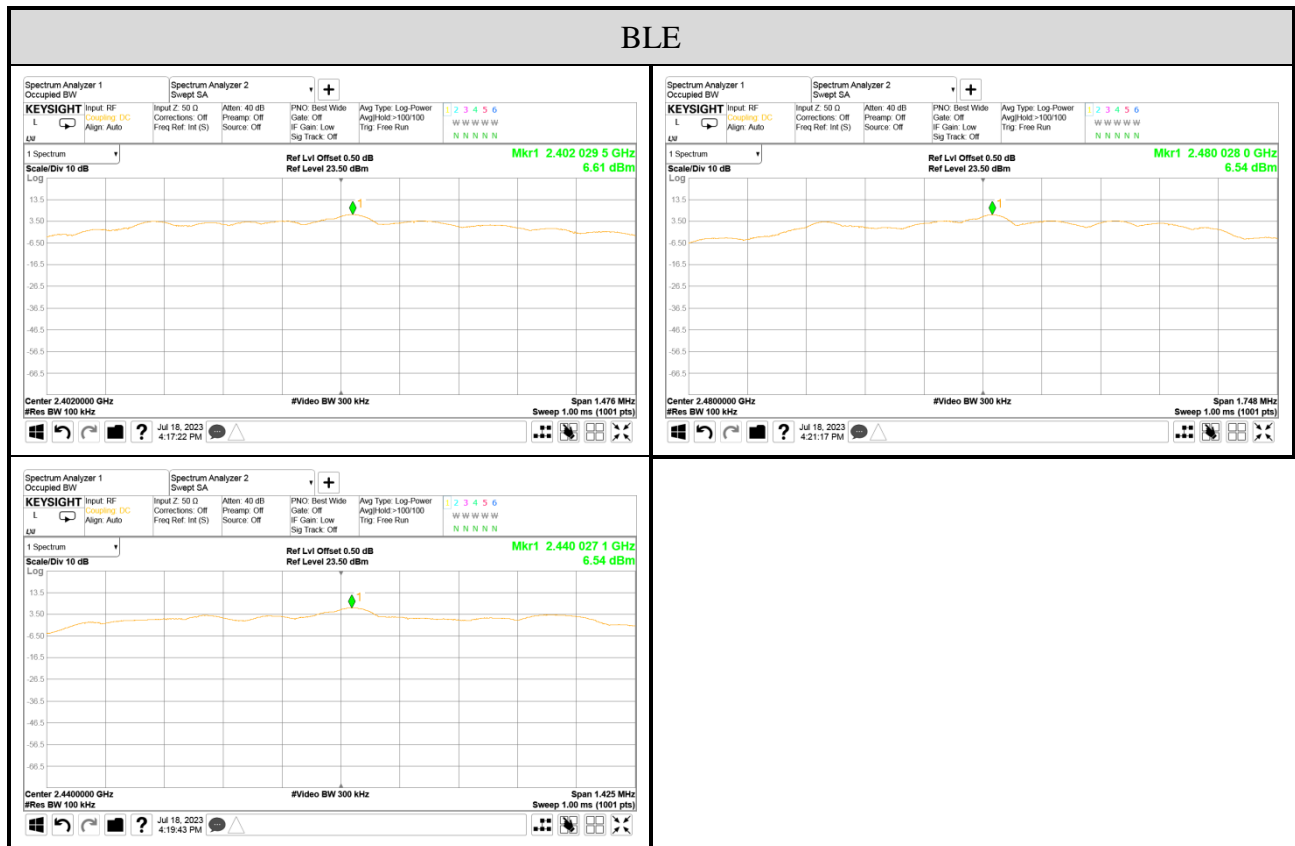

Note: All results have been included cable loss.



*Audix Technology Corp.*  
*No. 491, Zhongfu Rd., Linkou Dist.,*  
*New Taipei City 244, Taiwan*

*Tel: +886 2 26099301*  
*Fax: +886 2 26099303*

---

# APPENDIX B

## TEST PHOTOGRAPHS

(Model: GB8773)