

Report Number: F690501/RF-RTL012949 Page: 86 of 190

# Middle channel 3rd harmonic (Peak)



# Middle channel 3rd harmonic (Average)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL012949 Page: 87 of 190

# High channel 2<sup>nd</sup> harmonic (Peak)



# High channel 2<sup>nd</sup> harmonic (Average)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL012949 Page: 88 of 190

# High channel 3rd harmonic (Peak)



# High channel 3rd harmonic (Average)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL012949 Page: 89 of 190

### OFDM: 802.11n\_HT40 (MCS0)

Low channel 2<sup>nd</sup> harmonic (Peak)



Low channel 2<sup>nd</sup> harmonic (Average)




The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL012949 Page: 90 of 190

# Low channel 3<sup>rd</sup> harmonic (Peak)

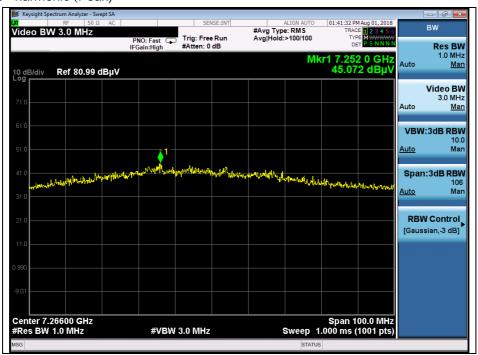

# Low channel 3<sup>rd</sup> harmonic (Average)




The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 91 of 190

# Middle channel 3rd harmonic (Peak)

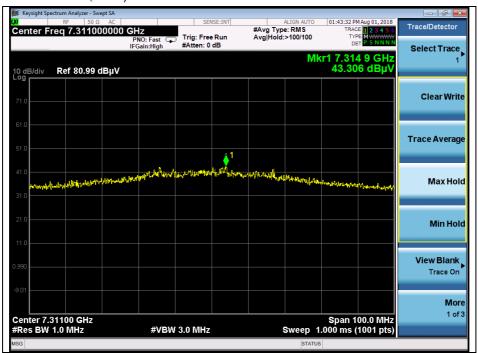

# Middle channel 3rd harmonic (Average)

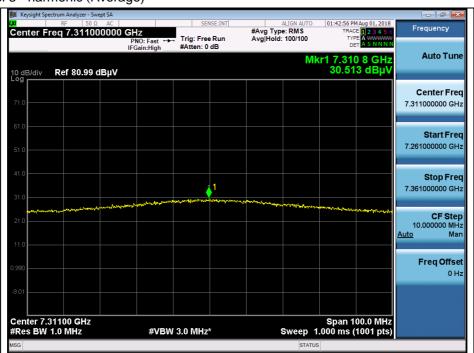


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 92 of 190

# High channel 3rd harmonic (Peak)

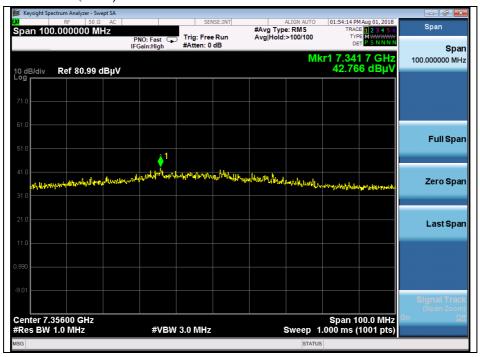

# High channel 3rd harmonic (Average)

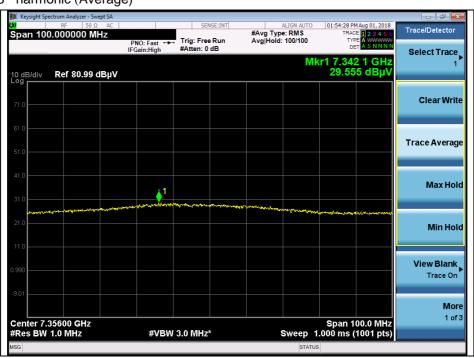

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 93 of 190

# 2.4.4. Plot of Conducted Spurious Emissions

**Test Condition: DC 5 V** 

**DSSS: 802.11b (1 Mbps)** 


Low Channel

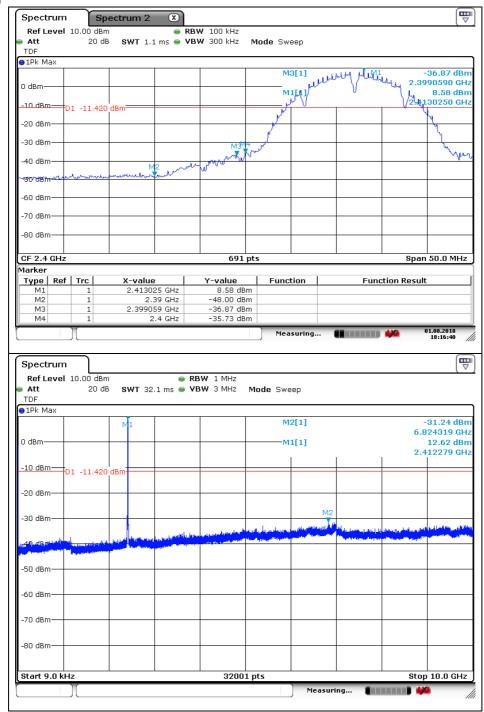

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 94 of 190

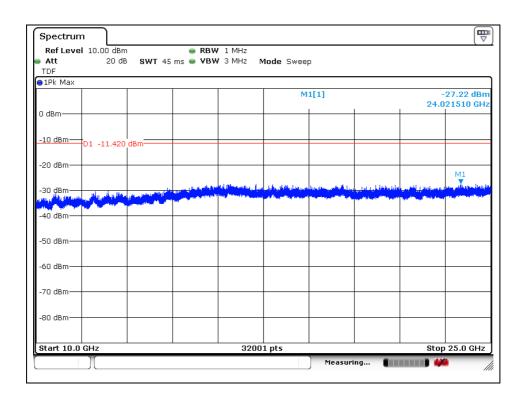




Report Number: F690501/RF-RTL012949 Page: 95 of 190

#### Middle Channel

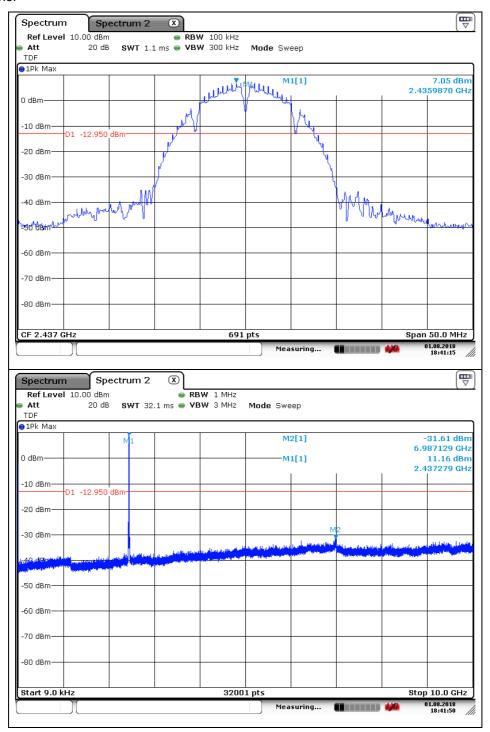




Report Number: F690501/RF-RTL012949 Page: of 190 96

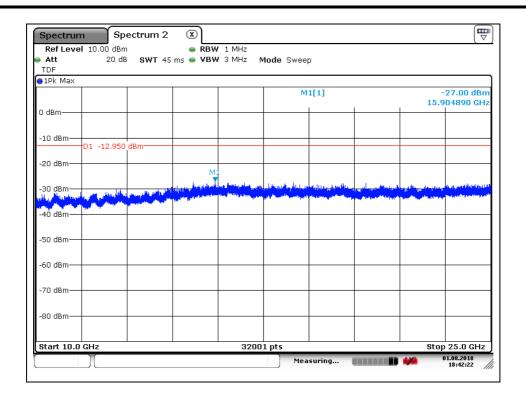




Report Number: F690501/RF-RTL012949 Page: 97 of 190

### High Channel

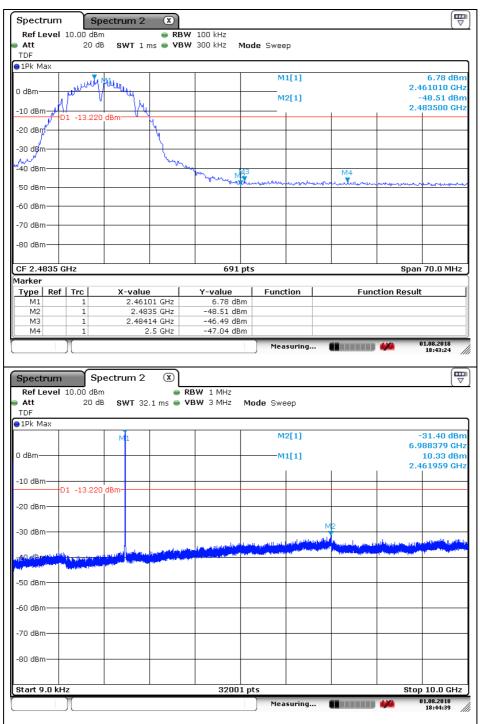



Report Number: F690501/RF-RTL012949 Page: of 190 98

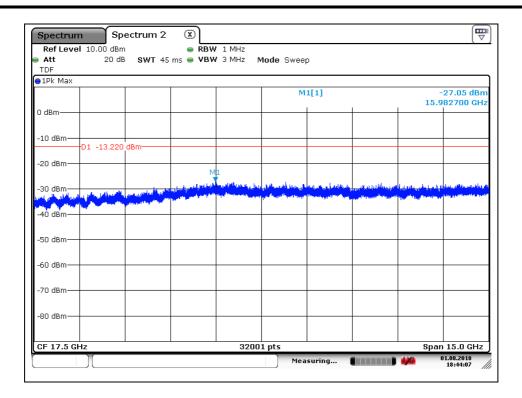




Report Number: F690501/RF-RTL012949 Page: 99 of 190


# OFDM: 802.11g (6 Mbps)

#### Low Channel

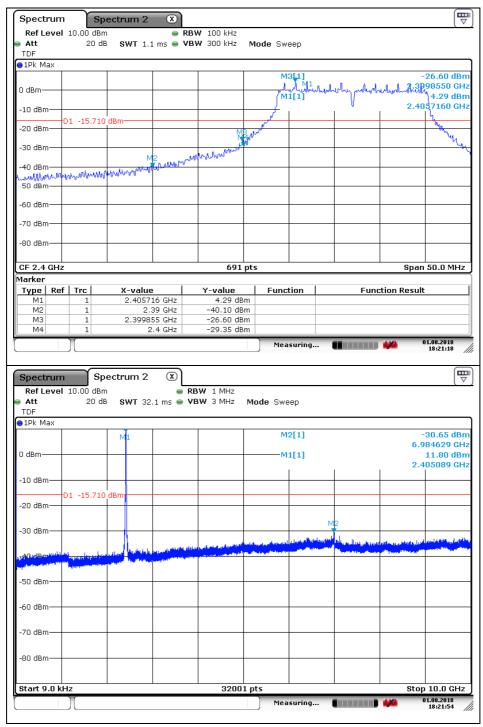




Report Number: F690501/RF-RTL012949 Page: 100 of 190

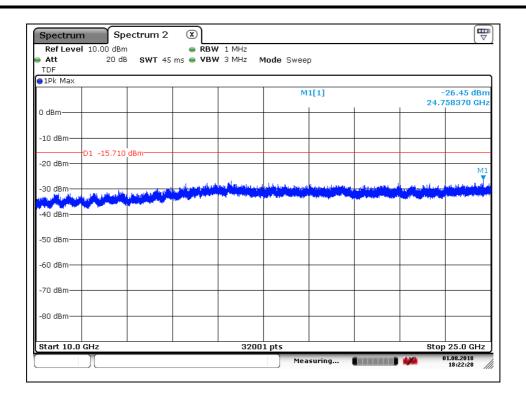




Report Number: F690501/RF-RTL012949 Page: 101 of 190

#### Middle Channel

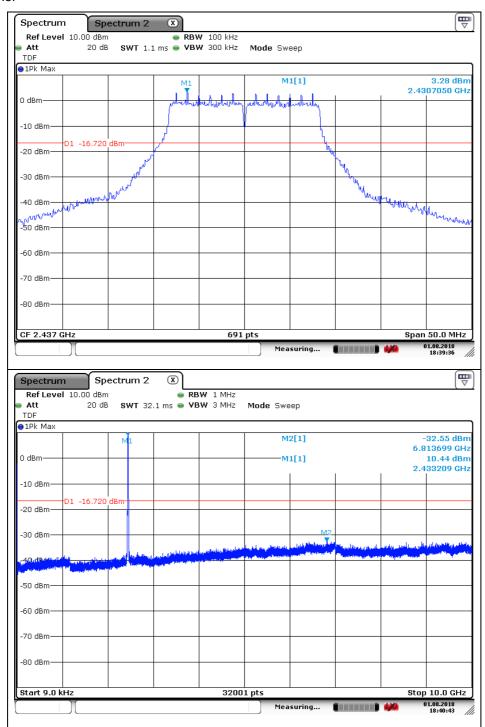




Report Number: F690501/RF-RTL012949 Page: 102 of 190

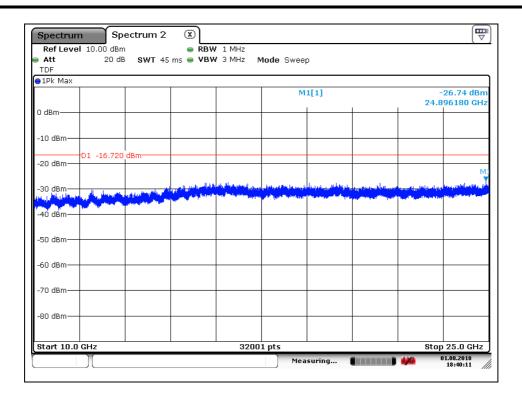




Report Number: F690501/RF-RTL012949 Page: 103 of 190

### High Channel

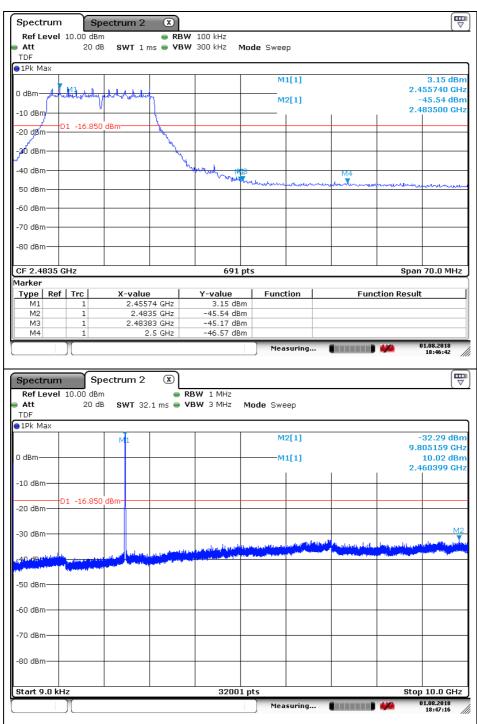



Report Number: F690501/RF-RTL012949 Page: 104 of 190

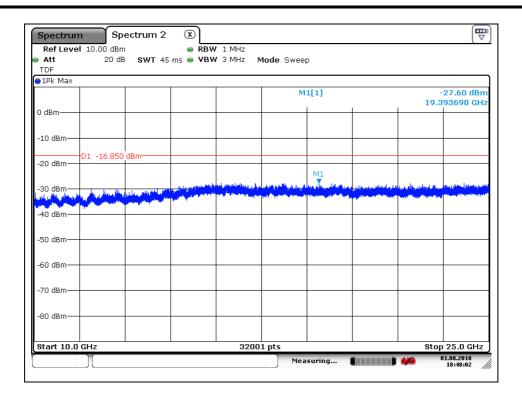




Report Number: F690501/RF-RTL012949 Page: 105 of 190


# OFDM: 802.11n\_HT20 (MCS0)

#### Low Channel

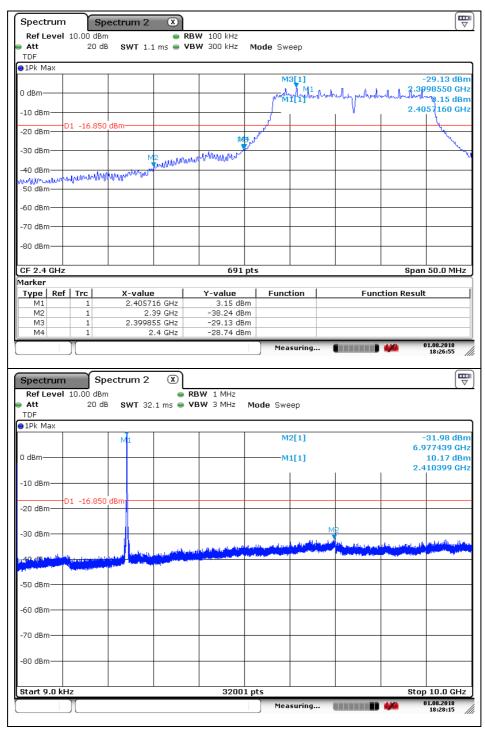




Report Number: F690501/RF-RTL012949 Page: 106 of 190

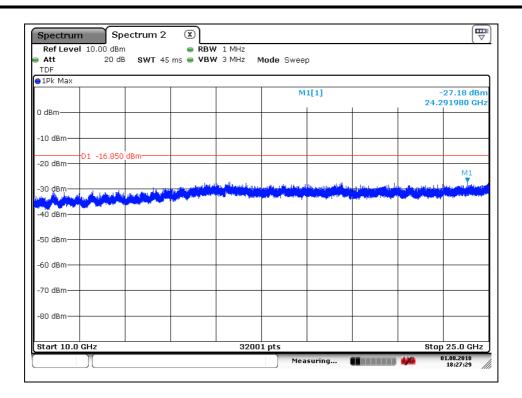




Report Number: F690501/RF-RTL012949 Page: 107 of 190

#### Middle Channel

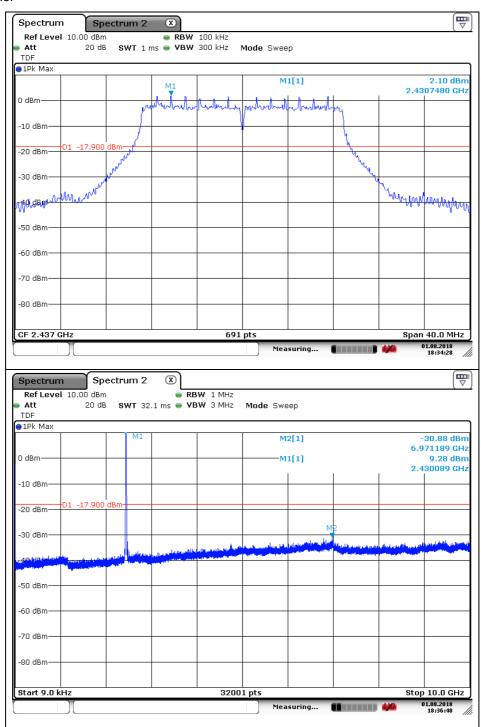




Report Number: F690501/RF-RTL012949 Page: 108 of 190

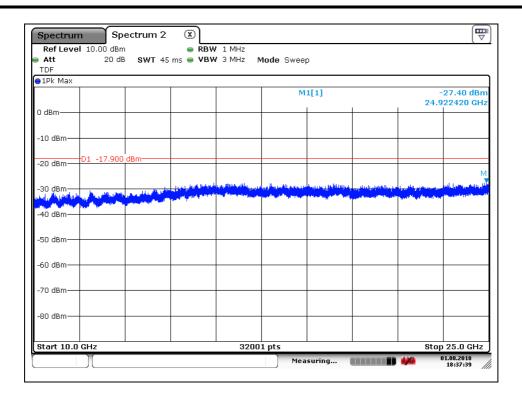




Report Number: F690501/RF-RTL012949 Page: 109 of 190

### High Channel

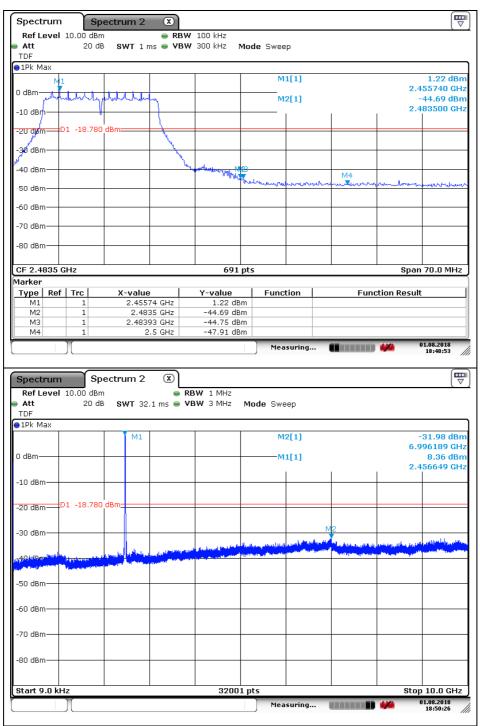



Report Number: F690501/RF-RTL012949 Page: 110 of 190

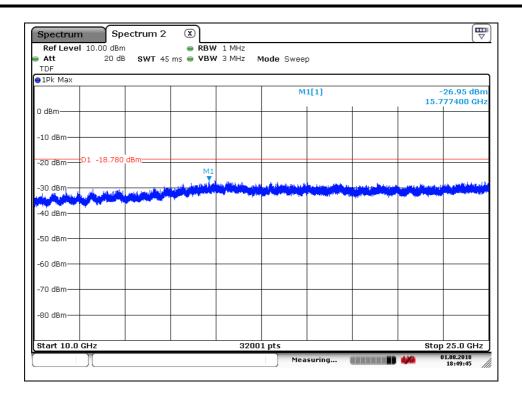




Report Number: F690501/RF-RTL012949 Page: 111 of 190

# OFDM: 802.11n\_HT40 (MCS0)


#### Low Channel

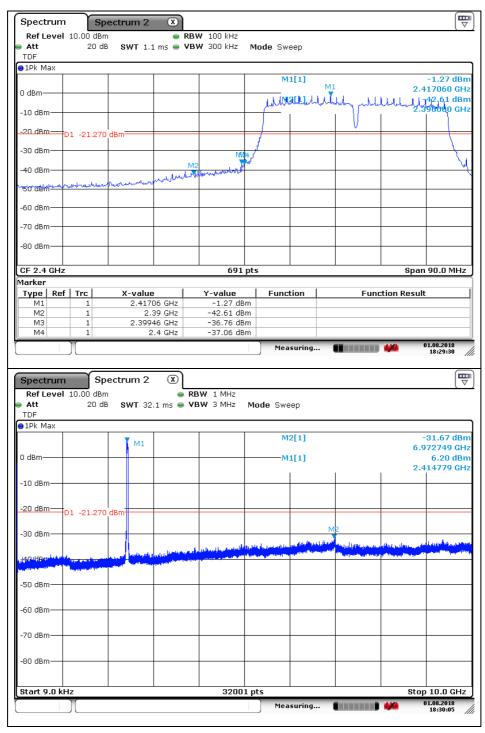

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 112 of 190

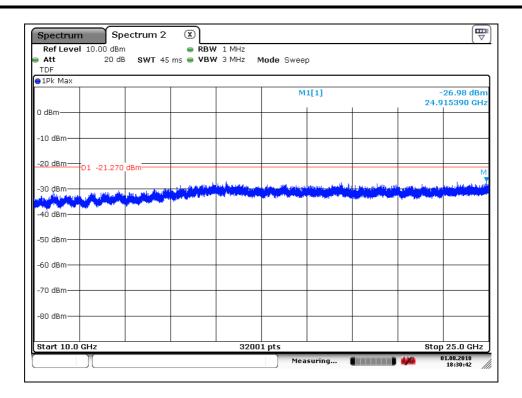




Report Number: F690501/RF-RTL012949 Page: 113 of 190

#### Middle Channel

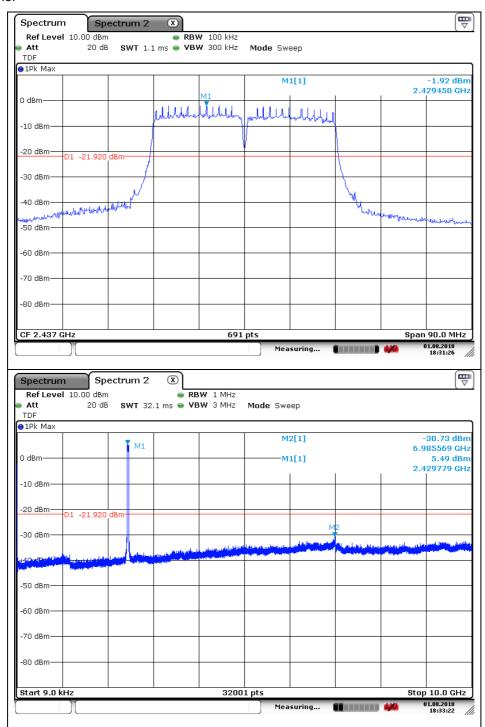




Report Number: F690501/RF-RTL012949 Page: 114 of 190

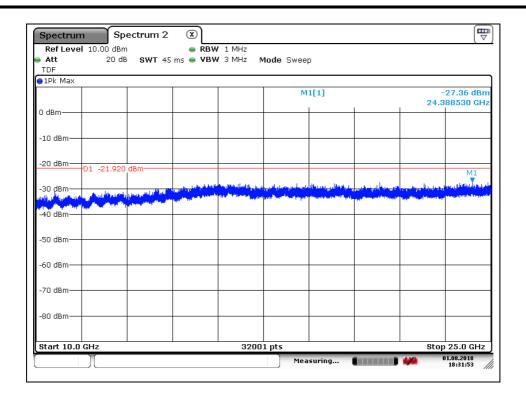




Report Number: F690501/RF-RTL012949 Page: 115 of 190

### High Channel

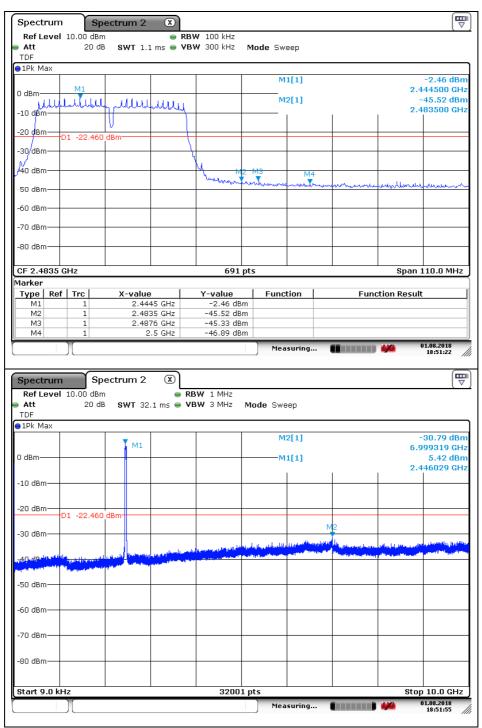



Report Number: F690501/RF-RTL012949 Page: 116 of 190

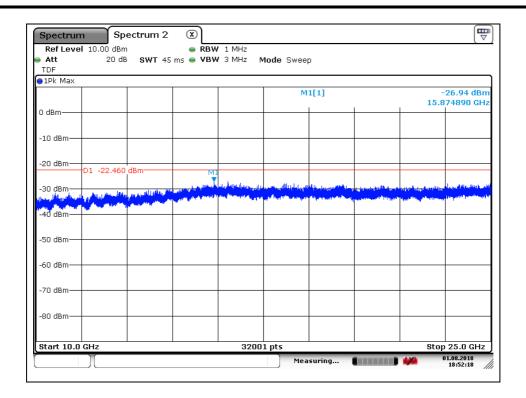




Report Number: F690501/RF-RTL012949 Page: 117 of 190

Test Condition: DC 12 V

**DSSS: 802.11b (1 Mbps)** 


Low Channel

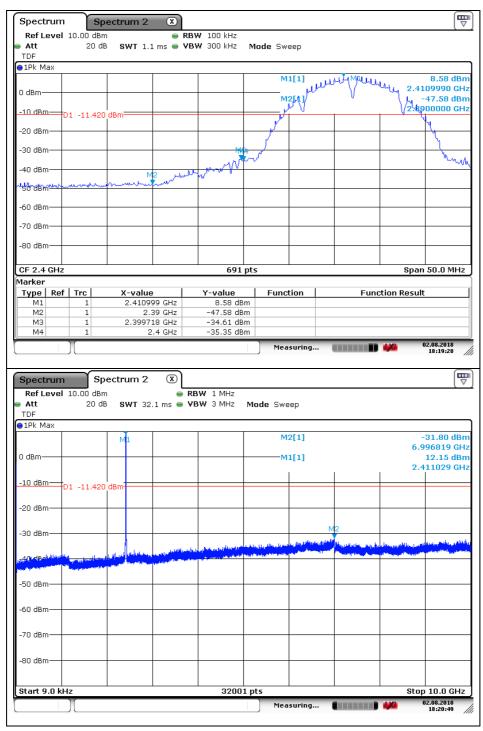

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 118 of 190

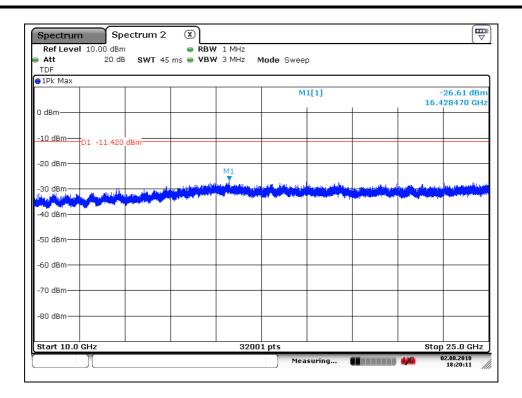




Report Number: F690501/RF-RTL012949 Page: 119 of 190

#### Middle Channel

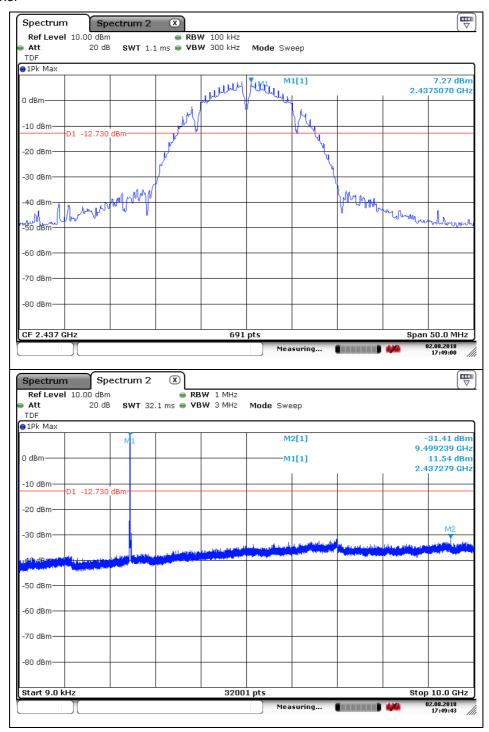




Report Number: F690501/RF-RTL012949 Page: 120 of 190

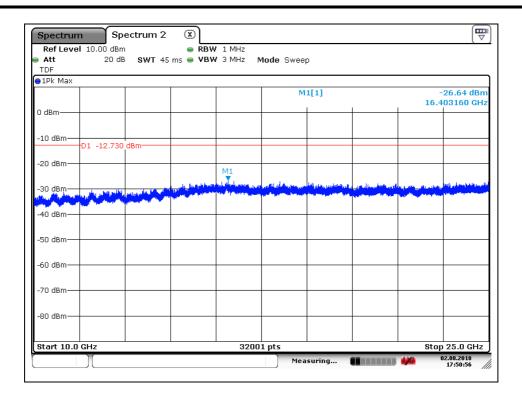




Report Number: F690501/RF-RTL012949 Page: 121 of 190

### High Channel

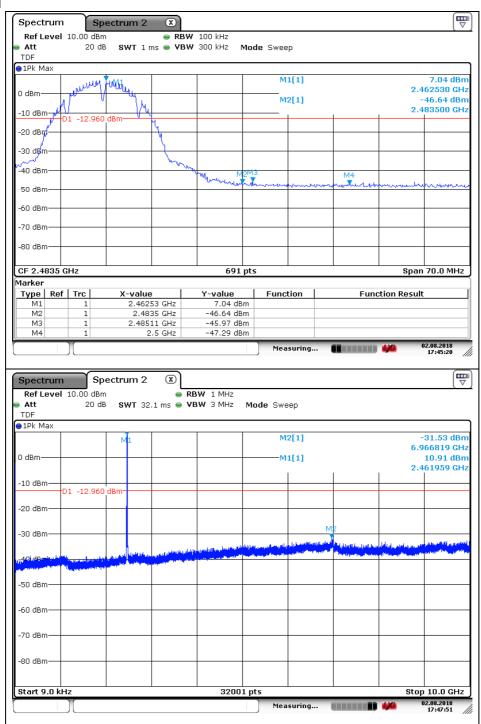



Report Number: F690501/RF-RTL012949 Page: 122 of 190

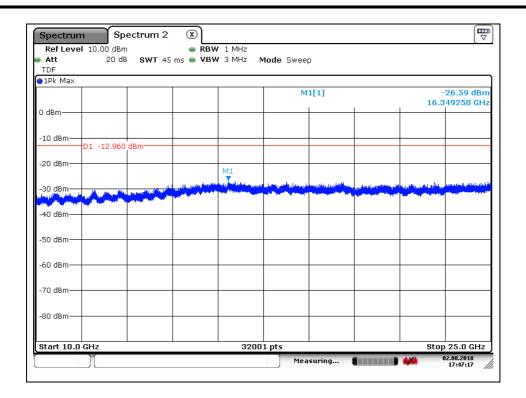




Report Number: F690501/RF-RTL012949 Page: 123 of 190


# OFDM: 802.11g (6 Mbps)

### Low Channel

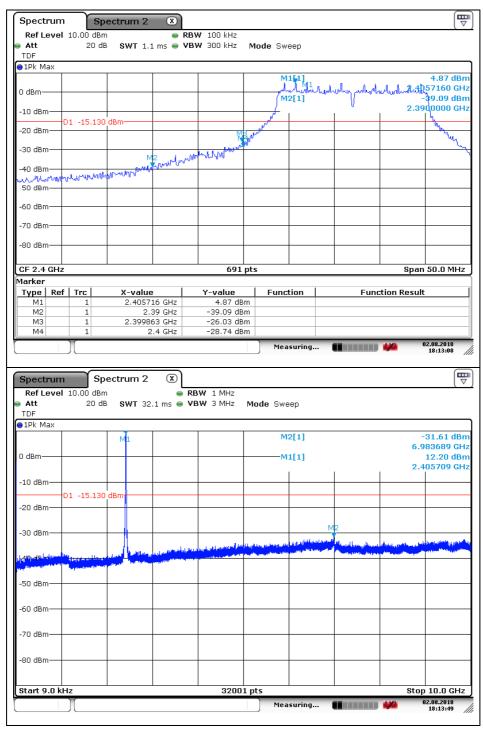




Report Number: F690501/RF-RTL012949 Page: 124 of 190

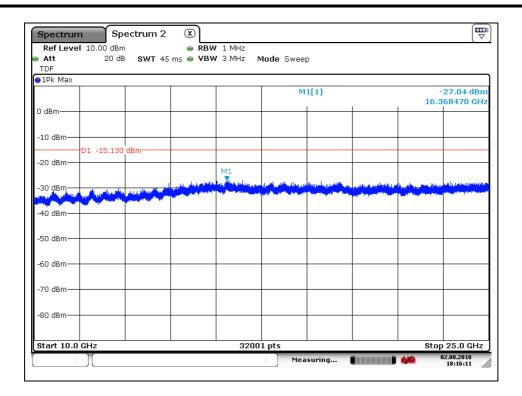




Report Number: F690501/RF-RTL012949 Page: 125 of 190

### Middle Channel

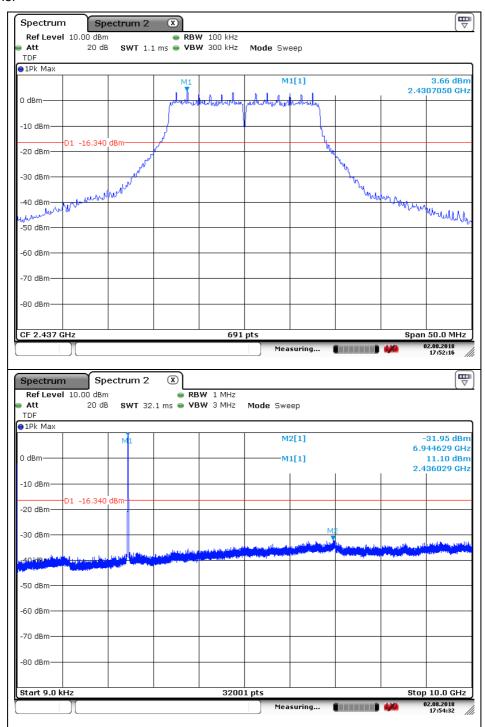




Report Number: F690501/RF-RTL012949 Page: 126 of 190

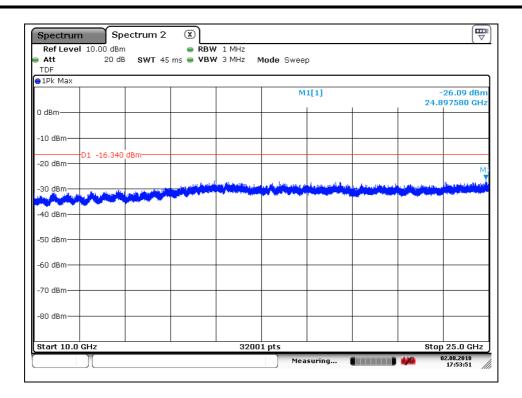




Report Number: F690501/RF-RTL012949 Page: 127 of 190

## High Channel

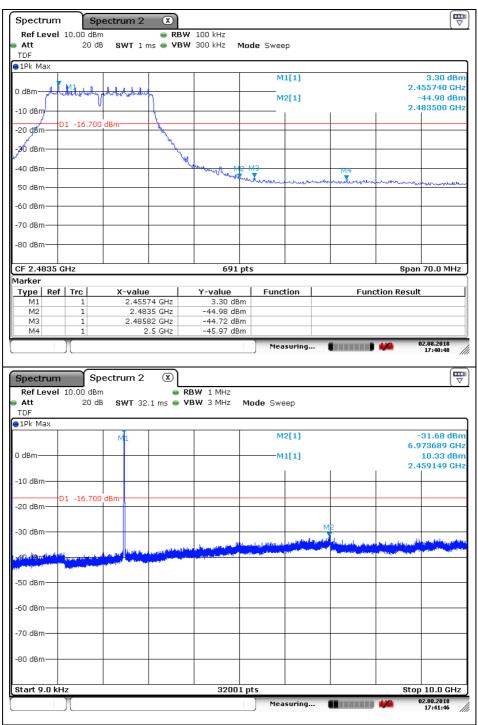



Report Number: F690501/RF-RTL012949 Page: 128 of 190

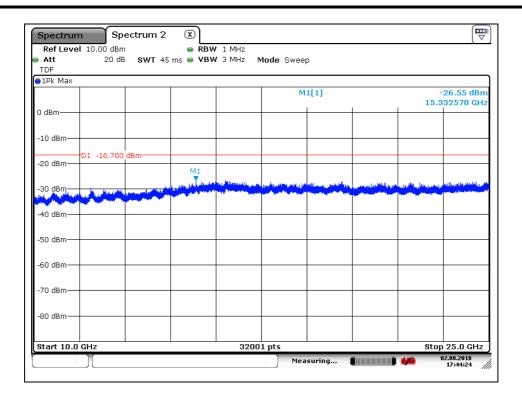




Report Number: F690501/RF-RTL012949 Page: 129 of 190


# OFDM: 802.11n\_HT20 (MCS0)

### Low Channel

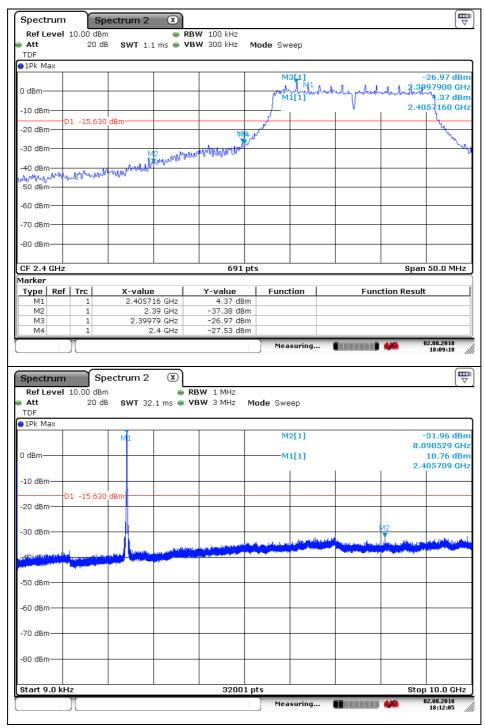




Report Number: F690501/RF-RTL012949 Page: 130 of 190

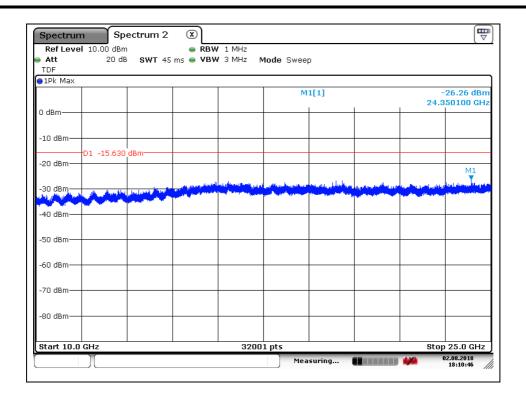




Report Number: F690501/RF-RTL012949 Page: 131 of 190

### Middle Channel

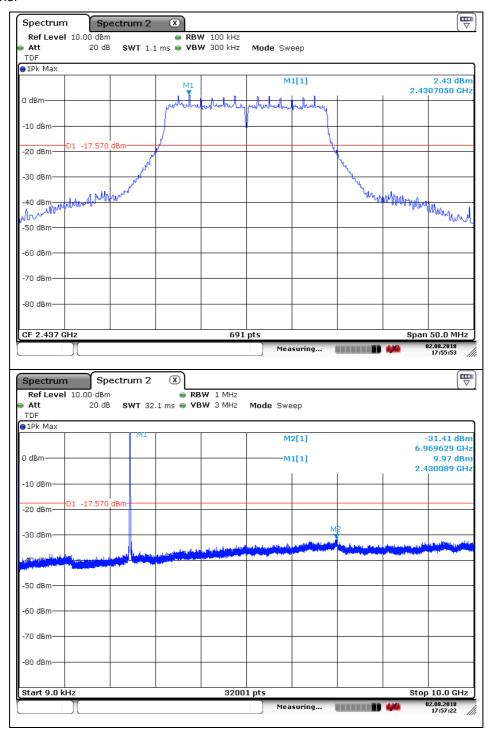




Report Number: F690501/RF-RTL012949 Page: 132 of 190

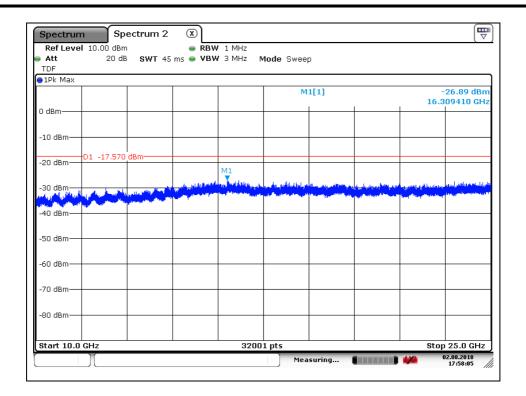




Report Number: F690501/RF-RTL012949 Page: 133 of 190

## High Channel

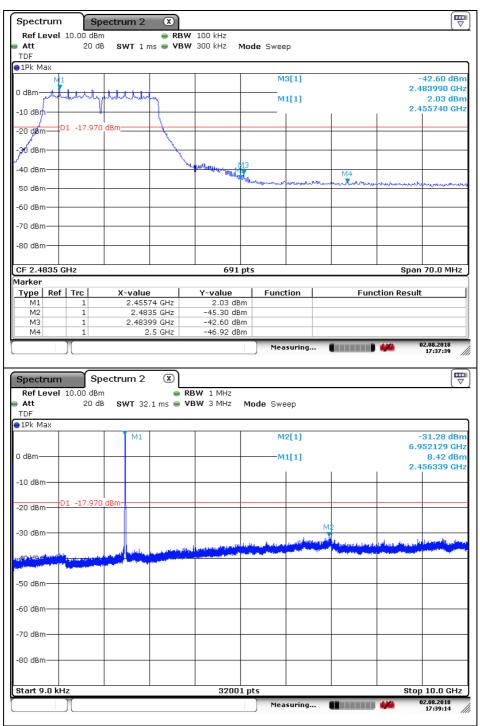



Report Number: F690501/RF-RTL012949 Page: 134 of 190

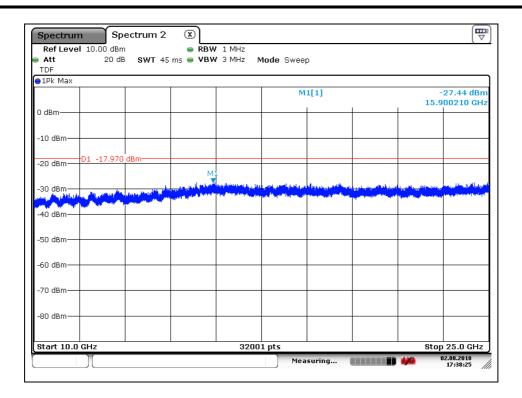




Report Number: F690501/RF-RTL012949 Page: 135 of 190


# OFDM: 802.11n\_HT40 (MCS0)

### Low Channel

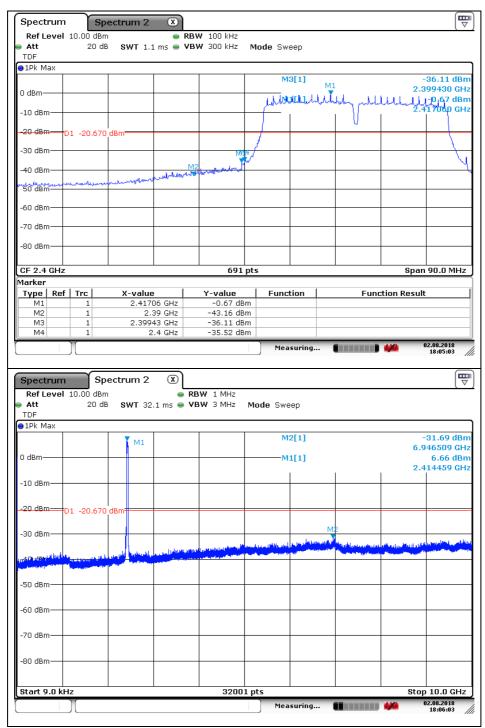




Report Number: F690501/RF-RTL012949 Page: 136 of 190

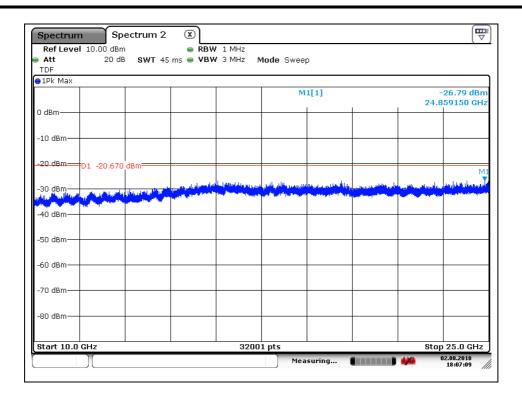




Report Number: F690501/RF-RTL012949 Page: 137 of 190

### Middle Channel

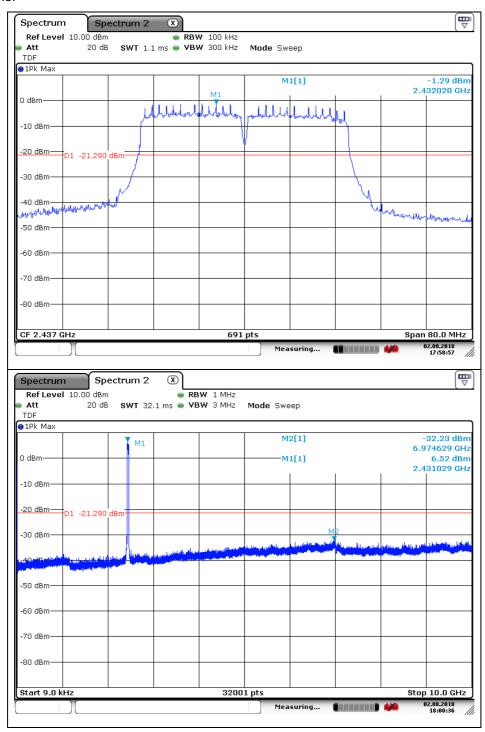




Report Number: F690501/RF-RTL012949 Page: 138 of 190

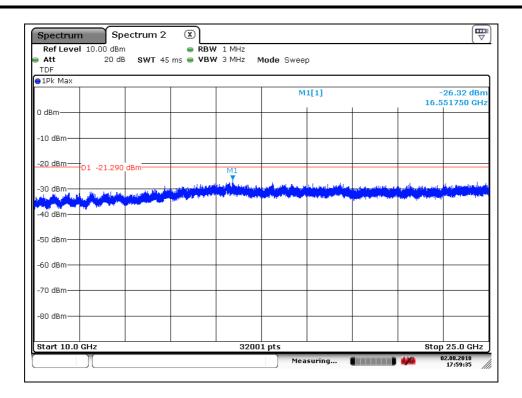




Report Number: F690501/RF-RTL012949 Page: 139 of 190

## High Channel

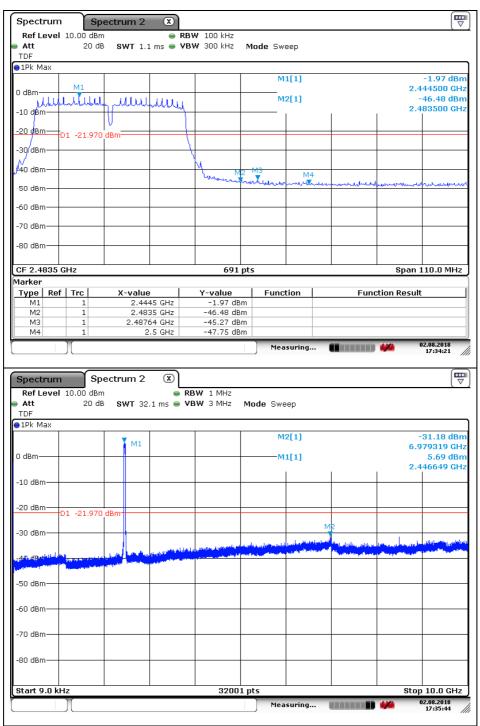



Report Number: F690501/RF-RTL012949 Page: 140 of 190

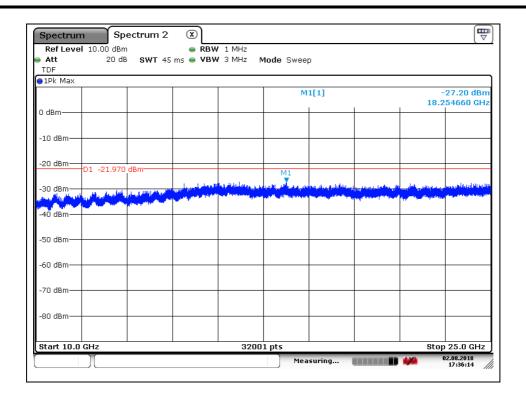



Report Number: F690501/RF-RTL012949 Page: 141 of 190

# 3. 6 dB Bandwidth & 99 % Bandwidth

# 3.1. Test Setup



#### 3.2. **Limit**

#### 3.2.1. FCC

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902-928 Mb, 2 400-2 483.5 Mb, and 5 725-5 850 Mb bands. The minimum 6 dB bandwidth shall be at least 500 kb.

#### 3.2.2. IC

According to RSS-247 Issue 2 5.2 (a), the minimum 6 dB bandwidth shall be 500 klb.

### 3.3. Test Procedure

### 3.3.1. 6 dB Bandwidth

The test follows section 8.0 DTS bandwidth of KDB 558074 D01 DTS Meas Guidance v04. Tests performed using section 8.1 Option 1.

- Option 1:
- 1. Set RBW to = 100 kHz.
- 2. Set the video bandwidth (VBW)  $\geq$  3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 3.3.2. 99 % Bandwidth

The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span. The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted. For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Report Number: F690501/RF-RTL012949 Page: 142 of 190

# 3.4. Test Results

Ambient temperature : **(23** ± **1)** ℃ Relative humidity % R.H. : 47

Operation Mode	Data Rate	Channel	Frequency (Mb)	6 dB Bandwidth (Mb)		99 % Bandwidth (Mb)	
				DC 5 V	DC 12 V	DC 5 V	DC 12 V
DSSS (802.11b)	1 Mbps	Low	2 412	9.030	9.088	13.661	13.661
		Middle	2 437	9.096	9.009	13.603	13.661
		High	2 462	9.088	9.030	13.603	13.603
OFDM (802.11g)	6 Mbps	Low	2 412	16.382	16.382	17.598	17.482
		Middle	2 437	16.447	16.389	17.540	17.540
		High	2 462	16.382	16.382	17.424	17.424
OFDM (802.11n_HT20)	MCS0	Low	2 412	17.598	17.598	18.177	18.177
		Middle	2 437	17.547	17.605	18.234	18.234
		High	2 462	17.598	17.598	18.119	18.119
OFDM (802.11n_HT40)	MCS0	Low	2 422	35.540	35.540	36.122	36.122
		Middle	2 437	35.430	35.520	36.122	36.122
		High	2 452	35.430	35.520	36.122	36.122




Report Number: F690501/RF-RTL012949 Page: 143 of 190

#### 6 dB Bandwidth


Test Condition: DC 5 V

DSSS: 802.11b

Low Channel

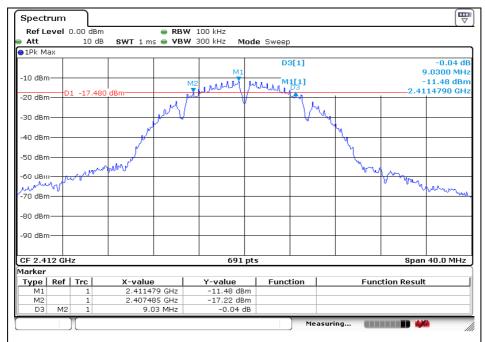

## Middle Channel

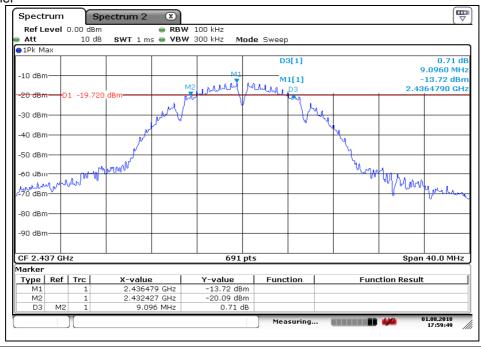


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 144 of 190

## High Channel

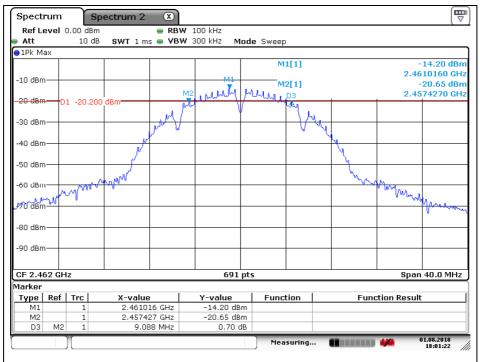

## OFDM: 802.11g

# Low Channel

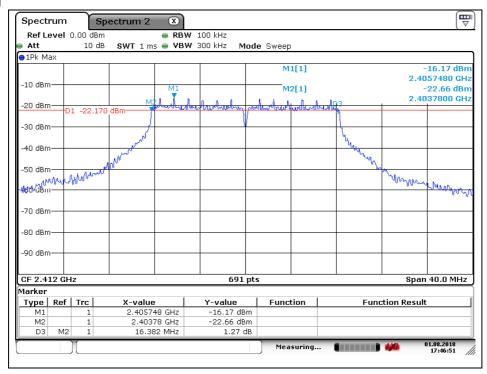


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 145 of 190

### Middle Channel

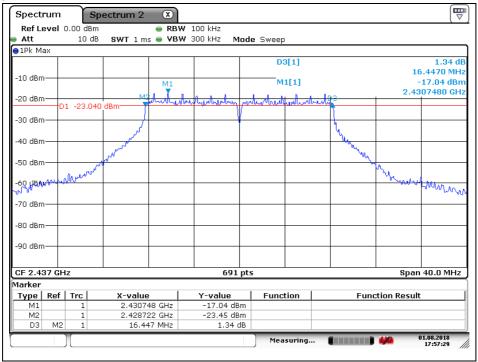

## High Channel

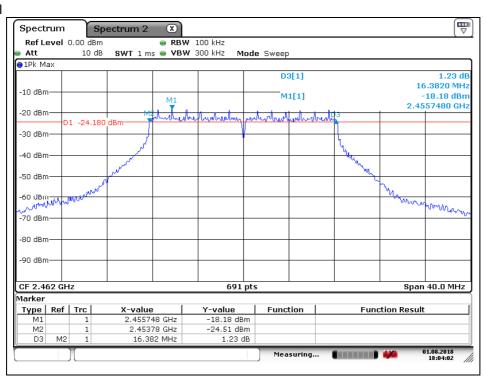





Report Number: F690501/RF-RTL012949 Page: 146 of 190

## OFDM: 802.11n\_HT20

### Low Channel

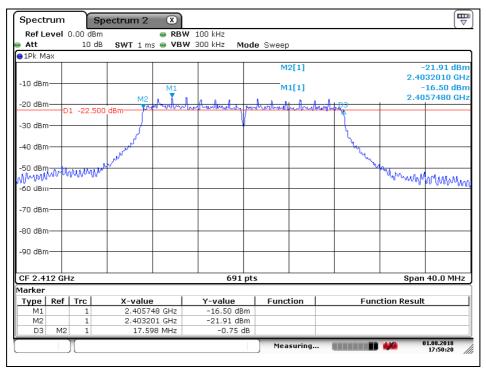

# Middle Channel

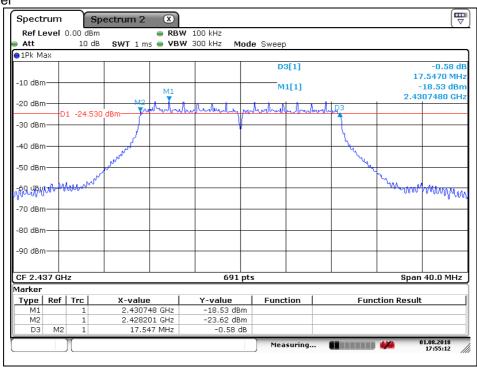


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 147 of 190

## High Channel

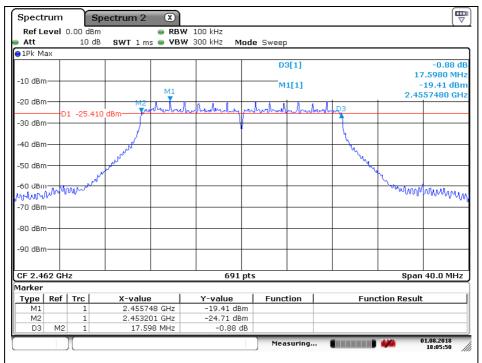

OFDM: 802.11n\_HT40

# Low Channel

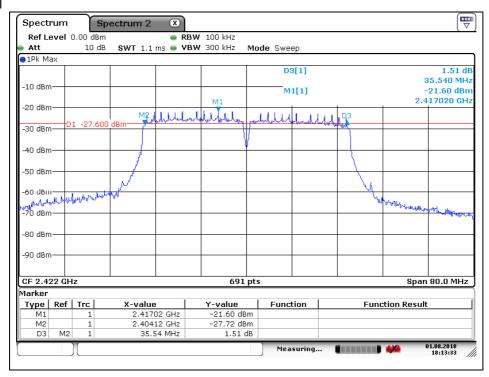


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 148 of 190

### Middle Channel

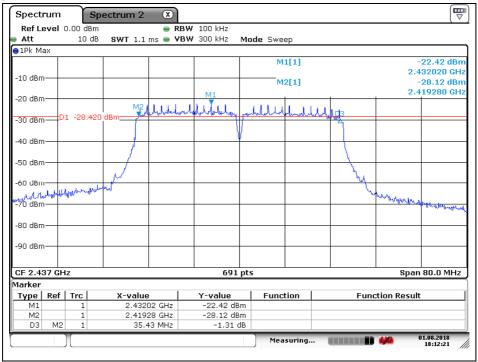

## High Channel

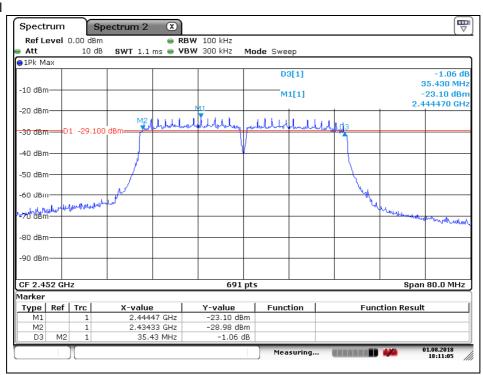




Report Number: F690501/RF-RTL012949 Page: 149 of 190


Test Condition: DC 12 V

DSSS: 802.11b

### Low Channel

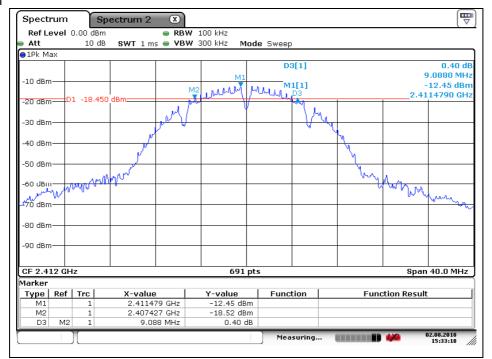


# Middle Channel

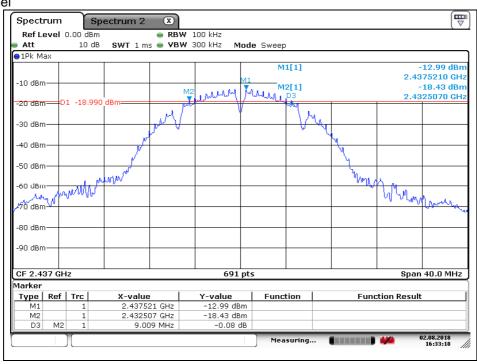




Report Number: F690501/RF-RTL012949 Page: 150 of 190

## High Channel

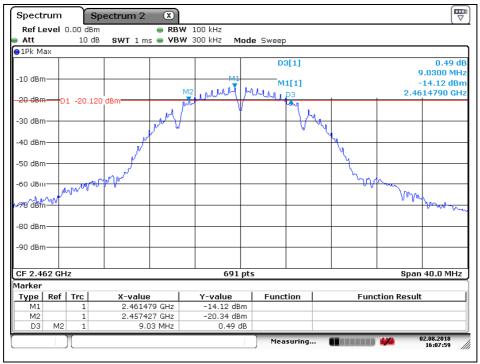

## OFDM: 802.11g

# Low Channel

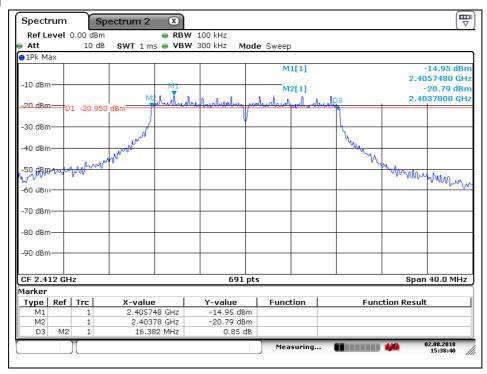


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 151 of 190

### Middle Channel

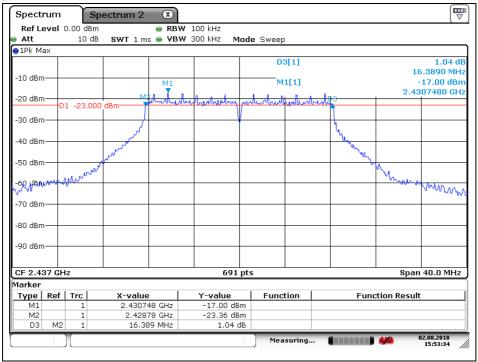

## High Channel

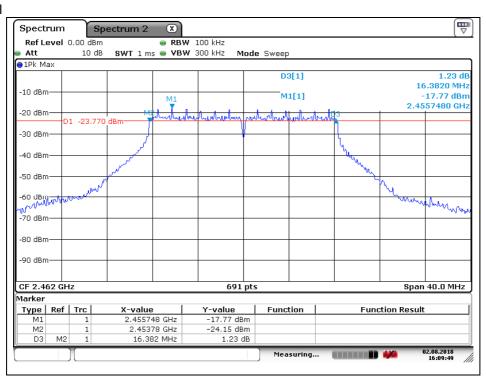





Report Number: F690501/RF-RTL012949 Page: 152 of 190

## OFDM: 802.11n\_HT20

### Low Channel

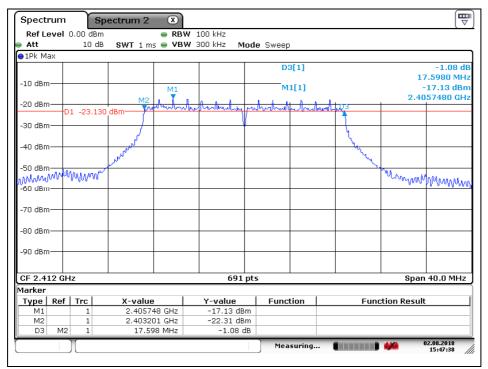


# Middle Channel

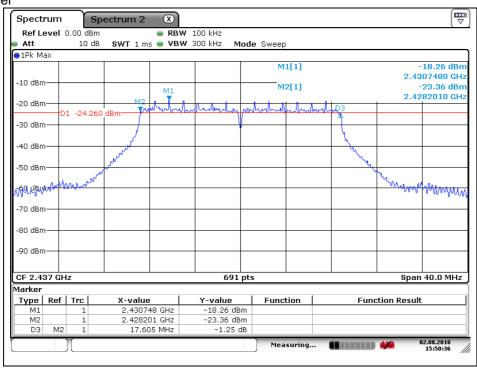




Report Number: F690501/RF-RTL012949 Page: 153 of 190

## High Channel

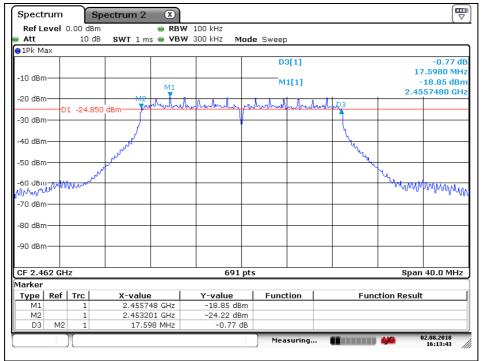

OFDM: 802.11n\_HT40

# Low Channel

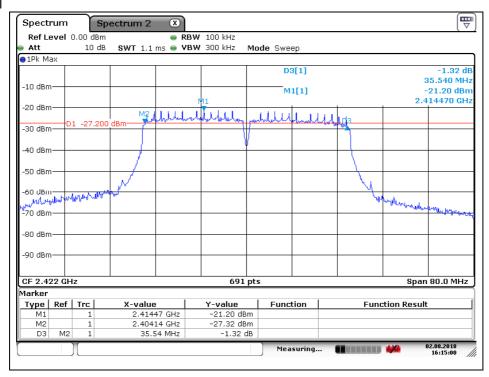


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 154 of 190

### Middle Channel

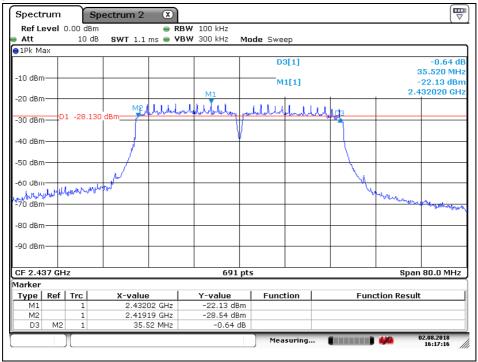

## High Channel

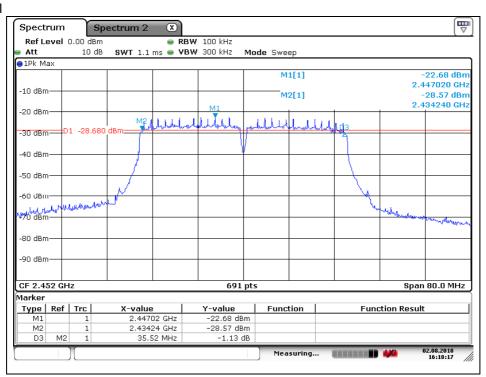

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 155 of 190

## 99 % Bandwidth


**Test Condition: DC 5 V** 

DSSS: 802.11b

Low Channel

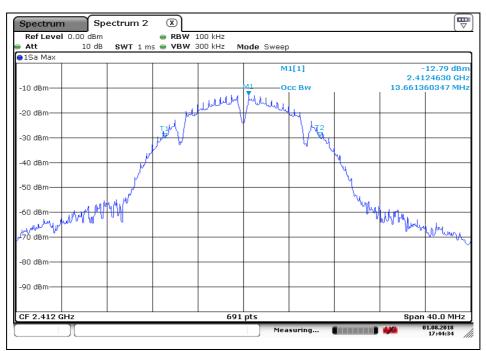


### Middle Channel

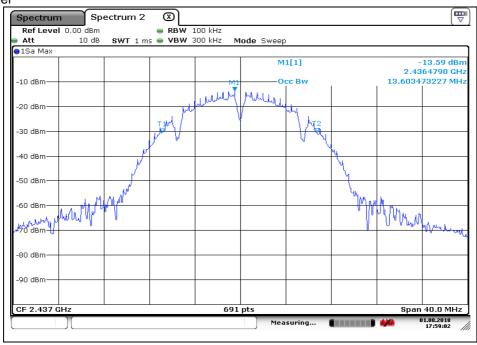




Report Number: F690501/RF-RTL012949 190 Page: 156 of

# High Channel

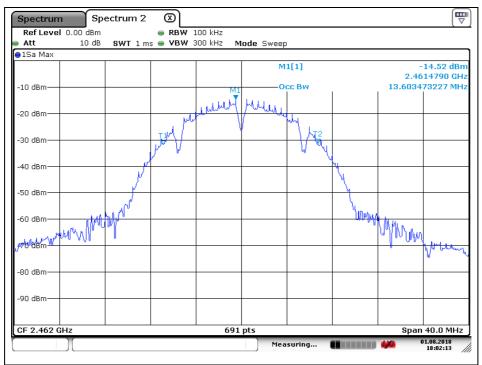

# OFDM: 802.11g

# Low Channel

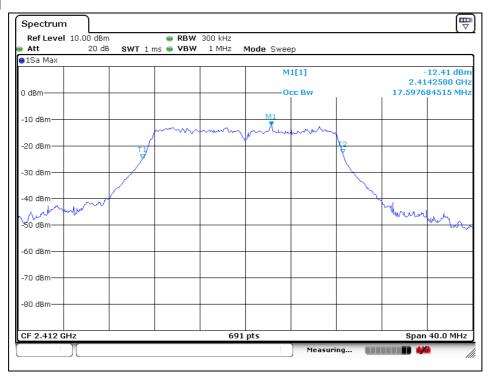


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 157 of 190

### Middle Channel

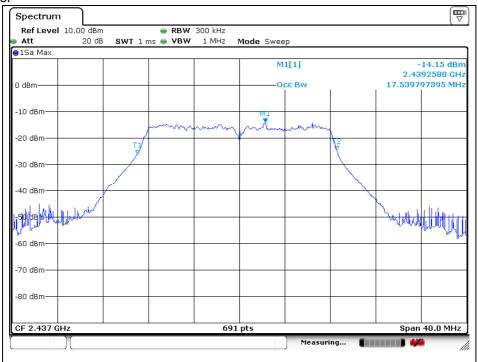

# High Channel

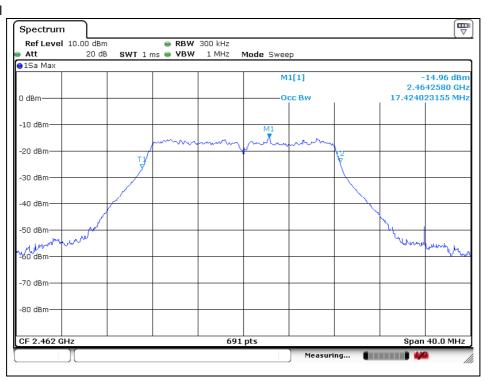


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 190 Page: 158 of

## OFDM: 802.11n\_HT20

#### Low Channel

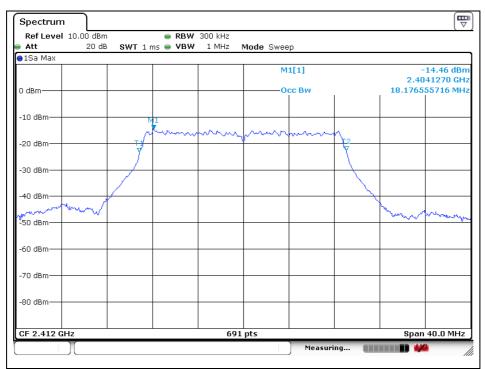

#### Middle Channel

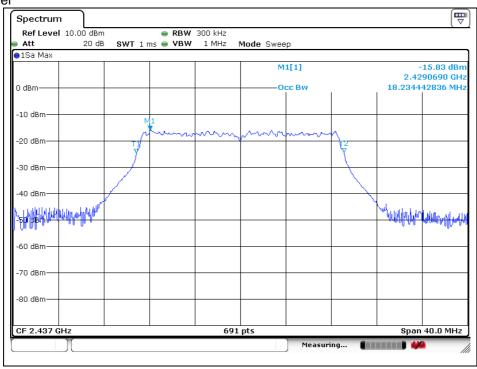


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 159 of 190

### High Channel

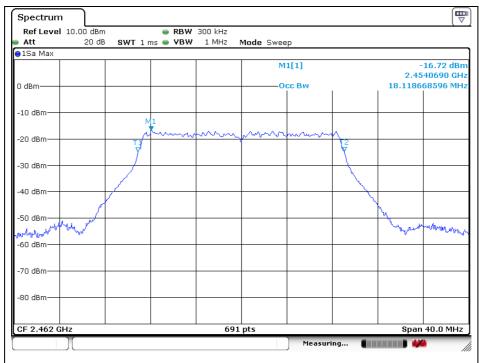

OFDM: 802.11n\_HT40

# Low Channel

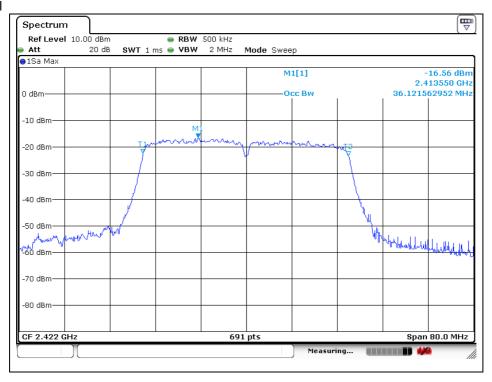


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 160 of 190

#### Middle Channel

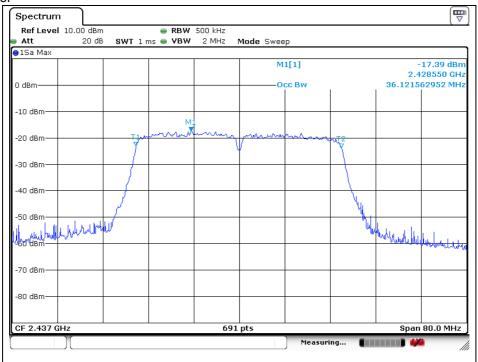

## High Channel

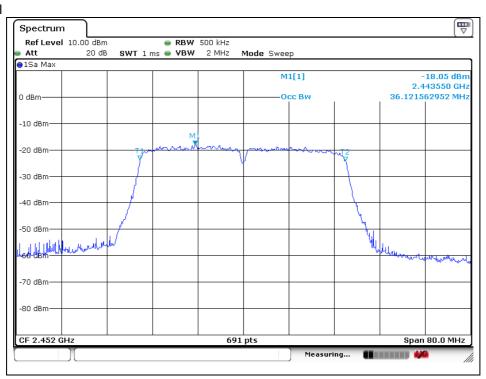

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 161 of 190


Test Condition: DC 12 V

DSSS: 802.11b

Low Channel

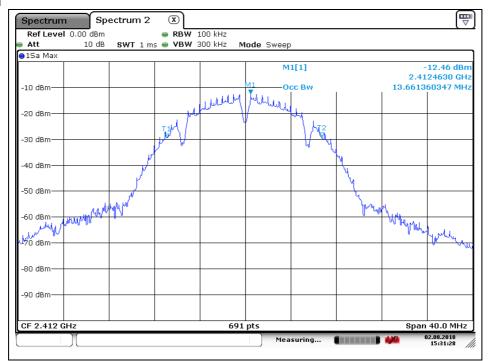


### Middle Channel

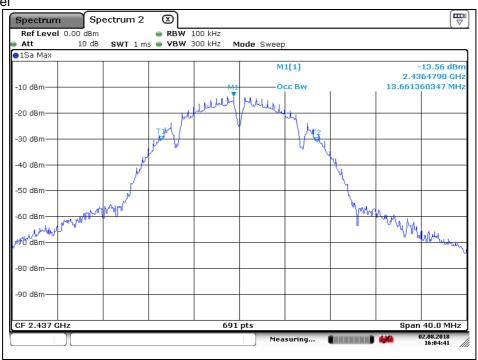




Report Number: F690501/RF-RTL012949 190 Page: 162 of

### High Channel

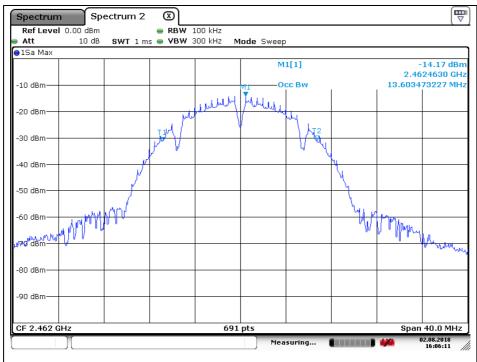

## OFDM: 802.11g

# Low Channel

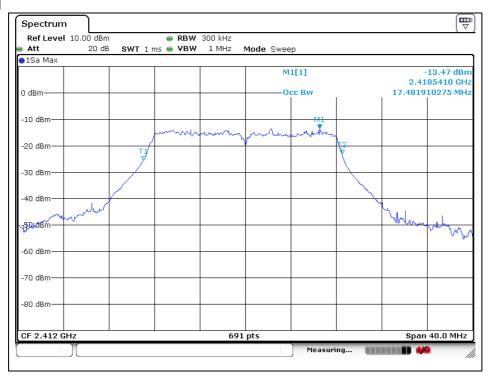


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 190 Page: 163 of

#### Middle Channel

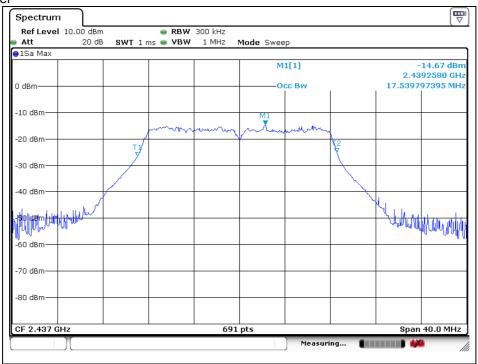

## High Channel

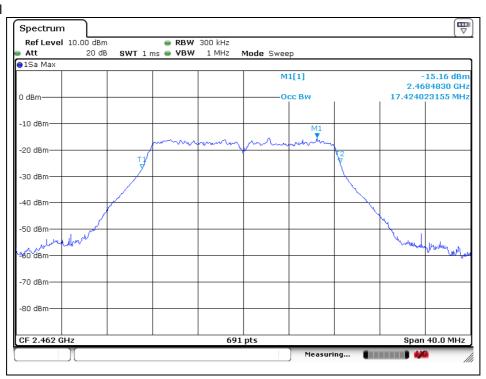


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 190 Page: 164 of

## OFDM: 802.11n\_HT20

#### Low Channel

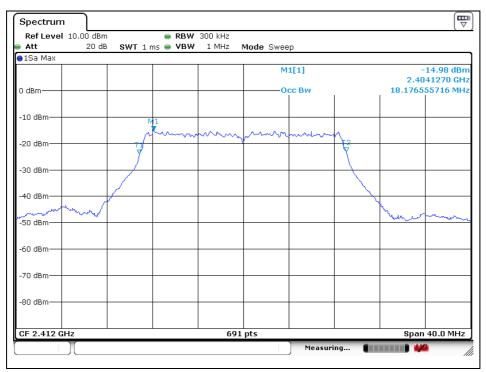

#### Middle Channel

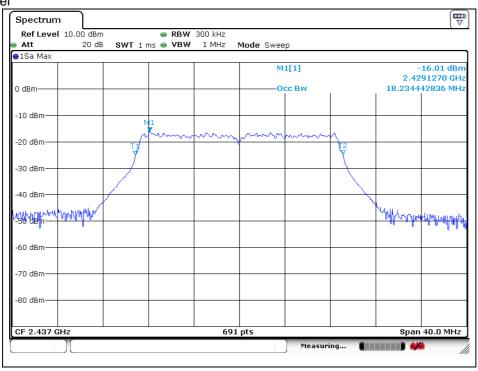


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 165 of 190

### High Channel

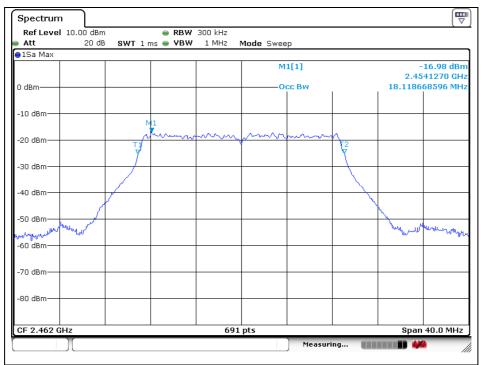

OFDM: 802.11n\_HT40

# Low Channel

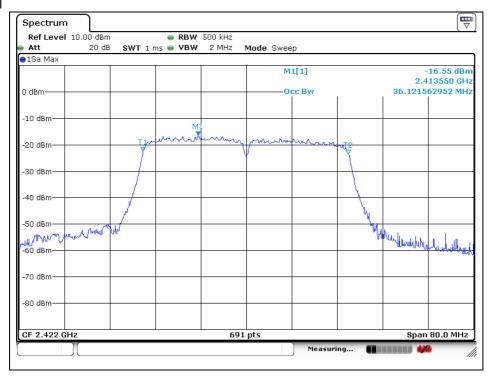


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 166 of 190

#### Middle Channel

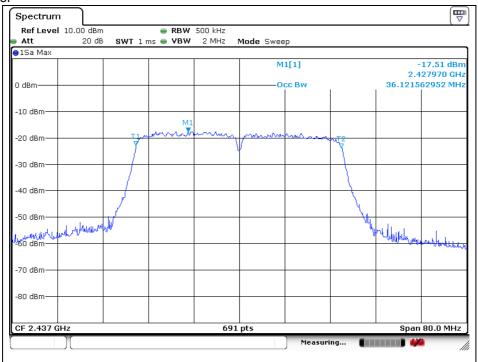

## High Channel

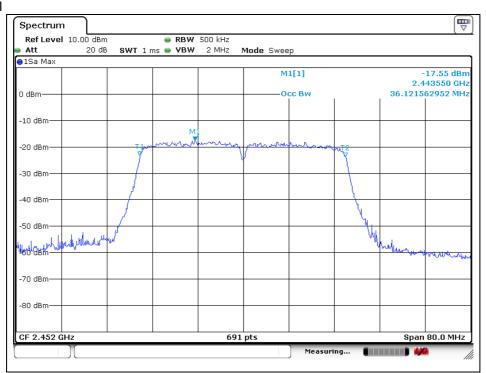


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL012949 Page: 167 190

# 4. Maximum Peak Conducted Output Power

## 4.1. Test Setup

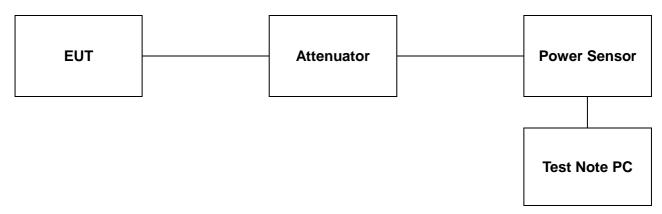

### **4.2. Limit**

#### 4.2.1. FCC

According to §15.247(b)(3), for systems using digital modulation in the 902-928 Mz, 2 400-2 483.5 Mz, and 5 725-5 850 Mb bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.2.2. IC

According to RSS-247 Issue 2, 5.4 (d), for DTSs employing digital modulation techniques operating in the bands 902-928 Mb and 2 400-2 483.5 Mb, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e),

As an alternative to a peak measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.



Report Number: F690501/RF-RTL012949 Page: 168 of 190

#### 4.3. Test Procedure

The test follows section 9.1.3 of KDB 558074 D01 DTS Meas Guidance v04.

#### PKPM1 Peak-reading power meter method

- The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The test follows section 9.2.3.2 of KDB 558074 D01 DTS Meas Guidance v04.

### Method AVGPM-G (Measurement using a gated RF average-reading power meter)

- Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

Test program: (S/W name: R&S Power Viewer, Version: 3.2.0)

- 1. Initially overall offset for attenuator and cable loss is measured per frequency.
- 2. Measured offset is inserted in test program in advance of measurement for output power.
- 3. Power for each frequency (channel) of device is investigated as final result.
- 4. Final result reported on this section from R&S power viewer program includes with several factors and test program shows only final result.



Report Number: F690501/RF-RTL012949 190 Page: 169 of

## 4.4. Test Results

Ambient temperature : **(23** ± **1)** ℃ Relative humidity : 47 % R.H.

**Test Condition: DC 5 V** 

Mode	Data Rate	Channel	Frequency (脈)	Average Power Result (dB m)	Peak Power Result (dB m)	Peak Power Limit (dB m)	
	1 Mbps	Low	2 412	<u>17.50</u>	20.39		
DSSS (802.11b)		Middle	2 437	16.59	19.62		
		High	2 462	15.86	18.73		
	6 Mbps	Low	2 412	<u>15.92</u>	23.88		
OFDM (802.11g)		Middle	2 437	14.84	23.68		
		High	2 462	14.07	23.07	30	
OFDM (802.11n_HT20)	MCS0	MCSO	Low	2 412	<u>14.93</u>	<u>23.87</u>	30
			Middle	2 437	13.62	23.71	
			High	2 462	12.84	23.03	
OFDM (802.11n_HT40)	MCS0	Low	2 422	<u>13.26</u>	<u>23.49</u>		
		Middle	2 437	12.58	23.14		
		High	2 452	12.08	22.71		

### Remark;

Attenuator and cable offset was compensated in test program (R&S Power Viewer) before measuring.



Report Number: F690501/RF-RTL012949 Page: 170 190 of

Test Condition: DC 12 V

Mode	Data Rate	Channel	Frequency (Mb)	Average Power Result (dB m)	Peak Power Result (dB m)	Peak Power Limit (dB m)	
	1 Mbps	Low	2 412	<u>17.64</u>	<u>20.51</u>		
DSSS (802.11b)		Middle	2 437	16.92	19.96		
		High	2 462	15.77	18.75		
	6 Mbps	Low	2 412	<u>16.07</u>	23.82		
OFDM (802.11g)		Middle	2 437	15.02	<u>23.86</u>		
		High	2 462	14.25	23.27	30	
	MCS0	Low	2 412	<u>14.97</u>	<u>23.97</u>	30	
OFDM (802.11n_HT20)		Middle	2 437	13.69	23.73		
		High	2 462	12.92	23.13		
OFDM (802.11n_HT40)	MCS0	Low	2 422	<u>13.46</u>	23.23		
		Middle	2 437	12.62	22.81		
		High	2 452	12.15	22.50		

### Remark;

Attenuator and cable offset was compensated in test program (R&S Power Viewer) before measuring.



Report Number: F690501/RF-RTL012949 Page: 171 of 190

# 5. Power Spectral Density

## 5.1. Test Setup



### 5.2. Limit

#### 5.2.1 FCC

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dB m in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 5.2.2 IC

According to RSS-247 Issue 2, 5.2 (b), the transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dB m in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

#### 5.3. Test Procedure

The measurements are recorded using the PKPSD measurement procedure in section 10.2 of KDB 558074 D01 DTS Meas Guidance v04.

- This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.
- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 x DTS bandwidth.
- 3. Set the RBW to: 3 kHz  $\leq$  RBW  $\leq$  100 kHz.
- 4. Set the VBW  $\geq$  3  $\times$  RBW.
- 5. Detector = Peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Report Number: F690501/RF-RTL012949 Page: 172 of 190

## 5.4. Test Results

Ambient temperature : **(23** ± **1)** ℃ Relative humidity % R.H. : 47

Operation	Data Rate	Channel	Frequency (쌘)	Measured	Maximum Limit	
Mode				DC 5 V	DC 12 V	(dB m)
	1 Mpbs	Low	2 412	3.57	4.61	8
DSSS (802.11b)		Middle	2 437	1.42	3.22	
(00=1110)		High	2 462	1.65	2.37	
	6 Mbps	Low	2 412	-10.47	-10.13	
OFDM (802.11g)		Middle	2 437	-11.66	-11.31	
		High	2 462	-13.19	-11.95	
OFDM (802.11n_HT20)	MCS0	Low	2 412	-12.11	-11.72	
		Middle	2 437	-13.36	-13.06	
		High	2 462	-14.19	-13.63	
OFDM (802.11n_HT40)	MCS0	Low	2 422	-17.21	-16.76	
		Middle	2 437	-18.24	-17.64	
		High	2 452	-18.84	-18.22	




Report Number: F690501/RF-RTL012949 190 Page: 173 of


**Test Condition: DC 5 V** 

DSSS: 802.11b

Low Channel

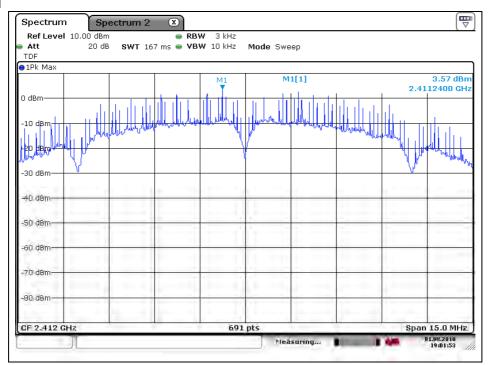

### Middle Channel

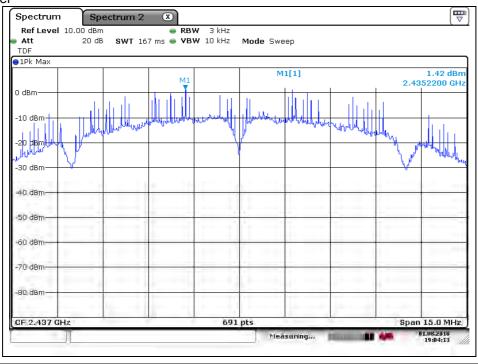


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 190 Page: 174 of

### High Channel

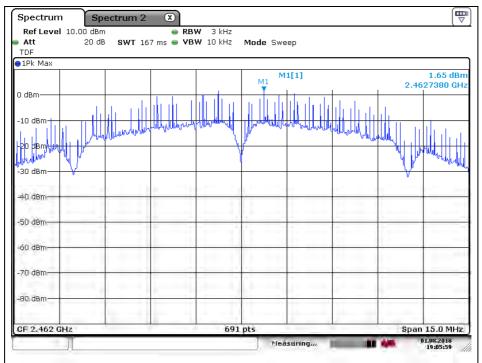

## OFDM: 802.11g

# Low Channel

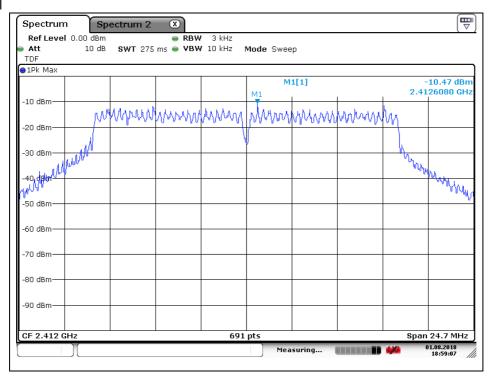


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 175 of 190

#### Middle Channel

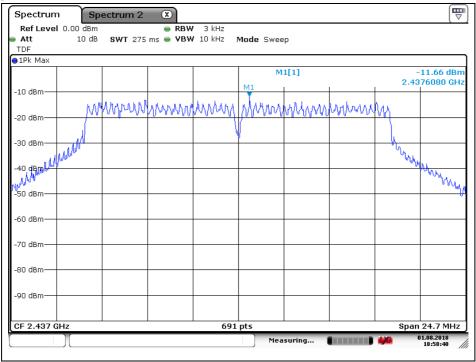

### High Channel

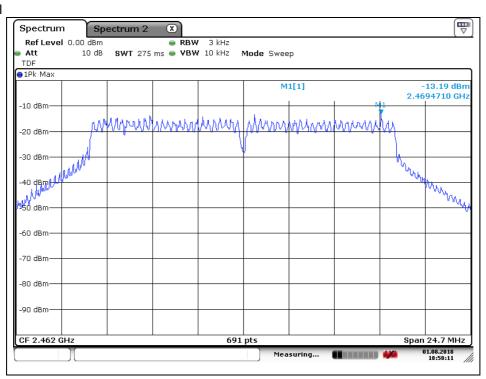





Report Number: F690501/RF-RTL012949 Page: 176 of 190

## OFDM: 802.11n\_HT20

#### Low Channel

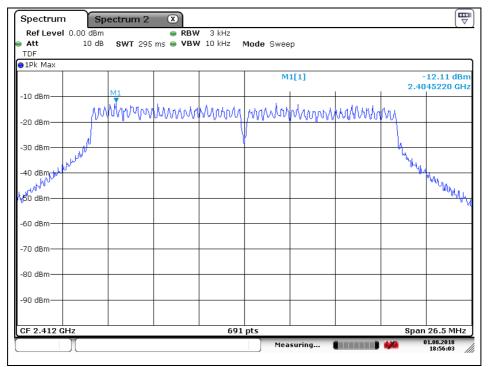


#### Middle Channel

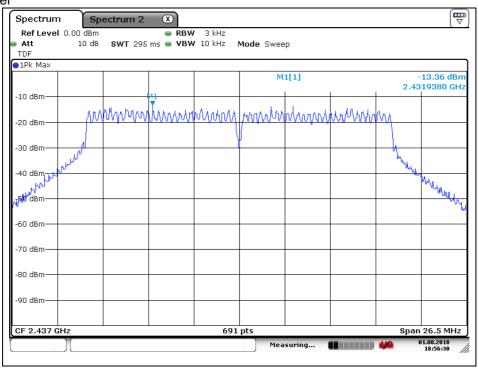




Report Number: F690501/RF-RTL012949 Page: 177 of 190

### High Channel

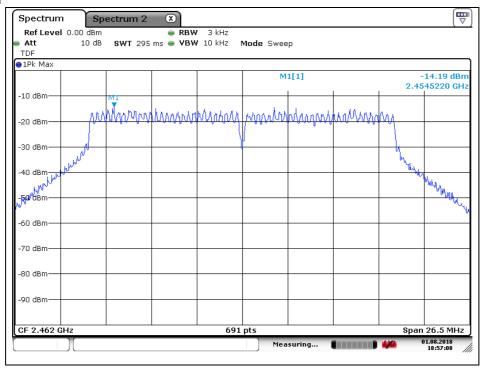

## OFDM: 802.11n\_HT40

# Low Channel

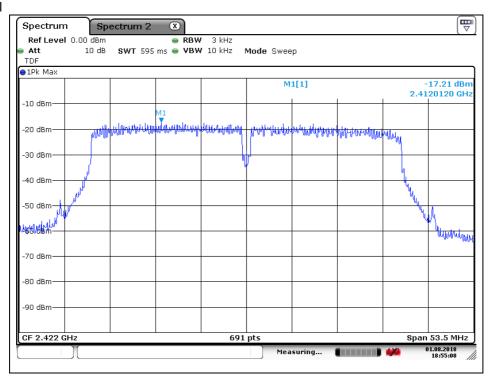


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 178 of 190

#### Middle Channel

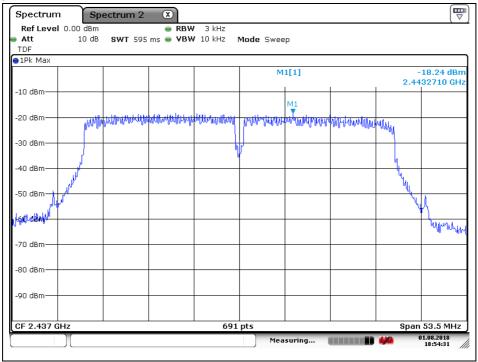

### High Channel

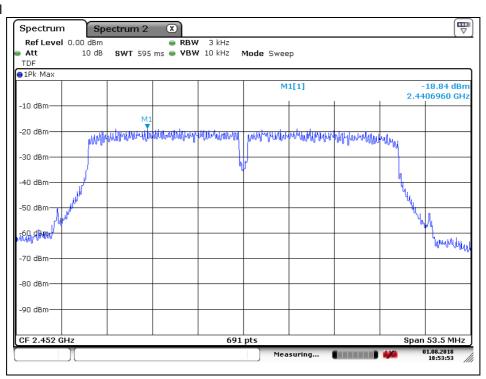




Report Number: F690501/RF-RTL012949 190 Page: 179 of


Test Condition: DC 12 V

DSSS: 802.11b

Low Channel

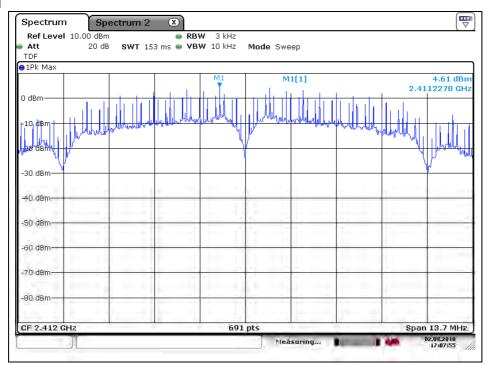


### Middle Channel

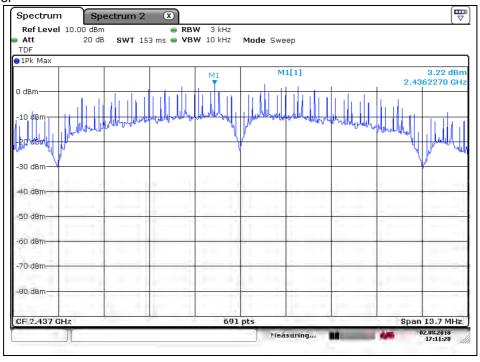




Report Number: F690501/RF-RTL012949 Page: 190 180 of

### High Channel

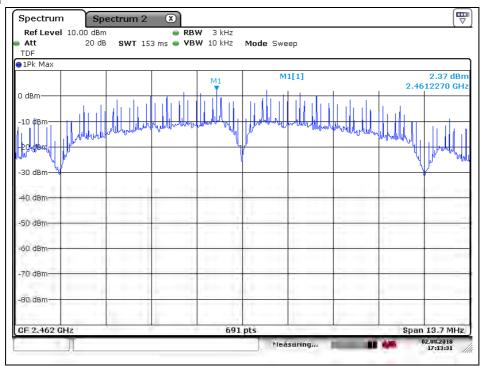

## OFDM: 802.11g

# Low Channel

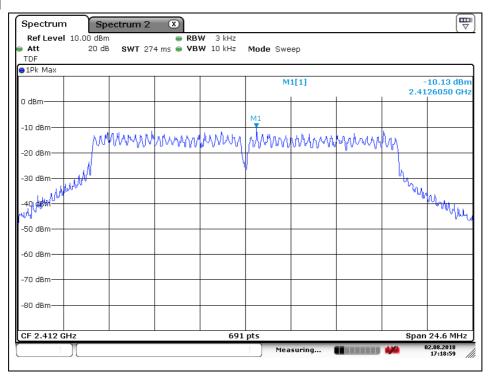


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 181 of 190

#### Middle Channel

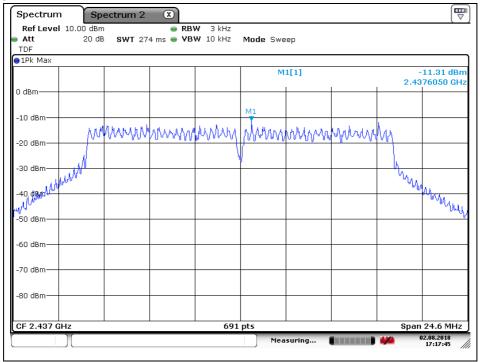

## High Channel

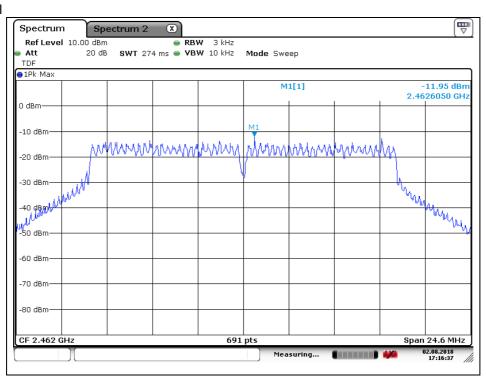





Report Number: F690501/RF-RTL012949 Page: 182 of 190

## OFDM: 802.11n\_HT20

#### Low Channel

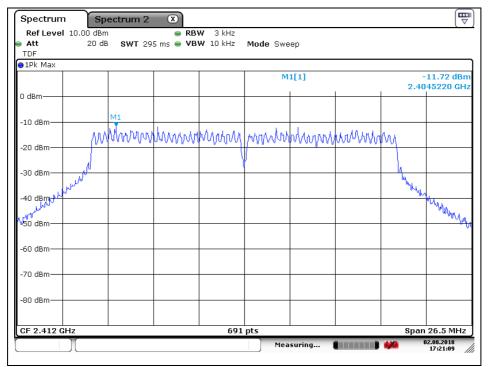

#### Middle Channel

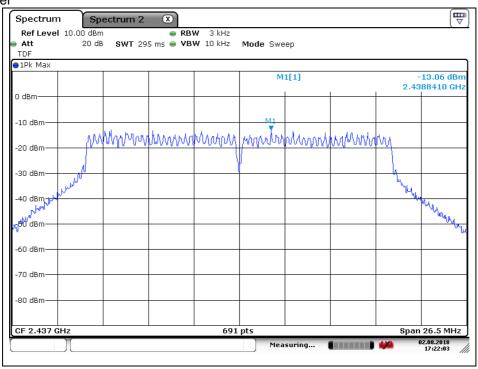


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 183 of 190

### High Channel

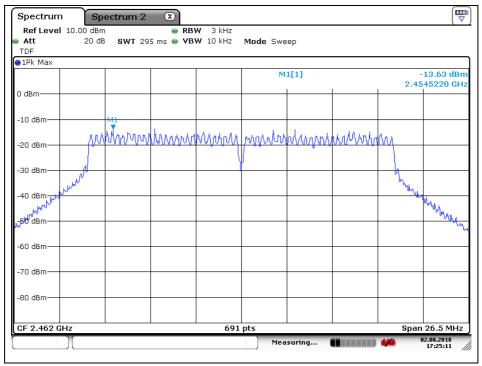

## OFDM: 802.11n\_HT40

# Low Channel

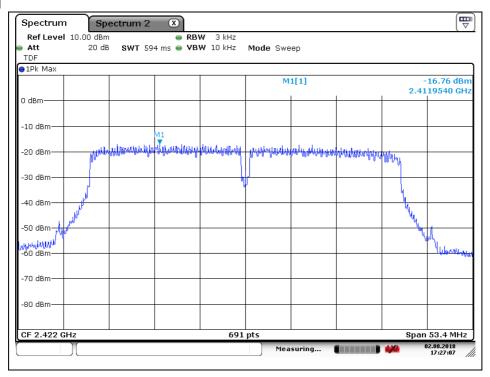


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL012949 Page: 184 of 190

#### Middle Channel

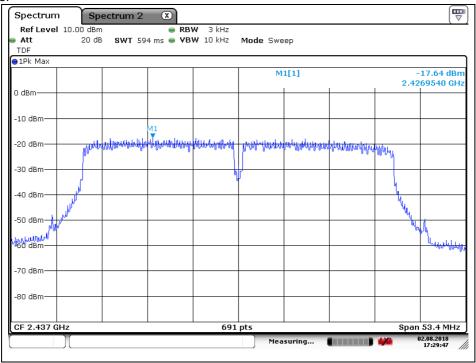

## High Channel

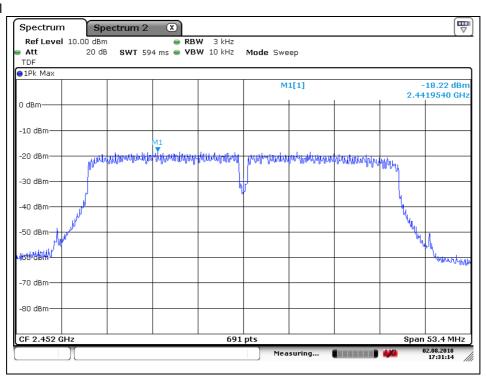


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL012949 Page: 185 of 190

## 6. Transmitter AC Power Line Conducted Emission

## 6.1. Test Setup

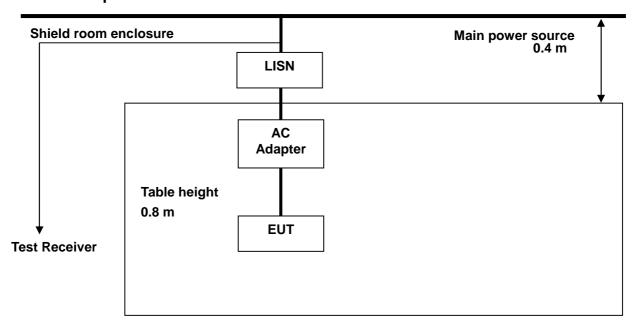

### 6.2. Limit

### 6.2.1 FCC

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$  H /50 ohms line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Fraguency of amission (IIII-)	Conducted limit (dBμV)			
Frequency of emission (脈)	Quasi-peak	Average		
0.15-0.5	66 to 56*	56 to 46*		
0.5-5	56	46		
5-30	60	50		

<sup>\*</sup> Decreases with the logarithm of the frequency.



Report Number: F690501/RF-RTL012949 Page: 186 of 190

#### 6.2.2 IC

RSS-Gen Issue 5, 8.8, Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 k to 30 k shall not exceed the limits in table 4, as measured using a 50  $\mu$  H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 - AC power-line conducted emissions limits

Frague nov (MI)	Conducted limit (dBμV)				
Frequency (싼)	Quasi-peak	Average**			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 klb and 30 klb, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL012949 Page: 187 190

#### 6.3. Test Procedures

AC conducted emissions from the EUT were measured according to the dictates of ANSI C63.10:2013

- 1. The test procedure is performed in a 6.5 m x 3.5 m x 3.5 m (L x W x H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) x 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
- 2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
- 3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
- 4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.



Report Number: F690501/RF-RTL012949 Page: 188 of 190

### 6.4. Test Results

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature :  $(23 \pm 1)$  °C Relative humidity : 47 % R.H.

Frequency range : 0.15 Mb - 30 Mb

Measured Bandwidth : 9 kHz


FREQ.	LEVEL (dB≠V)		LINE	LIMIT (dBµV)		MARGIN (dB)	
(MHz)	Q-Peak	Average	LINE	Q-Peak	Average	Q-Peak	Average
0.20	51.80	37.00	N	63.61	53.61	11.81	16.61
0.32	45.00	35.70	N	59.71	49.71	14.71	14.01
0.39	45.50	29.50	N	58.06	48.06	12.56	18.56
0.54	41.90	26.90	N	56.00	46.00	14.10	19.10
11.93	25.10	19.50	N	60.00	50.00	34.90	30.50
23.88	25.20	20.10	N	60.00	50.00	34.80	29.90
0.20	51.10	36.60	Н	63.61	53.61	12.51	17.01
0.32	44.80	30.80	Н	59.71	49.71	14.91	18.91
0.42	45.60	32.30	Н	57.45	47.45	11.85	15.15
0.49	45.10	31.20	Н	56.17	46.17	11.07	14.97
7.96	24.30	18.30	Н	60.00	50.00	35.70	31.70
13.05	23.10	17.50	Н	60.00	50.00	36.90	32.50


### Remark;

- 1. Line (H): Hot, Line (N): Neutral.
- All modes of operation were investigated and the worst-case emissions were reported using <u>11n HT20 / MCS0 / Low channel.</u>
- 3. The limit for Class B device(s) from 150 klb to 30 Mlb are specified in Section of the Title 47 CFR.
- 4. Traces shown in plot were made by using a peak detector and average detector.
- 5. Deviations to the Specifications: None.



Report Number: F690501/RF-RTL012949 Page: 189 of 190

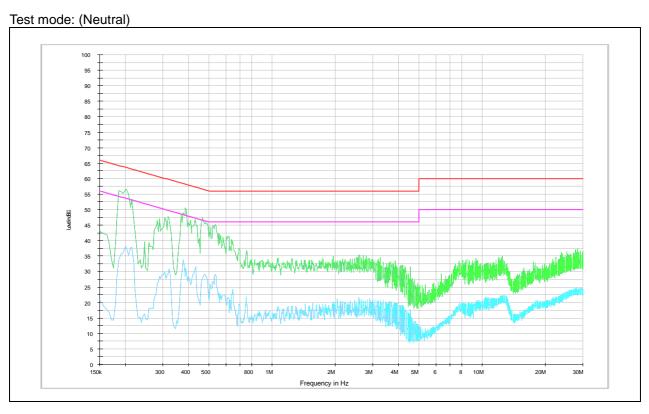

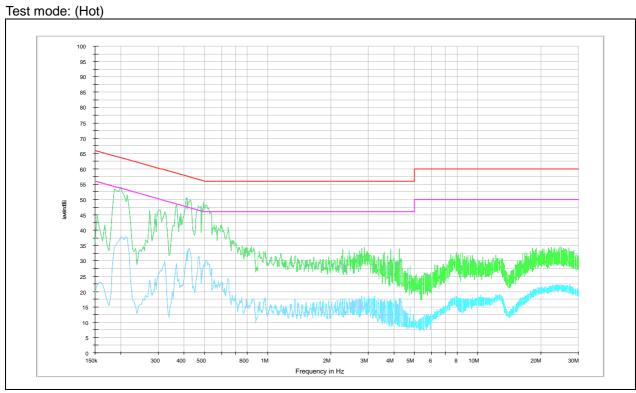



Report Number: F690501/RF-RTL012949 Page: 190 of 190

# 7. Antenna Requirement

## 7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dB i are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dB i.

### 7.2. Antenna Connected Construction

Antenna used in this product is PCB pattern antenna with gain of 1.81 dB i.

# - End of the Test Report -