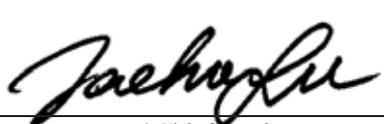


# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

**Test Report No.** : W15DR-D013  
**AGR No.** : A15NA-091  
**Applicant** : LG Electronics USA  
**Address** : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States, 7632  
**Manufacturer** : LG Electronics Mlawa Sp. zo.o.  
**Address** : Ul. LG Electronics 7 PL-06-500 Mlawa  
**Type of Equipment** : MIB2 Entry  
**FCC ID.** : BEJ-MIBPQMIN  
**Model Name** : L69VW2  
**Multiple Model Name:** L69SK2, L69SE2  
**Serial number** : N/A  
**Total page of Report** : 91 pages (including this page)  
**Date of Incoming** : November 17, 2015  
**Date of issue** : December 18, 2015

## SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*  
 This test report only contains the result of a single test of the sample supplied for the examination.  
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:   
 Jae-Ho, Lee / Chief Engineer  
 ONETECH Corp.

Approved by:   
 Sung-ik, Han/ Managing Director  
 ONETECH Corp.

## CONTENTS

**PAGE**

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>6</b>
<b>2. TEST SUMMARY.....</b>	<b>7</b>
<b>2.1 TEST ITEMS AND RESULTS .....</b>	<b>7</b>
<b>2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....</b>	<b>7</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>7</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>7</b>
<b>2.5 TEST METHODOLOGY.....</b>	<b>7</b>
<b>2.6 TEST FACILITY.....</b>	<b>8</b>
<b>3. GENERAL INFORMATION.....</b>	<b>9</b>
<b>3.1 PRODUCT DESCRIPTION.....</b>	<b>9</b>
<b>3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....</b>	<b>9</b>
<b>4. EUT MODIFICATIONS.....</b>	<b>9</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>10</b>
<b>5.1 JUSTIFICATION .....</b>	<b>10</b>
<b>5.2 PERIPHERAL EQUIPMENT .....</b>	<b>10</b>
<b>5.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>11</b>
<b>5.4 CONFIGURATION OF TEST SYSTEM.....</b>	<b>11</b>
<b>5.5 ANTENNA REQUIREMENT .....</b>	<b>12</b>
<b>6. PRELIMINARY TEST .....</b>	<b>12</b>
<b>6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....</b>	<b>12</b>
<b>6.2 GENERAL RADIATED EMISSIONS TESTS .....</b>	<b>12</b>
<b>7. MINIMUM 20 DB BANDWIDTH.....</b>	<b>13</b>
<b>7.1 OPERATING ENVIRONMENT .....</b>	<b>13</b>
<b>7.2 TEST SET-UP .....</b>	<b>13</b>
<b>7.3 TEST EQUIPMENT USED.....</b>	<b>13</b>
<b>7.4 TEST DATA FOR 1 MBPS.....</b>	<b>14</b>
<b>7.5 TEST DATA FOR 2 MBPS.....</b>	<b>16</b>
<b>7.6 TEST DATA FOR 3 MBPS.....</b>	<b>18</b>
<b>8. HOPPING FREQUENCY SEPARATION.....</b>	<b>20</b>
<b>8.1 OPERATING ENVIRONMENT .....</b>	<b>20</b>

8.2 TEST SET-UP .....	20
8.3 TEST EQUIPMENT USED .....	20
8.4 TEST DATA FOR 1 MBPS .....	21
8.5 TEST DATA FOR 2 MBPS .....	22
8.6 TEST DATA FOR 3 MBPS .....	23
<b>9. NUMBER OF HOPPING CHANNELS .....</b>	<b>24</b>
9.1 OPERATING ENVIRONMENT .....	24
9.2 TEST SET-UP .....	24
9.3 TEST EQUIPMENT USED .....	24
9.4 TEST DATA FOR 1 MBPS .....	25
9.5 TEST DATA FOR 2 MBPS .....	28
9.6 TEST DATA FOR 3 MBPS .....	31
<b>10. TIME OF OCCUPANCY .....</b>	<b>34</b>
10.1 OPERATING ENVIRONMENT .....	34
10.2 TEST SET-UP .....	34
10.3 TEST EQUIPMENT USED .....	34
10.4 TEST DATA FOR 1 MBPS .....	35
10.5 TEST DATA FOR 2 MBPS .....	38
10.6 TEST DATA FOR 3 MBPS .....	41
<b>11. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>44</b>
11.1 OPERATING ENVIRONMENT .....	44
11.2 TEST SET-UP .....	44
11.3 TEST EQUIPMENT USED .....	44
11.4 TEST DATA FOR 1 MBPS .....	45
11.5 TEST DATA FOR 2 MBPS .....	48
11.6 TEST DATA FOR 3 MBPS .....	51
<b>12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND .....</b>	<b>54</b>
12.1 OPERATING ENVIRONMENT .....	54
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT .....	54
12.3 TEST SET-UP FOR RADIATED MEASUREMENT .....	54
12.4 TEST EQUIPMENT USED .....	54
12.5 TEST DATA FOR CONDUCTED EMISSION .....	55
12.5.1 Test data for 1 Mbps .....	55
12.5.2 Test data for 2 Mbps .....	61
12.5.3 Test data for 3 Mbps .....	67

<b>12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION</b> .....	<b>73</b>
<i>12.6.1 Radiated Emission which fall in the Restricted Band</i> .....	73
<i>12.6.2 Spurious &amp; Harmonic Radiated Emission above 1 GHz</i> .....	76
<i>12.6.3 Spurious Radiated Emission</i> .....	79
<b>13. CONDUCTED EMISSION TEST</b> .....	<b>85</b>
<b>13.1 OPERATING ENVIRONMENT</b> .....	85
<b>13.2 TEST SET-UP</b> .....	85
<b>13.3 TEST EQUIPMENT USED</b> .....	85
<b>13.4 TEST DATA FOR TRANSMITTING MODE_1 MBPS</b> .....	86
<b>13.5 TEST DATA FOR TRANSMITTING MODE_2 MBPS</b> .....	88
<b>13.6 TEST DATA FOR TRANSMITTING MODE_3 MBPS</b> .....	90

### Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
W15DR-D013	December 18, 2015	Initial Issue	All

**1. VERIFICATION OF COMPLIANCE**

APPLICANT : LG Electronics USA  
 ADDRESS : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States, 7632  
 CONTACT PERSON : Jongchul, Lee / Director  
 TELEPHONE NO : +82-31-610-9606  
 FCC ID : BEJ-MIBPQMIN  
 MODEL NAME : L69VW2  
 SERIAL NUMBER : N/A  
 DATE : December 18, 2015

EQUIPMENT CLASS	<i>DSS – PART 15 SPREAD SPECTRUM TRANSMITTER</i>
KIND OF EQUIPMENT	MIB2 Entry
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

### 2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

## 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 301-14, Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862 Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-666/ T-1842 IC (Industry Canada) – Registration No. Site# 3736-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

### 3. GENERAL INFORMATION

#### 3.1 Product Description

The LG Electronics USA, Model L69VW2 (referred to as the EUT in this report) is a MIB2 Entry. The product specification described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	MIB2 Entry	
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz	
RF OUTPUT POWER	1 Mbps	-2.11 dBm
	2 Mbps	-0.35 dBm
	3 Mbps	0.11 dBm
NUMBER OF CHANNEL	79 Channels	
MODULATION TYPE	GFSK for 1 Mbps, DQPSK for 2 Mbps, 8-DPSK for 3 Mbps	
ANTENNA TYPE	Chip Antenna	
ANTENNA GAIN	4.56 dBi	
LIST OF EACH OSC. OR CRYSTAL. FREQ.(FREQ.>=1 MHz)	55.466670 MHz	
RATED SUPPLY VOLTAGE	DC 12 V	

#### 3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
L69VW2	Basic Model Brand name: Volkswagen	<input checked="" type="checkbox"/>
L69SK2	These models are identical to basic model except for the model name only. Brand name: Skoda	<input type="checkbox"/>
L69SE2	These models are identical to basic model except for the model name only. Brand name: Seat	<input type="checkbox"/>

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

### 4. EUT MODIFICATIONS

-. None

## 5. SYSTEM TEST CONFIGURATION

### 5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
LCD	N/A	N/A	N/A
SD Card Slot	N/A	EAX66507301 VER1.2	N/A
Main Board	N/A	EAX66283001 Ver. 1.6	N/A
Panel Board	N/A	EAX66406404(VER1.3)	N/A

### 5.2 Peripheral equipment

Model	Manufacturer	Description	Connected to
N/A	N/A	N/A	N/A

### 5.3 Mode of operation during the test

For Bluetooth function testing, software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. The EUT was set at Low Channel (2 402 MHz), Middle Channel (2 441 MHz), and High Channel (2 480 MHz) with each data transfer rate, 1 Mbps, 2 Mbps, and 3 Mbps. To get a maximum radiated emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this test report.

### 5.4 Configuration of Test System

**Line Conducted Test:** The EUT was tested in a charging mode. The EUT was connected to USB and the power of USB was connected to Adapter. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2009 7.3.3 to determine the worse operating conditions.

**Radiated Emission Test:** The EUT was tested in a charging mode and Transmitter mode. Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2009 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

### 5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**Antenna Construction:**

The transmitter antenna of the EUT is a Chip antenna, so no consideration of replacement by the user.

## 6. PRELIMINARY TEST

### 6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

### 6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


## 7. MINIMUM 20 dB BANDWIDTH

### 7.1 Operating environment

Temperature : 23.2 °C  
 Relative humidity : 44.3 % R.H.

### 7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

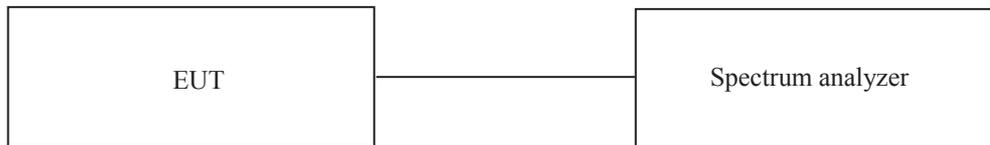

### 7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	Apr. 29, 2015 (1Y)


All test equipment used is calibrated on a regular basis.

### 7.4 Test data for 1 Mbps


- Test Date : November 17, 2015

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	929.10
Middle	2 441	929.10
High	2 480	929.10


Tested by: Min-Gu, Ji / Engineer

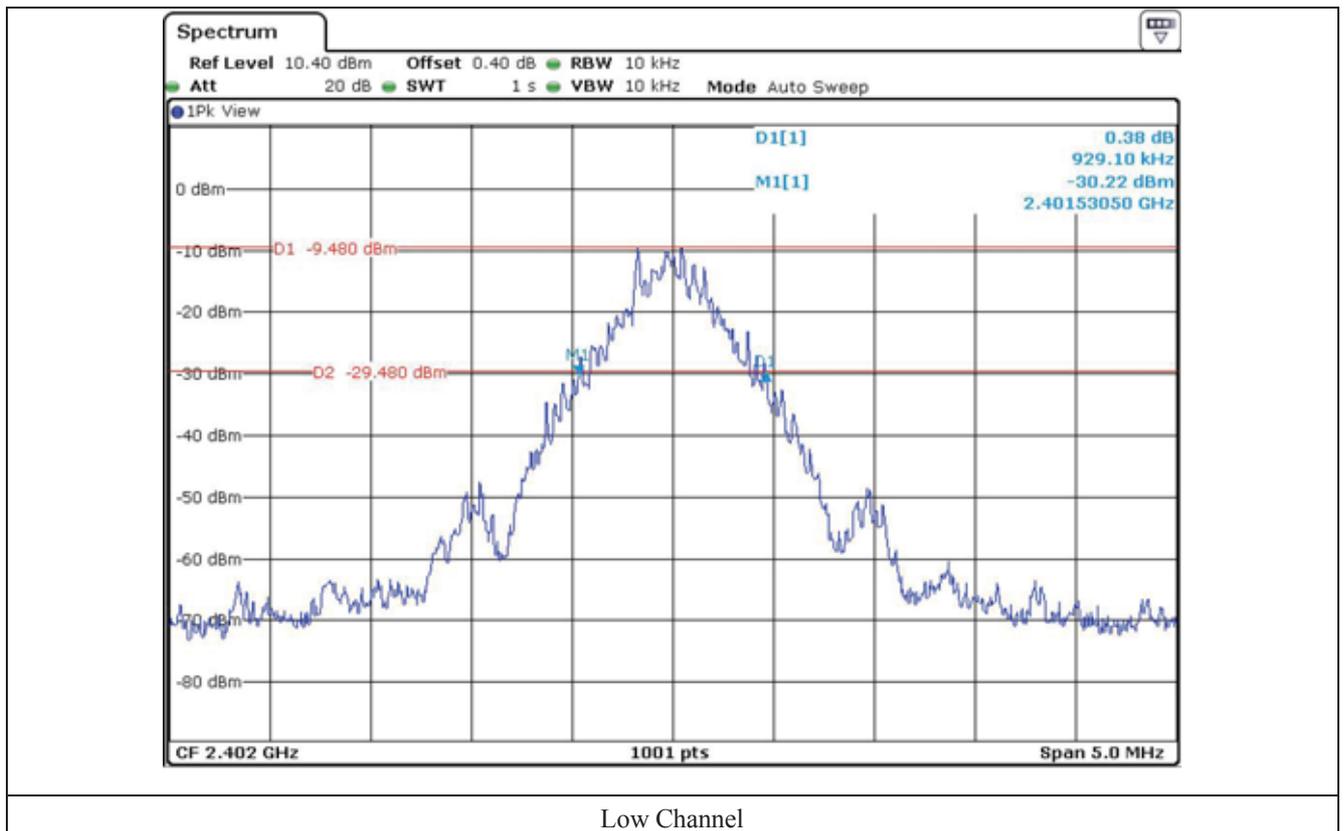

Low Channel

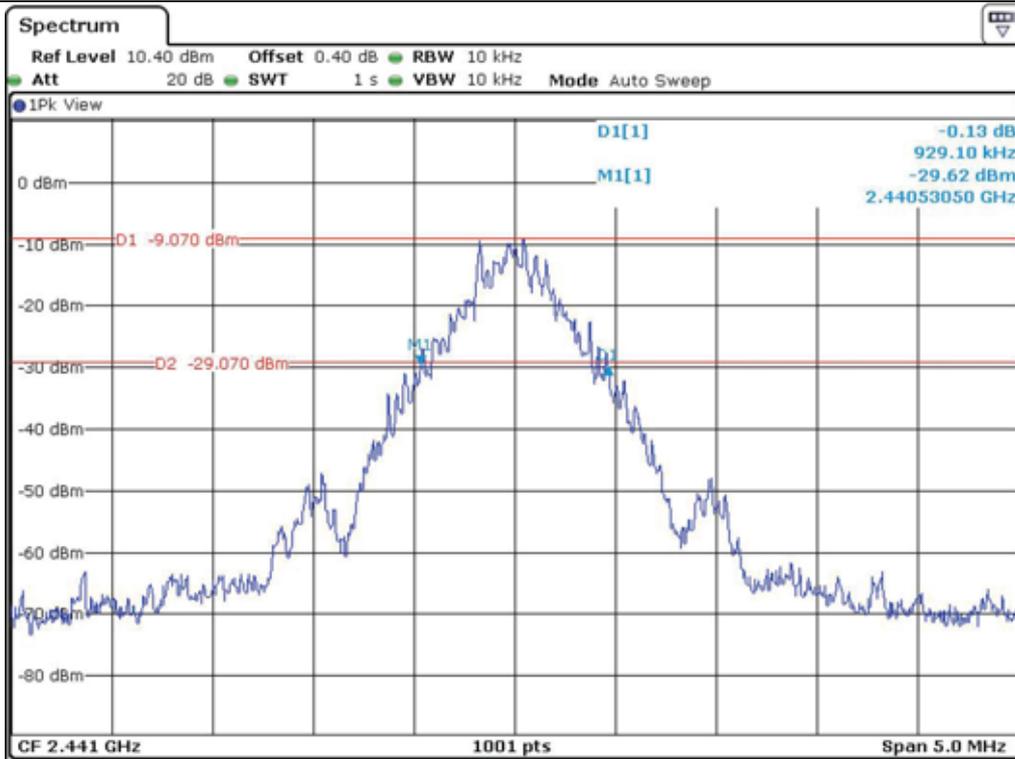

Middle Channel

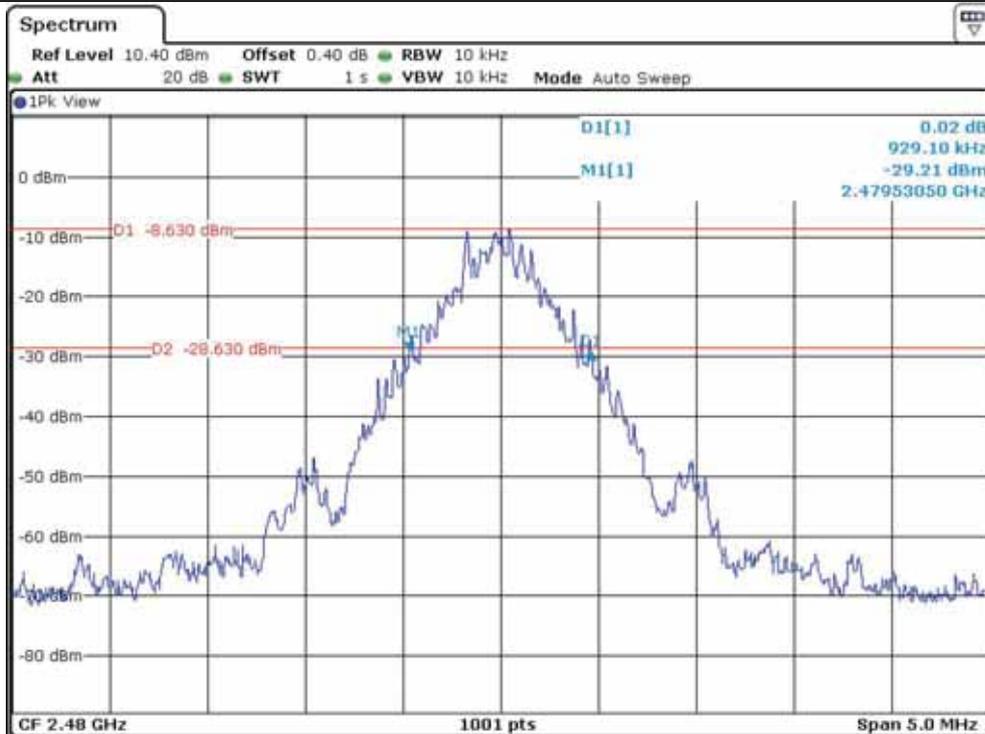


High Channel

### 7.5 Test data for 2 Mbps


- Test Date : November 17, 2015

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1303.70
Middle	2 441	1308.70
High	2 480	1303.70


Tested by: Min-Gu, Ji / Engineer

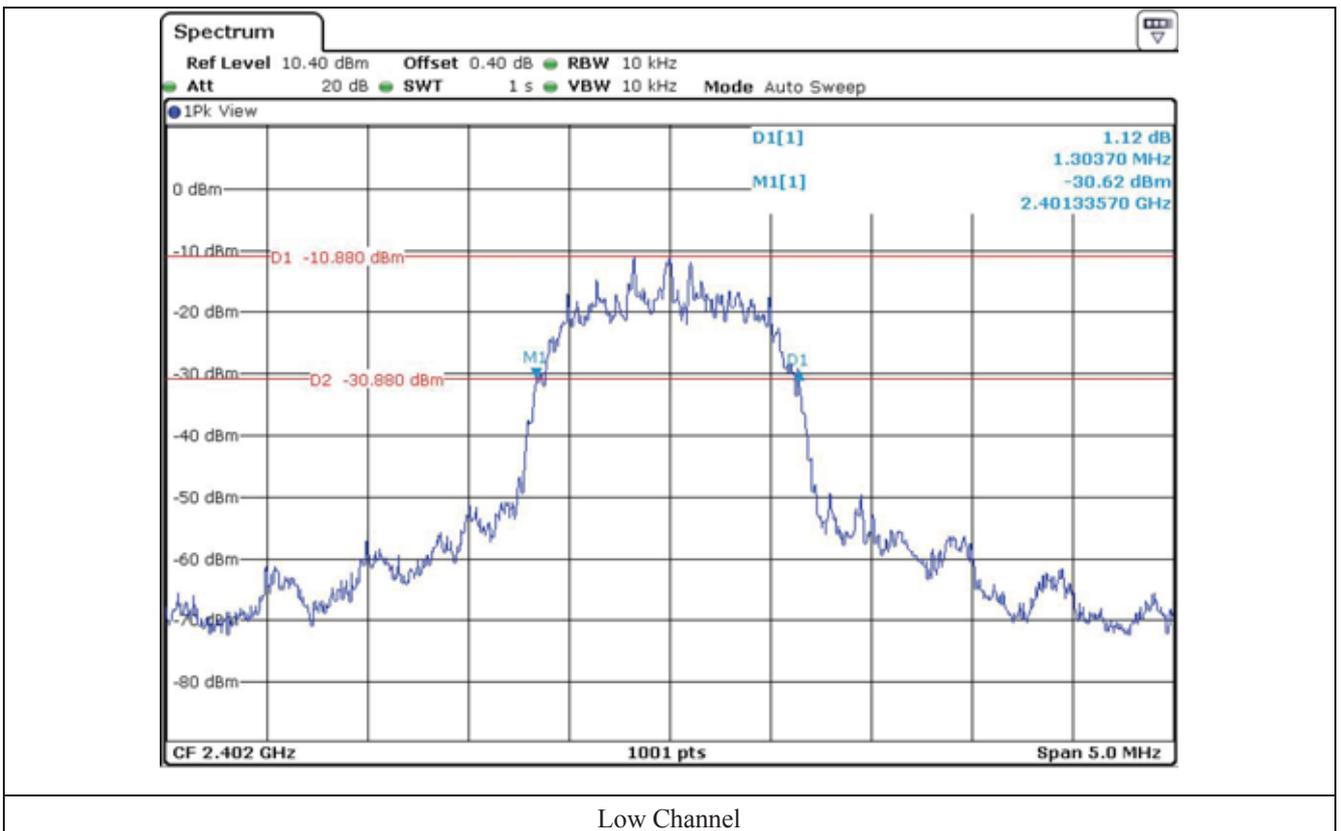

Low Channel

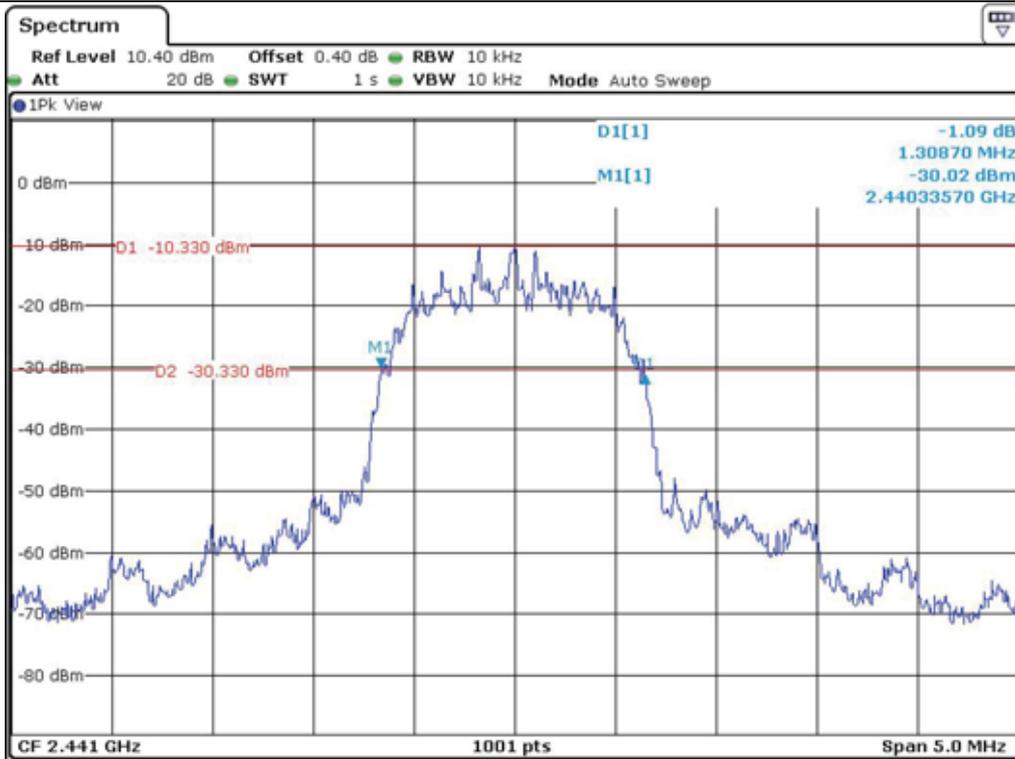

Middle Channel

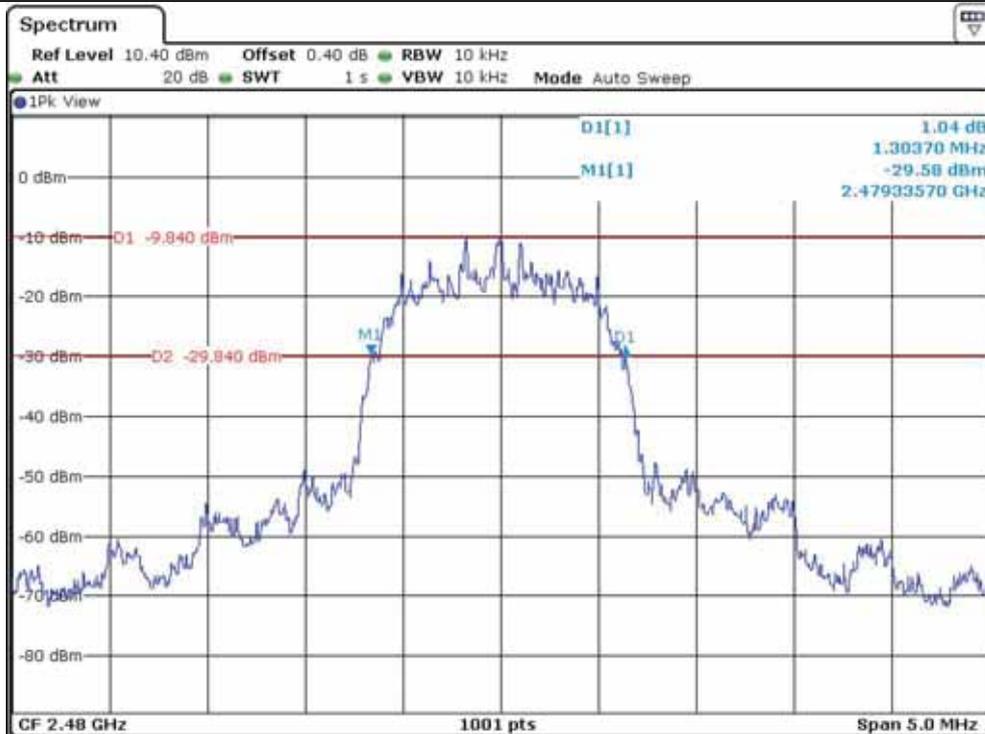


High Channel


### 7.6 Test data for 3 Mbps

- Test Date : November 17, 2015


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1273.70
Middle	2 441	1268.70
High	2 480	1268.70

Tested by: Min-Gu, Ji / Engineer

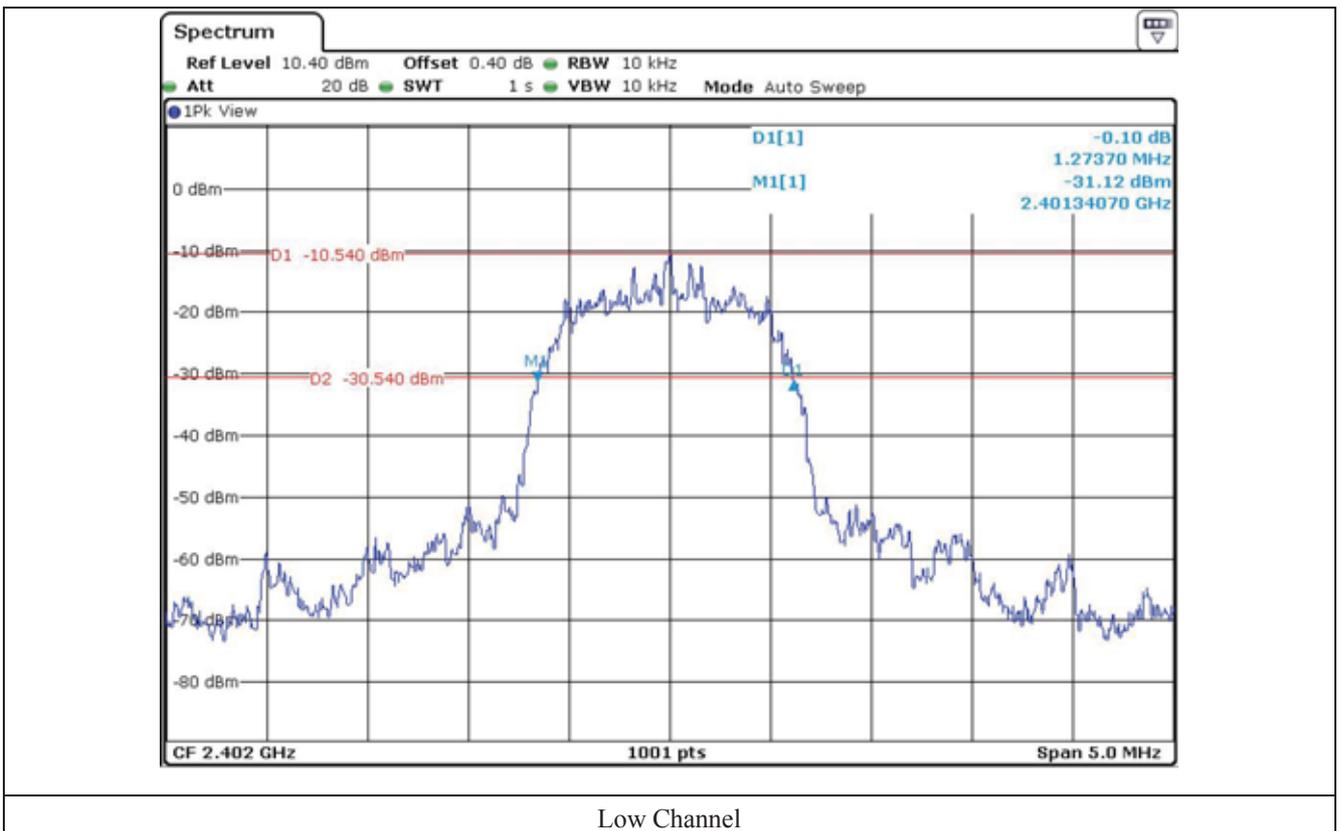

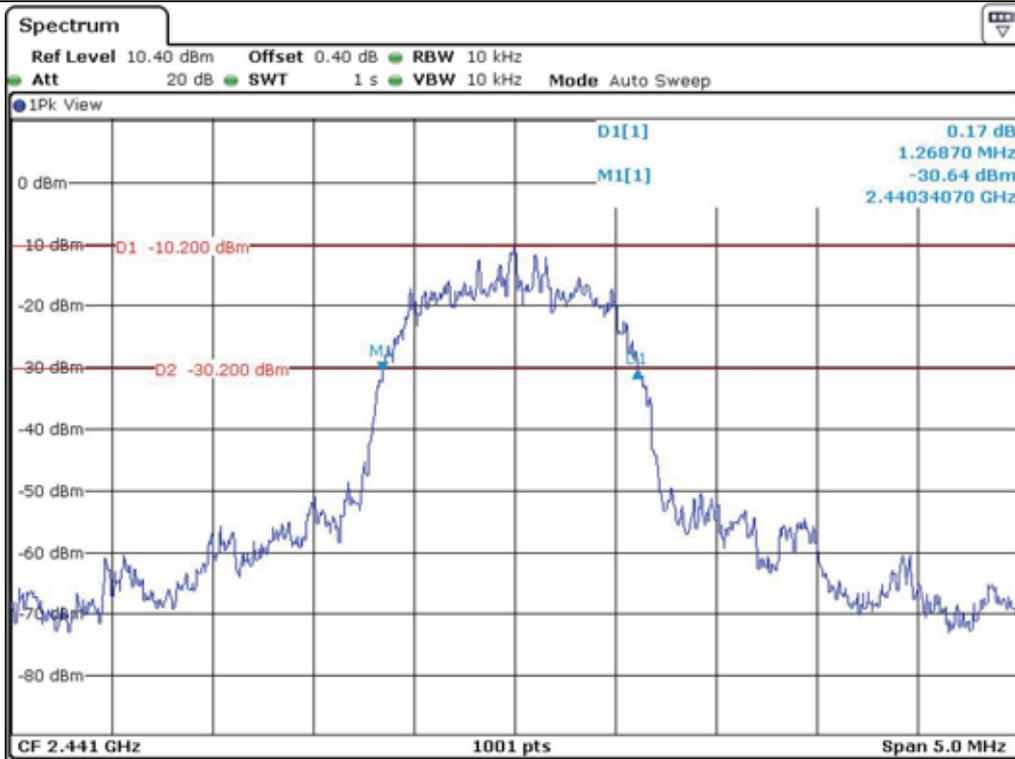

Middle Channel

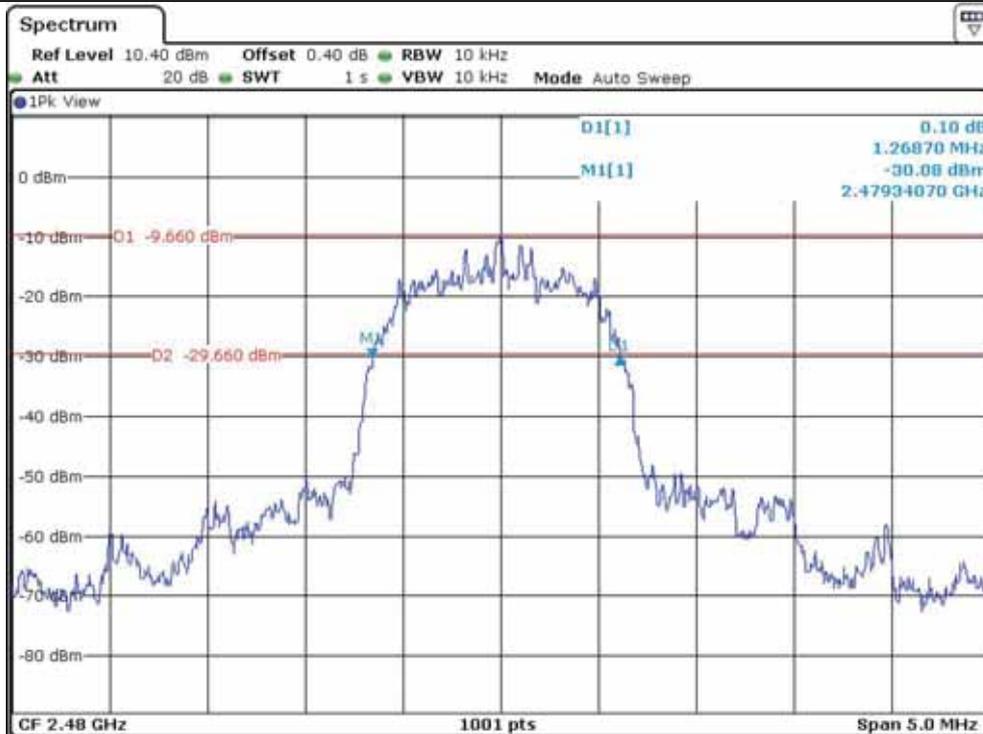

High Channel

## 8. HOPPING FREQUENCY SEPARATION

### 8.1 Operating environment

Temperature : 23.2 °C  
 Relative humidity : 44.3 % R.H.

### 8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.



### 8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	Apr. 29, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


### 8.4 Test data for 1 Mbps

- Test Date : November 17, 2015

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	619.40	Separated by a minimum of 25 kHz

Tested by: Min-Gu, Ji / Engineer

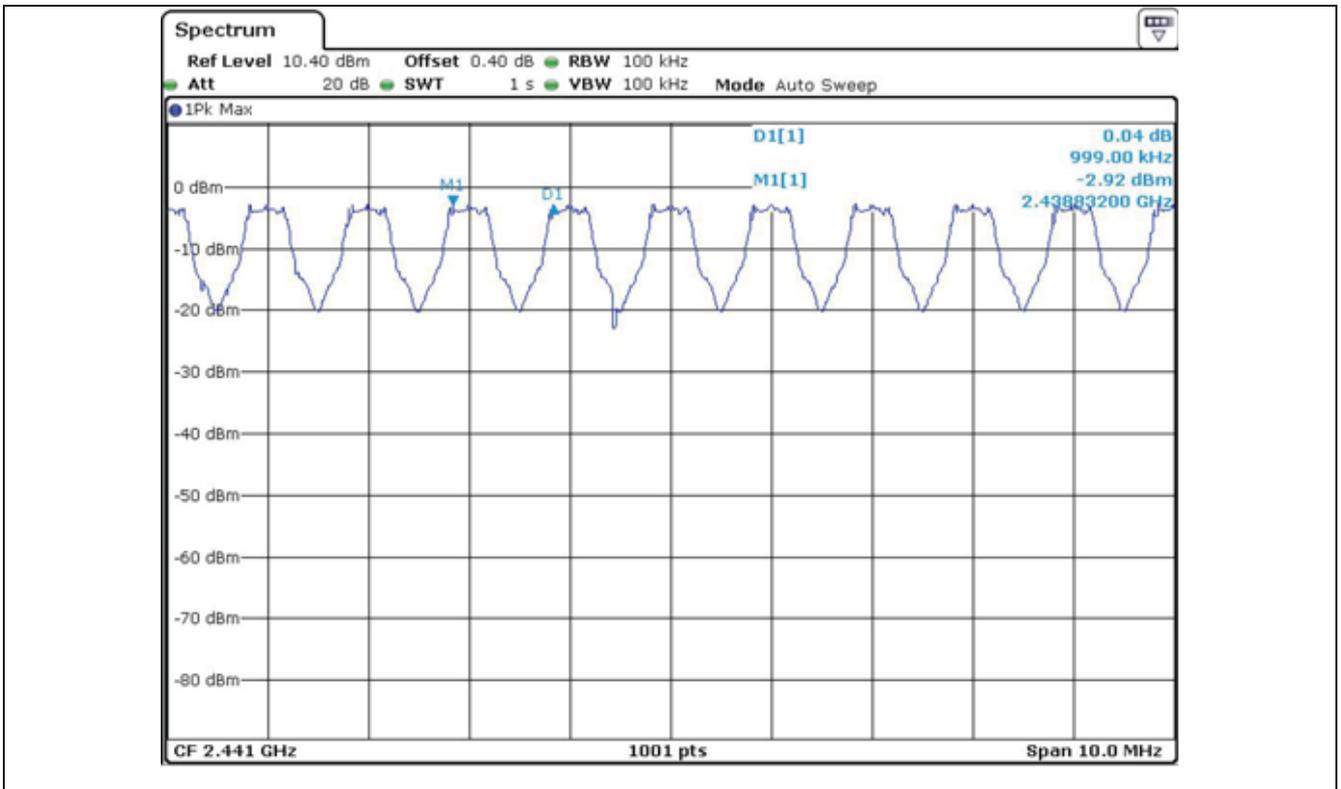


### 8.5 Test data for 2 Mbps

- Test Date : November 17, 2015

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	872.47	Separated by a minimum of 25 kHz

Tested by: Min-Gu, Ji / Engineer

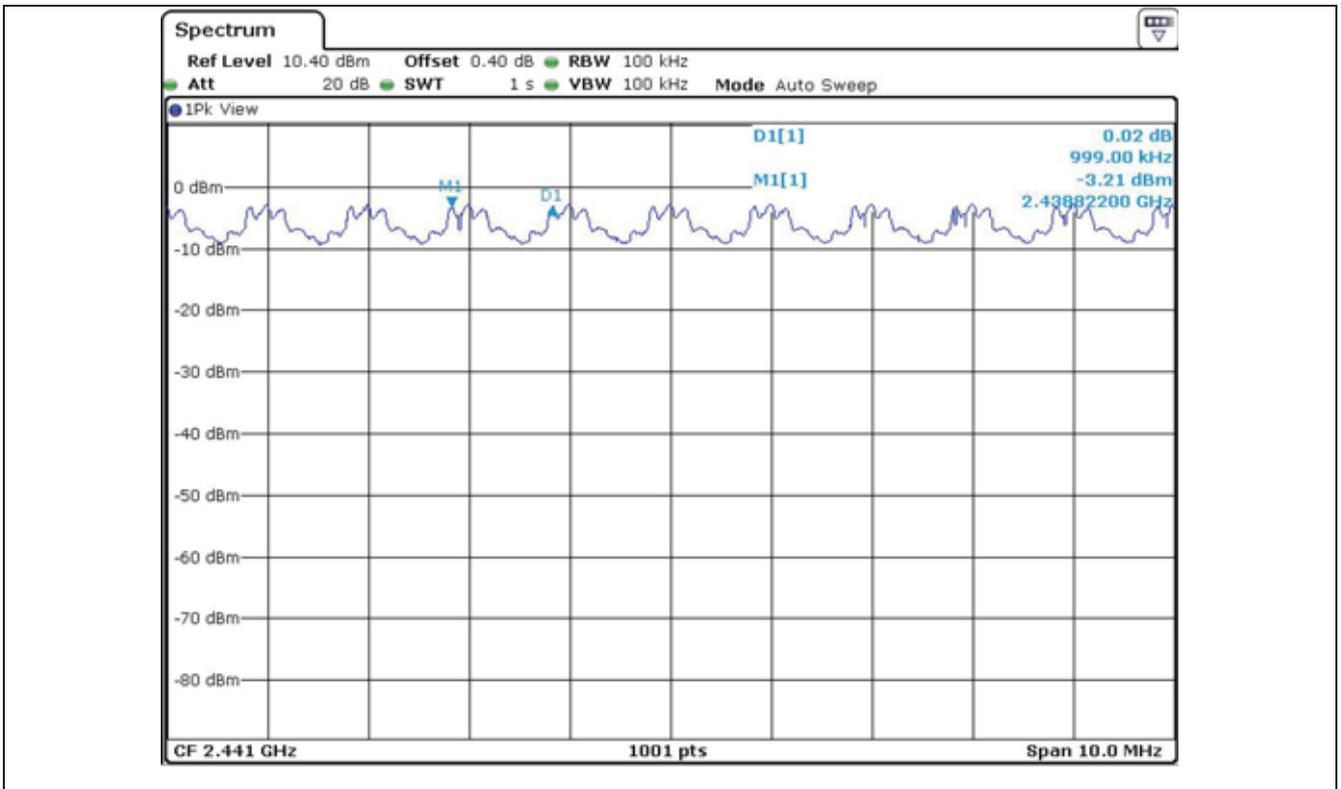


### 8.6 Test data for 3 Mbps

- Test Date : November 17, 2015

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	845.80	Separated by a minimum of 25 kHz

Tested by: Min-Gu, Ji / Engineer

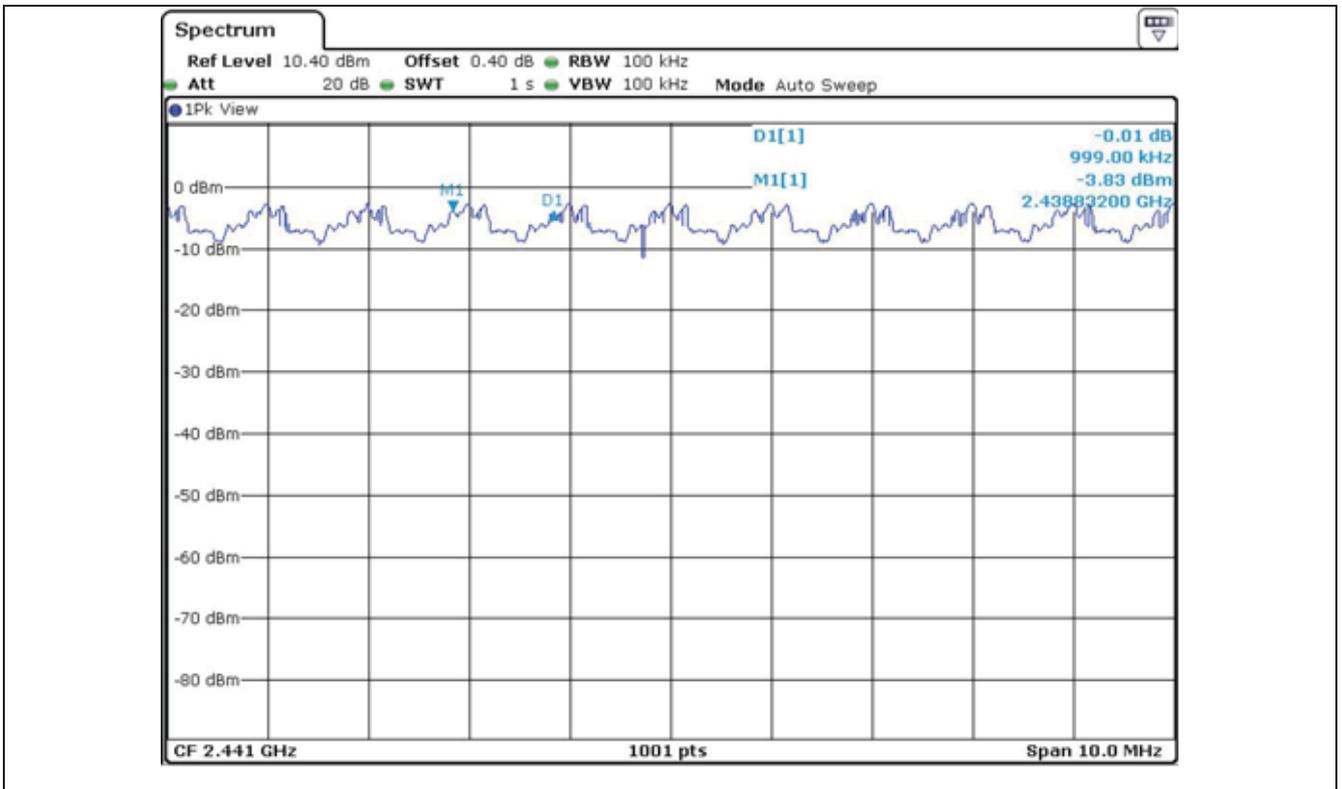


## 9. NUMBER OF HOPPING CHANNELS

### 9.1 Operating environment

Temperature : 23.2 °C  
 Relative humidity : 44.3 % R.H.

### 9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 1 MHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

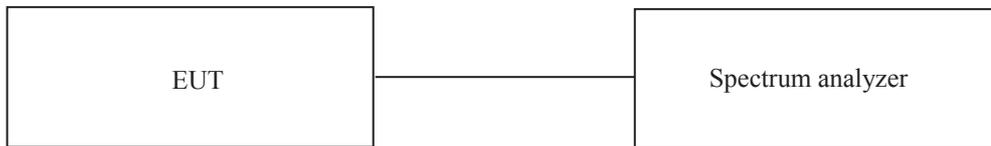

### 9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	Apr. 29, 2015 (1Y)


All test equipment used is calibrated on a regular basis.


### 9.4 Test data for 1 Mbps

- Test Date : November 17, 2015
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64

Tested by: Min-Gu, Ji / Engineer

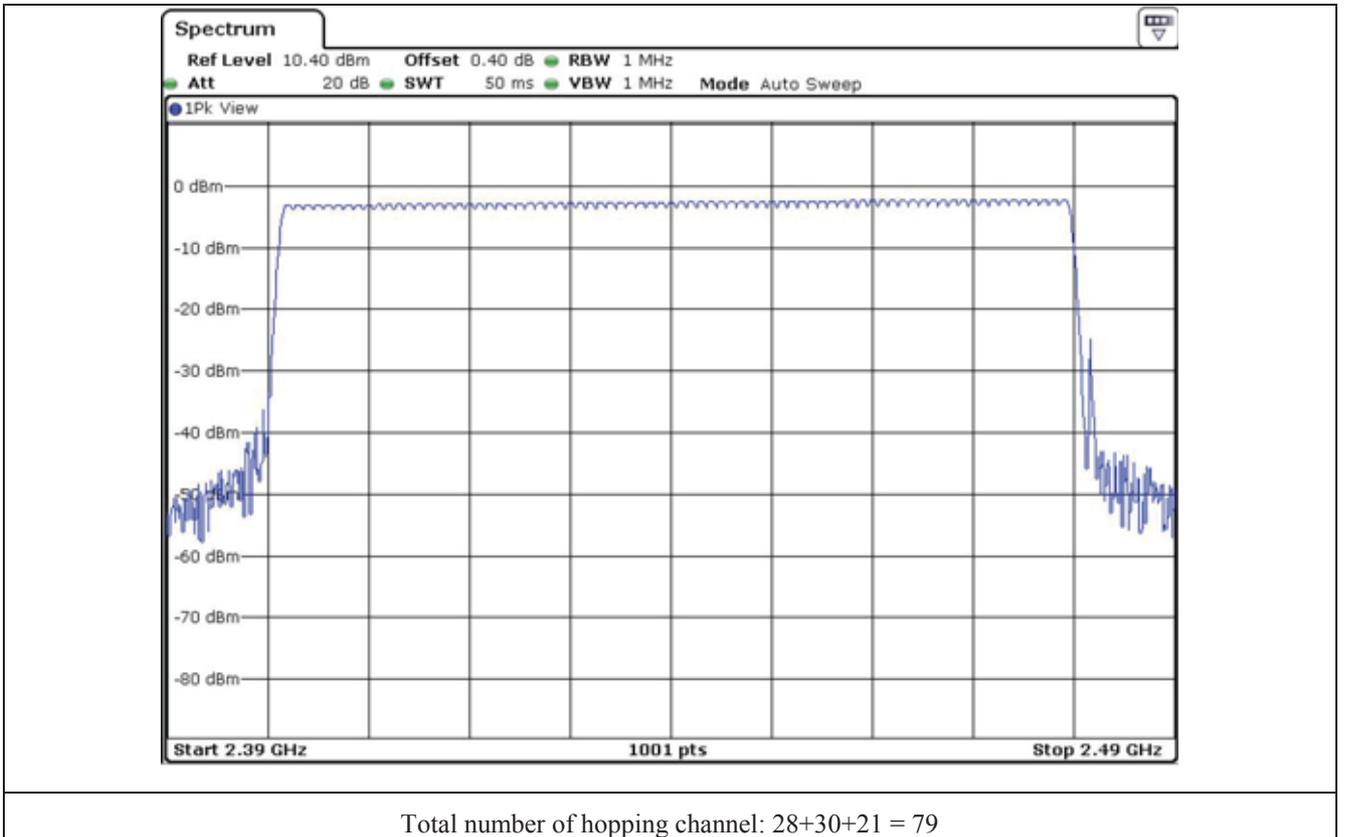


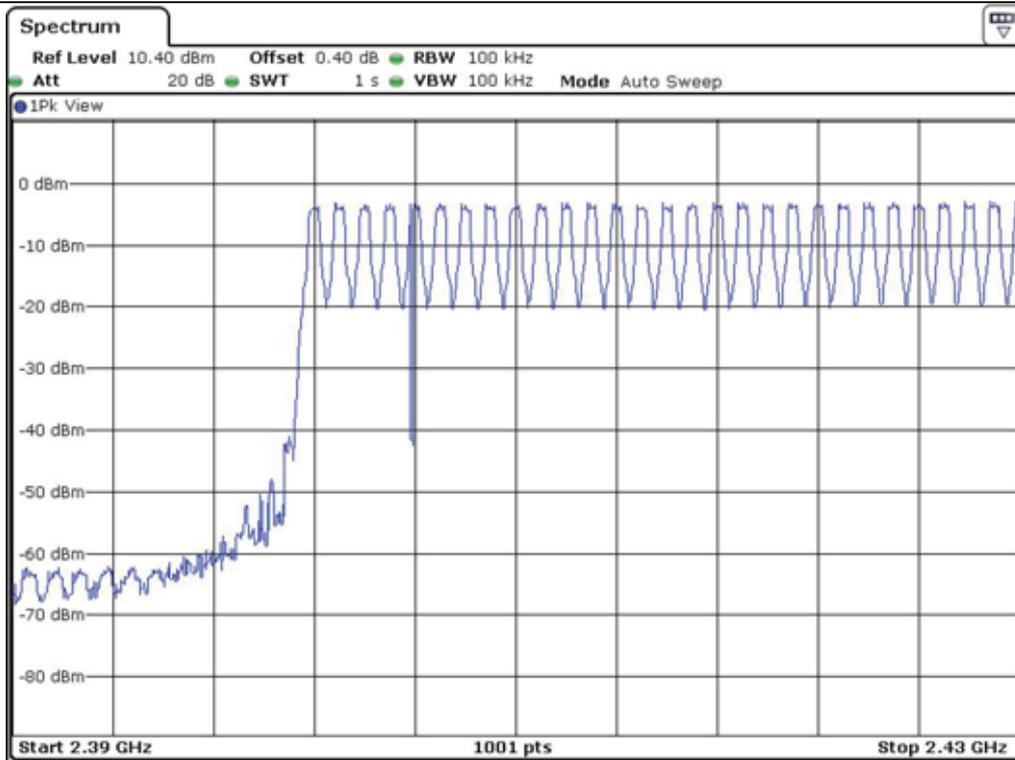

Number of hopping channel: 28

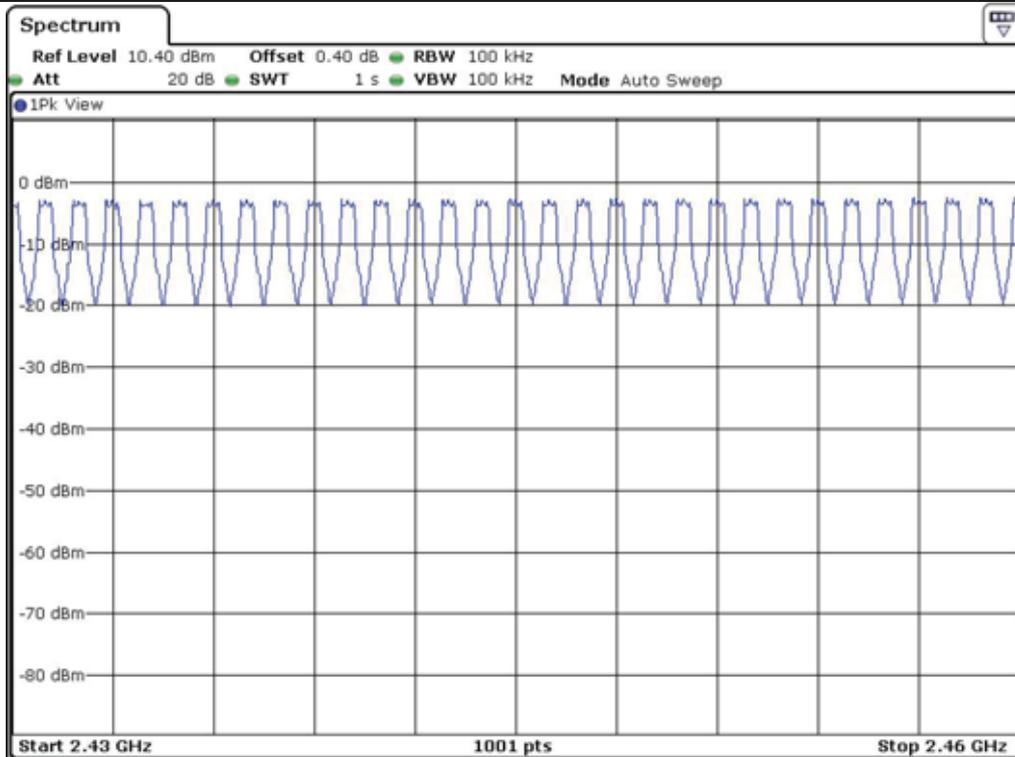

Number of hopping channel: 30

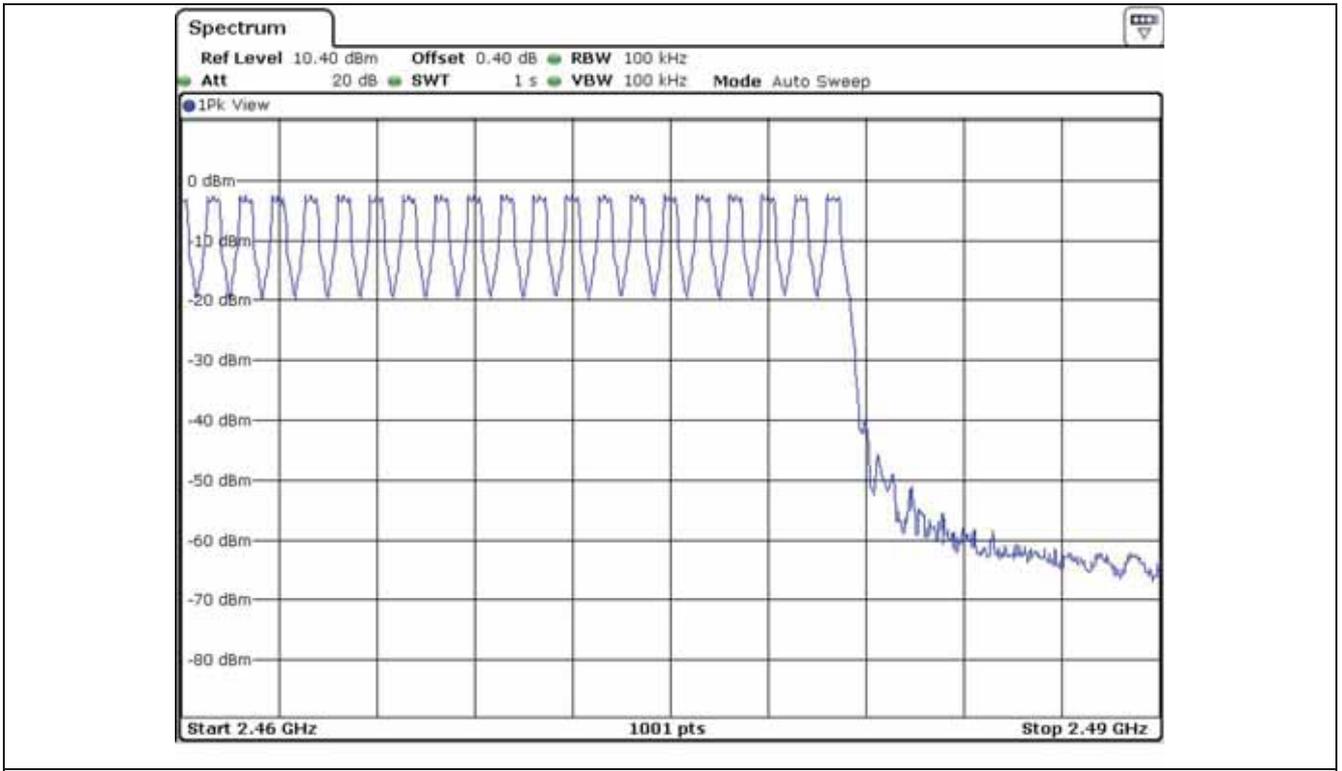


Number of hopping channel: 21


### 9.5 Test data for 2 Mbps

- Test Date : November 17, 2015
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

Tested by: Min-Gu, Ji / Engineer

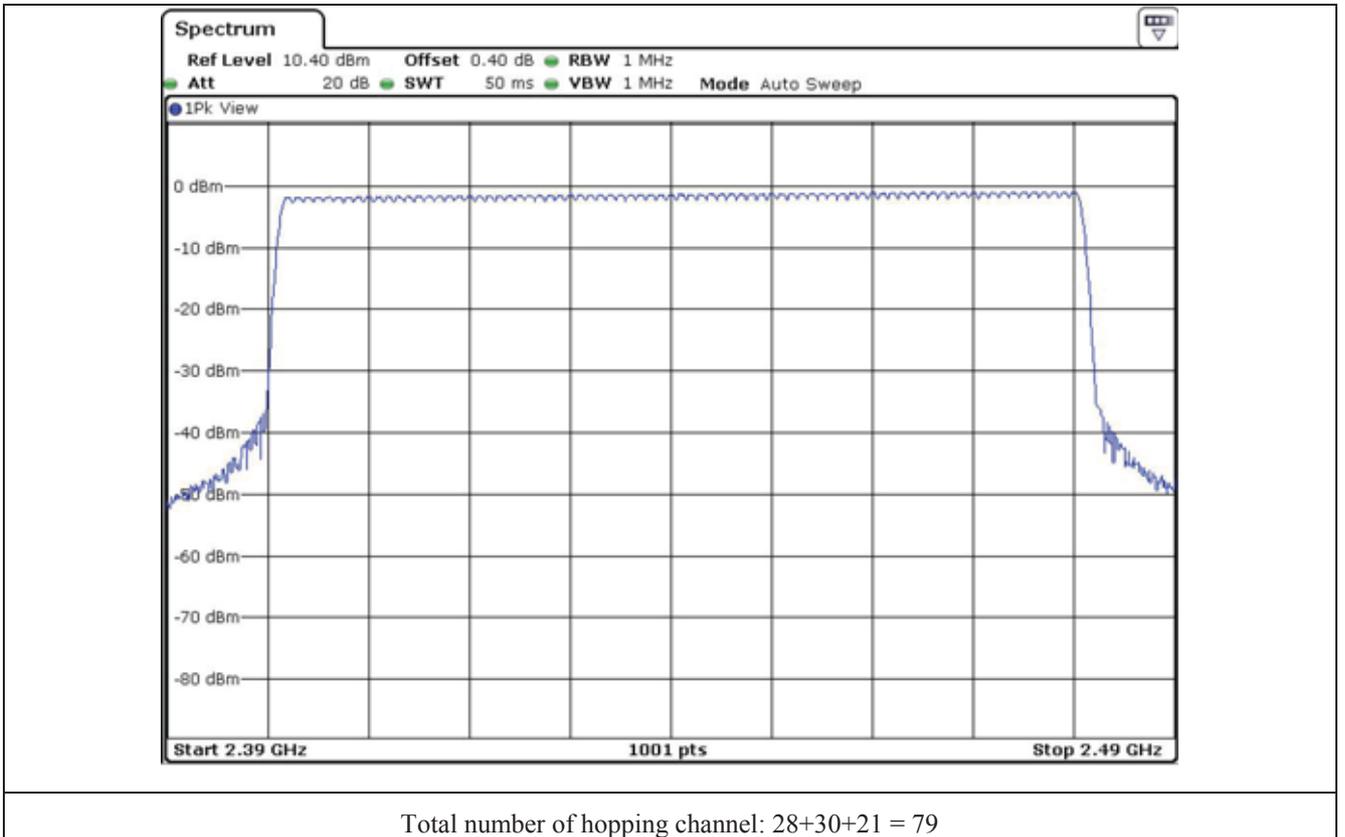


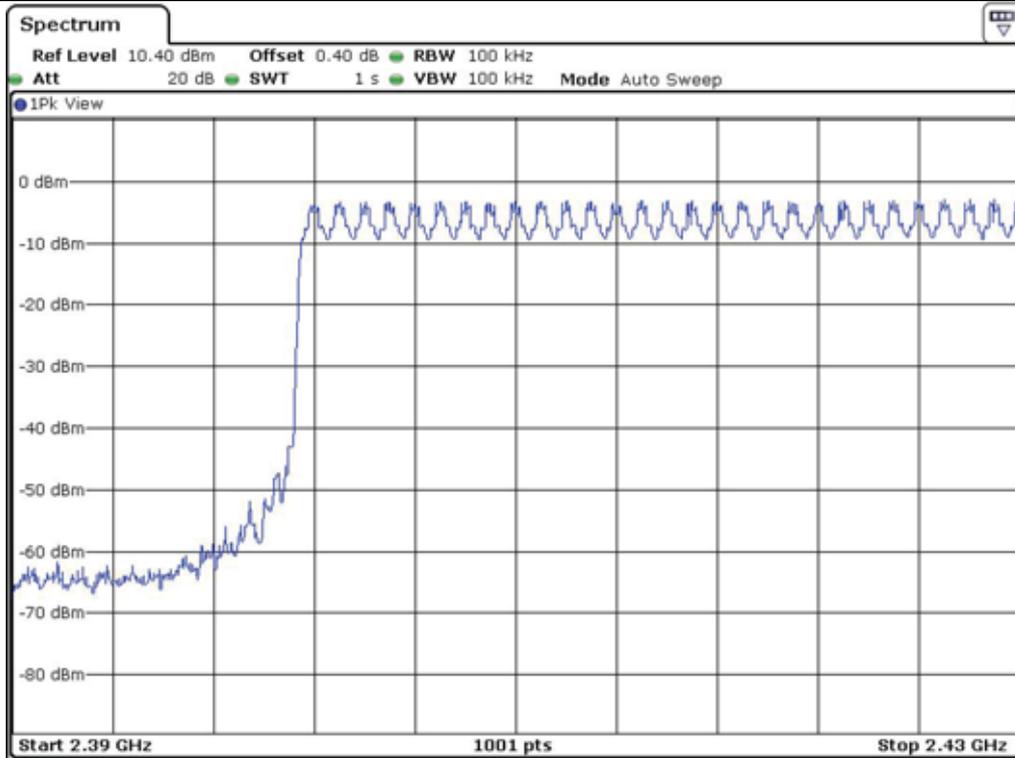

Number of hopping channel: 28

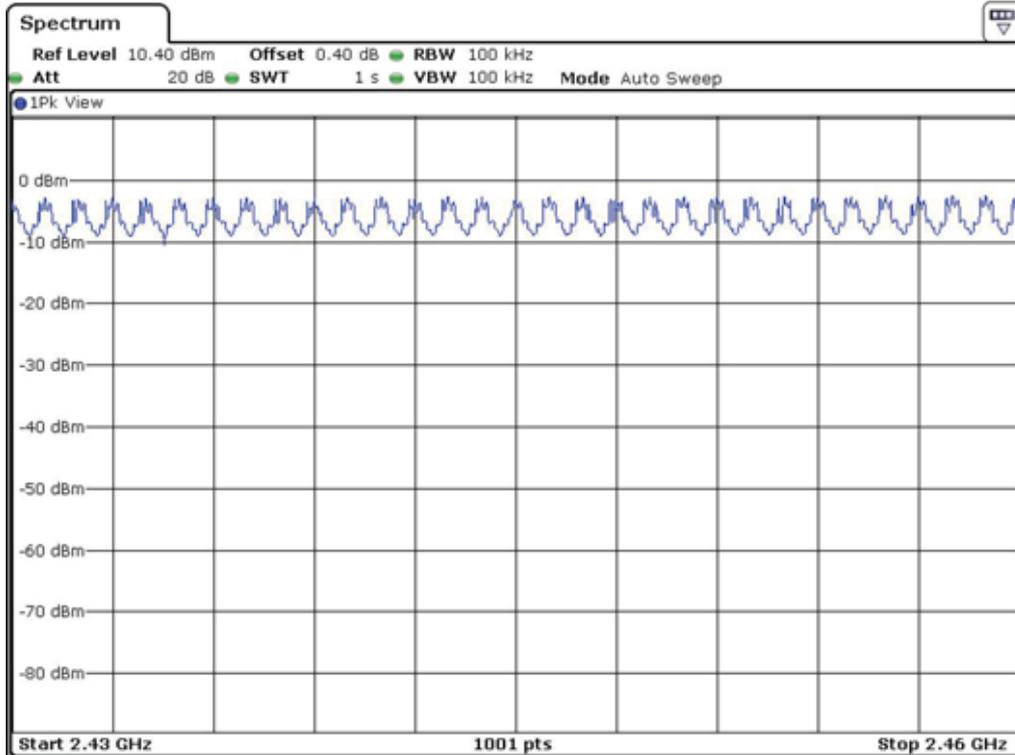

Number of hopping channel: 30

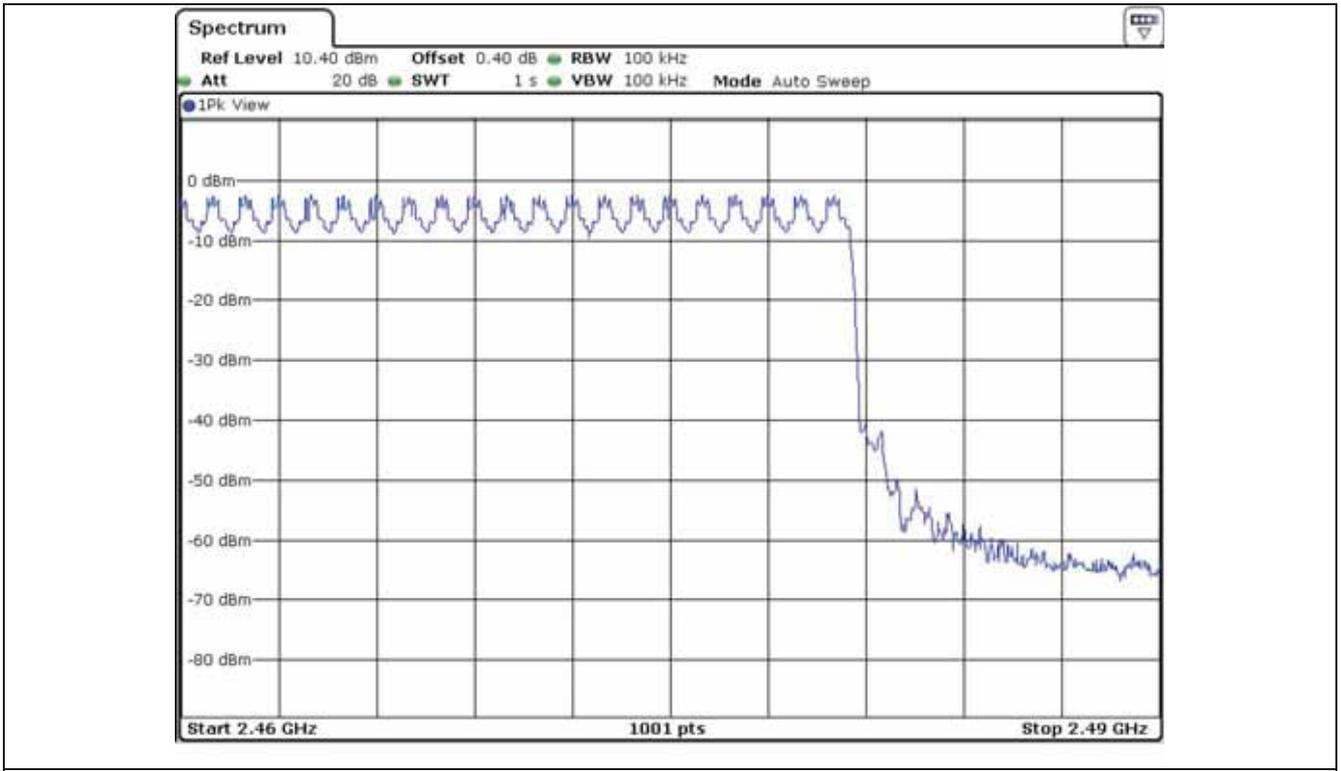


Number of hopping channel: 21


### 9.6 Test data for 3 Mbps

- Test Date : November 17, 2015
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64

Tested by: Min-Gu, Ji / Engineer

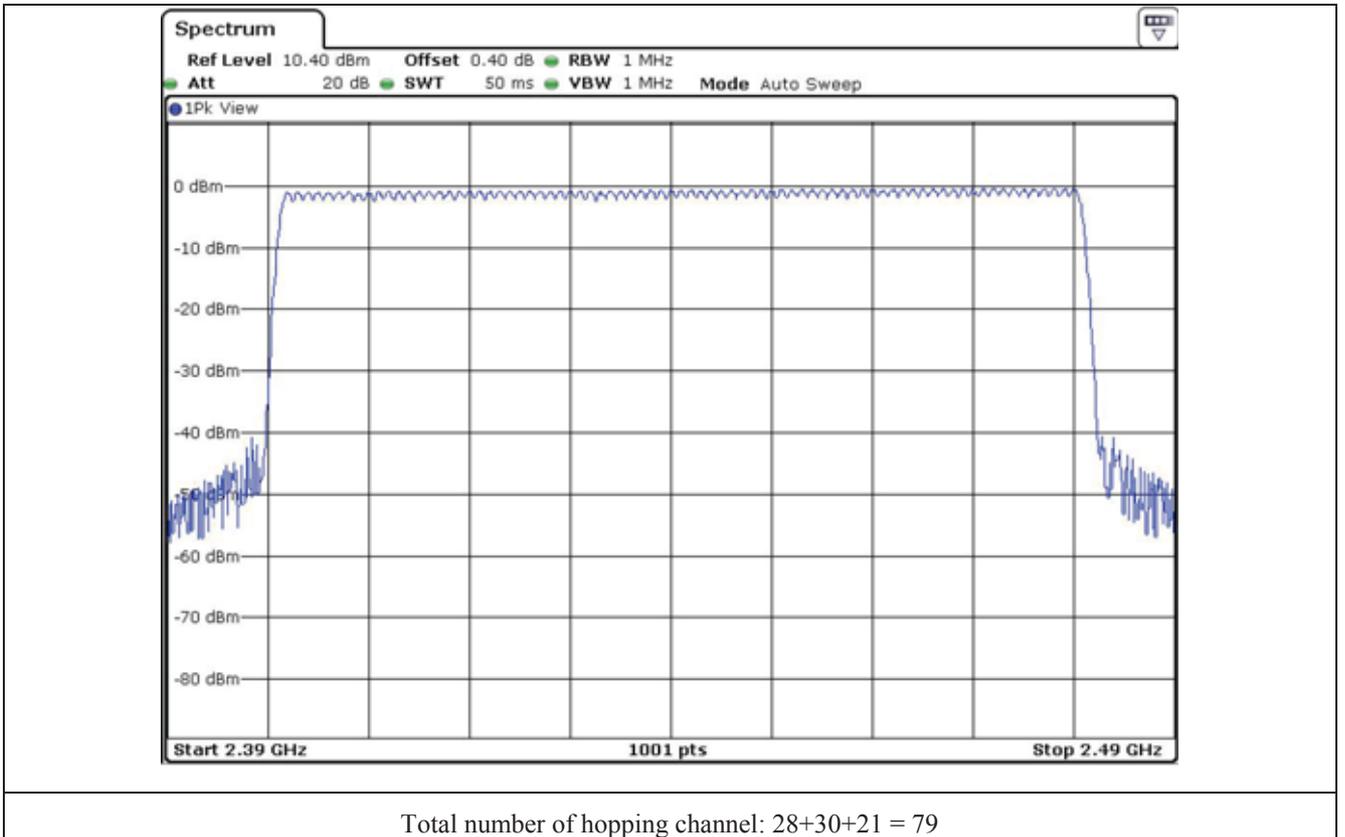


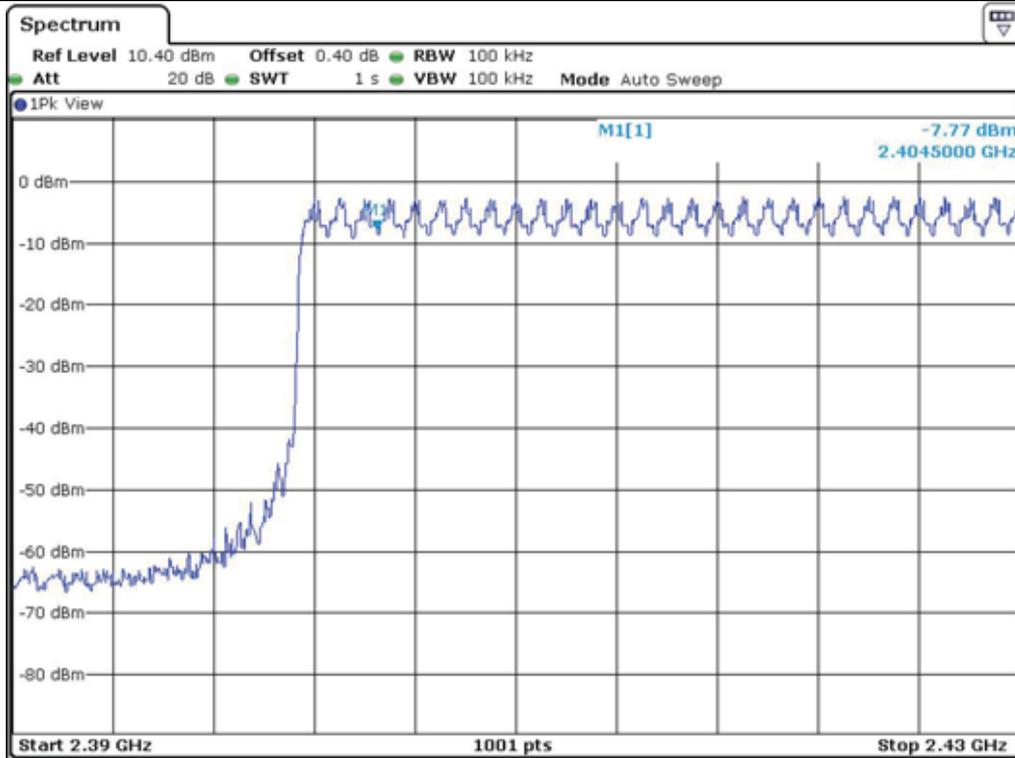

Number of hopping channel: 28

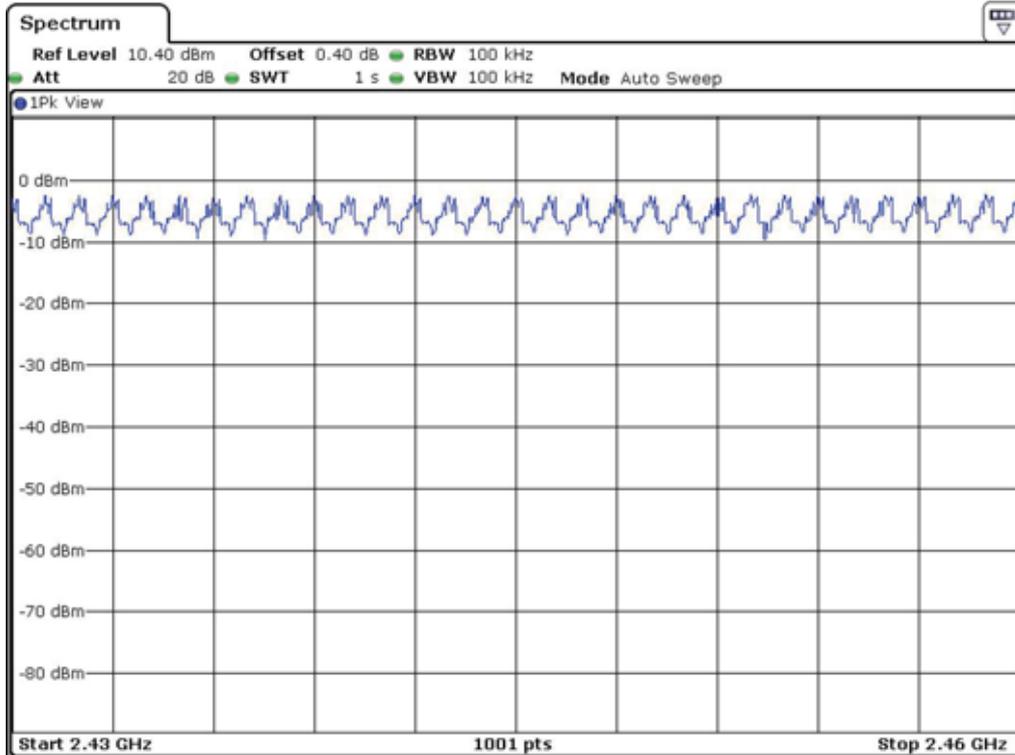

Number of hopping channel: 30

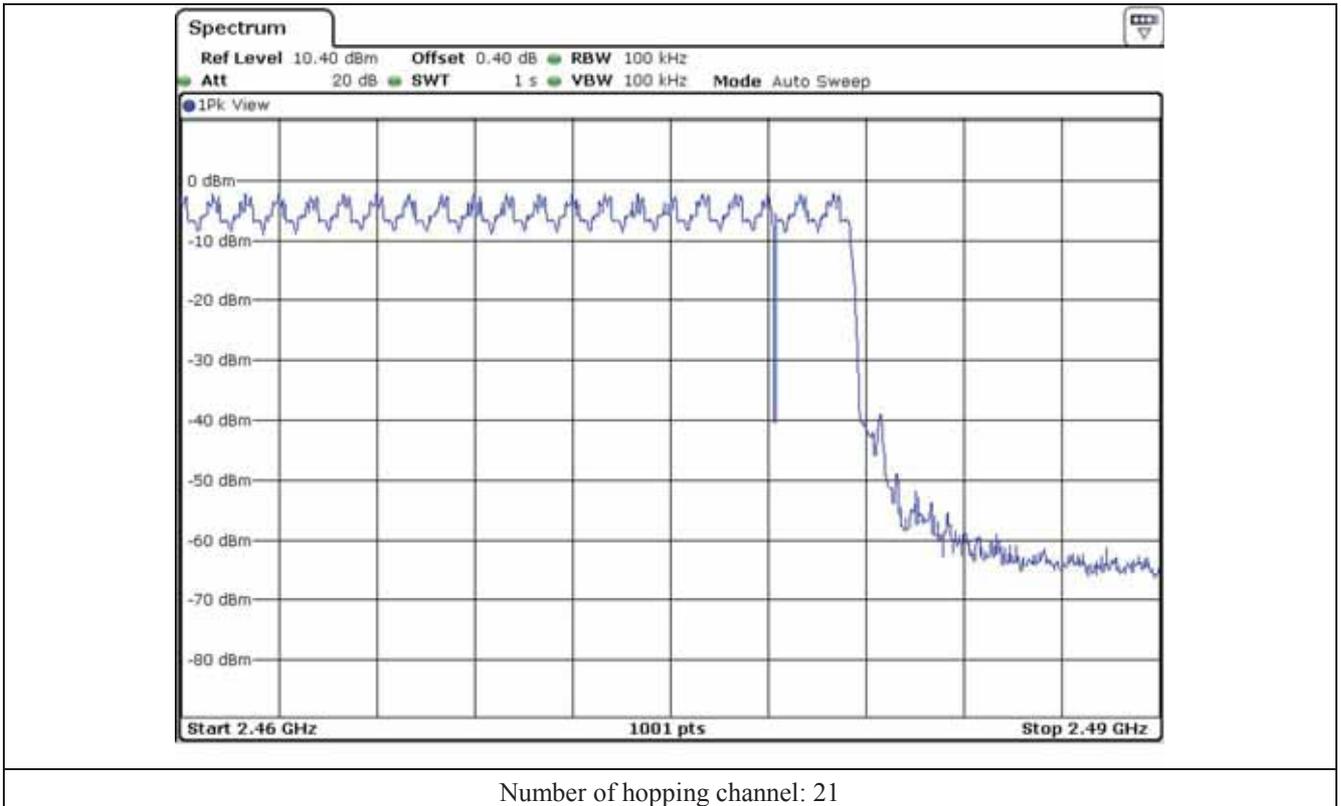


## 10. TIME OF OCCUPANCY

### 10.1 Operating environment

Temperature : 23.2 °C  
 Relative humidity : 44.3 % R.H.

### 10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

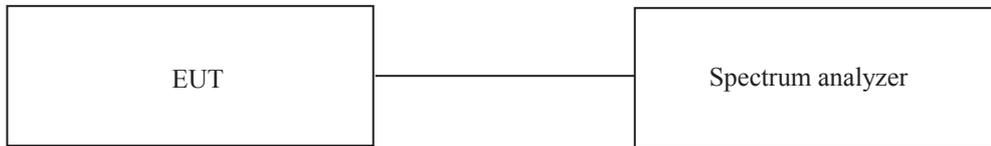

### 10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	Apr. 29, 2015 (1Y)

All test equipment used is calibrated on a regular basis.

**10.4 Test data for 1 Mbps**

- Test Date : November 17, 2015

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.416	10.13	31.6	133.16	400	PASS
DH3	1.676	5.06	31.6	267.99	400	
DH5	2.930	3.38	31.6	312.95	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.




**Tested by: Min-Gu, Ji / Engineer**

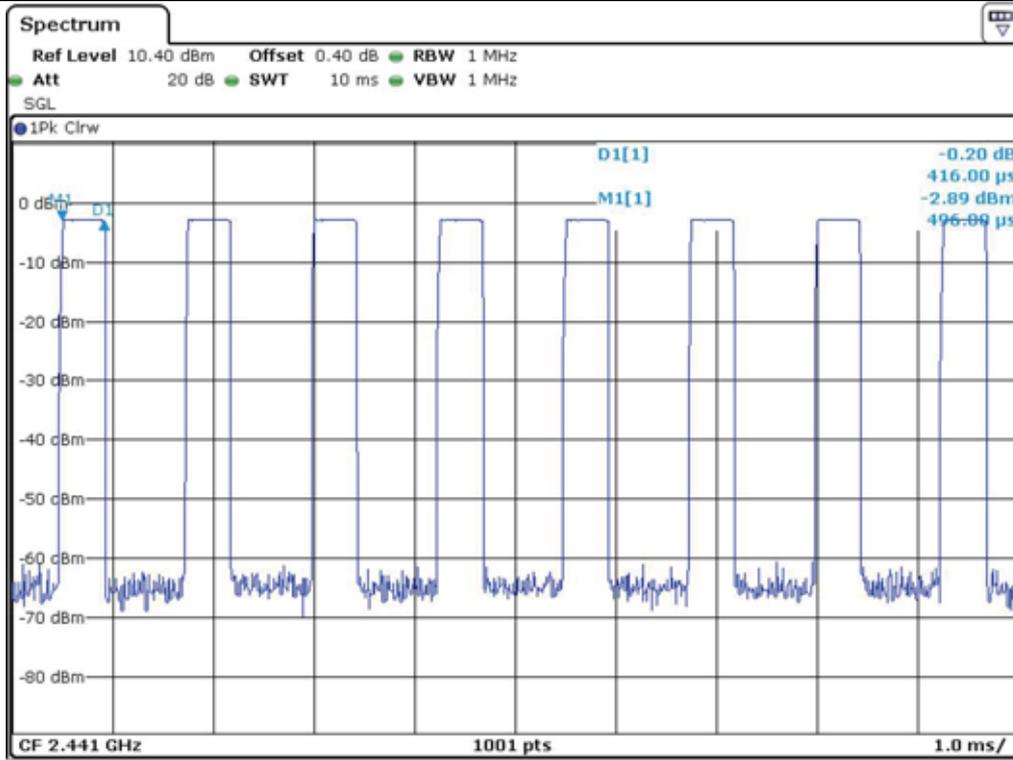

DH1

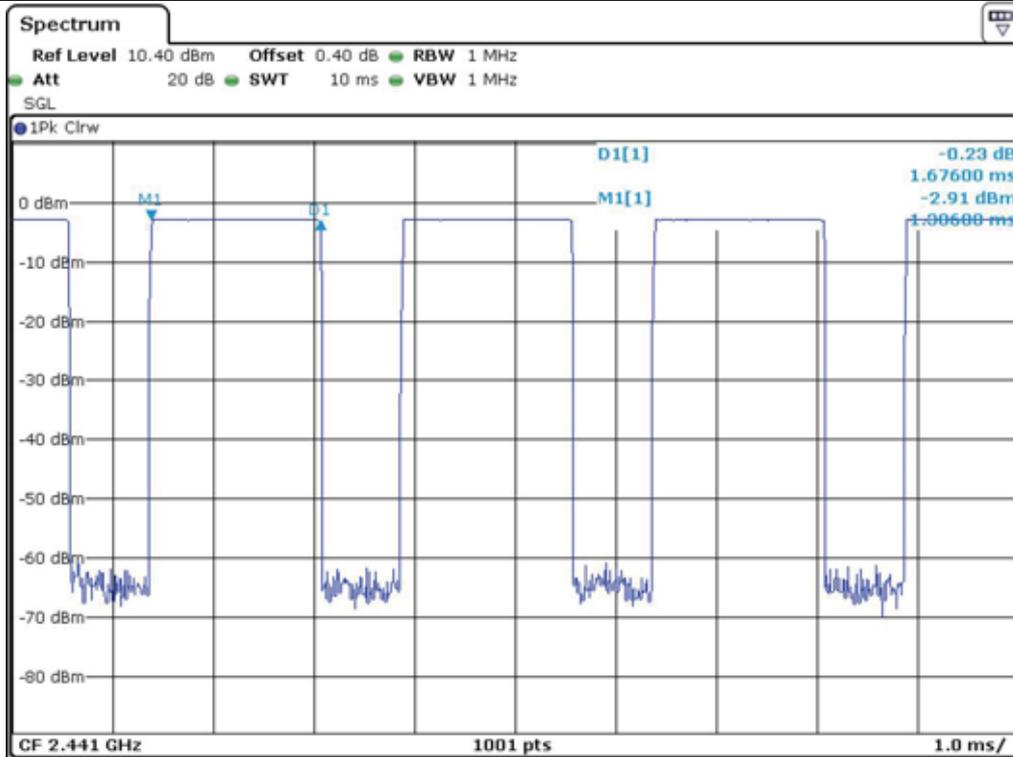

DH3

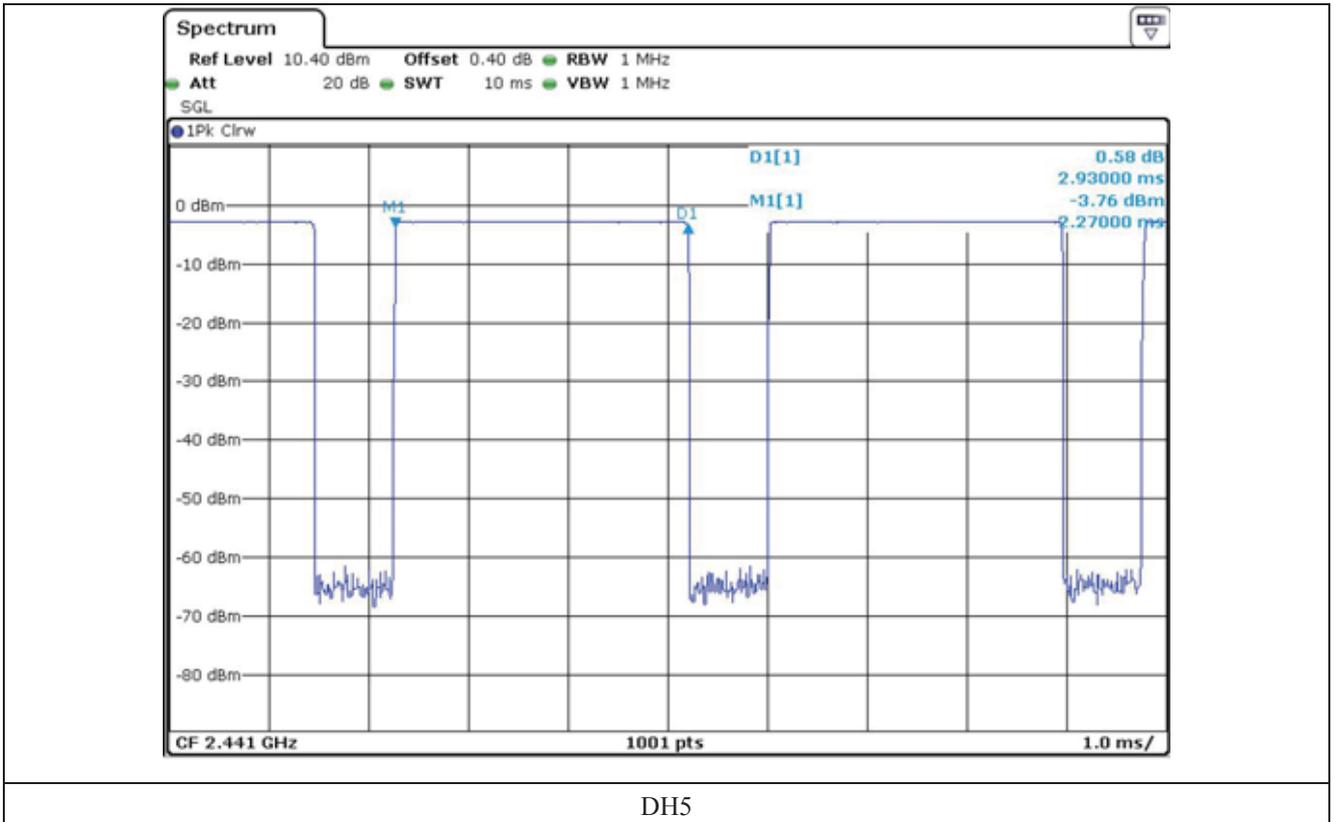

DH5

**10.5 Test data for 2 Mbps**

- Test Date : November 17, 2015

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.426	10.13	31.6	136.37	400	PASS
DH3	1.666	5.06	31.6	266.39	400	
DH5	2.926	3.38	31.6	312.52	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.




**Tested by: Min-Gu, Ji / Engineer**

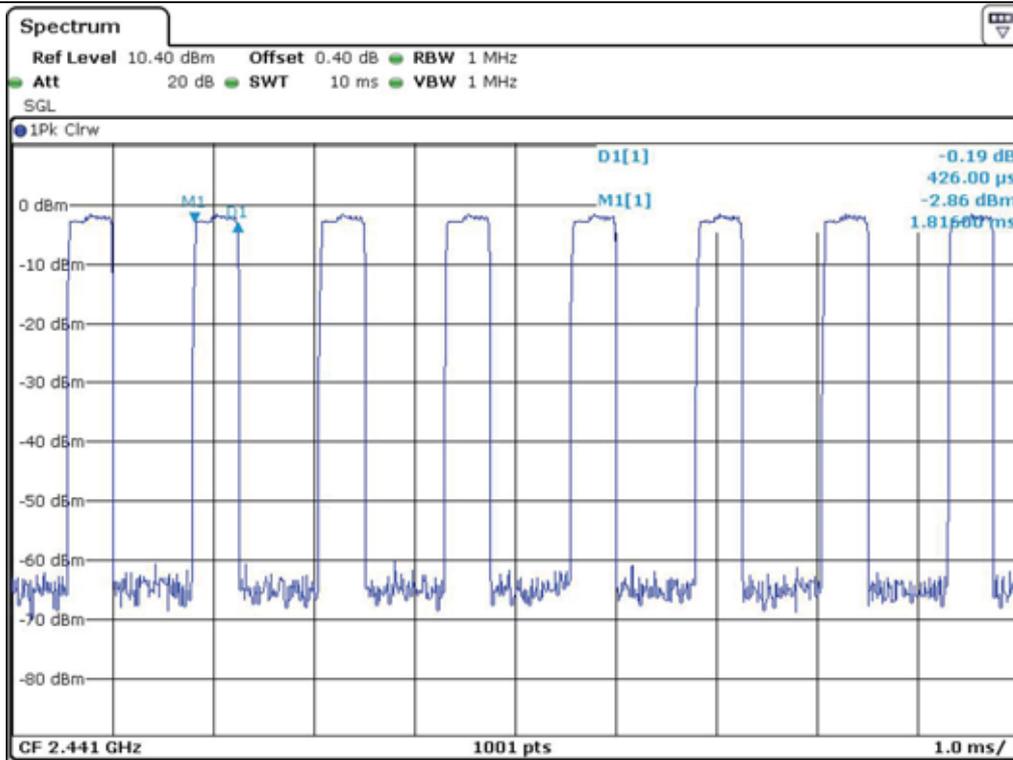

DH1

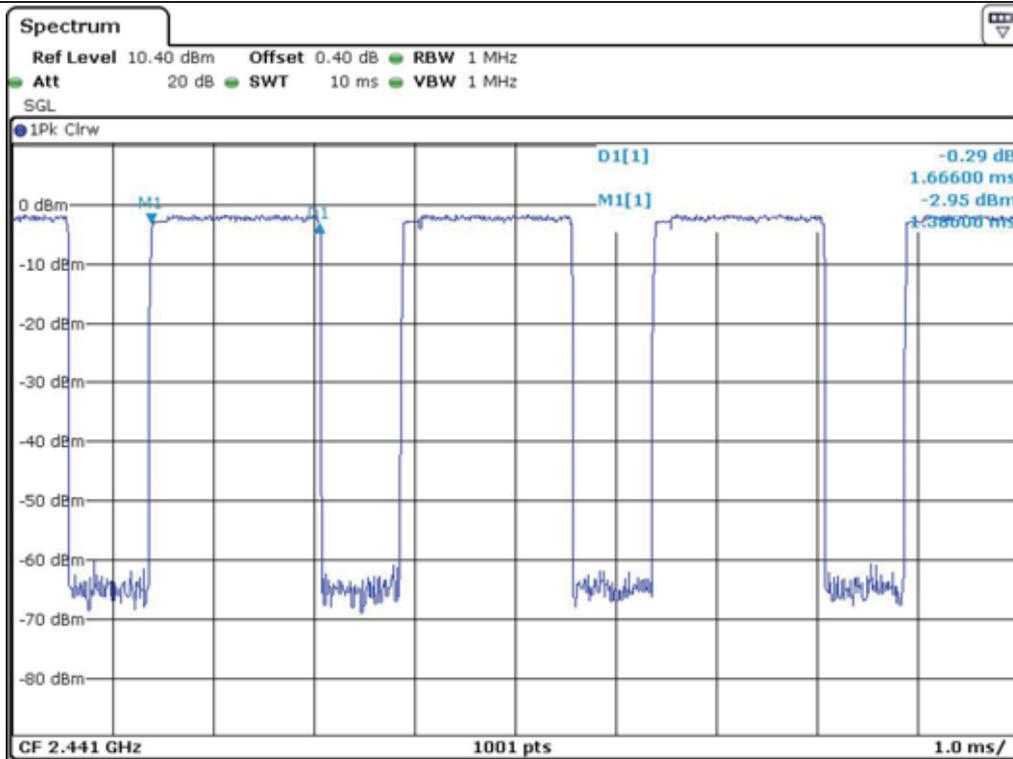

DH3

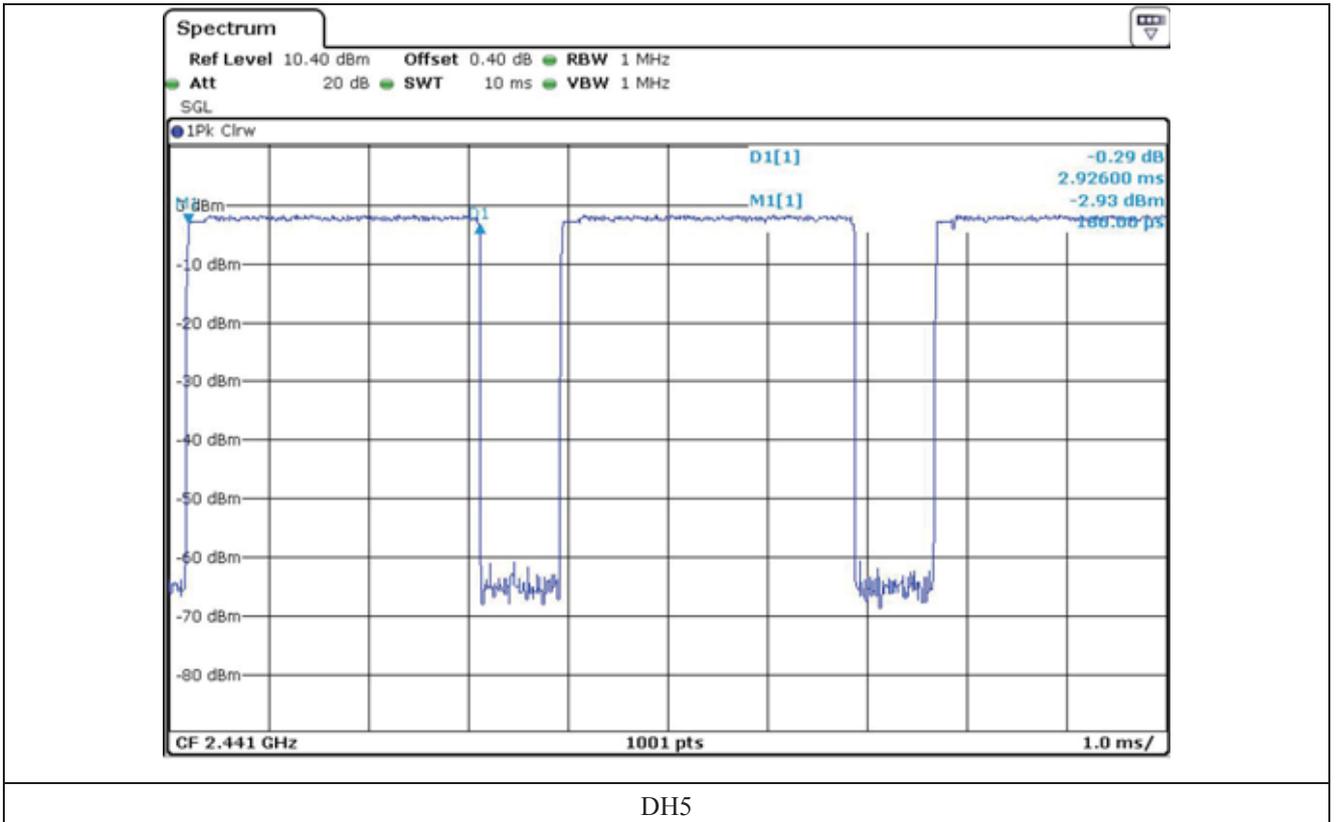

**10.6 Test data for 3 Mbps**

- Test Date : November 17, 2015

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.424	10.13	31.6	135.73	400	PASS
DH3	1.664	5.06	31.6	266.07	400	
DH5	2.924	3.38	31.6	312.31	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.




**Tested by: Min-Gu, Ji / Engineer**

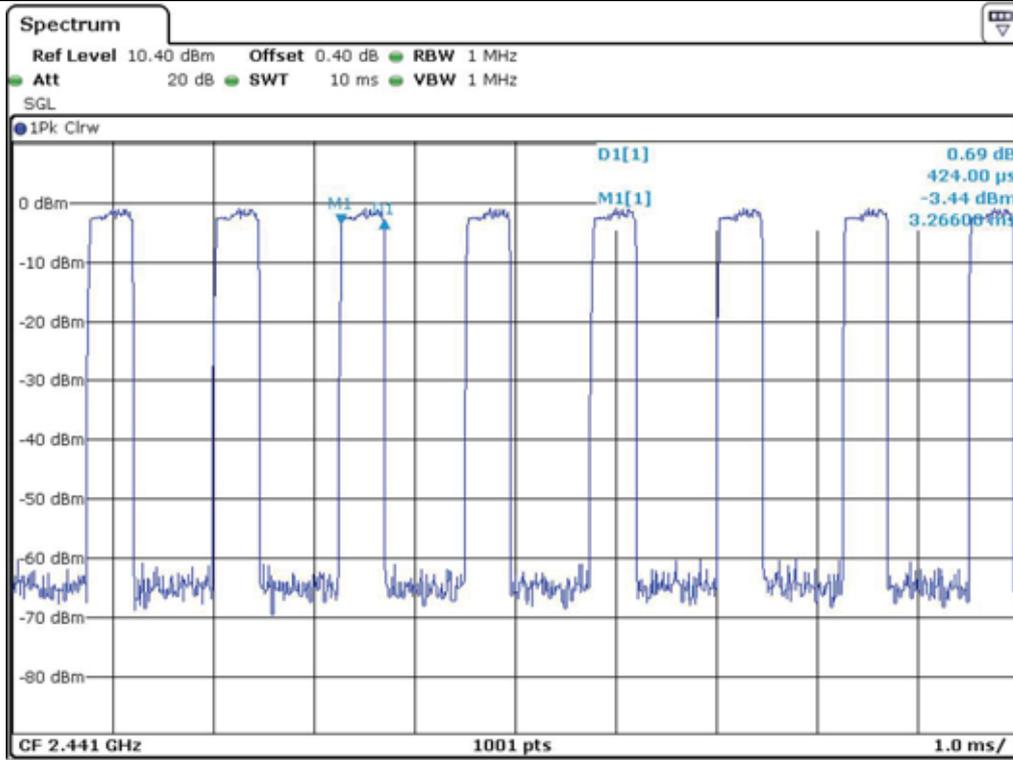

DH1

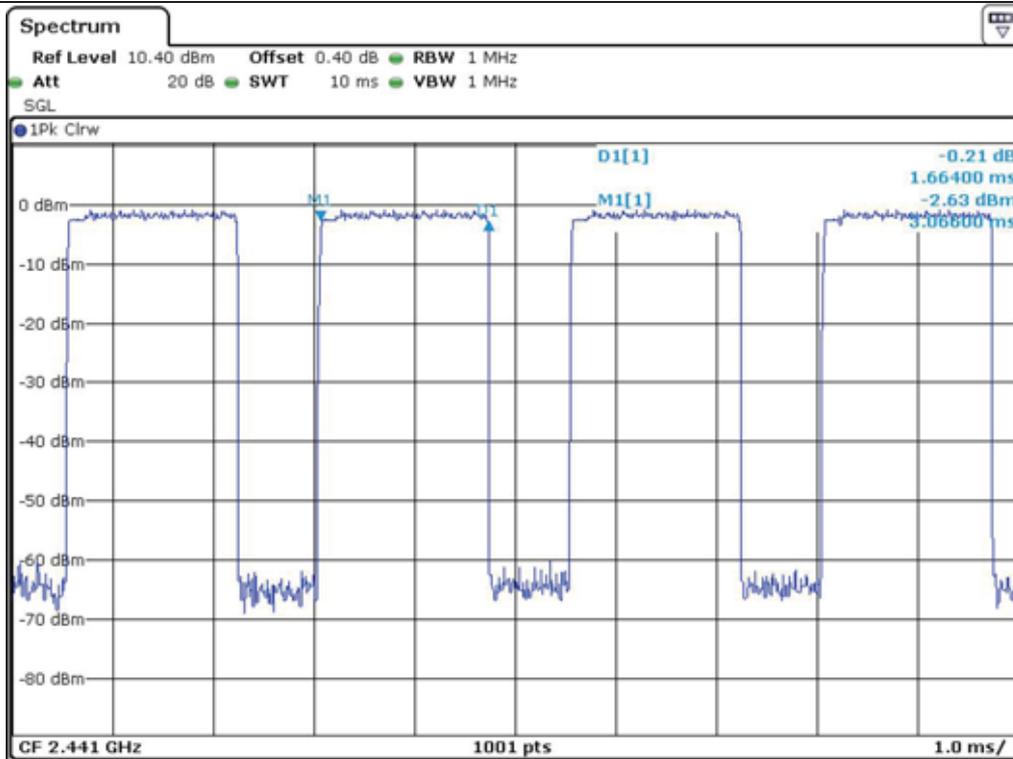

DH3

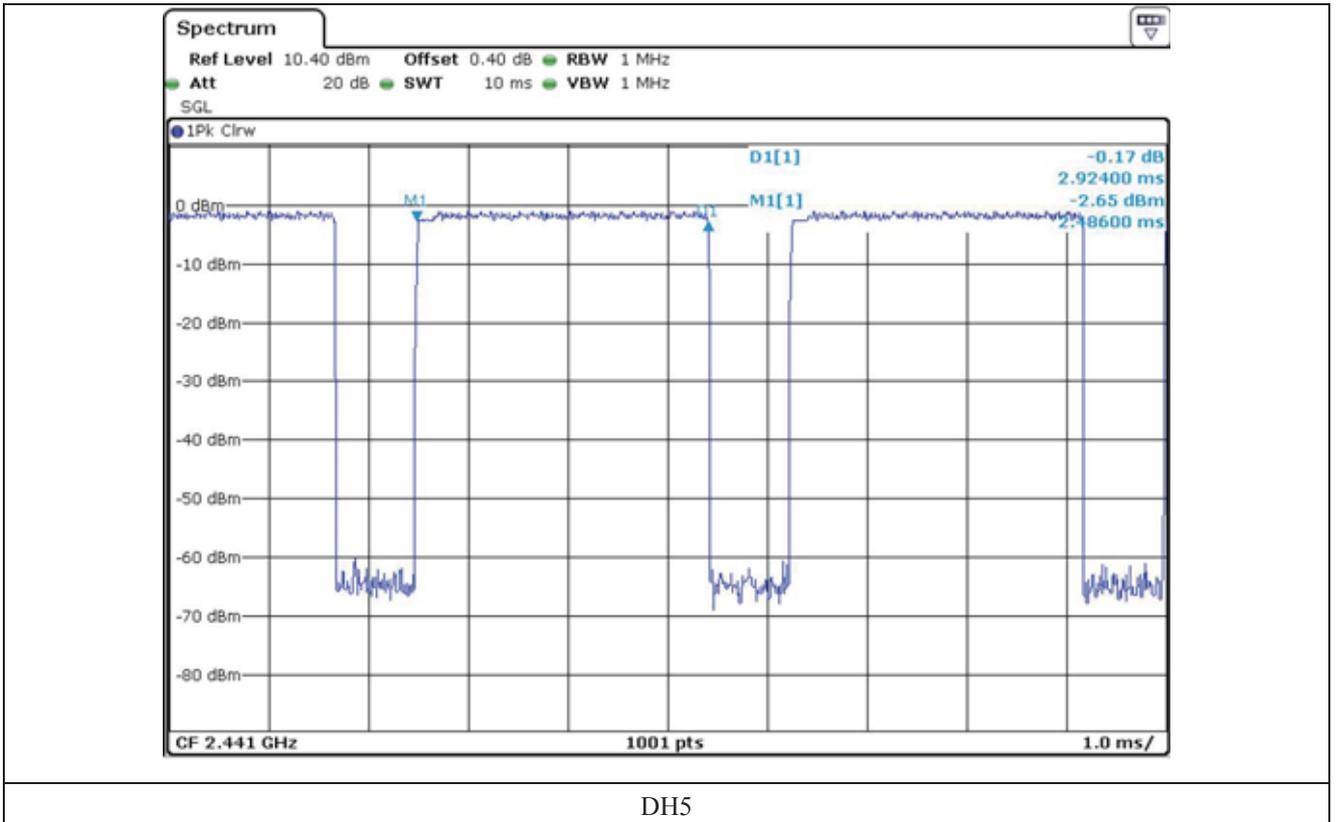

DH5

## 11. MAXIMUM PEAK OUTPUT POWER

### 11.1 Operating environment

Temperature : 23.2 °C  
 Relative humidity : 44.3 % R.H

### 11.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The EUT was operating in transmit mode at the appropriate center frequency.



### 11.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101372	Apr. 29, 2015 (1Y)

All test equipment used is calibrated on a regular basis.

**11.4 Test data for 1 Mbps**

- Test Date : November 17, 2015


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	-2.91	21.00	23.91
MIDDLE	2 441	-2.54	21.00	23.54
HIGH	2 480	-2.11	21.00	23.11


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




**Tested by: Min-Gu, Ji / Engineer**

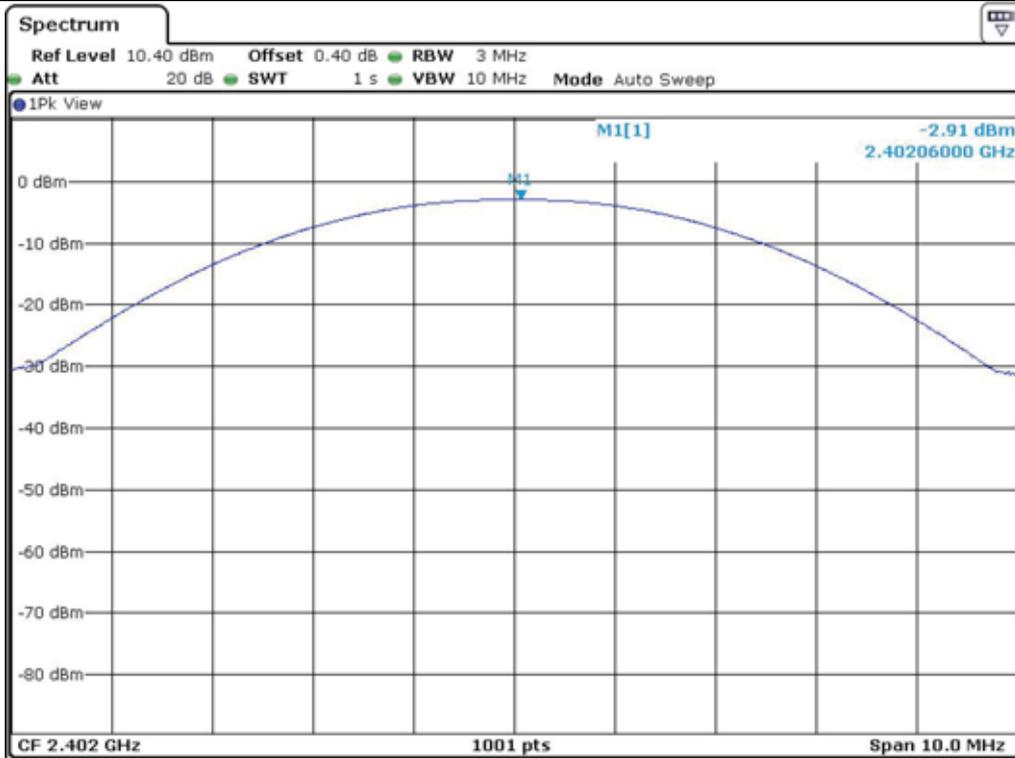

Low Channel

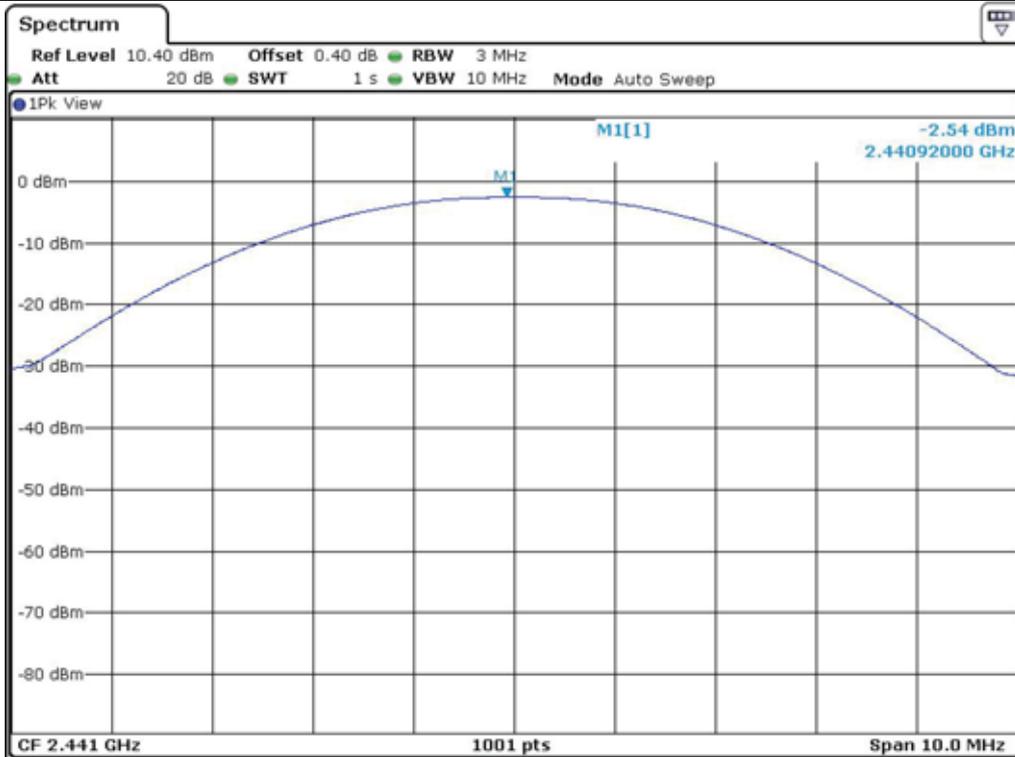

Middle Channel

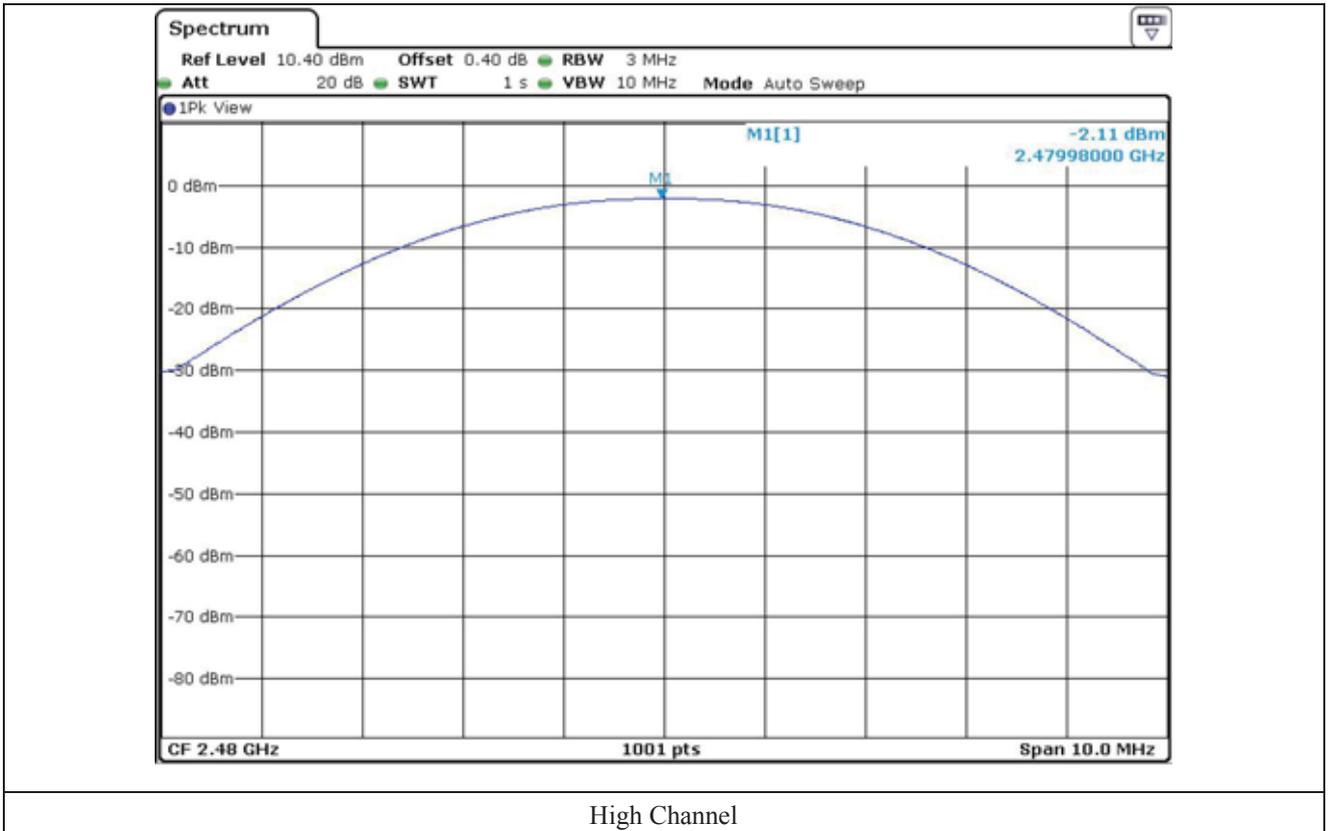

High Channel

**11.5 Test data for 2 Mbps**

- Test Date : November 17, 2015


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	-1.04	21.00	22.04
MIDDLE	2 441	-0.69	21.00	21.69
HIGH	2 480	-0.35	21.00	21.35


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Min-Gu, Ji / Engineer

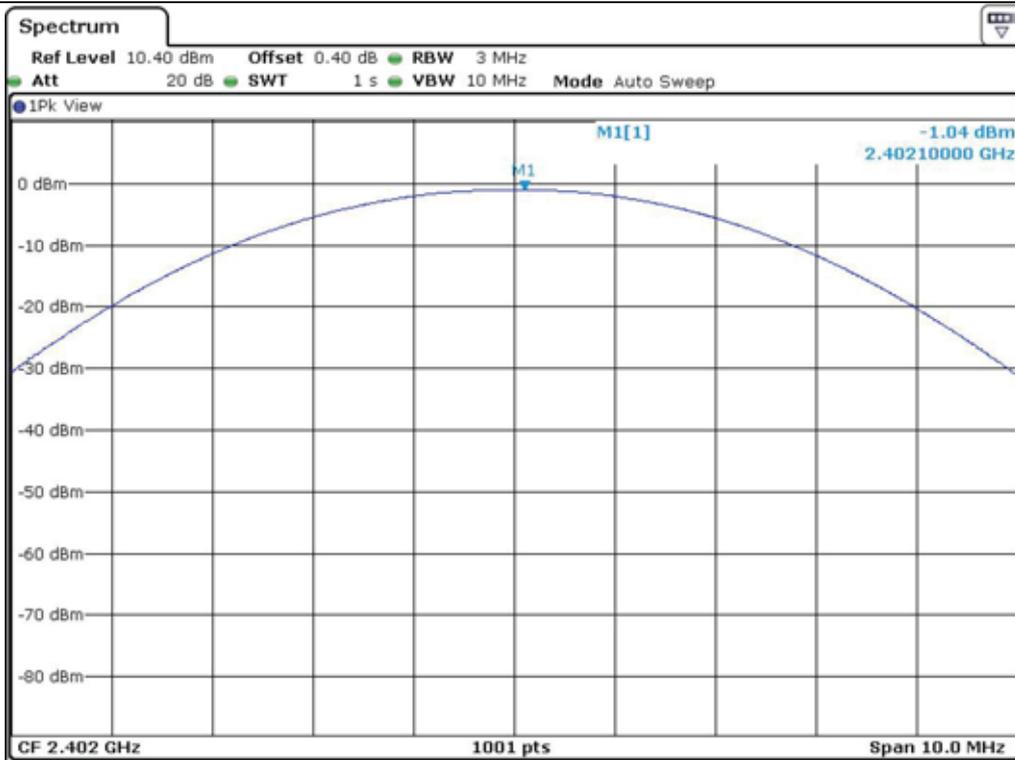

Low Channel

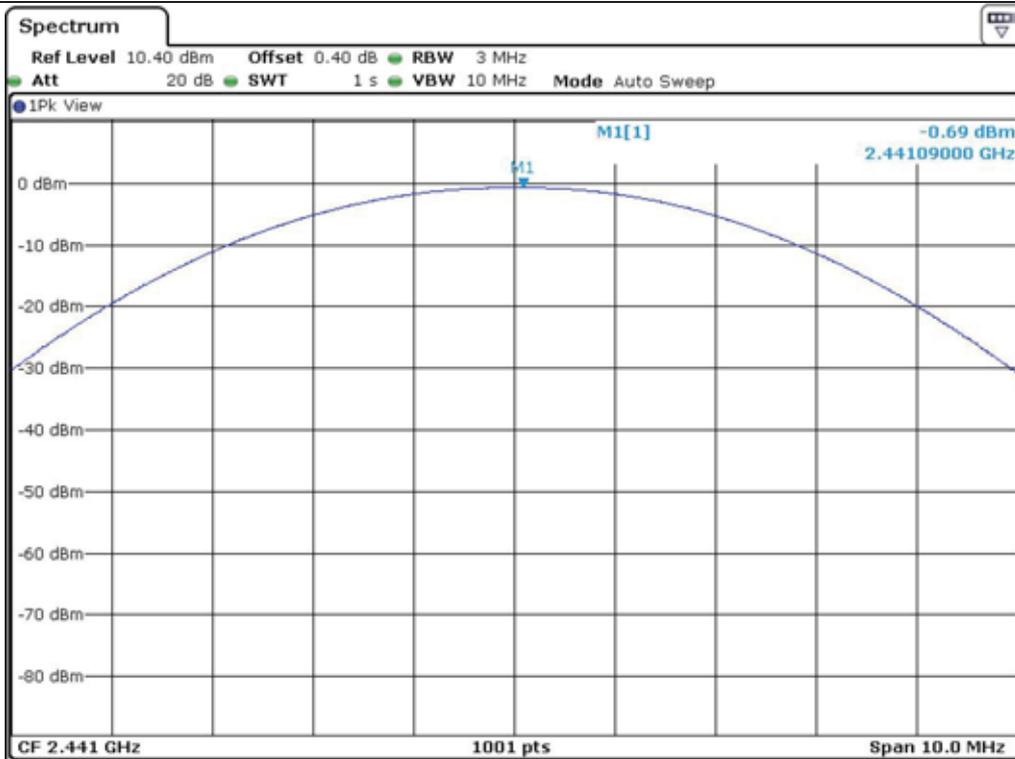

Middle Channel

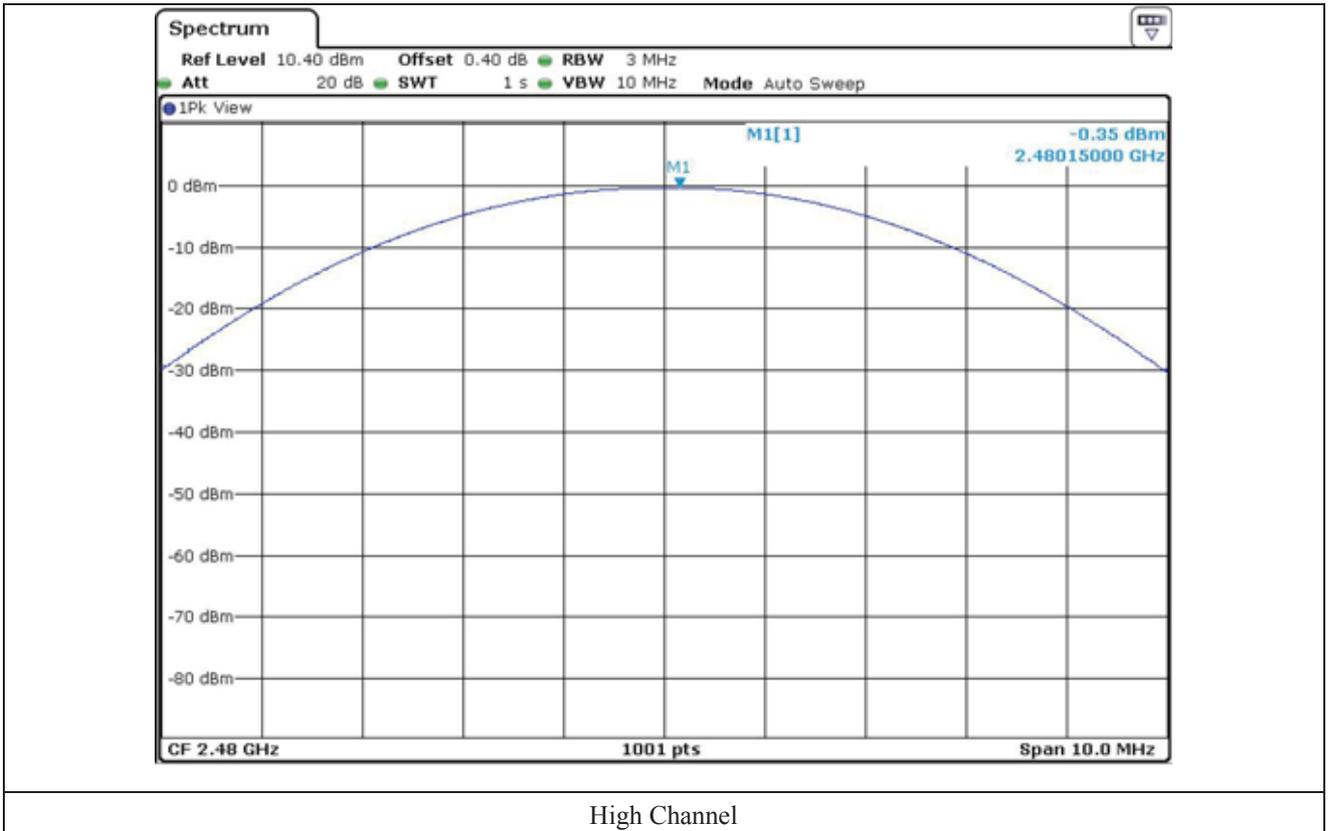

High Channel

**11.6 Test data for 3 Mbps**

- Test Date : November 17, 2015


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	-0.43	21.00	21.43
MIDDLE	2 441	-0.15	21.00	21.15
HIGH	2 480	0.11	21.00	20.89


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




**Tested by: Min-Gu, Ji / Engineer**

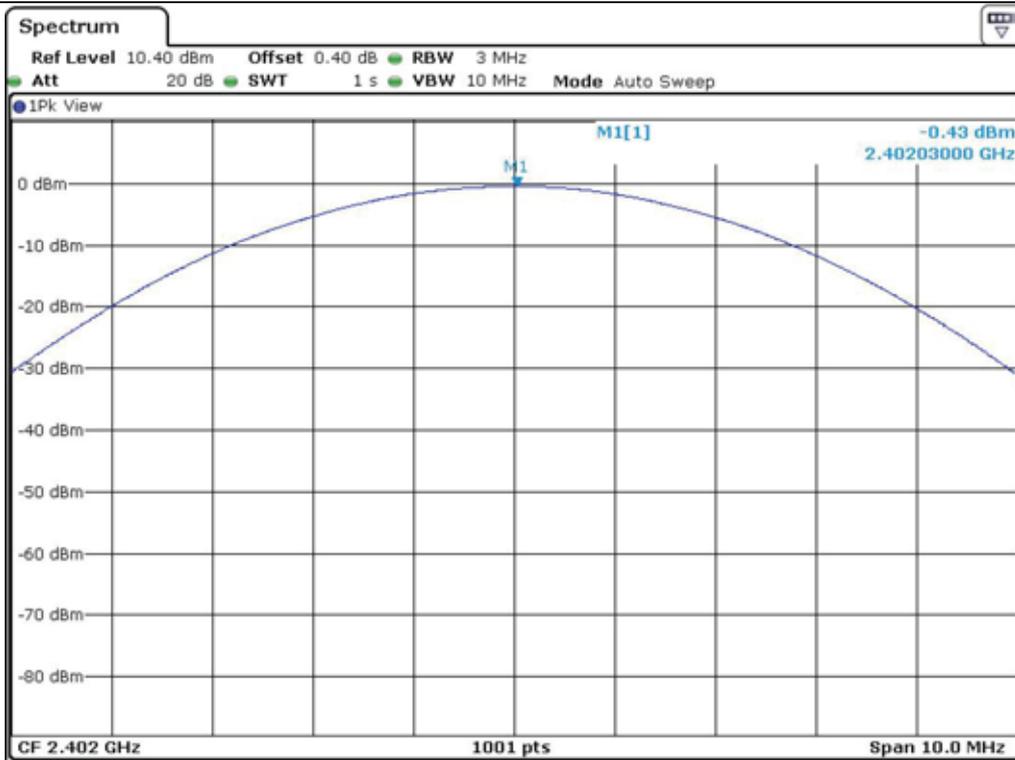

Low Channel

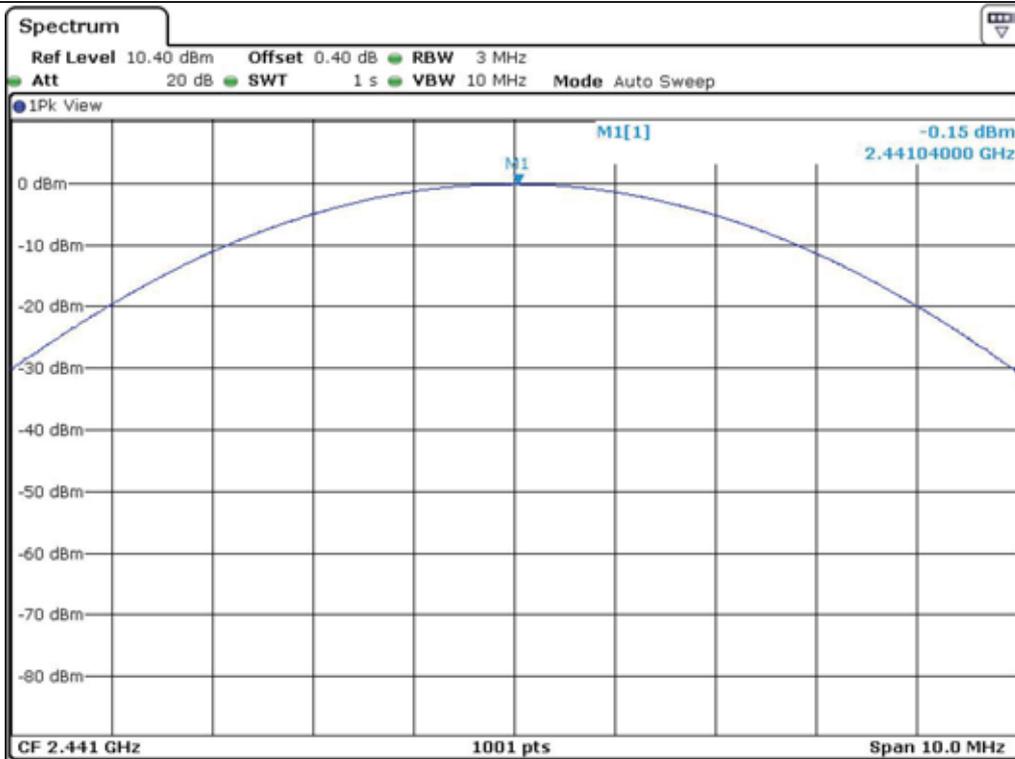

Middle Channel

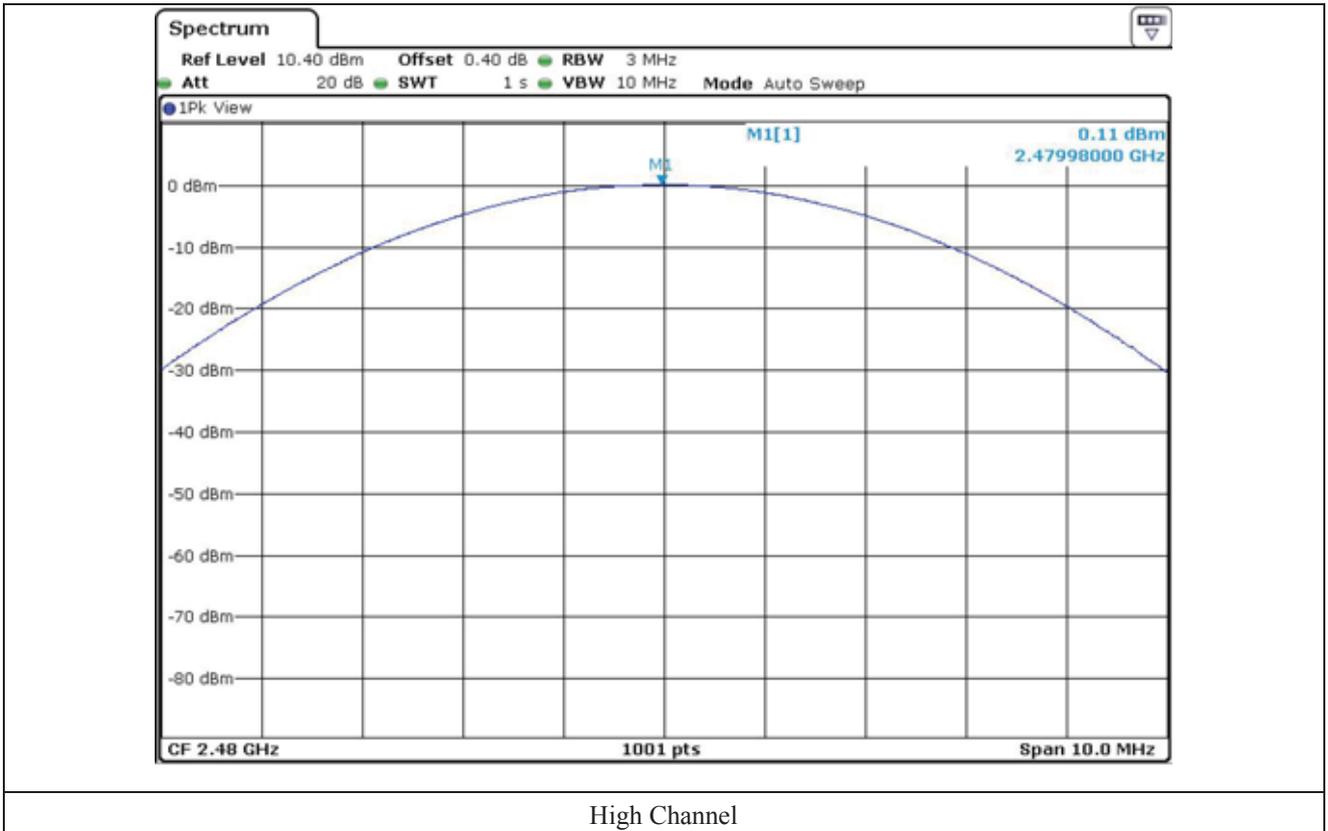

## 12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

### 12.1 Operating environment

Temperature : 23.5 °C  
 Relative humidity : 45.1 % R.H

### 12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.



### 12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m, Semi Anechoic Chamber. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The frequency spectrum from 30 kHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 ms in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


### 12.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
□	- ESCI	Rohde & Schwarz	EMI Test Receiver	101012	Nov. 02, 2015 (1Y)
■	- ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 29, 2015 (1Y)
□	- 8564E	HP	Spectrum Analyzer	3650A00756	Apr. 28, 2015 (1Y)
□	- FSP	Rohde & Schwarz	Spectrum Analyzer	100017	Oct. 07, 2015 (1Y)
■	- 310N	Sonoma Instrument	AMPLIFIER	312544	Apr. 29, 2015 (1Y)
■	- FSV30	Rohde & Schwarz	Signal Analyzer	101372	Apr. 29, 2015 (1Y)
■	- SCU-18	Rohde & Schwarz	PRE-AMPLIFIER	102209	Jun. 04, 2015 (1Y)
■	- MA240	HD GmbH	Antenna Master	N/A	N/A
■	- HD100	HD GmbH	Position Controller	N/A	N/A
■	- DS420S	HD GmbH	Turn Table	N/A	N/A
■	- HFH2-Z2	Rohde & Schwarz	Loop Antenna	879 285/26	Dec. 09, 2014 (2Y)
■	- VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	May 02, 2014 (2Y)
■	- BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■	- BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	N/A
■	- 83051A	Agilent	Microwave System Preamplifer	3950M00201	Apr. 30, 2015 (1Y)


All test equipment used is calibrated on a regular basis.

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

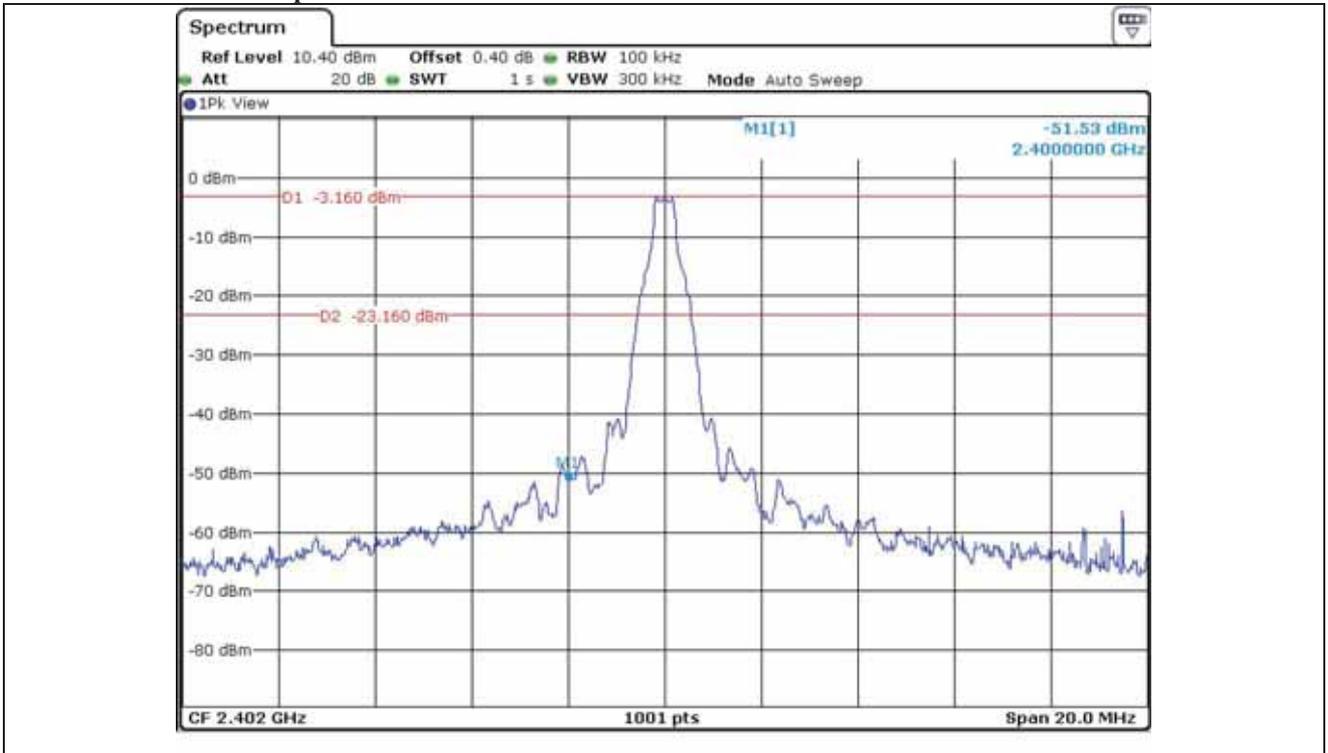


Low Channel

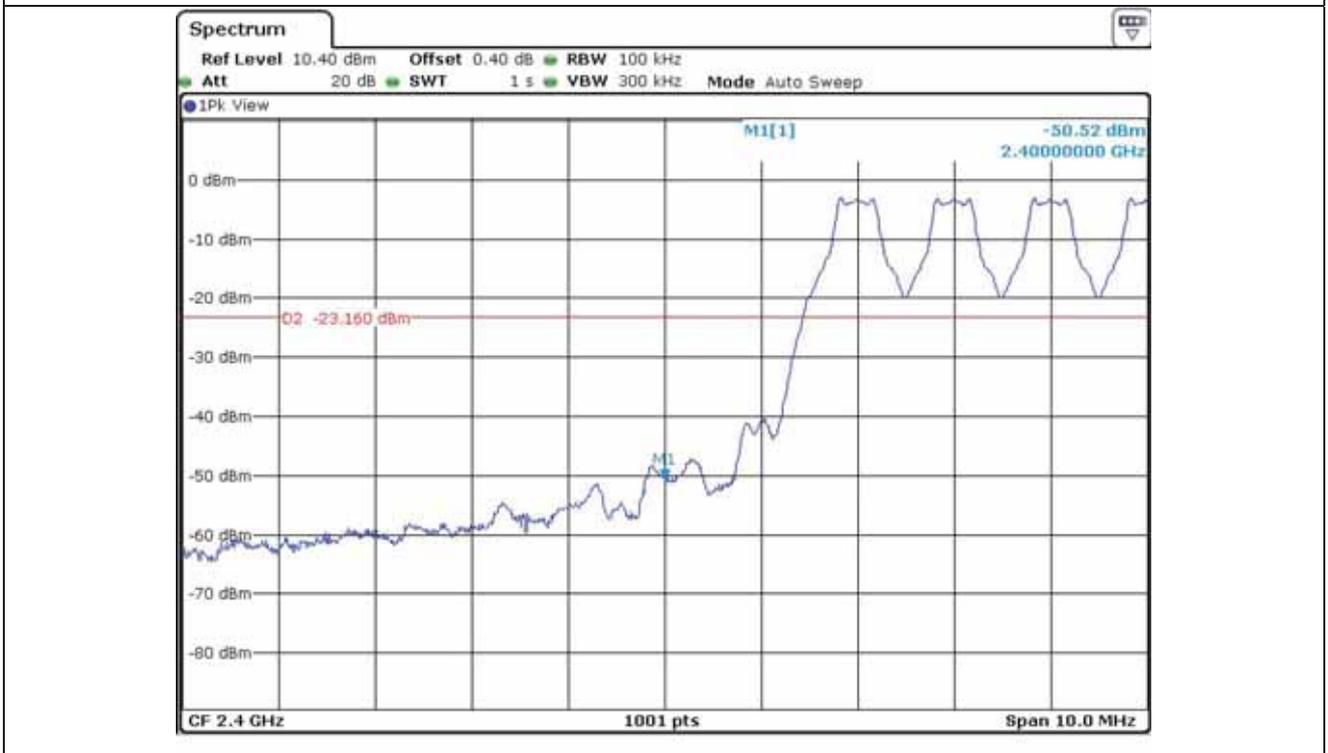


Low Channel

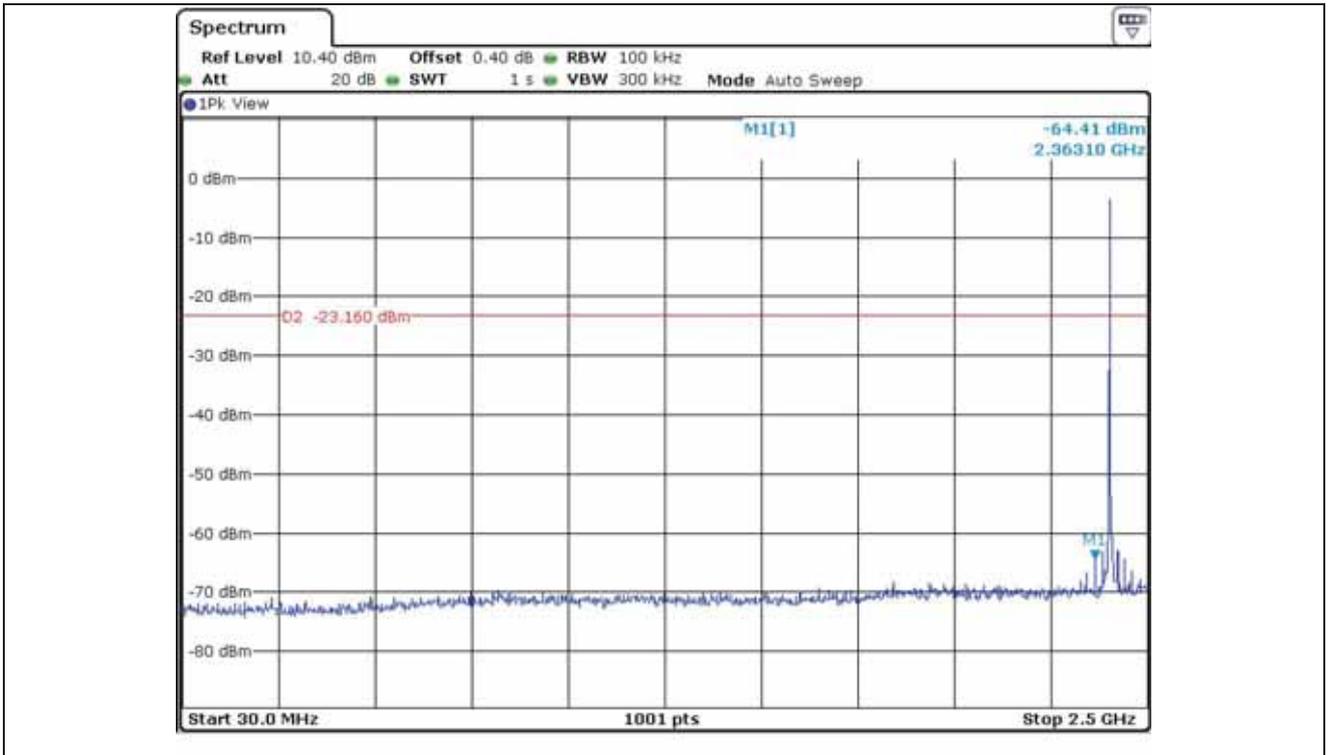


Low Channel

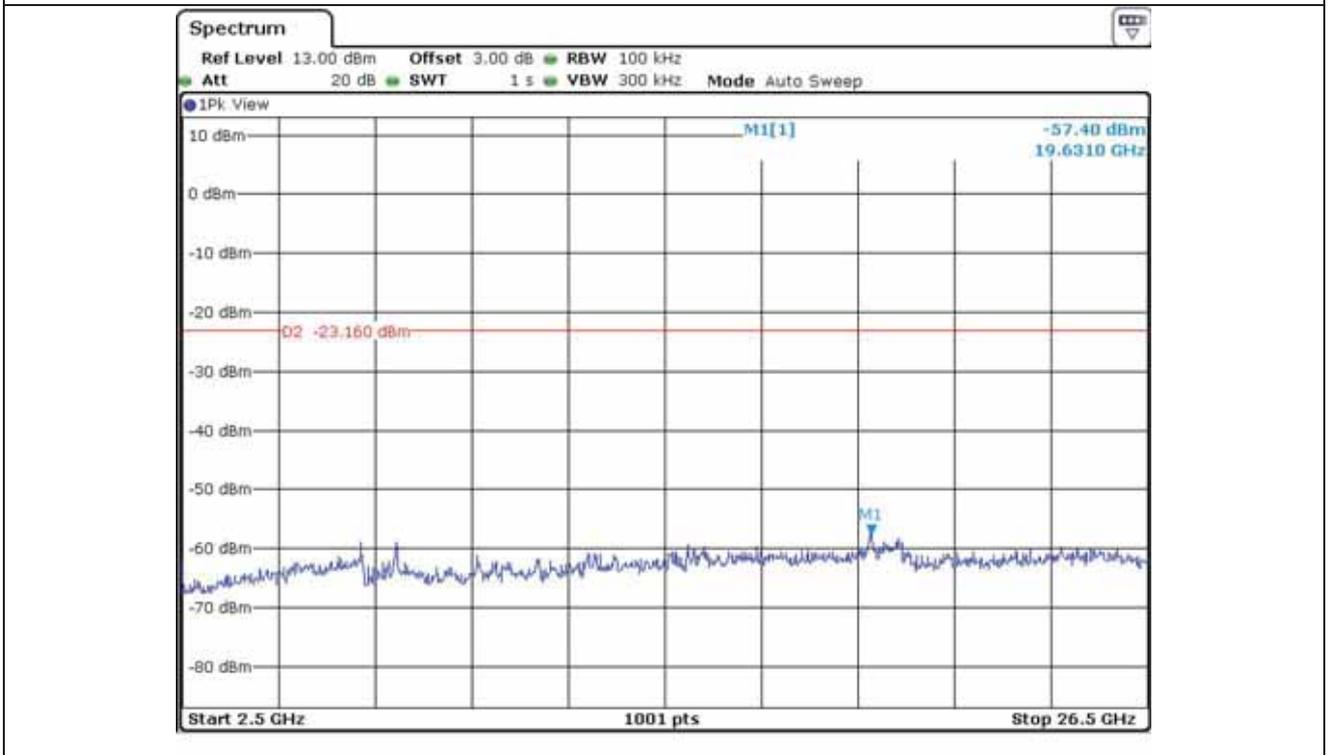


Low Channel

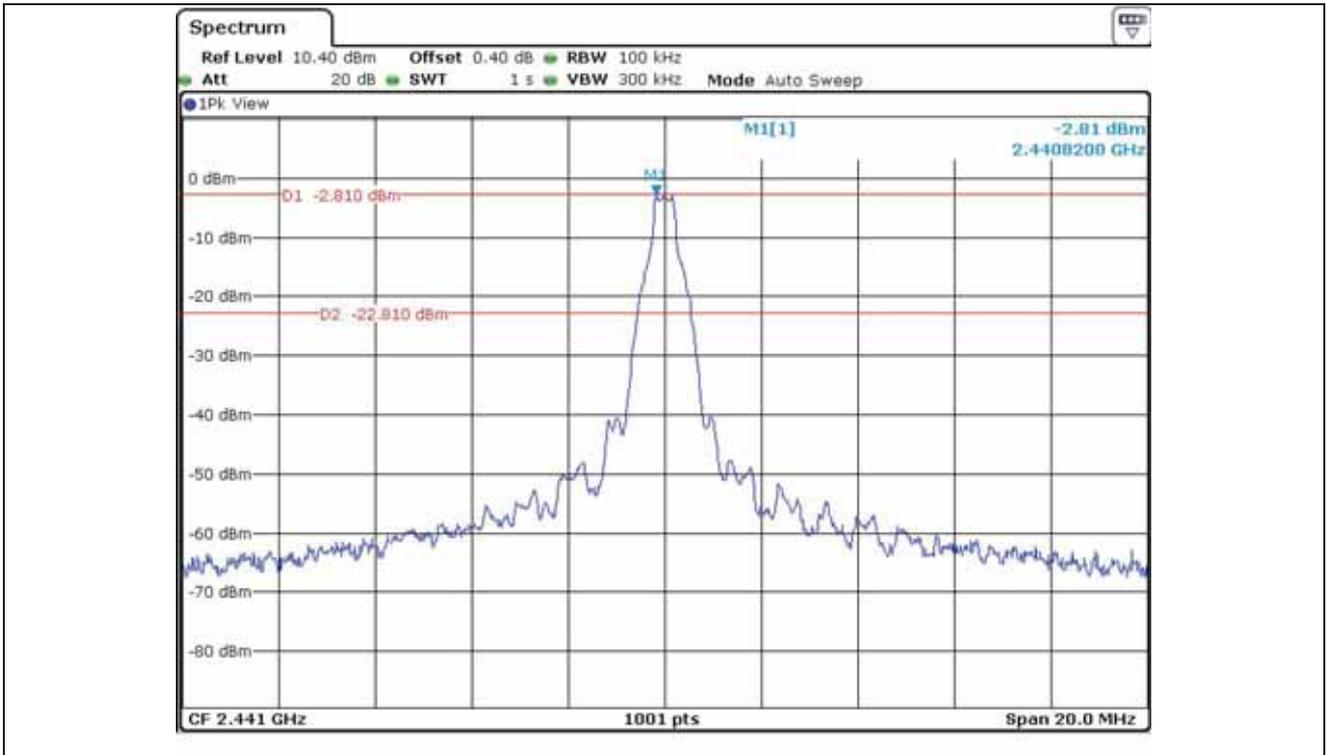


Middle Channel

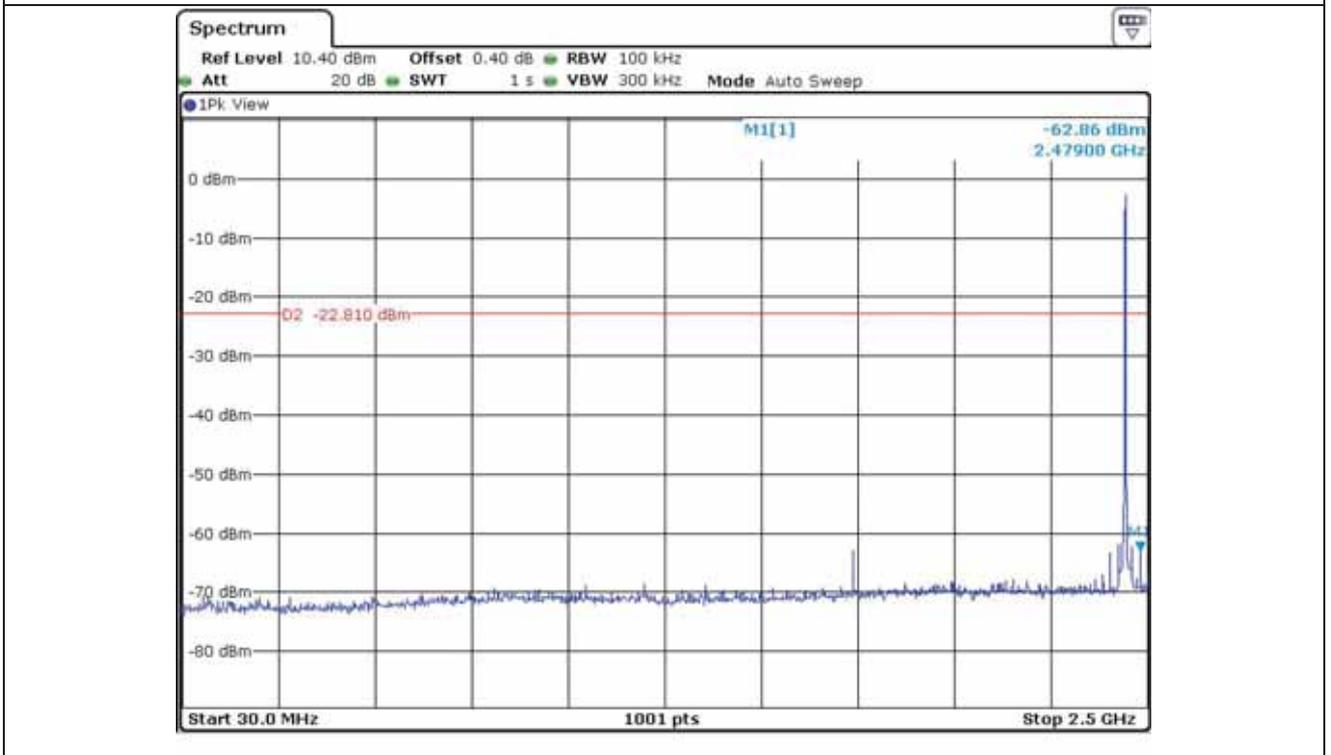


Middle Channel

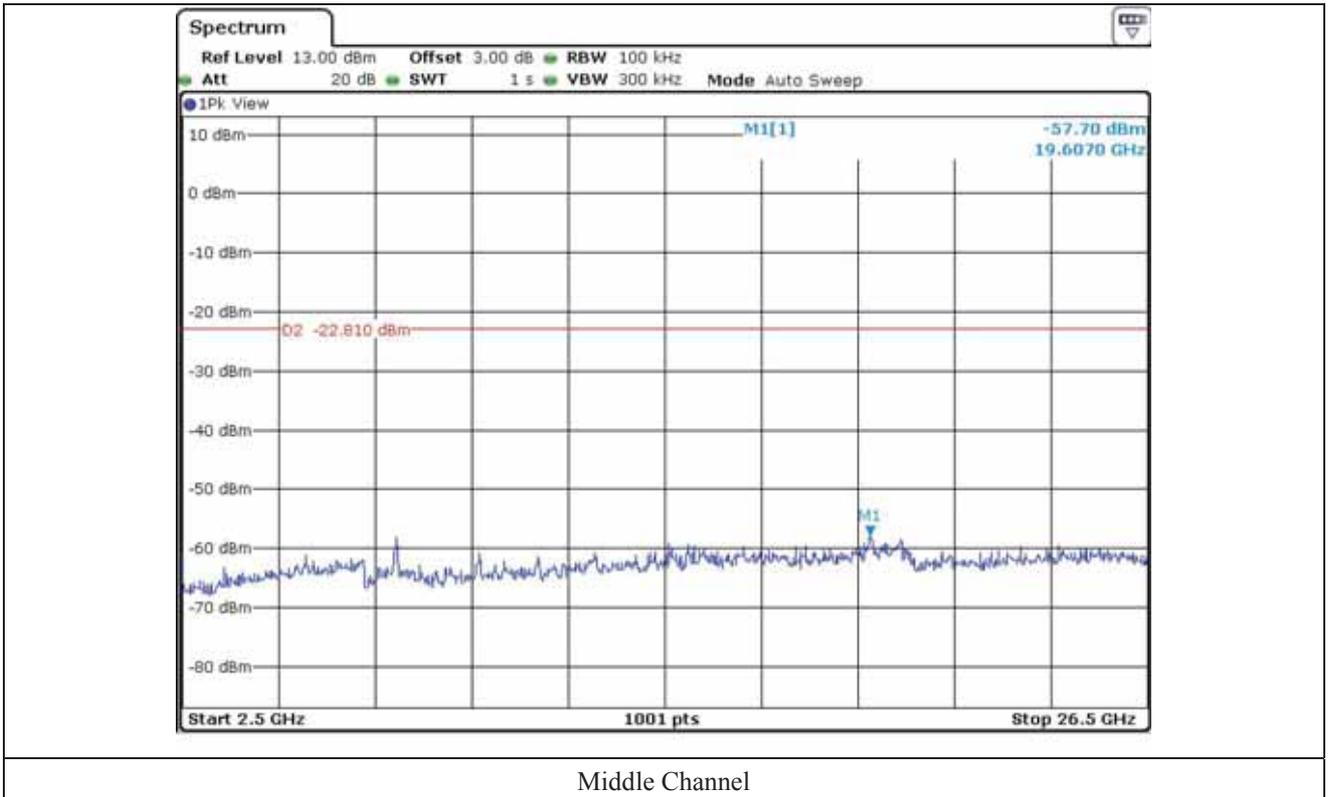


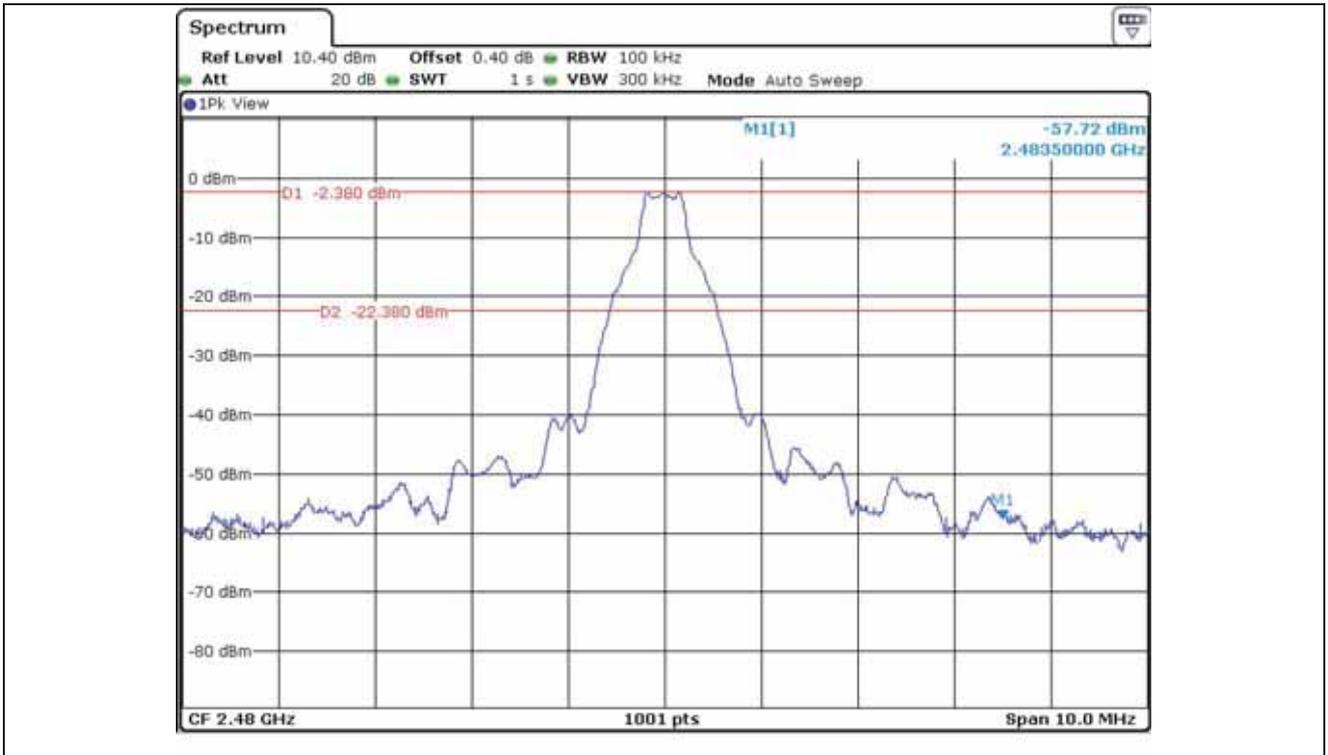


High Channel

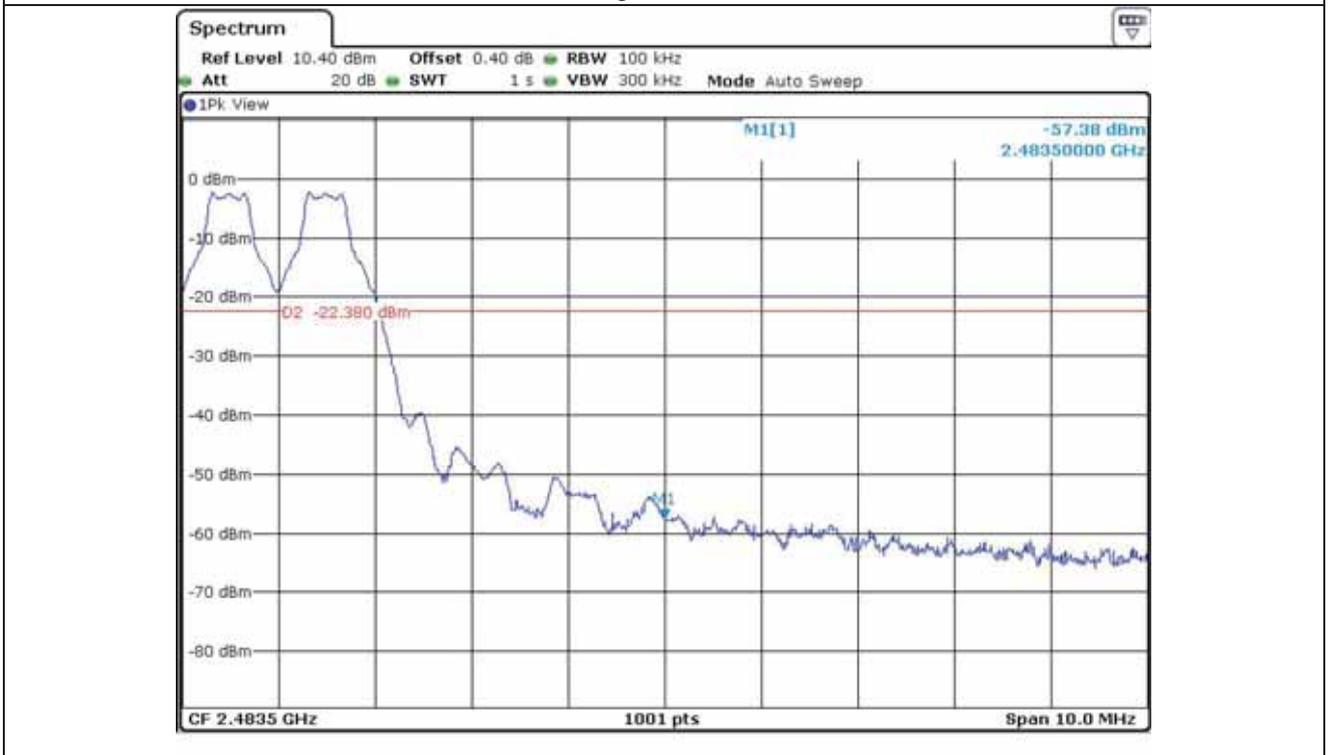

High Channel

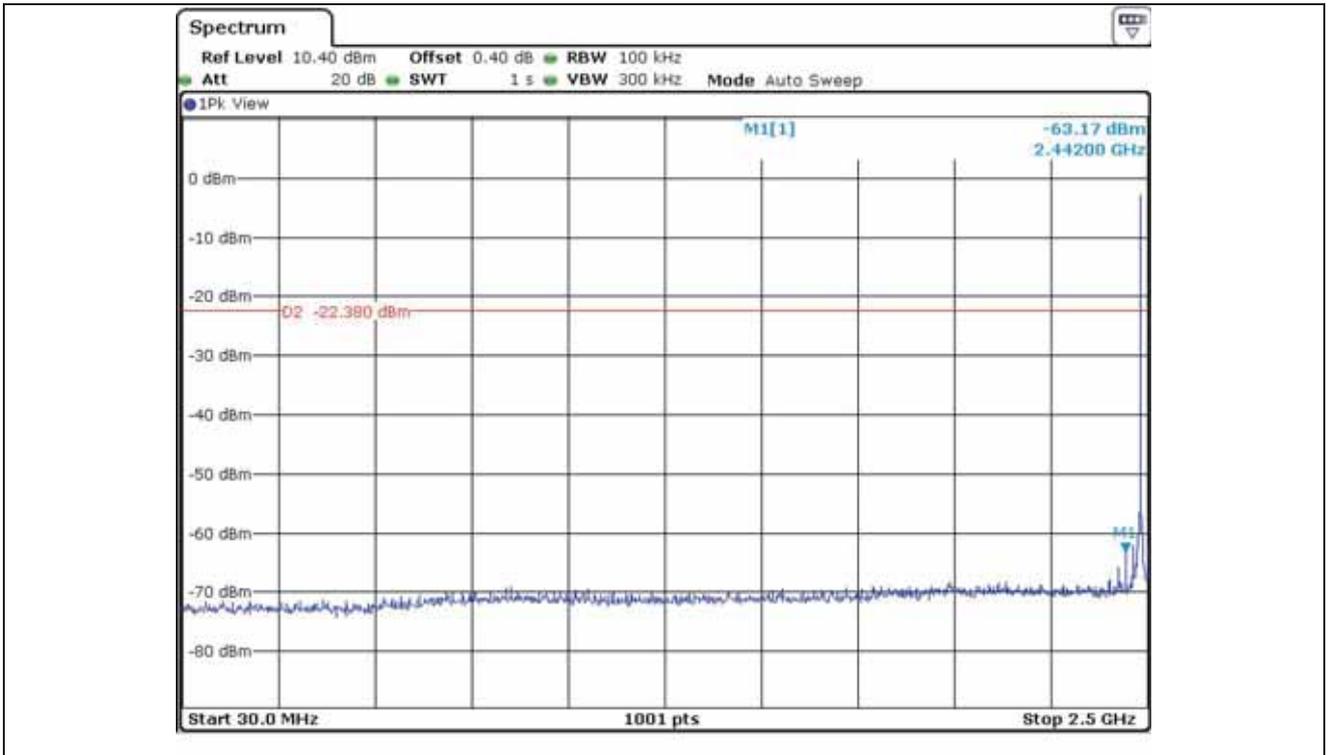


High Channel

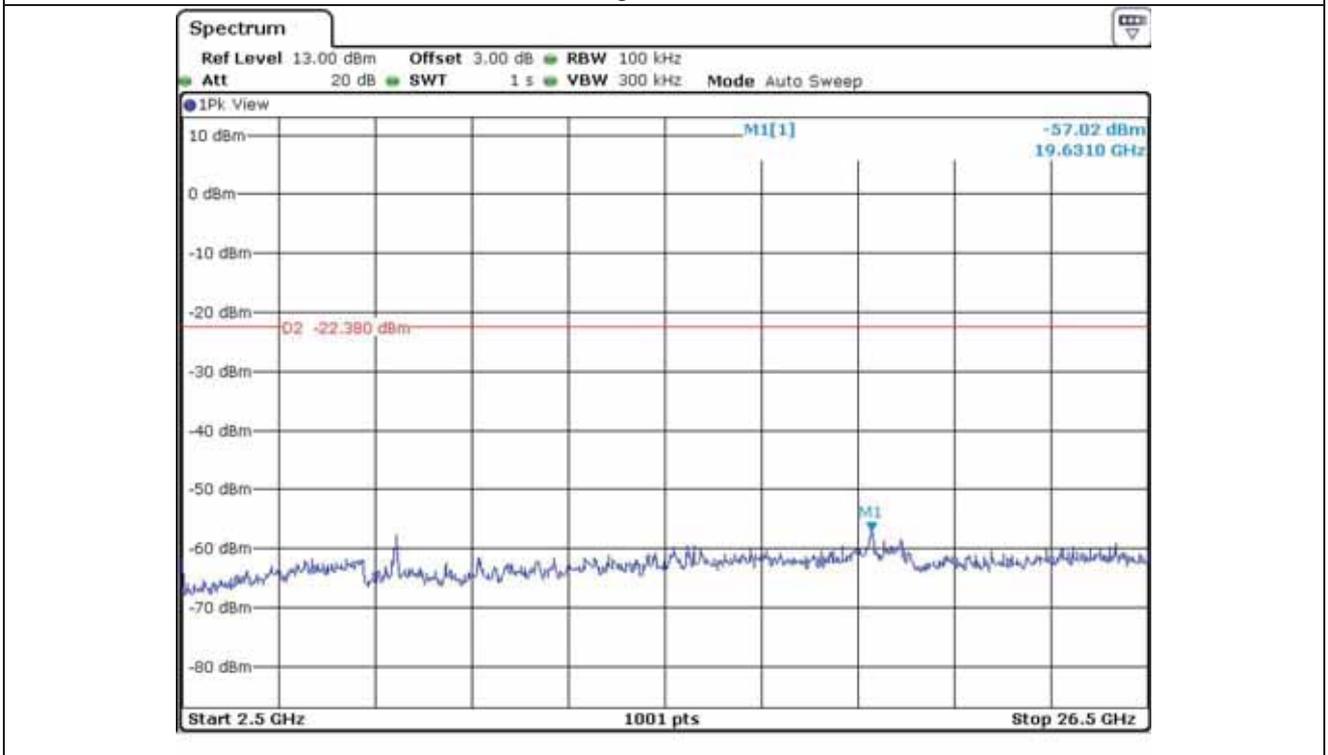


High Channel


12.5.2 Test data for 2 Mbps

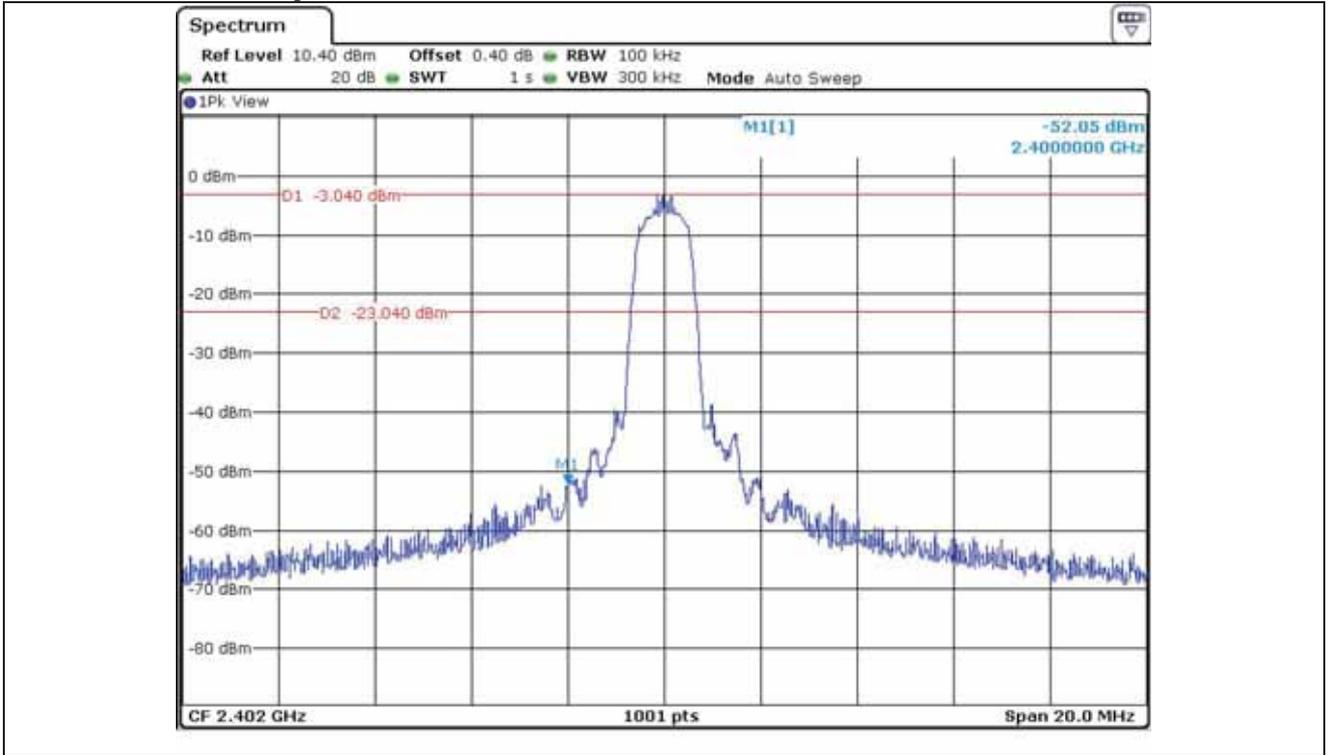


Low Channel

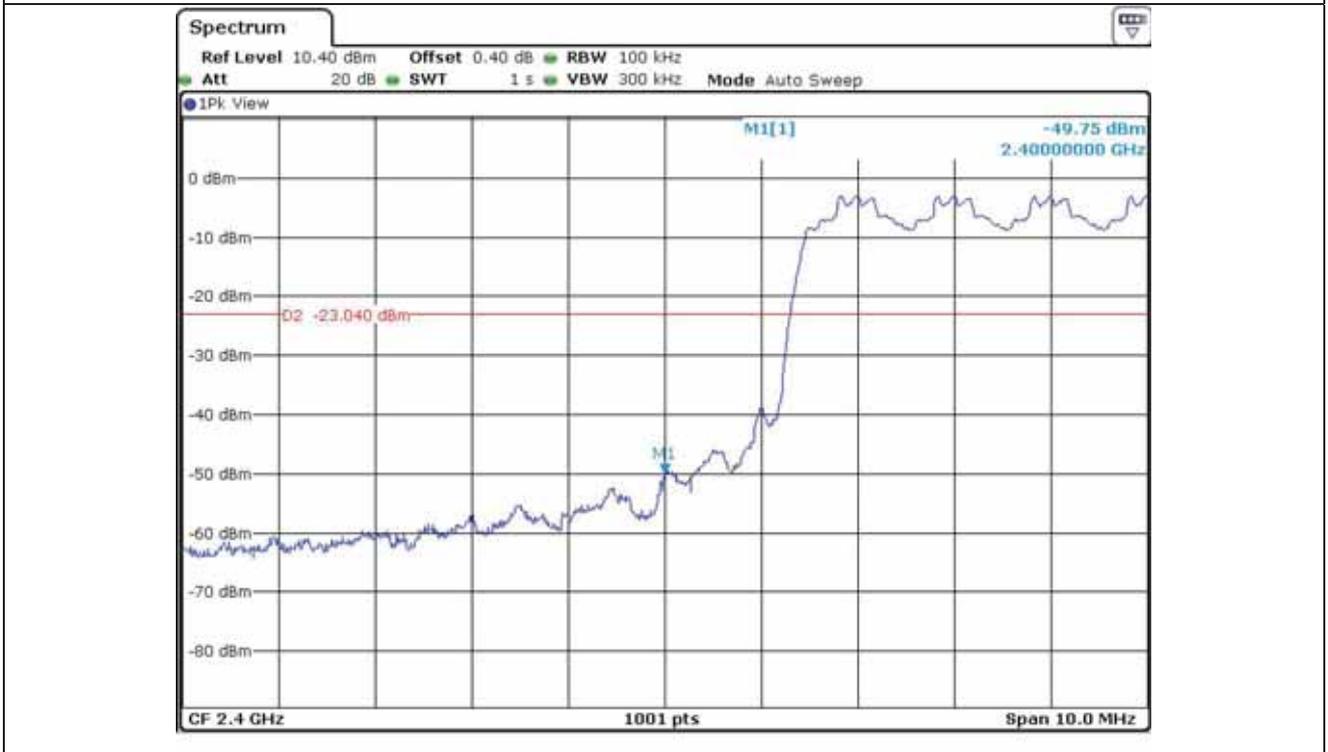


Low Channel

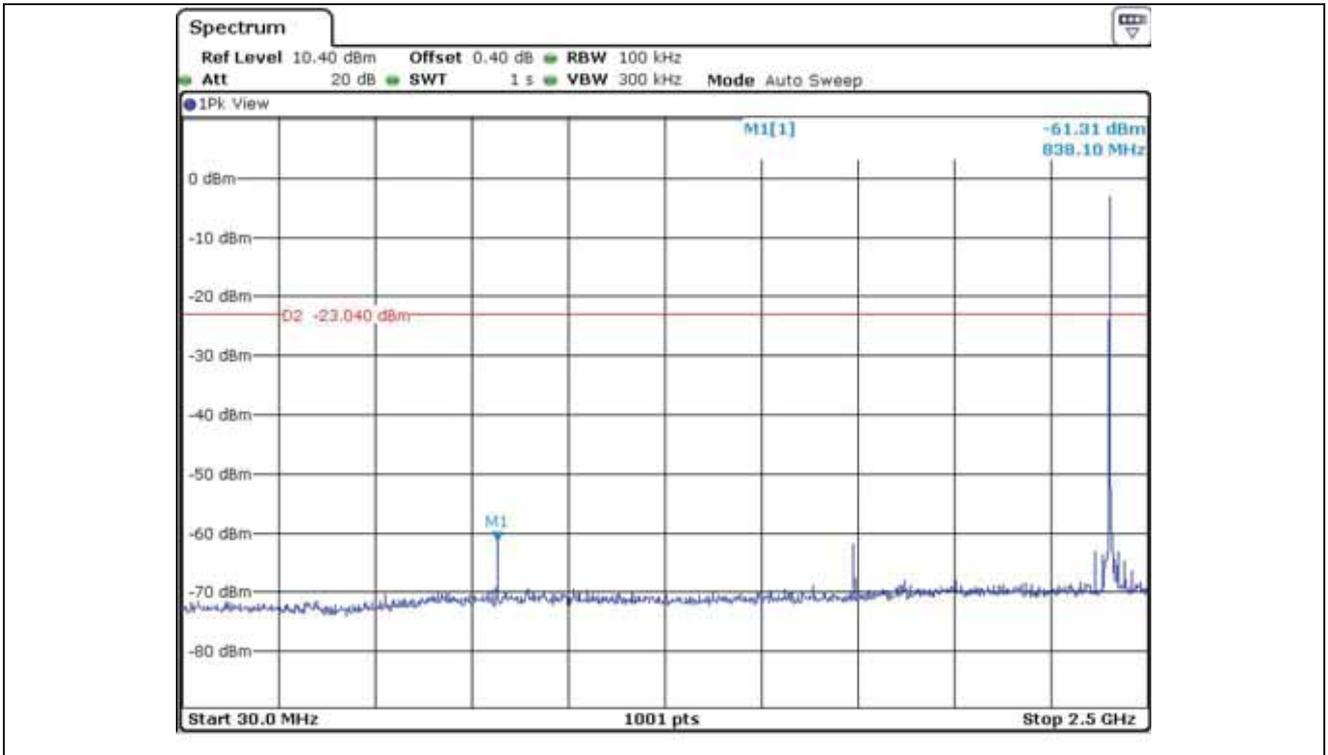


Low Channel

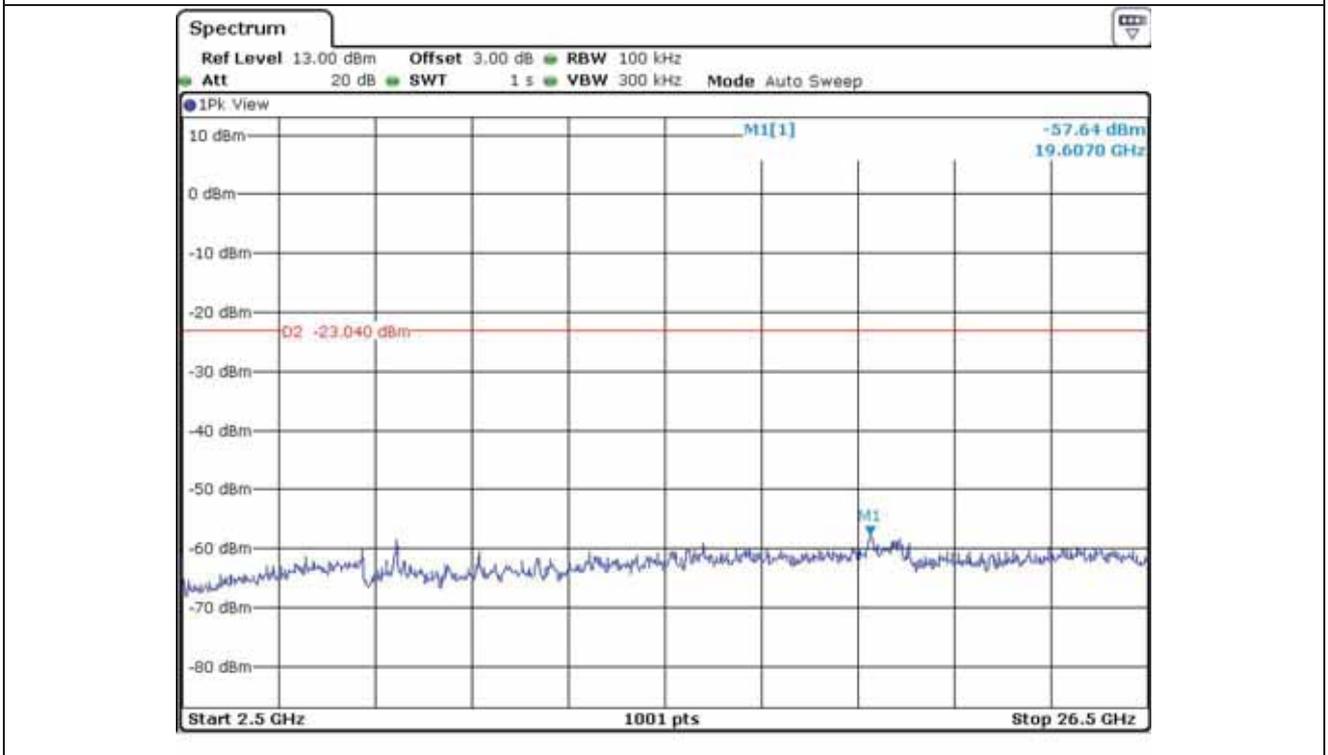


Low Channel

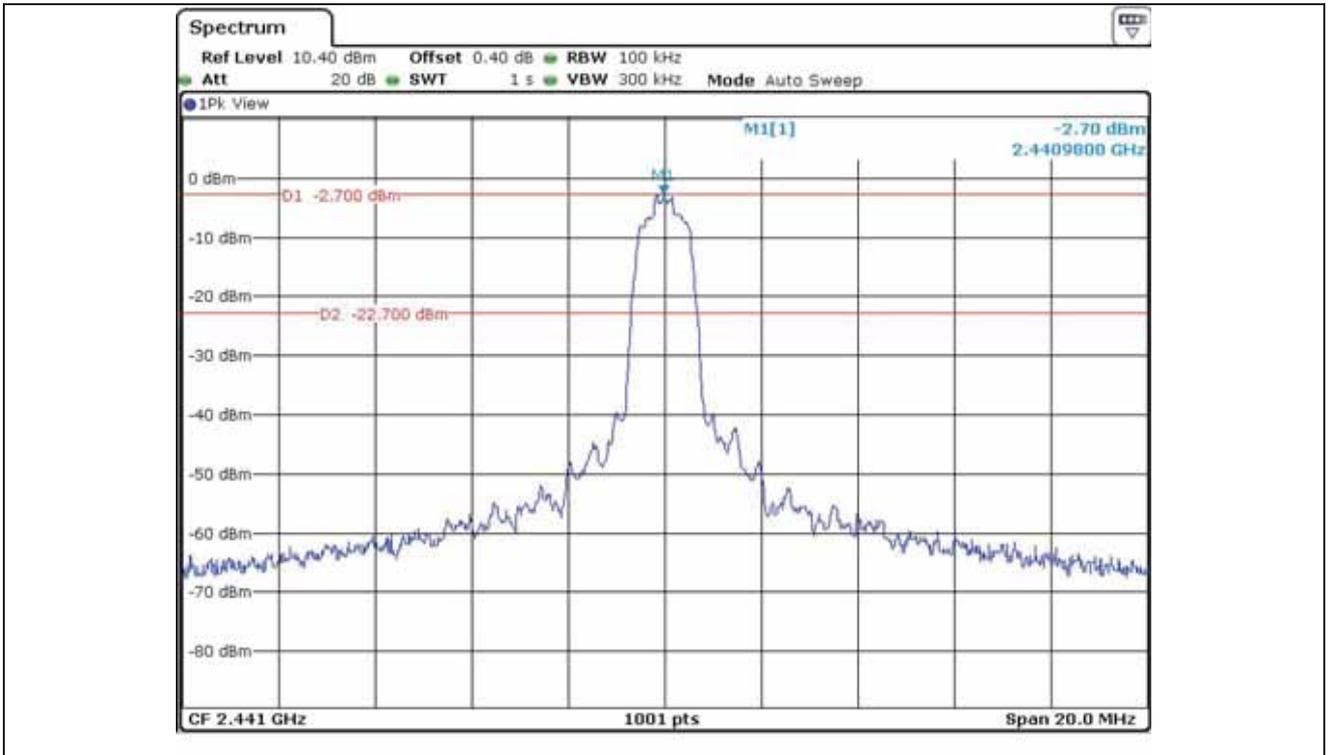


Middle Channel

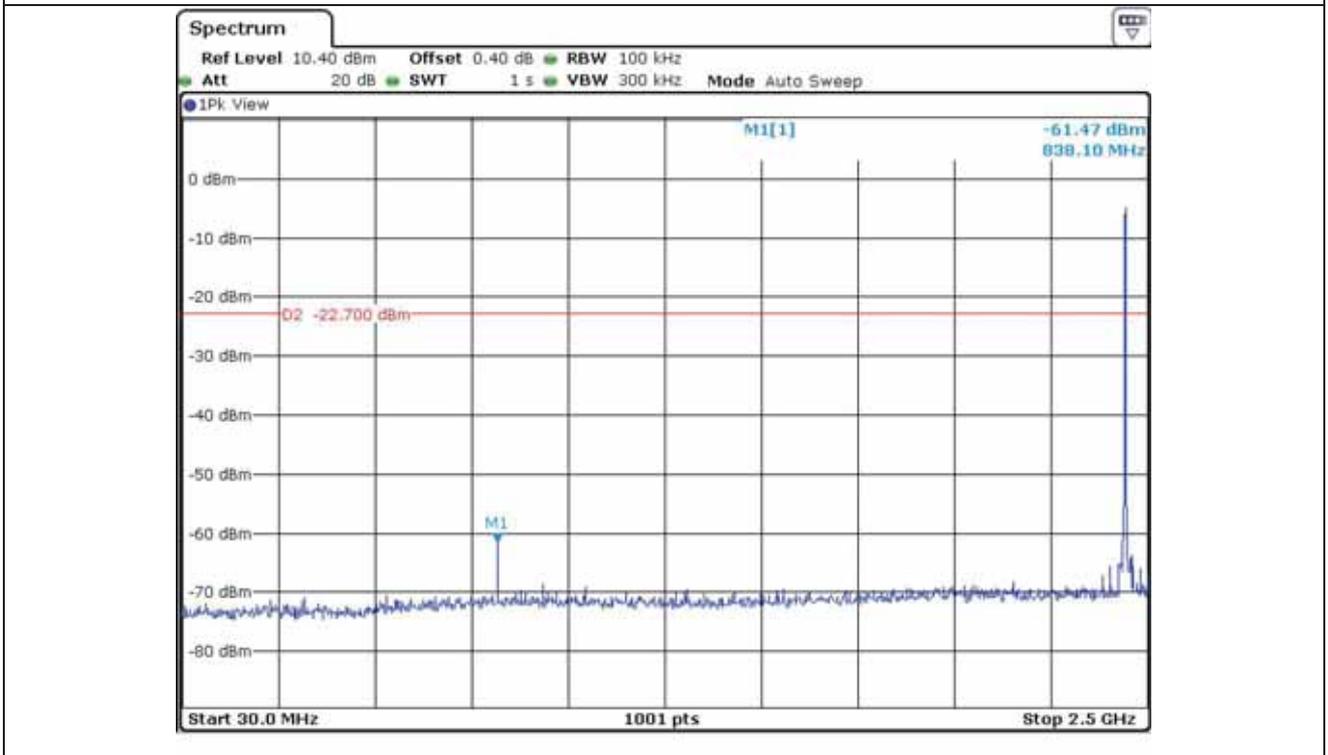


Middle Channel

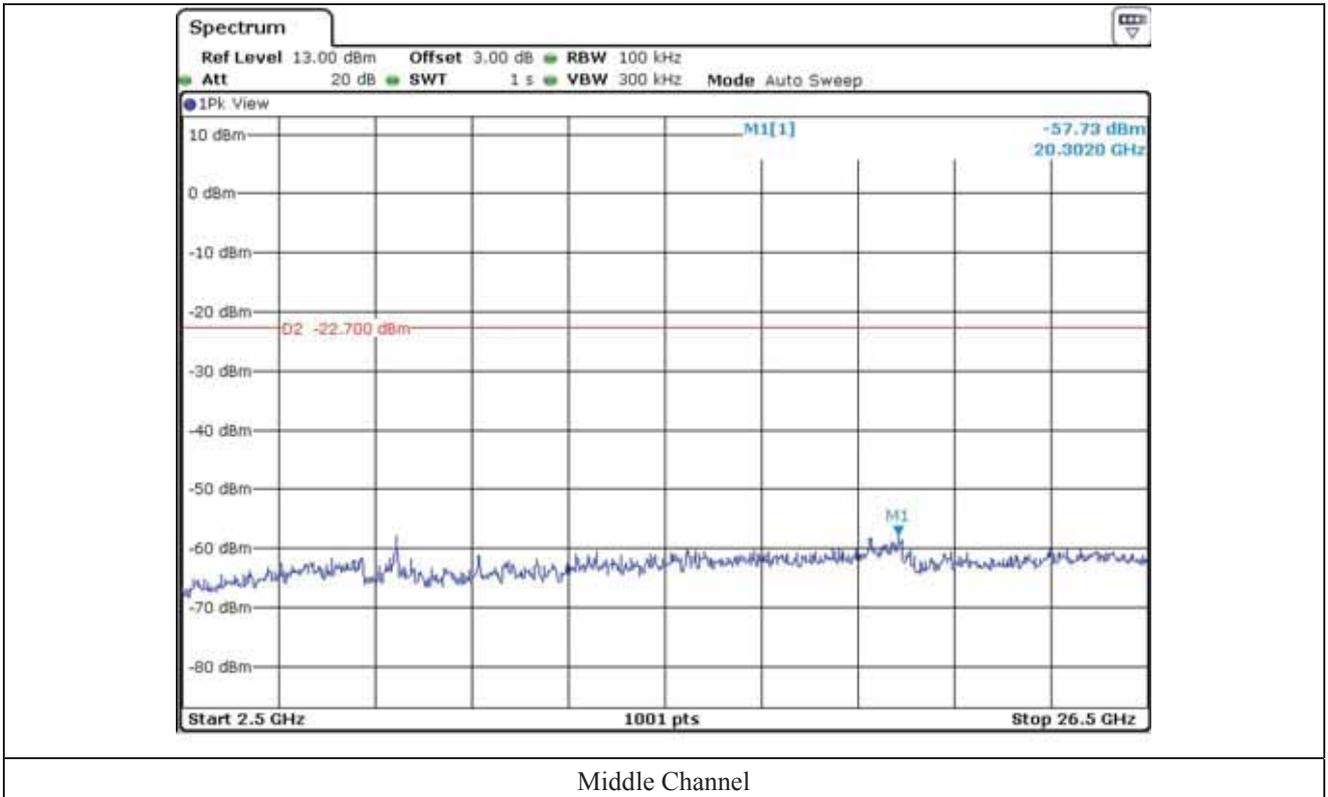


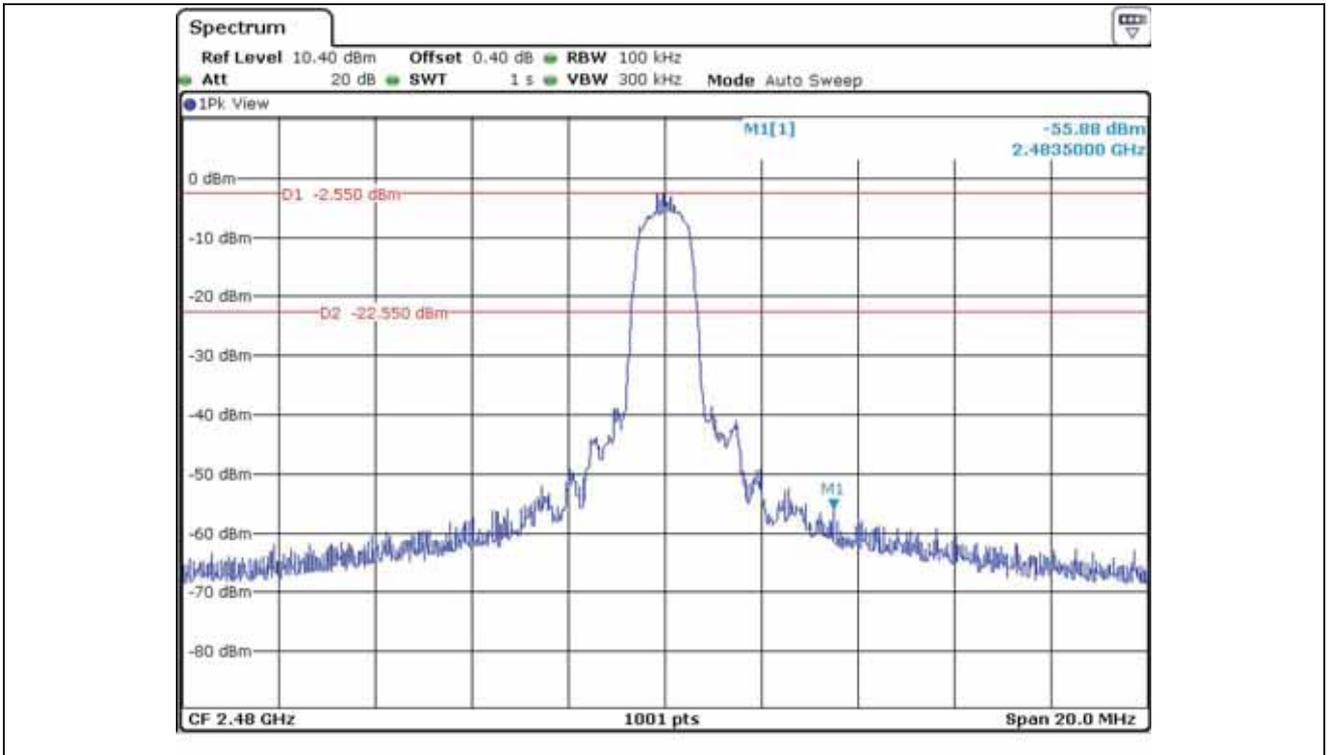


High Channel

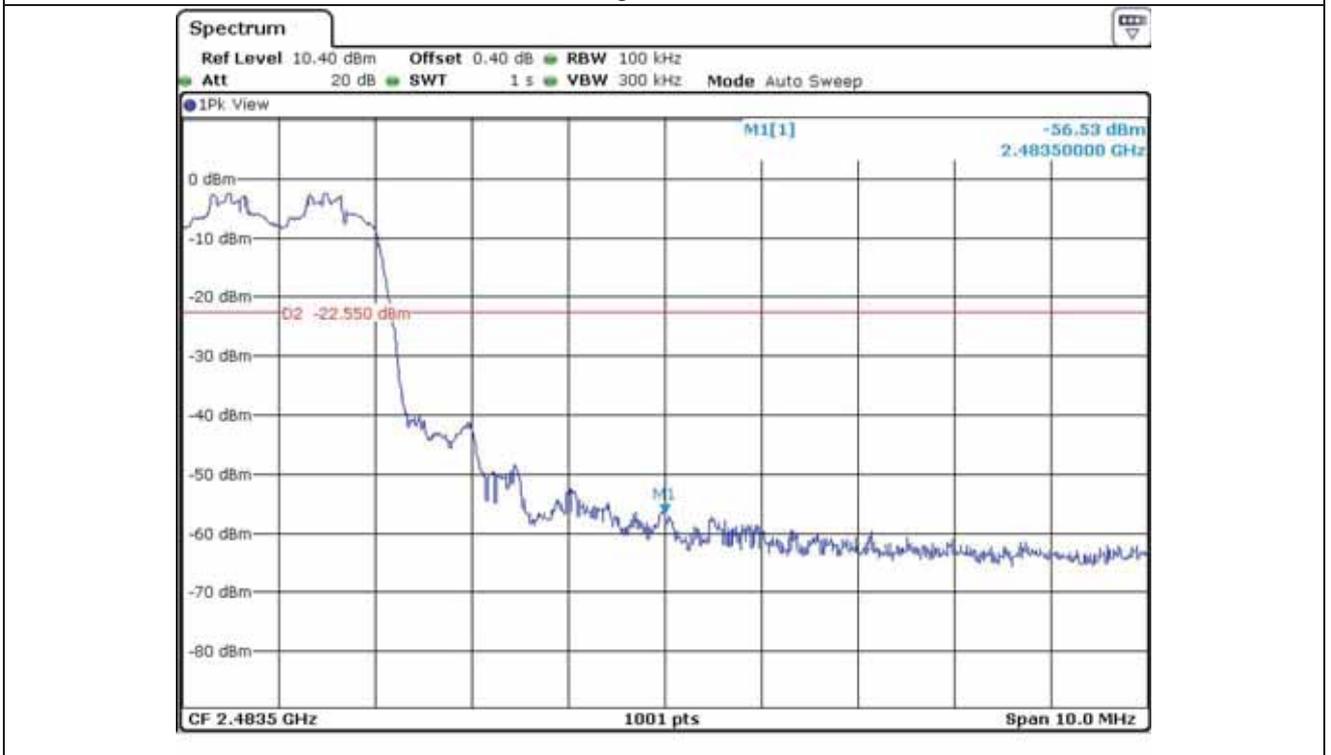

High Channel

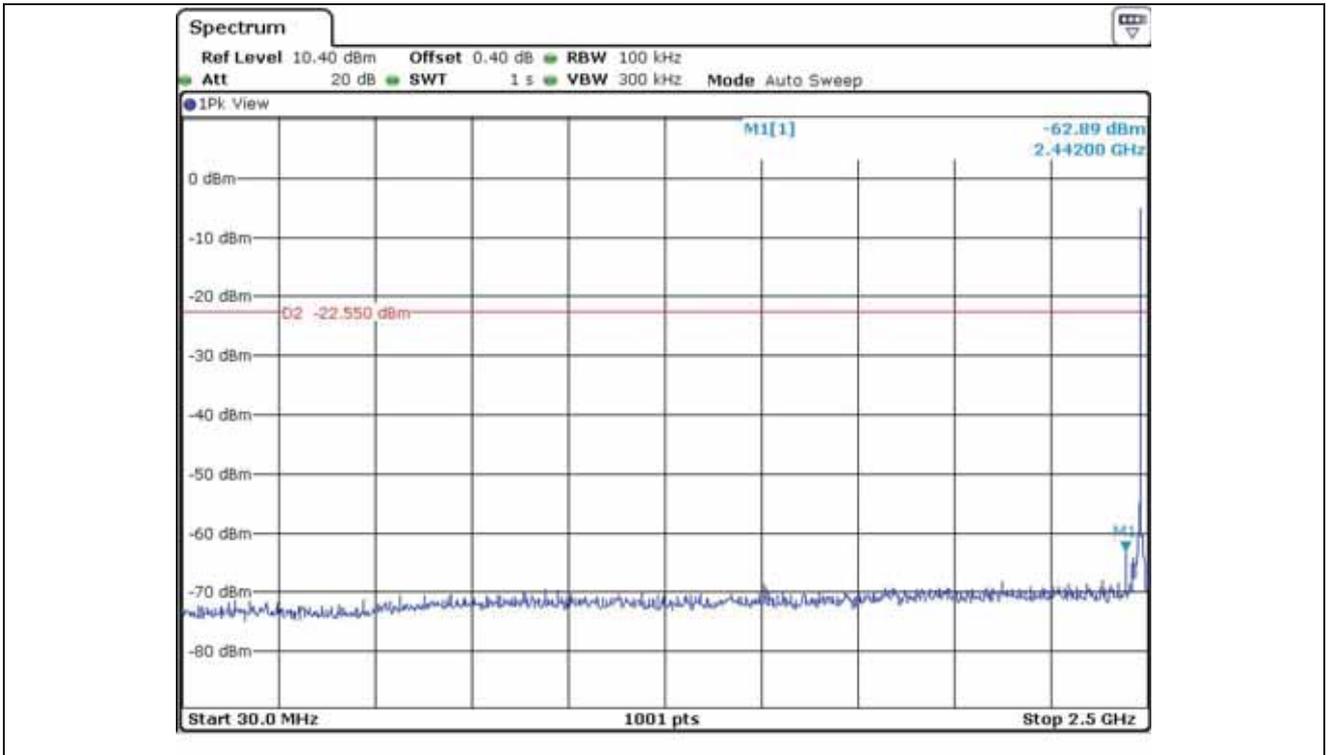


High Channel

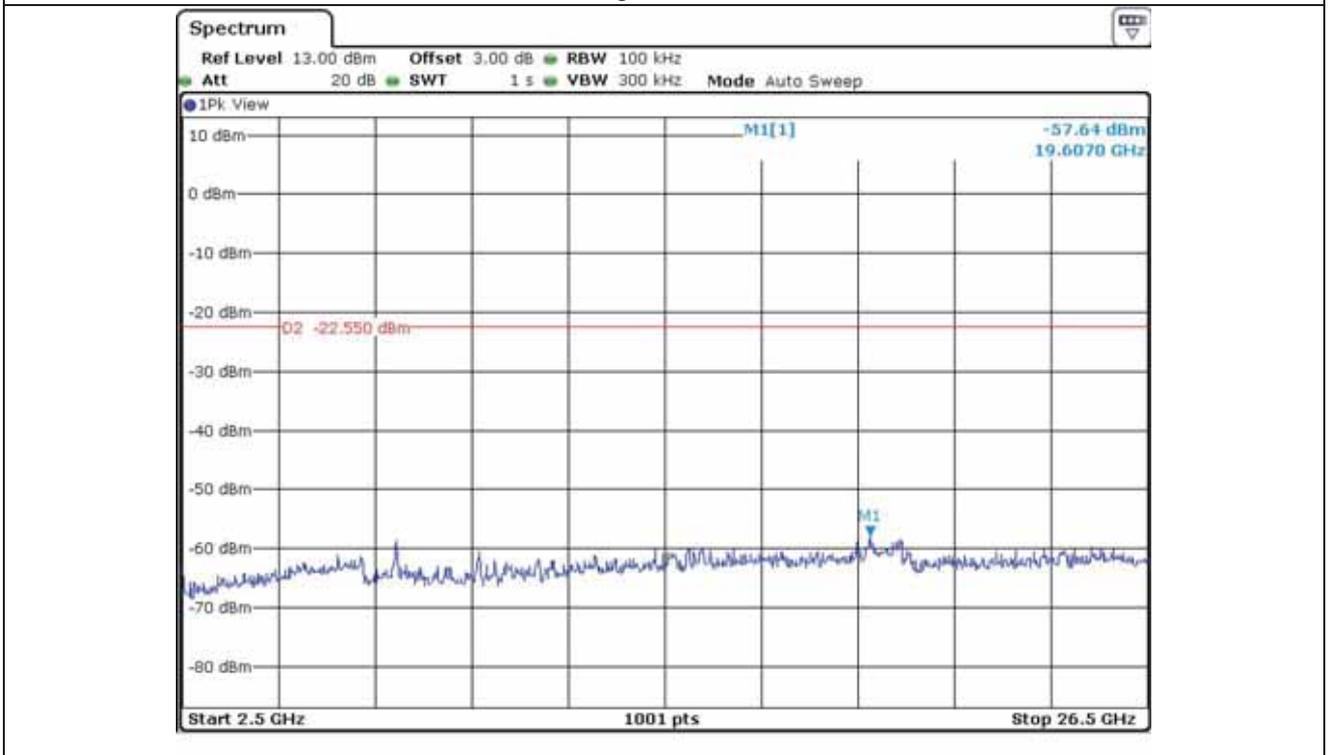


High Channel


12.5.3 Test data for 3 Mbps

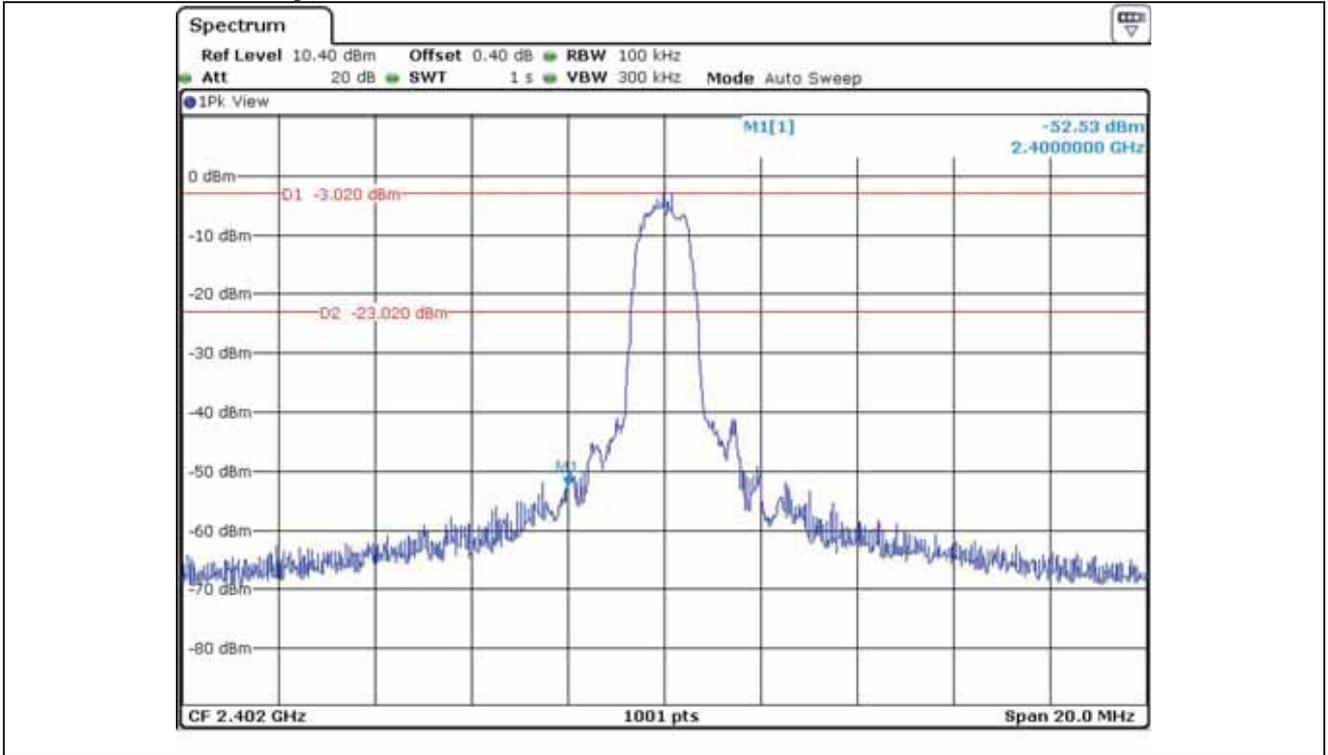


Low Channel

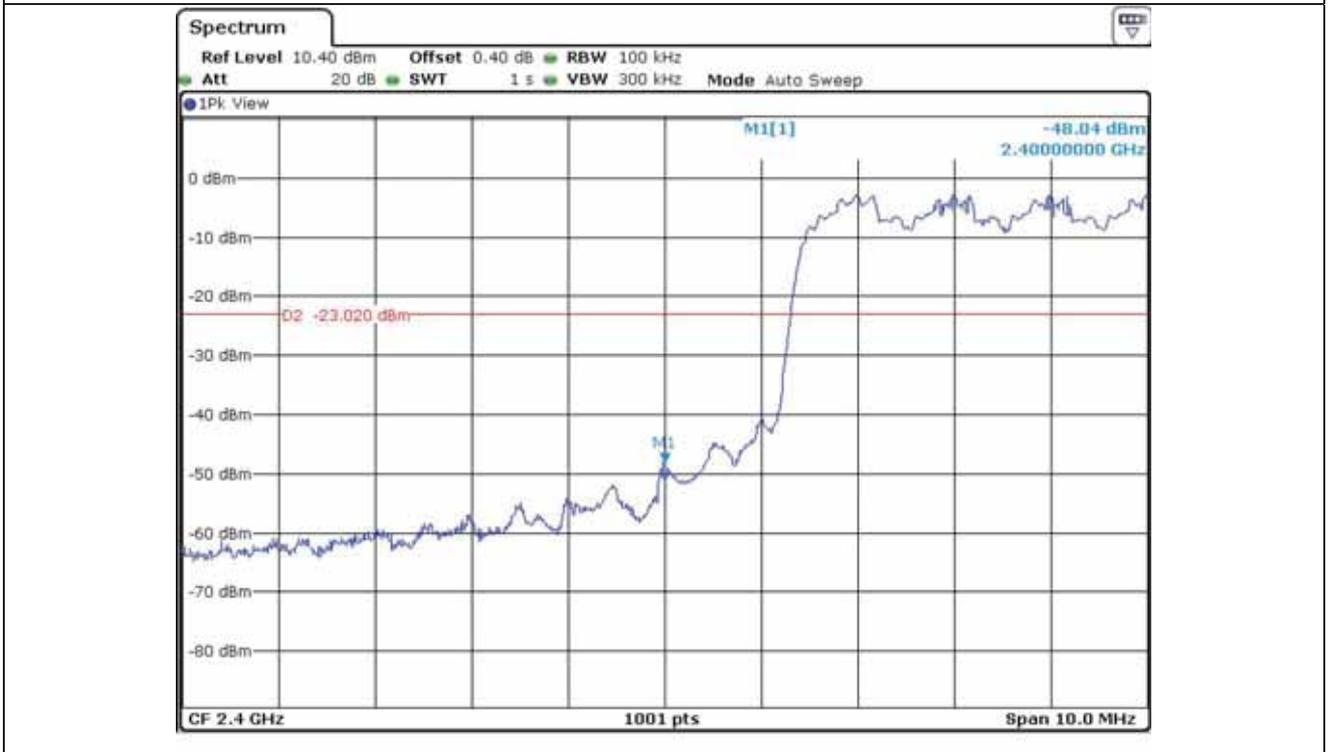


Low Channel

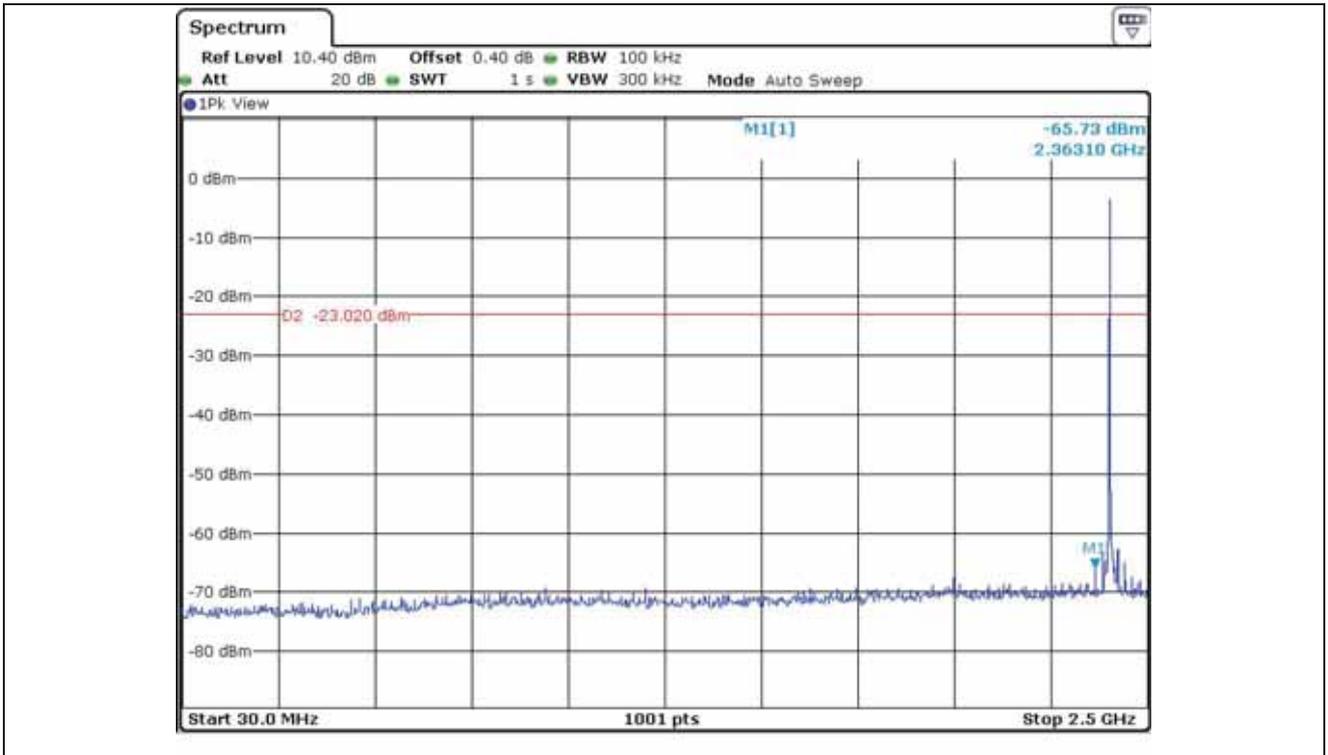


Low Channel

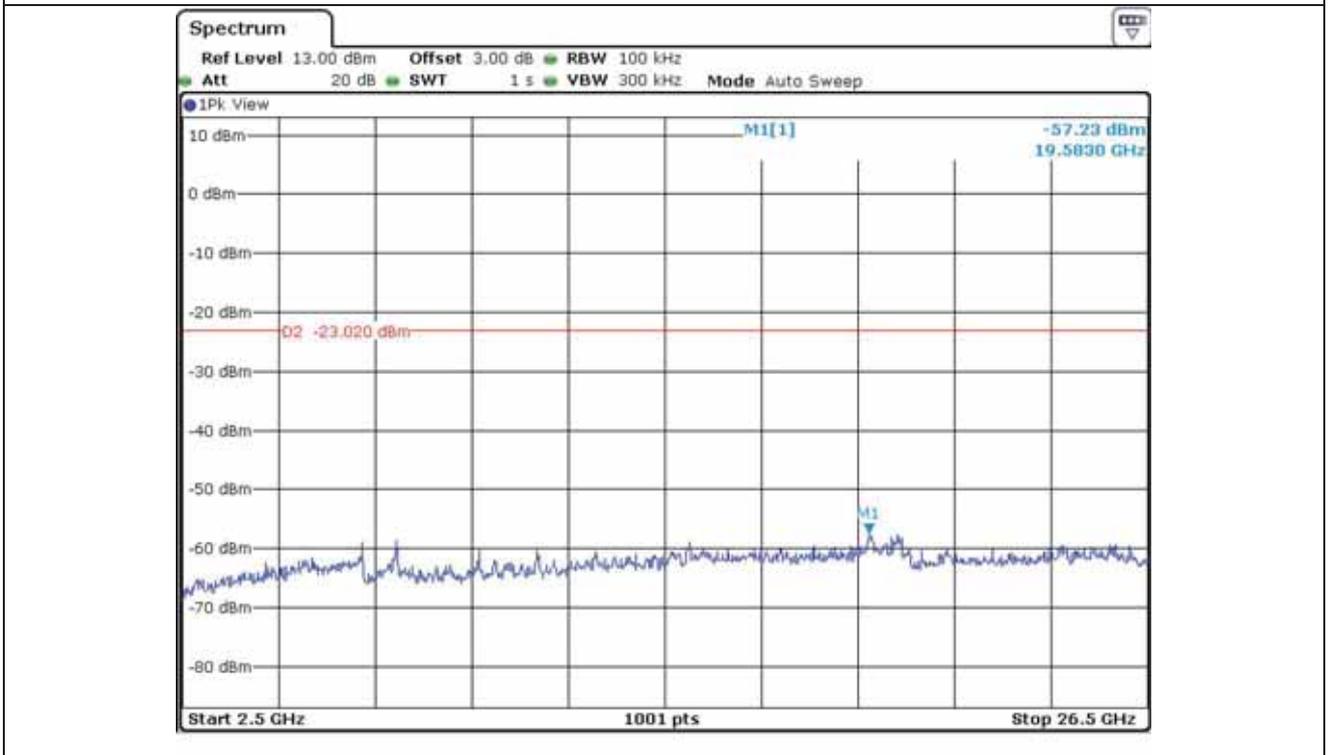


Low Channel

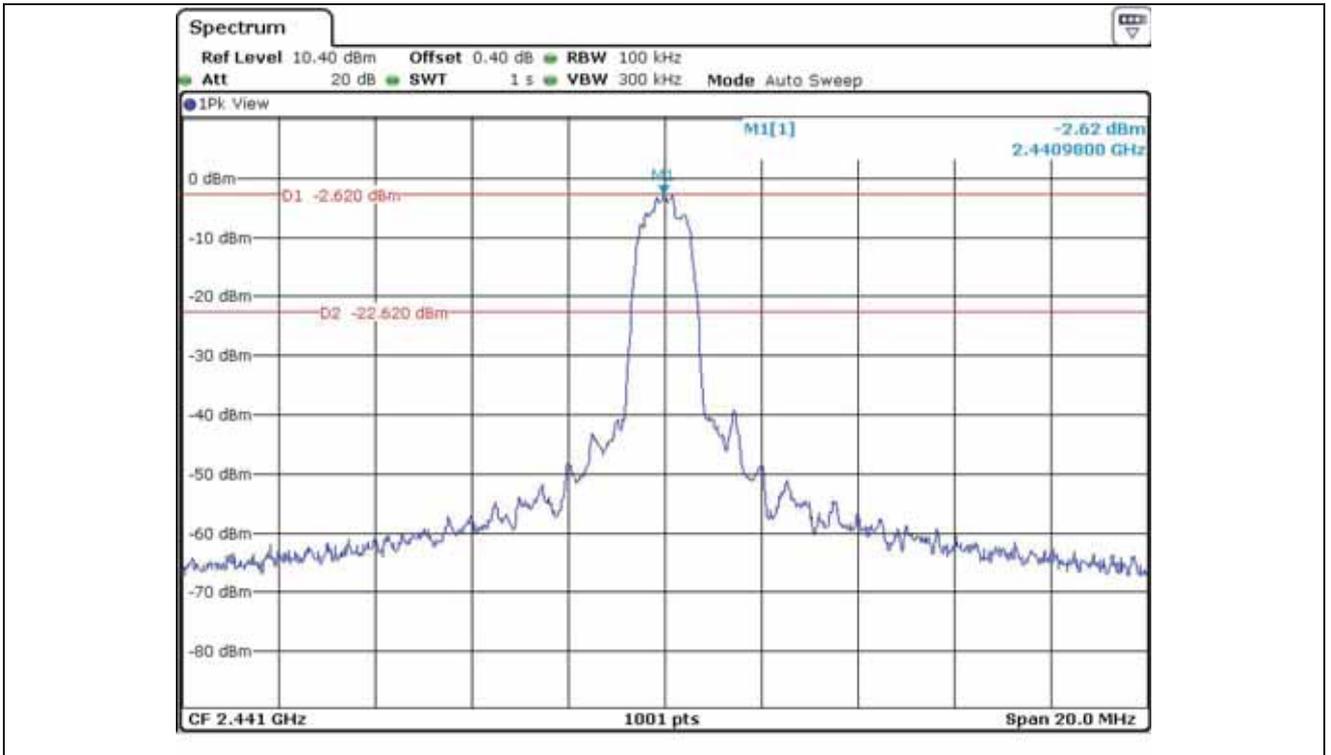


Middle Channel

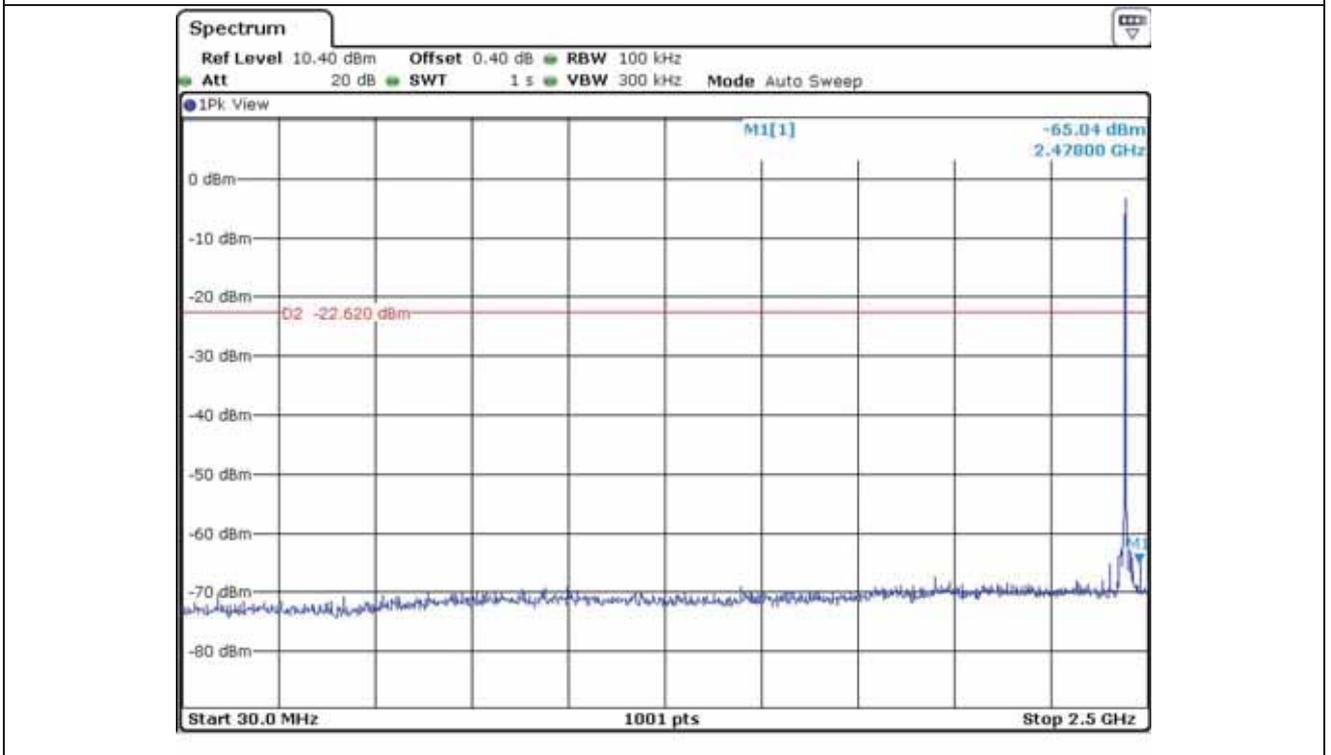


Middle Channel

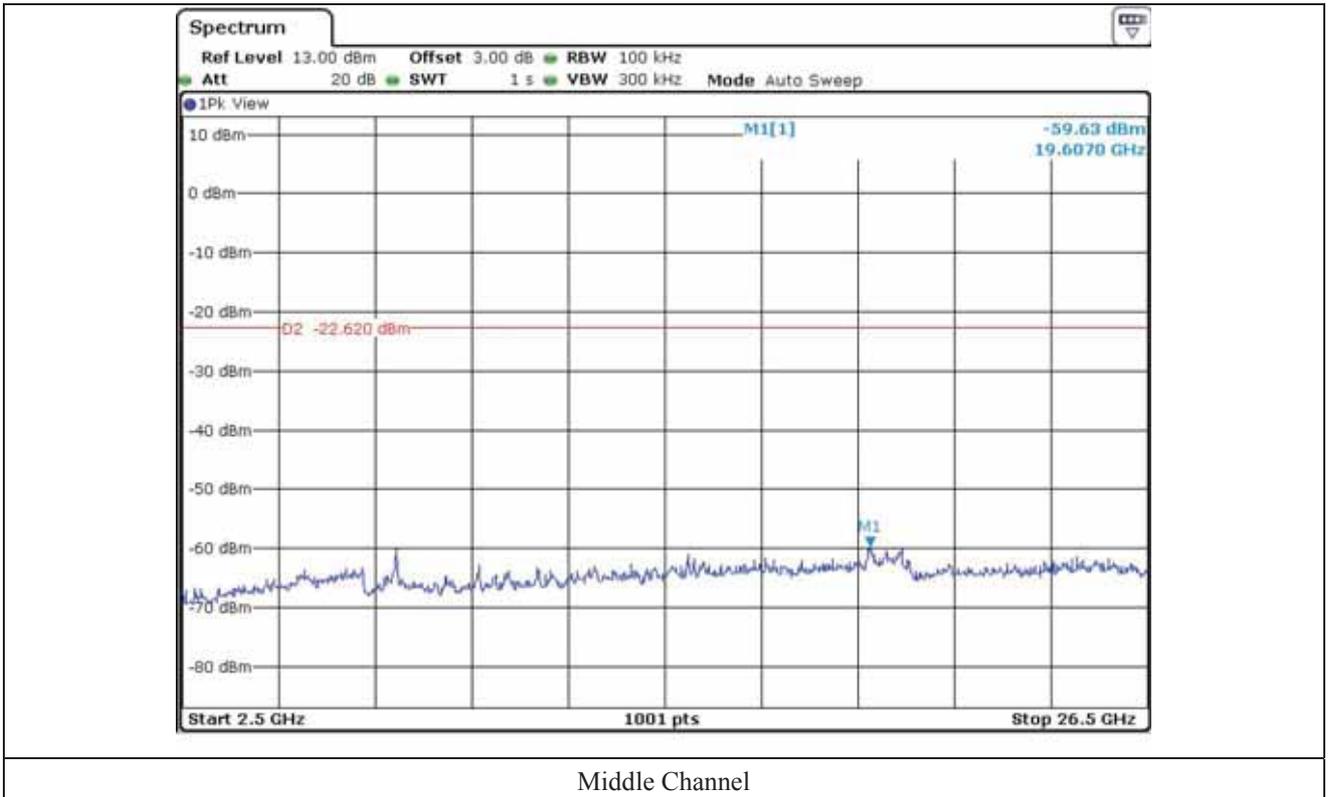


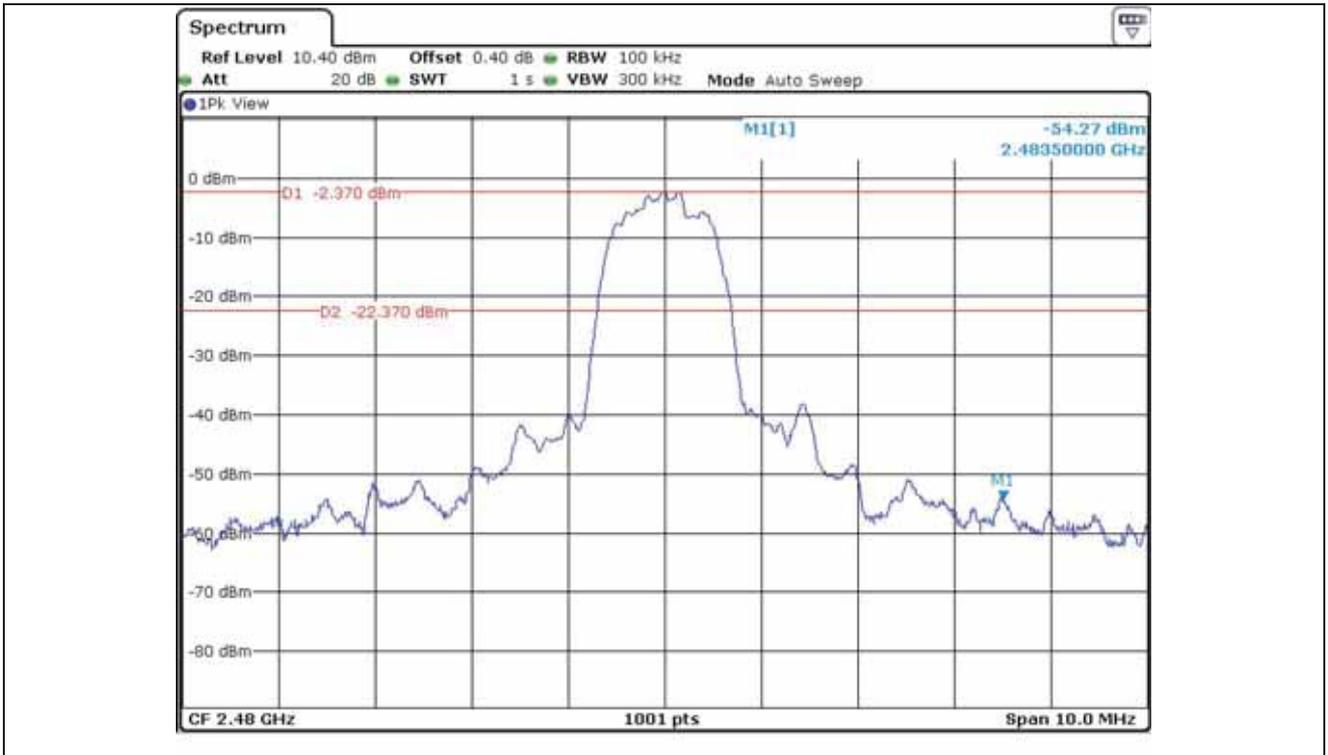


High Channel

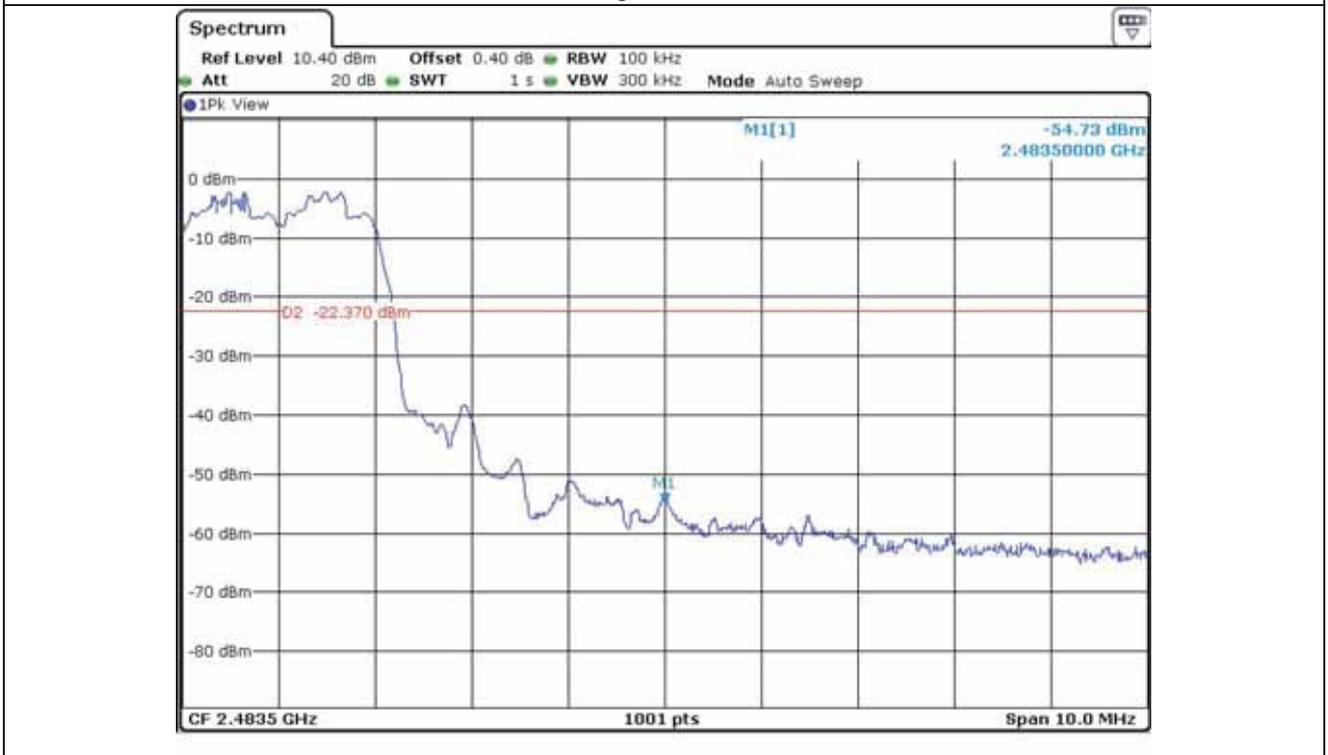

High Channel

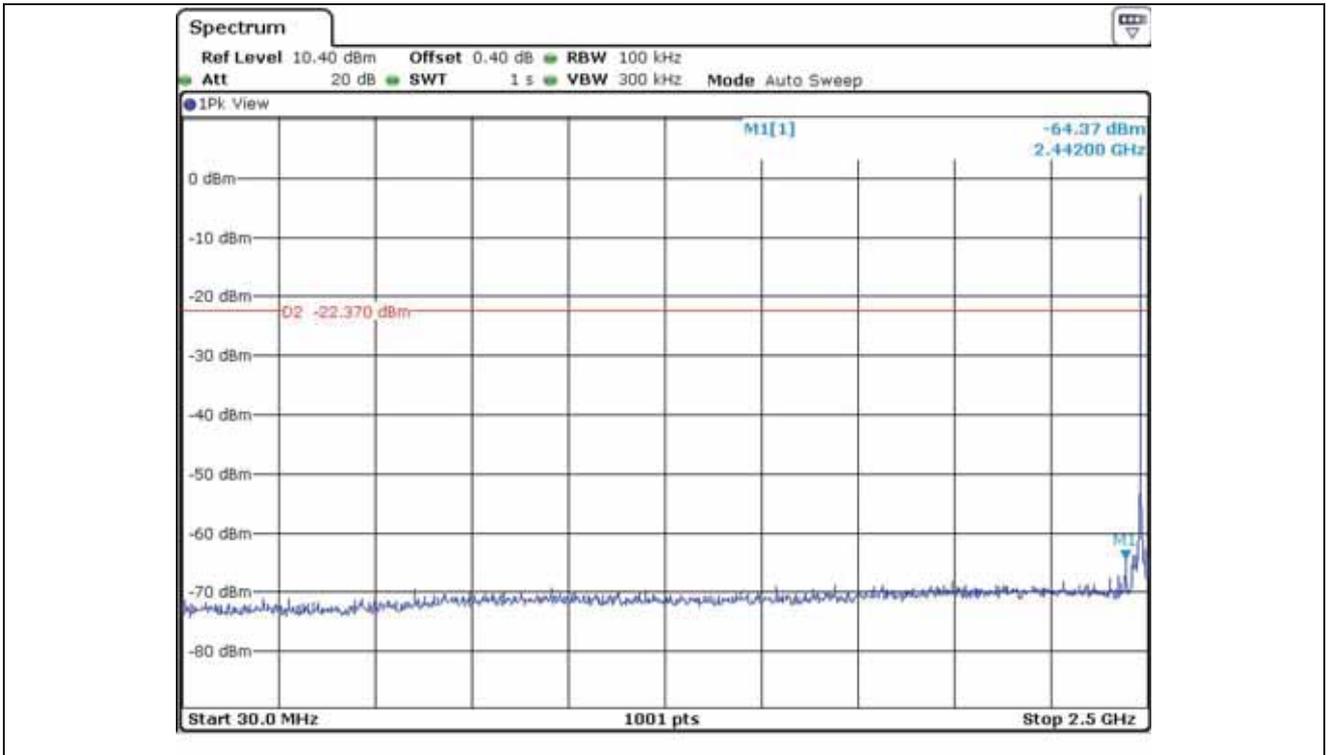

High Channel

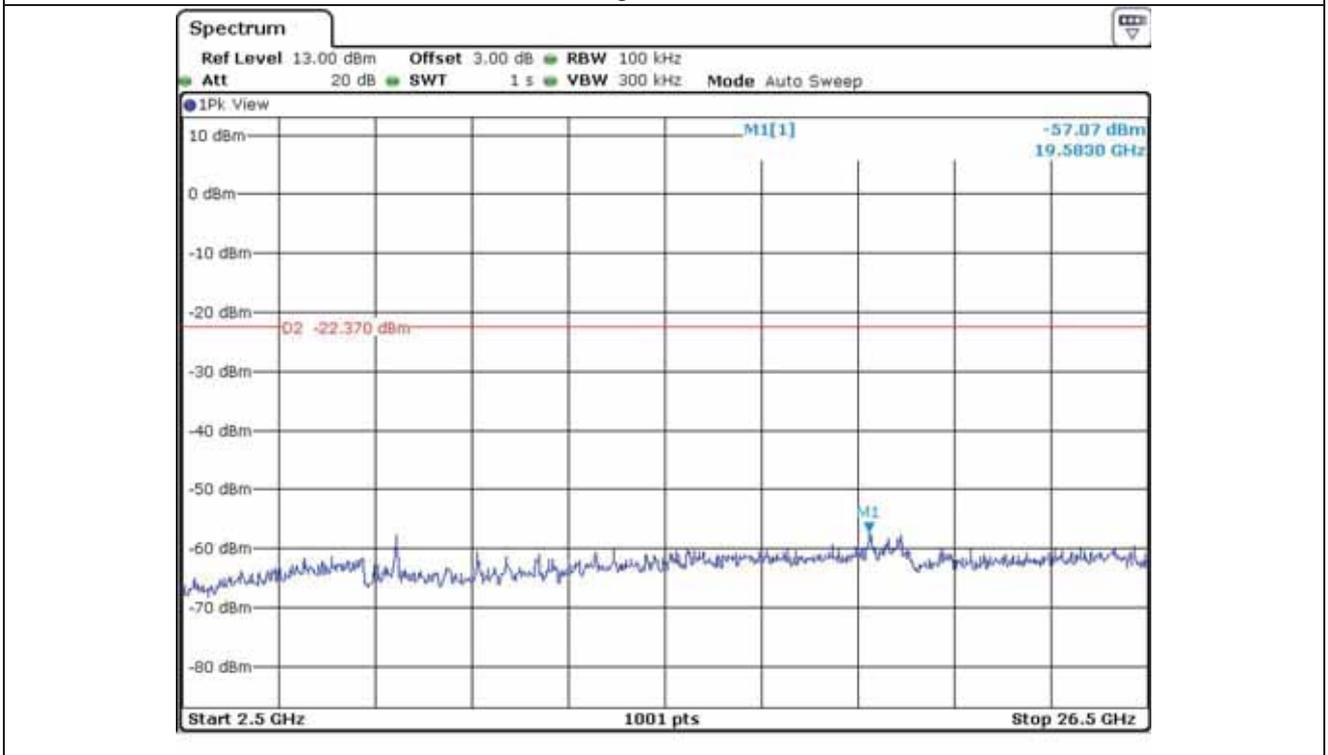

High Channel

**12.6 Test data for Transmitting Mode radiated emission**

**12.6.1 Radiated Emission which fall in the Restricted Band**

**12.6.1.1 Test data for 1 Mbps**

- . Test Date : November 23, 2015
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 390.00	44.05	Peak	H	27.10	7.50	43.00	35.65	74.00	38.35
	22.03	Average	H				13.63	54.00	40.37
	43.87	Peak	V				35.47	74.00	38.53
	22.06	Average	V				13.66	54.00	40.34
<b>Test Data for Middle Channel</b>									
2 400.00	45.38	Peak	H	27.10	7.50	43.00	36.98	74.00	37.02
	22.03	Average	H				13.63	54.00	40.37
	44.28	Peak	V				35.88	74.00	38.12
	22.30	Average	V				13.90	54.00	40.10
<b>Test Data for High Channel</b>									
2 483.50	38.82	Peak	H	27.10	7.50	43.00	30.42	74.00	43.58
	22.43	Average	H				14.03	54.00	39.97
	38.95	Peak	V				30.55	74.00	43.45
	22.19	Average	V				13.79	54.00	40.21

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical



**Tested by: Min-Gu, Ji / Engineer**

**12.6.1.2 Test data for 2 Mbps**

- Test Date : November 23, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 390.00	38.63	Peak	H	27.10	7.50	43.00	30.23	74.00	43.77
	22.21	Average	H				13.81	54.00	40.19
	44.16	Peak	V				35.76	74.00	38.24
	22.09	Average	V				13.69	54.00	40.31
<b>Test Data for Middle Channel</b>									
2 400.00	45.50	Peak	H	27.10	7.50	43.00	37.10	74.00	36.90
	22.21	Average	H				13.81	54.00	40.19
	44.55	Peak	V				36.15	74.00	37.85
	22.32	Average	V				13.92	54.00	40.08
<b>Test Data for High Channel</b>									
2 483.50	40.12	Peak	H	27.10	7.50	43.00	31.72	74.00	42.28
	22.69	Average	H				14.29	54.00	39.71
	38.23	Peak	V				29.83	74.00	44.17
	22.31	Average	V				13.91	54.00	40.09

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Min-Gu, Ji / Engineer**

**12.6.1.3 Test data for 3 Mbps**

- Test Date : November 23, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 390.00	44.99	Peak	H	27.10	7.50	43.00	36.59	74.00	37.41
	22.03	Average	H				13.63	54.00	40.37
	45.02	Peak	V				36.62	74.00	37.38
	22.04	Average	V				13.64	54.00	40.36
<b>Test Data for Middle Channel</b>									
2 400.00	43.77	Peak	H	27.10	7.50	43.00	35.37	74.00	38.63
	22.18	Average	H				13.78	54.00	40.22
	43.87	Peak	V				35.47	74.00	38.53
	22.08	Average	V				13.68	54.00	40.32
<b>Test Data for High Channel</b>									
2 483.50	39.50	Peak	H	27.10	7.50	43.00	31.10	74.00	42.90
	22.03	Average	H				13.63	54.00	40.37
	38.91	Peak	V				30.51	74.00	43.49
	22.33	Average	V				13.93	54.00	40.07

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Min-Gu, Ji / Engineer**

**12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz**

**12.6.2.1 Test data for 1 Mbps**

- Test Date : November 23, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBµV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBµV/m)	Limits (dBµV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 804.00	38.30	Peak	H	30.60	11.10	42.50	37.50	74.00	36.50
	24.69	Average	H				23.89	54.00	30.11
	38.03	Peak	V				37.23	74.00	36.77
	24.56	Average	V				23.76	54.00	30.24
<b>Test Data for Middle Channel</b>									
4 882.00	38.50	Peak	H	30.70	11.20	42.50	37.90	74.00	36.10
	24.73	Average	H				24.13	54.00	29.87
	38.69	Peak	V				38.09	74.00	35.91
	24.57	Average	V				23.97	54.00	30.03
<b>Test Data for High Channel</b>									
4 960.00	38.49	Peak	H	30.80	11.30	42.50	38.09	74.00	35.91
	24.54	Average	H				24.14	54.00	29.86
	37.76	Peak	V				37.36	74.00	36.64
	24.53	Average	V				24.13	54.00	29.87

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band

**Tested by: Min-Gu, Ji / Engineer**

**12.6.2.2 Test data for 2 Mbps**

- Test Date : November 23, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 804.00	37.21	Peak	H	30.60	11.10	42.50	36.41	74.00	37.59
	24.76	Average	H				23.96	54.00	30.04
	38.67	Peak	V				37.87	74.00	36.13
	24.58	Average	V				23.78	54.00	30.22
<b>Test Data for Middle Channel</b>									
4 882.00	38.39	Peak	H	30.70	11.20	42.50	37.79	74.00	36.21
	24.80	Average	H				24.20	54.00	29.80
	38.34	Peak	V				37.74	74.00	36.26
	24.62	Average	V				24.02	54.00	29.98
<b>Test Data for High Channel</b>									
4 960.00	38.26	Peak	H	30.80	11.30	42.50	37.86	74.00	36.14
	24.51	Average	H				24.11	54.00	29.89
	37.95	Peak	V				37.55	74.00	36.45
	24.47	Average	V				24.07	54.00	29.93

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical, “\*” Frequency fall in restricted band



**Tested by: Min-Gu, Ji / Engineer**

**12.6.2.3 Test data for 3 Mbps**

- Test Date : November 23, 2015
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 804.00	38.48	Peak	H	30.60	11.10	42.50	37.68	74.00	36.32
	24.64	Average	H				23.84	54.00	30.16
	38.37	Peak	V				37.57	74.00	36.43
	24.60	Average	V				23.80	54.00	30.20
<b>Test Data for Middle Channel</b>									
4 882.00	38.66	Peak	H	30.70	11.20	42.50	38.06	74.00	35.94
	24.69	Average	H				24.09	54.00	29.91
	38.23	Peak	V				37.63	74.00	36.37
	24.64	Average	V				24.04	54.00	29.96
<b>Test Data for High Channel</b>									
4 960.00	38.49	Peak	H	30.80	11.30	42.50	38.09	74.00	35.91
	24.54	Average	H				24.14	54.00	29.86
	38.07	Peak	V				37.67	74.00	36.33
	24.44	Average	V				24.04	54.00	29.96

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical, “\*” Frequency fall in restricted band



**Tested by: Min-Gu, Ji / Engineer**

12.6.3 Spurious Radiated Emission

12.6.3.1 Test Data for 1 Mbps

12.6.3.1.1 Test Data for 30 MHz ~ 1 000 MHz

Humidity Level : (23 ~ 24) % R.H. Temperature: (43 ~ 44) °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : MIB2 Entry

Date: November 24, 2015

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

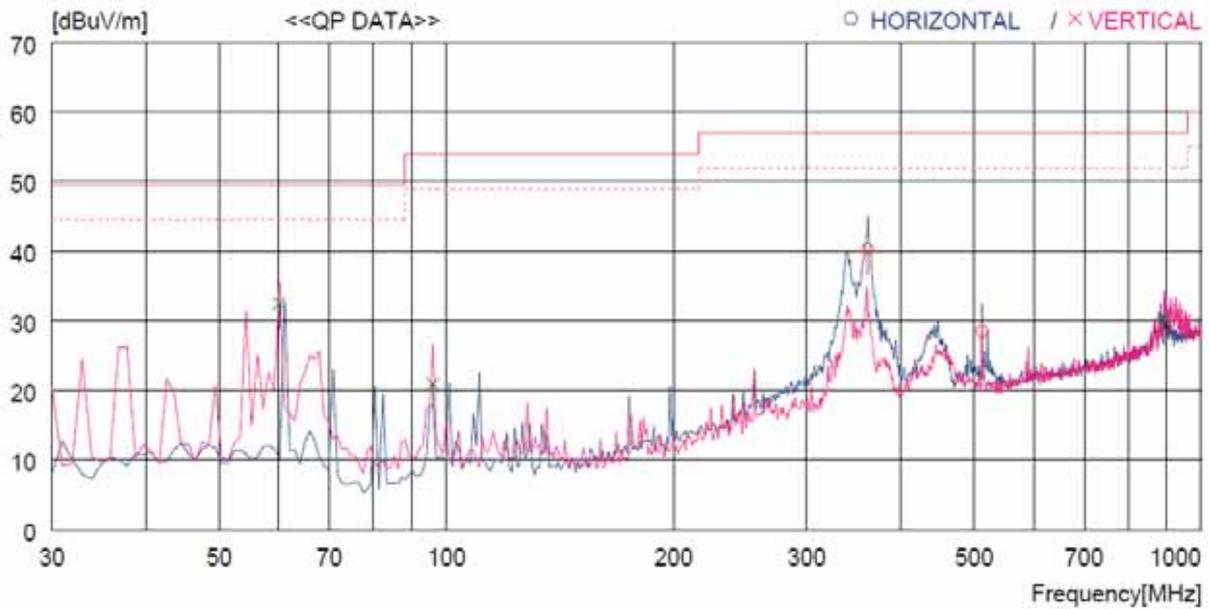

No.	FREQ [MHz]	READING QP [dBuV]	C.FACTOR [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]	COMMENT
----- Horizontal -----									
1	361.740	52.3	-12.0	40.3	56.9	16.6	100	200	
2	512.091	37.2	-8.7	28.5	56.9	28.4	200	359	
----- Vertical -----									
3	60.070	50.1	-17.6	32.5	49.5	17.0	300	352	
4	95.960	40.2	-19.3	20.9	54.0	33.1	100	359	
5	893.289	31.8	-1.5	30.3	56.9	26.6	100	174	

*Min-Gu Ji*  
**Tested by: Min-Gu, Ji / Engineer**

**12.6.3.1.2 Test Data for Below 30 MHz**

- Test Date : November 24, 2015
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								



**Tested by: Min-Gu, Ji / Engineer**

**12.6.3.2 Test Data for 2 Mbps**

**12.6.3.2.1 Test Data for 30 MHz ~ 1 000 MHz**

Humidity Level : (23 ~ 24) % R.H. Temperature: (43 ~ 44) °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : MIB2 Entry

Date: November 24, 2015

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

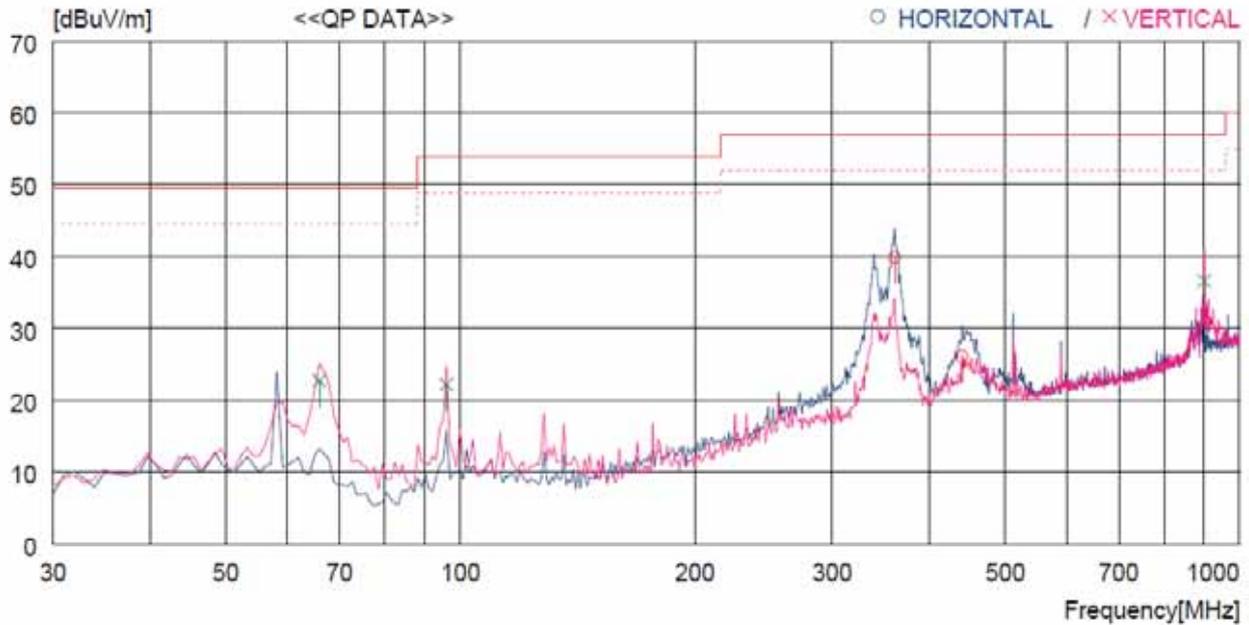

No.	FREQ [MHz]	READING QP [dBuV]	C.FACTOR [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]	COMMENT
----- Horizontal -----									
1	360.770	52.3	-12.4	39.9	56.9	17.0	100	0	
2	440.311	36.5	-10.4	26.1	56.9	30.8	100	0	
----- Vertical -----									
3	65.890	42.2	-19.5	22.7	49.5	26.8	100	180	
4	95.960	41.3	-19.1	22.2	54.0	31.8	100	359	
5	900.079	37.5	-0.9	36.6	56.9	20.3	100	359	

*[Signature]*  
**Tested by: Min-Gu, Ji / Engineer**

It should not be reproduced except in full, without the written approval of ONETECH Corp. EMC-002 (Rev.3)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Gyunggi-Do, 462-121, Korea  
 (TEL: +82-31-746-8500 FAX: +82-31-746-8700)

**EMC Testing Div** : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea (TEL: 82-31-765-8289, FAX: 82-31-766-2904)

**12.6.3.2.2 Test Data for Below 30 MHz**

- Test Date : November 24, 2015
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								



**Tested by: Min-Gu, Ji / Engineer**

**12.6.3.3 Test Data for 3 Mbps**

**12.6.3.3.1 Test Data for 30 MHz ~ 1 000 MHz**

Humidity Level : (23 ~ 24) % R.H. Temperature: (43 ~ 44) °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : MIB2 Entry

Date: November 24, 2015

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

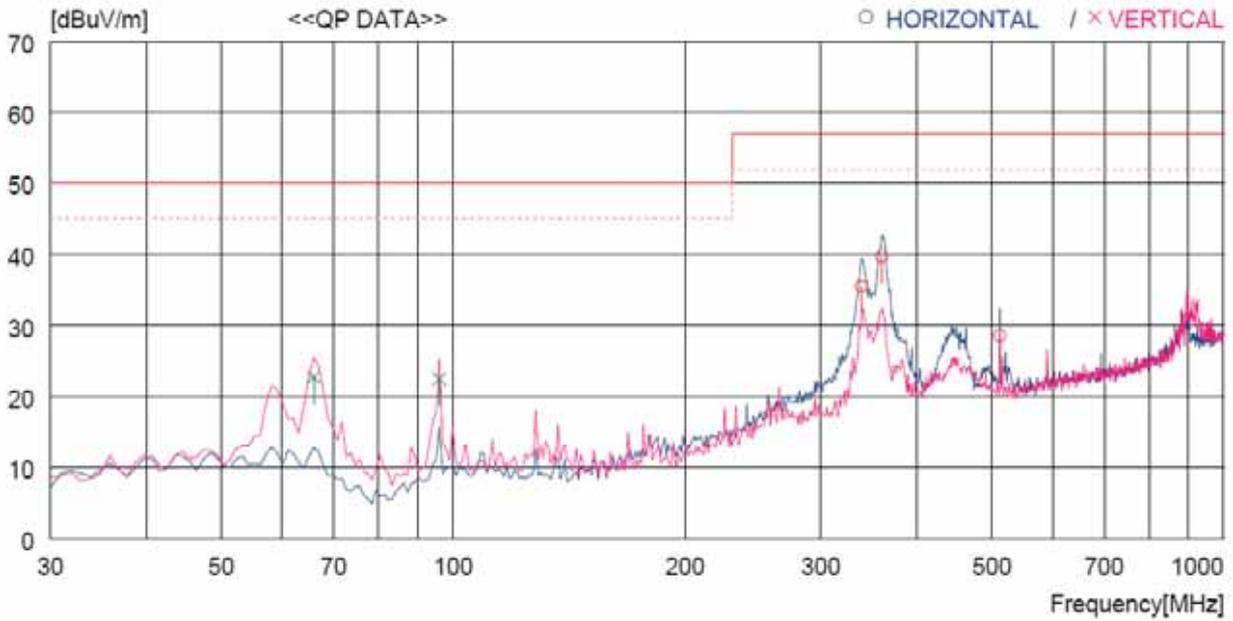

No.	FREQ [MHz]	READING QP [dBuV]	C.FACTOR [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]	COMMENT
----- Horizontal -----									
1	338.460	48.5	-13.0	35.5	57.0	21.5	100	0	
2	359.800	52.1	-12.4	39.7	57.0	17.3	100	193	
3	512.091	37.5	-9.0	28.5	57.0	28.5	200	359	
----- Vertical -----									
4	65.890	42.2	-19.5	22.7	50.0	27.3	100	359	
5	95.960	41.5	-19.1	22.4	50.0	27.6	100	359	

**Tested by: Min-Gu, Ji / Engineer**

**12.6.3.3.2 Test Data for Below 30 MHz**

- Test Date : November 24, 2015
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.								



**Tested by: Min-Gu, Ji / Engineer**

### 13. CONDUCTED EMISSION TEST

#### 13.1 Operating environment

Temperature : (22 ~ 23) °C  
 Relative humidity : (42 ~ 43) % R.H.

#### 13.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


#### 13.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESPI	Rohde & Schwarz	EMI Test Receiver	101278	Nov. 02, 2015 (1Y)
□ -	ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	Apr. 29, 2015 (1Y)
□	NSLK8128	Schwarzbeck	AMN	8128-216	Apr. 06, 2015 (1Y)
■ -	NSLK8126	Schwarzbeck	AMN	8126-404	Apr. 29, 2015 (1Y)
□ -	3825/2	EMCO	AMN	9109-1869	Apr. 29, 2015 (1Y)
■ --	3825/2	EMCO	AMN	9109-1867	Apr. 29, 2015 (1Y)

All test equipment used is calibrated on a regular basis.


**13.4 Test data for Transmitting Mode\_1 Mbps**

- Test Date : November 25, 2015
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : NEGATIVE

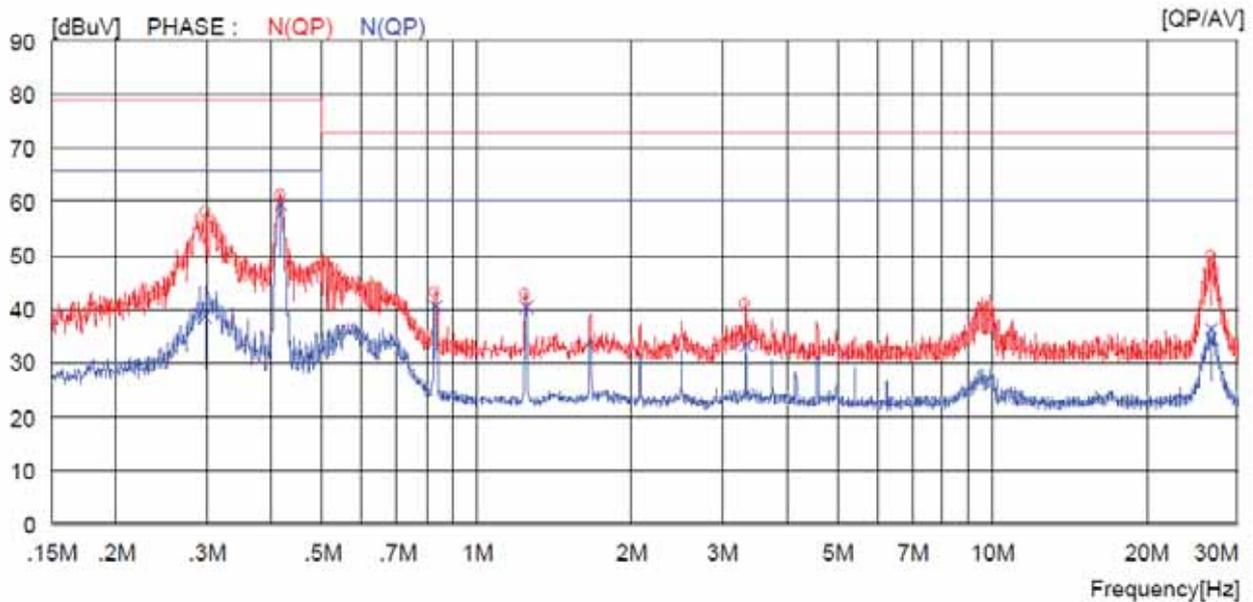

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.29800	37.9	----	20.2	58.1	----	79.0	----	20.9	----	N(QP)
2	0.41700	40.9	----	20.2	61.1	----	79.0	----	17.9	----	N(QP)
3	0.83300	23.0	----	20.2	43.2	----	73.0	----	29.8	----	N(QP)
4	1.24800	22.7	----	20.2	42.9	----	73.0	----	30.1	----	N(QP)
5	3.33200	20.8	----	20.3	41.1	----	73.0	----	31.9	----	N(QP)
6	26.58000	29.6	----	20.4	50.0	----	73.0	----	23.0	----	N(QP)
7	0.29800	----	18.5	20.2	----	38.7	----	66.0	----	27.3	N(CAV)
8	0.41700	----	39.2	20.2	----	59.4	----	66.0	----	6.6	N(CAV)
9	0.83300	----	20.4	20.2	----	40.6	----	60.0	----	19.4	N(CAV)
10	1.24800	----	20.3	20.2	----	40.5	----	60.0	----	19.5	N(CAV)
11	3.33200	----	13.1	20.3	----	33.4	----	60.0	----	26.6	N(CAV)
12	26.58000	----	15.9	20.4	----	36.3	----	60.0	----	23.7	N(CAV)

- Tested Line : POSITIVE

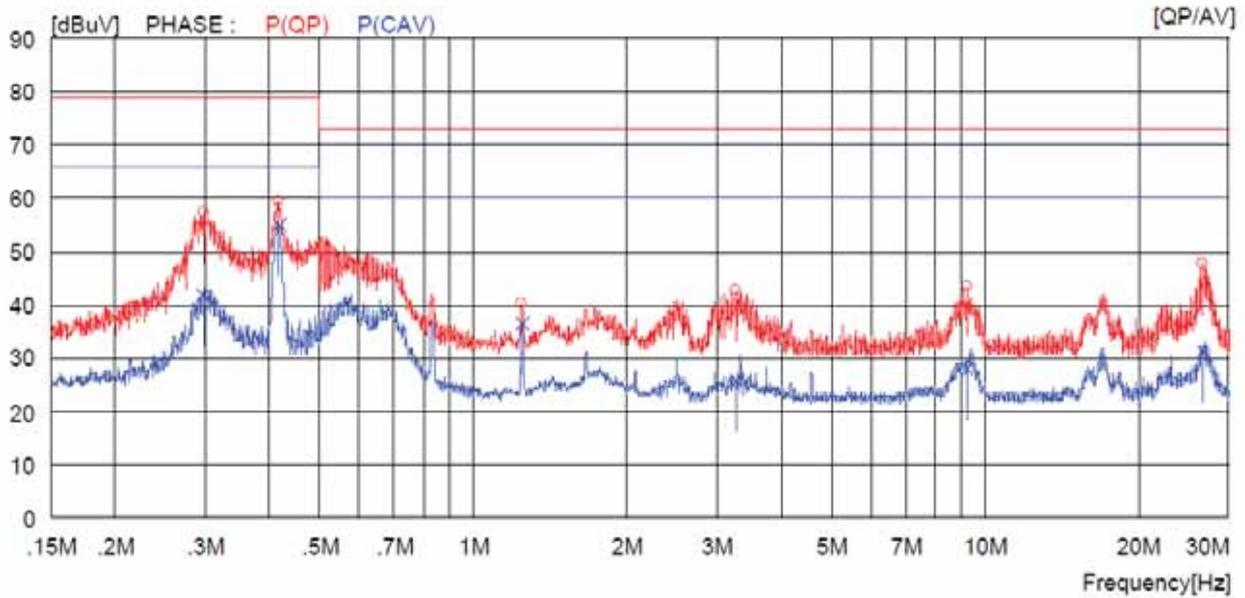

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.29800	37.0	----	20.2	57.2	----	79.0	----	21.8	----	P (QP)
2	0.41900	39.2	----	20.2	59.4	----	79.0	----	19.6	----	P (QP)
3	1.24800	20.1	----	20.2	40.3	----	73.0	----	32.7	----	P (QP)
4	3.26000	22.3	----	20.3	42.6	----	73.0	----	30.4	----	P (QP)
5	9.24000	23.3	----	20.3	43.6	----	73.0	----	29.4	----	P (QP)
6	26.60000	27.3	----	20.4	47.7	----	73.0	----	25.3	----	P (QP)
7	0.29800	----	21.6	20.2	----	41.8	----	66.0	----	24.2	P (CAV)
8	0.41900	----	34.8	20.2	----	55.0	----	66.0	----	11.0	P (CAV)
9	1.24800	----	16.3	20.2	----	36.5	----	60.0	----	23.5	P (CAV)
10	3.26000	----	5.5	20.3	----	25.8	----	60.0	----	34.2	P (CAV)
11	9.24000	----	7.7	20.3	----	28.0	----	60.0	----	32.0	P (CAV)
12	26.60000	----	11.0	20.4	----	31.4	----	60.0	----	28.6	P (CAV)


Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Min-Gu, Ji / Engineer


### 13.5 Test data for Transmitting Mode\_2 Mbps

- Test Date : November 25, 2015
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : NEGATIVE

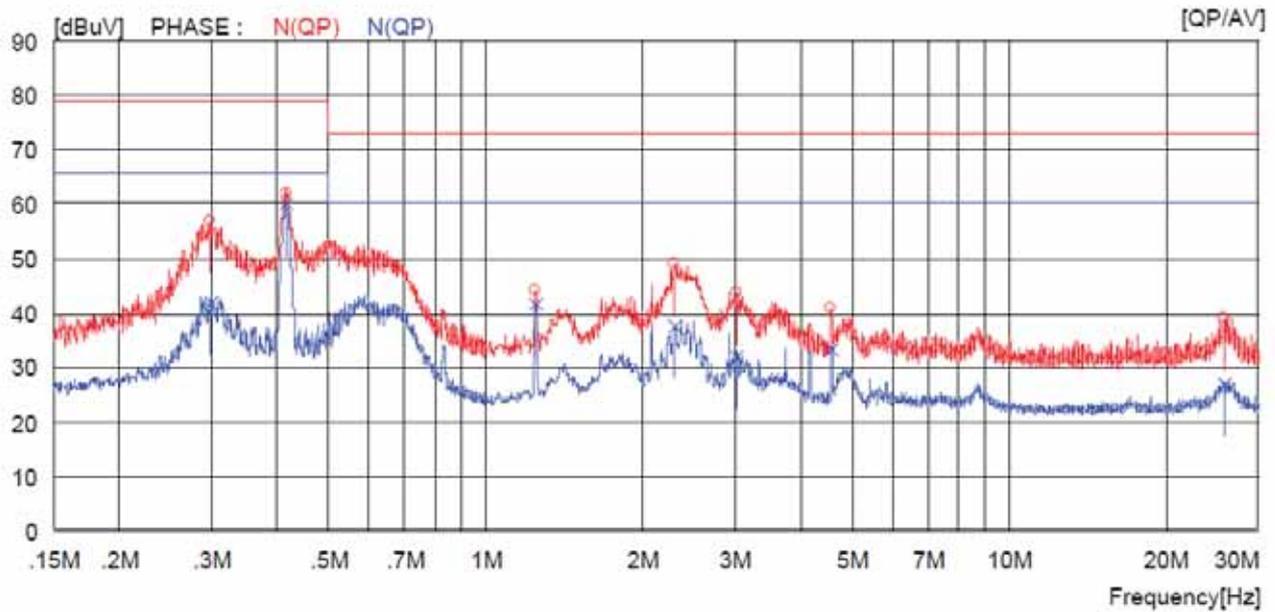

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.29900	36.6	----	20.2	56.8	----	79.0	----	22.2	----	N(QP)
2	0.41700	41.9	----	20.2	62.1	----	79.0	----	16.9	----	N(QP)
3	1.24800	23.8	----	20.2	44.0	----	73.0	----	29.0	----	N(QP)
4	2.30000	28.9	----	20.2	49.1	----	73.0	----	23.9	----	N(QP)
5	3.01600	23.5	----	20.3	43.8	----	73.0	----	29.2	----	N(QP)
6	4.58000	20.5	----	20.3	40.8	----	73.0	----	32.2	----	N(QP)
7	25.76000	18.8	----	20.4	39.2	----	73.0	----	33.8	----	N(QP)
8	0.29900	----	21.7	20.2	----	41.9	----	66.0	----	24.1	N(CAV)
9	0.41700	----	39.9	20.2	----	60.1	----	66.0	----	5.9	N(CAV)
10	1.24800	----	21.5	20.2	----	41.7	----	60.0	----	18.3	N(CAV)
11	2.30000	----	17.3	20.2	----	37.5	----	60.0	----	22.5	N(CAV)
12	3.01600	----	11.7	20.3	----	32.0	----	60.0	----	28.0	N(CAV)
13	4.58000	----	13.0	20.3	----	33.3	----	60.0	----	26.7	N(CAV)
14	25.76000	----	6.6	20.4	----	27.0	----	60.0	----	33.0	N(CAV)

- Tested Line : POSITIVE

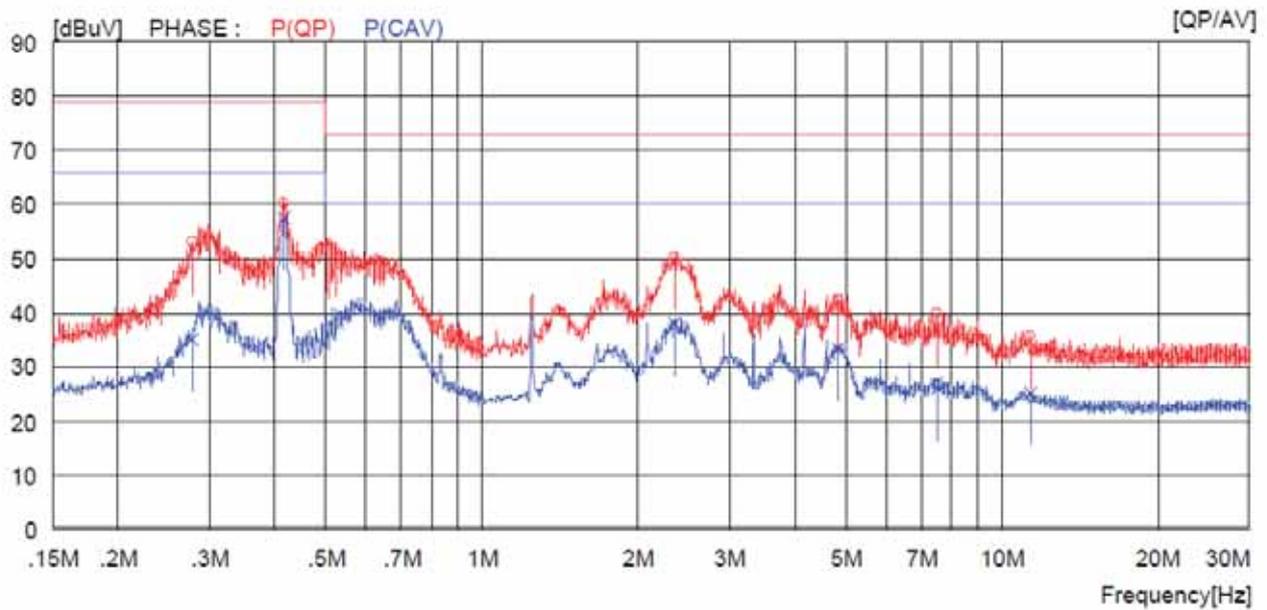

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.27800	32.7	----	20.2	52.9	----	79.0	----	26.1	----	P(QP)
2	0.41800	39.8	----	20.2	60.0	----	79.0	----	19.0	----	P(QP)
3	2.35200	30.0	----	20.2	50.2	----	73.0	----	22.8	----	P(QP)
4	4.84800	22.0	----	20.3	42.3	----	73.0	----	30.7	----	P(QP)
5	7.53500	19.5	----	20.3	39.8	----	73.0	----	33.2	----	P(QP)
6	11.35000	15.4	----	20.3	35.7	----	73.0	----	37.3	----	P(QP)
7	0.27800	----	14.9	20.2	----	35.1	----	66.0	----	30.9	P(CAV)
8	0.41800	----	37.4	20.2	----	57.6	----	66.0	----	8.4	P(CAV)
9	2.35200	----	17.9	20.2	----	38.1	----	60.0	----	21.9	P(CAV)
10	4.84800	----	13.2	20.3	----	33.5	----	60.0	----	26.5	P(CAV)
11	7.53500	----	5.7	20.3	----	26.0	----	60.0	----	34.0	P(CAV)
12	11.35000	----	4.9	20.3	----	25.2	----	60.0	----	34.8	P(CAV)


Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Min-Gu, Ji / Engineer


**13.6 Test data for Transmitting Mode\_3 Mbps**

- Test Date : November 25, 2015
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : NEGATIVE

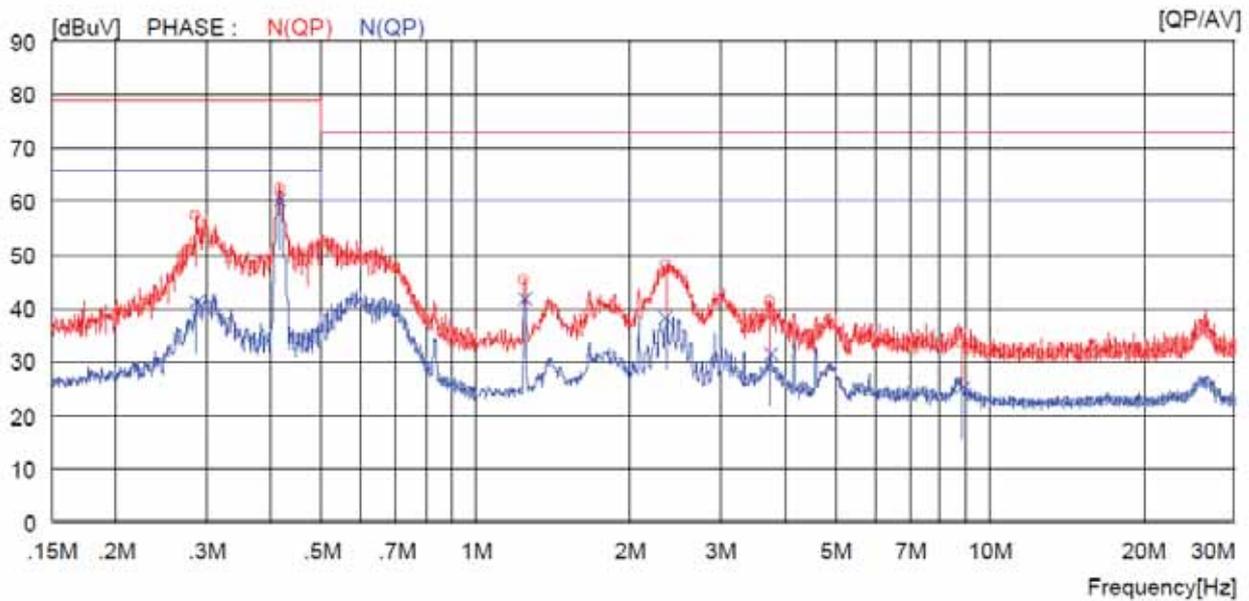

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.28700	37.0	----	20.2	57.2	----	79.0	----	21.8	----	N (QP)
2	0.41700	42.1	----	20.2	62.3	----	79.0	----	16.7	----	N (QP)
3	1.24800	25.2	----	20.2	45.4	----	73.0	----	27.6	----	N (QP)
4	2.34800	28.0	----	20.2	48.2	----	73.0	----	24.8	----	N (QP)
5	3.75600	21.0	----	20.3	41.3	----	73.0	----	31.7	----	N (QP)
6	8.86500	13.1	----	20.3	33.4	----	73.0	----	39.6	----	N (QP)
7	0.28700	----	21.1	20.2	----	41.3	----	66.0	----	24.7	N (CAV)
8	0.41700	----	40.2	20.2	----	60.4	----	66.0	----	5.6	N (CAV)
9	1.24800	----	21.6	20.2	----	41.8	----	60.0	----	18.2	N (CAV)
10	2.34800	----	18.1	20.2	----	38.3	----	60.0	----	21.7	N (CAV)
11	3.75600	----	11.2	20.3	----	31.5	----	60.0	----	28.5	N (CAV)
12	8.86500	----	5.1	20.3	----	25.4	----	60.0	----	34.6	N (CAV)

- Tested Line : POSITIVE

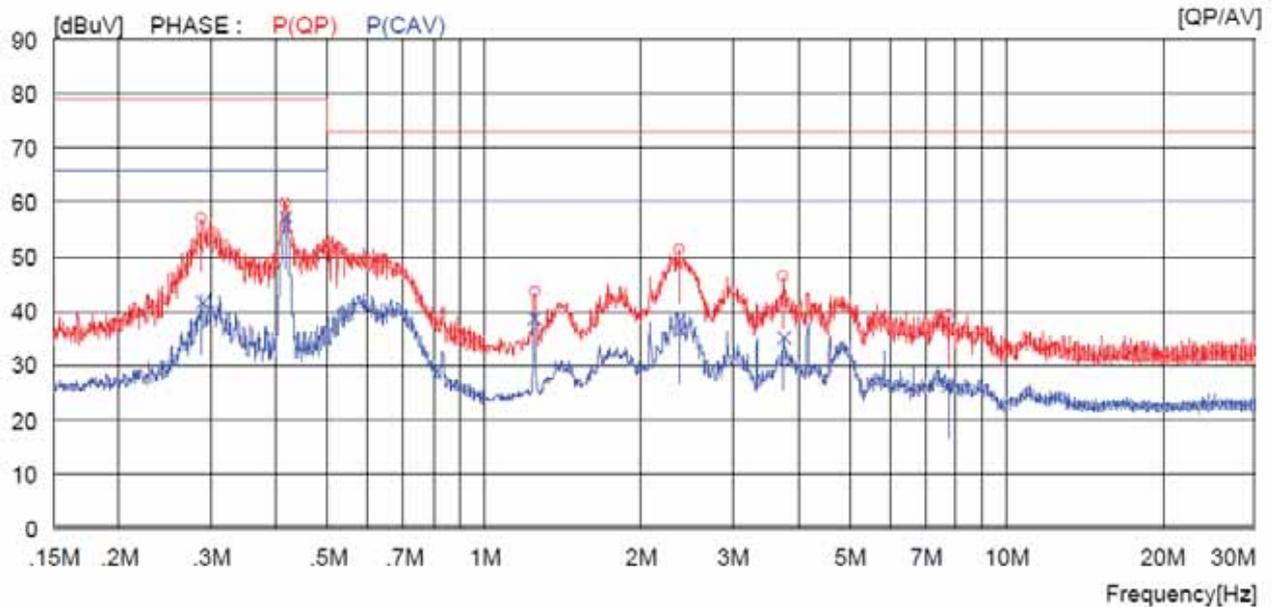

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.28900	36.7	----	20.2	56.9	----	79.0	----	22.1	----	P (QP)
2	0.41700	39.7	----	20.2	59.9	----	79.0	----	19.1	----	P (QP)
3	1.25200	23.1	----	20.2	43.3	----	73.0	----	29.7	----	P (QP)
4	2.37600	30.9	----	20.2	51.1	----	73.0	----	21.9	----	P (QP)
5	3.75600	25.9	----	20.3	46.2	----	73.0	----	26.8	----	P (QP)
6	7.74500	18.9	----	20.3	39.2	----	73.0	----	33.8	----	P (QP)
7	0.28900	----	21.3	20.2	----	41.5	----	66.0	----	24.5	P (CAV)
8	0.41700	----	37.1	20.2	----	57.3	----	66.0	----	8.7	P (CAV)
9	1.25200	----	18.5	20.2	----	38.7	----	60.0	----	21.3	P (CAV)
10	2.37600	----	16.1	20.2	----	36.3	----	60.0	----	23.7	P (CAV)
11	3.75600	----	14.8	20.3	----	35.1	----	60.0	----	24.9	P (CAV)
12	7.74500	----	6.0	20.3	----	26.3	----	60.0	----	33.7	P (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

**Tested by: Min-Gu, Ji / Engineer**