

# FCC / IC BT LE REPORT

## Certification

**Applicant Name:**  
LG Electronics Inc.**Address:**  
222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea**Date of Issue:**  
February 11, 2019**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA  
**Report No.:** HCT-RF-1902-FI006

<b>FCC ID:</b>	<b>BEJ-WK7</b>
<b>IC:</b>	<b>2703H-WK7</b>
<b>APPLICANT:</b>	<b>LG Electronics Inc.</b>

<b>Model:</b>	WK7
<b>Additional Model:</b>	WK7W
<b>EUT Type:</b>	ThinQ Speaker
<b>RF Peak Output Power:</b>	6.644 dBm (4.617 mW)
<b>Frequency Range:</b>	2402 MHz -2480 MHz
<b>Modulation type</b>	GFSK
<b>FCC Classification:</b>	Digital Transmission System(DTS)
<b>FCC Rule Part(s):</b>	Part 15.247
<b>ISED Rule Part(s):</b>	RSS-247 Issue 2 (February 2017), RSS-Gen Issue 5(April 2018)

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



---

**Report prepared by : Jeong Ho Kim**  
**Engineer of Telecommunication testing center**

---

**Approved by : Kwon Jeong**  
**Manager of Telecommunication testing center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1902-FI006	February 11, 2019	- First Approval Report

# Table of Contents

1. EUT DESCRIPTION .....	4
2. TEST METHODOLOGY .....	5
EUT CONFIGURATION .....	5
EUT EXERCISE .....	5
GENERAL TEST PROCEDURES .....	5
DESCRIPTION OF TEST MODES .....	5
3. INSTRUMENT CALIBRATION.....	6
4. FACILITIES AND ACCREDITATIONS .....	6
FACILITIES .....	6
EQUIPMENT .....	6
5. ANTENNA REQUIREMENTS .....	6
6. MEASUREMENT UNCERTAINTY .....	7
7. DESCRIPTION OF TESTS.....	8
8. SUMMARY TEST OF RESULTS .....	27
9. TEST RESULT .....	29
9.1 DUTY CYCLE.....	29
9.2 6dB BANDWIDTH.....	31
9.3 OUTPUT POWER .....	34
9.4 POWER SPECTRAL DENSITY .....	40
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	43
9.6 RADIATED SPURIOUS EMISSIONS .....	52
9.7 RADIATED RESTRICTED BAND EDGES .....	58
9.8 RECEIVER SPURIOUS EMISSIONS .....	61
9.9 POWERLINE CONDUCTED EMISSIONS .....	62
10. LIST OF TEST EQUIPMENT .....	66
11. ANNEX A_ TEST SETUP PHOTO .....	68

## 1. EUT DESCRIPTION

Model	WK7	
Additional Model	WK7W	
EUT Type	ThinQ Speaker	
Power Supply	AC 100 ~ 240 V	
Frequency Range	TX: 2402 MHz ~ 2480 MHz RX: 2402 MHz ~ 2480 MHz	
Max. RF Output Power	Peak	6.644 dBm (4.617 mW)
	Average	6.318 dBm (4.283 mW)
BT Operating Mode	BT_Low Energy Mode	
Modulation Type	GFSK	
Bluetooth Version	4.2	
Number of Channels	40 Channels	
Antenna Specification	Antenna type: FPCB Antenna Peak Gain : -3.88 dBi	
Date(s) of Tests	January 17, 2019 ~ February 11, 2019	
PMN (Product Marketing Number)	ThinQ Speaker	
HVIN (Hardware Version Identification Number)	WK7	
FVIN (Firmware Version Identification Number)	1.0	
HMN (Host Marketing Name)	N/A	

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05 dated August 24, 2018 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

## GENERAL TEST PROCEDURES

### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

### **Conducted Antenna Terminal**

See Section from 8.3.(KDB 558074 v05)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### **3. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### **4. FACILITIES AND ACCREDITATIONS**

#### **FACILITIES**

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

#### **EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5. ANTENNA REQUIREMENTS**

#### **According to FCC 47 CFR §15.203 / RSS-Gen(Issue 5) Section 8:**

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\* The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

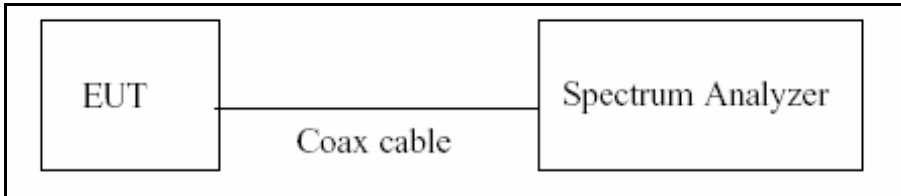

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10 \cdot \log(1/\text{Duty Cycle})$




## 7.2. 6dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration

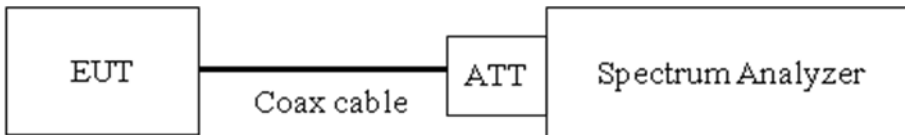

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05, Procedure 11.8.1 in ANSI 63.10-2013)


- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration

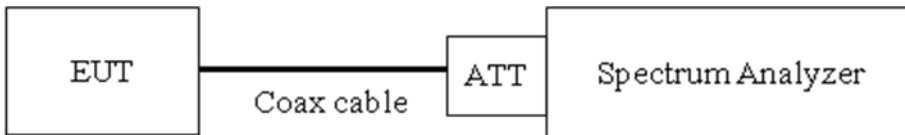

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

This EUT TX condition is actual operating mode by BT LE mode test program.

The Spectrum Analyzer is set to

- Peak Power (Procedure 8.3.1.1 in KDB 558074 v05, Procedure 11.9.1.1 in ANSI 63.10-2013)
  - 1) RBW  $\geq$  DTS Bandwidth
  - 2) VBW  $\geq$  3 x RBW
  - 3) SPAN  $\geq$  3 x RBW
  - 4) Detector Mode = Peak
  - 5) Sweep = auto couple
  - 6) race Mode = max hold
  - 7) Allow trace to fully stabilize.
  - 8) Use peak marker function to determine the peak amplitude level

- Average Power (Procedure 8.3.2.2 in KDB 558074 v05, Procedure 11.9.2.2 in ANSI 63.10-2013)
  - 1) We use the spectrum analyzer's integrated band power measurement function.
  - 2) Measure the duty cycle
  - 3) Set span to at least 1.5 times the OBW
  - 4) RBW = 1-5 % of the OBW, not to exceed 1 MHz.
  - 5) VBW  $\geq 3 \times$  RBW.
  - 6) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
  - 7) Sweep time = auto.
  - 8) Detector = RMS(i.e., power averaging)
  - 9) Do not use sweep triggering. Allow the sweep to "free run".
  - 10) Trace average at least 100 traces in power averaging(RMS) mode.
  - 11) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
  - 12) Add  $10 \log (1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

### **Sample Calculation**


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

### Test Configuration

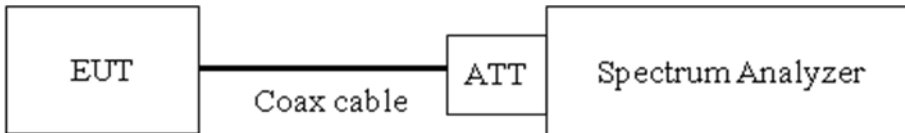

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Span = 1.5 times the DTS channel bandwidth.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = peak
- 7) Trace Mode = max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.  
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 20 dBc ]

### Test Configuration

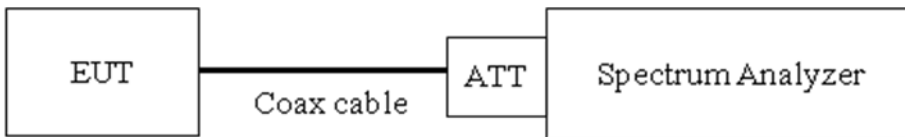

### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	11.75
100	10.28
200	10.64
300	10.58
400	10.68
500	10.70
600	10.77
700	10.80
800	10.80
900	10.79
1000	10.84
2000	11.09
2400*	11.10
2500*	11.12
3000	11.13
4000	11.34
5000	11.52
6000	11.51
7000	11.80
8000	11.77
9000	11.93
10000	12.01
11000	12.01
12000	12.13
13000	12.28
14000	12.35
15000	12.43
16000	12.49
17000	12.47
18000	12.53
19000	12.52
20000	12.59
21000	12.62
22000	12.76
23000	13.05
24000	12.79
25000	12.98
26000	12.47

Note : 1. '\*' is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

## 7.6. Radiated Test

### Limit

#### FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

#### IC


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

#### FCC&IC


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Test Configuration**

Below 30 MHz

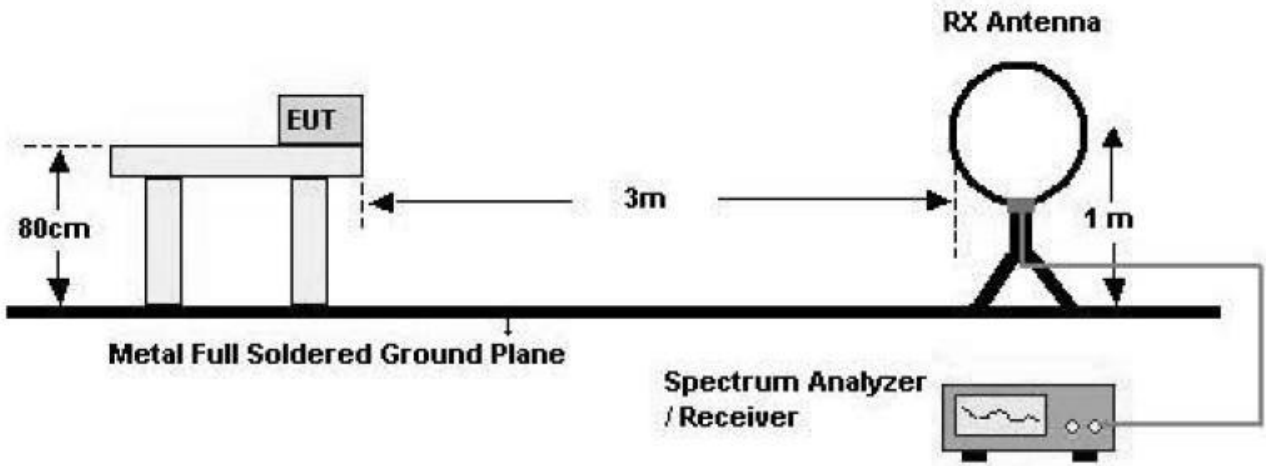


30 MHz - 1 GHz

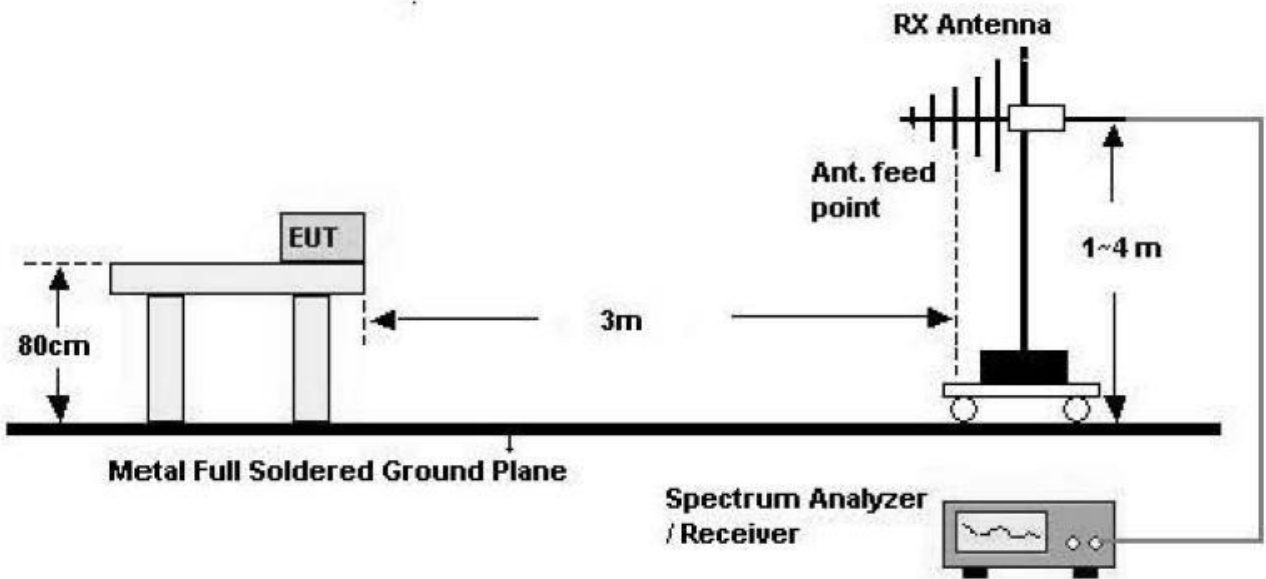



Above 1 GHz

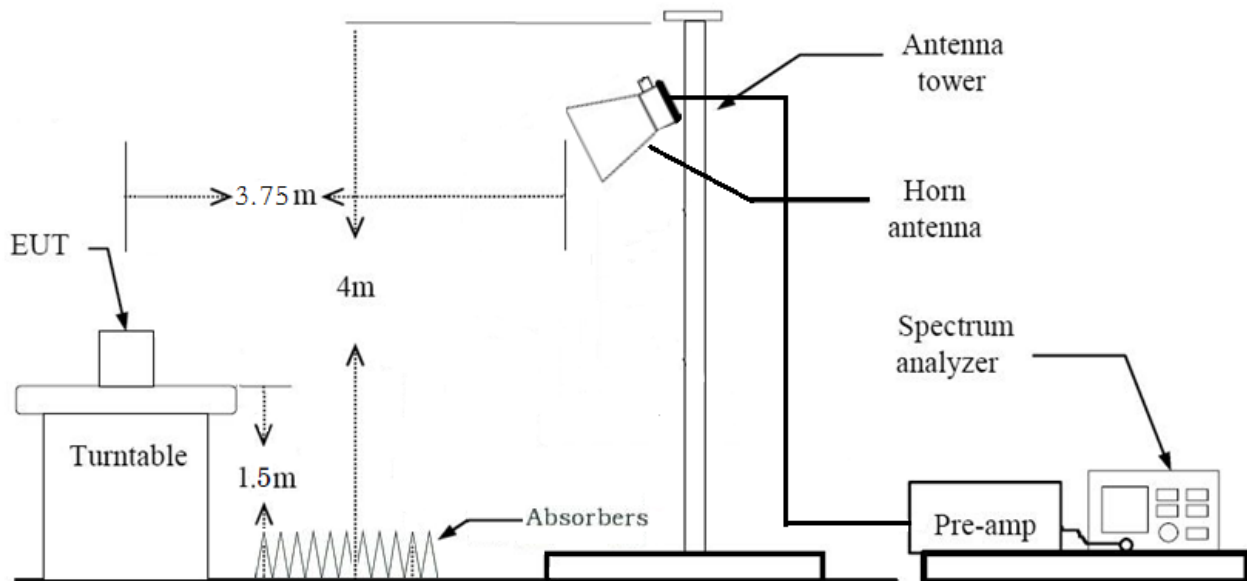**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40 \cdot \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m

**8. Spectrum Setting**

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW  $\geq 3 \cdot \text{RBW}$

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. The test results for below 30 MHz is correlated to an open site.  
The result on OATS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3\*RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
- \*In general, (1) is used mainly
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).  
\*Distance extrapolation factor =  $20 \cdot \log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.

## 9. Spectrum Setting (Method 8.6 in KDB 558074 v05, Procedure 11.12 in ANSI 63.10-2013)

## (1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq$  3\*RBW

## (2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3\*RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

## 11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)  
+ Duty Cycle Factor

### **Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).  
\*Distance extrapolation factor =  $20 \cdot \log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 3 \cdot$ RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq 3 \cdot$ RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
    - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

### 7.8. Receiver Spurious Emissions

#### Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

**Test Configuration**

30 MHz - 1 GHz

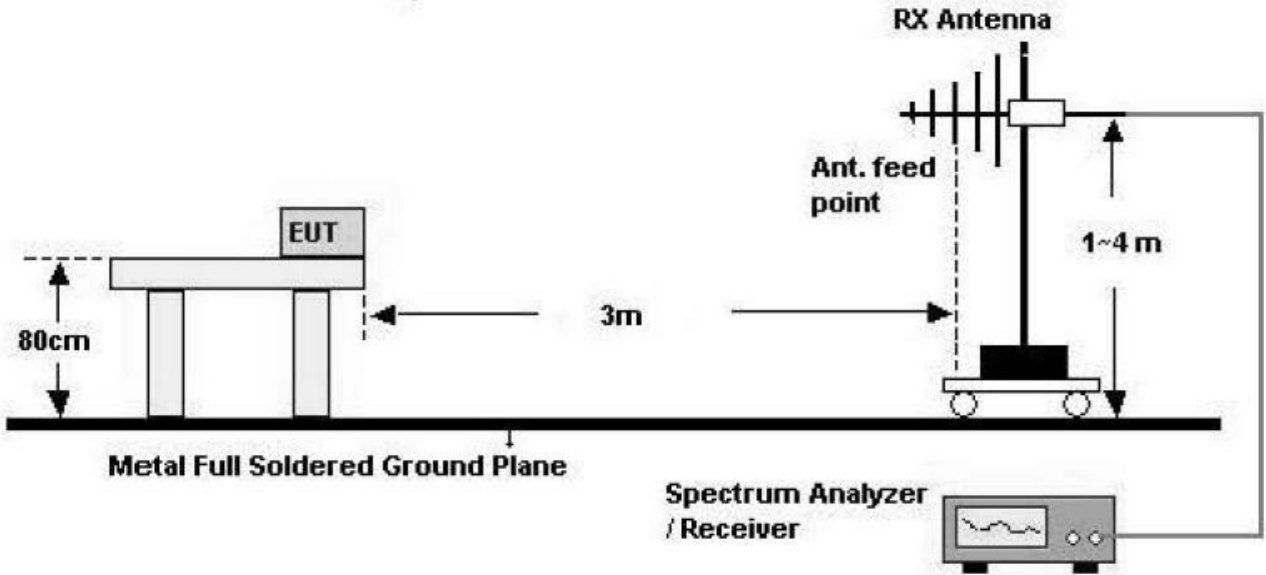

Above 1 GHz

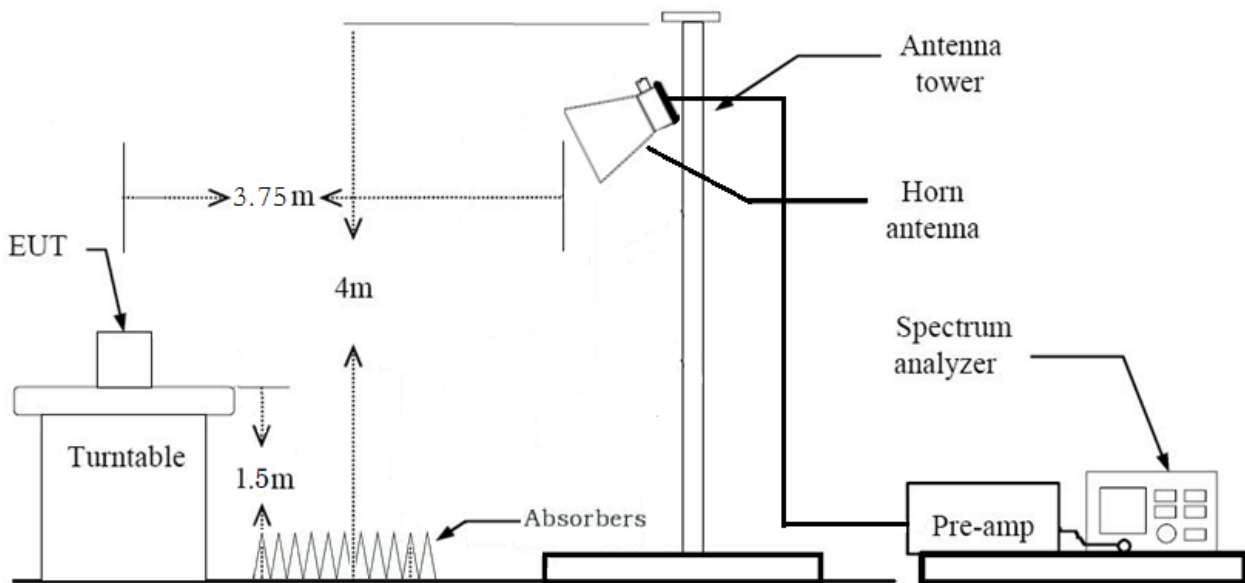



### **Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).  
\*Distance extrapolation factor =  $20 \cdot \log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 3 \cdot \text{RBW}$
  - (2) Measurement Type(Average):
    - We performed using a reduced video BW method was done with the analyzer in linear mode
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in secondsThe actual setting value of VBW = 1 kHz
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## **7.9. Worst case configuration and mode**

### **Radiated test**

1. All packet length of operation were investigated and the worst case configuration results are reported.
2. EUT Axis
  - Radiated Spurious Emissions : Y
  - Radiated Restricted Band Edge : Y

### **Conducted test**

- All packet length of operation were investigated and the test results are worst case in highest packet length.
- Worst case : 251 Byte

## 8. SUMMARY TEST OF RESULTS

### FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

**IC Part**

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	CONDUCTED	PASS
99% Bandwidth	RSS-GEN, 6.7	NA		NA
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.4	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	RSS-GEN section 8.9 table 5, 6	RADIATED	PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	RSS-GEN section 8.10 table 7		PASS


## 9. TEST RESULT

### 9.1 DUTY CYCLE

Packet length (Byte)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
37	0.3787	0.6257	0.6053	2.18
251	2.0900	2.5000	0.8360	0.78


■ (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

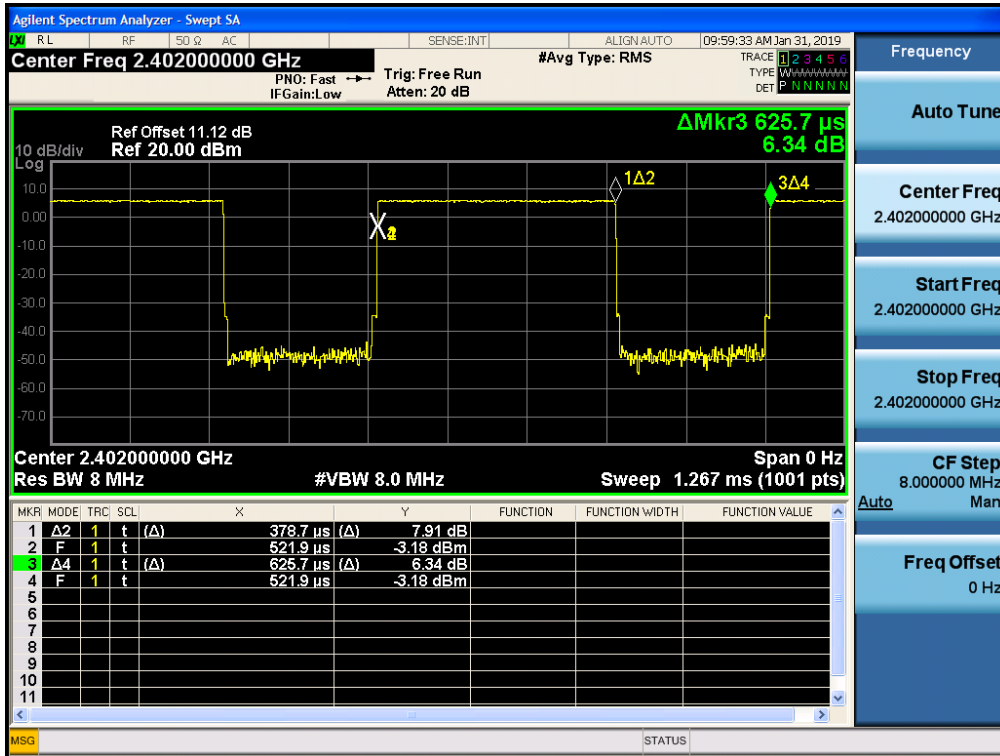

■ (251 Byte) Test Plots

Duty Cycle (Low-CH 0)

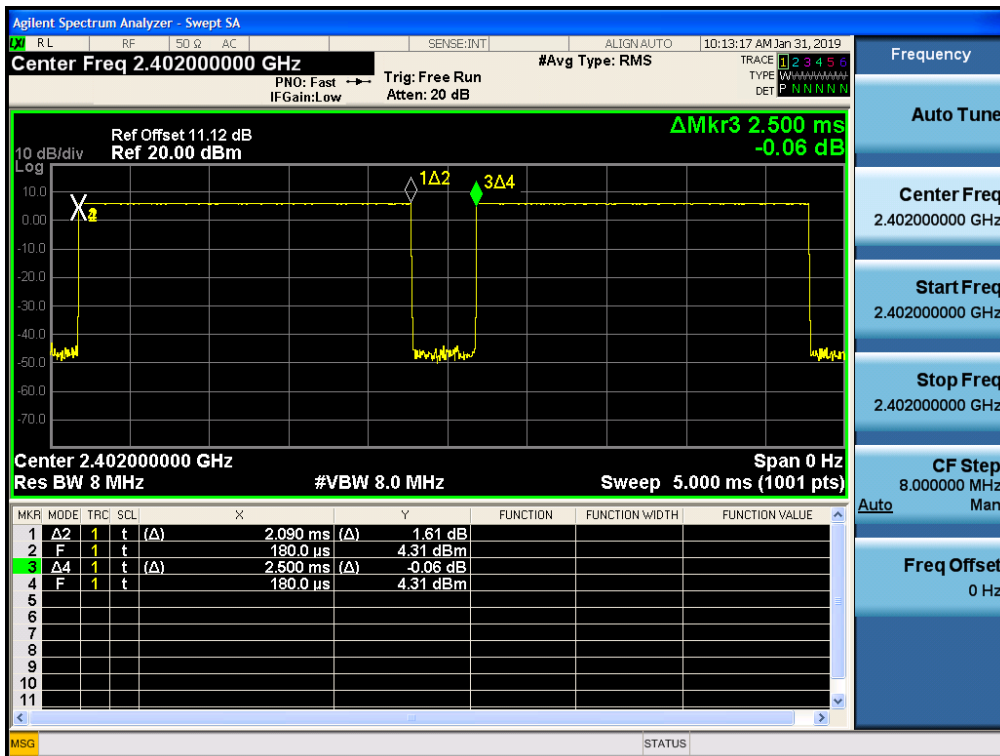


## 9.2 6dB BANDWIDTH


Channel	6 dB Bandwidth (kHz)	99 % Measured Bandwidth [MHz]	Limit (kHz)
0	664.1	1.0445	> 500
19	669.2	1.0455	
39	670.8	1.0442	

■ Test Plots

6 dB Bandwidth plot (Low-CH 0)

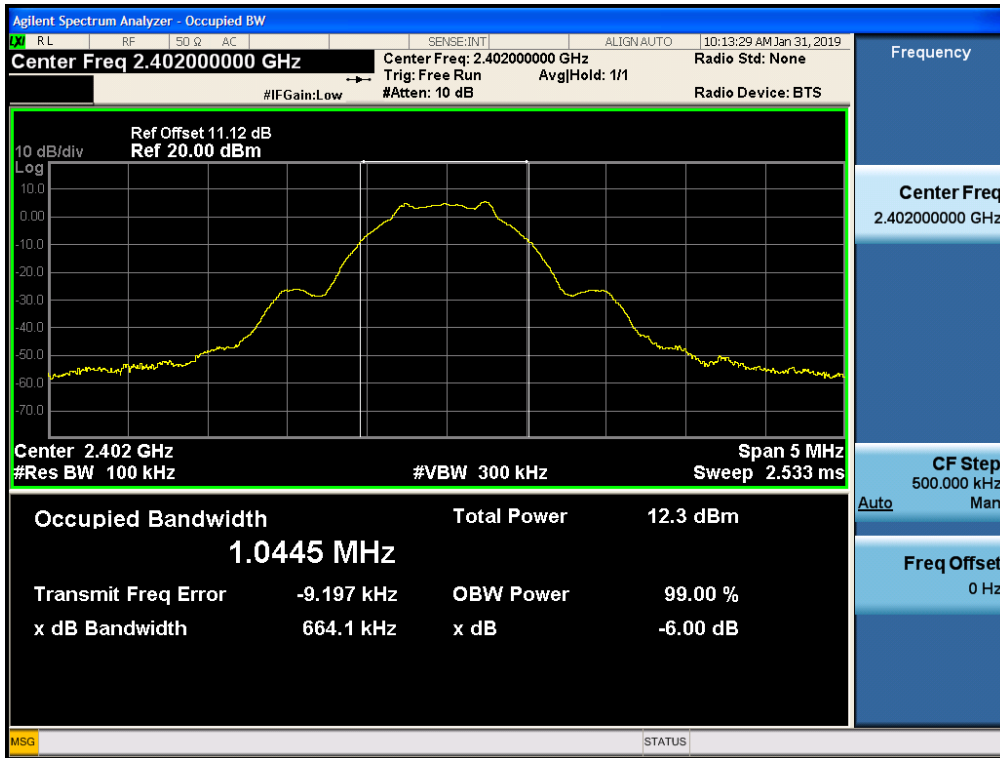


6 dB Bandwidth plot (Mid-CH 19)

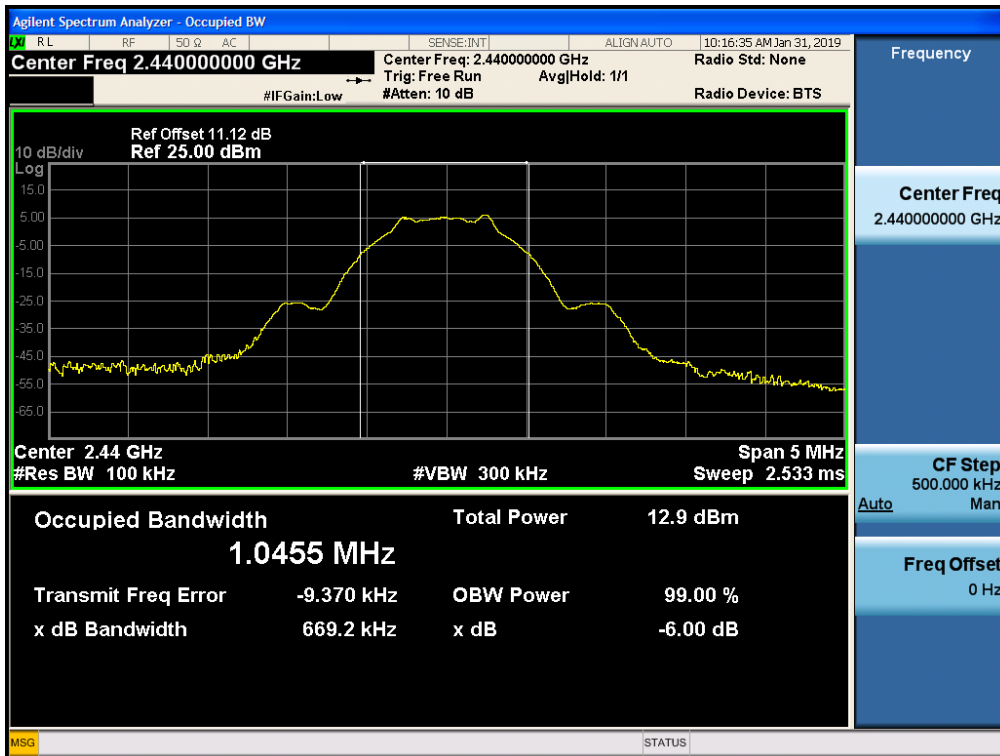



6 dB Bandwidth plot (High-CH 39)

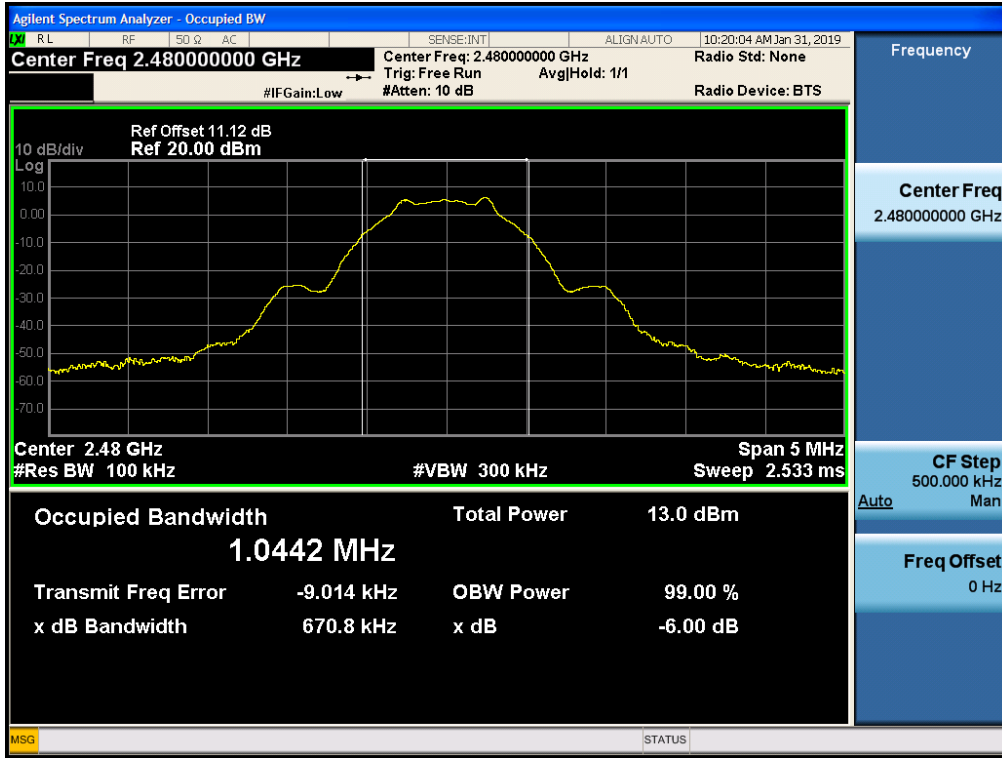

### 9.3 OUTPUT POWER

**Peak Power**

LE Mode		Packet length (Byte)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2402	0	37	5.902	30
		251	5.913	
2440	19	37	6.051	
		251	6.466	
2480	39	37	6.166	
		251	6.644	

**Average Power**

LE Mode		Packet length (Byte)	Measured Power(dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.					
2402	0	37	3.28	2.18	5.46	30
		251	4.72	0.78	5.50	
2440	19	37	3.38	2.18	5.56	
		251	5.43	0.78	6.21	
2480	39	37	3.59	2.18	5.77	
		251	5.54	0.78	6.32	


**Note :**

1. Spectrum reading values are not plot data.  
The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 11.12 dB is offset for 2.4 GHz Band.


■ (251 Byte) Test Plots

Peak Power


Conducted Output Power (Low-CH 0)

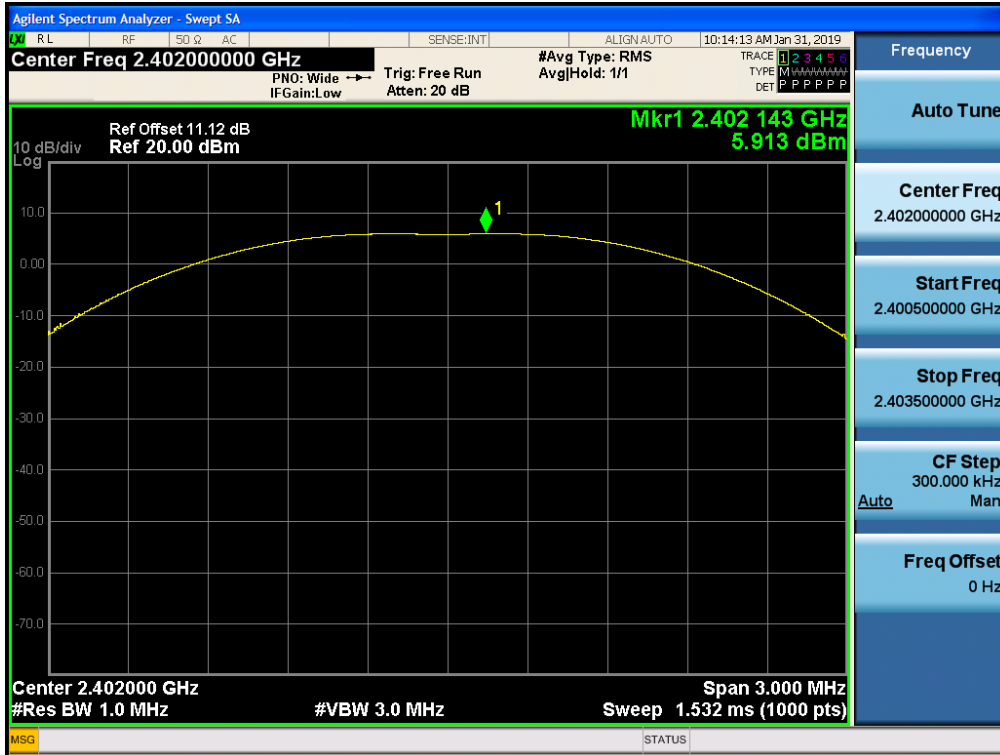

Conducted Output Power (Mid-CH 19)

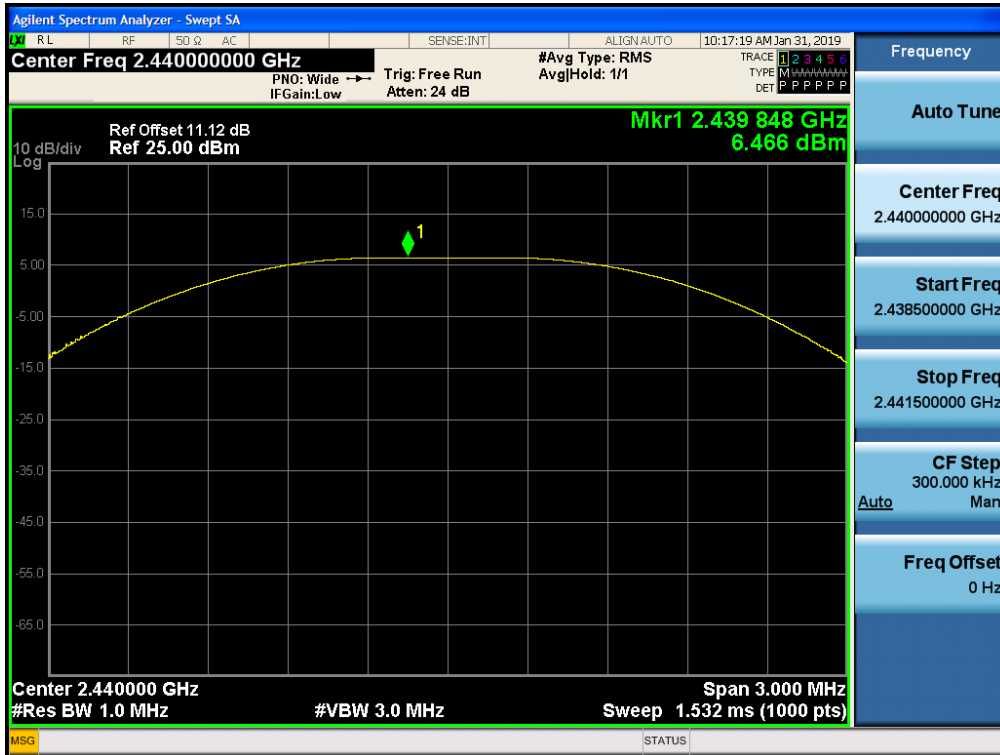


Conducted Output Power (High-CH 39)

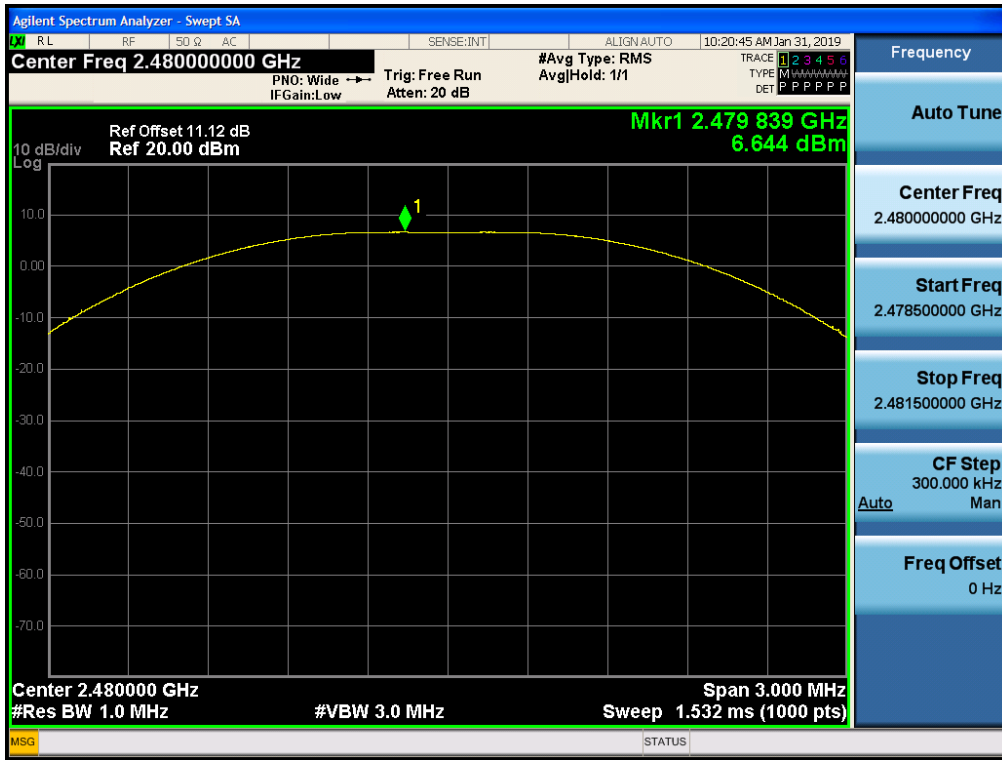


**Average Power**


Conducted Output Power (Low-CH 0)

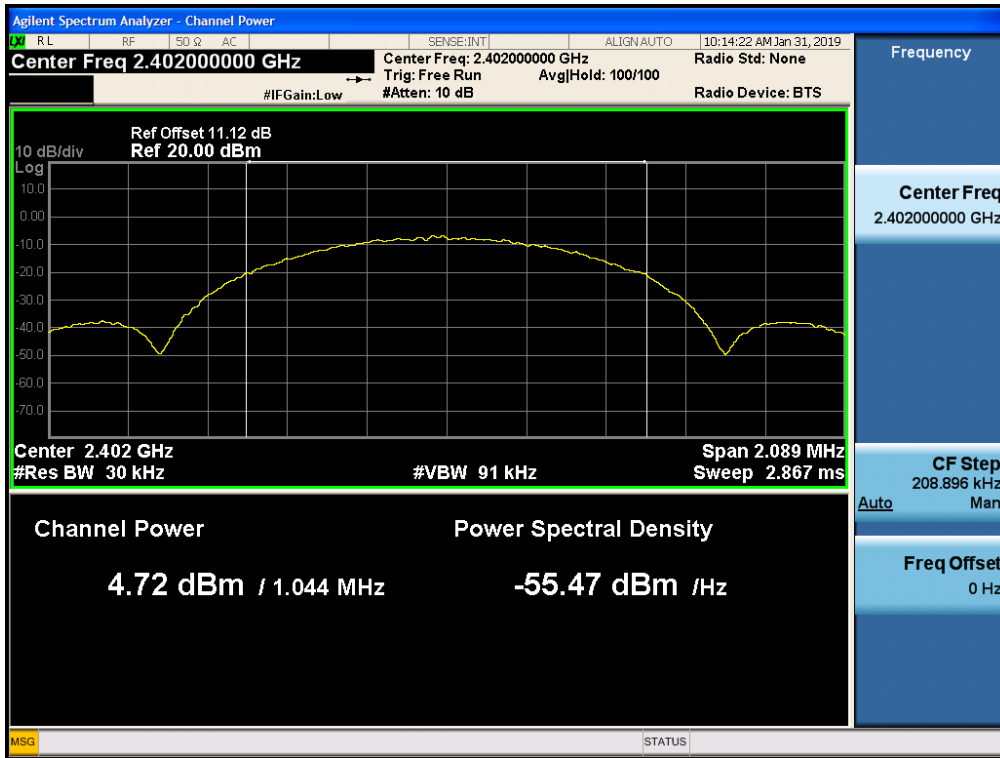

Conducted Output Power (Mid-CH 19)

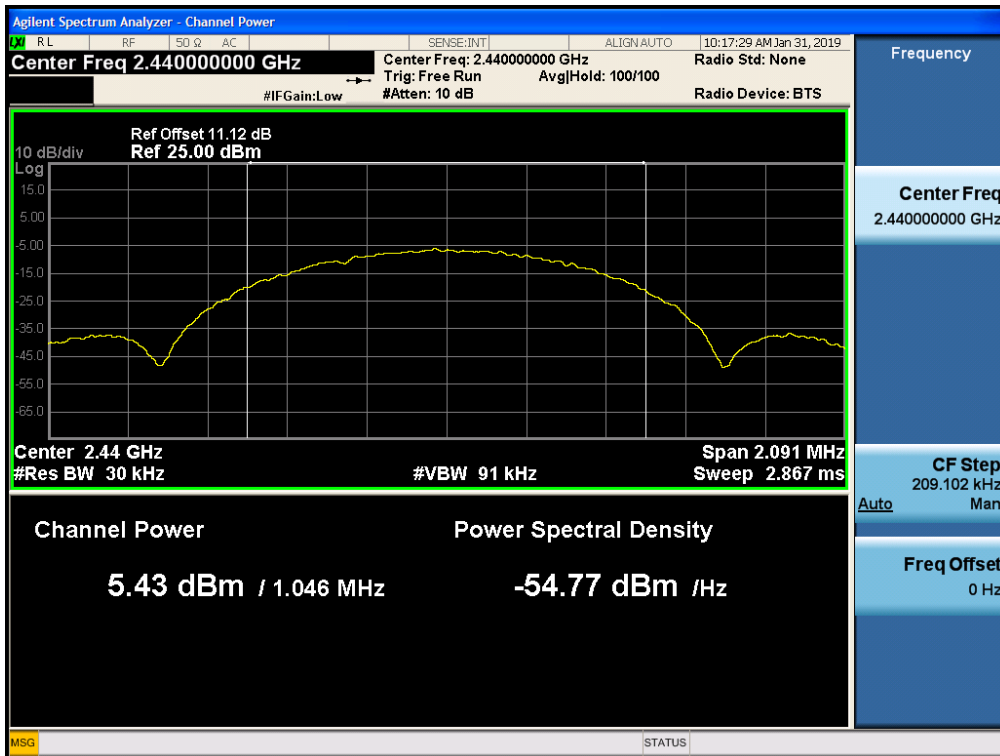

Conducted Output Power (High-CH 39)

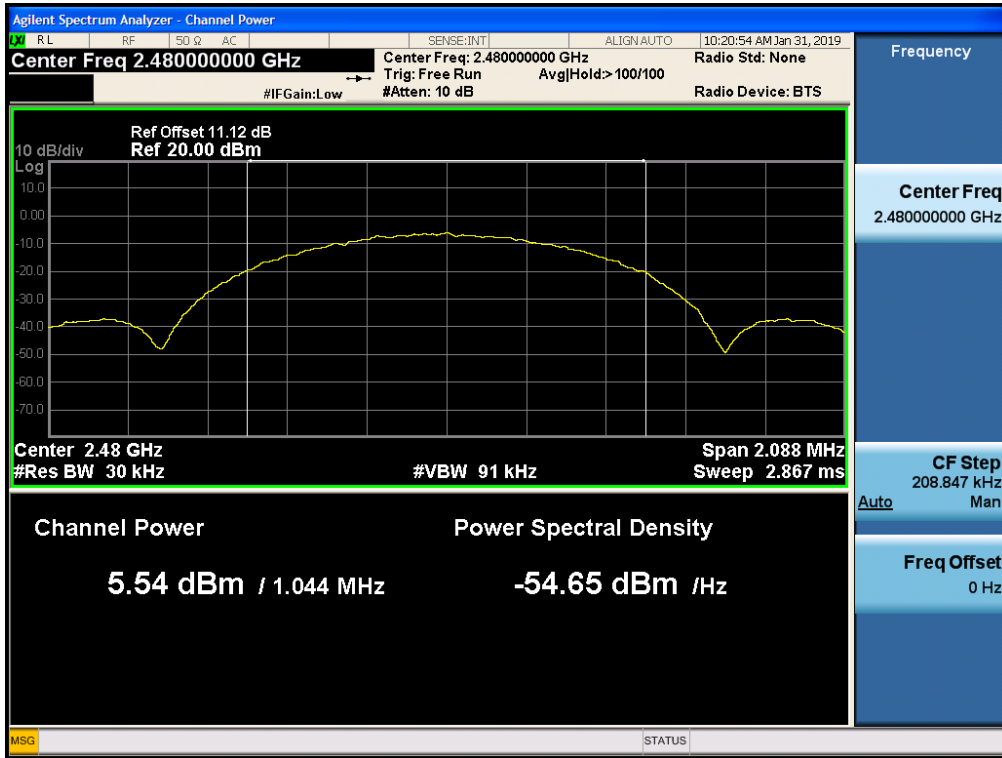

**Note :**

In order to simplify the report, attached plots were only the worstcase packet length

**9.4 POWER SPECTRAL DENSITY**

Frequency (MHz)	Channel No.	Test Result	
		PSD (dBm)	Limit (dBm)
2402	0	-9.736	8.000
2440	19	-9.741	8.000
2480	39	-9.070	8.000

**Note :**

1. Spectrum reading values are not plot data.  
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 11.12 dB is offset for 2.4 GHz Band.




■ 1M Bit/s Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)

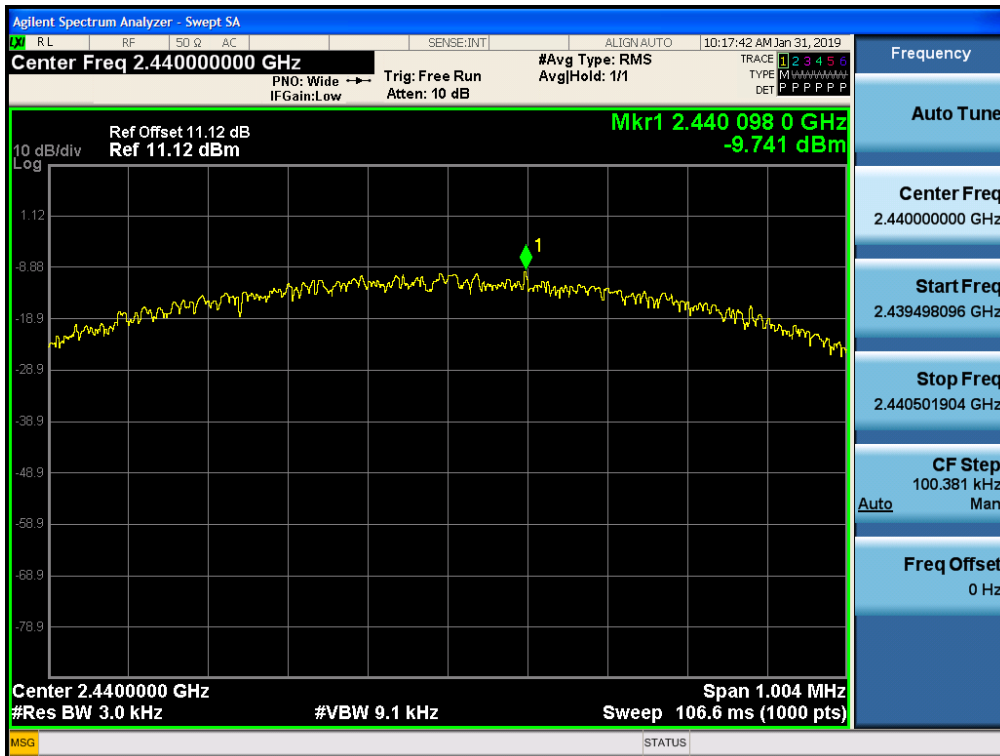

Power Spectral Density (High-CH 39)



## 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

■ Test Plots (BandEdge)

Low-CH 0




High-CH 39



■ Test Plots (Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 19)

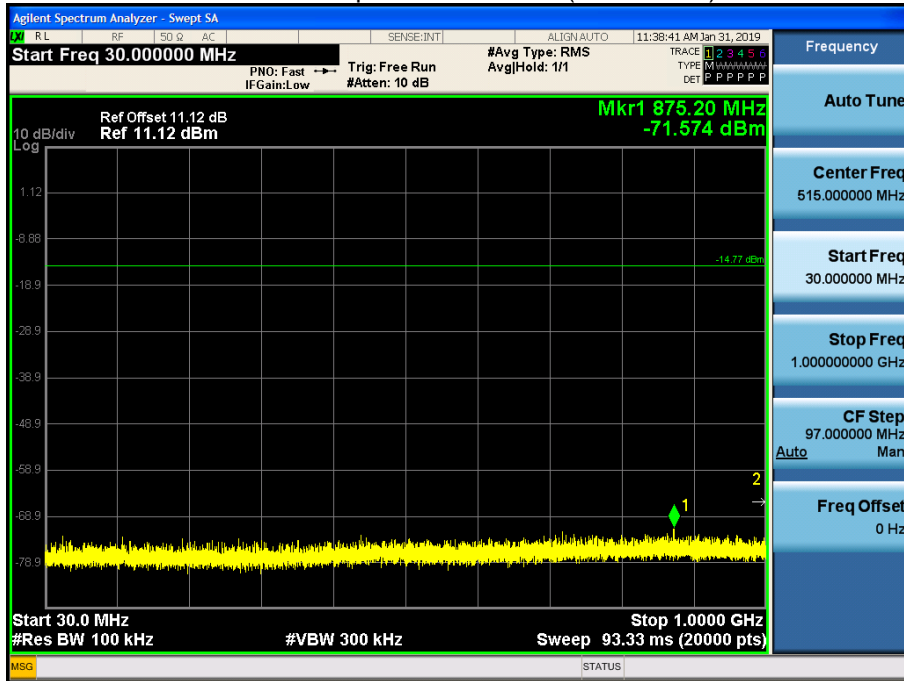


1 GHz ~ 3 GHz

Conducted Spurious Emission (Low-CH 19)

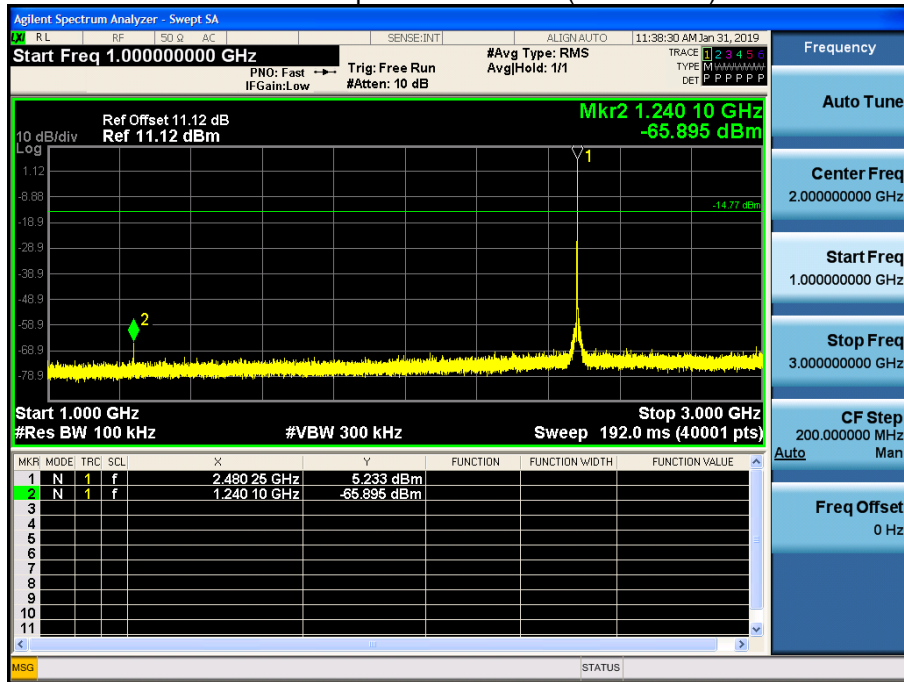


3 GHz ~ 5 GHz

Conducted Spurious Emission (Low-CH 19)

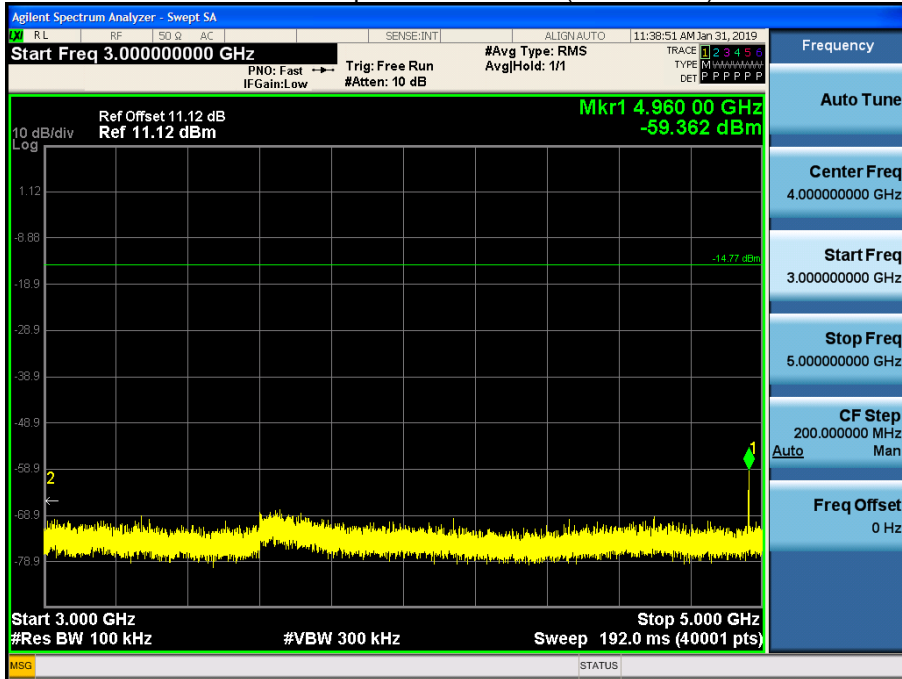


5 GHz ~ 7 GHz

Conducted Spurious Emission (Low-CH 19)

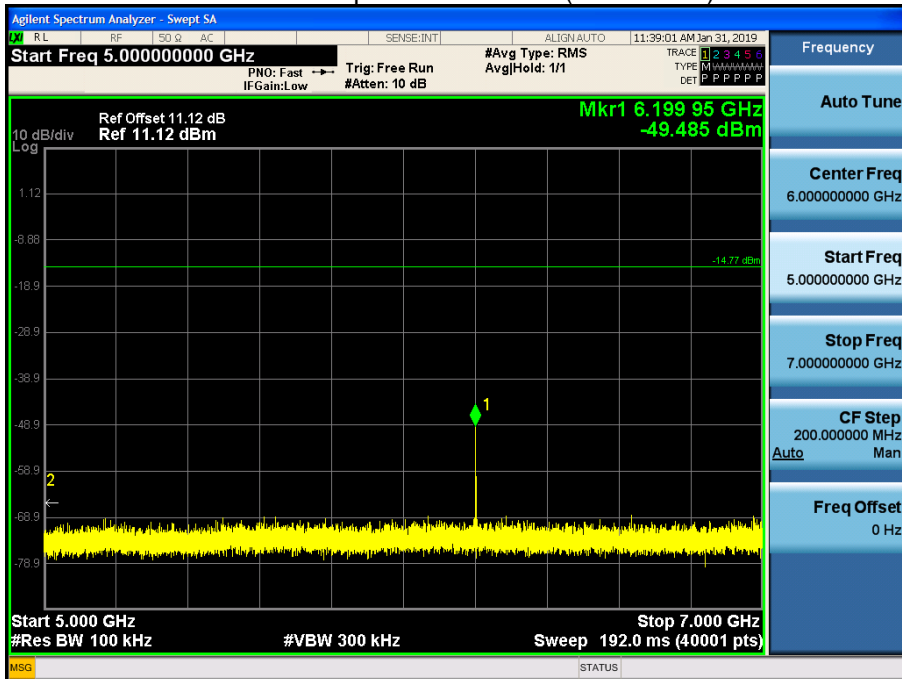


7 GHz ~ 9 GHz

Conducted Spurious Emission (Low-CH 19)

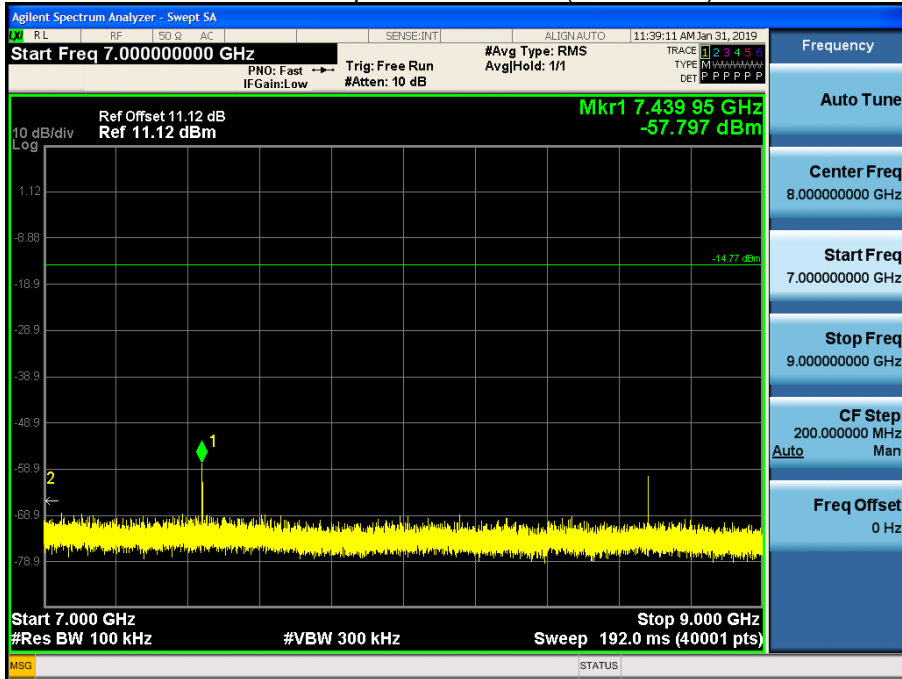


9 GHz ~ 11 GHz

Conducted Spurious Emission (Low-CH 19)

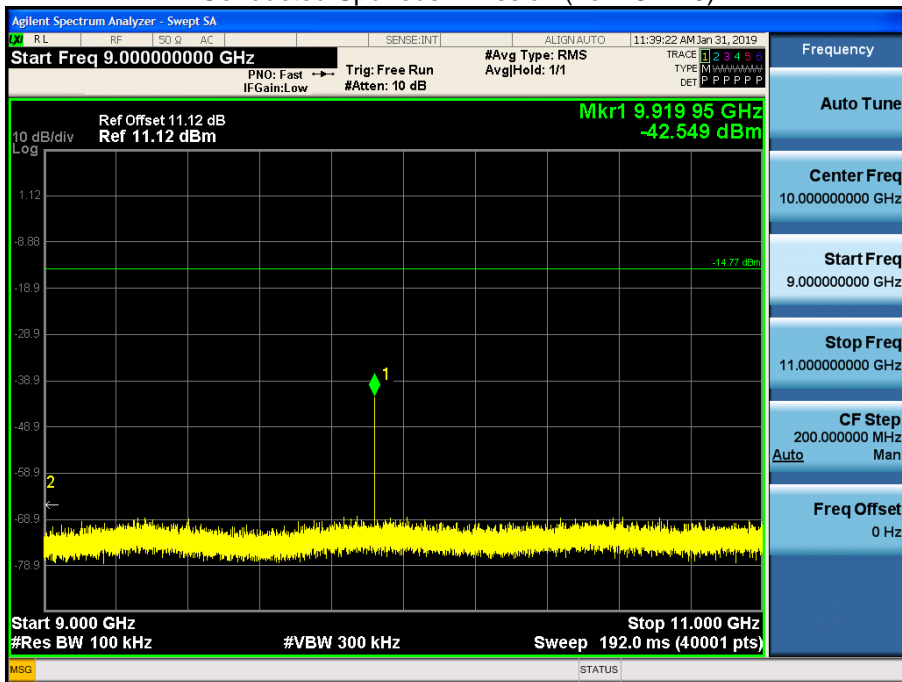


11 GHz ~ 13 GHz

Conducted Spurious Emission (Low-CH 19)

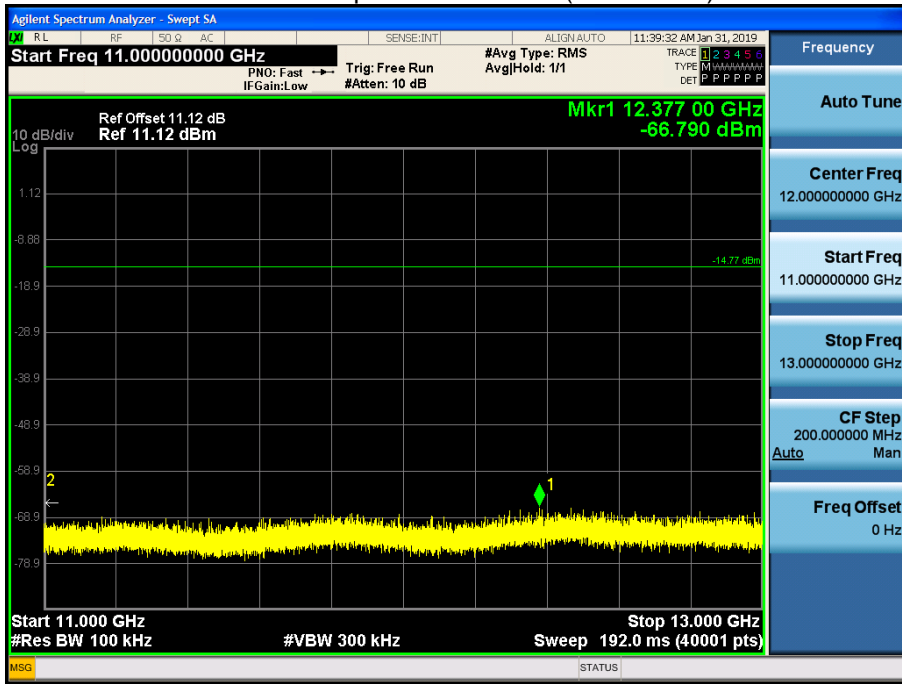

13 GHz ~ 15 GHz


Conducted Spurious Emission (Low-CH 19)

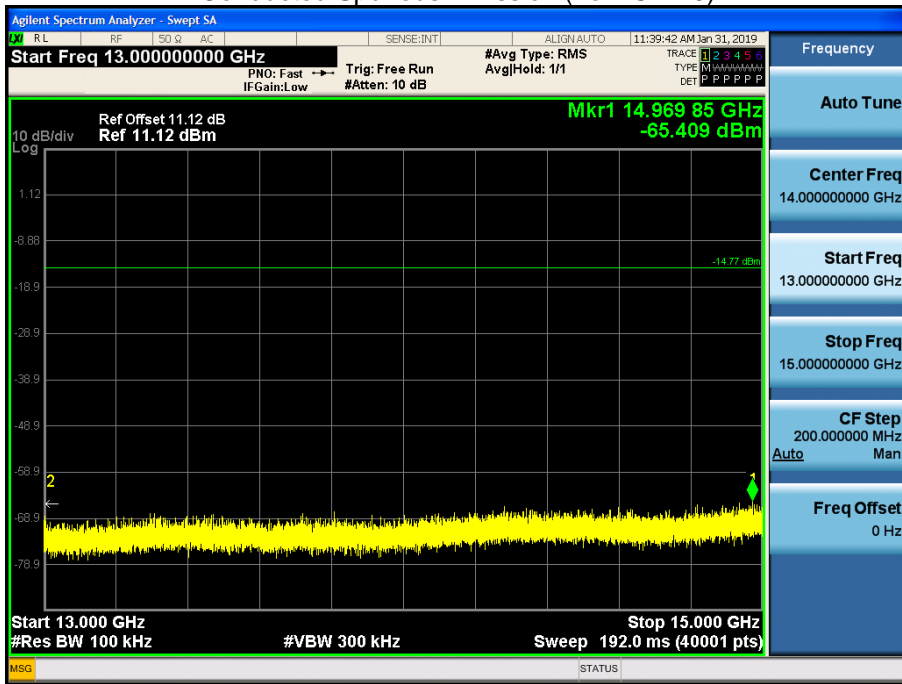




15 GHz ~ 17 GHz

Conducted Spurious Emission (Low-CH 19)

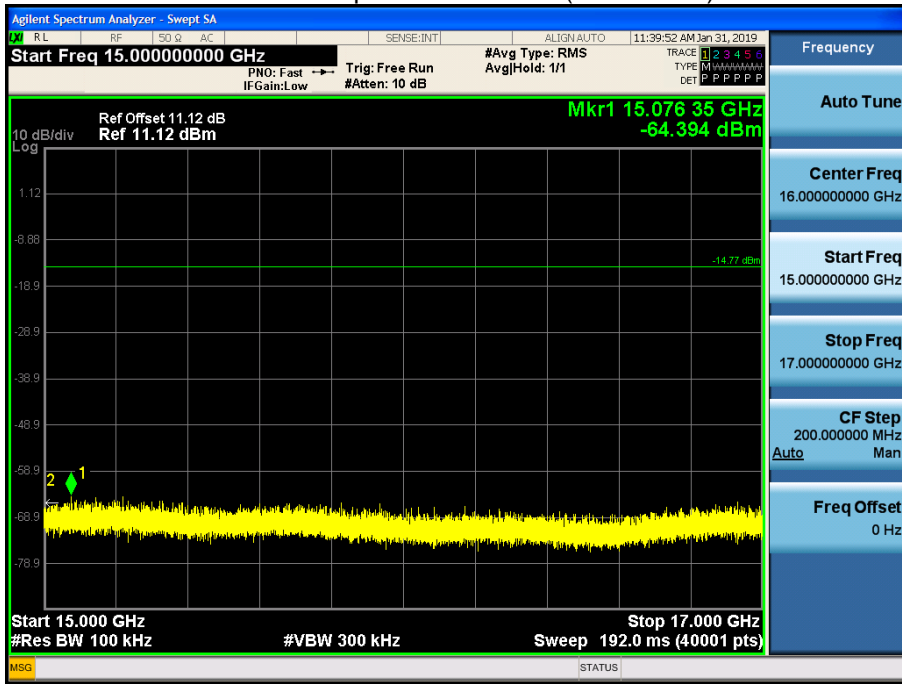


17 GHz ~ 19 GHz

Conducted Spurious Emission (Low-CH 19)

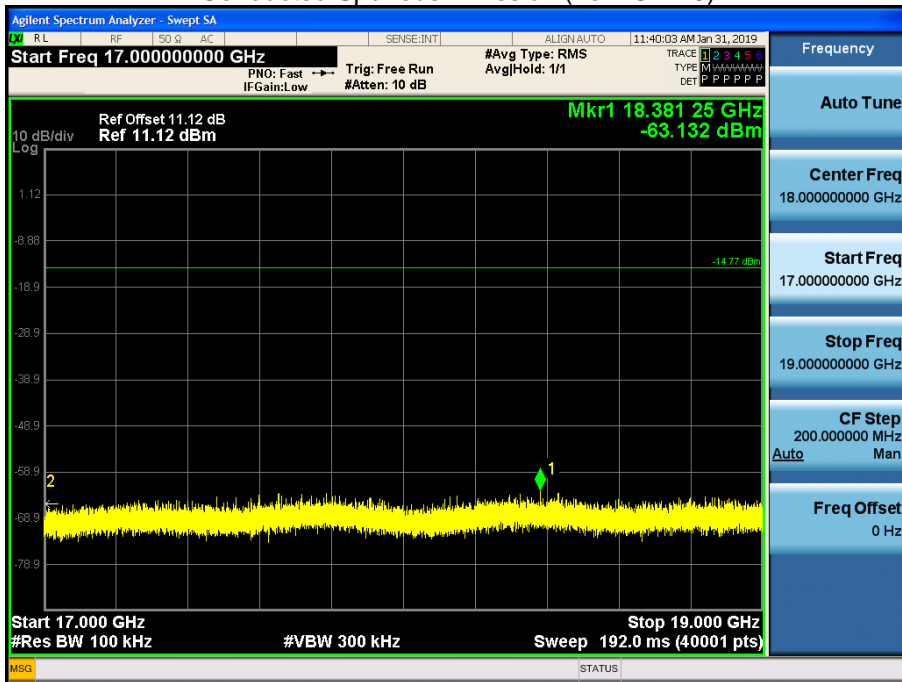


19 GHz ~ 21 GHz

Conducted Spurious Emission (Low-CH 19)

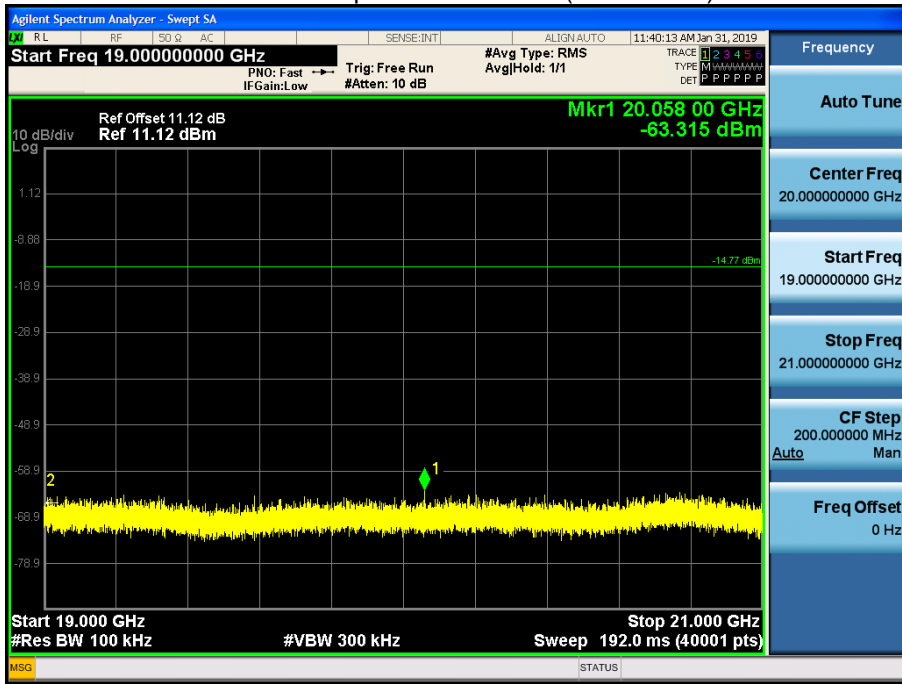


21 GHz ~ 23 GHz

Conducted Spurious Emission (Low-CH 19)

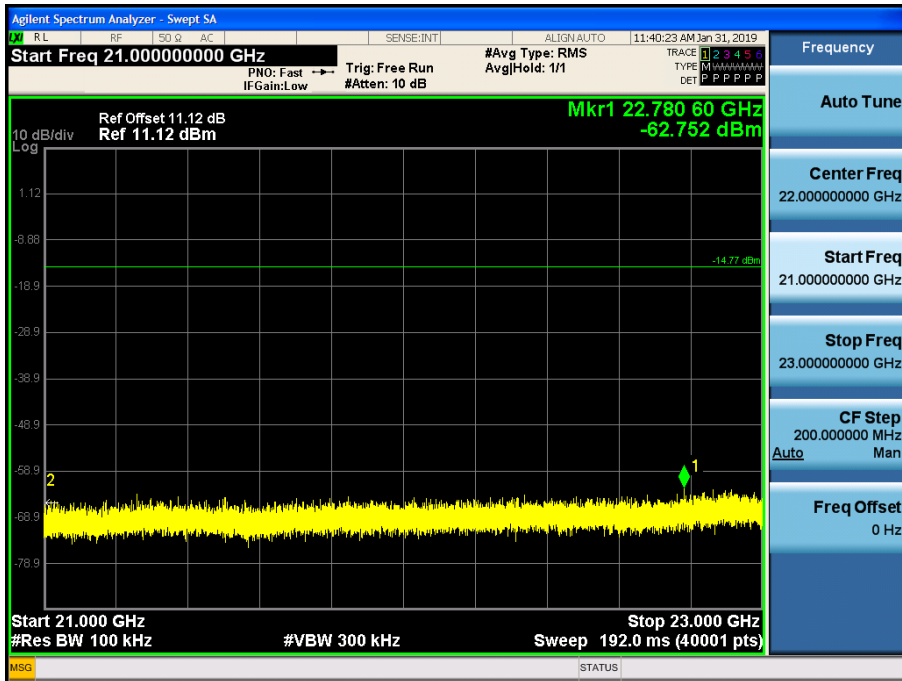

23 GHz ~ 25 GHz

Conducted Spurious Emission (Low-CH 19)

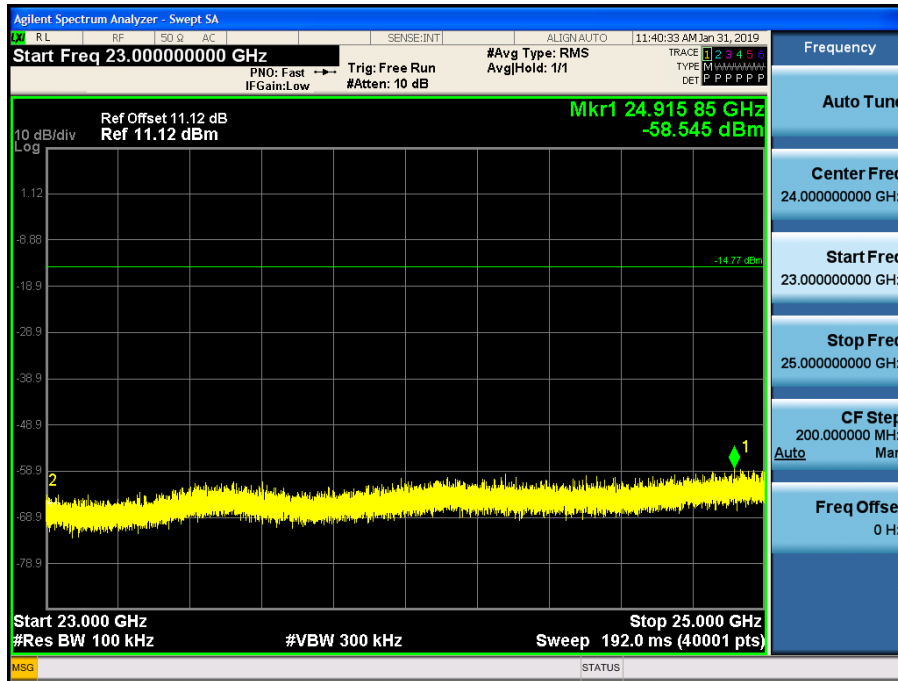

## 9.6 RADIATED SPURIOUS EMISSIONS

### Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40 \cdot \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.
5. The test results for below 30 MHz is correlated to an open site.  
The result on OATS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**
**Packet length: 37 byte**

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.08	0	1.83	V	52.91	73.98	21.07	PK
4804	38.71	2.18	1.83	V	42.72	53.98	11.26	AV
7206	51.41	0	9.65	V	61.06	73.98	12.92	PK
7206	38.99	2.18	9.65	V	50.82	53.98	3.16	AV
4804	50.92	0	1.83	H	52.75	73.98	21.23	PK
4804	37.62	2.18	1.83	H	41.63	53.98	12.35	AV
7206	50.48	0	9.65	H	60.13	73.98	13.85	PK
7206	38.64	2.18	9.65	H	50.47	53.98	3.51	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	51.98	0	2.34	V	54.32	73.98	19.66	PK
4880	38.92	2.18	2.34	V	43.44	53.98	10.54	AV
7320	50.54	0	9.98	V	60.52	73.98	13.46	PK
7320	38.50	2.18	9.98	V	50.66	53.98	3.32	AV
4880	50.64	0	2.34	H	52.98	73.98	21.00	PK
4880	37.92	2.18	2.34	H	42.44	53.98	11.54	AV
7320	50.29	0	9.98	H	60.27	73.98	13.71	PK
7320	37.81	2.18	9.98	H	49.97	53.98	4.01	AV

Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.91	0	2.26	V	53.17	73.98	20.81	PK
4960	39.25	2.18	2.26	V	43.69	53.98	10.29	AV
7440	50.13	0	9.78	V	59.91	73.98	14.07	PK
7440	38.06	2.18	9.78	V	50.02	53.98	3.96	AV
4960	50.83	0	2.26	H	53.09	73.98	20.89	PK
4960	38.71	2.18	2.26	H	43.15	53.98	10.83	AV
7440	49.86	0	9.78	H	59.64	73.98	14.34	PK
7440	37.62	2.18	9.78	H	49.58	53.98	4.40	AV

**Packet length: 251 byte**

## Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	50.93	0	1.83	V	52.76	73.98	21.22	PK
4804	38.93	0.78	1.83	V	41.54	53.98	12.44	AV
7206	51.05	0	9.65	V	60.7	73.98	13.28	PK
7206	39.14	0.78	9.65	V	49.57	53.98	4.41	AV
4804	50.79	0	1.83	H	52.62	73.98	21.36	PK
4804	37.62	0.78	1.83	H	40.23	53.98	13.75	AV
7206	49.84	0	9.65	H	59.49	73.98	14.49	PK
7206	38.69	0.78	9.65	H	49.12	53.98	4.86	AV

## Operation Mode: CH Mid

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	50.66	0	2.34	V	53	73.98	20.98	PK
4880	39.24	0.78	2.34	V	42.36	53.98	11.62	AV
7320	50.16	0	9.98	V	60.14	73.98	13.84	PK
7320	38.63	0.78	9.98	V	49.39	53.98	4.59	AV
4880	49.87	0	2.34	H	52.21	73.98	21.77	PK
4880	38.92	0.78	2.34	H	42.04	53.98	11.94	AV
7320	49.29	0	9.98	H	59.27	73.98	14.71	PK
7320	37.41	0.78	9.98	H	48.17	53.98	5.81	AV


Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	51.40	0	2.26	V	53.66	73.98	20.32	PK
4960	39.52	0.78	2.26	V	42.56	53.98	11.42	AV
7440	49.40	0	9.78	V	59.18	73.98	14.80	PK
7440	38.16	0.78	9.78	V	48.72	53.98	5.26	AV
4960	50.15	0	2.26	H	52.41	73.98	21.57	PK
4960	38.74	0.78	2.26	H	41.78	53.98	12.20	AV
7440	49.37	0	9.78	H	59.15	73.98	14.83	PK
7440	38.02	0.78	9.78	H	48.58	53.98	5.40	AV




■ 1M Bit 37 Byte Test Plots

Radiated Spurious Emissions plot – Average Reading (Ch.0 3rd Harmonic)

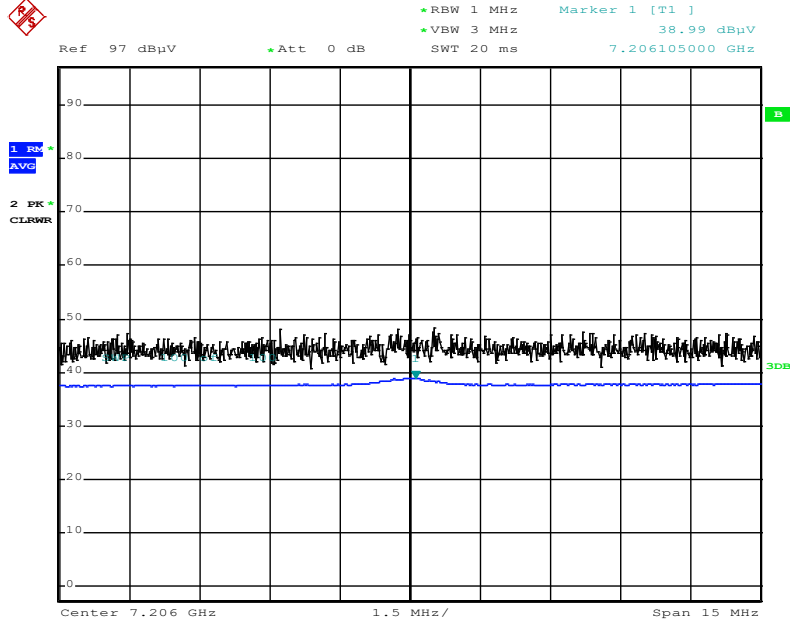

Date: 2.FEB.2019 14:56:27

Radiated Spurious Emissions plot – Peak Reading (Ch.0 3rd Harmonic)

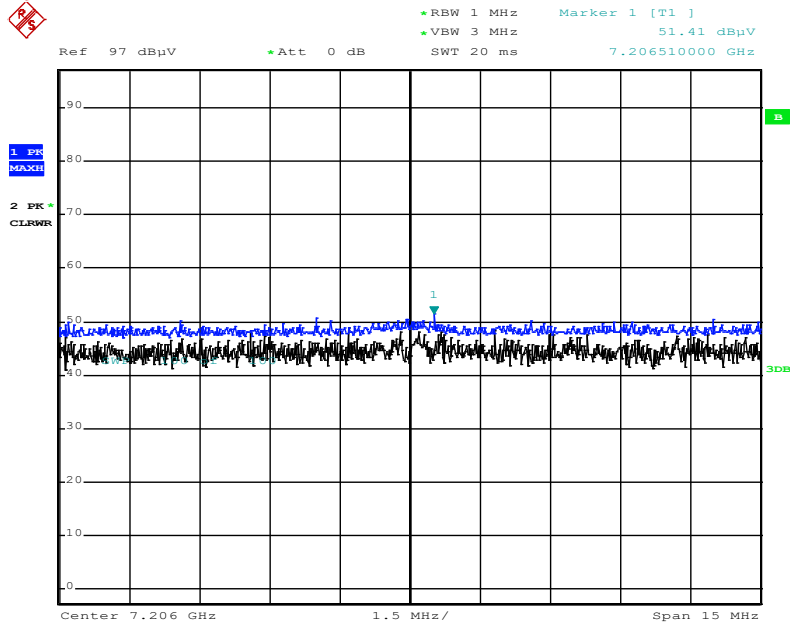

Date: 2.FEB.2019 14:57:23

**Note:**

Plot of worst case are only reported.

## 9.7 RADIATED RESTRICTED BAND EDGES

**Packet length: 37 byte**

Operating Frequency 2402 MHz  
Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	20.00	0.00	35.09	H	55.09	73.98	18.89	PK
2390.0	10.13	2.18	35.09	H	47.40	53.98	6.58	AV
2390.0	20.08	0.00	35.09	V	55.17	73.98	18.82	PK
2390.0	10.15	2.18	35.09	V	47.42	53.98	6.56	AV

Operating Frequency 2480 MHz  
Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	22.13	0.00	35.11	H	57.24	73.98	16.74	PK
2483.5	10.75	2.18	35.11	H	48.04	53.98	5.94	AV
2483.5	22.30	0.00	35.11	V	57.41	73.98	16.57	PK
2483.5	10.88	2.18	35.11	V	48.17	53.98	5.81	AV

**Packet length: 251 byte**

Operating Frequency 2402 MHz  
Channel No. 0


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	19.85	0.00	35.09	H	54.94	73.98	19.04	PK
2390.0	10.24	0.78	35.09	H	46.11	53.98	7.87	AV
2390.0	19.95	0.00	35.09	V	55.04	73.98	18.94	PK
2390.0	10.25	0.78	35.09	V	46.12	53.98	7.86	AV

Operating Frequency 2480 MHz  
Channel No. 39


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	22.17	0.00	35.11	H	57.28	73.98	16.70	PK
2483.5	10.99	0.78	35.11	H	46.88	53.98	7.11	AV
2483.5	22.58	0.00	35.11	V	57.69	73.98	16.29	PK
2483.5	11.02	0.78	35.11	V	46.91	53.98	7.07	AV

■ Test Plots

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

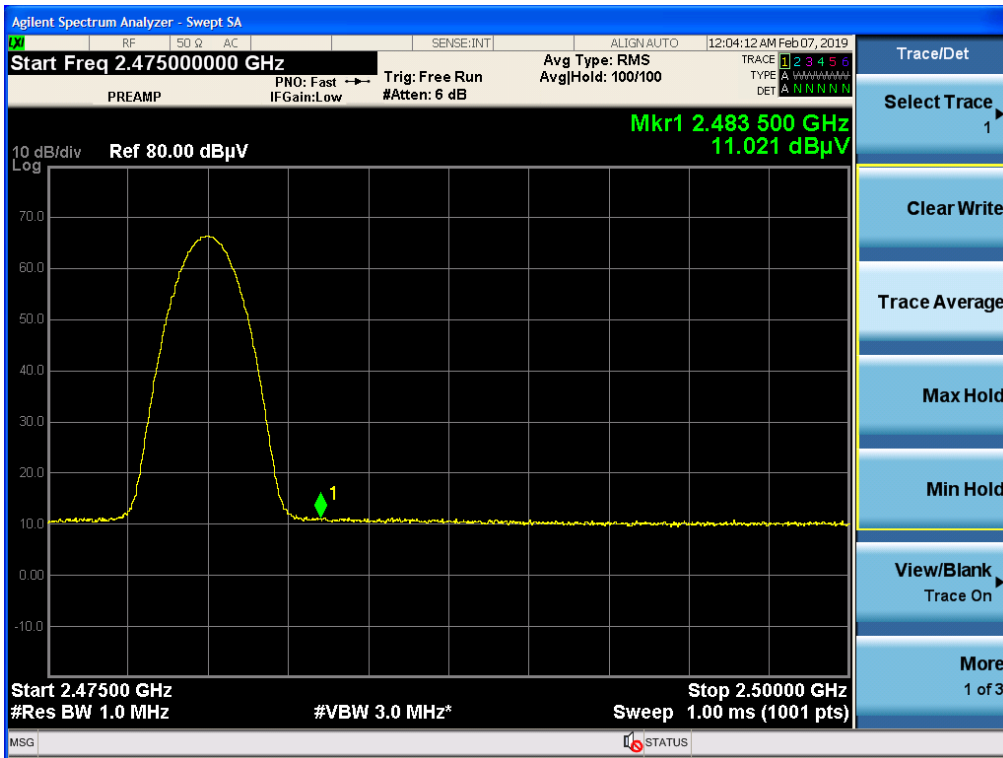

Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

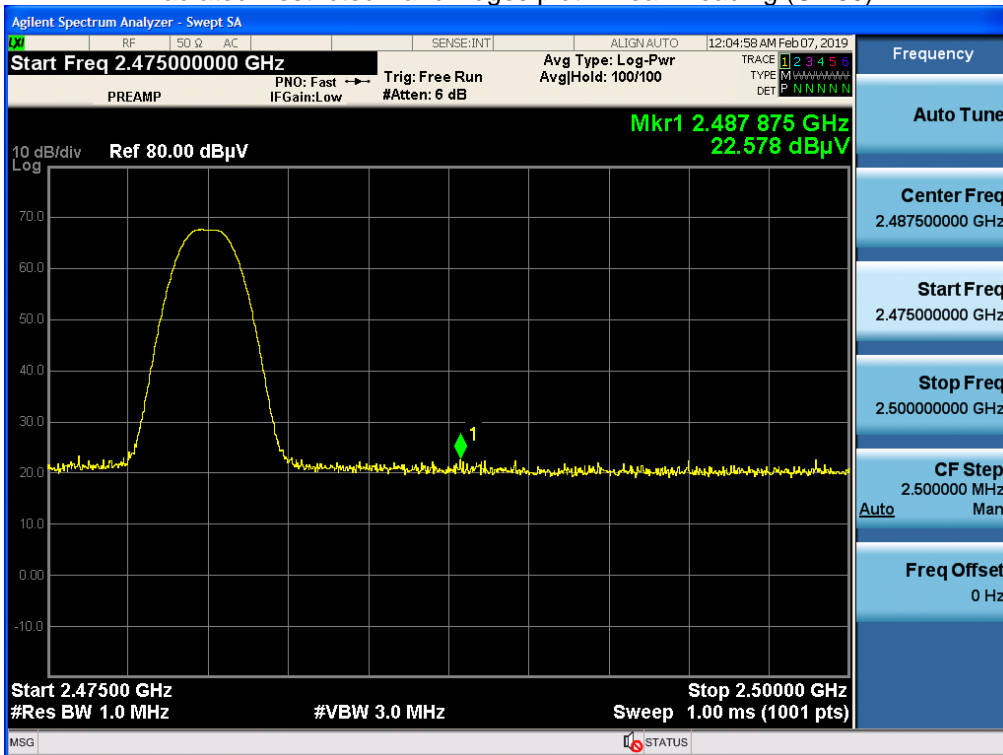

**Note:**

Plot of worst case are only reported.

## 9.8 RECEIVER SPURIOUS EMISSIONS

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

### Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

## 9.9 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

BT(LE)\_N


1 / 2

## HCT TEST Report

### Common Information

EUT: WK7  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: BT(LE)\_N

FCC CLASS B\_Exten Cable

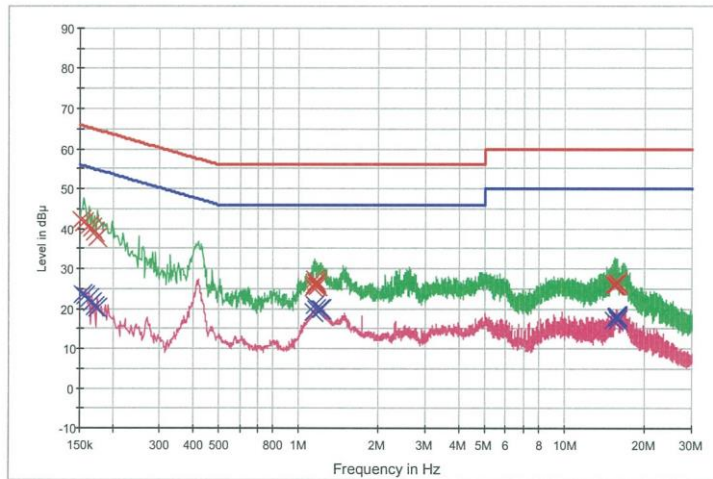

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      X Final Result 1-QPK      X Final Result 2-CAV

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	42.2	9.000	Off	N	9.8	23.7	65.9
0.156000	41.7	9.000	Off	N	9.8	24.0	65.7
0.162000	40.8	9.000	Off	N	9.8	24.5	65.4
0.166000	40.3	9.000	Off	N	9.8	24.9	65.2
0.170000	39.0	9.000	Off	N	9.8	25.9	65.0
0.174000	37.9	9.000	Off	N	9.8	26.8	64.8
1.134000	25.1	9.000	Off	N	10.0	30.9	56.0
1.146000	25.8	9.000	Off	N	10.0	30.2	56.0
1.150000	27.2	9.000	Off	N	10.0	28.8	56.0
1.156000	26.1	9.000	Off	N	10.0	29.9	56.0
1.162000	26.5	9.000	Off	N	10.0	29.5	56.0
1.180000	25.5	9.000	Off	N	10.0	30.5	56.0
15.296000	26.0	9.000	Off	N	10.7	34.0	60.0
15.356000	26.0	9.000	Off	N	10.7	34.0	60.0
15.536000	26.0	9.000	Off	N	10.7	34.0	60.0
15.700000	26.6	9.000	Off	N	10.7	33.4	60.0
15.704000	26.5	9.000	Off	N	10.7	33.5	60.0
15.780000	26.4	9.000	Off	N	10.7	33.6	60.0

2019-01-30

오후 7:42:24

BT(LE)\_N

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	23.6	9.000	Off	N	9.8	32.2	55.8
0.158000	23.2	9.000	Off	N	9.8	32.3	55.6
0.162000	22.4	9.000	Off	N	9.8	32.9	55.4
0.166000	21.5	9.000	Off	N	9.8	33.6	55.2
0.170000	20.5	9.000	Off	N	9.8	34.4	55.0
0.174000	20.2	9.000	Off	N	9.8	34.6	54.8
1.132000	19.2	9.000	Off	N	10.0	26.8	46.0
1.152000	20.8	9.000	Off	N	10.0	25.2	46.0
1.162000	20.0	9.000	Off	N	10.0	26.0	46.0
1.166000	19.9	9.000	Off	N	10.0	26.1	46.0
1.198000	19.7	9.000	Off	N	10.0	26.3	46.0
1.216000	20.0	9.000	Off	N	10.0	26.0	46.0
15.296000	17.2	9.000	Off	N	10.7	32.8	50.0
15.542000	18.1	9.000	Off	N	10.7	32.0	50.0
15.614000	17.7	9.000	Off	N	10.7	32.3	50.0
15.734000	17.8	9.000	Off	N	10.7	32.2	50.0
15.780000	18.0	9.000	Off	N	10.7	32.0	50.0
15.784000	17.2	9.000	Off	N	10.7	32.8	50.0

2019-01-30

오후 7:42:24

**Conducted Emissions (Line 2)**

BT(LE)\_L1


1 / 2

**HCT TEST Report**

**Common Information**

EUT: WK7  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: BT(LE)\_L1

FCC CLASS B\_Exten Cable

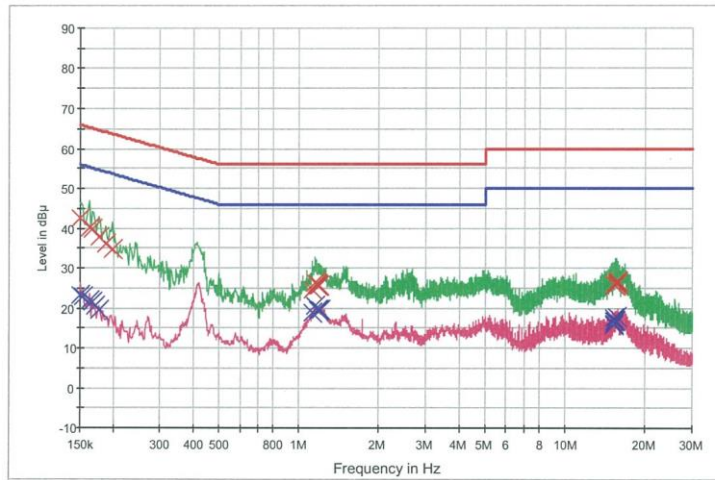

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	42.4	9.000	Off	L1	9.7	23.6	66.0
0.162000	40.3	9.000	Off	L1	9.7	25.0	65.4
0.166000	40.0	9.000	Off	L1	9.7	25.2	65.2
0.176000	37.6	9.000	Off	L1	9.7	27.0	64.7
0.188000	36.2	9.000	Off	L1	9.7	27.9	64.1
0.198000	34.6	9.000	Off	L1	9.7	29.1	63.7
1.126000	24.6	9.000	Off	L1	9.8	31.4	56.0
1.150000	26.4	9.000	Off	L1	9.8	29.6	56.0
1.166000	26.0	9.000	Off	L1	9.8	30.0	56.0
1.172000	25.6	9.000	Off	L1	9.8	30.4	56.0
1.178000	25.9	9.000	Off	L1	9.8	30.1	56.0
1.186000	25.6	9.000	Off	L1	9.8	30.4	56.0
15.246000	25.9	9.000	Off	L1	10.4	34.1	60.0
15.382000	25.7	9.000	Off	L1	10.4	34.3	60.0
15.568000	26.4	9.000	Off	L1	10.4	33.6	60.0
15.574000	26.7	9.000	Off	L1	10.4	33.3	60.0
15.616000	25.8	9.000	Off	L1	10.4	34.2	60.0
15.700000	26.6	9.000	Off	L1	10.4	33.4	60.0

2019-01-30

오후 7:51:38



BT(LE)\_L1

2 / 2

### Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	23.1	9.000	Off	L1	9.7	32.9	56.0
0.154000	23.0	9.000	Off	L1	9.7	32.8	55.8
0.162000	21.7	9.000	Off	L1	9.7	33.6	55.4
0.166000	21.4	9.000	Off	L1	9.7	33.7	55.2
0.170000	20.4	9.000	Off	L1	9.7	34.6	55.0
0.176000	19.6	9.000	Off	L1	9.7	35.0	54.7
1.124000	18.7	9.000	Off	L1	9.8	27.3	46.0
1.152000	20.6	9.000	Off	L1	9.8	25.4	46.0
1.172000	19.4	9.000	Off	L1	9.8	26.6	46.0
1.180000	19.6	9.000	Off	L1	9.8	26.4	46.0
1.186000	19.6	9.000	Off	L1	9.8	26.4	46.0
1.210000	19.4	9.000	Off	L1	9.8	26.6	46.0
15.158000	15.6	9.000	Off	L1	10.4	34.4	50.0
15.162000	16.9	9.000	Off	L1	10.4	33.1	50.0
15.246000	17.4	9.000	Off	L1	10.4	32.6	50.0
15.302000	16.2	9.000	Off	L1	10.4	33.8	50.0
15.382000	16.6	9.000	Off	L1	10.4	33.4	50.0
15.568000	17.7	9.000	Off	L1	10.4	32.3	50.0

2019-01-30

오후 7:51:38

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/30/2018	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/20/2018	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/26/2018	Annual	101231
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
DYENTC	DFSS60 / AC Power Supply	04/05/2018	Annual	1003030-1
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/17/2018	Annual	100422

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/09/2018	Annual	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	06/30/2017	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/24/2018	Annual	100843
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/07/2018	Annual	8
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/09/2018	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Weinschel	2-3 / Attenuator (3 dB)	10/10/2018	Annual	BR0617
H+S	5910-N-50-010 / Attenuator(10 dB)	11/08/2018	Annual	NONE
CERNEX	CBLU1183540B-01 / Power Amplifier	12/21/2018	Annual	25540
CERNEX	CBL06185030 / Power Amplifier	03/28/2018	Annual	28550
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/27/2018	Annual	3000C000276

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1902-FI003-P
2	HCT-RF-1902-FI004-P
3	HCT-RF-1902-FI005-P
4	HCT-RF-1902-FI006-P