



# TEST REPORT

FCC/IC UNII Test for WL1NB6V2  
Certification

APPLICANT  
LG Electronics Inc.

REPORT NO.  
HCT-RF-2008-FI011

DATE OF ISSUE  
31 August 2020

Tested by  
Jeong Ho Kim

Technical Manager  
Jong Seok Lee

Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.  
Soo Chan Lee  
SooChan Lee / CEO

**HCT CO., LTD.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 F ax. +82 31 645 6401

**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. + 82 31 634 6300 Fax. + 82 31 645 6401



# TEST REPORT

FCC/IC UNII Test  
for WL1NB6V2

REPORT NO.  
HCT-RF-2008-FI011

DATE OF ISSUE  
August 31, 2020

Additional Model

Applicant	LG Electronics 222, LG-ro Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 457-713 Korea
Eut Type Model Name	Wireless Adapter Card WL1NB6V2
FCC ID IC	BEJ-WL1NB6V2 2703H-WL1NB6V2
Modulation type	GFSK
FCC Classification	Unlicensed National Information Infrastructure(NII)
FCC Rule Part(s)	Part 15.407
IC Rule Part(s)	RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 1 (March 2019)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	August 31, 2020	Initial Release

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## CONTENTS

1. GENERAL INFORMATION	5
EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS for 5G-WLAN(U-NII-1, U-NII-3)	6
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	8
4.1 FACILITIES	8
4.2 EQUIPMENT	8
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY OF TEST RESULTS	31
9. TEST RESULT	33
9.1 DUTY CYCLE	33
9.2 26DB BANDWIDTH & 99 % BANDWIDTH	34
9.3 6DB BANDWIDTH	40
9.4 OUTPUT POWER MEASUREMENT	42
9.5 POWER SPECTRAL DENSITY	43
9.6 FREQUENCY STABILITY	46
9.7 RADIATED SPURIOUS EMISSIONS	62
9.8 RADIATED RESTRICTED BAND EDGE	75
9.9 RECEIVER SPURIOUS EMISSIONS	83
9.10 POWERLINE CONDUCTED EMISSIONS	84
10. LIST OF TEST EQUIPMENT	88
11. ANNEX A_ TEST SETUP PHOTO	90

**1. GENERAL INFORMATION****EUT DESCRIPTION**

Model	WL1NB6V2	
Additional Model	-	
EUT Type	Wireless Adapter Card	
Power Supply	DC 3.3 V	
Modulation Type	GFSK	
Frequency Range (MHz)	UNII 1	5 155 MHz ~ 5 200 MHz
	UNII 3	5 730 MHz ~ 5 845 MHz
Antenna Specification	Manufacturer: LG Innotek Co., Ltd. Antenna type: PCB Antenna	
	Ant.A Peak Gain : 1.47 dBi (5 155 ~ 5 200 MHz UNII1 BAND) 1.39 dBi (5 730 ~ 5 845 MHz UNII3 BAND)	Ant.B Peak Gain : 1.33 dBi (5 155 ~ 5 200 MHz UNII1 BAND) 1.45 dBi (5 730 ~ 5 845 MHz UNII3 BAND)
Date(s) of Tests	July 23, 2020 ~ Agust 25, 2020	
PMN (Product Marketing Number)	Wireless Adapter Card	
HVIN (Hardware Version Identification Number)	WL1NB6V2	
FVIN (Firmware Version Identification Number)	v1.1	
HMN (Host Marketing Name)	N/A	

**ANTENNA CONFIGURATIONS for 5G-WLAN(U-NII-1, U-NII-3)**

1. The device employs 2 Antenna. Below are the possible configurations

Configurations	SISO	
	Ant A	Ant B
U-NII-1 & U-NII-3	0	0

Note:

1. 0 = Support, X = Not Support
2. SISO = Single Input Single Output

**2. TEST METHODOLOGY**

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement.

**EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

**EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E. / RSS-Gen issue 5, RSS-247 issue 2.

## GENERAL TEST PROCEDURES

### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### 4.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of A NSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

### 4.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407 / RSS-Gen (Issue 5) Section 8:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

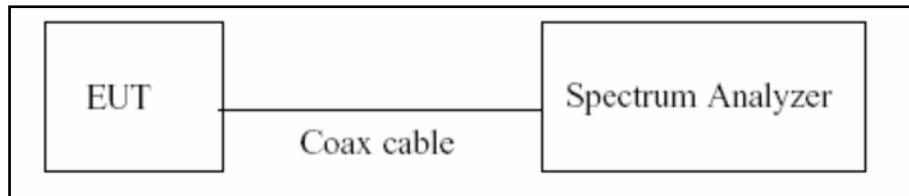

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6dB Bandwidth & 26dB Bandwidth

### Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### Test Configuration

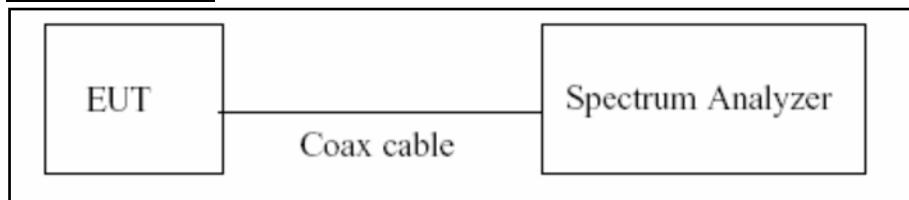

### Test Procedure(26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW  $\geq$  3 x RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.

Test Procedure (99 % Bandwidth for IC)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW  $\approx$  3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.


### 7.3. Output Power Measurement

#### Limit


Band	Limit
UNII 1	<ul style="list-style-type: none"> <li>- Master : Not exceed 1 W(=30dBm)</li> <li>- Slave : Not exceed 250 mW(=23.98 dBm)</li> </ul>
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30dBm)

#### Test Configuration

##### Power Meter

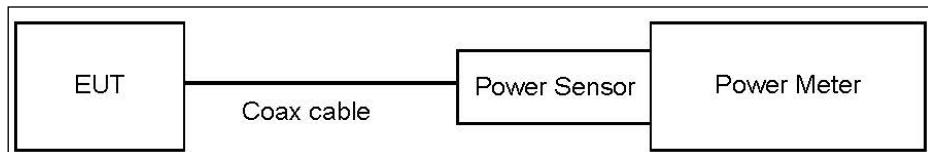

##### Spectrum Analyzer(Only Straddle Channel)

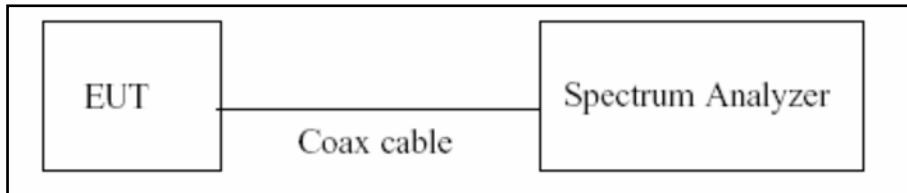

#### Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add  $10 \log (1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure(Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW  $\geq$  3 MHz.
5. Number of points in sweep  $\geq$  2 x span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add  $10\log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(10 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	10.78
UNII 3	10.78


(Actual value of loss for the attenuator and cable combination)

#### 7.4. Power Spectral Density

##### Limit

Band	Limit
UNII 1	11 dBm/MHz
UNII 3	30 dBm/500 kHz

##### Test Configuration

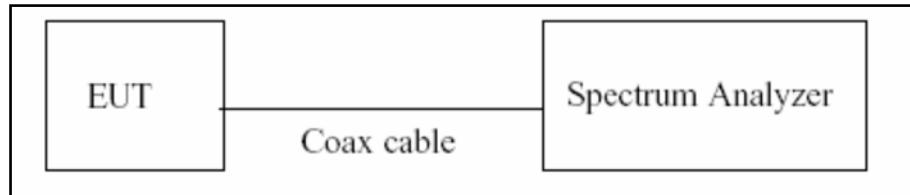

##### Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW  $\geq$  3 MHz
4. Number of points in sweep  $\geq$  2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add  $10 \log(1/x)$ , where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(10 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	10.78
UNII 3	10.78


(Actual value of loss for the attenuator and cable combination)

## 7.5. Frequency Stability

### Limit

Maintained within the band

### Test Configuration

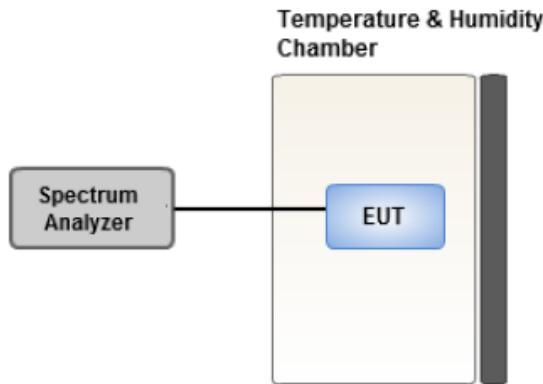

### Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

## 7.6. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.7. Radiated Test

Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of  $-27 \text{ dBm/MHz}$ .
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of  $-27 \text{ dBm/MHz}$ .
3. UNII 3: All emissions shall be limited to a level of  $-27 \text{ dBm/MHz}$  at 75 MHz or more above or below the band edge increasing linearly to  $10 \text{ dBm/MHz}$  at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of  $15.6 \text{ dBm/MHz}$  at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of  $27 \text{ dBm/MHz}$  at the band edge.
4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.

## FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30

## IC


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	$6.37/F(\text{kHz})$	300
0.490 – 1.705	$63.7/F(\text{kHz})$	30
1.705 – 30	0.08	30

## FCC&amp;IC


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

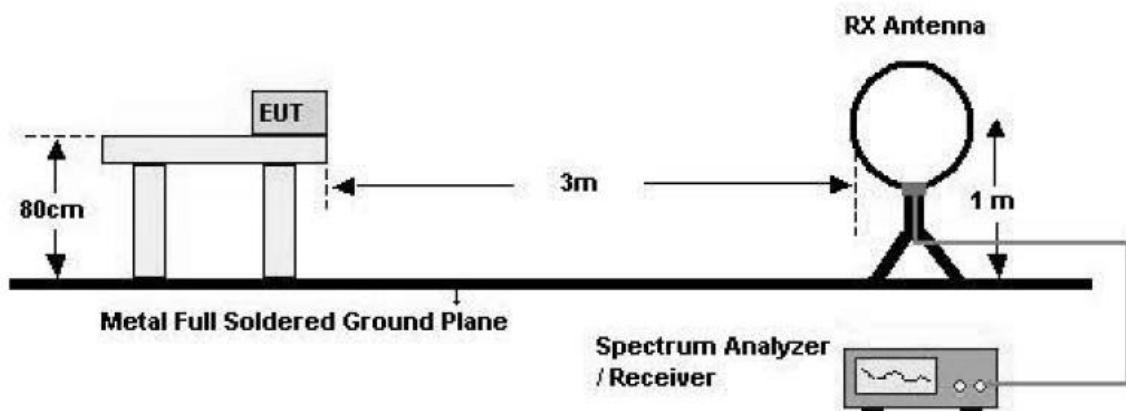

30 MHz - 1 GHz

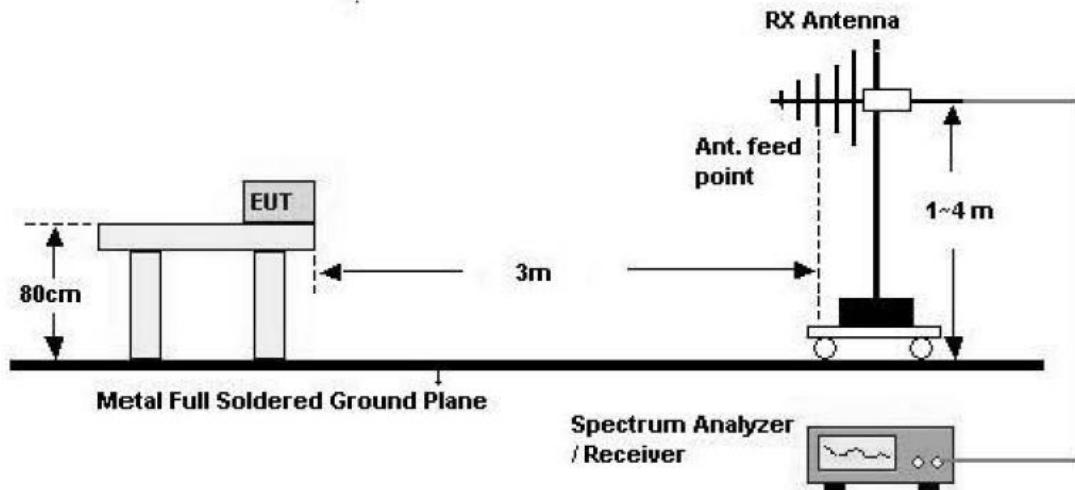

Above 1 GHz

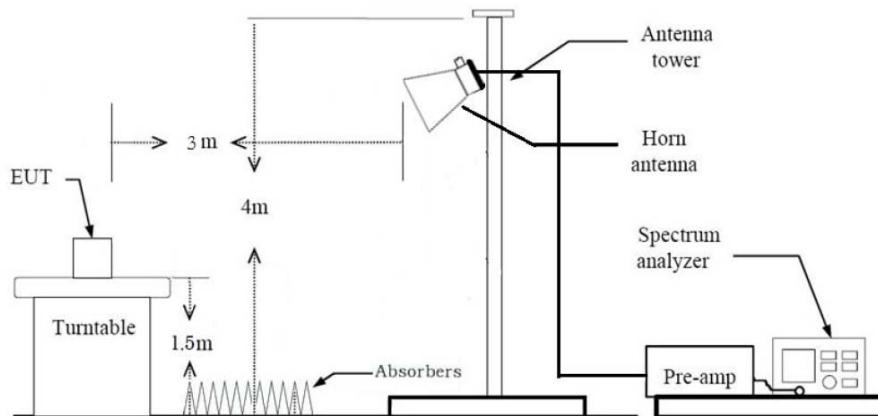

#### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor( $0.009 \text{ MHz} - 0.490 \text{ MHz}$ ) =  $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$
- Measurement Distance : 3 m
7. Distance Correction Factor( $0.490 \text{ MHz} - 30 \text{ MHz}$ ) =  $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m

#### 8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW  $\geq$  3 x RBW

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

#### KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

#### Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

#### 6. Spectrum Setting

##### (1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

##### (2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak

- RBW = 120 kHz

※ In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

#### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard adapter (for DC Power feed)

#### 8. Spectrum Setting

##### (1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle.

##### (2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle  $\geq$  98 percent) = VBW  $\leq$  RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW  $\geq$  1/T, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.

- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.
- 9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
- 10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
- 11. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
- 12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

#### Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard adapter (for DC Power feed)
8. Spectrum Setting
  - (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep Time = auto
    - Trace mode = max hold
    - Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle.
  - (2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):
    - RBW = 1 MHz
    - VBW(Duty cycle  $\geq$  98 percent) = VBW  $\leq$  RBW/100(i.e., 10 kHz) but not less than 10 Hz.
    - VBW(Duty cycle is < 98 percent) = VBW  $\geq$  1/T, where T is the minimum transmission duration.
    - The analyzer is set to linear detector mode.
    - Detector = Peak.
    - Sweep time = auto.
    - Trace mode = max hold.
    - Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at

least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.

9. Measured Frequency Range :

- 4500MHz ~ 5150MHz
- 5350MHz ~ 5460MHz
- 5460MHz ~ 5470MHz
- (75 MHz or more below the 5725MHz) ~ 5725MHz
- 5850MHz ~ (75 MHz or more above the 5850MHz)

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Attenuator + Distance Factor(D.F)

## 7.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

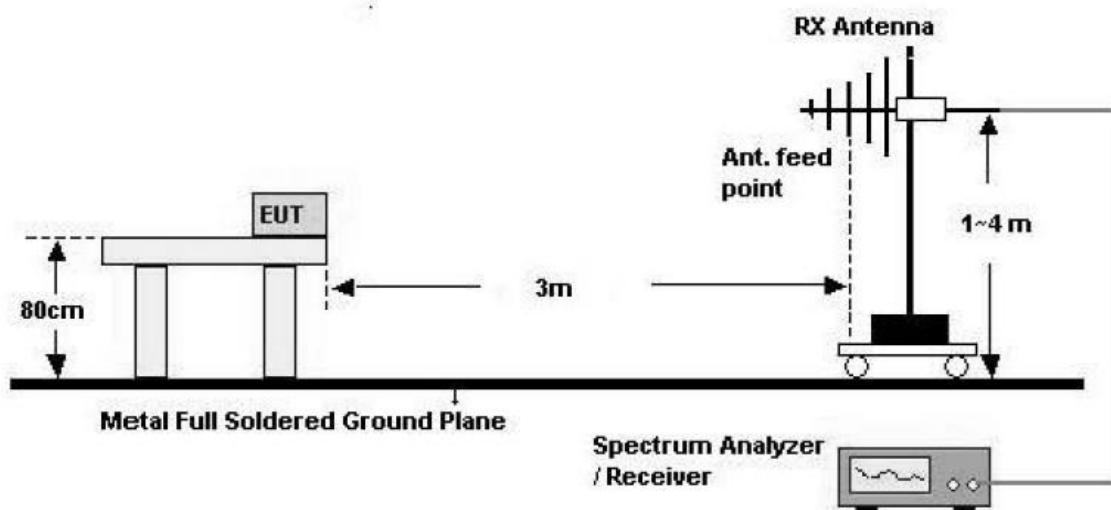

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

## Above 1 GHz

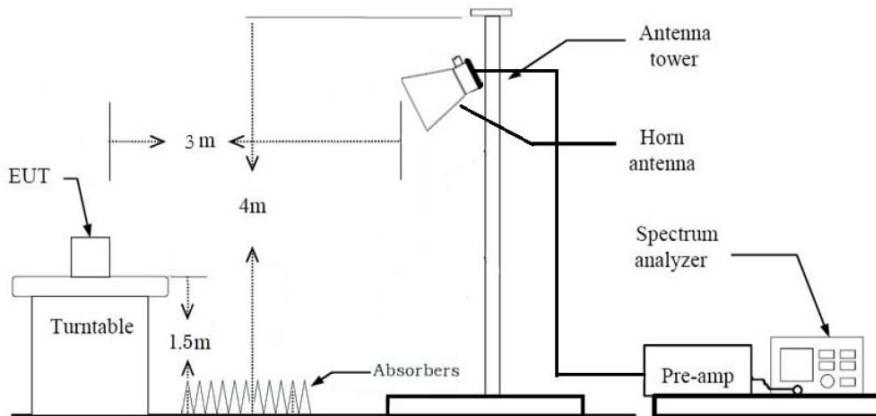Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard adapter (for DC Power feed)
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - We performed using a reduced video BW method was done with the analyzer in linear mode
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS

- Trace = Average

- RBW = 1 MHz

- VBW  $\geq$  3 x RBW

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## 7.9. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
2. EUT Axis
  - Radiated Spurious Emissions : Y,Z
  - Radiated Restricted Band Edge : X,Y,Z
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone
  - Worstcase : Stand alone

### Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.

**8. SUMMARY OF TEST RESULTS**

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§ 15.407 (for Power Measurement)	N/A		PASS
6 dB Bandwidth	§ 15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§ 15.407(a)(1)	< 250 mW(5150-5250 MHz) < 250 mW or $11+10 \log_{10} (\text{BW})$ dBm (5250-5350 MHz) < 250 mW or $11+10 \log_{10} (\text{BW})$ dBm (5470-5725 MHz) <1 W(5725-5850 MHz)	Conducted	PASS
Peak Power Spectral Density	§ 15.407(a)(1),(5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§ 15.407(g) § 2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		PASS
Undesirable Emissions	§ 15.407(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.7 (UNII 3)		PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	PASS

## IC Part

Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
6 dB Bandwidth	RSS-247, 6.2.4.1	> 500 kHz (5725~5850 MHz)		PASS
Maximum Conducted Output Power,	RSS-247, 6.2	< 250 mW or $11+10 \log_{10}$ (BW) dBm (5470-5600, 5650-5725 MHz) Whichever power is less	CONDUCTED	PASS
	RSS-247, 6.2.4.1	< 1 W (5725-5850 MHz)		
Maximum e.i.r.p	RSS-247, 6.2	< 30 mW or $1.76+10 \log_{10}$ (BW) dBm (5150-5250 MHz) < 30 mW or $1.76+10 \log_{10}$ (BW) dBm (5250-5350 MHz) < 1 W or $17+10 \log_{10}$ (BW) dBm (5470-5725 MHz) Whichever power is less	CONDUCTED	PASS
Power Spectral Density	RSS-247 6.2	<10 dBm/ MHz(e.i.r.p.) (5150-5250 MHz) <11 dBm/MHz(Conducted) (5250-5350 MHz, 5470-5600 MHz, 5650-5725 MHz)		PASS
	RSS-247, 6.2.4.1	<30 dBm/500 kHz(Conducted) (5725-5850 MHz)		
Frequency Stability	RSS-GEN 8.11	should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation.		PASS
AC Conducted Emissions 150 kHz-30 MHz	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		PASS
Undesirable Emissions	RSS-247, 6.2.1.2	26 dBc at 5250~5350 MHz (5150~5350 MHz)	RADIATED	PASS
	RSS-247, 6.2	<-27 dBm/ MHz EIRP (5150-5350 MHz, 5470-5725 MHz)		PASS
	RSS-247, 6.2.4.2	cf. Section 9.8.1 (UNII 3)		
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	RSS-Gen, 8.9 RSS-Gen, 8.10	RSS-Gen section 8.9 table 5, 6 section 8.10 table 7		PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3		PASS

## 9. TEST RESULT


### 9.1 DUTY CYCLE

Mode	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle(%)	Duty Cycle Factor(dB)
UNII(GFSK)	-	-	100	0.000

Note:

Duty Cycle : All test are applied Duty cycle as 100% for the test.

Test Plot

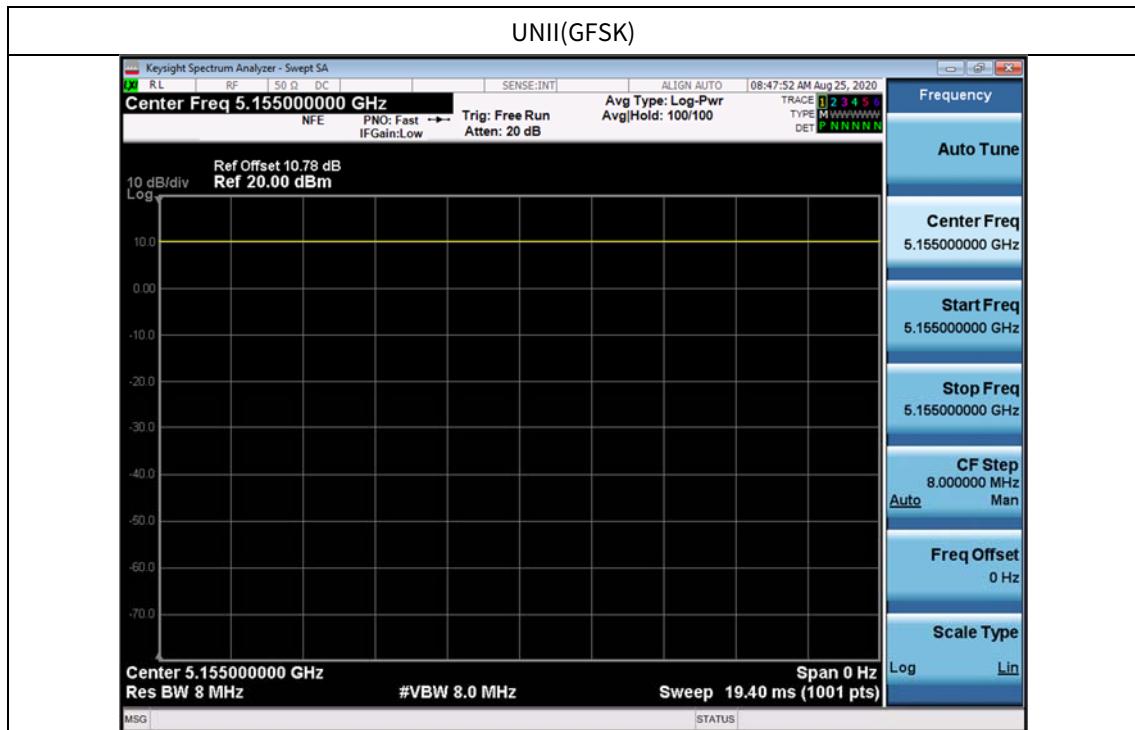

**9.2 26DB BANDWIDTH & 99 % BANDWIDTH**

FCC

[ANT A]

UNII 1		26dB Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5155	Low	3.749
5179	Mid	3.747
5200	High	3.753

UNII 3		26dB Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5730	Low	4.437
5787	Mid	4.471
5845	High	4.668


[ANT B]

UNII 1		26dB Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5155	Low	3.755
5179	Mid	3.431
5200	High	3.460


UNII 3		26dB Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5730	Low	4.443
5787	Mid	4.449
5845	High	4.676

## □ Test Plots (UNII)

[ANT A]

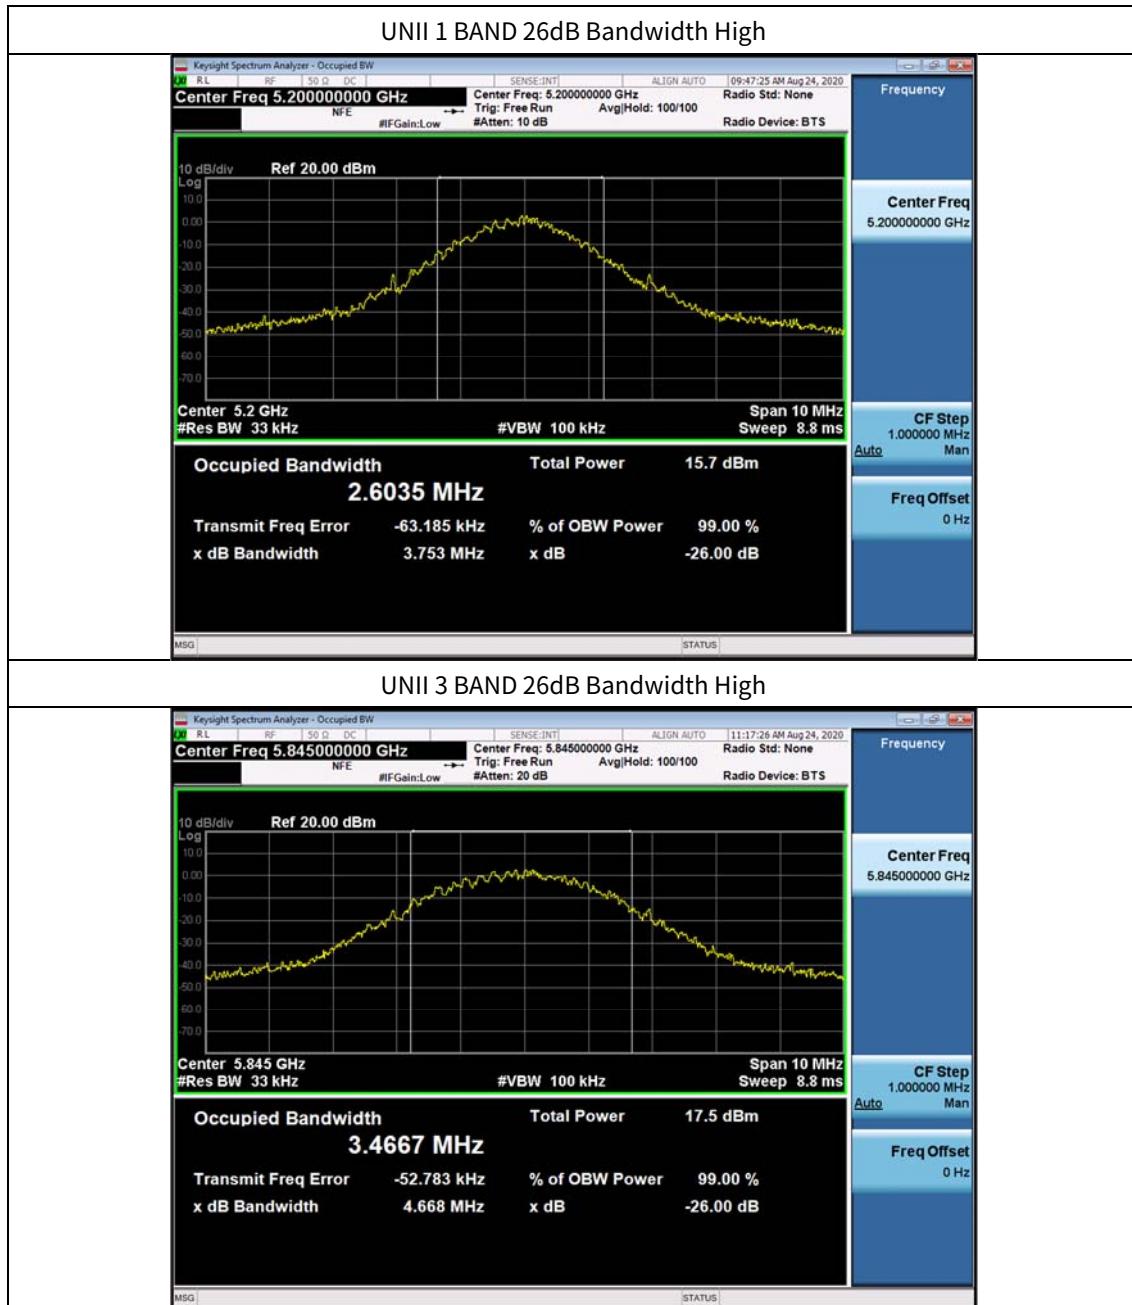

[ANT B]

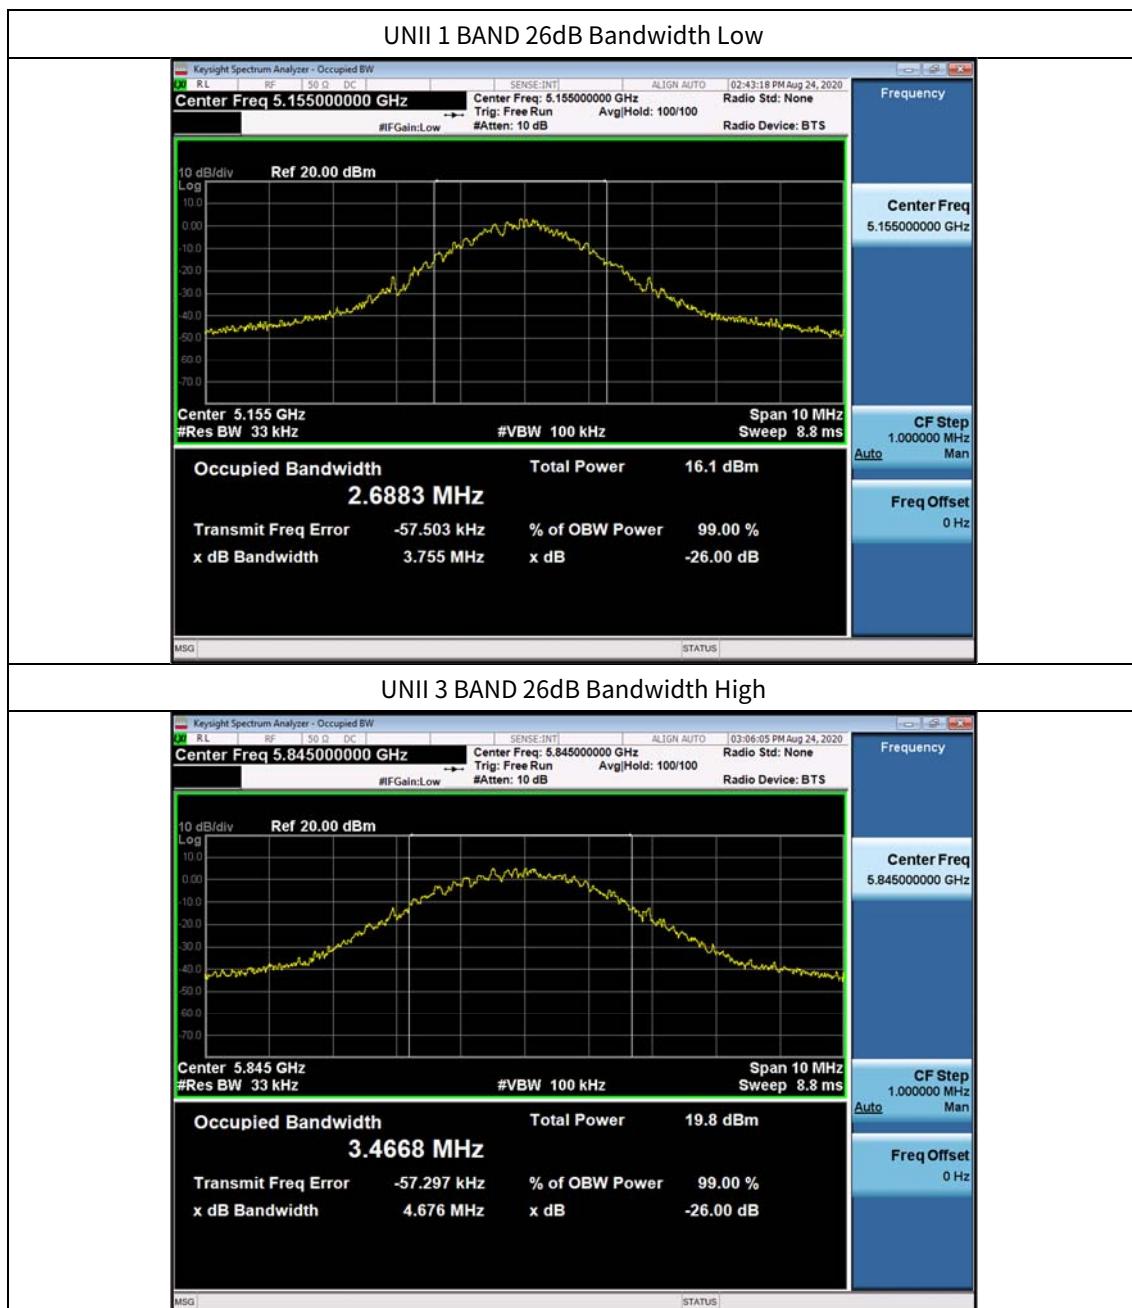

Note:

In order to simplify the report, attached plots were only the most wide channel.

99 % Bandwidth (IC)

[ANT A]

UNII 1		99% bandwidth [MHz]
Frequency [MHz]	Channel No.	
5155	Low	2.6743
5179	Mid	2.6176
5200	High	2.5913

UNII 3		99% bandwidth [MHz]
Frequency [MHz]	Channel No.	
5730	Low	3.3064
5878	Mid	3.3600
5845	High	3.4745


[ANT B]

UNII 1		99% bandwidth [MHz]
Frequency [MHz]	Channel No.	
5155	Low	2.6161
5179	Mid	2.6156
5200	High	2.6092


UNII 3		99% bandwidth [MHz]
Frequency [MHz]	Channel No.	
5730	Low	3.2984
5878	Mid	3.3505
5845	High	3.4415

## □ Test Plots (UNII)

[ANT A]

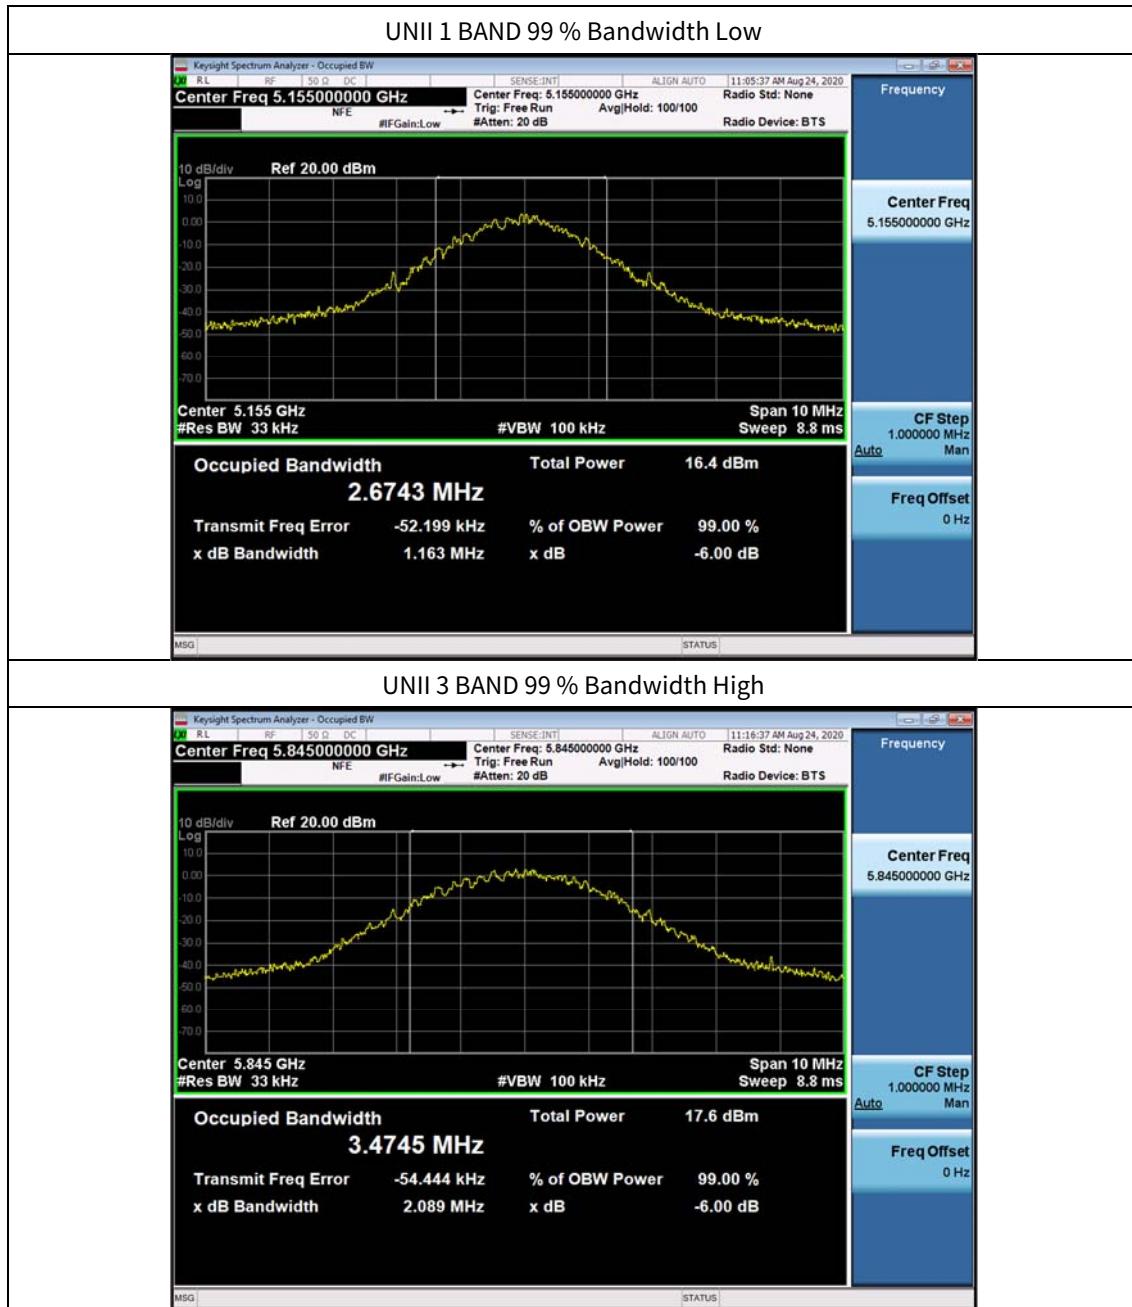

[ANT B]

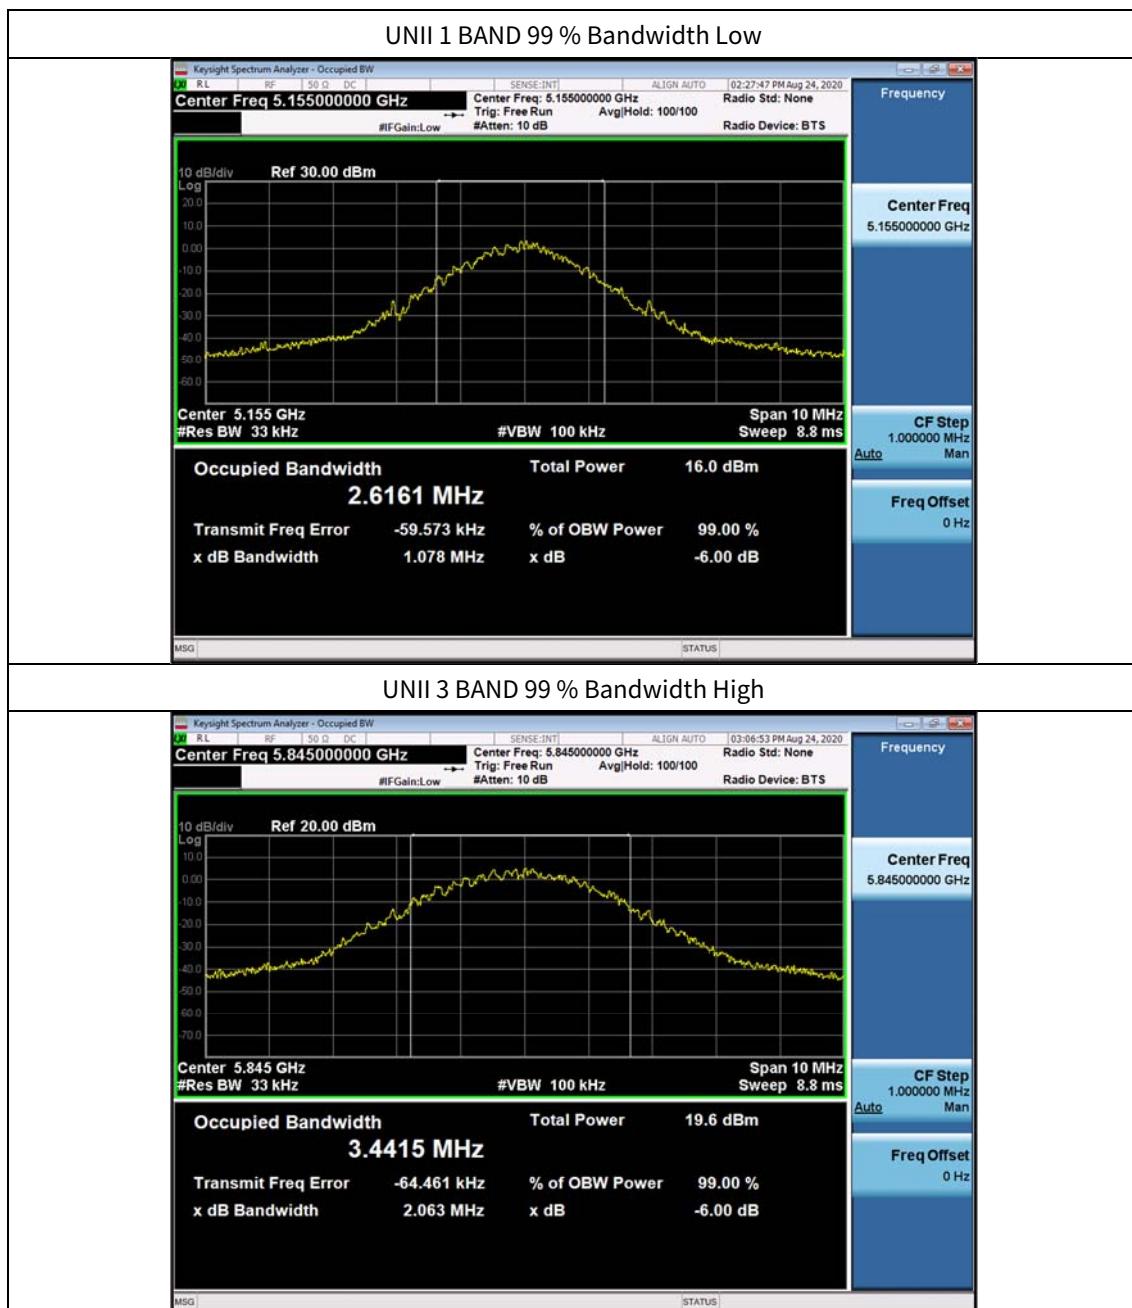

Note:

In order to simplify the report, attached plots were only the most wide channel.

**9.3 6DB BANDWIDTH**

[ANT A]


UNII 3		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5730	Low	1.949	> 0.5	Pass
5787	Mid	2.011	> 0.5	Pass
5845	High	2.127	> 0.5	Pass

[ANT B]


UNII 3		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5730	Low	1.901	> 0.5	Pass
5787	Mid	2.015	> 0.5	Pass
5845	High	2.092	> 0.5	Pass

Test Plots

[ANT A]

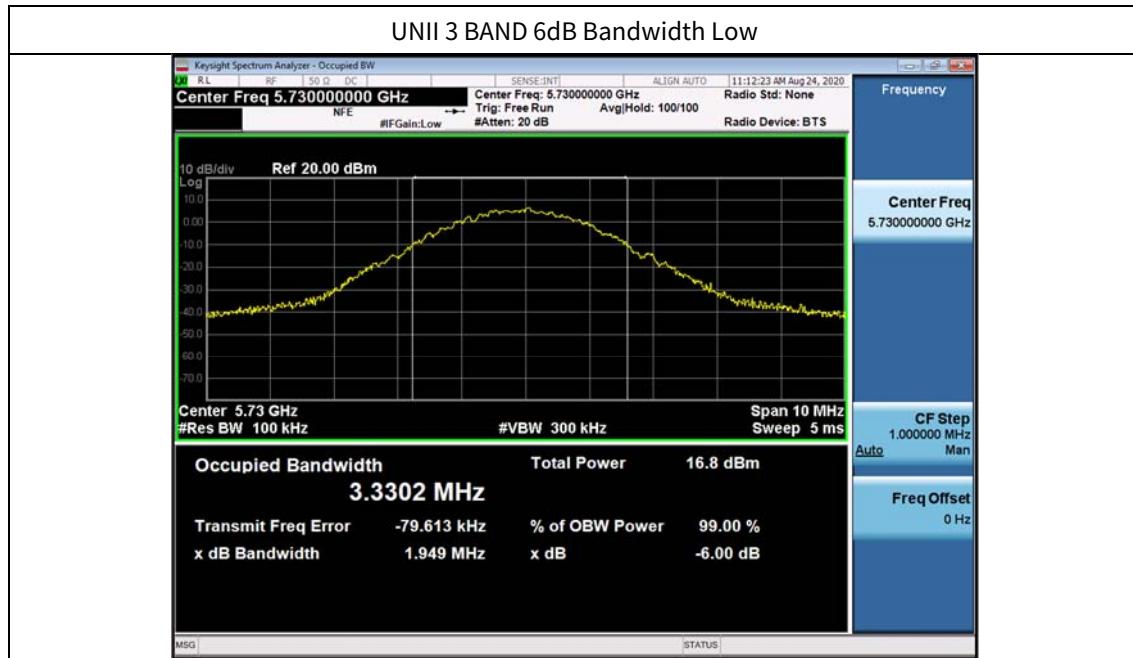

[ANT B]

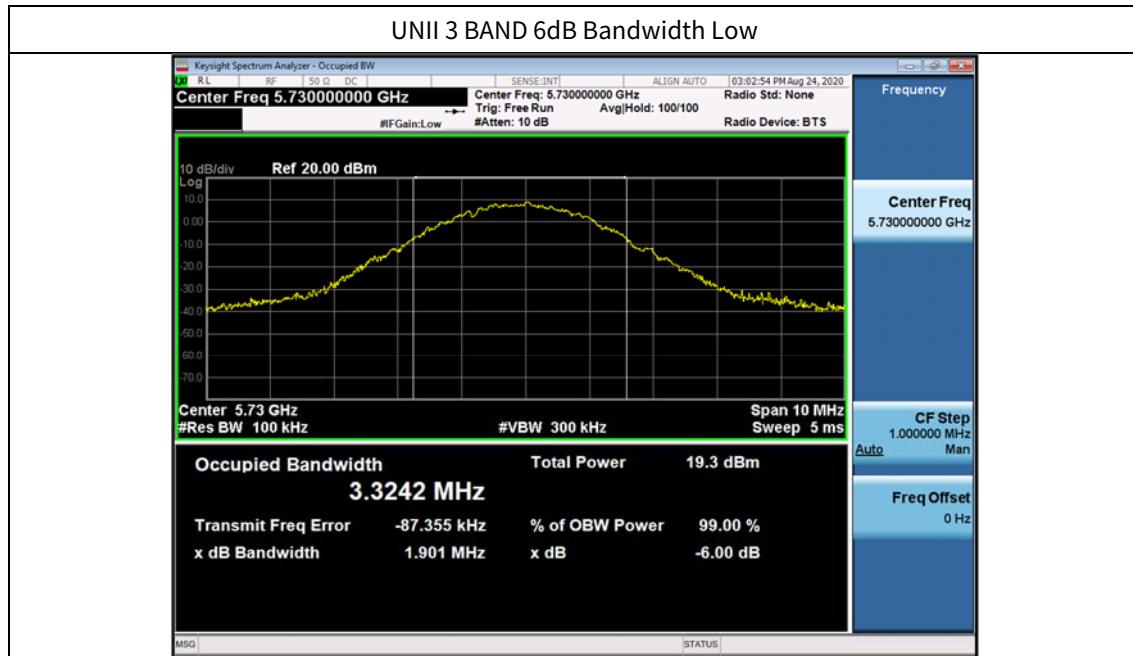

Note: In order to simplify the report, attached plots were only the most narrow channel.

**9.4 OUTPUT POWER MEASUREMENT**

[ANT A]

UNII 1		Measured Power [dBm]	Limit [dBm]
Frequency [MHz]	Channel No.		
5155	Low	9.63	23.98
5179	Mid	9.25	23.98
5200	High	9.15	23.98

UNII 3		Measured Power [dBm]	Limit [dBm]
Frequency [MHz]	Channel No.		
5730	Low	10.11	23.98
5787	Mid	10.58	23.98
5845	High	11.09	23.98

[ANT B]

UNII 1		Measured Power [dBm]	Limit [dBm]
Frequency [MHz]	Channel No.		
5155	Low	9.54	23.98
5179	Mid	9.13	23.98
5200	High	8.81	23.98

UNII 3		Measured Power [dBm]	Limit [dBm]
Frequency [MHz]	Channel No.		
5730	Low	12.87	23.98
5787	Mid	13.18	23.98
5845	High	13.34	23.98

**9.5 POWER SPECTRAL DENSITY**

[ANT A]

UNII 1		Measured PSD [dBm]	Limit
Frequency [MHz]	Channel No.		
5155	Low	8.191	11 dBm/MHz
5179	Mid	7.954	
5200	High	7.456	

UNII 3		Measured PSD [dBm]	Limit
Frequency [MHz]	Channel No.		
5730	Low	5.688	30 dBm/500kHz
5787	Mid	5.914	
5845	High	6.330	

[ANT B]

UNII 1		Measured PSD [dBm]	Limit
Frequency [MHz]	Channel No.		
5155	Low	8.222	11 dBm/MHz
5179	Mid	7.805	
5200	High	7.525	


UNII 3		Measured PSD [dBm]	Limit
Frequency [MHz]	Channel No.		
5730	Low	8.313	30 dBm/500kHz
5787	Mid	8.447	
5845	High	8.481	

## □ Test Plots (UNII)

[ANT A]



[ANT B]

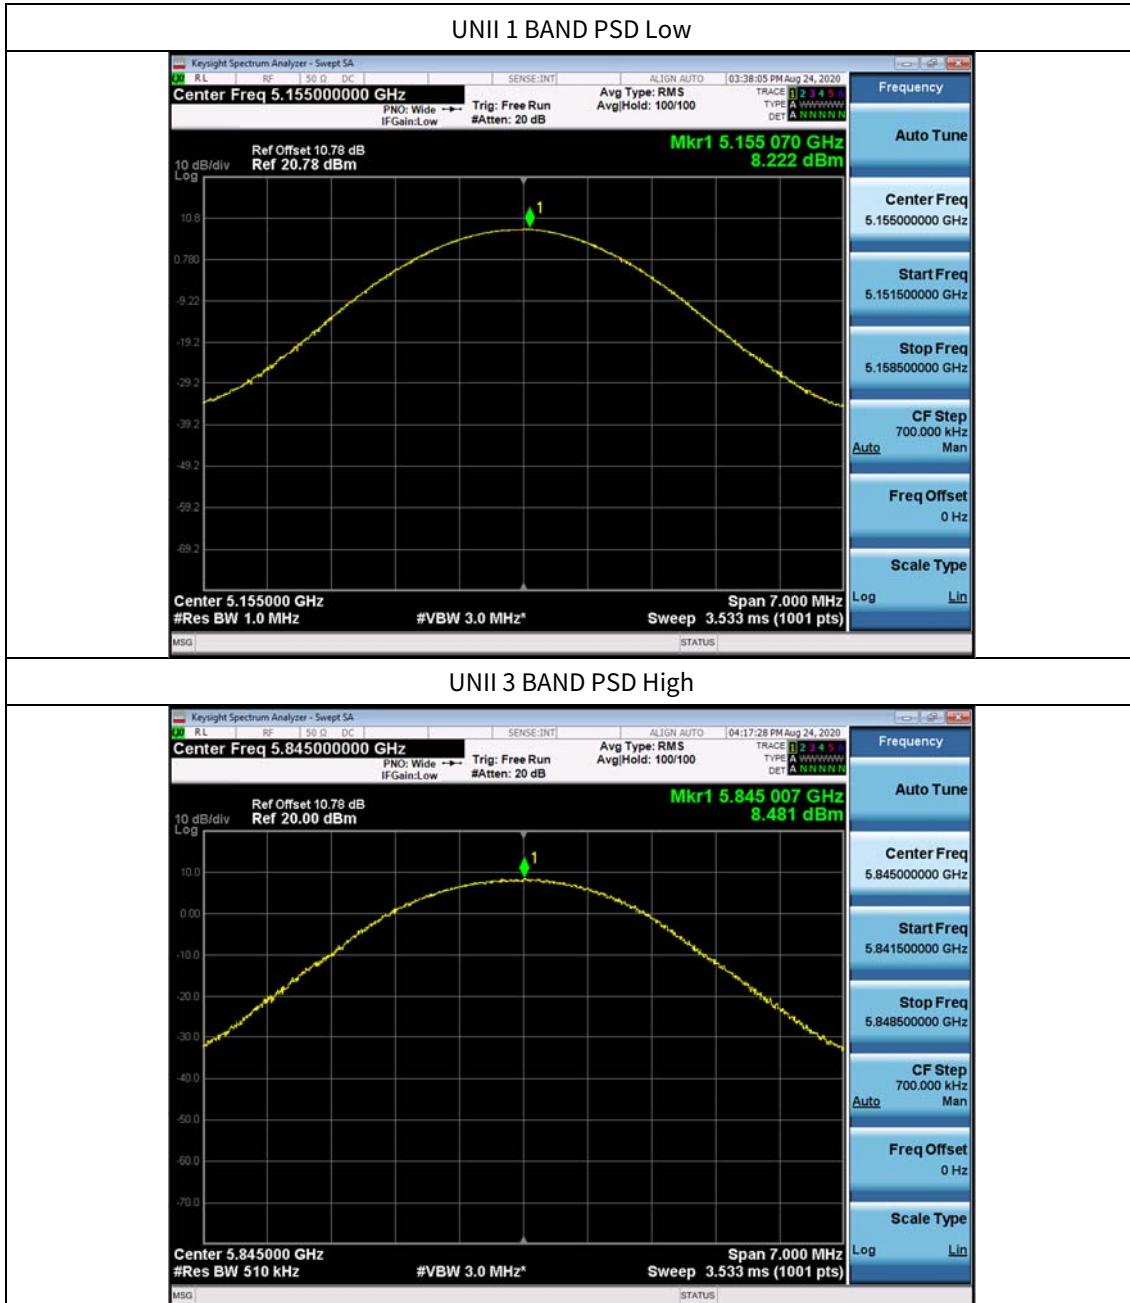Note:

In order to simplify the report, attached plots were only channel of highest power.

## 9.6 FREQUENCY STABILITY

[ANT A]

Startup after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,155,000,000 Hz
CHANNEL:	Low
REFERENCE VOLTAGE:	3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5155027.87	27.87
100%		-30	5155032.61	32.61
100%		-20	5155010.62	10.62
100%		-10	5155075.33	75.33
100%		0	5155052.32	52.32
100%		+10	5155046.29	46.29
100%		+30	5155020.35	20.35
100%		+40	5155014.64	14.64
100%		+50	5155015.20	15.20
High	3.45	+20	5155035.74	35.74
Low	3.15	+20	5155034.66	34.66

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,730,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5730010.43	10.43
100%		-30	5730018.13	18.13
100%		-20	5730006.07	6.07
100%		-10	5730073.95	73.95
100%		0	5730049.79	49.79
100%		+10	5730004.16	4.16
100%		+30	5730019.92	19.92
100%		+40	5730021.89	21.89
100%		+50	5730034.86	34.86
High	3.45	+20	5730066.14	66.14
Low	3.15	+20	5730057.17	57.17

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,155,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5155052.05	52.05
100%		-30	5155047.54	47.54
100%		-20	5155063.87	63.87
100%		-10	5155022.46	22.46
100%		0	5155008.09	8.09
100%		+10	5155012.56	12.56
100%		+30	5155027.26	27.26
100%		+40	5155041.50	41.50
100%		+50	5155088.71	88.71
High	3.45	+20	5155058.20	58.20
Low	3.15	+20	5155038.68	38.68

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,730,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5730063.69	63.69
100%		-30	5730071.05	71.05
100%		-20	5730047.05	47.05
100%		-10	5730033.19	33.19
100%		0	5730019.69	19.69
100%		+10	5730077.98	77.98
100%		+30	5730057.64	57.64
100%		+40	5730066.62	66.62
100%		+50	5730041.45	41.45
High	3.45	+20	5730042.27	42.27
Low	3.15	+20	5730017.79	17.79

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,155,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5155012.82	12.82
100%		-30	5155069.12	69.12
100%		-20	5155018.53	18.53
100%		-10	5155046.86	46.86
100%		0	5155008.86	8.86
100%		+10	5155059.27	59.27
100%		+30	5155033.94	33.94
100%		+40	5155071.22	71.22
100%		+50	5155079.70	79.70
High	3.45	+20	5155073.25	73.25
Low	3.15	+20	5155027.55	27.55

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,730,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5730091.44	91.44
100%		-30	5730009.80	9.80
100%		-20	5730017.49	17.49
100%		-10	5730005.39	5.39
100%		0	5730055.46	55.46
100%		+10	5730010.75	10.75
100%		+30	5730082.81	82.81
100%		+40	5730017.81	17.81
100%		+50	5730092.15	92.15
High	3.45	+20	5730027.89	27.89
Low	3.15	+20	5730021.76	21.76

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,155,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5155062.02	62.02
100%		-30	5155036.11	36.11
100%		-20	5155001.80	1.80
100%		-10	5155022.91	22.91
100%		0	5155035.25	35.25
100%		+10	5155082.12	82.12
100%		+30	5155095.42	95.42
100%		+40	5155093.00	93.00
100%		+50	5155049.98	49.98
High	3.45	+20	5155062.26	62.26
Low	3.15	+20	5155055.53	55.53

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,730,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5730014.34	14.34
100%		-30	5730098.68	98.68
100%		-20	5730020.69	20.69
100%		-10	5730019.31	19.31
100%		0	5730026.03	26.03
100%		+10	5730045.35	45.35
100%		+30	5730083.51	83.51
100%		+40	5730057.32	57.32
100%		+50	5730038.89	38.89
High	3.45	+20	5730076.40	76.40
Low	3.15	+20	5730037.10	37.10

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

[ANT B]

Startup after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,155,000,000 Hz
CHANNEL:	Low
REFERENCE VOLTAGE:	3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5155057.98	57.98
100%		-30	5155011.10	11.10
100%		-20	5155006.91	6.91
100%		-10	5155068.66	68.66
100%		0	5155046.67	46.67
100%		+10	5155081.79	81.79
100%		+30	5155019.65	19.65
100%		+40	5155064.55	64.55
100%		+50	5155048.42	48.42
High	3.45	+20	5155017.84	17.84
Low	3.15	+20	5155090.06	90.06

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,730,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5730013.38	13.38
100%		-30	5730002.72	2.72
100%		-20	5730019.03	19.03
100%		-10	5730011.02	11.02
100%		0	5730098.84	98.84
100%		+10	5730065.27	65.27
100%		+30	5730077.49	77.49
100%		+40	5730044.07	44.07
100%		+50	5730079.05	79.05
High	3.45	+20	5730036.66	36.66
Low	3.15	+20	5730016.17	16.17

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,155,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5155085.66	85.66
100%		-30	5155071.44	71.44
100%		-20	5155031.98	31.98
100%		-10	5155020.64	20.64
100%		0	5155001.36	1.36
100%		+10	5155038.02	38.02
100%		+30	5155079.24	79.24
100%		+40	5155064.87	64.87
100%		+50	5155018.74	18.74
High	3.45	+20	5155041.46	41.46
Low	3.15	+20	5155052.15	52.15

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,730,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5730002.59	2.59
100%		-30	5730022.75	22.75
100%		-20	5730046.38	46.38
100%		-10	5730029.61	29.61
100%		0	5730031.23	31.23
100%		+10	5730070.22	70.22
100%		+30	5730004.84	4.84
100%		+40	5730081.95	81.95
100%		+50	5730015.39	15.39
High	3.45	+20	5730042.11	42.11
Low	3.15	+20	5730019.88	19.88

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,155,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5155019.97	19.97
100%		-30	5155077.18	77.18
100%		-20	5155084.66	84.66
100%		-10	5155057.68	57.68
100%		0	5155046.84	46.84
100%		+10	5155041.95	41.95
100%		+30	5155095.51	95.51
100%		+40	5155087.03	87.03
100%		+50	5155002.17	2.17
High	3.45	+20	5155029.10	29.10
Low	3.15	+20	5155016.91	16.91

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,730,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5730018.18	18.18
100%		-30	5730003.51	3.51
100%		-20	5730031.35	31.35
100%		-10	5730005.93	5.93
100%		0	5730079.93	79.93
100%		+10	5730093.99	93.99
100%		+30	5730043.61	43.61
100%		+40	5730067.35	67.35
100%		+50	5730066.10	66.10
High	3.45	+20	5730052.98	52.98
Low	3.15	+20	5730034.20	34.20

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,155,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5155012.75	12.75
100%		-30	5155020.44	20.44
100%		-20	5155090.68	90.68
100%		-10	5155059.99	59.99
100%		0	5155065.56	65.56
100%		+10	5155011.53	11.53
100%		+30	5155086.08	86.08
100%		+40	5155095.26	95.26
100%		+50	5155086.07	86.07
High	3.45	+20	5155074.21	74.21
Low	3.15	+20	5155061.63	61.63

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,730,000,000 Hz  
 CHANNEL: Low  
 REFERENCE VOLTAGE: 3.3 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.3	+20(Ref)	5730031.18	31.18
100%		-30	5730040.64	40.64
100%		-20	5730006.63	6.63
100%		-10	5730074.84	74.84
100%		0	5730057.76	57.76
100%		+10	5730004.56	4.56
100%		+30	5730018.28	18.28
100%		+40	5730080.61	80.61
100%		+50	5730032.85	32.85
High	3.45	+20	5730047.46	47.46
Low	3.15	+20	5730030.52	30.52

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

## 9.7 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode

Frequency Range : Above 1 GHz

[ANT A]

Band :	UNII 1
Operating Frequency	5155 MHz
Channel No.	Low

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10310	53.38	8.95	V	62.33	68.20	5.87	PK
15465	39.94	13.02	V	52.96	73.98	21.02	PK
15465	26.25	13.02	V	39.27	53.98	14.71	AV
10310	55.08	8.95	H	64.03	68.20	4.17	PK
15465	40.08	13.02	H	53.10	73.98	20.88	PK
15465	26.78	13.02	H	39.80	53.98	14.18	AV

Band :	UNII 1
Operating Frequency	5179 MHz
Channel No.	Mid

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10358	51.81	9.17	V	60.98	68.20	7.22	PK
15537	40.12	13.42	V	53.54	73.98	20.44	PK
15537	26.22	13.42	V	39.64	53.98	14.34	AV
10358	55.05	9.17	H	64.22	68.20	3.98	PK
15537	40.75	13.42	H	54.17	73.98	19.81	PK
15537	26.43	13.42	H	39.85	53.98	14.13	AV

Band :

UNII 1

Operating Frequency

5200 MHz

Channel No.

High

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10400	53.82	9.57	V	63.39	68.20	4.81	PK
15600	37.46	13.16	V	50.62	73.98	23.36	PK
15600	25.06	13.16	V	38.22	53.98	15.76	AV
10400	55.56	9.57	H	65.13	68.20	3.07	PK
15600	39.83	13.16	H	52.99	73.98	20.99	PK
15600	26.25	13.16	H	39.41	53.98	14.57	AV

Band : UNII 3

Operating Frequency 5730 MHz

Channel No. Low

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11460	45.14	11.71	V	56.85	73.98	17.13	PK
11460	34.46	11.71	V	46.17	53.98	7.81	AV
17190	41.89	14.71	V	56.60	68.20	11.60	PK
11460	46.64	11.71	H	58.35	73.98	15.63	PK
11460	35.55	11.71	H	47.26	53.98	6.72	AV
17190	42.91	14.71	H	57.62	68.20	10.58	PK

Band : UNII 3

Operating Frequency 5787 MHz

Channel No. Mid

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11574	47.57	10.97	V	58.54	73.98	15.44	PK
11574	37.45	10.97	V	48.42	53.98	5.56	AV
17361	42.86	15.96	V	58.82	68.20	9.38	PK
11574	48.68	10.97	H	59.65	73.98	14.33	PK
11574	38.74	10.97	H	49.71	53.98	4.27	AV
17361	44.22	15.96	H	60.18	68.20	8.02	PK

Band : UNII 3  
Operating Frequency 5845 MHz  
Channel No. High

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11690	48.75	10.55	V	59.30	73.98	14.68	PK
11690	38.81	10.55	V	49.36	53.98	4.62	AV
17535	44.86	17.34	V	62.20	68.20	6.00	PK
11690	50.04	10.55	H	60.59	73.98	13.39	PK
11690	40.30	10.55	H	50.85	53.98	3.13	AV
17535	45.21	17.34	H	62.55	68.20	5.65	PK

[ANT B]

Band : UNII 1  
 Operating Frequency 5155 MHz  
 Channel No. Low

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10310	53.27	8.95	V	62.22	68.20	5.98	PK
15465	41.10	13.02	V	54.12	73.98	19.86	PK
15465	27.05	13.02	V	40.07	53.98	13.91	AV
10310	52.40	8.95	H	61.35	68.20	6.85	PK
15465	39.75	13.02	H	52.77	73.98	21.21	PK
15465	26.89	13.02	H	39.91	53.98	14.07	AV

Band : UNII 1  
 Operating Frequency 5179 MHz  
 Channel No. Mid

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10358	52.57	9.17	V	61.74	68.20	6.46	PK
15537	39.62	13.42	V	53.04	73.98	20.94	PK
15537	26.05	13.42	V	39.47	53.98	14.51	AV
10358	54.38	9.17	H	63.55	68.20	4.65	PK
15537	40.47	13.42	H	53.89	73.98	20.09	PK
15537	26.34	13.42	H	39.76	53.98	14.22	AV

Band :

UNII 1

Operating Frequency

5200 MHz

Channel No.

High

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10400	51.78	9.57	V	61.35	68.20	6.85	PK
15600	39.86	13.16	V	53.02	73.98	20.96	PK
15600	26.39	13.16	V	39.55	53.98	14.43	AV
10400	54.20	9.57	H	63.77	68.20	4.43	PK
15600	39.45	13.16	H	52.61	73.98	21.37	PK
15600	26.11	13.16	H	39.27	53.98	14.71	AV

Band :

UNII 3

Operating Frequency

5730 MHz

Channel No.

Low

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11460	46.94	11.71	V	58.65	73.98	15.33	PK
11460	36.91	11.71	V	48.62	53.98	5.36	AV
17190	44.41	14.71	V	59.12	68.20	9.08	PK
11460	47.73	11.71	H	59.44	73.98	14.54	PK
11460	37.51	11.71	H	49.22	53.98	4.76	AV
17190	44.86	14.71	H	59.57	68.20	8.63	PK

Band :

UNII 3

Operating Frequency

5787 MHz

Channel No.

Mid

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11574	43.94	10.97	V	54.91	73.98	19.07	PK
11574	31.72	10.97	V	42.69	53.98	11.29	AV
17361	42.67	15.96	V	58.63	68.20	9.57	PK
11574	45.85	10.97	H	56.82	73.98	17.16	PK
11574	34.56	10.97	H	45.53	53.98	8.45	AV
17361	45.07	15.96	H	61.03	68.20	7.17	PK


Band : UNII 3  
Operating Frequency 5845 MHz  
Channel No. High

Frequency [MHz]	Reading dBuV	CL+AF+DF-AG [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11690	47.49	10.55	V	58.04	73.98	15.94	PK
11690	36.87	10.55	V	47.42	53.98	6.56	AV
17535	43.15	17.34	V	60.49	68.20	7.71	PK
11690	48.87	10.55	H	59.42	73.98	14.56	PK
11690	38.41	10.55	H	48.96	53.98	5.02	AV
17535	46.95	17.34	H	64.29	68.20	3.91	PK


Test Plots

[ANT A]

Peak Reading (UNII 1, High Ch. 2nd Harmonic, Z-H)

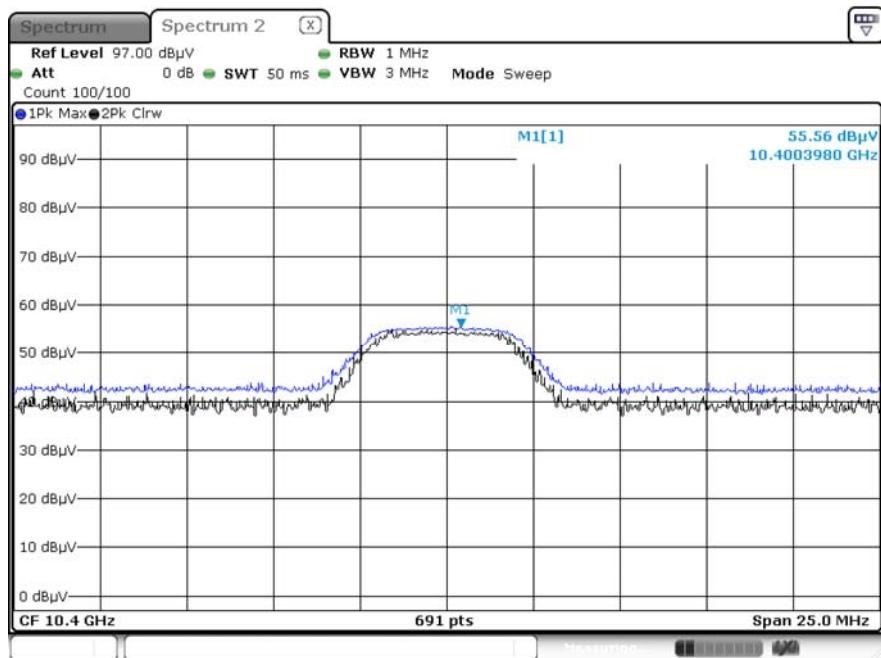


Average Reading (UNII 3, High Ch. 2nd Harmonic, Z-H)

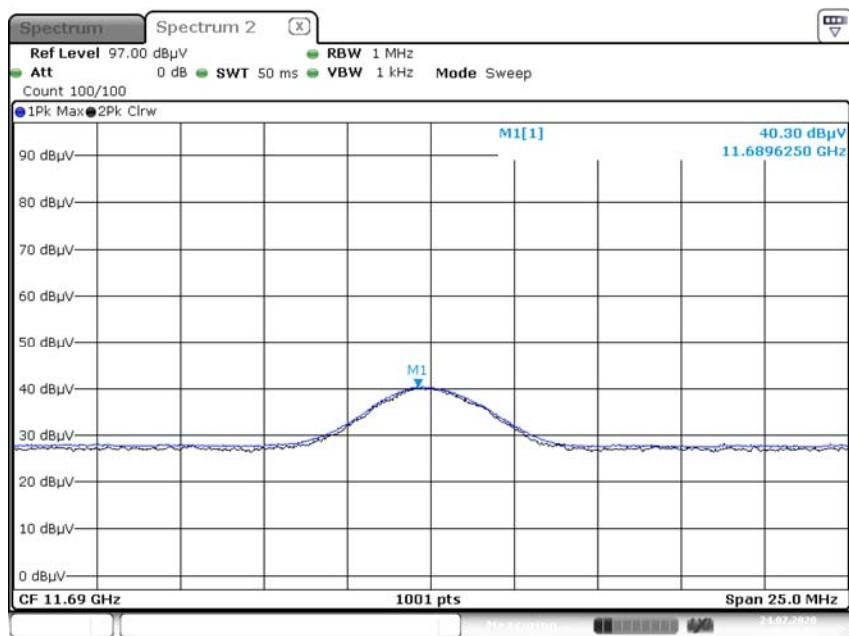


Date: 24 JUL 2020 10:00:58

## Peak Reading (UNII 3, High Ch. 2nd Harmonic, Z-H)

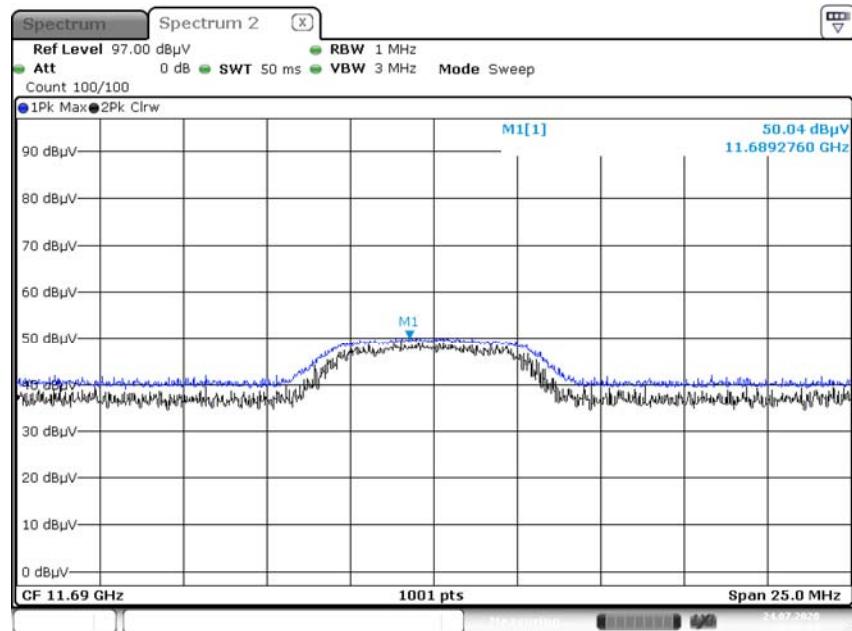


[ANT B]

## Peak Reading (UNII 1, High Ch. 2nd Harmonic, Z-H)

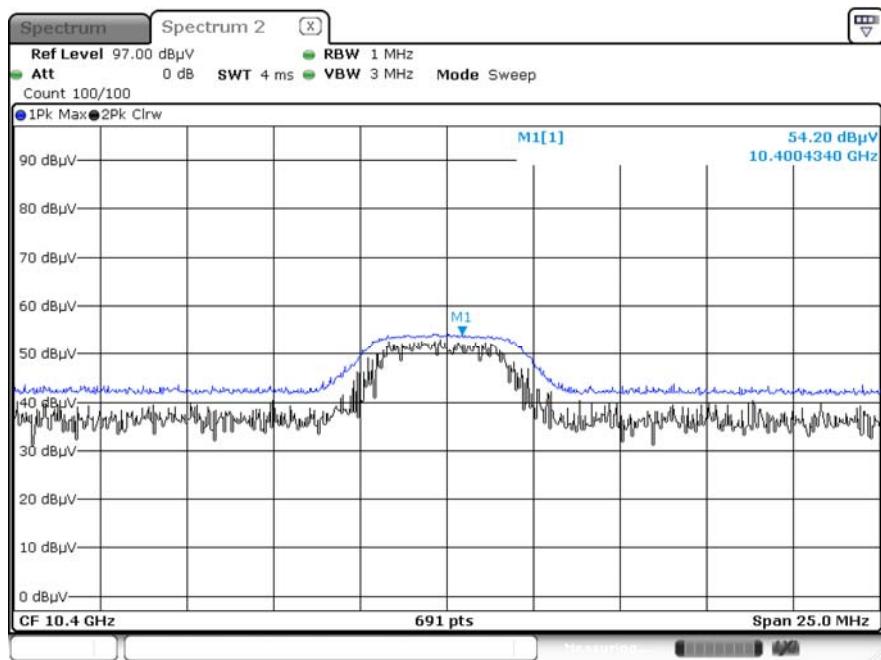


## Average Reading (UNII 3, High Ch. 2nd Harmonic, Z-H)

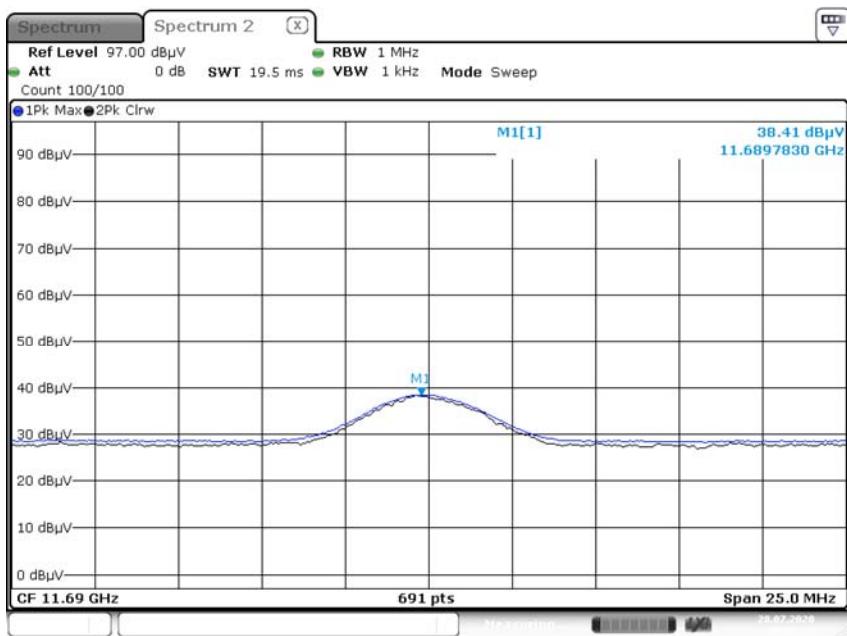

Date: 28 JUL 2020 10:01:31

## Peak Reading (UNII 3, High Ch. 3rd Harmonic, Z-H)

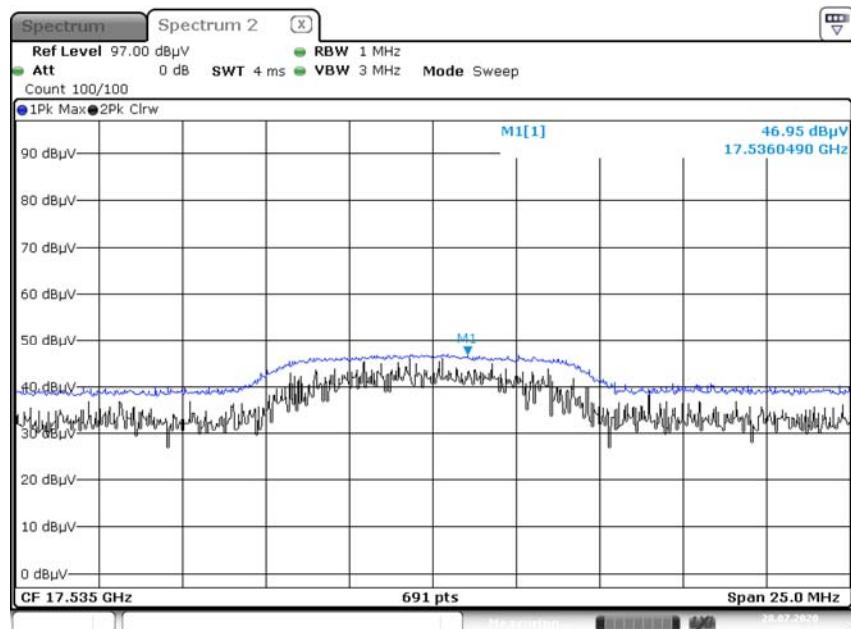Note:

Only the worst case plots for Radiated Spurious Emissions.

**9.8 RADIATED RESTRICTED BAND EDGE****[ANT A]**

Band :	UNII 1
Operating Frequency	5180 MHz
Channel No.	Low

Frequency [MHz]	Reading dBuV	AF+CL-AG+ATT+DF [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5150	52.76	8.02	H	60.78	73.98	13.20	PK
5150	42.05	8.02	H	50.07	53.98	3.91	AV
5150	53.82	8.02	V	61.84	73.98	12.14	PK
5150	42.93	8.02	V	50.95	53.98	3.03	AV

**[ANT B]**

Band :	UNII 1
Operating Frequency	5180 MHz
Channel No.	Low



Frequency [MHz]	Reading dBuV	AF+CL-AG+ATT+DF [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5150(5148)	50.84	8.02	H	58.86	73.98	15.12	PK
5150(5148)	42.70	8.02	H	50.72	53.98	3.26	AV
5149.5#	52.87	8.02	H	60.89	73.98	13.09	PK
5149.5#	42.76	8.02	H	50.78	53.98	3.20	AV
5148.5#	50.24	8.02	H	58.26	73.98	15.72	PK
5148.5#	39.83	8.02	H	47.85	53.98	6.13	AV



Note :

# integration method Used [ANSI C63.10 Section12.7.4.4.3 &amp; KDB 789033 D02 3)d)(ii)]



## □ Test Plots

[ANT A]

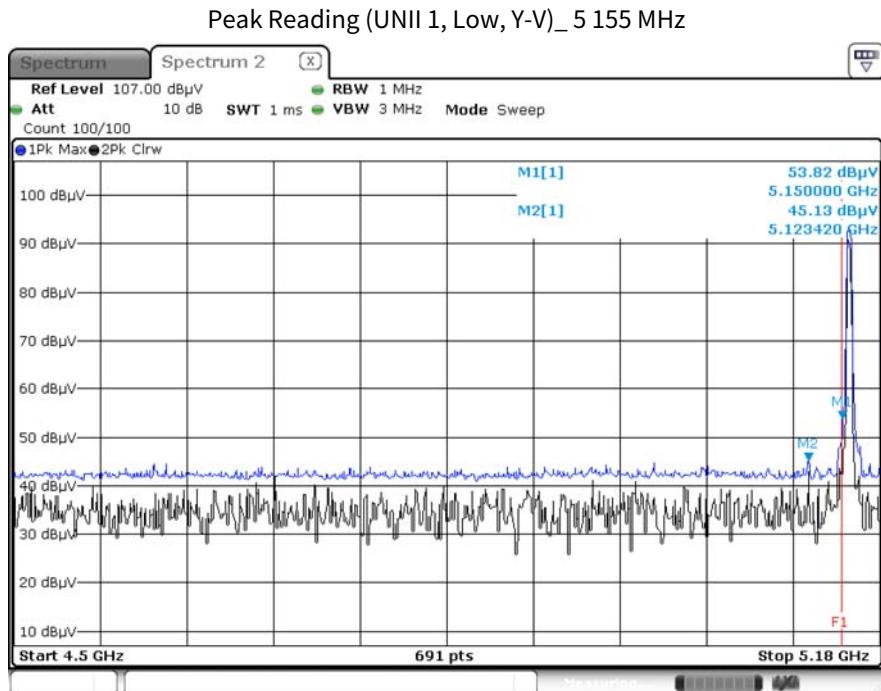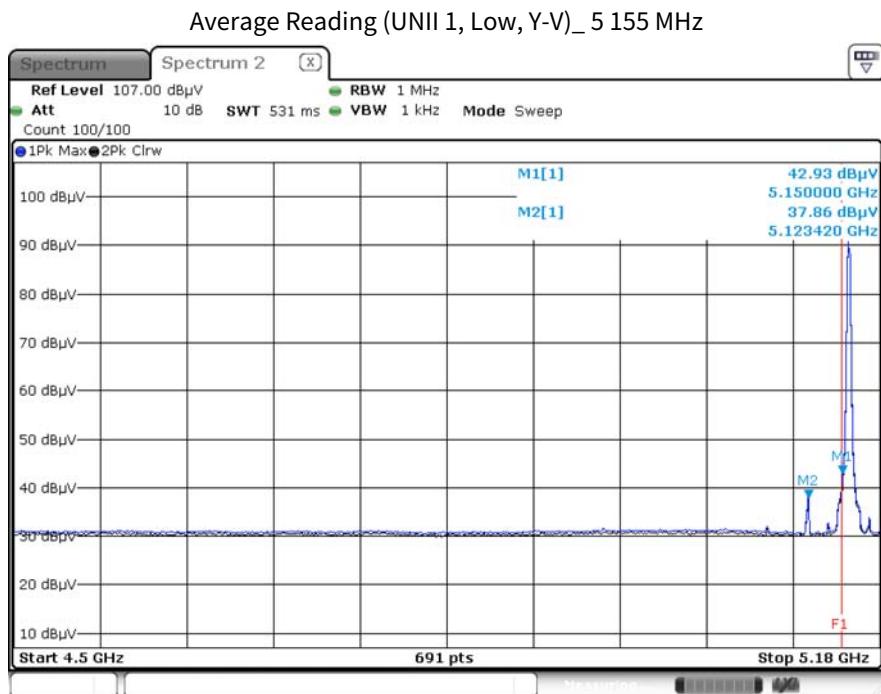


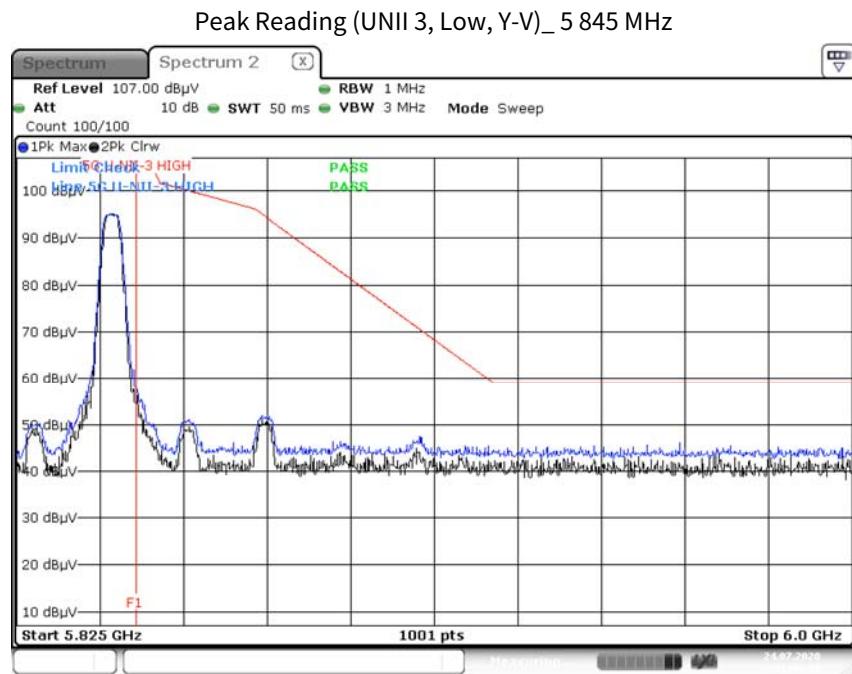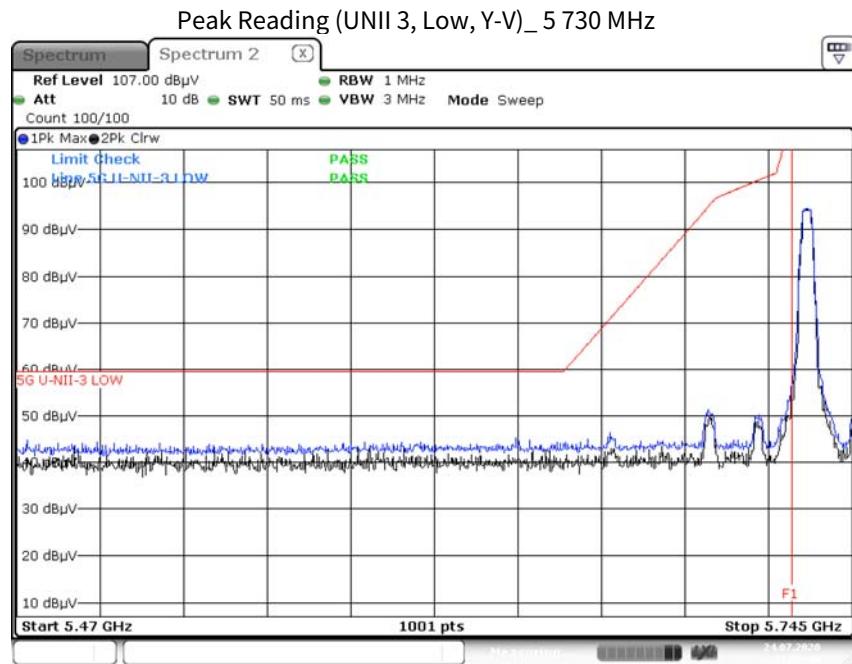


[ANT B]

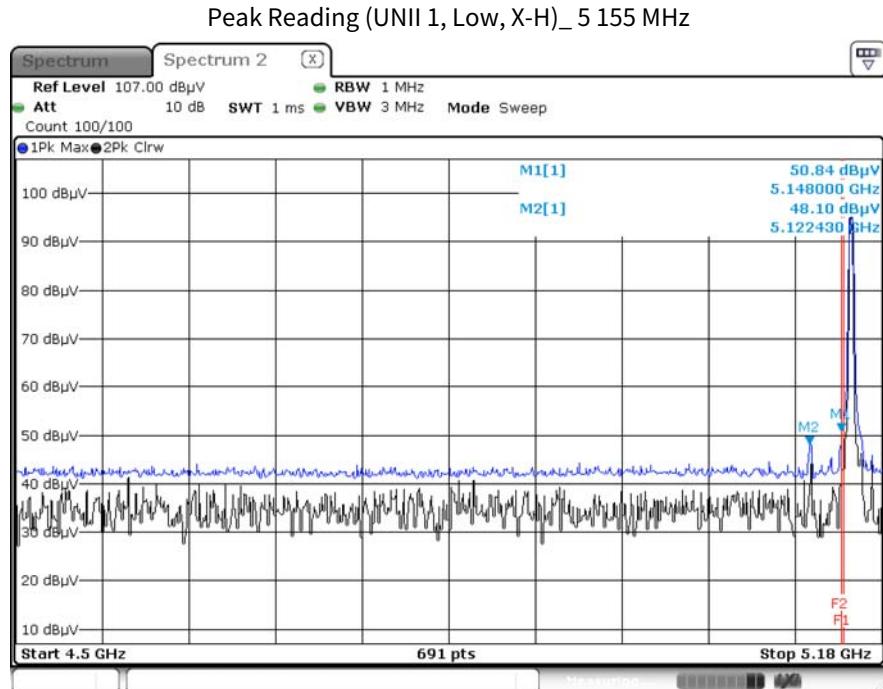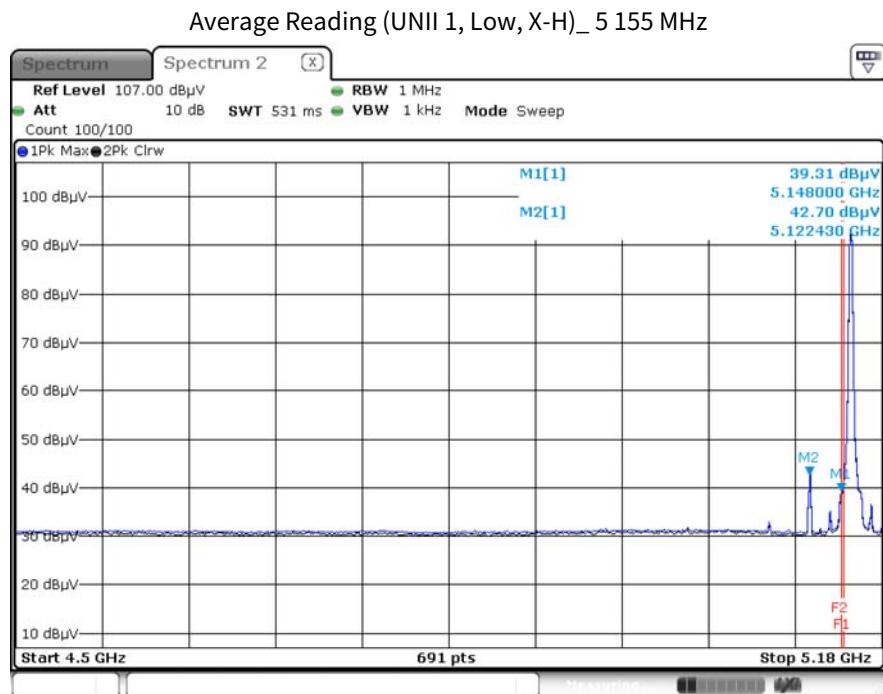


## Average Reading (UNII 1, Low, X-H, integration)\_ 5 148.5MHz

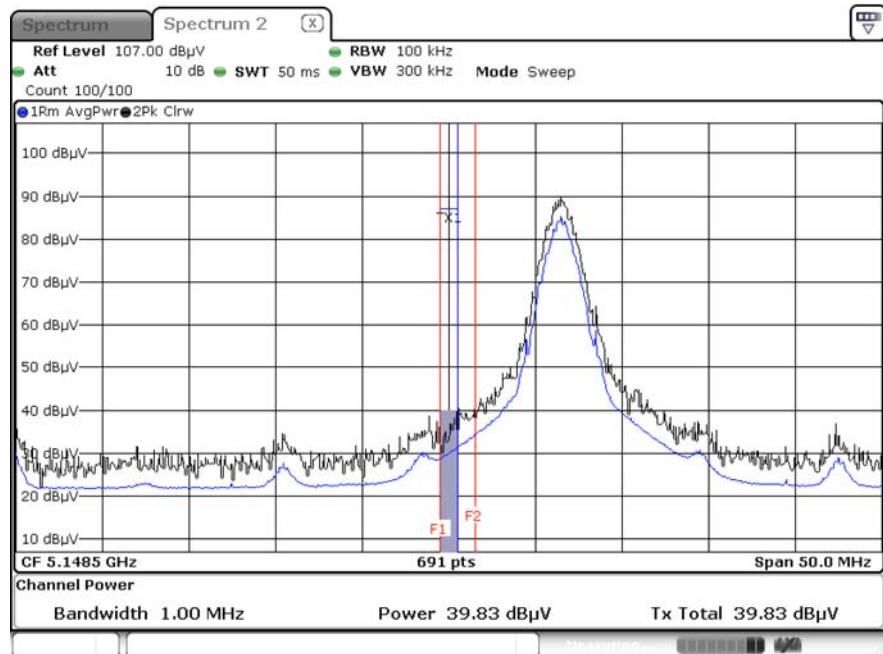


## Peak Reading (UNII 1, Low, X-H, integration)\_ 5 148.5MHz

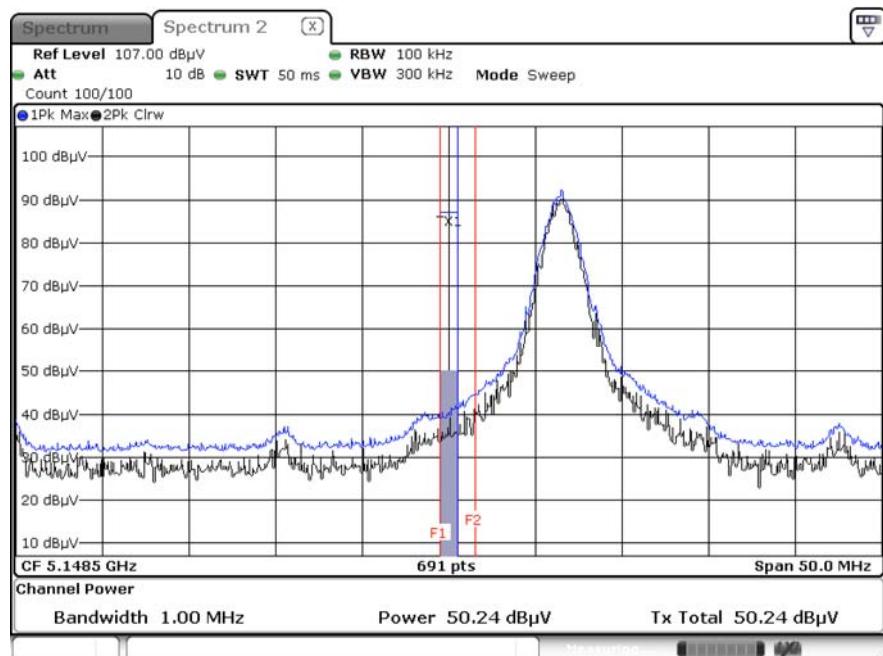


## Average Reading (UNII 1, Low, X-H, integration)\_ 5 149.5MHz

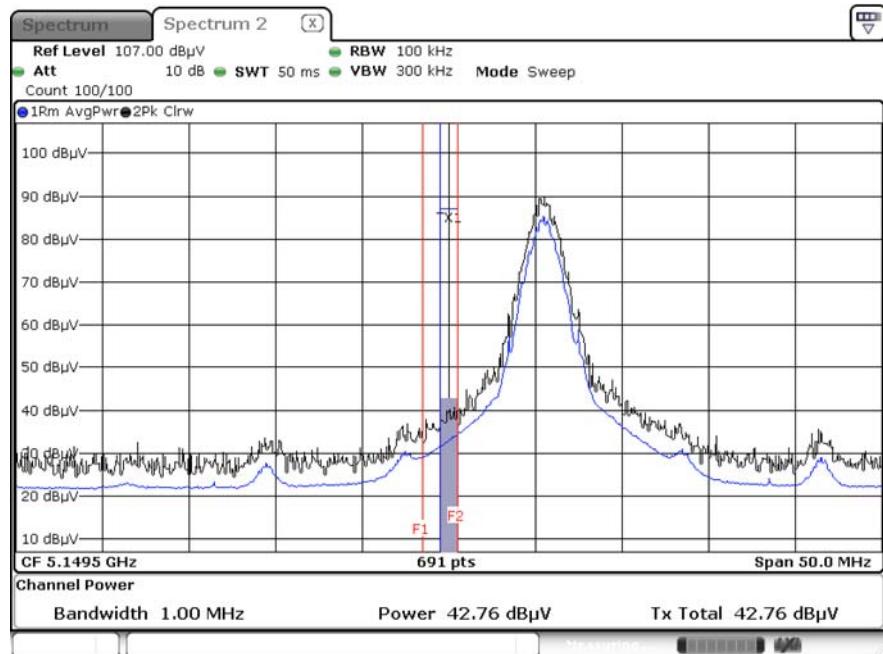

## Peak Reading (UNII 1, Low, X-H, integration)\_ 5 149.5MHz

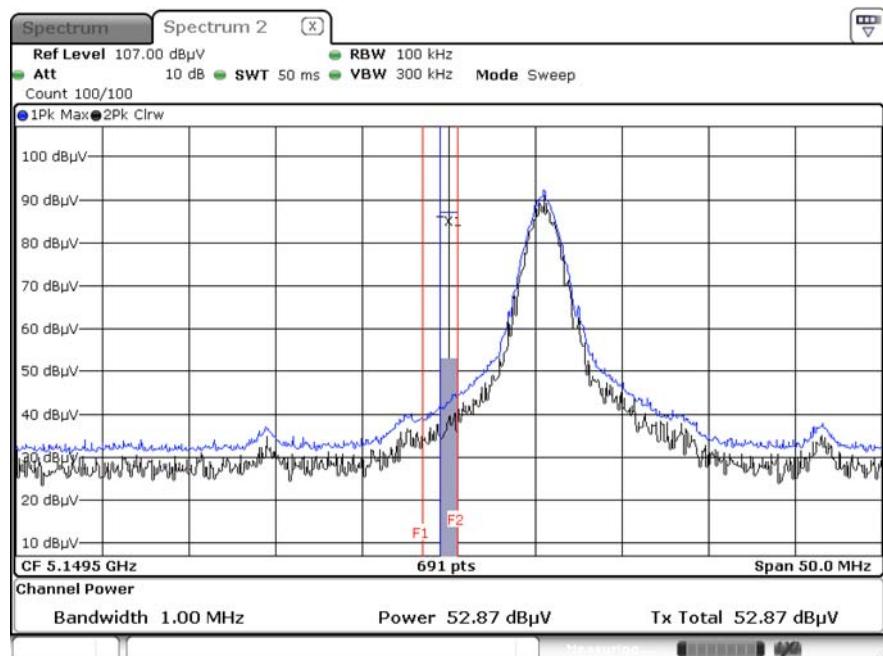


## Peak Reading (UNII 3, Low, X-H)\_5 730 MHz

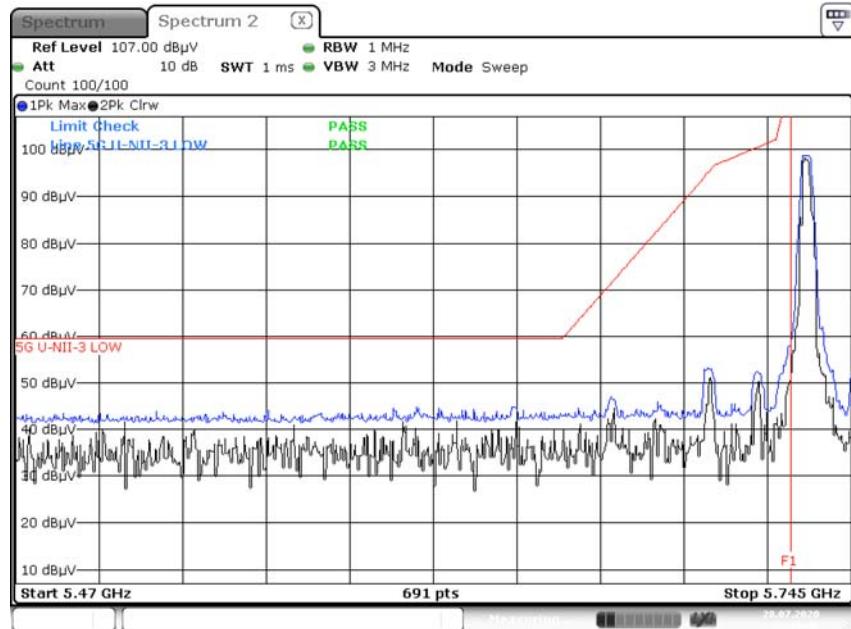

Date: 28 JUL. 2020 13:10:48

## Peak Reading (UNII 3, Low, X-H)\_5 845 MHz

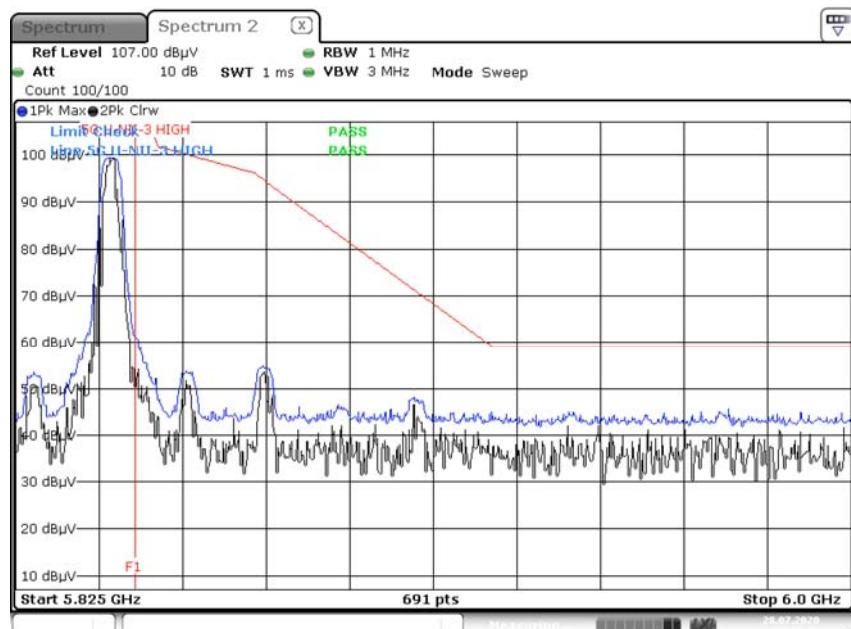

Date: 28 JUL. 2020 13:19:49

Note:

Only the worst case plots for Radiated Restricted Band Edge.

Note : (U-NII-3)

1. Only the worst case plots for U-NII-3 Out of Band e.i.r.p Emission.
2. U-NII-3 Low & High Band Edge RedLine is Final Test Limit about factor value compensation.

## 9.9 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

## 9.10 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

WLAN 5G MODE\_L1


1 / 2

## HCT TEST Report

### Common Information

EUT: WL1NB6V2  
 Manufacturer: LG Electronics  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN 5G MODE\_L1

FCC CLASS B\_Exten Cable

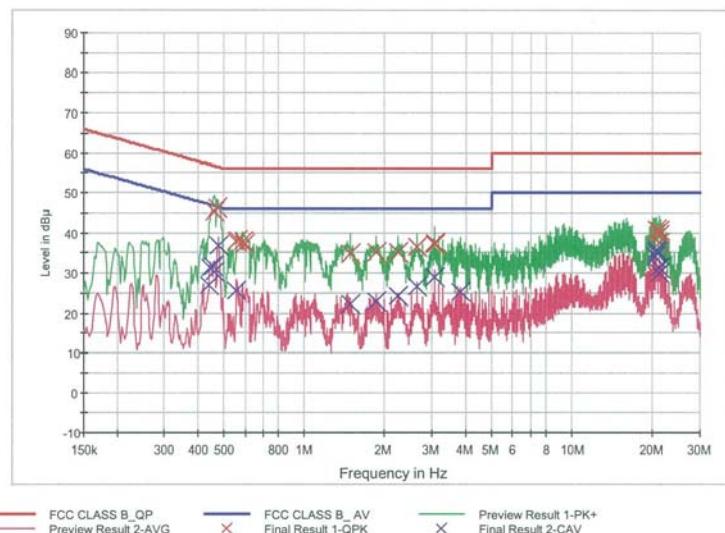

— FCC CLASS B\_OP  
 Preview Result 2-AVG      X Final Result 1-QPK  
 X Final Result 2-CAV

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.460000	45.4	9.000	Off	L1	9.8	11.3	56.7
0.474000	46.4	9.000	Off	L1	9.8	10.0	56.4
0.558000	37.9	9.000	Off	L1	9.8	18.1	56.0
0.562000	38.0	9.000	Off	L1	9.8	18.0	56.0
0.588000	37.8	9.000	Off	L1	9.8	18.2	56.0
0.594000	37.2	9.000	Off	L1	9.8	18.8	56.0
1.484000	34.6	9.000	Off	L1	9.9	21.4	56.0
1.848000	35.2	9.000	Off	L1	9.9	20.8	56.0
2.242000	35.1	9.000	Off	L1	9.9	20.9	56.0
2.640000	36.4	9.000	Off	L1	9.9	19.6	56.0
3.070000	37.5	9.000	Off	L1	9.9	18.5	56.0
3.074000	37.2	9.000	Off	L1	9.9	18.8	56.0
20.562000	40.8	9.000	Off	L1	10.5	19.2	60.0
20.602000	40.9	9.000	Off	L1	10.5	19.1	60.0
21.078000	40.4	9.000	Off	L1	10.6	19.6	60.0
21.122000	40.5	9.000	Off	L1	10.6	19.5	60.0
21.140000	37.5	9.000	Off	L1	10.6	22.5	60.0
21.180000	39.6	9.000	Off	L1	10.6	20.4	60.0

2020-08-06

오전 10:49:53

WLAN 5G MODE\_L1

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.440000	26.8	9.000	Off	L1	9.8	20.3	47.1
0.444000	31.3	9.000	Off	L1	9.8	15.7	47.0
0.456000	31.8	9.000	Off	L1	9.8	15.0	46.8
0.460000	30.3	9.000	Off	L1	9.8	16.3	46.7
0.478000	36.7	9.000	Off	L1	9.8	9.6	46.4
0.558000	25.5	9.000	Off	L1	9.8	20.5	46.0
1.484000	22.3	9.000	Off	L1	9.9	23.7	46.0
1.852000	23.0	9.000	Off	L1	9.9	23.0	46.0
2.242000	24.4	9.000	Off	L1	9.9	21.6	46.0
2.640000	26.8	9.000	Off	L1	9.9	19.2	46.0
3.074000	29.0	9.000	Off	L1	9.9	17.0	46.0
3.840000	25.1	9.000	Off	L1	10.0	20.9	46.0
20.478000	33.9	9.000	Off	L1	10.5	16.1	50.0
20.560000	35.9	9.000	Off	L1	10.5	14.1	50.0
20.600000	35.6	9.000	Off	L1	10.5	14.4	50.0
20.640000	35.0	9.000	Off	L1	10.5	15.0	50.0
21.062000	30.1	9.000	Off	L1	10.6	19.9	50.0
21.142000	31.2	9.000	Off	L1	10.6	18.8	50.0

2020-08-06

오전 10:49:53

## Conducted Emissions (Line 2)


WLAN 5G MODE\_N

1 / 2

**HCT TEST Report****Common Information**

EUT: WL1NB6V2  
 Manufacturer: LG Electronics  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN 5G MODE\_N

FCC CLASS B\_Exten Cable

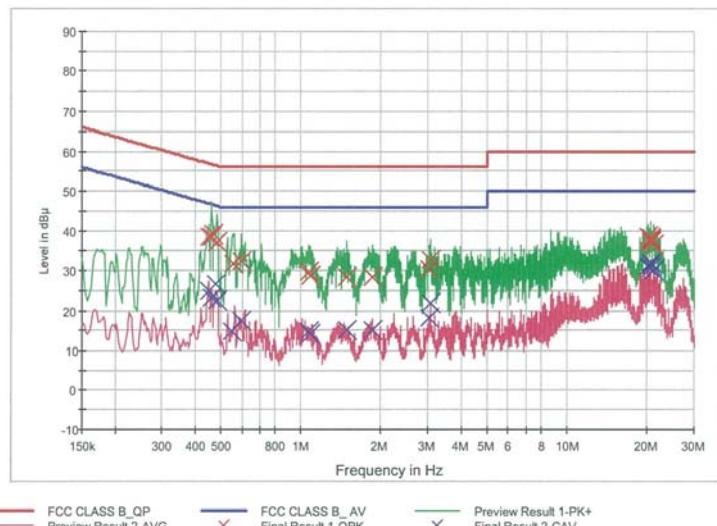**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.450000	38.5	9.000	Off	N	9.8	18.4	56.9
0.460000	38.4	9.000	Off	N	9.8	18.3	56.7
0.468000	39.3	9.000	Off	N	9.8	17.3	56.5
0.482000	37.0	9.000	Off	N	9.8	19.3	56.3
0.554000	31.5	9.000	Off	N	9.8	24.5	56.0
0.596000	32.3	9.000	Off	N	9.8	23.7	56.0
1.070000	29.6	9.000	Off	N	9.8	26.4	56.0
1.084000	28.5	9.000	Off	N	9.8	27.5	56.0
1.480000	28.3	9.000	Off	N	9.9	27.7	56.0
1.860000	28.3	9.000	Off	N	9.9	27.7	56.0
3.038000	30.2	9.000	Off	N	9.9	25.8	56.0
3.070000	32.8	9.000	Off	N	9.9	23.2	56.0
20.040000	38.3	9.000	Off	N	10.6	21.7	60.0
20.520000	37.0	9.000	Off	N	10.7	23.0	60.0
20.558000	37.6	9.000	Off	N	10.7	22.4	60.0
20.600000	38.1	9.000	Off	N	10.7	22.0	60.0
20.640000	37.8	9.000	Off	N	10.7	22.2	60.0
21.080000	36.5	9.000	Off	N	10.7	23.5	60.0

2020-08-06

오전 10:39:57

WLAN 5G MODE\_N

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.448000	25.0	9.000	Off	N	9.8	21.9	46.9
0.460000	23.1	9.000	Off	N	9.8	23.6	46.7
0.478000	26.5	9.000	Off	N	9.8	19.9	46.4
0.482000	22.5	9.000	Off	N	9.8	23.8	46.3
0.552000	14.7	9.000	Off	N	9.8	31.3	46.0
0.596000	17.3	9.000	Off	N	9.8	28.7	46.0
1.066000	14.9	9.000	Off	N	9.8	31.1	46.0
1.084000	14.0	9.000	Off	N	9.8	32.0	46.0
1.480000	15.2	9.000	Off	N	9.9	30.8	46.0
1.860000	14.9	9.000	Off	N	9.9	31.1	46.0
3.038000	18.2	9.000	Off	N	9.9	27.8	46.0
3.072000	21.9	9.000	Off	N	9.9	24.1	46.0
20.042000	31.1	9.000	Off	N	10.6	18.9	50.0
20.520000	31.2	9.000	Off	N	10.7	18.8	50.0
20.600000	32.0	9.000	Off	N	10.7	18.0	50.0
20.640000	31.4	9.000	Off	N	10.7	18.6	50.0
20.680000	30.5	9.000	Off	N	10.7	19.5	50.0
21.124000	30.1	9.000	Off	N	10.7	19.9	50.0

2020-08-06

오전 10:39:57

**10. LIST OF TEST EQUIPMENT**

## Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/10/2020	Annual	100584
ESPEC	SU-642 /Temperature Chamber	07/30/2020	Annual	0093000718
Agilent	N9030A / Signal Analyzer	07/15/2020	Annual	MY54490647
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Agilent	N1921A / Power Sensor	06/08/2020	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	02/14/2020	Annual	10545
HP	E3632A / DC Power Supply	09/27/2019	Annual	MY40004427
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	06/26/2020	Annual	07560
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	07/03/2020	Annual	08285
Rohde & Schwarz	18N-20dB / Attenuator(20 dB)	03/23/2020	Annual	8
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Schwarzbeck	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2019	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/29/2019	Biennial	BBHA9170342
Rohde & Schwarz	FSP(10 Hz ~ 40 GHz) / Spectrum Analyzer	05/13/2020	Annual	101055
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/18/2020	Annual	3000C000276
TNM system	FBSM-05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/21/2020	Annual	F6
TNM system	FBSM-05B / ATT(10dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / ATT(3dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / LNA1(1~18GHz)	01/21/2020	Annual	25540
TNM system	FBSM-05B / HPF(7~18GHz) + LNA2(6~18GHz)	01/21/2020	Annual	28550
TNM system	FBSM-05B / Thru(30MHz ~ 18GHz)	01/21/2020	Annual	None
Weinschel	2-3 / Attenuator (3 dB)	10/08/2019	Annual	BR0617
H+S	5910-N-50-010 / Attenuator(10 dB)	10/29/2019	Annual	None

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## **11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2008-FI011-P