

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1809-0235
2. Customer
 - Name (FCC) : LG Electronics USA / Name (IC) : LG ELECTRONICS INC.
 - Address (FCC) : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States 07632
 - Address (IC) : 222, LG-ro, Jinwi-myeon Pyeongtaek-si, Gyeonggi-do 451-713 Korea (Republic Of)
3. Use of Report : FCC & IC Original Grant
4. Product Name / Model Name : Flat Panel Digital X-ray Detector / 14HK701G
FCC ID : BEJ14HK701G / IC : 2703H-14HK701G
5. Test Method Used : KDB558074 D01v04
Test Specification : FCC Part 15.247
RSS-247 Issue 2 (2017-02), RSS-GEN Issue 5 (2018-04)
6. Date of Test : 2018.05.01 ~ 2018.05.11
7. Testing Environment : See appended test report.
8. Test Result : Refer to the attached test result.

Affirmation	Tested by	Reviewed by
	Name : SunGeun Lee  (Signature)	Name : Geunki Son  (Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2018 . 09 . 21 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRTFCC1809-0235	Sep. 21, 2018	Initial issue

Table of Contents

1. EUT DESCRIPTION	4
2. INFORMATION ABOUT TESTING	5
2.1 Test mode.....	5
2.2 Auxiliary equipment	5
2.3 Tested environment	6
2.4 EMI suppression Device(s) / Modifications	6
2.5 Measurement Uncertainty.....	6
3. SUMMARY OF TESTS	7
4. TEST METHODOLOGY	8
4.1 EUT configuration	8
4.2 EUT exercise	8
4.3 General test procedures	8
4.4 Description of test modes	8
5. INSTRUMENT CALIBRATION	9
6. FACILITIES AND ACCREDITATIONS.....	9
6.1 Facilities	9
6.2 Equipment	9
7. ANTENNA REQUIREMENTS.....	9
8. TEST RESULT	10
8.1 6dB bandwidth.....	10
8.2 Maximum peak conducted output power.....	11
8.3 Maximum power spectral density	15
8.4 Out of band emissions at the band edge / conducted spurious emissions.....	16
8.5 Radiated spurious emissions.....	17
8.6 Power-line conducted emissions	23
9. LIST OF TEST EQUIPMENT.....	26
APPENDIX I	27

1. EUT DESCRIPTION

FCC Equipment Class	Digital Transmission System(DTS)
Product	Flat Panel Digital X-ray Detector
Model Name	14HK701G
Add Model Name	-
Power Supply	DC 7.5 V
Frequency Range	▪ 802.11b/g/n(20 MHz) : 2412 MHz ~ 2462 MHz
Max. RF Output Power	2.4GHz Band ▪ 802.11b : 19.61 dBm ▪ 802.11g : 23.89 dBm ▪ 802.11n (HT20) : 23.72 dBm
Modulation Type	▪ 802.11b: CCK, DSSS ▪ 802.11g/n: OFDM
Antenna Specification	Antenna type: FPCB Wireless Antenna Antenna gain: Refer to the clause 7 in test report.

Transmitting configuration of EUT

Mode	SISO		MIMO(CDD)	MIMO(SDM)
	Ant 1	Ant 2	Ant 1 & 2	Ant 1 & 2
	Data rate			
802.11b	1~11 Mbps	1~11 Mbps	-	-
802.11g	6~54 Mbps	6~54 Mbps	6~54 Mbps	-
802.11n(HT20)	MCS 0 ~ 7	MCS 0 ~ 7	-	MCS 8 ~ 15

Note1: SDM = Spatial Diversity Multiplexing, CDD = Cycle Delay Diversity

2. INFORMATION ABOUT TESTING

2.1 Test mode

Test mode	Worst case data rate	Tested Frequency(MHz)		
		Lowest	Middle	Highest
TM 1	802.11b 1 Mbps (Single transmitting)	2412	2437	2462
TM 2	802.11g 6 Mbps (CDD Multiple transmitting)	2412	2437	2462
TM 3	802.11n(HT20) MCS 8 (SDM Multiple transmitting)	2412	2437	2462

Note 1: The worst case data rate is determined as above test mode according to the power measurements.

Also radiated spurious emission was performed at lowest data rate.

Note 2: In case of radiated test, we have done all tx case. We attached the result of Ant 1 (Worst case) for 802.11b SISO mode. And in case of 802.11g/n mode, we attached the result of only MIMO mode (Worst case).

Note 3: The power measurement results for all modes and data rate were reported.

2.2 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
Control Box	LG Control Box	-	LG	-
-	-	-	-	-

2.3 Tested environment

Temperature	: 23 ~ 27 °C
Relative humidity content	: 43 ~ 47 %
Details of power supply	: DC 7.5 V

2.4 EMI suppression Device(s) / Modifications

EMI suppression device(s) added and/or modifications made during testing
 → None

2.5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014 and ANSI C 63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Test items	Measurement uncertainty
Transmitter Output Power	0.7 dB (The confidence level is about 95 %, $k = 2$)
Conducted spurious emission	1.0 dB (The confidence level is about 95 %, $k = 2$)
AC conducted emission	2.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (1 GHz Below)	5.1 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (1 GHz ~ 18 GHz)	5.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (18 GHz Above)	5.3 dB (The confidence level is about 95 %, $k = 2$)

3. SUMMARY OF TESTS

FCC Part Section(s)	RSS Section(s)	Parameter	Limit	Test Condition	Status Note 1
15.247(a)	RSS-247(5.2)	6 dB Bandwidth	> 500 kHz	Conducted	NT Note 4
15.247(b)	RSS-247(5.4)	Transmitter Output Power	< 1 Watt		C
15.247(d)	RSS-247(5.5)	Out of Band Emissions / Band Edge	20 dBc in any 100 kHz BW		NT Note 4
15.247(e)	RSS-247(5.2)	Transmitter Power Spectral Density	< 8 dBm/3 kHz		NT Note 4
-	RSS-Gen(6.7)	RSS-Gen (6.7)	Occupied Bandwidth (99 %)		NT Note 4
15.247(d) 15.205 15.209	RSS-247(5.5) RSS-Gen(8.9) RSS-Gen(8.10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	FCC 15.209 limits	Radiated	C Note 3
15.207	RSS-Gen(8.8)	AC Line Conducted Emissions	FCC 15.207 limits	AC Line Conducted	C
15.203	-	Antenna Requirements	FCC 15.203	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.

Note 3: This test item was performed in each axis and the worst case data was reported.

Note 4: Please refer to original test report.

(Report number: DRTFCC1607-0103)

**The sample was tested according to the following specification;
KDB558074 D01v04, KDB662911 D01v02r01**

4. TEST METHODOLOGY

The measurement procedures described in the ANSI C63.10-2013 and the guidance provided in KDB558074 D01v04 were used in measurement of the EUT.

The EUT was tested per the guidance of KDB558074 D01v04. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

4.1 EUT configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT exercise

The EUT was operated in the test mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

4.3 General test procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB558074 D01v04.

So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector

Radiated Emissions

Basically the radiated tests were performed with KDB558074 D01v04. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10 as stated on section 12.1 of the KDB558074 D01V04.

The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axes.

4.4 Description of test modes

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics. A test program is used to control the EUT for staying in continuous transmitting mode.

5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6. FACILITIES AND ACCREDITATIONS

6.1 Facilities

DT&C Co., Ltd.	
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014.	
- FCC MRA Accredited Test Firm No. : KR0034 - IC Test site No. : 5740A-4	
www.dtnc.net	
Telephone	: + 82-31-321-2664
FAX	: + 82-31-321-1664

6.2 Equipment

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, loop, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7. ANTENNA REQUIREMENTS

7.1 According to FCC 47 CFR §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The EUT used unique antenna connector.

Therefore this E.U.T Complies with the requirement of §15.203

7.2 Directional antenna gain:

Bands	SISO		MIMO (CDD) ^{Note 1.}	MIMO (SDM) ^{Note 2}
	ANT 1 [dBi]	ANT 2 [dBi]	Directional Gain [dBi]	Directional Gain [dBi]
2.4 GHz	1.70	2.55	5.15	2.15

Note 1. Directional gain (Correlated signal with unequal antenna gain and equal transmit power)

$$10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] \text{ dBi}$$

Note 2. Directional gain (Completely uncorrelated signal with unequal antenna gain and equal transmit power)

$$10 \log [(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}] \text{ dBi}$$

8. TEST RESULT

8.1 6dB bandwidth

■ Test Requirements and limit, §15.247(a)

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

■ Test Configuration:

- Not Tested

■ Test Procedure:

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB558074**

D01V04

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
(RBW : 100 kHz / VBW : 300 kHz)
3. Detector = **Peak**.
4. Trace mode = **Max hold**.
5. Sweep = **Auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

■ Test Results:


- Not Tested

8.2 Maximum peak conducted output power

■ Test Requirements and limit, §15.247(b)

The maximum permissible conducted output power is **1 Watt**.

■ Test Configuration

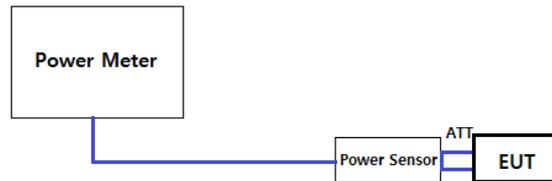

■ Test Procedure

1. PKPM1 Peak power meter method of KDB558074 D01V04

The maximum conducted output powers were measured using a broadband peak RF power meter which has greater video bandwidth than DUT's DTS bandwidth and utilize a fast-responding diode detector.

2. Method AVGPM-G (Measurement using a gated RF average power meter) of KDB558074 D01V04

The average conducted output powers were measured using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

Note: The measure-and-sum technique is used for test mode with multiple transmitting.

■ Test Results: **Comply**

▪ Single transmitting

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for 802.11b							
			Data Rate [Mbps]							
			1	2	5.5	11	-	-	-	-
ANT 1	2412	PK	19.23	19.09	19.03	19.19	-	-	-	-
		AV	16.31	16.18	16.24	16.20	-	-	-	-
	2437	PK	18.42	18.24	18.32	18.39	-	-	-	-
		AV	15.27	15.11	15.15	15.13	-	-	-	-
	2462	PK	19.61	19.51	19.44	19.55	-	-	-	-
		AV	16.37	16.13	16.30	16.27	-	-	-	-
ANT 2	2412	PK	18.76	18.69	18.56	18.74	-	-	-	-
		AV	15.63	15.61	15.50	15.44	-	-	-	-
	2437	PK	17.82	17.57	17.67	17.55	-	-	-	-
		AV	14.54	14.49	14.38	14.29	-	-	-	-
	2462	PK	18.44	18.21	18.37	18.22	-	-	-	-
		AV	15.28	15.18	15.18	15.07	-	-	-	-

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for 802.11g							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
ANT 1	2412	PK	18.29	18.12	18.15	18.03	18.10	18.16	18.14	18.14
		AV	11.63	11.45	11.61	11.61	11.48	11.48	11.54	11.45
	2437	PK	21.24	21.14	21.14	21.05	21.01	21.22	21.18	21.11
		AV	14.47	14.40	14.38	14.42	14.41	14.40	14.23	14.29
	2462	PK	18.32	18.05	18.08	18.07	18.25	18.18	18.05	18.21
		AV	11.64	11.62	11.63	11.53	11.45	11.53	11.59	11.48
ANT 2	2412	PK	17.95	17.94	17.80	17.75	17.89	17.83	17.72	17.70
		AV	11.21	11.06	11.07	11.00	11.13	11.15	11.13	11.07
	2437	PK	20.48	20.29	20.20	20.29	20.21	20.20	20.18	20.24
		AV	13.88	13.77	13.85	13.81	13.73	13.86	13.81	13.85
	2462	PK	18.00	17.81	17.72	17.78	17.98	17.93	17.78	17.76
		AV	11.29	11.12	11.13	11.18	11.20	11.15	11.11	11.12

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11n(HT20)</u>							
			Data Rate [MCS]							
			0	1	2	3	4	5	6	7
ANT 1	2412	PK	17.25	17.17	17.06	17.19	17.10	17.09	17.23	17.20
		AV	10.44	10.36	10.34	10.43	10.35	10.42	10.38	10.38
	2437	PK	20.95	20.80	20.89	20.82	20.92	20.89	20.93	20.88
		AV	14.38	14.13	14.36	14.22	14.29	14.07	14.36	14.12
	2462	PK	17.61	17.57	17.53	17.42	17.59	17.39	17.38	17.58
		AV	10.43	10.40	10.36	10.23	10.26	10.33	10.42	10.23
ANT 2	2412	PK	17.14	17.04	16.90	16.91	17.07	16.83	16.86	17.05
		AV	10.26	10.25	10.24	10.09	10.15	10.04	10.11	10.25
	2437	PK	20.56	20.38	20.52	20.28	20.27	20.47	20.39	20.41
		AV	13.78	13.77	13.62	13.60	13.75	13.57	13.77	13.58
	2462	PK	16.95	16.89	16.84	16.84	16.78	16.92	16.92	16.85
		AV	10.10	9.82	9.86	9.86	10.03	9.91	10.05	9.92

Multiple transmitting CDD

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11g</u>							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
ANT 1	2412	PK	18.29	18.12	18.15	18.03	18.10	18.16	18.14	18.14
		AV	11.63	11.45	11.61	11.61	11.48	11.48	11.54	11.45
	2437	PK	21.24	21.14	21.14	21.05	21.01	21.22	21.18	21.11
		AV	14.47	14.40	14.38	14.42	14.41	14.40	14.23	14.29
	2462	PK	18.32	18.05	18.08	18.07	18.25	18.18	18.05	18.21
		AV	11.64	11.62	11.63	11.53	11.45	11.53	11.59	11.48
ANT 2	2412	PK	17.95	17.94	17.80	17.75	17.89	17.83	17.72	17.70
		AV	11.21	11.06	11.07	11.00	11.13	11.15	11.13	11.07
	2437	PK	20.48	20.29	20.20	20.29	20.21	20.20	20.18	20.24
		AV	13.88	13.77	13.85	13.81	13.73	13.86	13.81	13.85
	2462	PK	18.00	17.81	17.72	17.78	17.98	17.93	17.78	17.76
		AV	11.29	11.12	11.13	11.18	11.20	11.15	11.11	11.12
Sum (ANT 1+2)	2412	PK	21.13	21.04	20.99	20.90	21.01	21.01	20.95	20.94
	2437	PK	23.89	23.75	23.71	23.70	23.64	23.75	23.72	23.71
	2462	PK	21.17	20.94	20.92	20.94	21.13	21.07	20.93	21.00

Multiple transmitting SDM

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11n(HT20)</u>							
			Data Rate [MCS]							
			8	9	10	11	12	13	14	15
ANT 1	2412	PK	17.34	17.10	17.30	17.28	17.18	17.25	17.22	17.12
		AV	10.49	10.32	10.23	10.25	10.37	10.42	10.38	10.34
	2437	PK	20.97	20.95	20.96	20.95	20.78	20.81	20.87	20.86
		AV	14.36	14.18	14.31	14.26	14.32	14.27	14.25	14.24
	2462	PK	17.59	17.40	17.58	17.55	17.56	17.54	17.39	17.49
		AV	10.48	10.30	10.31	10.35	10.37	10.46	10.42	10.43
ANT 2	2412	PK	17.01	16.78	16.75	16.93	16.94	16.95	16.80	16.93
		AV	10.32	10.25	10.11	10.10	10.09	10.11	10.31	10.13
	2437	PK	20.42	20.23	20.24	20.22	20.25	20.31	20.21	20.17
		AV	13.80	13.77	13.66	13.76	13.68	13.65	13.78	13.72
	2462	PK	16.95	16.94	16.84	16.94	16.92	16.92	16.78	16.93
		AV	10.07	10.00	9.97	9.97	9.85	9.95	10.06	9.98
Sum (ANT 1+2)	2412	PK	20.19	19.95	20.05	20.12	20.07	20.11	20.03	20.04
	2437	PK	23.72	23.62	23.63	23.61	23.53	23.58	23.56	23.54
	2462	PK	20.29	20.19	20.24	20.27	20.26	20.25	20.11	20.23

8.3 Maximum power spectral density

■ Test requirements and limit, §15.247(e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Test Configuration:

- Not Tested

■ Test Procedure

Method PKPSD of KDB558074 D01V04 is used.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW to : **3 kHz ≤ RBW ≤ 100 kHz**
4. Set the VBW ≥ **3 x RBW**
5. Detector = **Peak**
6. Sweep time = **Auto couple**
7. Trace mode = **Max hold.**
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

■ Test Results:

- Not Tested

8.4 Out of band emissions at the band edge / conducted spurious emissions

■ Test requirements and limit, §15.247(d)

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If **the peak output power procedure** is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated **by at least 20 dB** relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in band average PSD level.

In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

■ Test Configuration:

- Not Tested

■ Test Procedure

The transmitter output is connected to a spectrum analyzer.

- Measurement Procedure 1 – Reference Level of KDB558074 D01v04

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = **100 kHz**.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = **Peak**.
6. Sweep time = **Auto couple**.
7. Trace mode = **Max hold**.
8. **Allow trace to fully stabilize.**
9. Use the peak marker function to determine the maximum PSD level.

- Measurement Procedure 2 - Unwanted Emissions of KDB558074 D01v04

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = **100 kHz. (Actual 1 MHz, See below note)**
3. Set the VBW $\geq 3 \times$ RBW. **(Actual 3 MHz, See below note)**
4. Detector = **Peak**.
5. Ensure that the number of measurement points \geq Span / RBW.
6. Sweep time = **Auto couple**.
7. Trace mode = **Max hold**.
8. **Allow the trace to stabilize.** (this may take some time, depending on the extent of the span)
9. Use the peak marker function to determine the maximum amplitude level.

Note : The conducted spurious emission was tested with below settings.

Frequency range: 9 kHz ~ 30 MHz

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

Frequency range: 30 MHz ~ 10 GHz, 10 GHz ~25 GHz

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

8.5 Radiated spurious emissions

■ Test Requirements and limit, §15.247(d), §15.205, §15.209

In any 100 kHz bandwidth outside the operating frequency band, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 KHz bandwidth within the band. In case the emission fall within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed.

▪ FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

▪ FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	608 ~ 614	3345.8 ~ 3358		
		960 ~ 1240	3600 ~ 4400		

▪ **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

■ Test Configuration

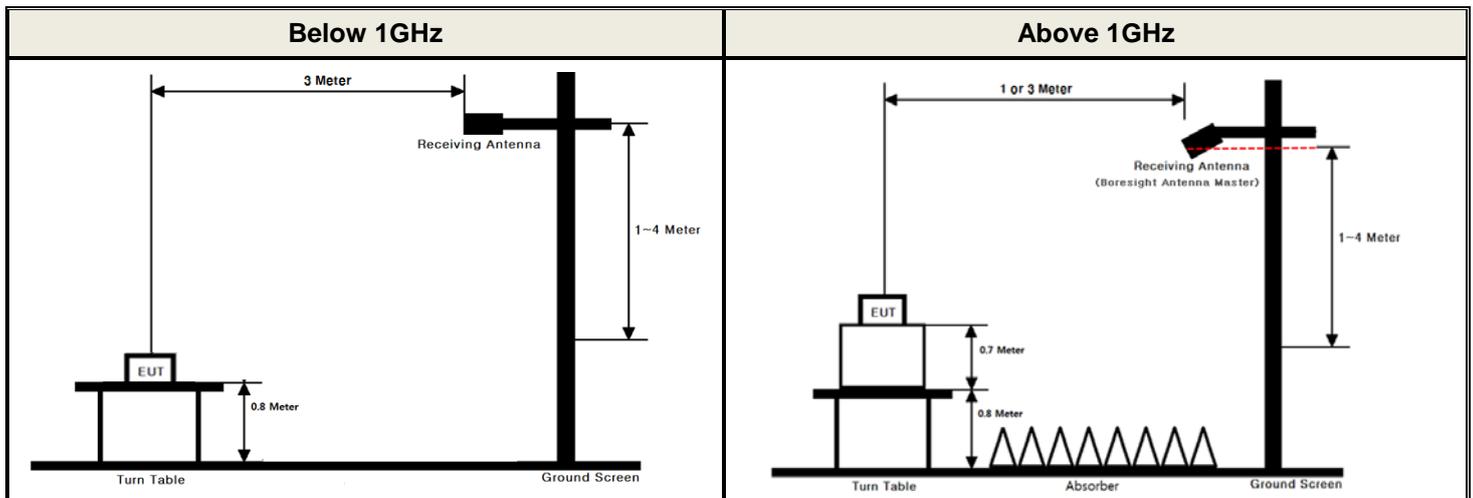

■ Test Procedure

1. The EUT is placed on a non-conductive table, emission measurements at below 1 GHz, the table height is 80 cm and above 1 GHz, the table height is 1.5 m.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 1 or 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

■ Measurement Instrument Setting for Radiated Emission Measurements.

The radiated emission was tested according to the section 6.3, 6.4, 6.5 and 6.6 of the ANSI C63.10-2013 with following settings.

Peak Measurement

RBW = As specified in below table, VBW $\geq 3 \times$ RBW, Sweep = Auto, Detector = Peak, Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

Average Measurement:

1. RBW = 1 MHz (unless otherwise specified).
2. VBW $\geq 3 \times$ RBW.
3. Detector = RMS (Number of points $\geq 2 \times$ Span / RBW)
4. Averaging type = power. (i.e., RMS)
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.
7. A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step 4, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step 4, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Duty Cycle Correction factor

Test Mode	Date rate	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
TM 1	1 Mbps	95.02	0.23
TM 2	6 Mbps	95.39	0.21
TM 3	MCS 8	90.78	0.42

Note: Please refer to the test report of the granted module.

■ Test Results: **Comply**

Please refer to next page for data table and the appendix I for worst data plots.

Radiated Spurious Emissions data(9 kHz ~ 25 GHz) : TM 1

Tested Frequency	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Lowest	2386.53	H	Z	PK	60.85	-3.71	N/A	N/A	57.14	74.00	16.86
	2387.21	H	Z	AV	53.80	-3.71	0.23	N/A	50.32	54.00	3.68
	4824.22	V	Y	PK	47.06	2.84	N/A	N/A	49.90	74.00	24.10
	4824.03	V	Y	AV	39.72	2.84	0.23	N/A	42.79	54.00	11.21
	7235.05	H	Z	PK	49.63	7.73	N/A	N/A	57.36	74.00	16.64
	7235.30	H	Z	AV	41.07	7.73	0.23	N/A	49.03	54.00	4.97
Middle	4873.94	V	Y	PK	45.46	2.96	N/A	N/A	48.42	74.00	25.58
	4874.04	V	Y	AV	37.69	2.96	0.23	N/A	40.88	54.00	13.12
	7311.00	H	Z	PK	48.88	7.92	N/A	N/A	56.80	74.00	17.20
	7311.03	H	Z	AV	39.30	7.92	0.23	N/A	47.45	54.00	6.55
Highest	2486.95	H	Z	PK	57.08	-3.65	N/A	N/A	53.43	74.00	20.57
	2486.78	H	Z	AV	47.74	-3.65	0.23	N/A	44.32	54.00	9.68
	4923.97	V	Y	PK	50.80	3.03	N/A	N/A	53.83	74.00	20.17
	4923.94	V	Y	AV	46.24	3.03	0.23	N/A	49.50	54.00	4.50
	7385.87	H	Z	PK	49.31	7.97	N/A	N/A	57.28	74.00	16.72
	7386.03	H	Z	AV	42.23	7.97	0.23	N/A	50.43	54.00	3.57

Note.

- The radiated emissions were investigated up to 25GHz. And no other spurious and harmonic emissions were found above listed frequencies.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
 For finding emissions, the test distance might be reduced from 3 m to 1 m.
 In this case, the distance factor (-9.54 dB) is applied to the result.
 - Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
 When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Radiated Spurious Emissions data(9 kHz ~ 25 GHz) : TM 2

Tested Frequency	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Lowest	2389.91	H	Z	PK	59.12	-3.71	N/A	N/A	55.41	74.00	18.59
	2389.84	H	Z	AV	45.80	-3.71	0.21	N/A	42.30	54.00	11.70
	7235.88	H	Z	PK	46.58	7.73	N/A	N/A	54.31	74.00	19.69
	7236.00	H	Z	AV	40.17	7.73	0.21	N/A	48.11	54.00	5.89
Middle	7310.87	H	Z	PK	48.03	7.92	N/A	N/A	55.95	74.00	18.05
	7311.14	H	Z	AV	40.64	7.92	0.21	N/A	48.77	54.00	5.23
Highest	2483.58	H	Z	PK	60.61	-3.65	N/A	N/A	56.96	74.00	17.04
	2483.59	H	Z	AV	45.62	-3.65	0.21	N/A	42.18	54.00	11.82
	7385.61	H	Z	PK	48.05	7.97	N/A	N/A	56.02	74.00	17.98
	7386.01	H	Z	AV	40.67	7.97	0.21	N/A	48.85	54.00	5.15

Note.

- The radiated emissions were investigated up to 25GHz. And no other spurious and harmonic emissions were found above listed frequencies.
- Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
 For finding emissions, the test distance might be reduced from 3 m to 1 m.
 In this case, the distance factor (-9.54 dB) is applied to the result.
 - Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
 When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

Radiated Spurious Emissions data(9 kHz ~ 25 GHz) : TM 3

Tested Frequency	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Lowest	2389.54	V	X	PK	59.00	-3.71	N/A	N/A	55.29	74.00	18.71
	2389.90	V	X	AV	43.46	-3.71	0.42	N/A	40.17	54.00	13.83
	7235.91	H	Z	PK	46.81	7.73	N/A	N/A	54.54	74.00	19.46
	7236.00	H	Z	AV	40.13	7.73	0.42	N/A	48.28	54.00	5.72
Middle	7311.40	H	Z	PK	46.66	7.92	N/A	N/A	54.58	74.00	19.42
	7310.93	H	Z	AV	39.82	7.92	0.42	N/A	48.16	54.00	5.84
Highest	2483.84	V	X	PK	60.47	-3.65	N/A	N/A	56.82	74.00	17.18
	2483.58	V	X	AV	43.85	-3.65	0.42	N/A	40.62	54.00	13.38
	7385.98	H	Z	PK	46.65	7.97	N/A	N/A	54.62	74.00	19.38
	7385.97	H	Z	AV	40.59	7.97	0.42	N/A	48.98	54.00	5.02

Note.

- The radiated emissions were investigated up to 25GHz. And no other spurious and harmonic emissions were found above listed frequencies.
- Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
 For finding emissions, the test distance might be reduced from 3 m to 1 m.
 In this case, the distance factor (-9.54 dB) is applied to the result.
 - Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
 When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

8.6 Power-line conducted emissions

■ Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

■ Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to the test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

■ Test Results: **Comply**(Refer to next page.)

The worst data was reported.

RESULT PLOTS

AC Line Conducted Emissions (Graph)

TM 1 & Middle

Results of Conducted Emission

DTNC



Date 2018-05-11

Order No. DTNC1804-02797
 Model No. 14HK701G
 Serial No.
 Test Condition 2.4GHz

Reference No.
 Power Supply
 Temp/Humi. 23/45
 Operator S.G.LEE

Memo

LIMIT : FCC P15.207 QP
 FCC P15.207 AV

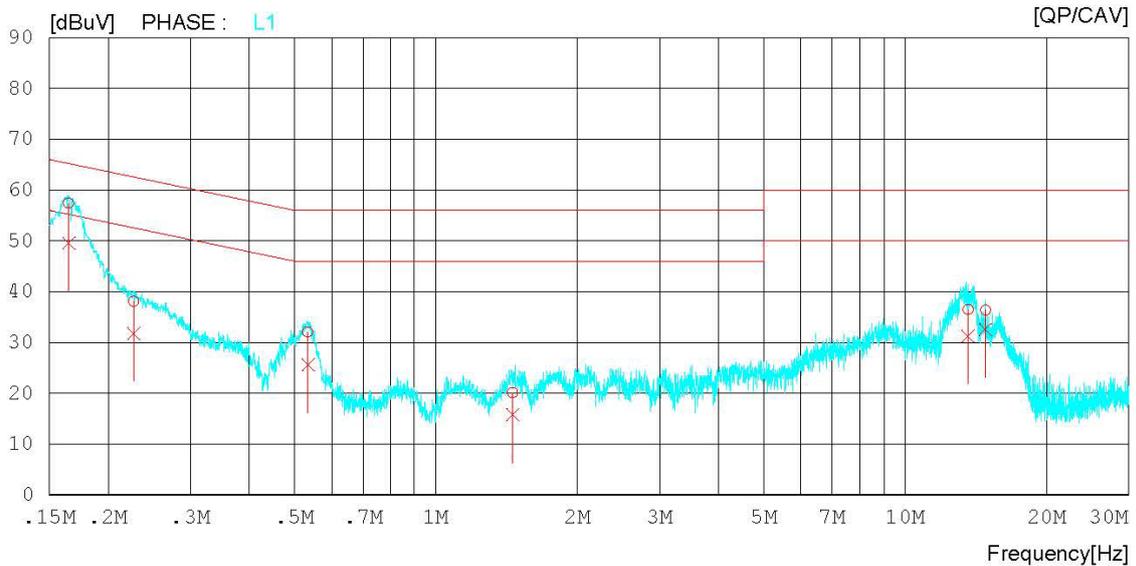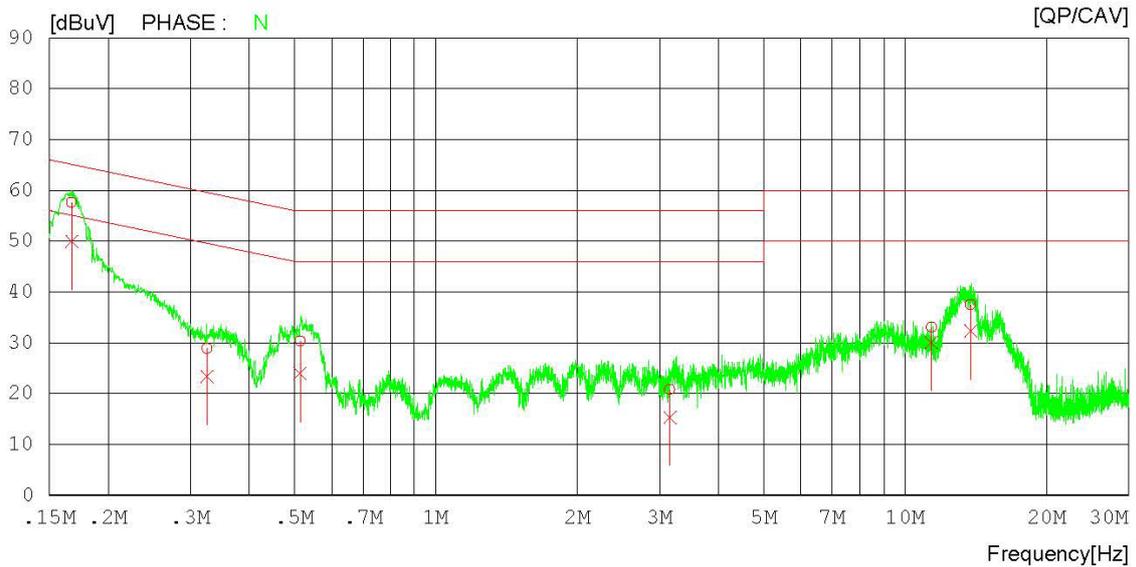

AC Line Conducted Emissions (List)

TM 1 & Middle

Results of Conducted Emission

DTNC

Date 2018-05-11

Order No.	DTNC1804-02797	Reference No.	
Model No.	14HK701G	Power Supply	
Serial No.		Temp/Humi.	23/45
Test Condition	2.4GHz	Operator	S.G.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]			
1	0.16724	47.66	39.96	9.97	57.63	49.93	65.10	55.10	7.47	5.17	N
2	0.32522	18.95	13.44	9.96	28.91	23.40	59.57	49.57	30.66	26.17	N
3	0.51361	20.41	13.93	9.99	30.40	23.92	56.00	46.00	25.60	22.08	N
4	3.15240	10.72	5.27	10.06	20.78	15.33	56.00	46.00	35.22	30.67	N
5	11.38160	22.82	19.83	10.23	33.05	30.06	60.00	50.00	26.95	19.94	N
6	13.80740	27.26	22.06	10.28	37.54	32.34	60.00	50.00	22.46	17.66	N
7	0.16498	47.44	39.62	9.98	57.42	49.60	65.21	55.21	7.79	5.61	L1
8	0.22675	28.05	21.83	9.94	37.99	31.77	62.57	52.57	24.58	20.80	L1
9	0.53344	22.05	15.62	9.98	32.03	25.60	56.00	46.00	23.97	20.40	L1
10	1.45800	10.00	5.65	10.01	20.01	15.66	56.00	46.00	35.99	30.34	L1
11	13.62020	26.11	21.03	10.28	36.39	31.31	60.00	50.00	23.61	18.69	L1
12	14.84340	26.05	22.16	10.31	36.36	32.47	60.00	50.00	23.64	17.53	L1

9. LIST OF TEST EQUIPMENT


Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	17/07/12	18/07/12	MY46471601
Spectrum Analyzer	Agilent Technologies	N9020A	17/09/05	18/09/05	MY46471251
DC Power Supply	Agilent Technologies	66332A	17/09/05	18/09/05	MY43000211
Multimeter	FLUKE	17B	17/12/26	18/12/26	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	17/12/27	18/12/27	255571
Signal Generator	Rohde Schwarz	SMF100A	17/12/27	18/12/27	102341
Thermohygrometer	BODYCOM	BJ5478	18/01/03	19/01/03	120612-2
HYGROMETER	TESTO	608-H1	18/02/10	19/02/10	34862883
Thermohygrometer	BODYCOM	BJ5478	18/01/03	19/01/03	120612-1
Loop Antenna	Schwarzbeck	FMZB1513	18/01/30	20/01/30	1513-128
BILOG ANTENNA	Schwarzbeck	VULB 9160	16/08/05	18/08/05	9160-3362
HORN ANT	ETS	3115	18/01/30	20/01/30	6419
HORN ANT	A.H.Systems	SAS-574	17/07/31	19/07/31	155
PreAmplifier	Agilent Technologies	8449B	17/09/05	18/09/05	3008A02108
PreAmplifier	TSJ	MLA-010K01-B01-27	18/03/05	19/03/05	1844539
EMI Test Receiver	Rohde Schwarz	ESR7	18/02/13	19/02/13	101061
High-pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	17/09/05	18/09/05	3
High-pass filter	Wainwright	WHNX6-6320-8000-26500-40CC	17/09/05	18/09/05	1
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A MA2490A	17/12/27	18/12/27	1306053 1249303
Attenuator	SMAJK	SMAJK-50-10	17/09/06	18/09/06	15081903
EMI Test Receiver	Rohde Schwarz	ESC17	18/02/12	19/02/12	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	17/09/29	18/09/29	101333
LISN	Schwarzbeck	NNLK 8121	18/03/20	19/03/20	06183
CABLE	DTNC	CABLE	17/06/22	18/06/22	RF-82
CABLE	DTNC	CABLE	17/06/22	18/06/22	C-016-4
CABLE	DTNC	CABLE	17/06/22	18/06/22	RF-81
CABLE	Radiall	TESTPRO3	17/06/22	18/06/22	RF-74
CABLE	HUBER+SUHNER	SUCOFLEX103	18/02/28	19/02/28	RF-75
CABLE	Radiall	TESTPRO3	18/02/28	19/02/28	RF-66

Note 1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note 2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

TM 1 & Highest & Z axis & Hor

Detector Mode : PK

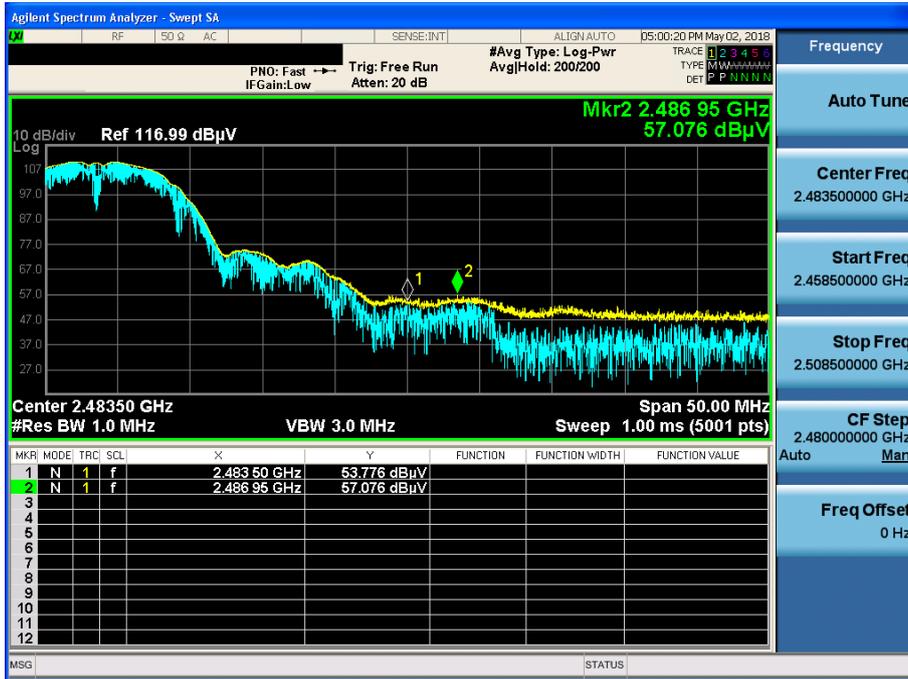


TM 1 & Highest & Z axis & Hor

Detector Mode : AV




TM 2 & Lowest & Z axis & Hor

Detector Mode : PK

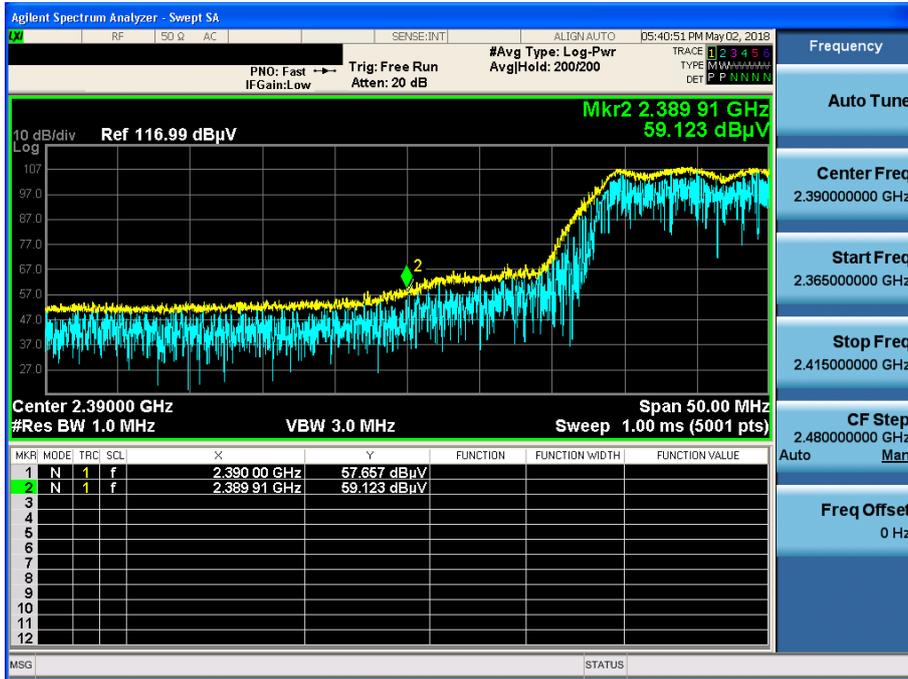


TM 2 & Lowest & Z axis & Hor

Detector Mode : AV

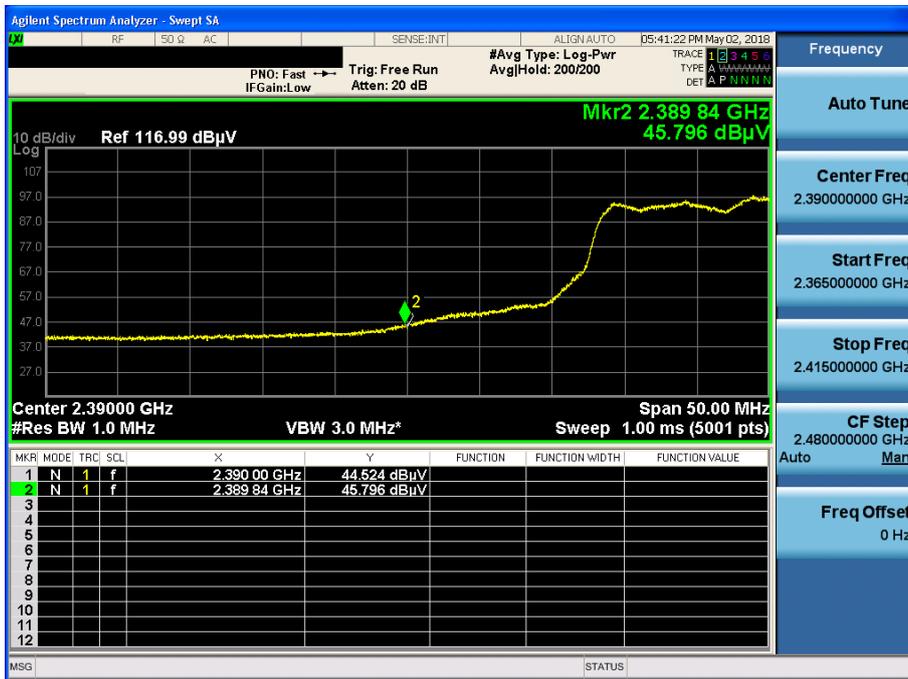


TM 2 & Highest & Z axis & Hor

Detector Mode : PK

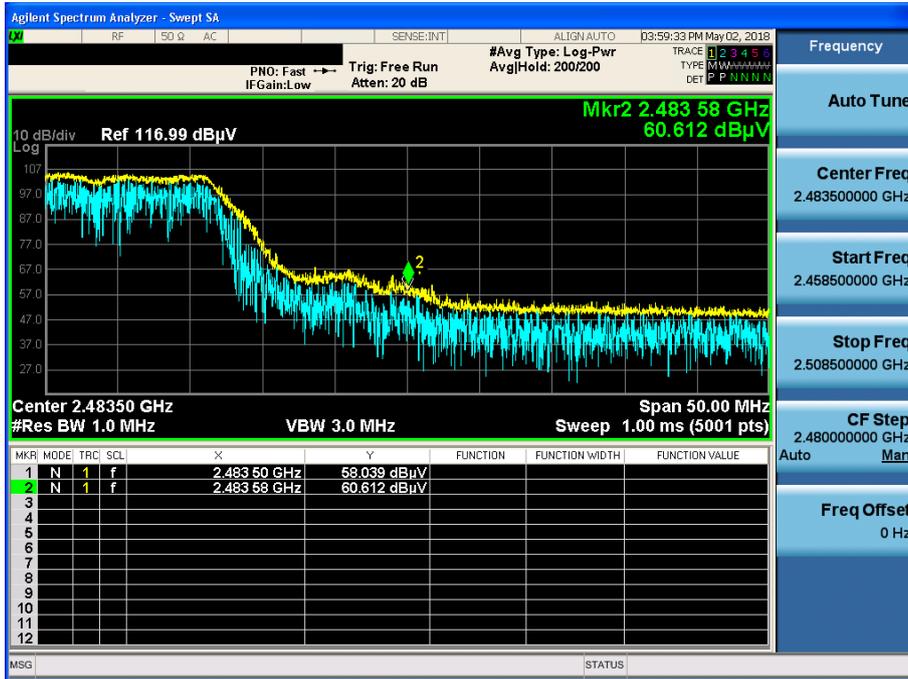


TM 2 & Highest & Z axis & Hor

Detector Mode : AV

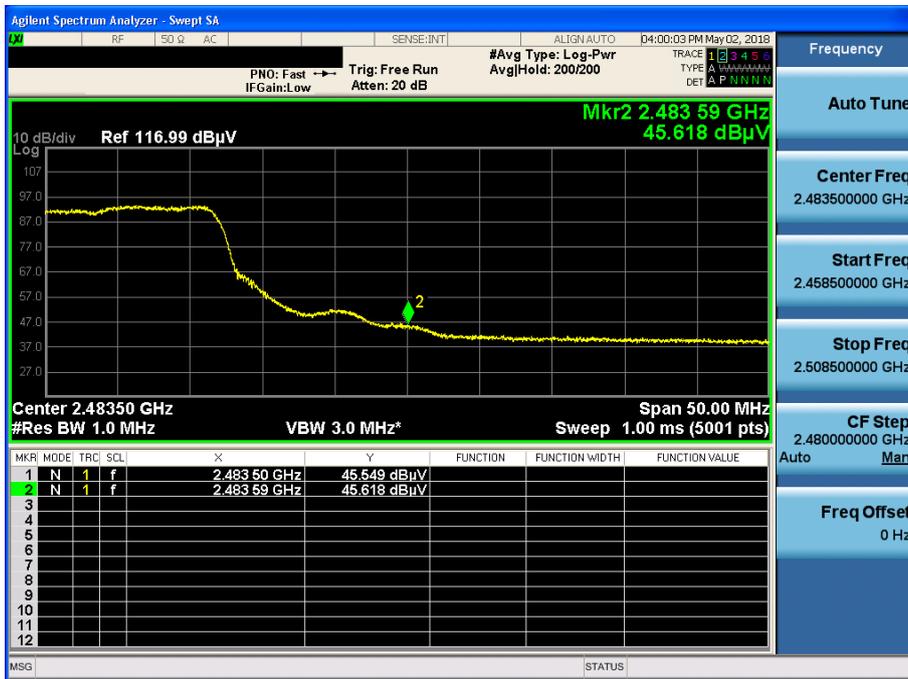


TM 3 & Lowest & X axis & Ver

Detector Mode : PK

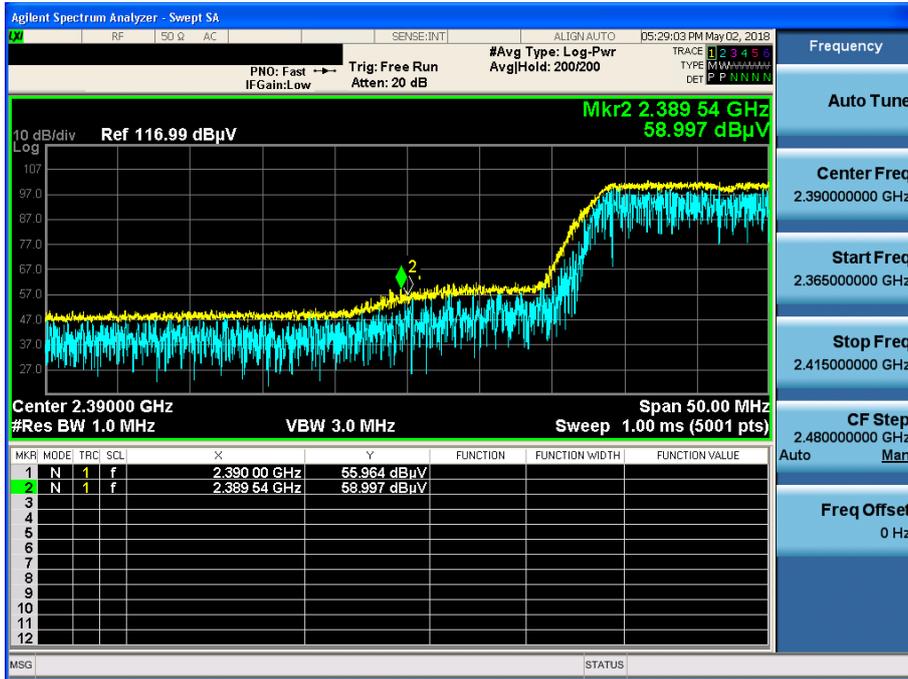


TM 3 & Lowest & X axis & Ver

Detector Mode : AV

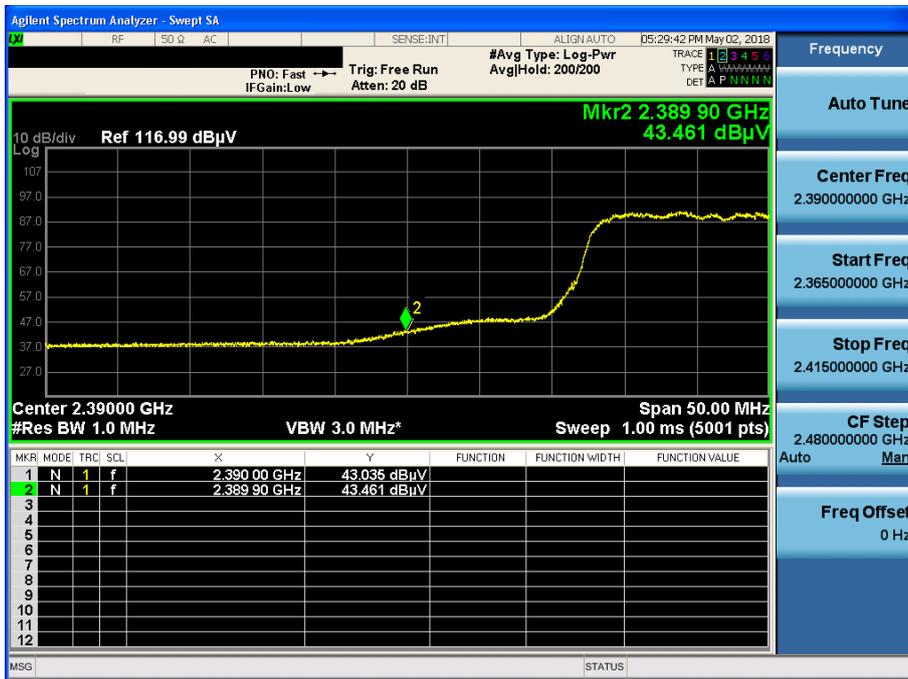


TM 3 & Highest & X axis & Ver

Detector Mode : PK

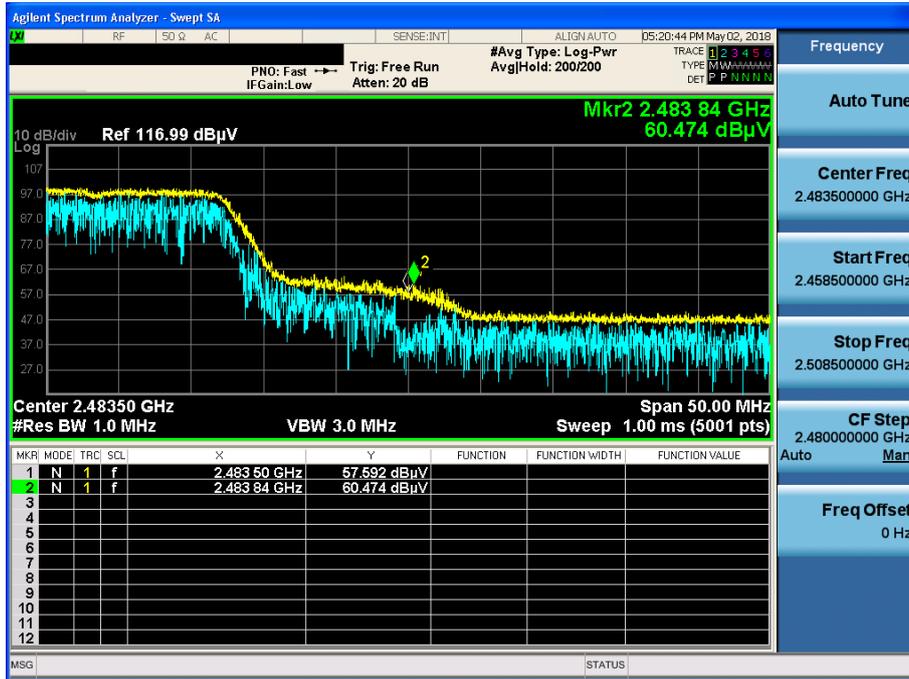


TM 3 & Highest & X axis & Ver

Detector Mode : AV

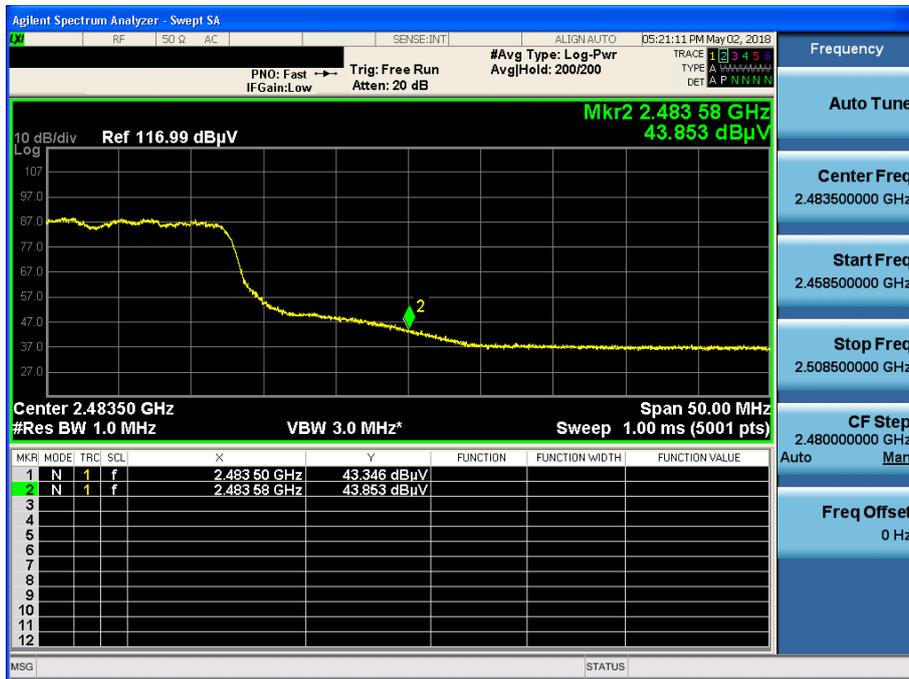


TM 1 & Highest & Z axis & Hor

Detector Mode : AV

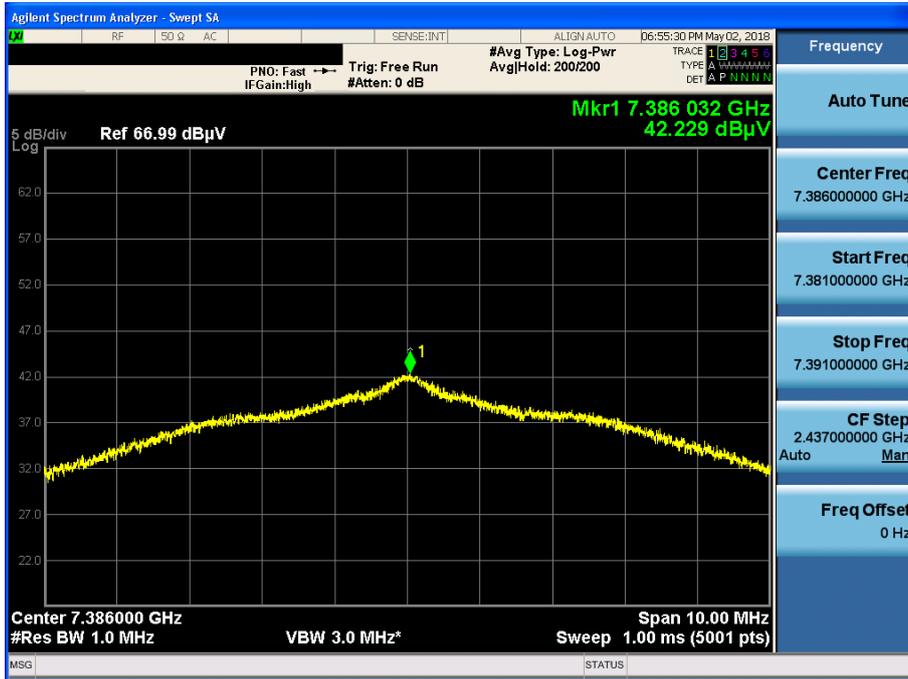

TM 2 & Highest & Z axis & Hor

Detector Mode : AV

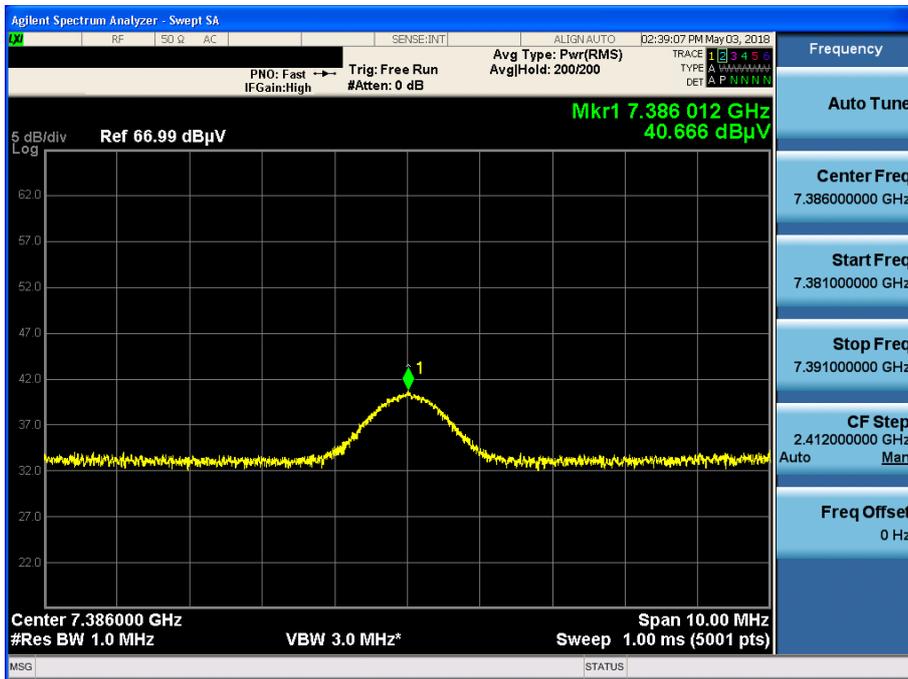

TM 3 & Highest & Z axis & Hor

Detector Mode : AV

