

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer : LG Electronics Inc.

642, Jinpyeong-dong, Gumi-si,

Gyeongbuk, 730-360, Korea

Attn: Mr. Sang-Wook Lee, Chief research engineer

Date of Issue : January 14, 2009

Order Number: GETEC-C1-09-012

Test Report Number: GETEC-E3-09-006

**Test Site: Gumi College EMC Center
(Registration Number: 100749)**

FCC ID.: BEJ32CL40UA

Applicant: LG Electronics Inc.


Rule Part(s) : FCC Part 15 Subpart B
Equipment Class : Class B computing device peripheral (JBP)
EUT Type : LCD TV/Monitor
Type of Authority : Certification
Model Name : 32CL40-UA
Trade Name : LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003 / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,


Hyeong-Seop Kim, Associated Engineer
GUMI College EMC center


Tae-Sig Park, Technical Manager
GUMI College EMC center



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S)	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
4.2 CONDUCTED EMISSION	9
4.3 RADIATED EMISSION.....	10
5. CONDUCTED EMISSION.....	11
5.1 OPERATING ENVIRONMENT	11
5.2 TEST SET-UP.....	11
5.3 MEASUREMENT UNCERTAINTY	11
5.4 LIMIT	12
5.5 TEST EQUIPMENT USED	12
5.6 TEST DATA FOR POWER LINE CONDUCTED EMISSION	13
6. RADIATED EMISSION	18
6.1 OPERATING ENVIRONMENT	18
6.2 TEST SET-UP.....	18
6.3 MEASUREMENT UNCERTAINTY	18
6.4 LIMIT	19
6.5 TEST EQUIPMENT USED	19
6.6 TEST DATA FOR RADIATED EMISSION	20
7. SAMPLE CALCULATIONS.....	26
7.1 EXAMPLE 1 :	26
7.2 EXAMPLE 2 :	26
8. RECOMMENDATION & CONCLUSION.....	27
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – PLOTS OF CONDUCTED EMISSIONS	
APPENDIX C – ID SAMPLE LABEL & LOCATION	
APPENDIX D – BLOCK DIAGRAM	
APPENDIX E – TEST SET-UP PHOTOGRAPHS	
APPENDIX F – EXTERNAL PHOTOGRAPHS	
APPENDIX G –INTERNAL PHOTOGRAPHS	
APPENDIX H – USER’S MANUAL	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics Inc.
Applicant Address: 642, Jinpyeong-dong, Gumi-si, Gyeongbuk, Korea
Manufacturer: LG Electronics Inc.
Manufacturer Address: 642, Jinpyeong-dong, Gumi-si, Gyeongbuk, Korea
Contact Person: Mr. Sang -Wook Lee, Chief research engineer
Tel Number: +82-54-470-5430

- **FCC ID** BEJ32CL40UA
- **EUT Type** LCD TV/Monitor
- **Model Name** 32CL40-UA
- **Trade Name** LG
- **Serial Number** Proto type
- **Rule Part(s)** FCC Part 15 Subpart B
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003) / Canadian standard ICES-003
- **Dates of Test** January 9 ~ 12, 2009
- **Place of Test** **Gumi College EMC Center** (FCC Registration Number: 100749)
407, Bugok-dong, Gumi-si, Gyeongsangbuk-do, Korea
- **Test Report Number** GETEC-E3-09-006
- **Dates of Issue** January 14, 2009




2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. LCD TV/Monitor (Model Name: 32CL40-UA)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-dong, Gumi-si, Gyeongsangbuk-do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992

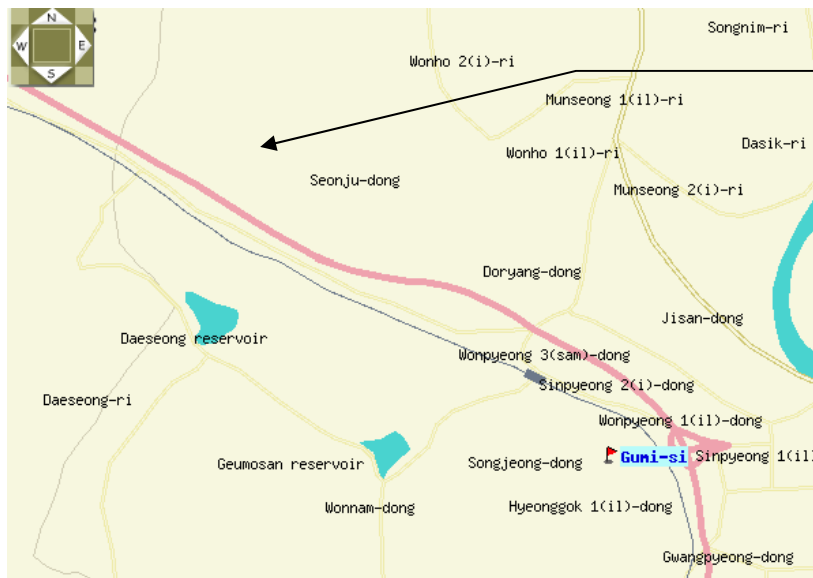

GUMI COLLEGE EMC CENTER
407, Bugok-dong, Gumi-si,
Gyeongsangbuk-do 730-711, Korea
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics Inc. LCD TV/Monitor (Model Name: 32CL40-UA) FCC ID.: BEJ32CL40UA**

MODELS		32CL40 (32CL40-UA)	42CL40 (42CL40-UA)	47CL40 (47CL40-UA)
Dimensions (Width x Height x Depth)	With stand	32.0 x 23.5 x 91. inches 813.8 x 598.8 x 231.9 mm	40.7 x 28.9 x 11.5 inches 1034.0 x 735.0 x 294.0 mm	45.5 x 32.0 x 13.5 inches 1156.2 x 813.1 x 342.9 mm
	Without stand	32.0 x 21.2 x 3.1 inches 813.8 x 540.4 x 78.9 mm	40.7 x 26.1 x 3.5 inches 1034.0 x 663.0 x 91.0 mm	45.5 x 29.1 x 4.0 inches 1156.2 x 739.2 x 103.0 mm
Weight	With stand	28.4 pounds / 12.9 kg	54.0 pounds / 24.5 kg	64.3 pounds / 29.2 kg
	Without stand	25.1 pounds / 11.4 kg	48.5 pounds / 22.0 kg	54.2 pounds / 24.6 kg

Power requirement	AC100-240V ~ 50/60Hz	
Television System	NTSC-M, ATSC, 64 & 256 QAM	
Program Coverage	VHF 2-13, UHF 14-69, CATV 1-135, DTV 2-69, CADTV 1-135	
External Antenna Impedance	75 ohm	
Environment condition	Operating Temperature	32 ~ 104°F (0 ~ 40°C)
	Operating Humidity	Less than 80%
	Storage Temperature	-4 ~ 140°F (-20 ~ 60°C)
	Storage Humidity	Less than 85%

EUT Type: LCD TV/Monitor

FCC ID: BEJ32CL40UA



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID
PC	Hewlett Packard	D530	S/N: CNG34800PY FCC ID: DoC
Video card	ATI	ATI RV360(9600)	S/N: SN0402017176 FCC ID: DoC
Key-board	COMPAQ	166516-AD6	S/N: B13BBOR391006D FCC ID: DoC
Serial mouse	LOGITECH	M-S69	S/N: 334684-108 FCC ID: JNZ211443
Joystick	Microsoft	X05-92626	S/N: 9262600296169 FCC ID: DoC
DVD player	LG Electronics Inc	LC-954	S/N: 3850R-Z674K FCC ID: DoC
Printer	Hewlett Packard	970CXI	S/N: MY9B01F1FG FCC ID: DoC
TV signal generator	FLUKE	54200	S/N: 831011 FCC ID: DoC
USB memory stick	SM Electronics	UDD-32M	S/N:- FCC ID:DoC

See "Appendix E – Test Setup Photographs" for actual system test set-up



3.2.2 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT	1.8 m unshielded
RGB in (Analog)cable	Connected to the EUT and PC	1.8 m shielded with two ferrite cores
HDMI (Digital)cable	Connected to the EUT and PC	1.9 m shielded
Component cable	Connected to the EUT and DVD player	1.8 m shielded
Component sound cable	Connected to the EUT and DVD player	3.0 m shielded
PC sound cable	Connected to the EUT and PC	1.8 m shielded
AV in cable	Connected to the EUT and DVD player	3.0 m shielded
ANT cable	Connected to the EUT and TV signal generator	10 m shielded

3.3 Modification Item(s)

- None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency : AC 120 V / 60 Hz

- Test Mode(s)
 - . Monitor mode
 - . Radiated emission: 1 920 * 1 080 / 60 Hz (RGB: Analog), 1 920 * 1 080 / 60 Hz (HDMI: Digital)
 - . Conducted emission: 1 920 * 1 080 / 60 Hz (RGB: Analog), 1 920 * 1 080 / 60 Hz (HDMI: Digital)
1 024 * 768 / 60 Hz (RGB: Analog), 640 * 480 / 60 Hz (RGB: Analog)
 - . USB play mode: Continuous play mode of Picture file and 1 kHz audio file.

- Operating test pattern
 - . "H" character scrolling mode (Font size: 10)
 - . Black background white character
 - . Brightness and contrast was adjusted as maximum level
 - . 1 kHz sound tone with winamp player

"The verification report for TV/AV mode would be issued by LG Electronics Inc."



4.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure.

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30 MHz with 20 ms sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

Each EME reported was calibrated using the R/S signal generator

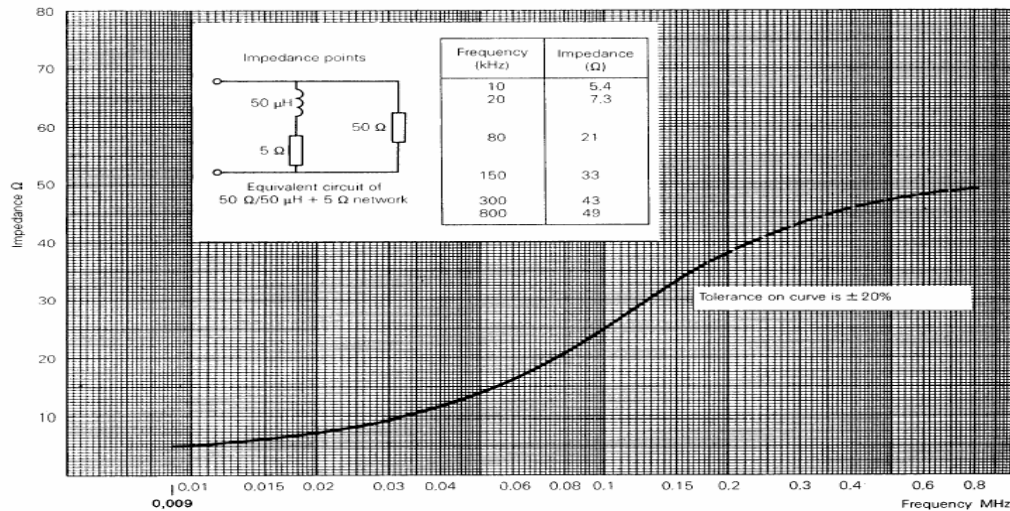


Fig 2. Impedance of LISN



4.3 Radiated Emission

Preliminary measurements were conducted 3 m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 MHz to 1 000 MHz using bicornical log antenna (Schwarzbeck, VULB9160). Above 1 GHz, horn antenna (Schwarzbeck, BBHA9120D) was used.

Final measurements were made outdoors at 3 m /10 m test range.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

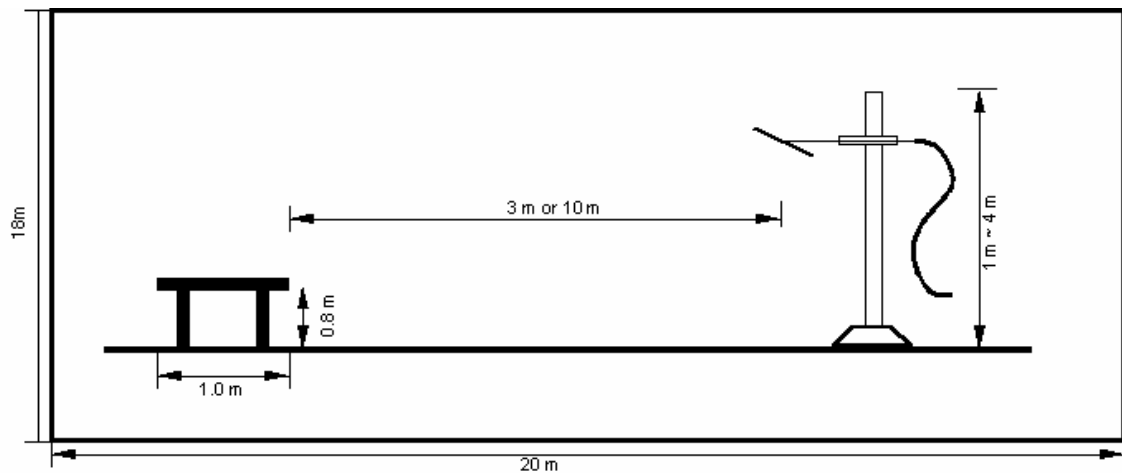


Fig 3. Dimensions of Open Site Test Area



5. Conducted Emission

5.1 Operating environment

Temperature : 24 °C
Relative humidity : 35 % R.H.

5.2 Test set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	± 2.97 dB	Confidence levels of 95 % (k=2)
Conducted emission (150 kHz ~ 30 MHz)	± 4.05 dB	Confidence levels of 95 % (k=2)



5.4 Limit

RFI Conducted	FCC Limit(dB) Class B	
	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

*Limits decreases linearly with the logarithm of frequency.

5.5 Test equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 13. 2009
■ - ESH3-Z5	Rohde & Schwarz	LISN	838979/020	12. 12. 2009
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	12. 12. 2009



5.6 Test data for power line conducted emission

- Test Date : January 9, 2009
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz

◆ Test resolution: 1 920 * 1 080 / 60 Hz (RGB: Analog mode)

Frequency [MHz]	Insertion Loss [dB]	Cable Loss [dB]	Line	Q.P[dB μ V]			A.V[dB μ V]			Margin[dB]	
				Limit	Reading	Result	Limit	Reading	Result	Q.P	A.V
0.160	0.11	-0.17	N	65.46	39.06	39.00	55.46	34.36	34.30	26.46	21.16
0.190	0.10	-0.17	L1	64.03	46.37	46.30	54.03	33.67	33.60	17.73	20.43
0.410	0.13	-0.14	N	57.64	33.21	33.20	47.64	27.31	27.30	24.44	20.34
0.480	0.13	-0.13	N	56.33	30.30	30.30	46.33	20.70	20.70	26.03	25.63
1.030	0.16	-0.13	N	56.00	23.57	23.60	46.00	16.17	16.20	32.40	29.80
1.290	0.16	-0.12	N	56.00	23.96	24.00	46.00	16.56	16.60	32.00	29.40
4.570	0.25	-0.06	L1	56.00	23.31	23.50	46.00	14.51	14.70	32.50	31.30
8.330	0.35	-0.05	L1	60.00	27.10	27.40	50.00	18.50	18.80	32.60	31.20
11.740	0.39	0.00	N	60.00	29.31	29.70	50.00	25.31	25.70	30.30	24.30
24.770	0.85	0.10	L1	60.00	29.25	30.20	50.00	24.85	25.80	29.80	24.20
28.050	0.89	0.14	L1	60.00	29.67	30.70	50.00	23.47	24.50	29.30	25.50
28.240	0.90	0.14	L1	60.00	30.16	31.20	50.00	23.56	24.60	28.80	25.40

*Comment : Line : L1(line 1), L2(line2), L3(line 3), N(neutral)
 Q.P:Quasi-peak, A.V : Average
 Insertion Loss : Insertion Loss of LISN
 Cable Loss : Cable Loss + Pulse Limiter Insertion loss value



◆ Test resolution: 1 920 * 1 080 / 60 Hz (HDMI: Digital mode)

Frequency [MHz]	Insertion Loss [dB]	Cable Loss [dB]	Line	Q.P[$\text{dB}\mu\text{V}$]			A.V[$\text{dB}\mu\text{V}$]			Margin[dB]	
				Limit	Reading	Result	Limit	Reading	Result	Q.P	A.V
0.170	0.11	-0.17	N	64.96	37.96	37.90	54.96	34.86	34.80	27.06	20.16
0.190	0.11	-0.17	N	64.03	46.86	46.80	54.03	39.66	39.60	17.23	14.43
0.260	0.12	-0.15	N	61.43	36.93	36.90	51.43	32.03	32.00	24.53	19.43
0.340	0.12	-0.14	N	59.20	32.22	32.20	49.20	25.62	25.60	27.00	23.60
0.540	0.13	-0.13	N	56.00	29.20	29.20	46.00	20.40	20.40	26.80	25.60
1.170	0.16	-0.12	N	56.00	23.66	23.70	46.00	15.36	15.40	32.30	30.60
4.570	0.25	-0.06	L1	56.00	22.81	23.00	46.00	17.21	17.40	33.00	28.60
8.220	0.34	-0.05	N	60.00	26.71	27.00	50.00	22.21	22.50	33.00	27.50
11.760	0.42	0.00	L1	60.00	28.78	29.20	50.00	21.78	22.20	30.80	27.80
24.770	0.70	0.10	N	60.00	29.50	30.30	50.00	25.60	26.40	29.70	23.60
28.330	0.90	0.14	L1	60.00	30.06	31.10	50.00	22.56	23.60	28.90	26.40

*Comment : Line : L1(line 1), L2(line2), L3(line 3), N(neutral)
 Q.P:Quasi-peak, A.V : Average
 Insertion Loss : Insertion Loss of LISN
 Cable Loss : Cable Loss + Pulse Limiter Insertion loss value



◆ Test resolution: 1 024 * 768 / 60 Hz (RGB: Analog mode)

Frequency [MHz]	Insertion Loss [dB]	Cable Loss [dB]	Line	Q.P[dB μ V]			A.V[dB μ V]			Margin[dB]	
				Limit	Reading	Result	Limit	Reading	Result	Q.P	A.V
0.160	0.11	-0.17	N	65.46	38.56	38.50	55.46	33.96	33.90	26.96	21.56
0.260	0.12	-0.15	N	61.43	37.13	37.10	51.43	32.43	32.40	24.33	19.03
0.400	0.13	-0.14	N	57.85	32.31	32.30	47.85	26.51	26.50	25.55	21.35
0.480	0.13	-0.13	N	56.33	29.40	29.40	46.33	20.10	20.10	26.93	26.23
0.540	0.13	-0.13	N	56.00	29.40	29.40	46.00	20.50	20.50	26.60	25.50
4.360	0.25	-0.07	L1	56.00	25.92	26.10	46.00	18.72	18.90	29.90	27.10
8.210	0.35	-0.06	L1	60.00	26.81	27.10	50.00	22.81	23.10	32.90	26.90
11.840	0.43	0.00	L1	60.00	28.87	29.30	50.00	23.97	24.40	30.70	25.60
11.960	0.40	0.00	N	60.00	29.20	29.60	50.00	23.20	23.60	30.40	26.40
24.410	0.85	0.10	L1	60.00	24.15	25.10	50.00	19.05	20.00	34.90	30.00
28.170	0.90	0.14	L1	60.00	30.46	31.50	50.00	23.66	24.70	28.50	25.30

*Comment : Line : L1(line 1), L2(line2), L3(line 3), N(neutral)
 Q.P:Quasi-peak, A.V : Average
 Insertion Loss : Insertion Loss of LISN
 Cable Loss : Cable Loss + Pulse Limiter Insertion loss value



◆ Test resolution: 640 * 480 / 60 Hz (RGB: Analog mode)

Frequency [MHz]	Insertion Loss [dB]	Cable Loss [dB]	Line	Q.P[dB μ V]			A.V[dB μ V]			Margin[dB]	
				Limit	Reading	Result	Limit	Reading	Result	Q.P	A.V
0.190	0.10	-0.17	L1	64.03	44.67	44.60	54.03	35.47	35.40	19.43	18.63
0.240	0.12	-0.16	N	62.09	29.94	29.90	52.09	29.54	29.50	32.19	22.59
0.340	0.12	-0.14	N	59.20	32.42	32.40	49.20	25.82	25.80	26.80	23.40
0.390	0.13	-0.14	N	58.06	33.01	33.00	48.06	26.81	26.80	25.06	21.26
0.520	0.13	-0.13	N	56.00	29.40	29.40	46.00	20.70	20.70	26.60	25.30
0.730	0.15	-0.13	N	56.00	25.38	25.40	46.00	17.98	18.00	30.60	28.00
1.190	0.16	-0.12	N	56.00	22.86	22.90	46.00	17.06	17.10	33.10	28.90
3.930	0.25	-0.08	N	56.00	23.93	24.10	46.00	18.03	18.20	31.90	27.80
4.030	0.24	-0.07	L1	56.00	25.13	25.30	46.00	18.03	18.20	30.70	27.80
8.330	0.34	-0.05	N	60.00	27.71	28.00	50.00	21.71	22.00	32.00	28.00
28.140	0.90	0.14	L1	60.00	30.56	31.60	50.00	24.16	25.20	28.40	24.80
28.590	0.90	0.15	L1	60.00	29.95	31.00	50.00	23.05	24.10	29.00	25.90

*Comment : Line : L1(line 1), L2(line2), L3(line 3), N(neutral)
 Q.P:Quasi-peak, A.V : Average
 Insertion Loss : Insertion Loss of LISN
 Cable Loss : Cable Loss + Pulse Limiter Insertion loss value



◆ USB play mode

Frequency [MHz]	Insertion Loss [dB]	Cable Loss [dB]	Line	Q.P[$\text{dB}\mu\text{V}$]			A.V[$\text{dB}\mu\text{V}$]			Margin[dB]	
				Limit	Reading	Result	Limit	Reading	Result	Q.P	A.V
0.170	0.11	-0.17	N	64.96	38.66	38.60	54.96	37.06	37.00	26.36	17.96
0.200	0.11	-0.17	N	63.61	44.66	44.60	53.61	39.06	39.00	19.01	14.61
0.260	0.12	-0.15	N	61.43	36.83	36.80	51.43	31.73	31.70	24.63	19.73
0.400	0.13	-0.14	N	57.85	32.01	32.00	47.85	25.81	25.80	25.85	22.05
0.460	0.13	-0.13	N	56.69	30.90	30.90	46.69	21.80	21.80	25.79	24.89
0.750	0.15	-0.13	N	56.00	29.38	29.40	46.00	18.48	18.50	26.60	27.50
4.040	0.25	-0.07	N	56.00	25.82	26.00	46.00	19.42	19.60	30.00	26.40
8.400	0.34	-0.05	N	60.00	27.61	27.90	50.00	22.11	22.40	32.10	27.60
11.710	0.39	0.00	N	60.00	29.51	29.90	50.00	25.31	25.70	30.10	24.30
12.430	0.45	0.00	L1	60.00	25.65	26.10	50.00	19.65	20.10	33.90	29.90
25.670	0.85	0.12	L1	60.00	28.03	29.00	50.00	22.23	23.20	31.00	26.80
28.320	0.90	0.14	L1	60.00	28.96	30.00	50.00	22.46	23.50	30.00	26.50

*Comment : Line : L1(line 1), L2(line2), L3(line 3), N(neutral)
 Q.P:Quasi-peak, A.V : Average
 Insertion Loss : Insertion Loss of LISN
 Cable Loss : Cable Loss + Pulse Limiter Insertion loss value



6. Radiated Emission

6.1 Operating environment

Temperature : 0 °C
Relative humidity : 35 % R.H.

6.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber and found frequency for open area test site.

The formal radiated emission was measured at 3 m / 10 m distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test items	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 3.54 dB	Confidence levels of 95 % (k=2)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 3.49 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	± 3.85 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	± 3.76 dB	Confidence levels of 95 % (k=2)
Radiated emission (30 MHz ~ 300 MHz, 10 m, Vertical)	± 3.21 dB	Confidence levels of 95 % (k=2)
Radiated emission (30 MHz ~ 300 MHz, 10 m, Horizontal)	± 3.32 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Vertical)	± 3.77 dB	Confidence levels of 95 % (k=2)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Horizontal)	± 3.84 dB	Confidence levels of 95 % (k=2)



6.4 Limit

Frequency (MHz)	FCC Limit @ 3 m. dB μ V/m	CISPR Limit @ 10 m. dB μ V/m
30 ~ 88	40.0	30.0
88 ~ 216	43.5	30.0
216 ~ 230	46.0	30.0
230 ~ 960	46.0	37.0
960 ~ 1 000	54.0	37.0
> 1 000	54.0	No Specified limit

6.5 Test equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2009
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 13. 2009
■ - HK116	Rohde & Schwarz	Biconical ANT	832639/007	12. 28. 2009
■ - HL223	Rohde & Schwarz	Log-periodic antenna	835998/004	12. 28. 2009
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	12. 26. 2009
■ - HD100	HD GmbH	Position Controller	100/692/01	N/A
■ - DS415S	HD GmbH	Turntable	415/657/01	N/A
■ - MA240	HD GmbH	Antenna Mast	240/565/01	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	N/A




6.6 Test data for Radiated emission

- Test Date : January 12, 2009
- Resolution bandwidth : 120 kHz/ 1 MHz
- Frequency range : 30 MHz ~ 2 000 MHz
- Measurement distance : 3 m

◆ Operating Condition: 1 920 * 1 080 / 60 Hz (RGB: Analog mode)
 Detector mode: Quasi- peak detector mode

Frequency (MHz)	Measurement Level				Limit (dB μ V/m)	Margin (dB)	Positioning System		
	Reading	Antenna	Cable	Test Result			Pol. (H/V)	Height (cm)	Angle (°)
	Value(dB μ V)	Factor(dB/m)	Loss(dB)	(dB μ V/m)					
31.44	20.37	12.94	1.67	34.98	40.00	5.02	V	117	152
49.19	20.91	9.15	2.13	32.19	40.00	7.81	V	123	213
73.55	24.08	7.67	2.56	34.31	40.00	5.69	V	100	166
123.76	21.69	10.82	3.26	35.77	43.50	7.73	V	100	280
147.06	22.87	11.50	3.57	37.94	43.50	5.56	H	325	201
220.61	16.44	14.31	4.54	35.29	46.00	10.71	H	285	120
403.98	7.24	15.66	7.56	30.46	46.00	15.54	H	343	144
523.77	14.01	17.23	7.26	38.50	46.00	7.50	H	210	73
599.07	11.10	18.06	7.74	36.90	46.00	9.10	H	266	185
707.35	4.44	20.44	8.37	33.25	46.00	12.75	H	300	199

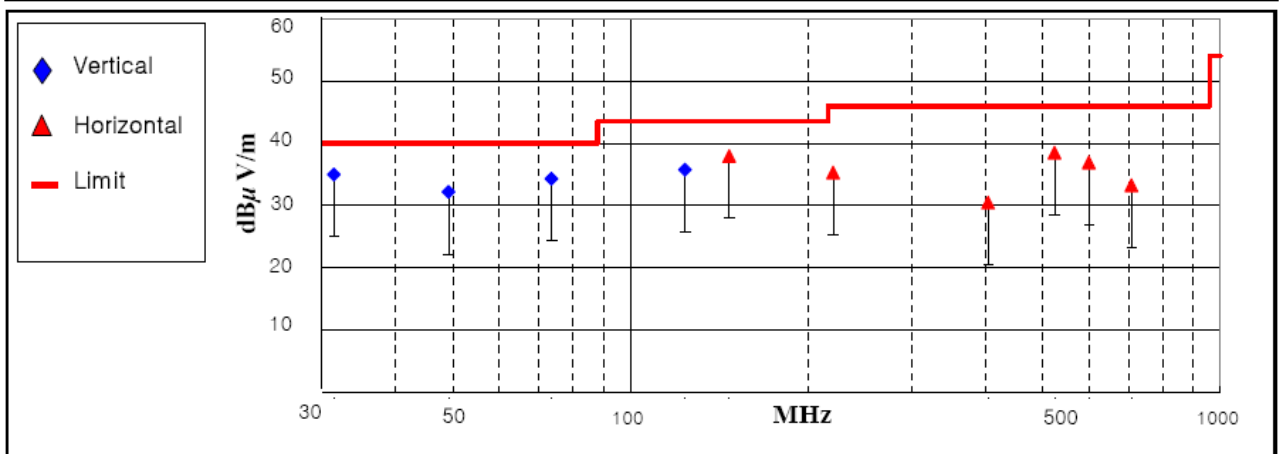


< Fig 4. Radiated emission result (30 MHz ~ 1 000 MHz)>



◆ Operating Condition: 1 920 * 1 080 / 60 Hz (HDMI: Digital mode)
 Detector mode: Quasi- peak detector mode

Frequency (MHz)	Measurement Level				Limit (dB μ V/m)	Margin (dB)	Positioning System		
	Reading	Antenna	Cable	Test Result			Pol. (H/V)	Height (cm)	Angle (°)
	Value(dB μ V)	Factor(dB/m)	Loss(dB)	(dB μ V/m)					
31.45	20.70	12.94	1.67	35.31	40.00	4.69	V	113	110
49.85	21.53	9.09	2.15	32.77	40.00	7.23	V	126	185
74.56	22.86	7.72	2.57	33.15	40.00	6.85	V	111	116
123.73	22.75	10.82	3.26	36.83	43.50	6.67	V	100	243
149.70	22.92	11.61	3.62	38.15	43.50	5.35	H	330	144
220.59	16.67	14.31	4.54	35.52	46.00	10.48	H	227	93
300.67	21.82	12.76	5.70	40.28	46.00	5.72	H	231	210
524.12	16.69	17.24	7.26	41.19	46.00	4.81	V	100	114
598.55	10.73	18.06	7.73	36.52	46.00	9.48	H	285	165
742.50	12.69	20.41	8.48	41.58	46.00	4.42	H	344	180

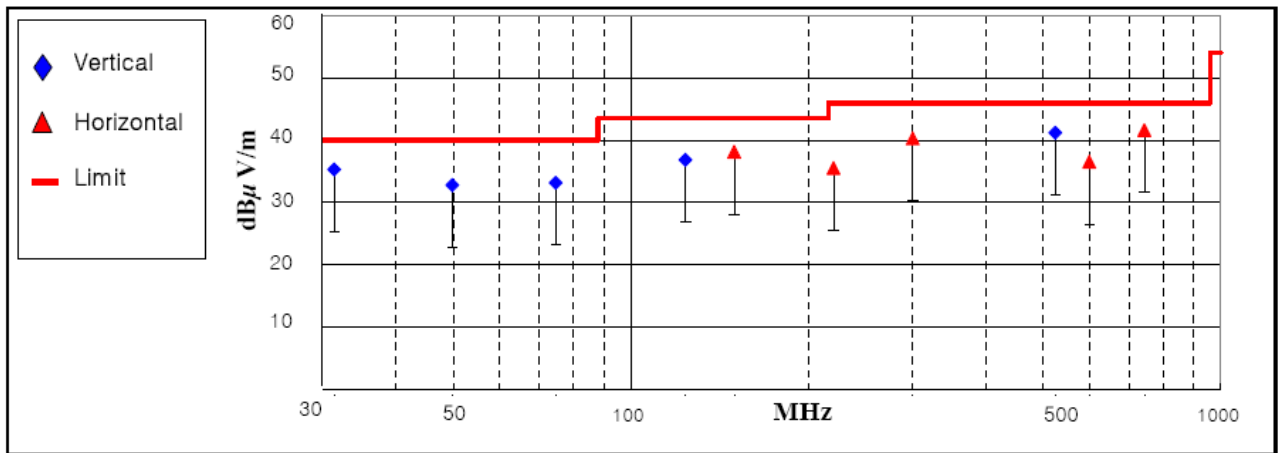


< Fig 5. Radiated emission result (30 MHz ~ 1 000 MHz)>



- ◆ Operating Condition: USB play mode
 Detector mode: Quasi- peak detector mode

Frequency (MHz)	Measurement Level				Limit (dB μ V/m)	Margin (dB)	Positioning System		
	Reading	Antenna	Cable	Test Result			Pol. (H/V)	Height (cm)	Angle (°)
	Value(dB μ V)	Factor(dB/m)	Loss(dB)	(dB μ V/m)					
31.66	20.69	12.87	1.67	35.23	40.00	4.77	V	110	120
49.90	20.56	9.09	2.15	31.80	40.00	8.20	V	106	230
75.08	25.36	7.74	2.58	35.68	40.00	4.32	V	100	143
147.63	22.56	11.52	3.58	37.66	43.50	5.84	H	216	177
221.69	12.30	14.35	4.55	31.20	46.00	14.80	H	219	232
613.42	11.99	18.43	7.75	38.17	46.00	7.83	H	300	182
719.76	10.21	20.43	8.31	38.95	46.00	7.05	H	260	150
960.65	4.48	21.83	9.92	36.23	54.00	17.77	H	243	192

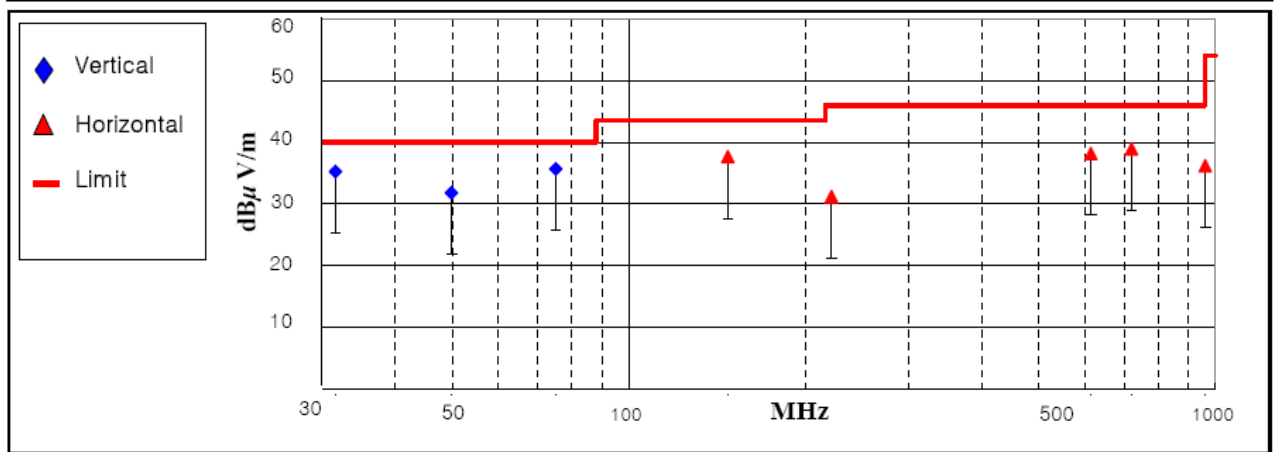


< Fig 6. Radiated emission result (30 MHz ~ 1 000 MHz)>



- ◆ Operating Condition: 1 920 * 1 080 / 60 Hz (RGB: Analog mode)
 Detector mode: Peak detector mode / Average detector mode

Frequency (MHz)	Measurement Level						Limit (dBμ V/m)		Margin (dB)		Positioning System		
	Reading Value (dBμ V/m)		AF (dB/m)	AMP / CL (dB)	Test Result (dBμ V/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (°)
	Peak	Average			Peak	Average							
1052.80	77.28	51.08	24.96	-40.94	61.30	35.10	74.00	54.00	12.70	18.90	V	104	266
1123.20	70.73	52.33	25.08	-40.81	55.00	36.60	74.00	54.00	19.00	17.40	V	122	164
1198.00	68.87	49.27	25.22	-40.59	53.50	33.90	74.00	54.00	20.50	20.10	V	100	153
1549.60	81.38	55.78	25.80	-39.98	67.20	41.60	74.00	54.00	6.80	12.40	H	312	180
1946.80	68.93	45.43	26.17	-39.30	55.80	32.30	74.00	54.00	18.20	21.70	V	133	177

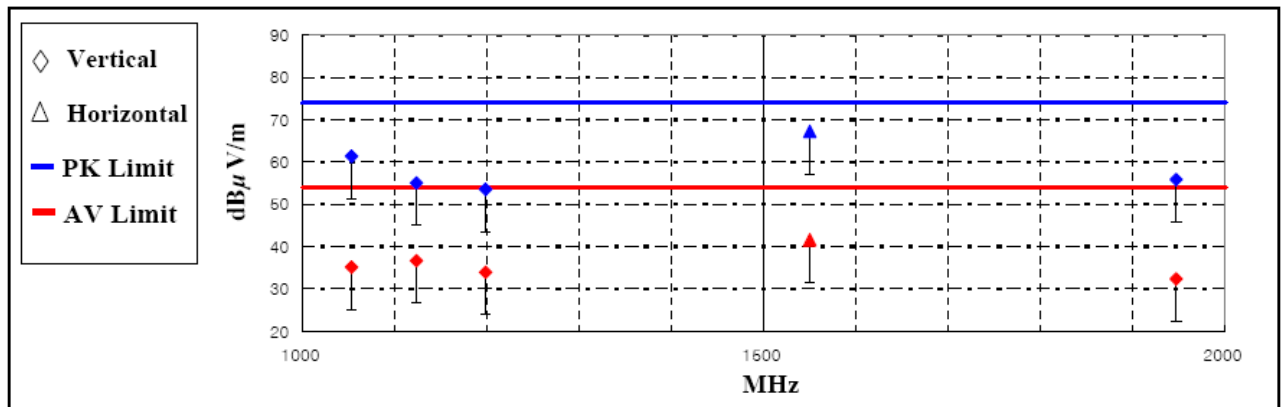


*Comment : AMP/CL_Cable loss value + AMP gain value
 AF : Antenna factor value
 Pol. : H(Horizontal), V(Vertical)

< Fig 7. Radiated emission result (1 000 MHz ~ 2 000 MHz)>



- ◆ Operating Condition: 1 920 * 1 080 / 60 Hz (HDMI: Digital mode)
 Detector mode: Peak detector mode / Average detector mode

Frequency (MHz)	Measurement Level						Limit (dB μ V/m)		Margin (dB)		Positioning System		
	Reading Value (dB μ V/m)		AF	AMP / CL	Test Result (dB μ V/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (°)
	Peak	Average	(dB/m)	(dB)	Peak	Average							
1052.80	75.98	52.98	24.96	-40.94	60.00	37.00	74.00	54.00	14.00	17.00	V	106	270
1512.40	70.95	51.45	25.77	-40.02	56.70	37.20	74.00	54.00	17.30	16.80	H	256	190
1542.80	81.79	55.79	25.80	-39.99	67.60	41.60	74.00	54.00	6.40	12.40	H	302	180
1722.80	68.87	45.37	25.96	-39.63	55.20	31.70	74.00	54.00	18.80	22.30	V	100	182
1947.60	69.21	45.41	26.18	-39.29	56.10	32.30	74.00	54.00	17.90	21.70	V	115	180

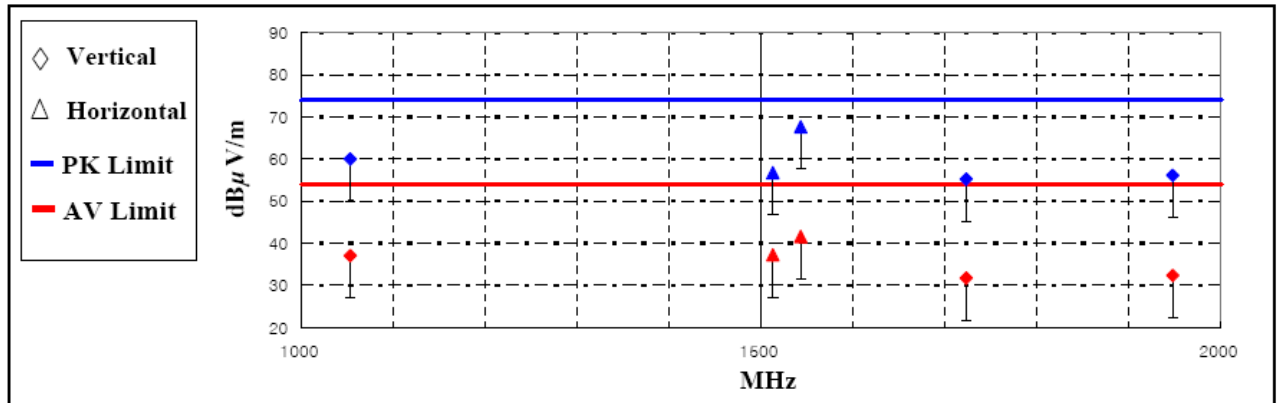


*Comment : AMP/CL_Cable loss value + AMP gain value
 AF : Antenna factor value
 Pol. : H(Horizontal), V(Vertical)

< Fig 8. Radiated emission result (1 000 MHz ~ 2 000 MHz)>



- ◆ Operating Condition: USB play mode
 Detector mode: Peak detector mode / Average detector mode

Frequency (MHz)	Measurement Level						Limit (dB μ V/m)		Margin (dB)		Positioning System		
	Reading Value (dB μ V/m)		AF	AMP / CL	Test Result (dB μ V/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (°)
	Peak	Average	(dB/m)	(dB)	Peak	Average							
1275.60	70.82	49.52	25.36	-40.58	55.60	34.30	74.00	54.00	18.40	19.70	V	100	190
1484.80	71.73	48.13	25.73	-40.06	57.40	33.80	74.00	54.00	16.60	20.20	H	285	182
1552.80	80.68	50.90	25.80	-39.98	66.50	36.72	74.00	54.00	7.50	17.28	H	300	200
1696.00	68.82	43.92	25.94	-39.66	55.10	30.20	74.00	54.00	18.90	23.80	H	356	201

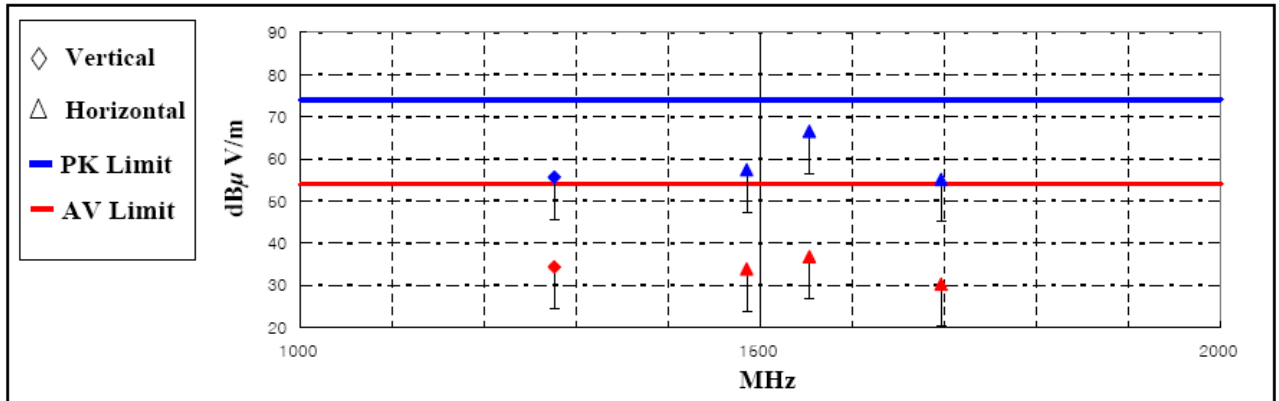

*Comment : AMP/CL_Cable loss value + AMP gain value
 AF : Antenna factor value
 Pol. : H(Horizontal), V(Vertical)

< Fig 9. Radiated emission result (1 000 MHz ~ 2 000 MHz)>



7. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

$$\begin{aligned} \text{Class B Limit} &= 250 \mu\text{V} &= 48 \text{ dB}\mu\text{V} \\ \text{Reading} &= -67.8 \text{ dBm (Calibrated level)} \\ \text{Convert to dB}\mu\text{V} &= -67.8 \text{ dBm} + 107 &= 39.2 \text{ dB}\mu\text{V} \\ 10^{(39.2\text{dB}\mu\text{V}/20)} &= 91.2 \mu\text{V} \\ \text{Margin} &= 39.2 - 48 &= -8.8 \\ &= 8.8 \text{ dB below Limit} \end{aligned}$$

7.2 Example 2 :

■ 66.7 MHz

$$\begin{aligned} \text{Class B Limit} &= 100 \mu\text{V}/\text{m} &= 40.0 \text{ dB}\mu\text{V}/\text{m} \\ \text{Reading} &= -76.0 \text{ dBm (Calibrated level)} \\ \text{Convert to dB}\mu\text{V}/\text{m} &= -76.8 \text{ dBm} + 107 &= 31.0 \text{ dB}\mu\text{V}/\text{m} \\ \text{Antenna Factor + Cable Loss} &= 5.8 \text{ dB} \\ \text{Total} &= 36.8 \text{ dB}\mu\text{V}/\text{m} \\ \text{Margin} &= 36.8 - 40.0 &= -3.2 \\ &= 3.2 \text{ dB below Limit} \end{aligned}$$



8. Recommendation & conclusion

The data collected shows that the **LG Electronics Inc. LCD TV/Monitor (Model Name: 32CL40-UA)** was complies with §15.107 and 15.109 of the FCC Rules.