

## Test Report for FCC

FCC ID:BEJ42LG50DCUG

Report Number		ESTF150810-001			
Applicant	Company name	LG Electronics USA			
	Address	1000 Sylvan Avenue Englewood Cliffs, NJ 07632			
	Telephone	847-941-8373			
Product	Product name	LCD TV/MONITOR			
	Model name	42LG50DC-UG	Manufacturer	LG Electronics Inc.	
	Serial number	NONE	Country of origin	KOREA	
Test date	29-Sep-08		Date of issue	2-Oct-08	
Testing location	ESTECH. Co., Ltd. 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea				
Standard	FCC PART 15 2007 , ANSI C 63.4 2003 , ICES-003				
Test item	Conducted Emission	Class A	Class B	Test result	OK
	Radiated Emission	Class A	Class B	Test result	OK
Measurement facility registration number		94696			
Tested by	Senior Engineer J.H.Kim		(Signature)		
Reviewed by	Engineering Manager J.M.Yang		(Signature)		
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable				
<p>* Note</p> <ul style="list-style-type: none"> <li>- This test report is not permitted to copy partly without our permission</li> <li>- This test result is dependent on only equipment to be used</li> <li>- This test result based on a single evaluation of one sample of the above mentioned</li> </ul>					

## Contents

1. Laboratory Information .....	3
2. Description of EUT .....	4
3. Test Standards .....	5
4. Measurement condition .....	6
5. Measurement of radiated emission .....	8
5.1 Measurement equipment .....	8
5.2 Environmental conditions .....	8
5.3 Test data .....	9
5.4 Test data .....	10
6. Measurement of conducted emission .....	11
6.1 Measurement equipment .....	11
6.2 Environmental conditions .....	11
6.3 Test data .....	12
7. Photographs of test setup .....	13
8. Photographs of EUT .....	15

Appendix 1. Spectral diagram



## 1. Laboratory Information

### 1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report. ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

### 1.2 Test Lab.

Corporation Name : ESTECH Co. Ltd

Head Office : Rm 1015, World Venture Center II, 426-5, Gasan-dong, Geumcheon-gu, Seoul, Korea  
(Safety & Telecom. Test Lab)

EMC Test Lab : 58-1 Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea  
97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea

### 1.3 Official Qualification(s)

MIC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE



**ESTECH Co., Ltd.**

Rm 1015, World Venture Center 11,  
426-5 Gasan-dong, Guncheon-gu,  
Seoul, 158-803, Korea



**Electromagnetic  
Interference  
Test Report**

## 2. Description of EUT

### 2.1 Summary of Equipment Under Test

Product Name : LCD TV/MONITOR  
 Model Number : 42LG50DC-UG  
 Serial Number : NONE  
 Manufacturer : LG Electronics Inc.  
 Country of origin : KOREA  
 Rating : INPUT:AC100-240V ~ 50 /60Hz  
 Receipt Date : 2008-09-24  
 X-tal lists : 4MHz, 12MHz, 25MHz

### 2.2 General descriptions of EUT

MODELS		37LG50 (37LG50-UG)	42LG50 (42LG50-UG) 42LG50DC (42LG50DC-UG)	Resolution	Horizontal Frequency(KHz)	Vertical Frequency(Hz)
Dimensions (Width x Height x Depth)	With stand	36.8 x 26.9 x 11.5 inches 936.4 x 685.4 x 293.4 mm	40.7 x 28.9 x 11.5 inches 1034.0 x 735.0 x 294.0 mm	640x350	31.468	70.09
	Without stand	36.8 x 24.1 x 3.4 inches 936.4 x 612.8 x 88.0 mm	40.7 x 26.1 x 3.5 inches 1034.0 x 663.0 x 91.0 mm	720x400	31.469	70.08
Weight	With stand	40.3 pounds / 18.3 kg	54.0 pounds / 24.5 kg	640x480	31.469	59.94
	Without stand	34.3 pounds / 15.6 kg	48.5 pounds / 22.0 kg			
Power requirement		AC100-240V ~ 50/60Hz		800x600	35.156 37.879	56.25 60.31
Television System		NTSC-M, ATSC, 64 & 256 QAM				
Program Coverage		VHF 2-13, UHF 14-69, CATV 1-135, DTV 2-69, CADTV 1-135		1024x768	48.363 56.476	60.00 70.06
External Antenna Impedance		75 ohm		1280x768	47.776	59.87
Environment condition	Operating Temperature	32 ~ 104°F (0 ~ 40°C)		1280x1024	63.981	60.02
	Operating Humidity	Less than 80%		1360x768	47.712	60.015
	Storage Temperature	-4 ~ 140°F (-20 ~ 60°C)		1600x1200	75.00	60.00
	Storage Humidity	Less than 85%		1920x1080 RGB-PC	62.95	55.96
				1920x1080 HDMI-PC	67.5	60.00



### 3. Test Standards

#### **Test Standard : FCC PART 15 (2007) & ICES-003**

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

#### **Test Method : ANSI C 63.4 (2003)**


This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

## 4. Measurement Condition

### 4.1 EUT Operation.

- \* The EUT was in the following operation mode during all testing
- \* The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission
- \* After setting as test arrangement diagram, we tested the EUT under continuous displaying "H" character and playing Audio out /Video

### 4.2 Configuration and Peripherals

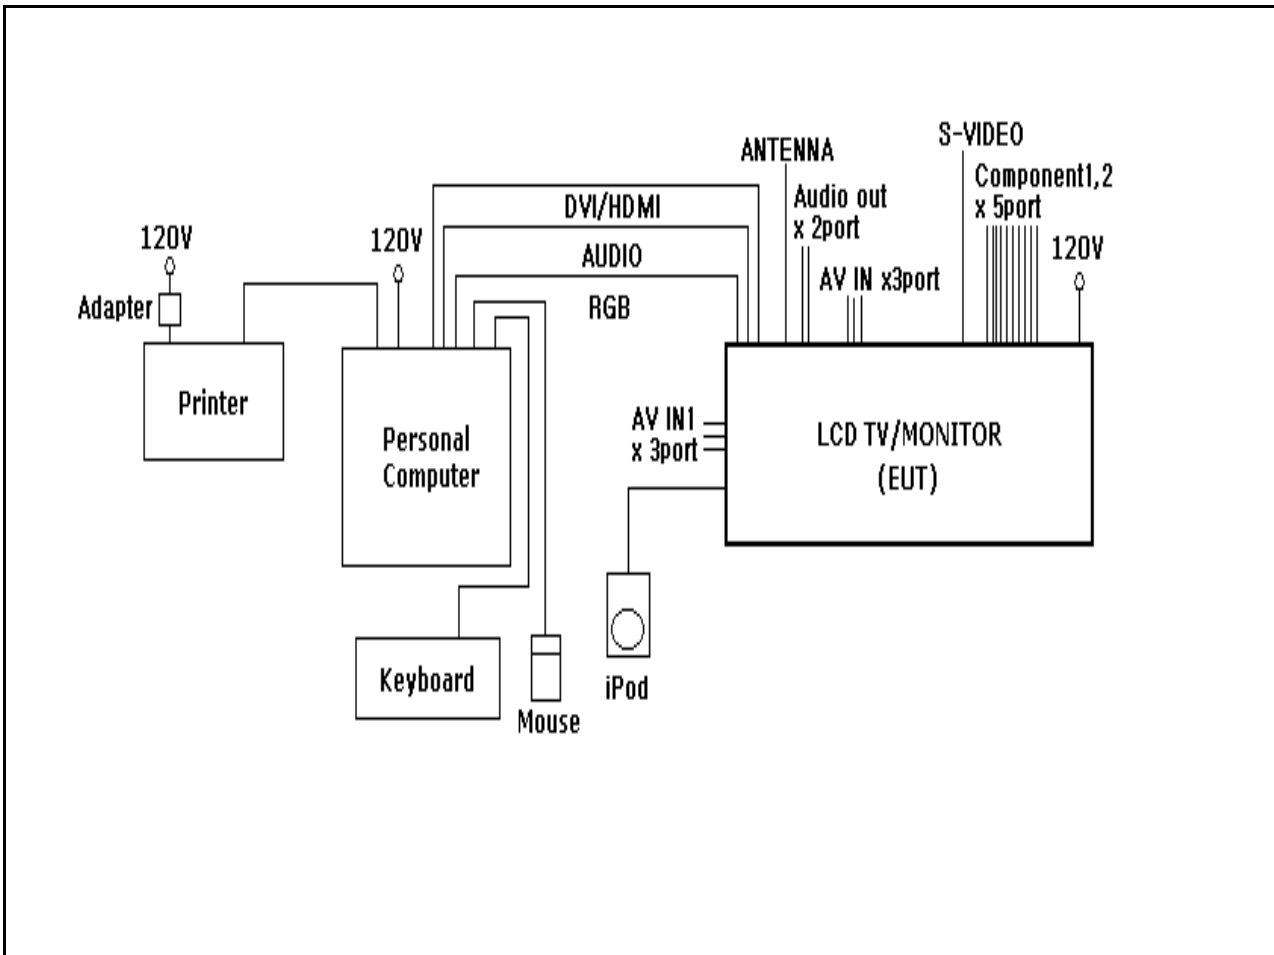

### 4.3 EUT and Support equipment

Equipment Name	Model	S/N	Manufacturer	Remark (FCC ID)
LCD TV/MONITOR	42LG50DC - UG	NONE	LG Electronics Inc.	EUT
Personal Computer	DCGAF	HKKPHBX	Dell Inc.	-
Printer	CB634A	TH7C6326RY	Hewlett - Packard	-
Adapter	0957 - 2231	07J0856872	Bestec DongGuan Electronics Co.,Ltd.	-
Mouse	Wheel Mouse Optical	3902C693	Mocrosoft	-
Keyboard	SKG - 220C	TAKL217007P	MONTERY INTERNATIONAL CORP.	-
iPod	A1136	9C6453A6V9K	Apple Computer Inc.	-

### 4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
LCD TV/MONITOR	RGB	Personal Computer	RGB	2	Y	
LCD TV/MONITOR	DVI	Personal Computer	DVI	2	Y	
LCD TV/MONITOR	AUDIO	Personal Computer	AUDIO	2	N	
LCD TV/MONITOR	S-VIDEO	-	-	2	N	
LCD TV/MONITOR	ANTENNA	-	-	2	N	
LCD TV/MONITOR	Audio out x2port	-	-	2	N	
LCD TV/MONITOR	AV IN1 x3port	-	-	2	N	
LCD TV/MONITOR	AV IN2 x3port	-	-	2	N	
LCD TV/MONITOR	Component1 x 5port	-	-	2	N	
LCD TV/MONITOR	Component2 x 5port	-	-	2	N	
LCD TV/MONITOR	USB	iPod	USB	1	Y	
Personal Computer	USB	Printer	USB	2	Y	
Personal Computer	USB	Mouse	USB	2	Y	
Personal Computer	USB	Keyboard	USB	2	Y	
Printer	Power	Adapter	-	2	N	

## 5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC Part 15 (2007) & ICES-003. The test setup was made according to ANSI C 63.4 (2003) on an open test site, which allows a 3m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

### 5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
Test Receiver	ESVS10	Rohde & Schwarz	838562/002	2009. 1. 24
Spectrum Analyzer	R3261C	ADVANTEST	61720116	2009. 4. 22
LogBicon Antenna	VULB 9160	Schwarzbeck	3142	2009. 5. 15
Amplifier	8447F	HP	2805A02972	2009. 6. 26
Turn Table	2087	EMCO	2129	-
Antenna Mast	2070-01	EMCO	9702-203	-
ANT Mast Controller	2090	EMCO	1535	-
Turn Table Controller	2090	EMCO	1535	-

### 5.2 Environmental Condition

Test Place : Open site(3m)  
 Temperature (°C) : 27  
 Humidity (%) : 52 %





## 6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 to 30 MHz was measured in accordance to FCC Part 15 (2007) & ICES-003. The test setup was made according to ANSI C 63.4 (2003) in a shielded. The EUT was placed on a non-conductive table at least 80 cm above the ground plane. A grounded vertical reference plane was positioned in a distance of 40 cm from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthed by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

### 6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
LISN	NNLA8120A	Schwarzbeck	8120161	2009. 2. 28
LISN	ESH3-Z5	Schwarzbeck	838979/010	2009. 2. 28
TEST Receive	ESPI7	Rohde & Schwarz	100185	2009. 8. 27
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	-

### 6.2 Environmental Condition

Test Place : Shield Room  
 Temperature (°C) : 21  
 Humidity (%) : 47 %

### 6.3 Test data

Test Date : 29-Sep-08

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Result (dB)
0.19	0.17	0.8	N	63.86	36.86	37.82	53.86	34.22	35.18
0.20	0.17	0.8	H	63.82	36.22	37.18	53.82	31.69	32.65
0.29	0.21	0.9	N	60.41	40.21	41.29	50.41	37.77	38.85
0.41	0.20	0.8	N	57.71	36.73	37.76	47.71	30.34	31.37
0.42	0.20	0.8	H	57.49	39.22	40.25	47.49	31.85	32.88
0.59	0.20	0.8	N	56.00	33.25	34.24	46.00	30.64	31.63
0.68	0.20	0.8	N	56.00	29.52	30.52	46.00	26.57	27.57
0.88	0.19	0.8	H	56.00	26.82	27.82	46.00	22.84	23.84
0.89	0.19	0.8	N	56.00	25.64	26.64	46.00	21.49	22.49
1.37	0.20	0.8	H	56.00	25.14	26.15	46.00	20.41	21.42
1.38	0.20	0.8	N	56.00	24.36	25.37	46.00	18.03	19.04
11.45	0.57	1.3	N	60.00	29.37	31.28	50.00	23.18	25.09
11.73	0.58	1.3	H	60.00	26.19	28.11	50.00	20.34	22.26
12.00	0.60	1.3	H	60.00	27.50	29.42	50.00	22.73	24.65
12.14	0.60	1.3	N	60.00	30.24	32.17	50.00	24.32	26.25
23.77	0.89	1.9	N	60.00	26.91	29.72	50.00	25.83	28.64
24.38	0.90	2.0	H	60.00	26.00	28.88	50.00	25.89	28.77
Remark	H : Hot Line, N : Neutral Line *After connect with ferrite cores to RGB cable, tested conducted emission.								

## 7. Photographs of test setup

### 7.1 Setup for Radiated Test : 30 ~ 1000 MHz

[ Front ]



[ Rear ]



## 7.2 Setup for Conducted Test : 0.15 ~ 30 MHz

[ Front ]



[ Rear ]



## 8. Photographs of EUT

[ Front ]



[ Rear ]




# Appendix 1. Spectral diagram

\*HOT



RBW 9 kHz  
MT 1 s

Att 10 dB AUTO PREAMP OFF

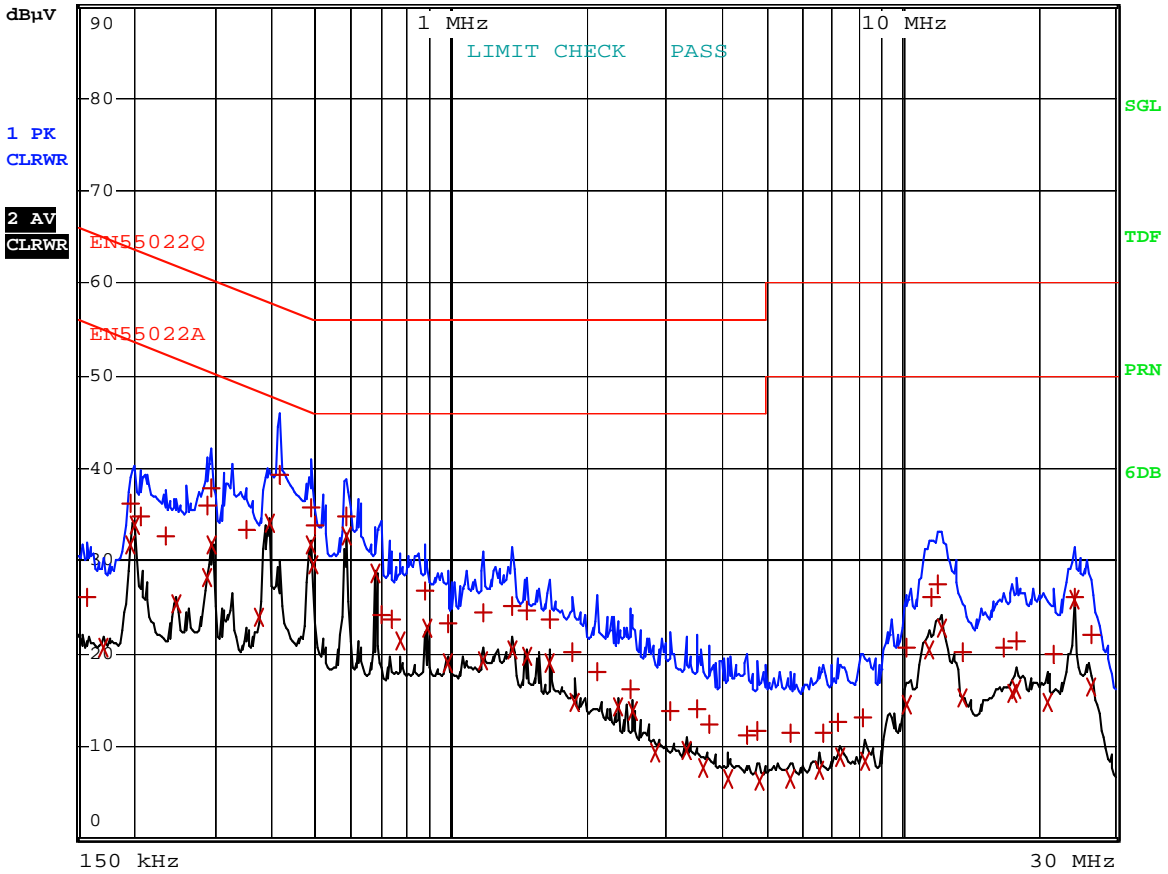


Comment: 42LG50DC-UG\_HOT  
Date: 29.SEP.2008 17:05:54

\*NEUTRAL



RBW 9 kHz  
MT 1 s

Att 10 dB AUTO PREAMP OFF

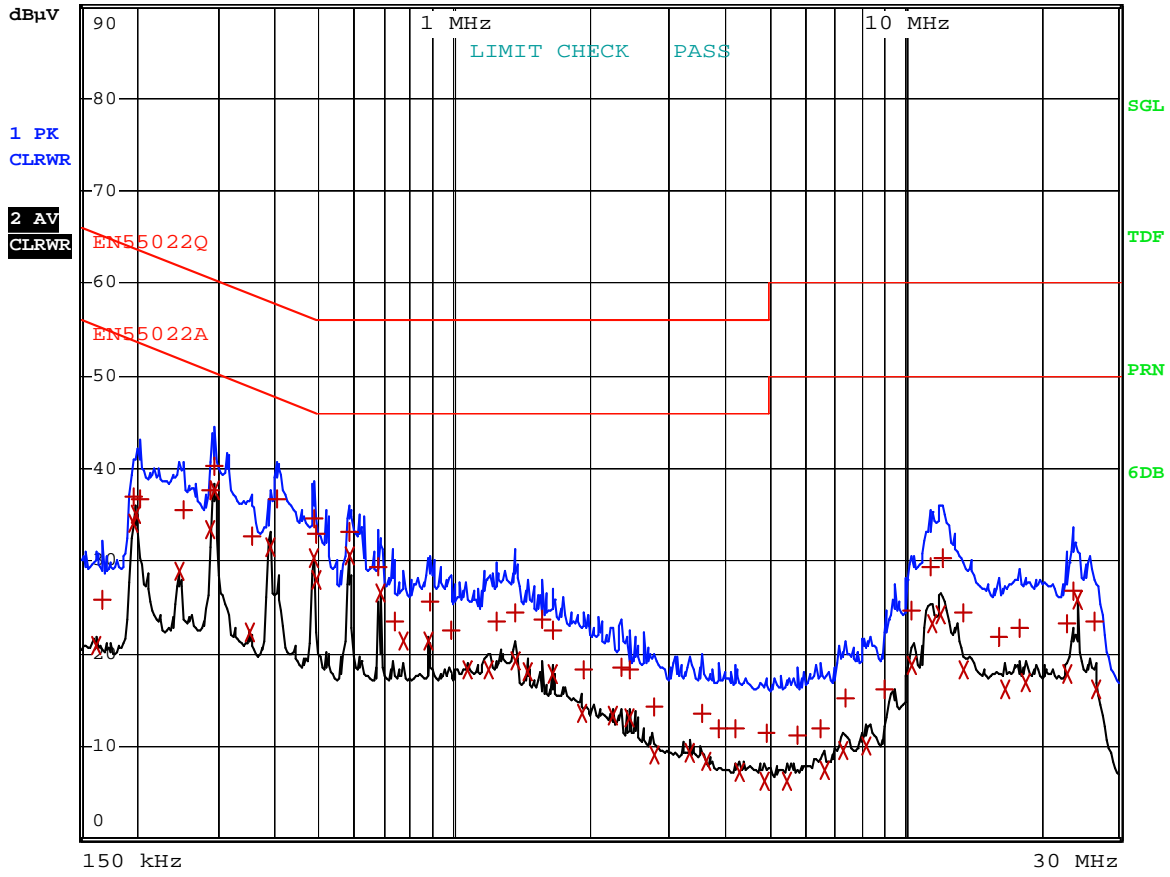

Comment: 42LG50DC-UG\_NEUTRAL  
Date: 29.SEP.2008 16:58:41