

APPLICATION FOR CERTIFICATION

On Behalf of

LG Electronics Inc.

Pocket Photo

Models No. : (1)PD239 (2)PD239W (3)PD239Y (4)PD239P (5)PD239T
(6)PD239TW (7)PD239TY (8)PD239TP(9)PD239SP

FCC ID : BEJ9QK-DMPD239

IC : 2703H-DMPD239

Brand : LG

ID	Application Model No.
FCC ID : BEJ9QK-DMPD239	(1)PD239 (2)PD239W (3)PD239Y (4)PD239P (5)PD239T (6)PD239TW (7)PD239TY (8)PD239TP(9)PD239SP
IC : 2703H-DMPD239	(1)PD239 (2)PD239W

Prepared for : LG Electronics Inc.
19-1, Cheongho-ri, Jinwi-myeon,
Pyeongtaek-si, Gyeonggi-do,
451-713 Korea

Prepared By : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou Dist., New Taipei
City 244, Taiwan

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1M1307284
Report Number : EM-F1020578
Date of Test : Jul. 30 ~ Aug. 02, 2013
Date of Report : Aug. 05, 2013

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT)	5
1.2. Tested Supporting System Details	6
1.3. Description of Test Facility	7
1.4. Measurement Uncertainty	7
2. POWERLINE CONDUCTED EMISSION MEASUREMENT	8
2.1. Test Equipment	8
2.2. Block Diagram of Test Setup	8
2.3. Powerline Conducted Emission Limit (§15.207, RSS-Gen §7.2.2/Table 2)	8
2.4. Operating Condition of EUT	9
2.5. Test Procedure	9
2.6. Powerline Conducted Emission Measurement Results	9
3. RADIATED EMISSION MEASUREMENT	12
3.1. Test Equipment	12
3.2. Block Diagram of Test Setup	13
3.3. Radiated Emission Limits (§15.209, RSS-210 §2.7/Table 2)	14
3.4. Operating Condition of EUT	15
3.5. Test Procedure	15
3.6. Radiated Emission Measurement Results	16
4. 20dB BANDWIDTH MEASUREMENT	25
4.1. Test Equipment	25
4.2. Block Diagram of Test Setup	25
4.3. Specification Limits [§15.247(a)(1), RSS-210 §A8.2 (a)]	25
4.4. Operating Condition of EUT	25
4.5. Test Procedure	25
4.6. Test Results	26
5. CARRIER FREQUENCY SEPARATION MEASUREMENT	30
5.1. Test Equipment	30
5.2. Block Diagram of Test Setup	30
5.3. Specification Limits [§15.247(a)(1), RSS-210 §A8.2 (b)]	30
5.4. Operating Condition of EUT	30
5.5. Test Procedure	30
5.6. Test Results	31
6. TIME OF OCCUPANCY MEASUREMENT	36
6.1. Test Equipment	36
6.2. Block Diagram of Test Setup	36
6.3. Specification Limits [§15.247(a)(1)(iii), RSS-210 §A8.2 (d)]	36
6.4. Operating Condition of EUT	36
6.5. Test Procedure	36
6.6. Test Results	37
7. NUMBER OF HOPPING CHANNELS MEASUREMENT	45
7.1. Test Equipment	45
7.2. Block Diagram of Test Setup	45
7.3. Specification Limits [§15.247(a)(1)(iii), RSS-210 §A8.2 (d)]	45
7.4. Operating Condition of EUT	45
7.5. Test Procedure	45
7.6. Test Results	46

8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	48
8.1. Test Equipment.....	48
8.2. Block Diagram of Test Setup.....	48
8.3. Specification Limits [§15.247(b)-(1), RSS-210 §A8.4 (2)].....	48
8.4. Operating Condition of EUT	48
8.5. Test Procedure	48
8.6. Test Results.....	49
9. EMISSION LIMITATIONS MEASUREMENT	53
10. BAND EDGES MEASUREMENT.....	54
10.1. Test Equipment.....	54
10.2. Block Diagram of Test Setup	54
10.3. Specification Limits [§15.247(c), RSS-210 §A8.5]	54
10.4. Operating Condition of EUT	54
10.5. Test Procedure	54
10.6. Test Results	55
11. DEVIATION TO TEST SPECIFICATIONS	60
12. PHOTOGRAPHS	61
12.1. Photos of Conducted Disturbance Measurement.....	61
12.2. Photos of Radiated Emission Measurement at Semi-Anechoic Chamber.....	62
12.3. Photo of Section RF Conducted Measurement	63

TEST REPORT CERTIFICATION

Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
Factory : DS GLOBAL, Inc.
EUT Description : Pocket Photo
FCC ID : **BEJ9QK-DMPD239**
IC : **2703H-DMPD239**
(A) Model No. : (1)PD239 (2)PD239W (3)PD239Y
(4)PD239P (5)PD239T (6)PD239TW
(7)PD239TY (8)PD239TP(9)PD239SP
(B) Serial No. : N/A
(C) Power Supply : DC 5V
(D) Test Voltage : (1)AC 120V, 60Hz
(Via Switching Adapter)
(2)DC 7.4V (Battery)
(3)DC 5V (USB port)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C, Oct 2012
(FCC CFR 47 Part 15C, §15.205, §15.207, §15.209 and §15.247)
ANSI C63.4/2003
FCC Public Notice DA 00-705, Mar. 2000

Industry Canada Rules and Regulations RSS-Gen (Issue 3), December 2010 and
RSS-210 (Issue 8), December 2010

The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 Subpart C and Canada RSS-Gen, RSS-210 limits.


The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC Part 15 and Industry Canada RSS-Gen, RSS-210 standards.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Jul. 30 ~ Aug. 02, 2013

Date of Report : Aug. 05, 2013

Producer : 
(Annie Yu/Administrator)

Signatory : 
(Leon Liu/Deputy General Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product	Pocket Photo			
Model Number	(1)PD239 (2)PD239W (3)PD239Y (4)PD239P (5)PD239T (6)PD239TW (7)PD239TY (8)PD239TP(9)PD239SP The differences of above models are as follows:			
	Difference Model No.	Appearance Color	Sales Customers	Adapter
	PD239	White or Yellow or Pink	Different	With
	PD239W	White		With
	PD239Y	Yellow		With
	PD239P	Pink		With
	PD239T	White or Yellow or Pink		Without
	PD239TW	White		Without
	PD239TY	Yellow		Without
	PD239TP	Pink		Without
	PD239SP	Pink (Special Version)		With
	The M/N PD239 was tested in this report.			
Serial Number	N/A			
Brand Name	LG			
Applicant	LG Electronics Inc. 19-1, Cheongho-Ri, Jinwuy-Myeon, Pyeongtaek-City, Gyeonggi-Do, 451-713, Korea			
Manufacturer	LG Electronics Inc. 19-1, Cheongho-Ri, Jinwuy-Myeon, Pyeongtaek-City, Gyeonggi-Do, 451-713, Korea			
Factory	DS GLOBAL, Inc. Byeoksan Digital Valley 2 Cha #1212, 481-10, Gasan-dong, Geumcheon-gu, Seoul, Korea			
FCC ID	BEJ9QK-DMPD239			
IC	2703H-DMPD239			
Communication	Bluetooth 4.0 + NFC(Passive)			
Fundamental Range	Bluetooth: 2402MHz ~ 2480MHz NFC: 13.56MHz			
Frequency Channel	Bluetooth: 79 channels (GFSK,π/4DQPSK, 8-DPSK) NFC: 1 Channel			
Radio Technology	Bluetooth: FHSS (GFSK,π/4DQPSK, 8-DPSK)			
Data Transfer Rate	Bluetooth: 1/2/3Mbps			

Switching Adapter	LG (Manufacturer: HONOR) M/N ADS-5MA-06A 05050GPCU Input: AC100-240V, 50/60Hz, Max. 0.3A Output: DC5V, 1.0A
USB Cable	Shielded, Detachable, 1.2m
Date of Receipt of Sample	Jul. 29, 2013
Date of Test	Jul. 30 ~ Aug. 02, 2013

1.2. Tested Supporting System Details

1.2.1. POWER SOCKET (For Conducted Disturbance tested)

Model Number : N/A
 Serial Number : N/A
 Manufacturer : N/A
 AC Power Cord : Non-Shielded, Detachable, 1.2m (2 Pin)

1.2.2. MOBILE PHONE (For Conducted Disturbance tested)

Model Number : GT-I9100
 Serial Number : N/A
 Manufacturer : SAMSUNG

1.2.3. NOTEBOOK PC (For Radiated Disturbance and Conducted tested)

Model Number : N20
 Serial Number : N/A
 Manufacturer : ASUS
 AC Adapter : ASUS, M/N SADP-65NB BB
 DC Cord: Non-Shielded, Undetachable, 1.8m
 AC Power Cord : Non-Shielded, Detachable, 1.8m

1.2.4. USB Mouse (For Radiated Disturbance tested)

Model Number : M-UV69a
 Serial Number : HCB60403100
 FCC ID : By DoC
 BSMI ID : T4A126
 Manufacturer : Logitech (Brand : ASUS)
 Data Cable : Shielded, Undetachable, 1.8m

1.3. Description of Test Facility

Name of Firm : **AUDIX Technology Corporation**
EMC Department
 No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan

Test Location & Facility : **No. 7 Shielded Room**
 (C7/AC) No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan

Semi-Anechoic Chamber
 No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan
 May 11, 2012 File on
 Federal Communication Commission
 Registration Number: 90993

NVLAP Lab. Code : 200077-0

TAF Accreditation No : 1724

1.4. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conduction Test	150kHz~30MHz	±1.73dB
Radiation Test (Distance: 3m)	30MHz~300MHz	±2.91dB
	300MHz~1000MHz	±2.94dB
	Above 1GHz	± 5.02dB

Remark : Uncertainty = $k_{uc}(y)$

Test Item	Uncertainty
20dB Bandwidth	± 0.2kHz
Carrier Frequency Separation	± 0.2kHz
Time Of Occupancy	± 0.03sec
Maximum peak Output power	± 0.52dBm
Emission Limitations	± 0.13dB
Band Edges	± 0.13dB


2. POWERLINE CONDUCTED EMISSION MEASUREMENT

2.1. Test Equipment

The following test equipment were used during the power line conducted measurement: (No. 7 Shielded Room)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESCI	101276	Apr. 10, 13'	Apr. 09, 14'
2.	A.M.N.	R & S	ENV4200	100169	May 06, 13'	May 05, 14'
3.	L.I.S.N.	Kyoritsu	KNW-407	8-881-13	Jan. 31, 13'	Jan. 30, 14'
4.	Pulse Limiter	R & S	ESH3-Z2	101495	Feb. 02, 13'	Feb. 01, 14'

2.2. Block Diagram of Test Setup

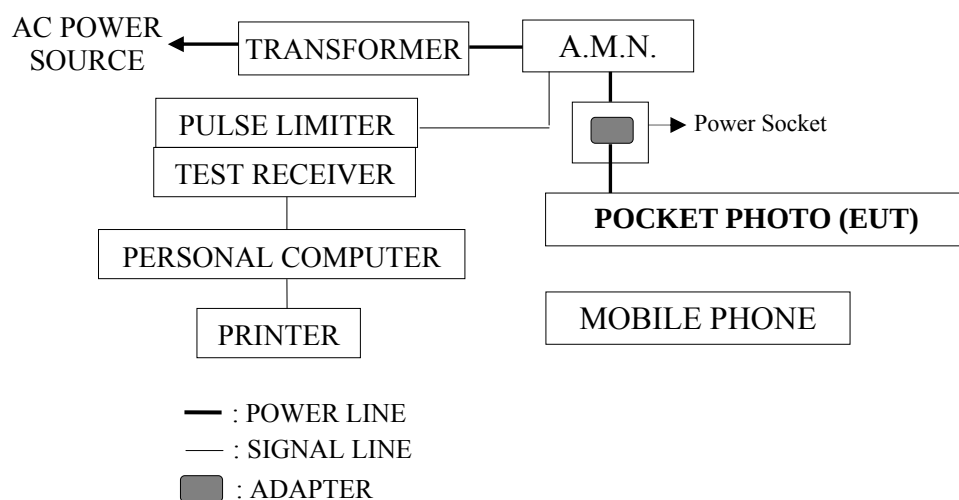

EUT : Pocket Photo

2.3. Powerline Conducted Emission Limit (§15.207, RSS-Gen §7.2.2/Table 2)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

2.: The lower limit applies at the band edges.

2.4. Operating Condition of EUT

- 2.4.1. Setup the **EUT (Pocket Photo)** as shown on 2.2.
- 2.4.2. Turn on the power of all equipment.
- 2.4.3. The **EUT (Pocket Photo)** was linked to Switching Adapter, the EUT on charging and transmitting function during all testing.

2.5. Test Procedure

The EUT link AC adapter was put on table which was above the ground by 80cm and power cord was connected to power mains through an Artificial Mains Network (A.M.N.). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.) Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions simulators of the interface cables should be manipulated according to FCC ANSI C63.4-2003 , RSS-Gen and RSS-210 during conducted measurement.

The bandwidth of the R & S Test Receiver ESCI was set at 9kHz.

The frequency range from 150kHz to 30MHz was checked.

All the final readings from Test Receiver were measured with the Quasi-Peak detector and Average detector. (Remark: If the Average limit is met when using a Quasi-Peak detector, the Average detector is unnecessary)

2.6. Powerline Conducted Emission Measurement Results

PASSED. All emissions not reported below are too low against the prescribed limits.

The EUT was measured during this section testing and all the test results are listed in next pages.

EUT : Pocket Photo M/N : PD239

Test Date : Jul. 31, 2013 Temperature : 25 Humidity : 52%


The details are as follows :

Mode	Reference Test Data	
	Neutral	Line
1.	# 4	# 3



AUDIX TECHNOLOGY Corp. EMC Department
No.53-11, Dingfu, Linkou Dist., New Taipei City
24442, Taiwan R.O.C.
Tel: +886-2-26092133 Fax: +886-2-26099303
Email: emc@audixtech.com

Data: 4 File: D:\test data\REPORT\2013\1M1307XXX\1M1307284-C-D.EM6 (16)

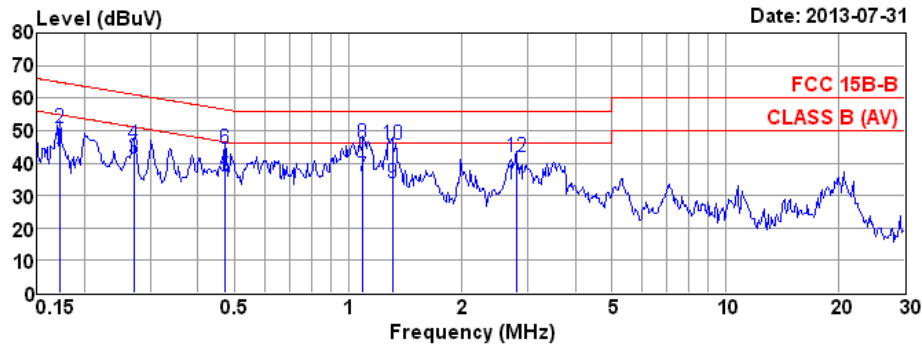

Site no. : No.7 Shielded Room Data no. : 4
Dis. / Ant. : ENV4200 Ant. pol. : NEUTRAL
Limit : FCC 15B-B
Env. / Ins. : 25°C / 52% ESCI (1276) Engineer : Fate
EUT : PD239
Power Rating : 120Vac/60Hz
Test Mode : **Operating**

	Freq. (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	10.23	9.93	20.76	40.92	54.86	13.94	Average
2	0.17	10.23	9.93	30.70	50.86	64.86	14.00	QP
3	0.27	10.20	9.95	21.24	41.39	51.12	9.73	Average
4	0.27	10.20	9.95	25.70	45.85	61.12	15.27	QP
5	0.47	10.16	9.98	15.83	35.97	46.49	10.52	Average
6	0.47	10.16	9.98	24.15	44.29	56.49	12.20	QP
7	1.09	10.14	10.00	16.07	36.21	46.00	9.79	Average
8	1.09	10.14	10.00	25.93	46.07	56.00	9.93	QP
9	1.31	10.14	10.01	13.84	33.99	46.00	12.01	Average
10	1.31	10.14	10.01	25.54	45.69	56.00	10.31	QP
11	2.79	10.14	10.02	13.36	33.52	46.00	12.48	Average
12	2.79	10.14	10.02	21.63	41.79	56.00	14.21	QP


Remarks: 1. Emission Level=
AMN Factor + Cable Loss(including pulse limiter)+ Reading.
2. If the average limit is met when using a quasi-peak detector
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.



AUDIX TECHNOLOGY Corp. EMC Department
No.53-11, Dingfu, Linkou Dist., New Taipei City
24442, Taiwan R.O.C.
Tel: +886-2-26092133 Fax: +886-2-26099303
Email: emc@audixtech.com

Data: 3

File: D:\test data\REPORT\2013\IC1M1307XXX\IC1M1307284-C-D.EM6 (16)

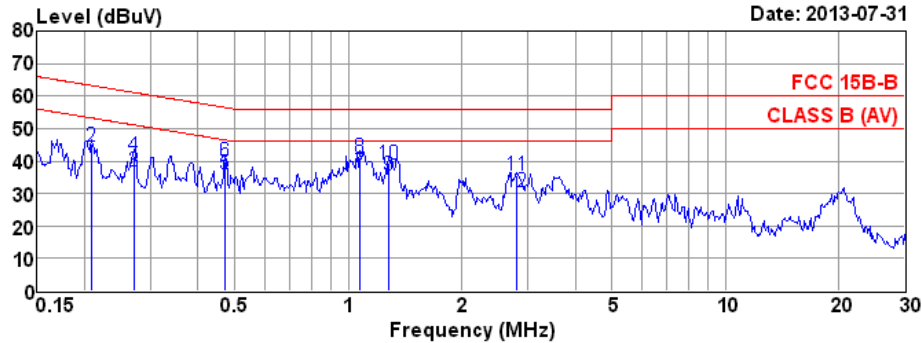

Site no. : No.7 Shielded Room Data no. : 3
Dis. / Ant. : ENV4200 Ant. pol. : LINE
Limit : FCC 15B-B
Env. / Ins. : 25°C / 52% ESCI (1276) Engineer : Fate
EUT : PD239
Power Rating : 120Vac/60Hz
Test Mode : **Operating**

	Freq. (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.21	10.24	9.94	18.67	38.85	53.27	14.42	Average
2	0.21	10.24	9.94	24.31	44.49	63.27	18.78	QP
3	0.27	10.22	9.95	16.61	36.78	51.12	14.34	Average
4	0.27	10.22	9.95	21.53	41.70	61.12	19.42	QP
5	0.47	10.20	9.98	15.80	35.98	46.49	10.51	Average
6	0.47	10.20	9.98	19.46	39.64	56.49	16.85	QP
7	1.07	10.18	9.99	16.18	36.35	46.00	9.65	Average
8	1.07	10.18	9.99	21.10	41.27	56.00	14.73	QP
9	1.28	10.18	10.00	15.22	35.40	46.00	10.60	Average
10	1.28	10.18	10.00	18.78	38.96	56.00	17.04	QP
11	2.81	10.18	10.02	15.19	35.39	46.00	10.61	Average
12	2.81	10.18	10.02	10.17	30.37	56.00	25.63	QP

Remarks: 1. Emission Level=

AMN Factor + Cable Loss(including pulse limiter)+ Reading.

2. If the average limit is met when using a quasi-peak detector the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

3.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 12'	Aug. 06, 13'
2.	Test Receiver	R & S	ESCS30	100338	Jul. 01, 13'	Jun. 30, 14'
3.	Amplifier	HP	8447D	2944A06305	Feb. 19, 13'	Feb. 18, 14'
4.	Log Periodic Antenna	Schwarzbeck	UHALP 9108-A	0810	Mar. 02, 13'	Mar. 01, 14'
5.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 02, 13'	Mar. 01, 14'


3.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 12'	Aug. 06, 13'
2.	Test Receiver	R & S	ESCS30	100338	Jul. 01, 13'	Jun. 30, 14'
3.	Pre-Amplifier	HP	8449B	3008A02676	Mar. 01, 13'	Feb. 28, 14'
4.	2.4GHz Notch Filter	K&L	7NSL10-24 41.5E130.5 -00	1	Jun. 13, 13'	Jun. 12, 14'
5.	3G High Pass Filter	Microwave Circuits	H3G018G1	484796	Jun. 13, 13'	Jun. 12, 14'
6.	Horn Antenna	EMCO	3115	9112-3775	May 07, 13'	May 06, 14'
7.	Horn Antenna	EMCO	3116	2653	Oct. 15, 12'	Oct. 14, 13'

3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

[Charge mode]

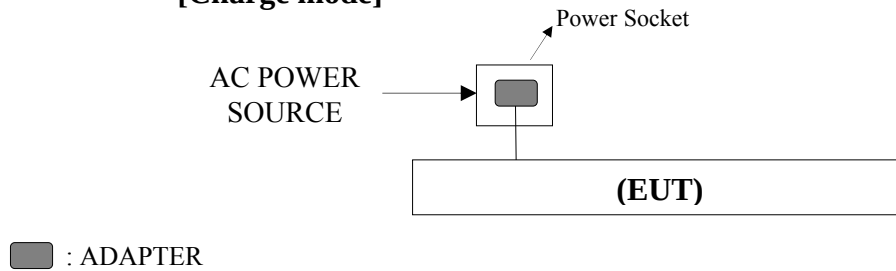

EUT: POCKET PHOTO


[Stand-Alone Mode]




EUT: POCKET PHOTO

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

ANTENNA TOWE

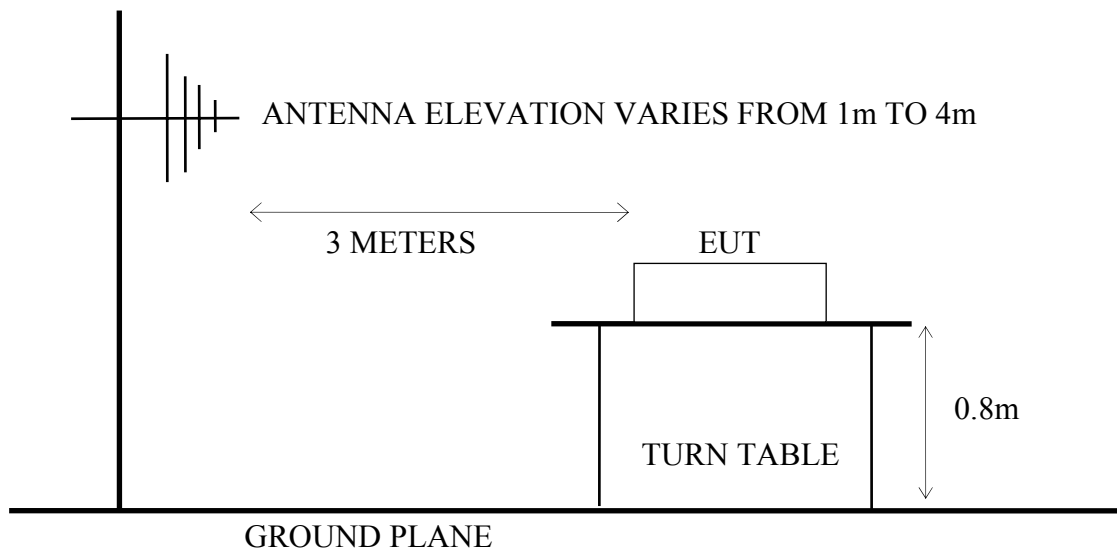

3.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

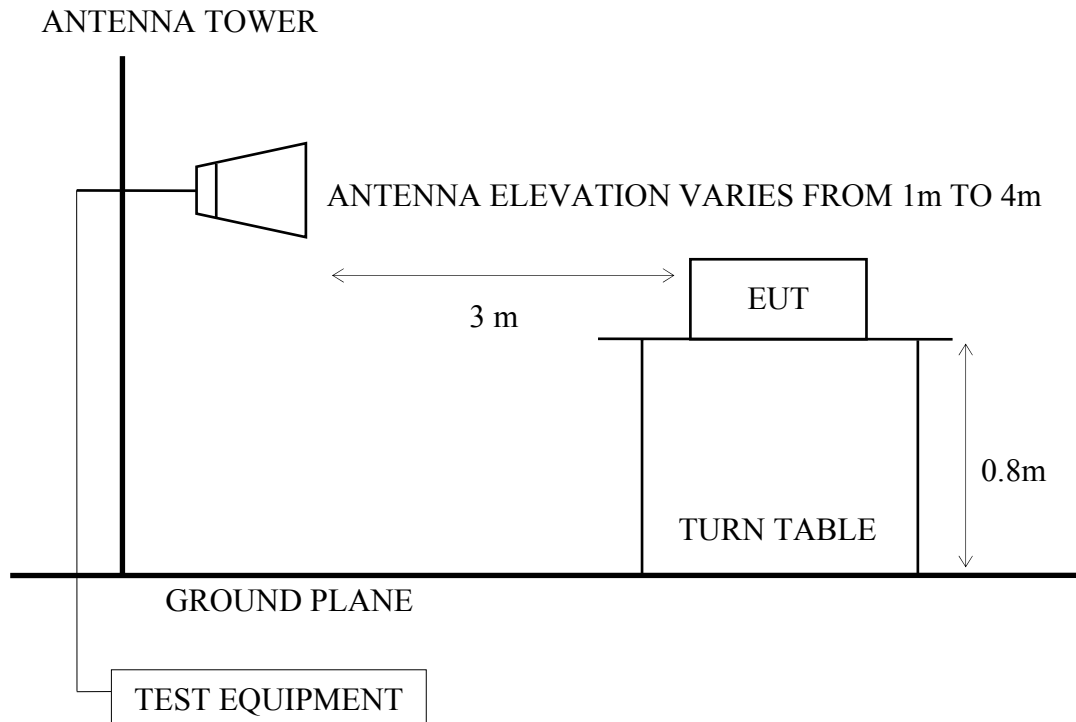

3.3. Radiated Emission Limits (§15.209, RSS-210 §2.7/Table 2)

Frequency MHz	Distance Meters	Field Strengths Limits	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

- Remark :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
 - (5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35 (b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

3.4. Operating Condition of EUT

- 3.4.1. Set up the EUT (Pocket Photo) as shown on 3.2.1.
- 3.4.2. To turn on the power of all equipments.
- 3.4.3. The EUT set to continuously transmit signals at 2402MHz, 2441MHz and 2480MHz during all test time. (The test program is cmd.exe)

3.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003, RSS-Gen and RSS-210 regulation, and the measurement guideline was according to FCC Public Notice DA 00-705.

The bandwidth of the R&S Test Receiver ESCS30 was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked.

Above 1GHz was measured with peak and average detector. For frequency from 1GHz to 25GHz, we checked it in 1 meter distance and with a shorter cable 2 meter instead of original's. There is no signal exist.

3.6. Radiated Emission Measurement Results

PASSED. (All the emissions not reported below are too low against the prescribed limits.)

EUT : Pocket Photo

M/N : PD239

Test Date : Aug. 02, 2013

Temperature : 26

Humidity : 61%

The **EUT (Pocket Photo)** can be operated with battery (DC 7.4V), USB port(DC 5V) or switching power Adapter(120Vac transfer to DC 5V), after pre-scanning stand(x), lie(y) and side(z) axes that y axis is the worst axis. We do TX test in lie(y) configuration and associated with switching supply for charge mode.

For Frequency Range 30MHz-1000MHz:

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only the worst case (8-DPSK) was reported in this report.]

The EUT with following test modes were performed during this section testing and all the test results are listed in section 3.6.1.

No.	Test Voltage	Channel	Frequency	Test Mode	Reference Test Data No.	
					Horizontal	Vertical
1	AC 120V/60Hz (Via Switching Power Supply)	---	---	Charge	# 2	# 1
2	DC 7.4V (With Batter)	CH 0	2402MHz	Transmit	# 12	# 11
3		CH 39	2441MHz		# 12	# 11
4		CH 78	2480MHz		# 12	# 11

* Type of modulation: 8-DPSK.

* All above final readings were measured with Quasi-Peak detector.

For Frequency above 1GHz:

Remark : The emissions (up to 25GHz) not reported are too low to be measured.

For Restricted Bands:

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only the worst case (8-DPSK) was reported in this report.]

The EUT with following test modes was performed during this section testing and all the test results are listed in section 3.6.3. (The restricted bands defined in part 15.205(a))

No.	Test Voltage	Channel	Frequency	Test Mode	Reference Test Data No.	
					Horizontal	Vertical
1	DC 7.4V (With Batter)	CH 0	2402MHz	Transmitting	# 3, 4	# 1, 2
2		CH 78	2480MHz		# 7, 8	# 5, 6

3.6.1. Frequency Range 30MHz-1000MHz Measurement Result

Charge Mode

Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : PD239
 Power Rating : AC120V
 Test Mode : CHARGE

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	203.630	22.01	3.10	6.23	31.34	43.50	12.16	QP
2	756.530	23.59	6.73	0.89	31.20	46.00	14.80	QP
3	969.930	26.83	7.69	0.27	34.80	54.00	19.20	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : PD239
 Power Rating : AC120V
 Test Mode : CHARGE

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	246.310	23.54	3.50	7.16	34.20	46.00	11.80	QP
2	411.210	17.15	4.90	4.24	26.29	46.00	19.71	QP
3	806.000	24.25	7.00	2.41	33.66	46.00	12.34	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Transmit, Frequency: 2402MHz (8-DPSK)

Site no. : A/C Chamber Data no. : 12
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : PD239
 Power Rating : DC7.4V
 Test Mode : TX2402

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	298.690	26.72	3.90	-1.01	29.61	46.00	16.39	QP
2	397.630	17.64	4.80	-1.24	21.20	46.00	24.80	QP
3	774.960	24.26	6.80	-1.51	29.55	46.00	16.45	QP
4	974.780	26.52	7.70	0.29	34.52	54.00	19.48	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 11
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : PD239
 Power Rating : DC7.4V
 Test Mode : TX2402

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	280.260	25.30	3.80	-0.84	28.26	46.00	17.74	QP
2	526.640	19.67	6.90	-0.82	25.75	46.00	20.25	QP
3	863.230	26.09	7.20	-1.36	31.93	46.00	14.07	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Transmit, Frequency: 2441MHz (8-DPSK)

Site no. : A/C Chamber Data no. : 12
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : PD239
 Power Rating : DC7.4V
 Test Mode : TX2441

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	295.780	26.48	4.00	-1.47	29.01	46.00	16.99	QP
2	569.320	21.17	6.50	-1.94	25.73	46.00	20.27	QP
3	859.350	26.01	7.20	-1.49	31.72	46.00	14.28	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 11
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : PD239
 Power Rating : DC7.4V
 Test Mode : TX2441

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	297.720	26.68	3.98	-1.35	29.31	46.00	16.69	QP
2	665.350	22.65	6.40	-1.72	27.34	46.00	18.66	QP
3	967.990	26.90	7.69	-0.56	34.03	54.00	19.97	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Transmit, Frequency: 2480MHz (8-DPSK)

Site no. : A/C Chamber Data no. : 12
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : PD239
 Power Rating : DC7.4V
 Test Mode : TX2480

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	288.020	25.85	3.80	-0.42	29.24	46.00	16.76	QP
2	574.170	21.10	6.44	-1.13	26.40	46.00	19.60	QP
3	967.990	26.90	7.69	-1.02	33.58	54.00	20.42	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 11
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : PD239
 Power Rating : DC7.4V
 Test Mode : TX2480

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	297.720	26.68	3.98	-1.45	29.21	46.00	16.79	QP
2	531.490	19.70	6.90	-1.13	25.47	46.00	20.53	QP
3	861.290	26.09	7.20	-0.71	32.58	46.00	13.42	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.6.2. Restricted Bands Measurement Results

Date of Test : Aug. 02, 2013 Temperature : 26

EUT : Pocket Photo Humidity : 61%


Test Mode : Transmitting Mode, Frequency: 2402MHz (CH0), 8-DPSK

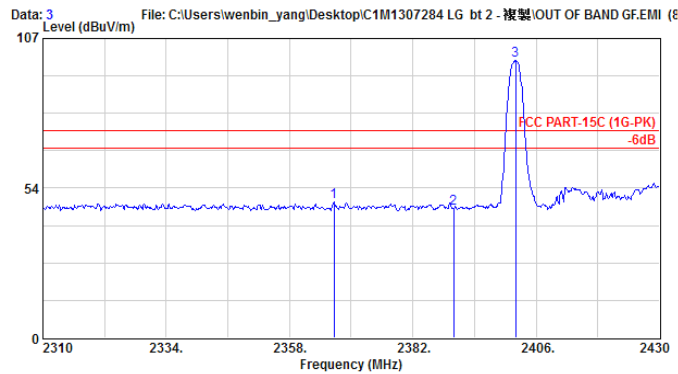

Site no. : A/C Chamber Data no. : 3
Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
Limit : FCC PART-15C (1G-PK)
Env. / Ins. : E4446A 26°C/61% Wenbin_yang
EUT : PD239
Power Rating : DC7.4V
Test Mode : TX2402

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2366.640	28.40	6.31	13.79	48.50	74.00	25.50	Peak
2	2390.000	28.47	6.34	11.36	46.18	74.00	27.82	Peak
3	2402.040	28.47	6.36	64.29	99.12	74.00	-25.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

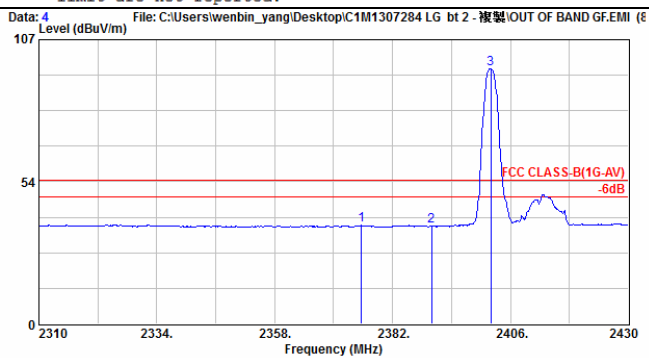

Site no. : A/C Chamber Data no. : 4
Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
Limit : FCC CLASS-B(1G-AV)
Env. / Ins. : E4446A 26°C/61% Wenbin_yang
EUT : PD239
Power Rating : DC7.4V
Test Mode : TX2402


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2375.640	28.43	6.32	2.40	37.15	54.00	16.85	Average
2	2390.000	28.47	6.34	1.96	36.77	54.00	17.23	Average
3	2402.040	28.47	6.36	61.38	96.21	54.00	-42.21	Average @

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Aug. 02, 2013 Temperature : 26

EUT : Pocket Photo Humidity : 61%


Test Mode : Transmitting Mode, Frequency: 2402MHz (CH0) , 8-DPSK

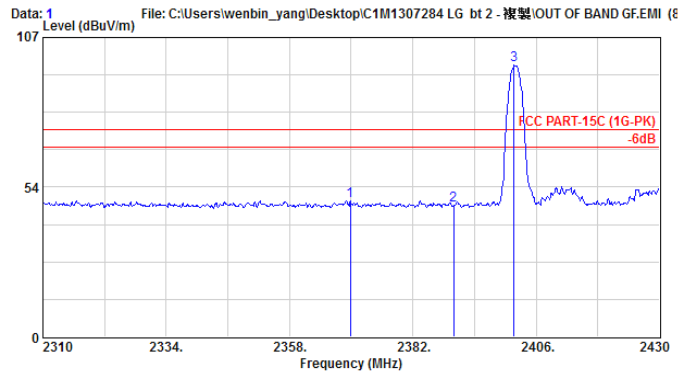

Site no. : A/C Chamber Data no. : 1
Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
Limit : FCC PART-15C (1G-PK)
Env. / Ins. : E4446A 26°C/61% Wenbin_yang
EUT : PD239
Power Rating : DC7.4V
Test Mode : TX2402

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2369.880	28.43	6.31	13.91	48.66	74.00	25.34	Peak
2	2390.000	28.47	6.34	12.29	47.10	74.00	26.90	Peak
3	2401.680	28.47	6.35	62.23	97.06	74.00	-23.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

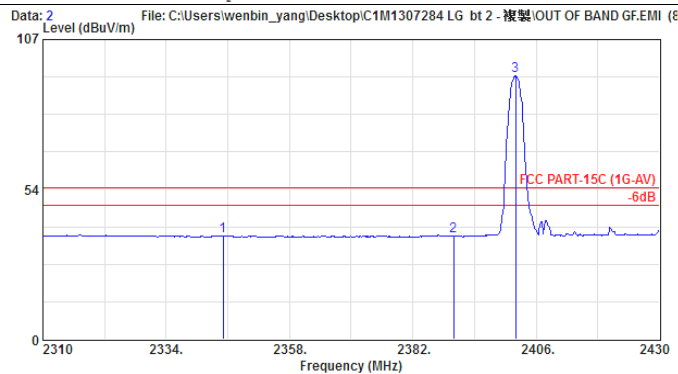

Site no. : A/C Chamber Data no. : 2
Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
Limit : FCC PART-15C (1G-AV)
Env. / Ins. : E4446A 26°C/61% Wenbin_yang
EUT : PD239
Power Rating : DC7.4V
Test Mode : TX2402


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2345.040	28.36	6.29	2.31	36.95	54.00	17.05	Average
2	2390.000	28.47	6.34	1.85	36.66	54.00	17.34	Average
3	2402.040	28.47	6.36	59.19	94.02	54.00	-40.02	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Aug. 02, 2013 Temperature : 26

EUT : Pocket Photo Humidity : 61%


Test Mode : Transmitting Mode, Frequency: 2480MHz (CH78) , 8-DPSK

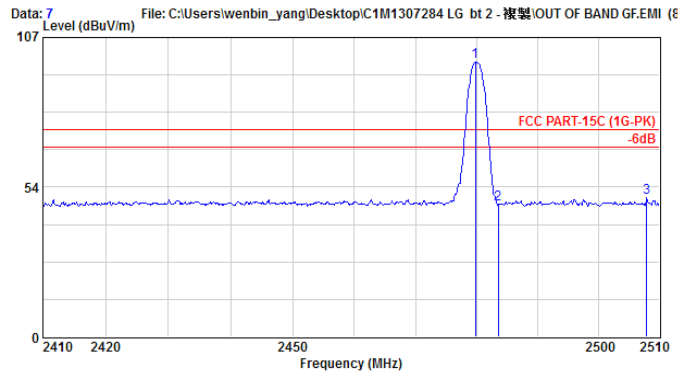

Site no. : A/C Chamber Data no. : 7
Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
Limit : FCC PART-15C (1G-PK)
Env. / Ins. : E4446A 26°C/61% Wenbin_yang
EUT : PD239
Power Rating : DC7.4V
Test Mode : TX2480

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.700	28.66	6.44	63.19	98.29	74.00	-24.29	Peak
2	2483.500	28.66	6.45	12.13	47.24	74.00	26.76	Peak
3	2507.900	28.76	6.48	14.56	49.80	74.00	24.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

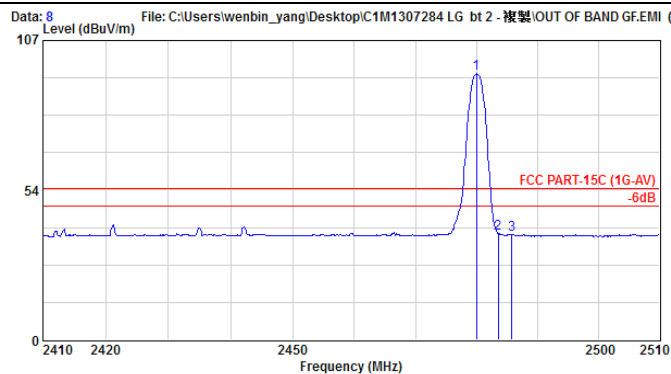

Site no. : A/C Chamber Data no. : 8
Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
Limit : FCC PART-15C (1G-AV)
Env. / Ins. : E4446A 26°C/61% Wenbin_yang
EUT : PD239
Power Rating : DC7.4V
Test Mode : TX2480


	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.900	28.66	6.44	60.05	95.15	54.00	-41.15	Average
2	2483.500	28.66	6.45	2.91	38.02	54.00	15.98	Average
3	2485.700	28.66	6.45	2.47	37.58	54.00	16.42	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Aug. 02, 2013 Temperature : 26

EUT : Pocket Photo Humidity : 61%


Test Mode : Transmitting Mode, Frequency: 2480MHz (CH78) , 8-DPSK

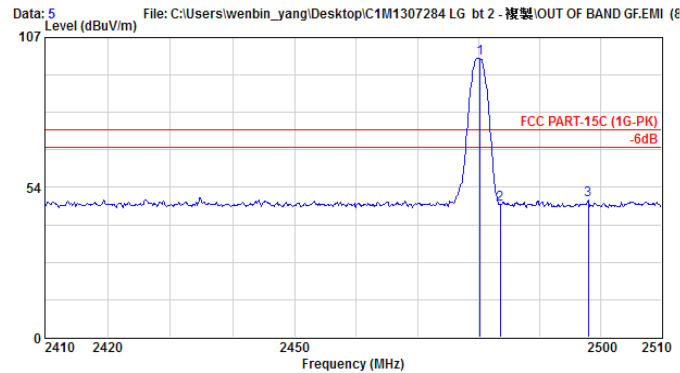

Site no. : A/C Chamber Data no. : 5
Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
Limit : FCC PART-15C (1G-PK)
Env. / Ins. : E4446A 26°C/61% Wenbin_yang
EUT : PD239
Power Rating : DC7.4V
Test Mode : TX2480

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.200	28.66	6.44	64.58	99.69	74.00	-25.69	Peak
2	2483.500	28.66	6.45	12.31	47.42	74.00	26.58	Peak
3	2497.900	28.70	6.47	13.94	49.11	74.00	24.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

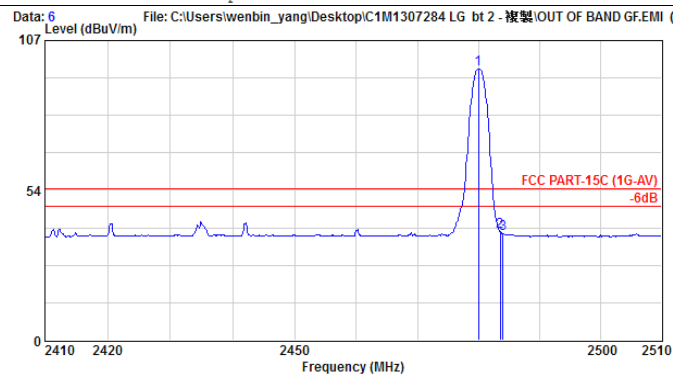

Site no. : A/C Chamber Data no. : 6
Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
Limit : FCC PART-15C (1G-AV)
Env. / Ins. : E4446A 26°C/61% Wenbin_yang
EUT : PD239
Power Rating : DC7.4V
Test Mode : TX2480

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.900	28.66	6.44	61.89	96.99	54.00	-42.99	Average
2	2483.500	28.66	6.45	3.51	38.62	54.00	15.38	Average
3	2483.900	28.66	6.45	3.06	38.17	54.00	15.83	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.


4. 20dB BANDWIDTH MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the 20dB bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

4.2. Block Diagram of Test Setup

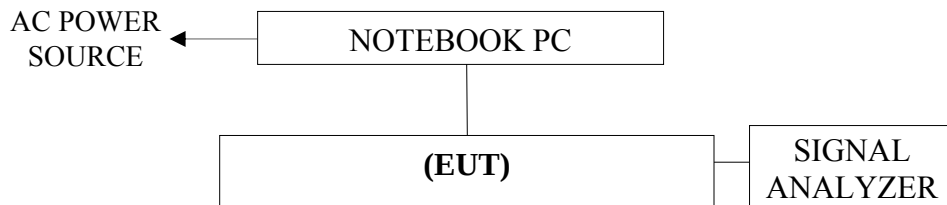

EUT: POCKET PHOTO

4.3. Specification Limits [§15.247(a)(1), RSS-210 §A8.2 (a)]

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

4.4. Operating Condition of EUT

- 4.4.1. Set up the EUT and simulator as shown on 4.2.
- 4.4.2. To turn on the power of all equipment.
- 4.4.3. The EUT (Pocket Photo) linked Notebook PC, the test program “cmd.exe” was used to enable the EUT to transmit data at different channel frequency individually.

4.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The RBW of the fundamental frequency was measure by spectrum analyzer 1% of the 20dB bandwidth and the setting equal to RBW and VBW is equal to RBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The measurement guideline was according to FCC Public Notice DA 00-705.

4.6. Test Results

PASSED. All the test results are attached in next pages.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Pocket Photo

M/N : PD239

Test Date : Aug. 01, 2013 Temperature : 25

Humidity : 58%

Test Date : Jul. 30, 2013 Temperature : 24

Humidity : 55%

4.6.1. Type of Modulation: 8-DPSK

No.	Channel	Test Frequency	20dB Bandwidth	2/3 (20dB Bandwidth)
1.	0	2402MHz	1.275MHz	0.850MHz
2.	39	2441MHz	1.275MHz	0.850MHz
3.	78	2480MHz	1.275MHz	0.850MHz

The maximum two-thirds of the 20dB bandwidth shall be at maximum 0.850MHz.

4.6.2. Type of Modulation: GFSK

No.	Channel	Test Frequency	20dB Bandwidth	2/3 (20dB Bandwidth)
1.	0	2402MHz	0.920MHz	0.613MHz
2.	39	2441MHz	0.920MHz	0.613MHz
3.	78	2480MHz	0.920MHz	0.613MHz

The maximum two-thirds of the 20dB bandwidth shall be at maximum 0.613MHz.

Figure 1: 8-DPSK, Channel 0, Frequency: 2402MHz

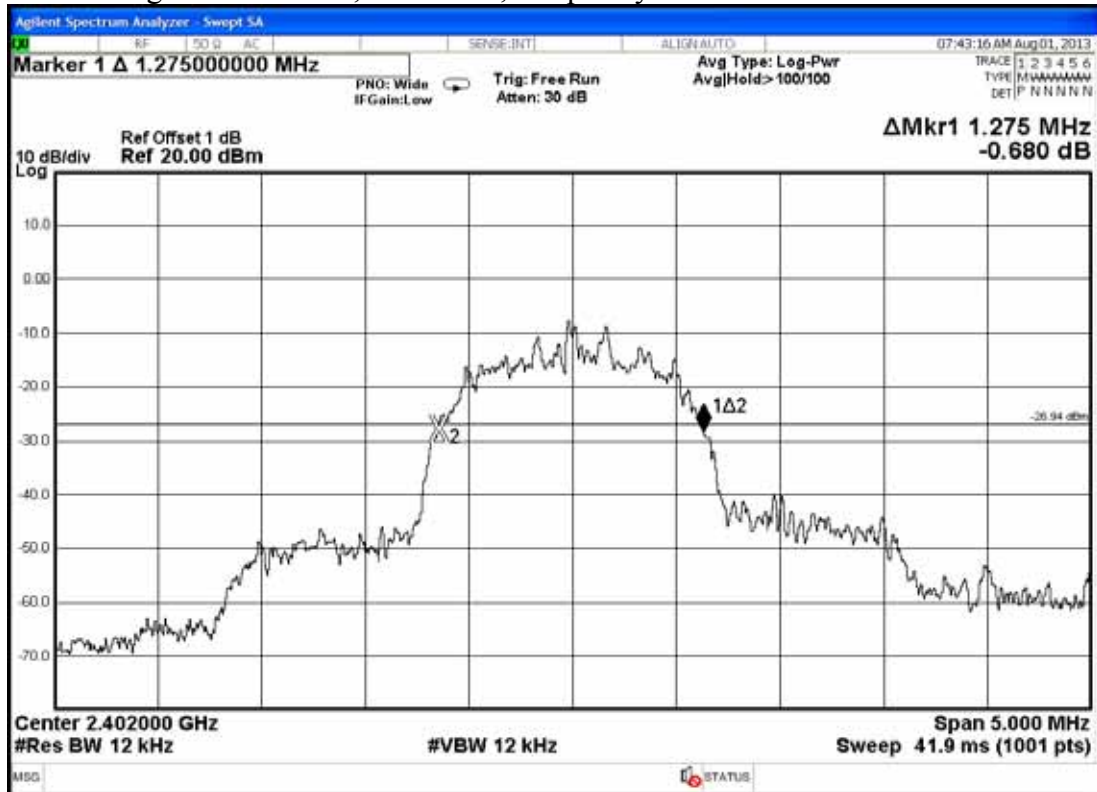


Figure 2: 8-DPSK, Channel 39, Frequency: 2441MHz



Figure 3: 8-DPSK, Channel 78, Frequency: 2480MHz



Figure 4: GFSK, Channel 0, Frequency: 2402MHz



Figure 5: GFSK, Channel 39, Frequency: 2441MHz

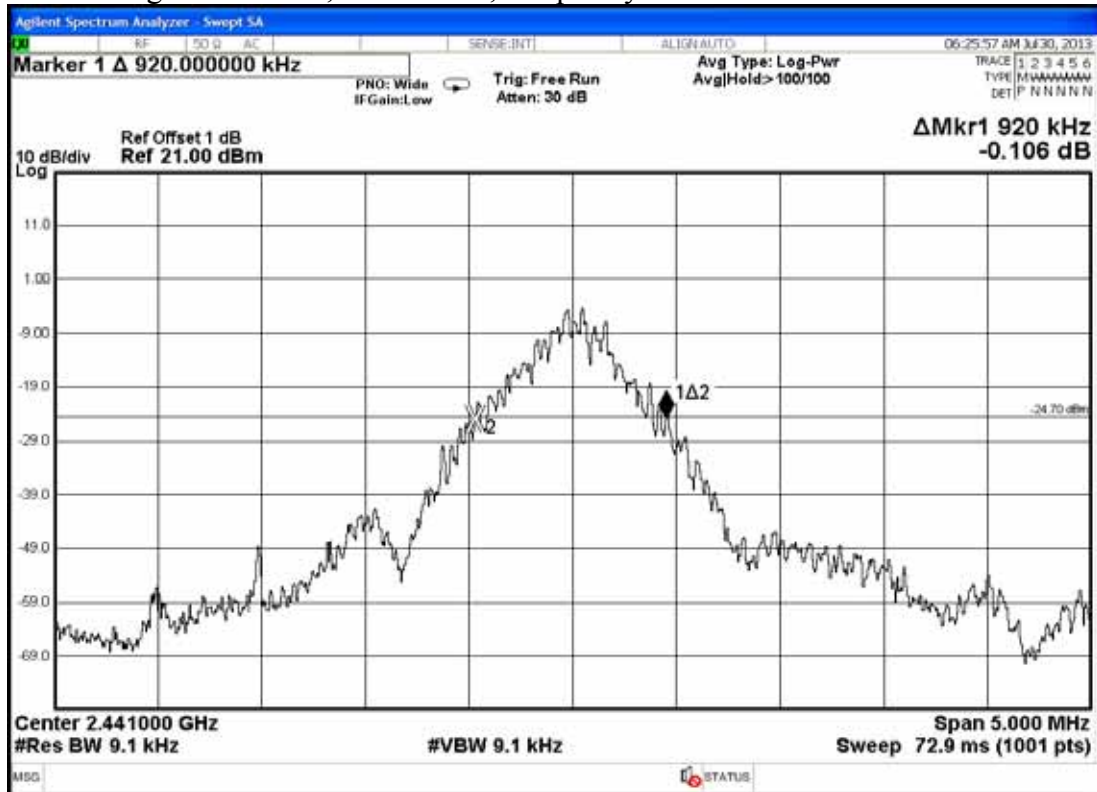


Figure 6: GFSK, Channel 78, Frequency: 2480MHz



5. CARRIER FREQUENCY SEPARATION MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the carrier frequency separation measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

5.2. Block Diagram of Test Setup

The same as section.4.2.

5.3. Specification Limits [§15.247(a)(1), RSS-210 §A8.2 (b)]

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output no greater than 125mW.

5.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

5.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The channel separation was measure by spectrum analyzer with RBW equal to 1% of the span. The video bandwidth not to be smaller than resolution bandwidth, the peak was mark on adjacent bandwidth, the between of peak is carrier frequency separation. The measurement guideline was according to FCC Public Notice DA 00-705.

5.6. Test Results

PASSED. All the test results are attached in next pages.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Pocket Photo M/N : PD239

Test Date : Aug. 01, 2013 Temperature : 25 Humidity : 58%

Test Date : Jul. 30, 2013 Temperature : 24 Humidity : 55%

5.6.1. Type of Modulation: 8-DPSK

1. 2402MHz adjacent channel of carrier frequency separation: 1.000MHz.
2. 2441MHz adjacent channel of right carrier frequency separation: 1.000MHz.
3. 2441MHz adjacent channel of left carrier frequency separation: 1.000MHz.
4. 2480MHz adjacent channel of carrier frequency separation: 1.000MHz.

[Above values have met the requirement as specified in section 4.3: frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.]

5.6.2. Type of Modulation: GFSK

1. 2402MHz adjacent channel of carrier frequency separation: 1.000MHz.
2. 2441MHz adjacent channel of right carrier frequency separation: 1.000MHz.
3. 2441MHz adjacent channel of left carrier frequency separation: 1.000MHz.
4. 2480MHz adjacent channel of carrier frequency separation: 1.000MHz.

[Above values have met the requirement as specified in section 4.3: frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.]

Figure 1: 8-DPSK, 2402MHz adjacent channel of carrier frequency separation



Figure 2: 8-DPSK, 2441MHz adjacent channel of right carrier frequency separation



Figure 3: 8-DPSK, 2441MHz adjacent channel of left carrier frequency separation

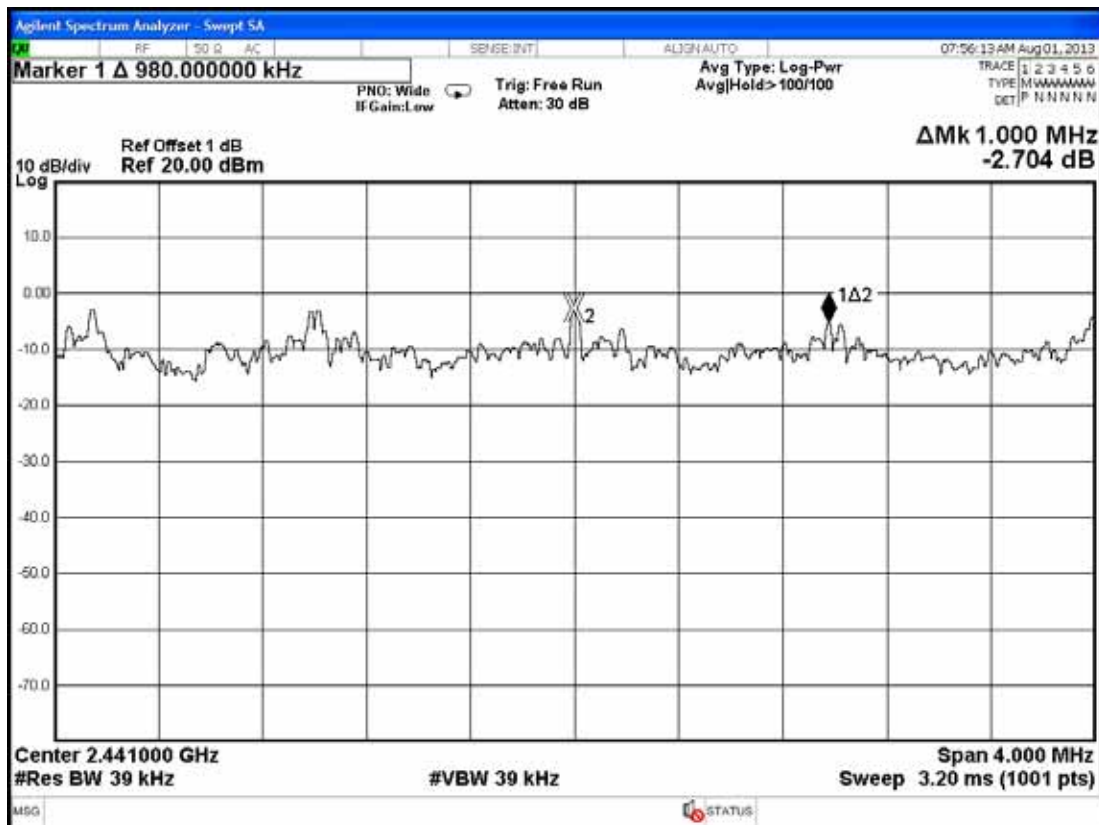


Figure 4: 8-DPSK, 2480MHz adjacent channel of carrier frequency separation



Figure 5: GFSK, 2402MHz adjacent channel of carrier frequency separation



Figure 6: GFSK, 2441MHz adjacent channel of right carrier frequency separation



Figure 7: GFSK, 2441MHz adjacent channel of left carrier frequency separation

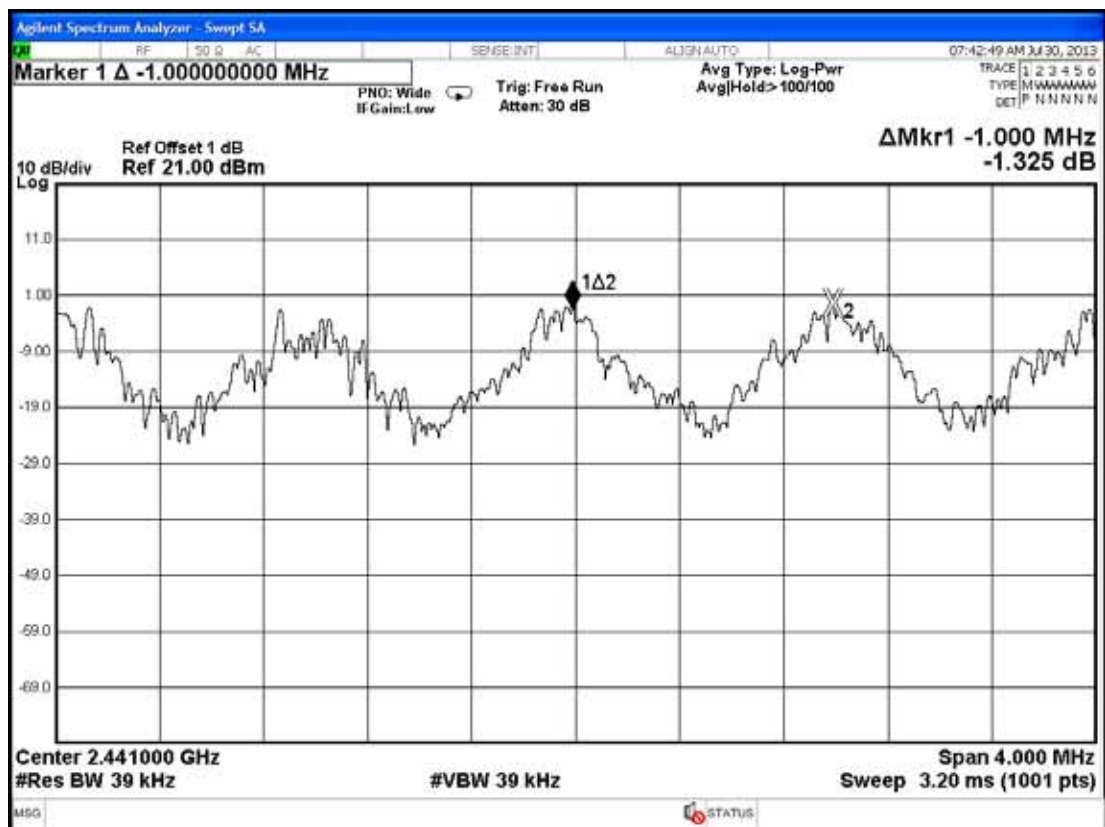


Figure 8: GFSK, 2480MHz adjacent channel of carrier frequency separation



6. TIME OF OCCUPANCY MEASUREMENT

6.1. Test Equipment

The following test equipment was used during the time of occupancy measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

6.2. Block Diagram of Test Setup

The same as section.4.2.

6.3. Specification Limits [§15.247(a)(1)(iii), RSS-210 §A8.2 (d)]

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

6.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

6.5. Test Procedure

The EUT was connected to the notebook. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 1MHz RBW and 1MHz VBW. VBW≥RBW ; Span=zero span.

Centred on a hopping channel sweep=as necessary to capture the entire dwell time per hopping channel ; Detector function=peak ; Trace=Max hold

The measurement guideline was according to FCC Public Notice DA 00-705.

6.6. Test Results

PASSED. All the test results are attached in next pages.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Pocket Photo M/N : PD239

Test Date : Aug. 01, 2013 Temperature : 25 Humidity : 58%

Test Date : Jul. 30, 2013 Temperature : 24 Humidity : 55%

6.6.1. Type of Modulation : 8-DPSK, Test Frequency : 2441MHz

Duty cycle: 79channels*0.4 seconds = 31.6 seconds

3DH1 : For each 5 seconds of 51 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$51 \text{ channels} * 31.6 \text{ seconds} / 5 * 0.375 \text{ms} = 119.26 \text{ms} (<400 \text{ms})$

3DH3 : For each 5 seconds of 26 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$26 \text{ channels} * 31.6 \text{ seconds} / 5 * 1.640 \text{ms} = 269.48 \text{ms} (<400 \text{ms})$

3DH5 : For each 5 seconds of 16 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$16 \text{ channels} * 31.6 \text{ seconds} / 5 * 2.880 \text{ms} = 291.23 \text{ms} (<400 \text{ms})$

Figure 1: 8-DPSK, 2441MHz, 3DH1

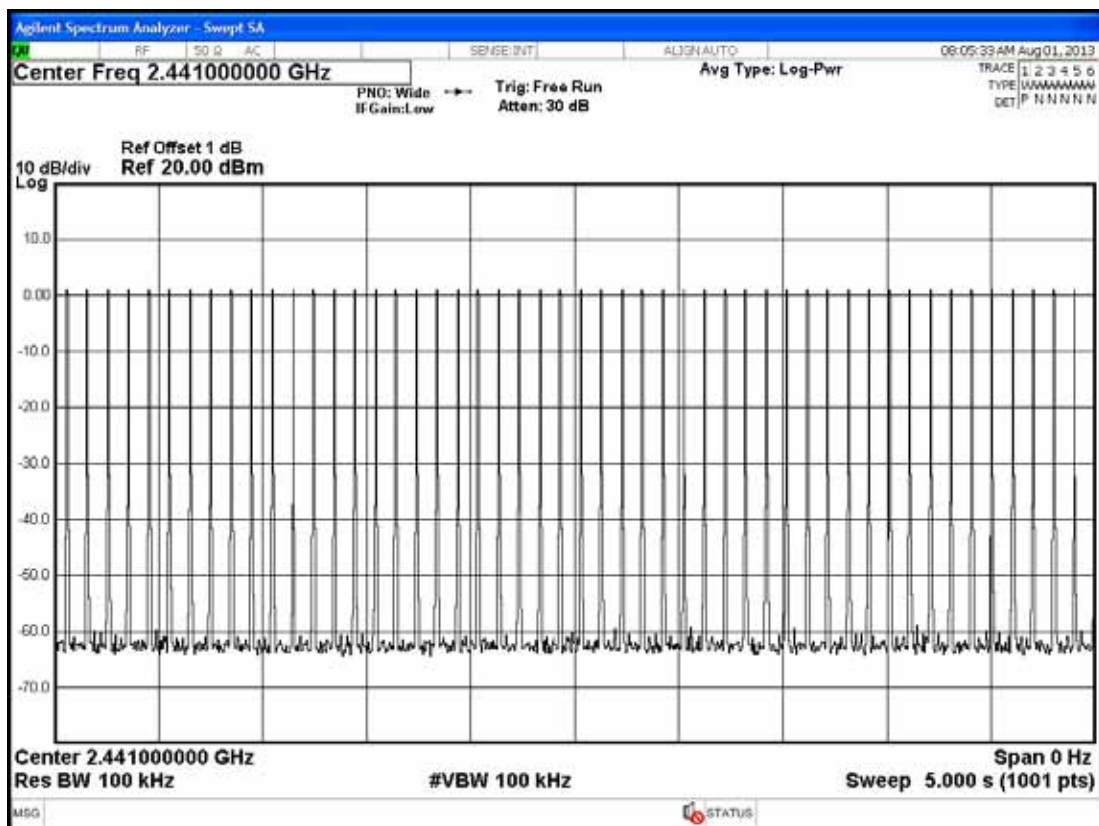
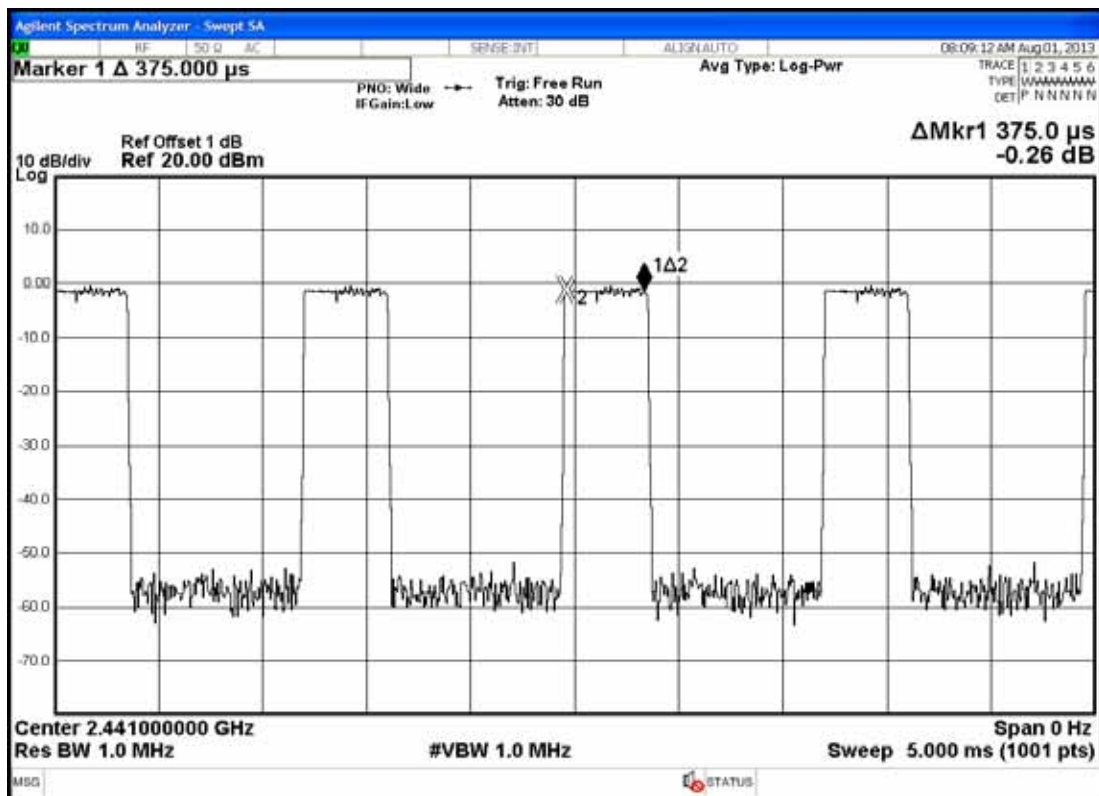


Figure 2: 8-DPSK, 2441MHz, 3DH3




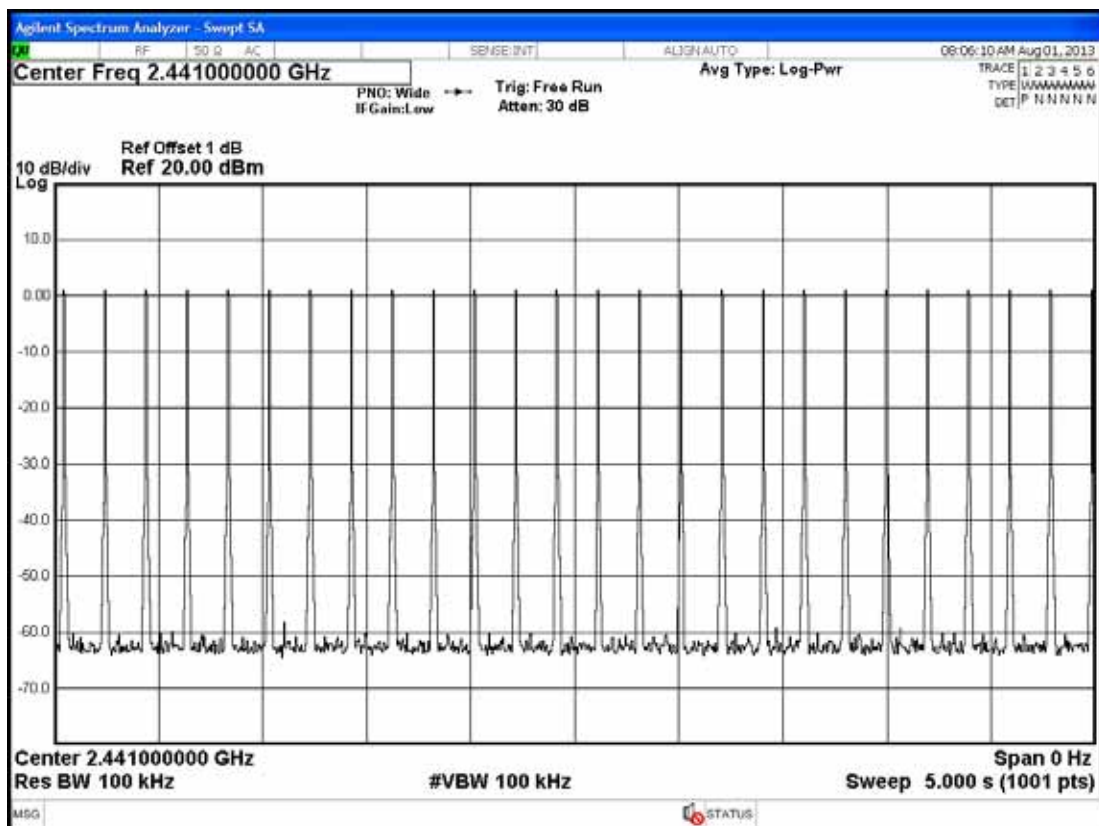


Figure 3: 8-DPSK, 2441MHz, 3DH5

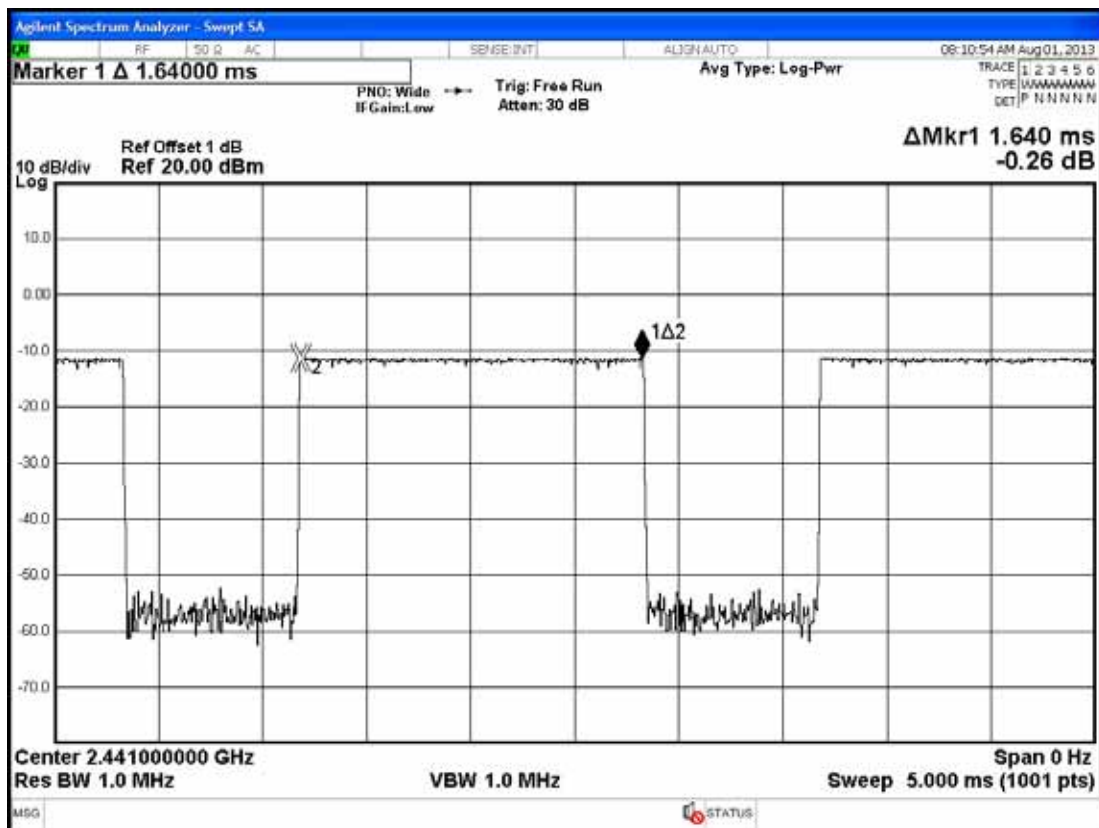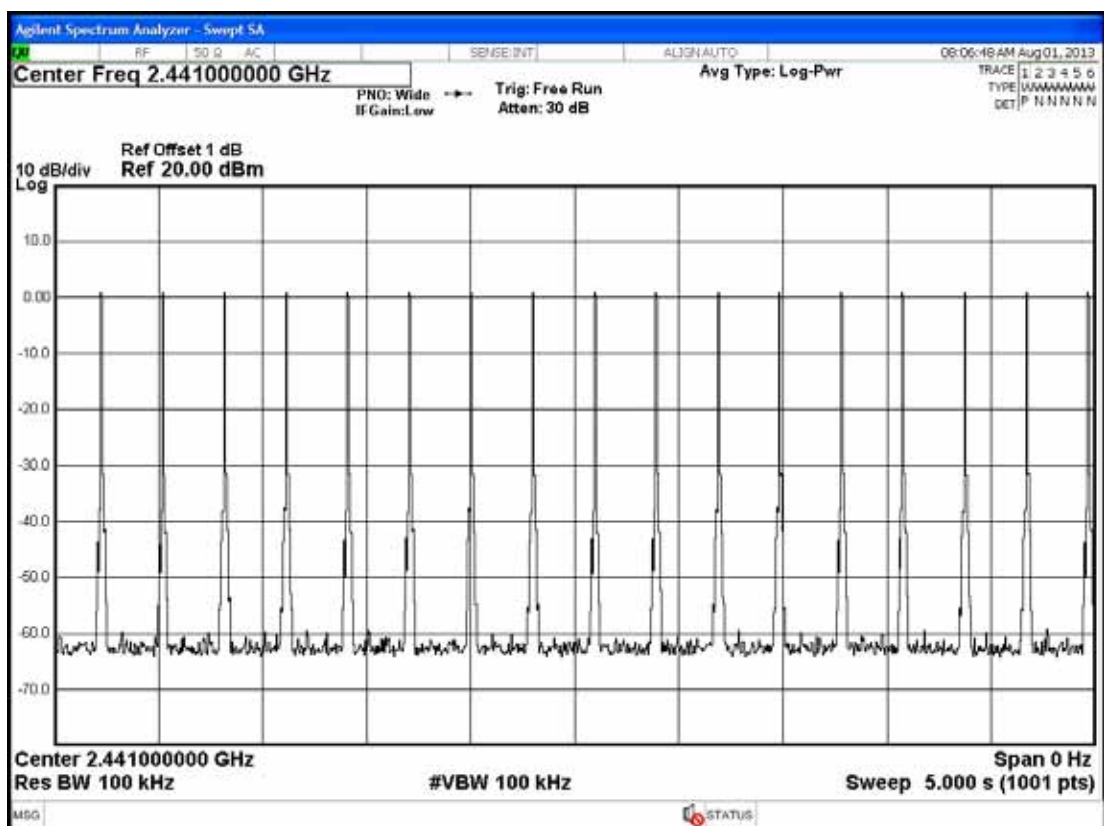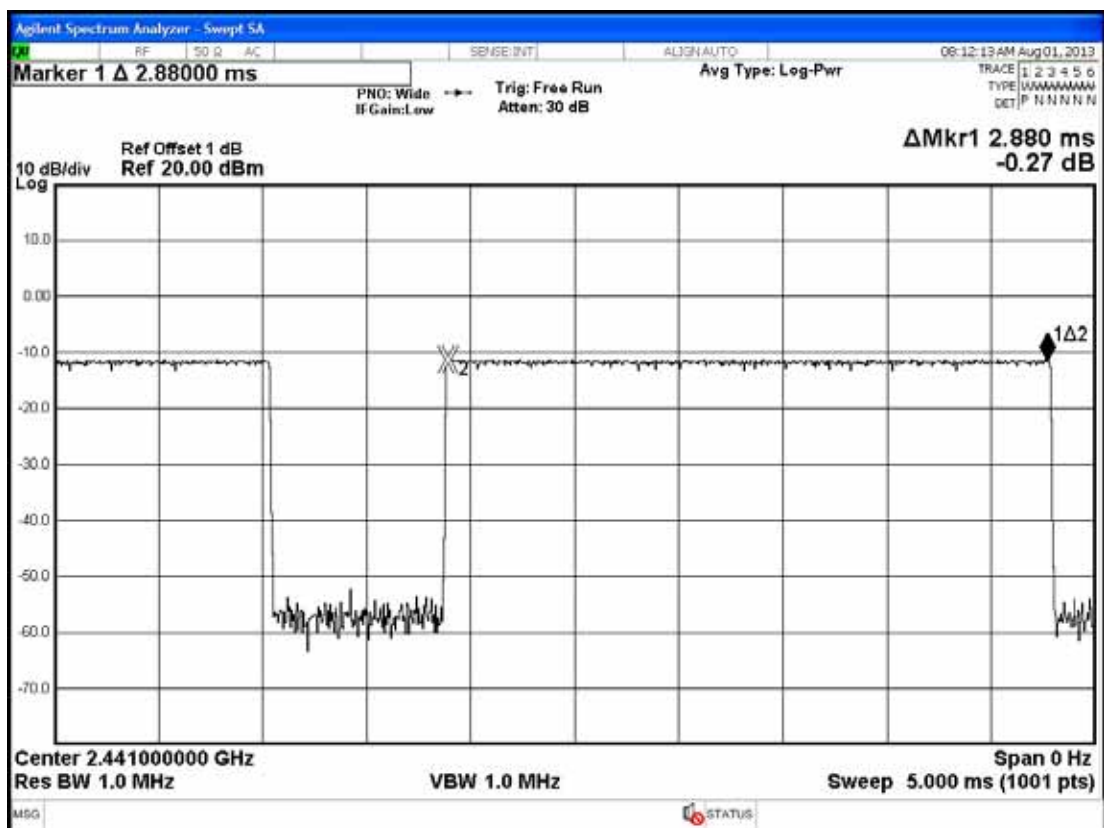

6.6.2. Type of Modulation : GFSK, Test Frequency : 2441MHz

Duty cycle: 79channels*0.4 seconds = 31.6 seconds

DH1 : For each 5 seconds of 50 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$$50 \text{ channels} * 31.6 \text{ seconds} / 5 * 0.380 \text{ms} = 120.08 \text{ms} (<400 \text{ms})$$

DH3 : For each 5 seconds of 26 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$$26 \text{ channels} * 31.6 \text{ seconds} / 5 * 1.625 \text{ms} = 267.02 \text{ms} (<400 \text{ms})$$

DH5 : For each 5 seconds of 17 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$$17 \text{ channels} * 31.6 \text{ seconds} / 5 * 2.880 \text{ms} = 309.43 \text{ms} (<400 \text{ms})$$

Figure 4: GFSK, 2441MHz, DH1

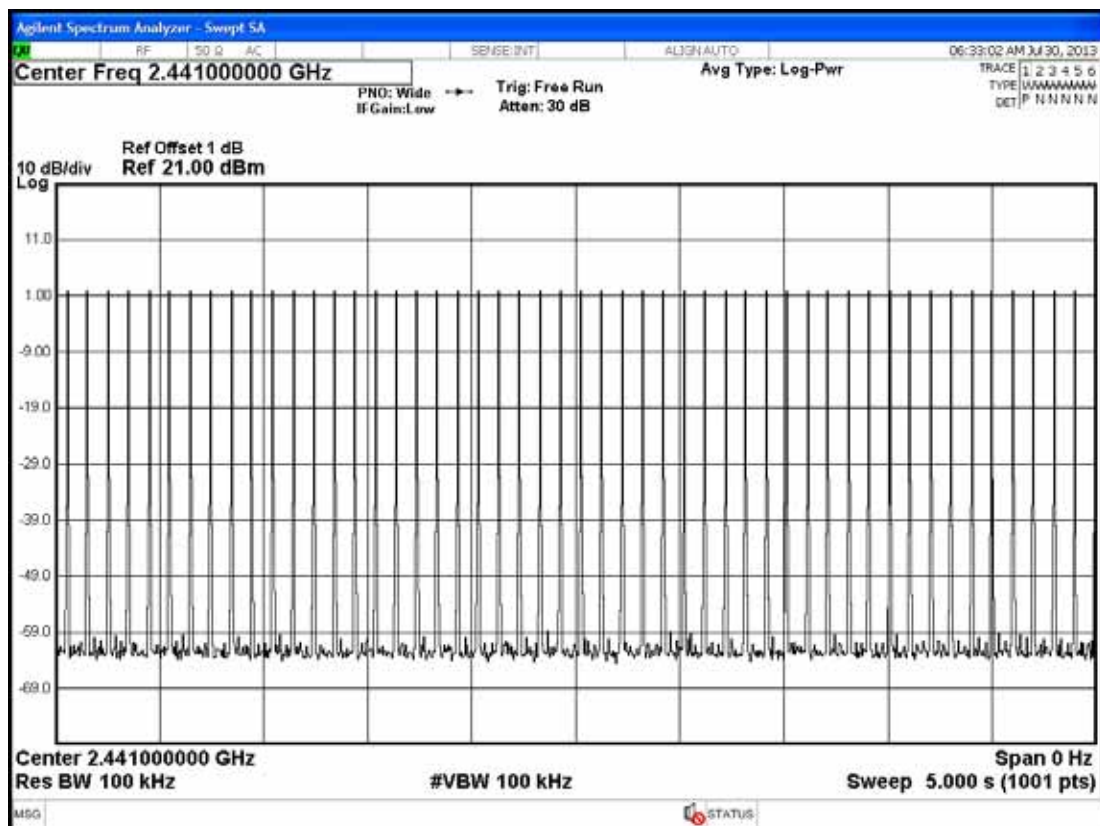
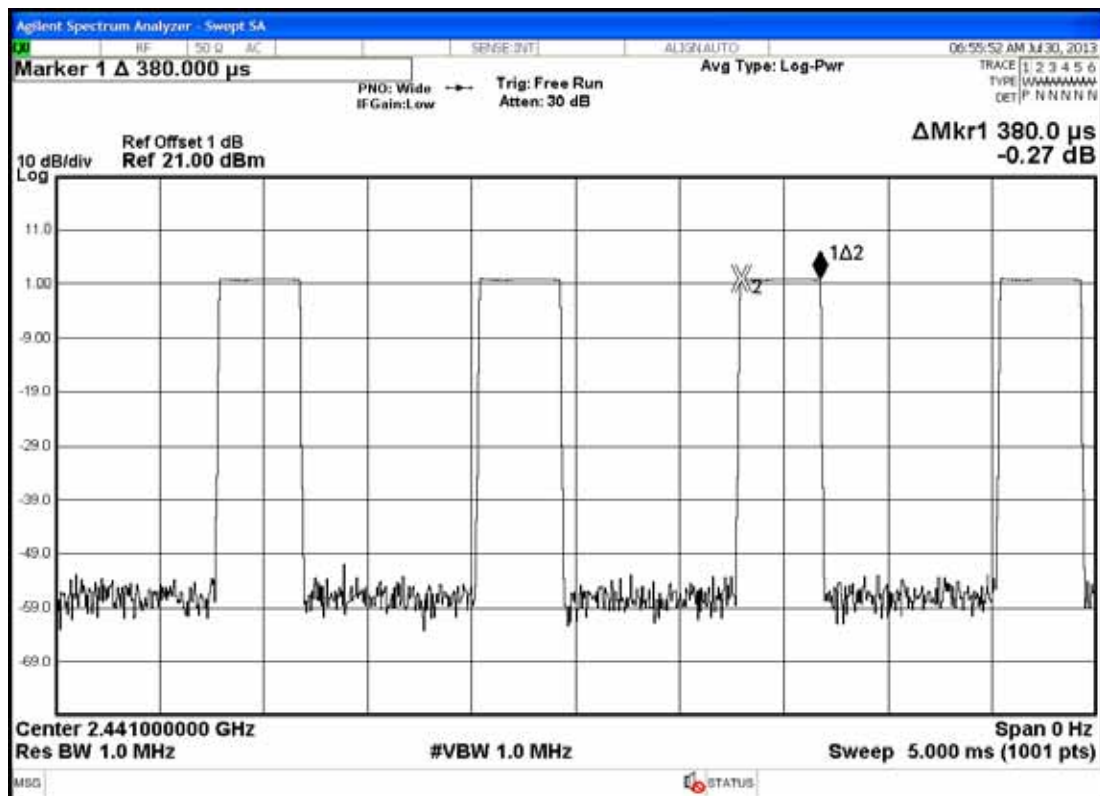


Figure 5: GFSK, 2441MHz, DH3




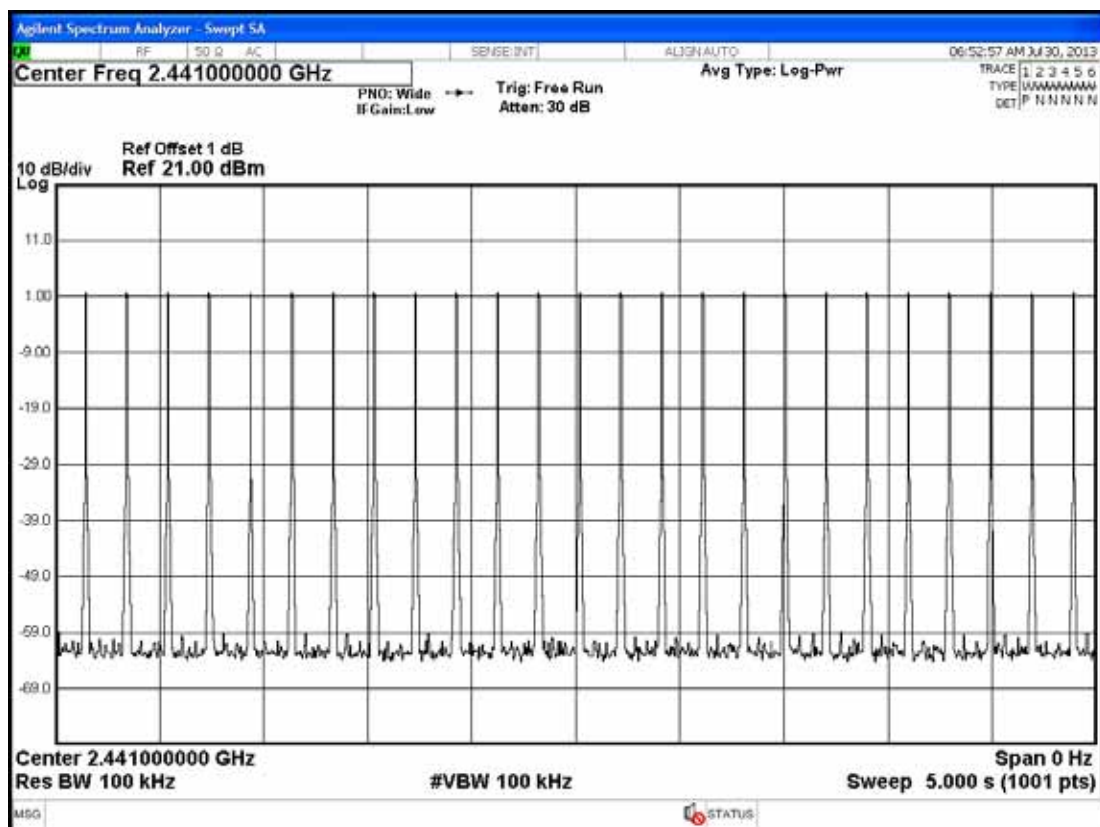


Figure 6: GFSK, 2441MHz, DH5

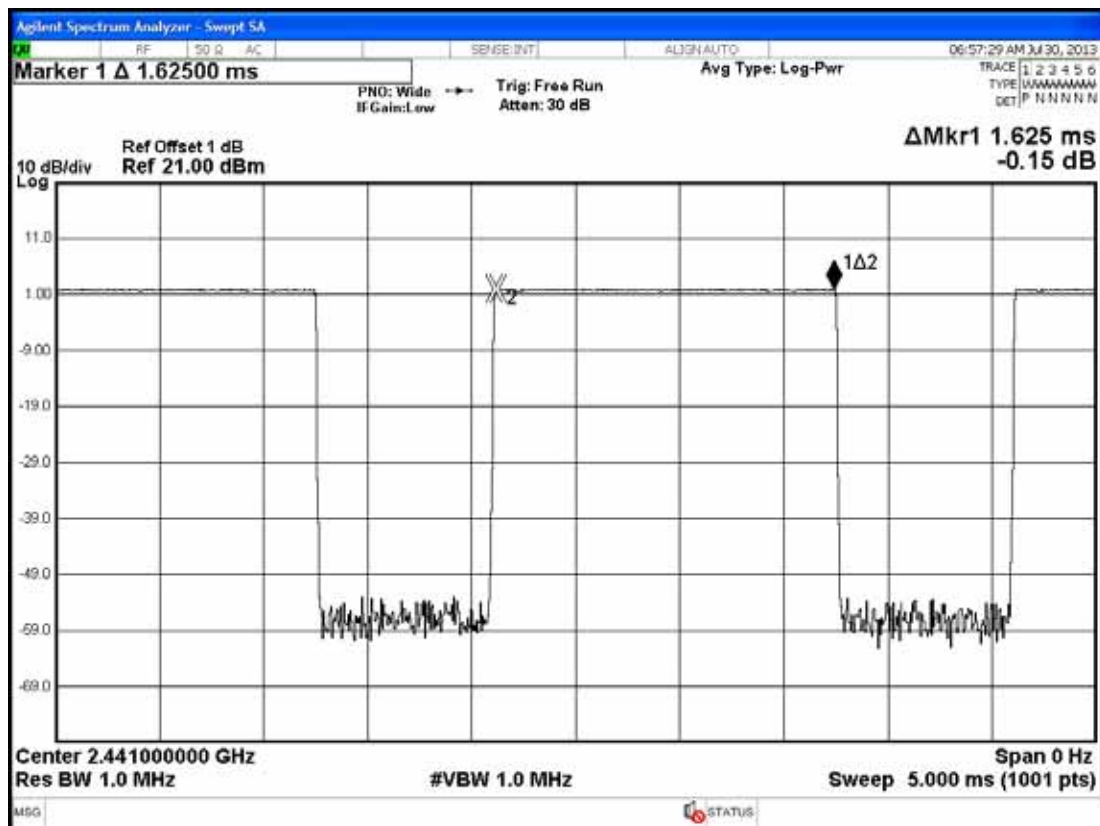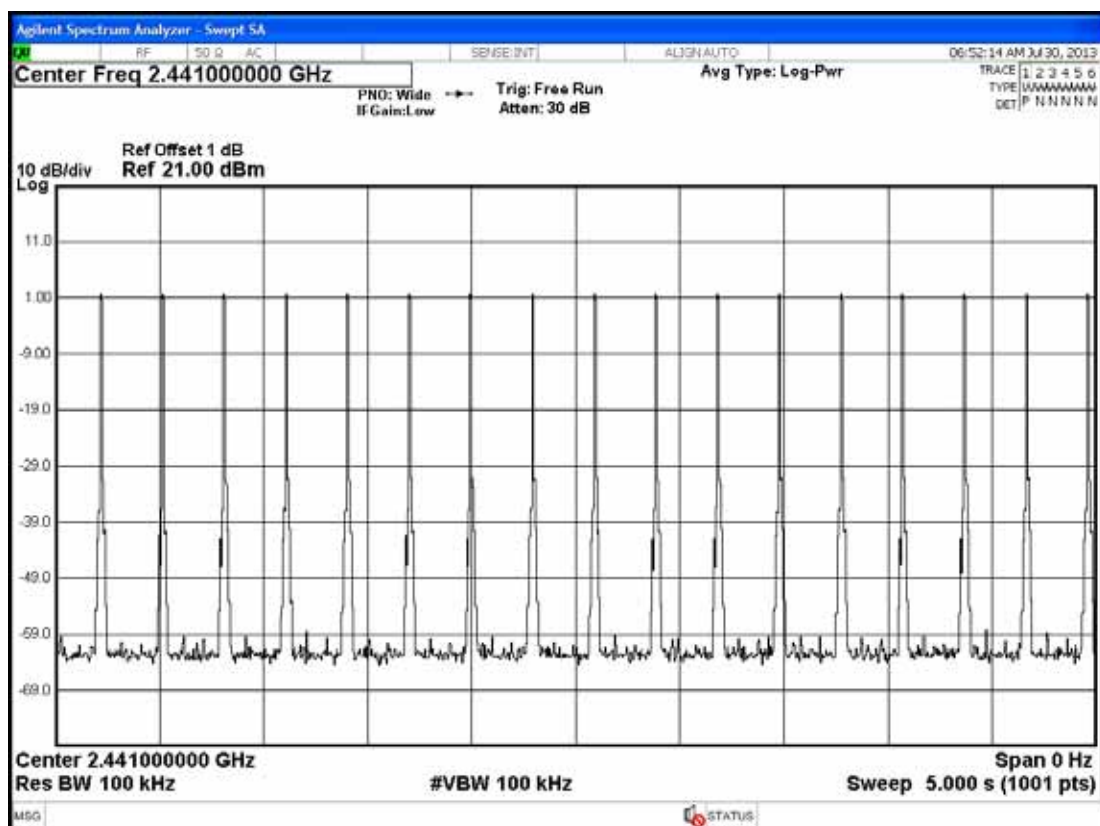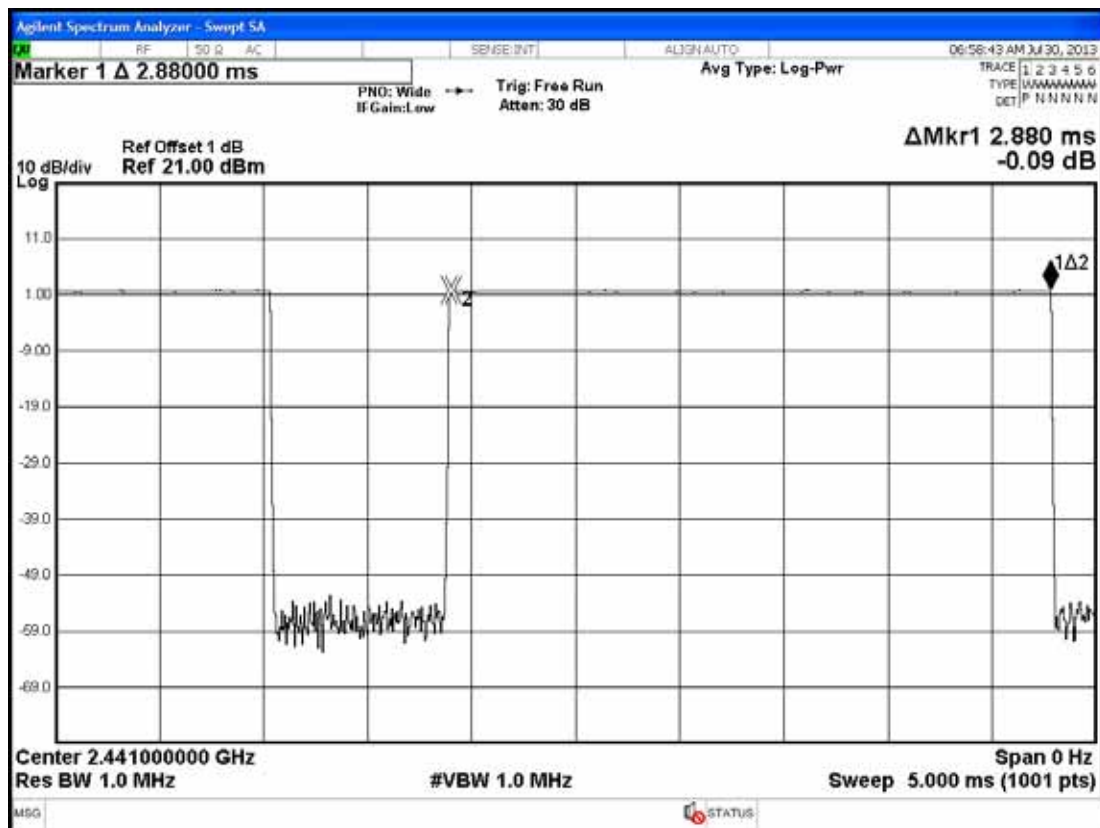

7. NUMBER OF HOPPING CHANNELS MEASUREMENT

7.1. Test Equipment

The following test equipment was used during the number of hopping channels measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

7.2. Block Diagram of Test Setup

The same as section.4.2.

7.3. Specification Limits [§15.247(a)(1)(iii), RSS-210 §A8.2 (d)]

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

7.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

7.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 100kHz RBW and 100kHz VBW. Sweep=Auto ; Detector function=peak ; Trace=Max hold
The measurement guideline was according to FCC Public Notice DA 00-705.

7.6. Test Results

PASSED. All the test results are attached in next page.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Pocket Photo M/N : PD239

Test Date : Aug. 01, 2013 Temperature : 25 Humidity : 58%

Test Date : Jul. 30, 2013 Temperature : 24 Humidity : 55%

7.6.1.Type of Modulation: 8-DPSK

The number hopping channel is 79.

7.6.2.Type of Modulation: GFSK

The number hopping channel is 79.

Figure 1: 8-DPSK


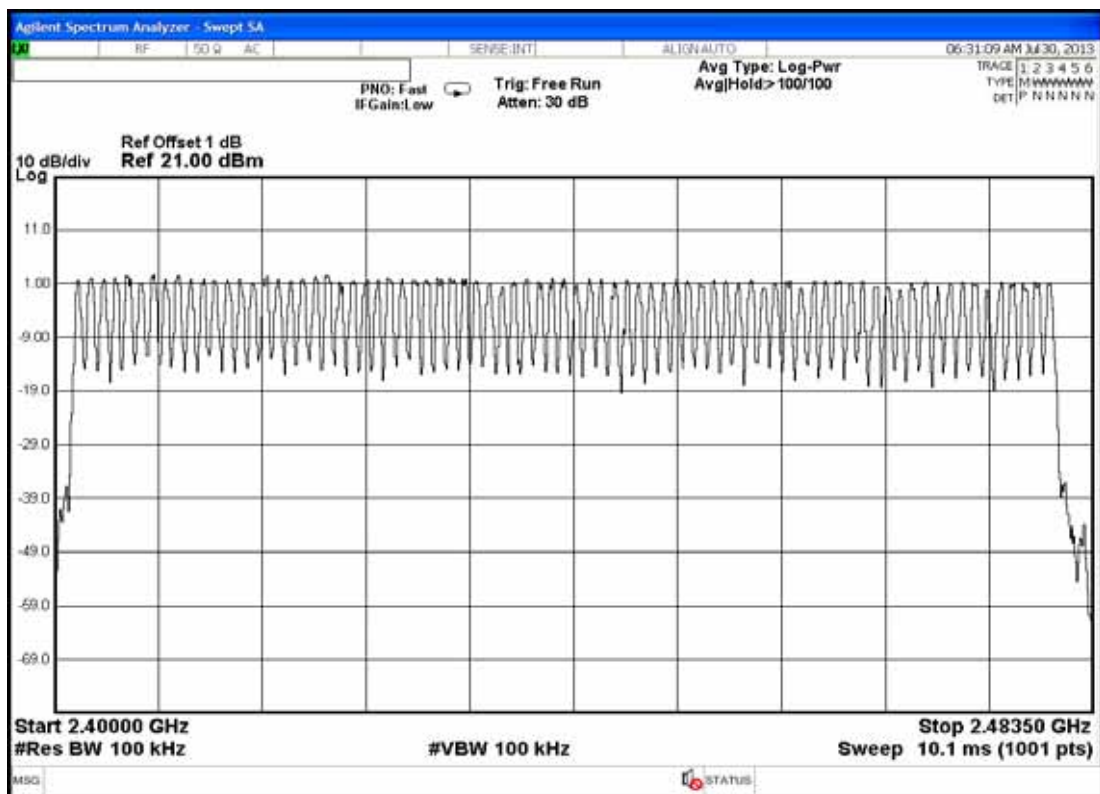


Figure 2: GFSK

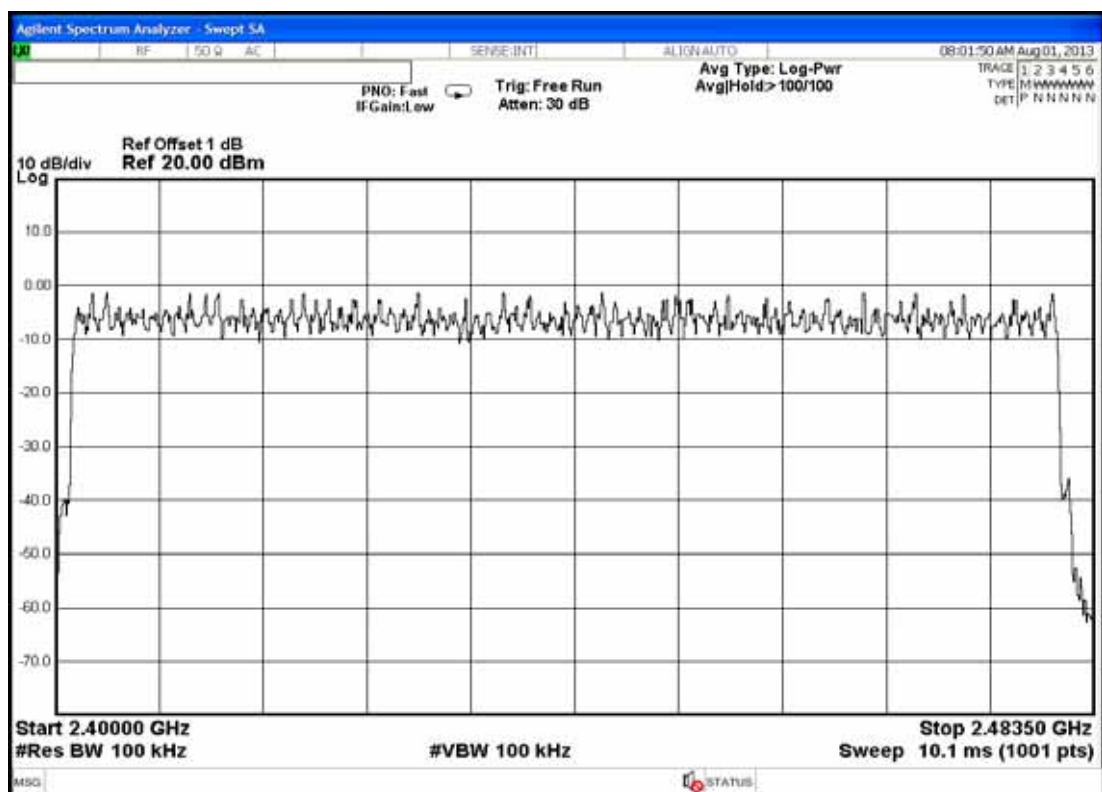

8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

8.1. Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

8.2. Block Diagram of Test Setup

The same as section.4.2.

8.3. Specification Limits [§15.247(b)-(1), RSS-210 §A8.4 (2)]

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

8.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in 4.4 .

8.5. Test Procedure

The transmitter output was connected to the spectrum analyzer.

Span can encompass the waveform

RBW>EBW

VBW RBW

Sweep=5MHz

The measurement guideline was according to FCC Public Notice DA 00-705.

8.6. Test Results

PASSED. All the test results are listed below.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Pocket Photo M/N : PD239

Test Date : Aug. 01, 2013 Temperature : 25 Humidity : 58%

Test Date : Jul. 30, 2013 Temperature : 24 Humidity : 55%

8.6.1.Type of Modulation: 8-DPSK

No.	Channel	Test Frequency	Peak Output Power	Limit
1.	0	2402MHz	2.762 dBm	21dBm
2.	39	2441MHz	1.934 dBm	21dBm
3.	78	2480MHz	1.242 dBm	21dBm

8.6.2.Type of Modulation: GFSK

No.	Channel	Test Frequency	Peak Output Power	Limit
1.	0	2402MHz	0.200 dBm	21dBm
2.	39	2441MHz	0.039 dBm	21dBm
3.	78	2480MHz	-0.041 dBm	21dBm

Figure 1: 8-DPSK, Channel 0, Frequency: 2402MHz

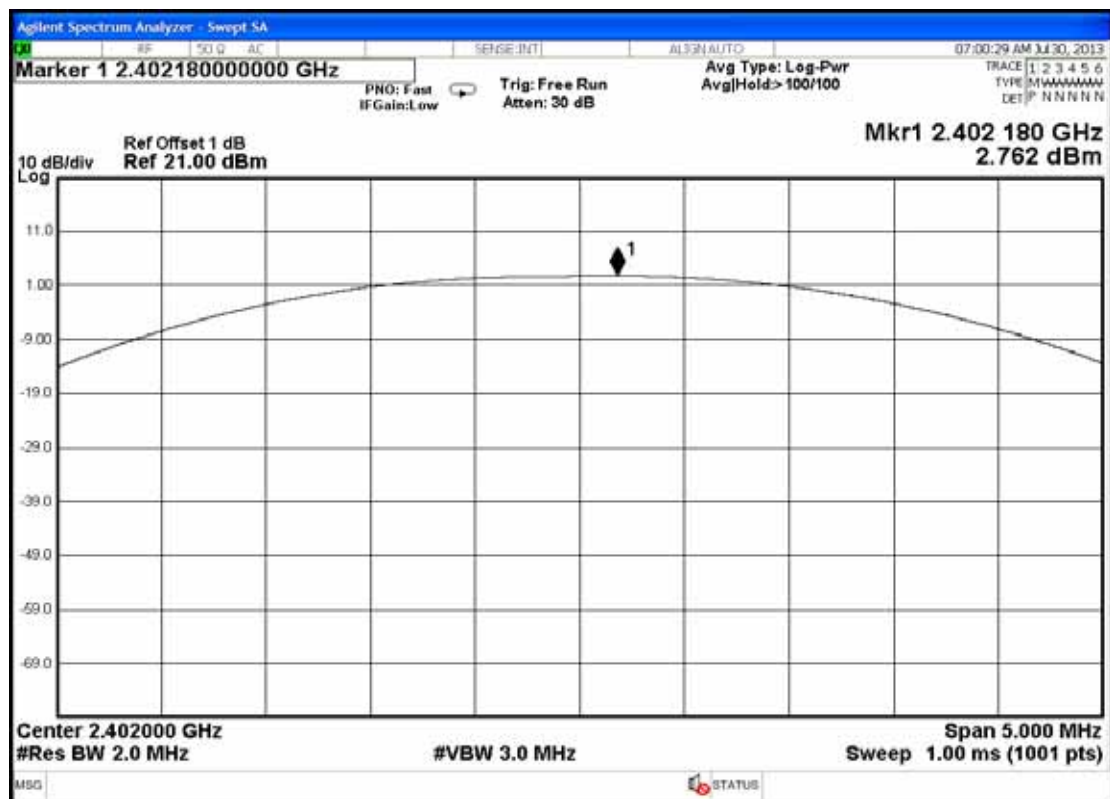


Figure 2: 8-DPSK, Channel 39, Frequency: 2441MHz

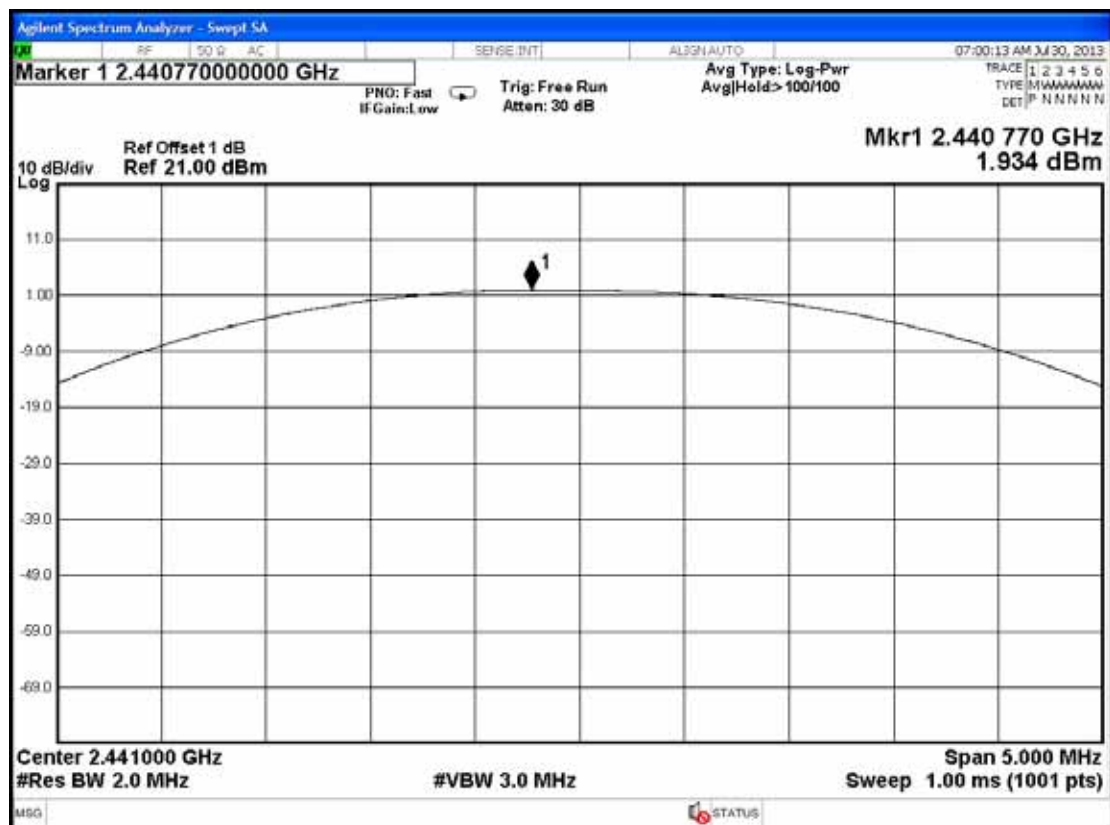


Figure 3: 8-DPSK, Channel 78, Frequency: 2480MHz

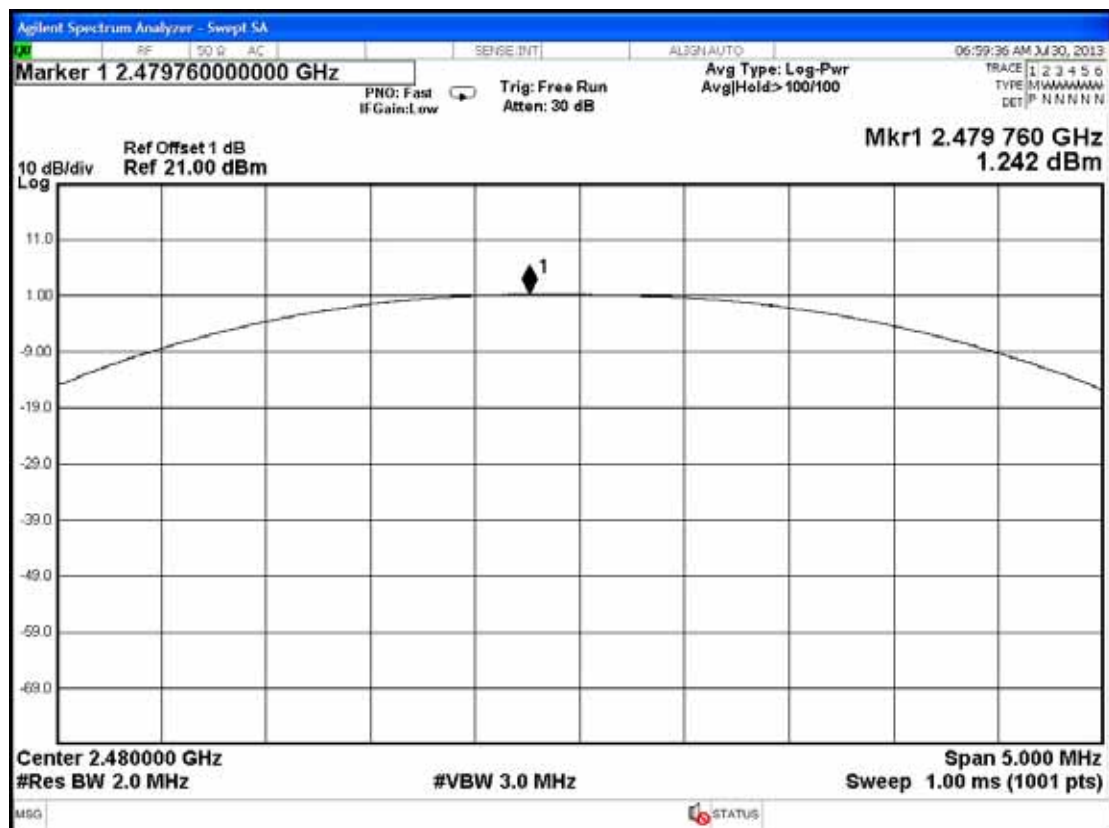


Figure 4: GFSK, Channel 0, Frequency: 2402MHz

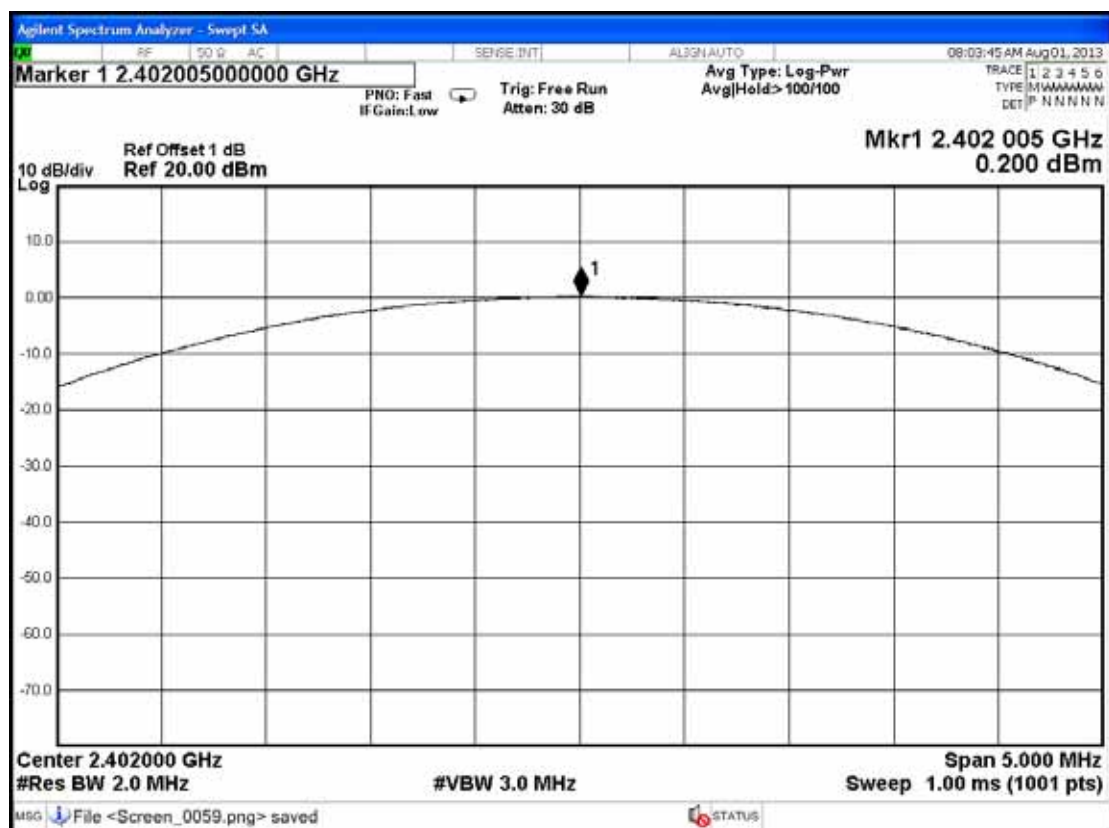


Figure 5: GFSK, Channel 39, Frequency: 2441MHz


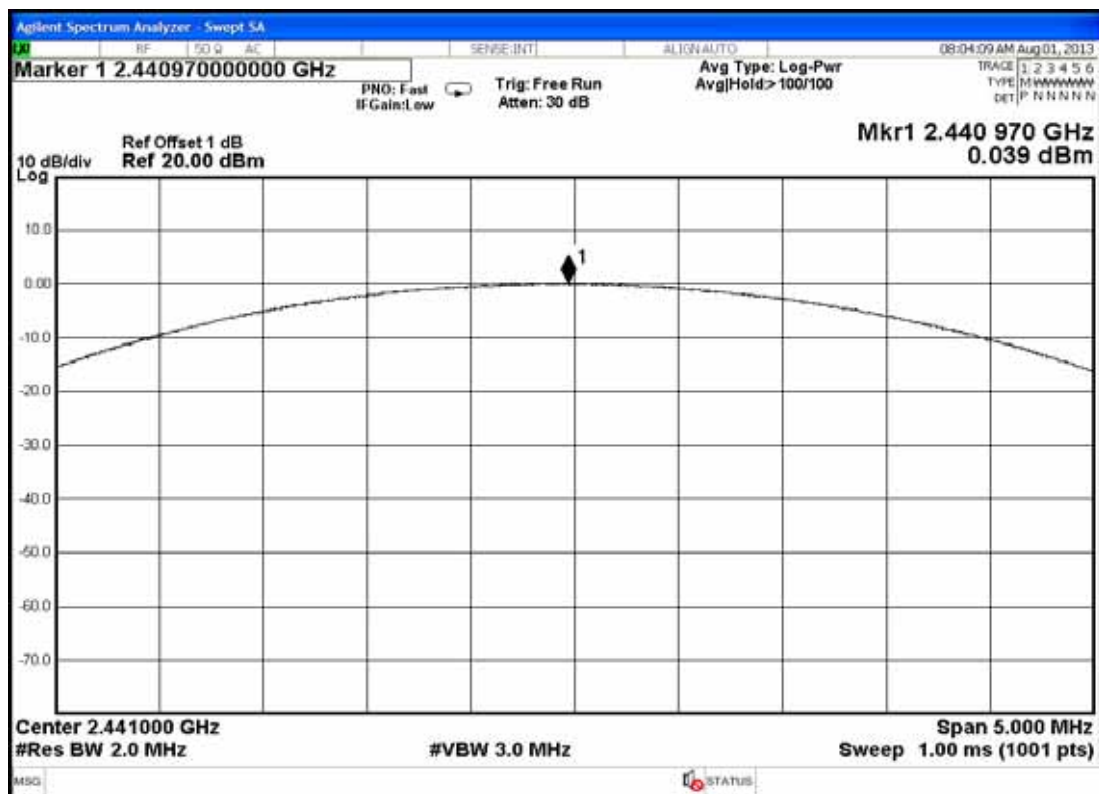


Figure 6: GFSK, Channel 78, Frequency: 2480MHz

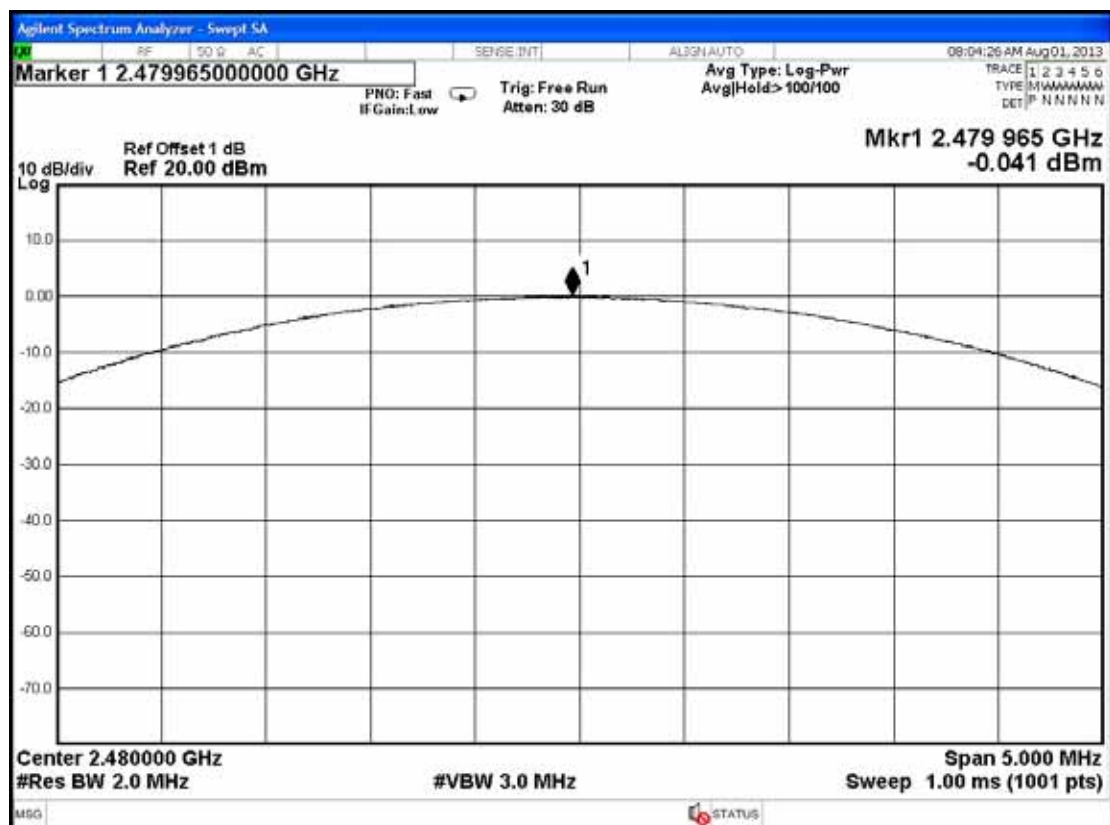

9. EMISSION LIMITATIONS MEASUREMENT

All emission levels have been compliance with the limit specified in 15.209, thus conducted limitation is not required and presented.

10.BAND EDGES MEASUREMENT

10.1.Test Equipment

The following test equipment was used during the band edges measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

10.2.Block Diagram of Test Setup

The same as section.4.2.

10.3.Specification Limits [§15.247(c), RSS-210 §A8.5]

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)). (This test result attaching to §3.6.3)

10.4.Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

10.5.Test Procedure

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.

The measurement guideline was according to FCC Public Notice DA 00-705.

10.6. Test Results

PASSED. The testing data was attached in the next pages.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Pocket Photo

M/N : PD239

Test Date : Aug. 01, 2013 Temperature : 25

Humidity : 58%

Test Date : Jul. 30, 2013 Temperature : 24

Humidity : 55%

10.6.1. Type of Modulation: 8-DPSK

1. Upper Band edge: The highest emission level is -62.187dBm on 2.48360GHz.
2. Below Band edge : The highest emission level is -59.775dBm on 2.39900GHz.

10.6.2. Type of Modulation: GFSK

1. Upper Band edge: The highest emission level is -62.945dBm on 2.48360GHz.
2. Below Band edge : The highest emission level is -49.745dBm on 2.39900GHz.

10.6.3. Hopping Mode

Type of Modulation: 8-DPSK

1. Upper Band edge: The highest emission level is -69.529dBm on 2.48350GHz.
2. Below Band edge : The highest emission level is -66.976dBm on 2.39900GHz.

Type of Modulation: GFSK

1. Upper Band edge: The highest emission level is -65.503dBm on 2.48350GHz.
2. Below Band edge : The highest emission level is -49.822dBm on 2.39900GHz.

Figure 1: 8-DPSK, Upper Band edge

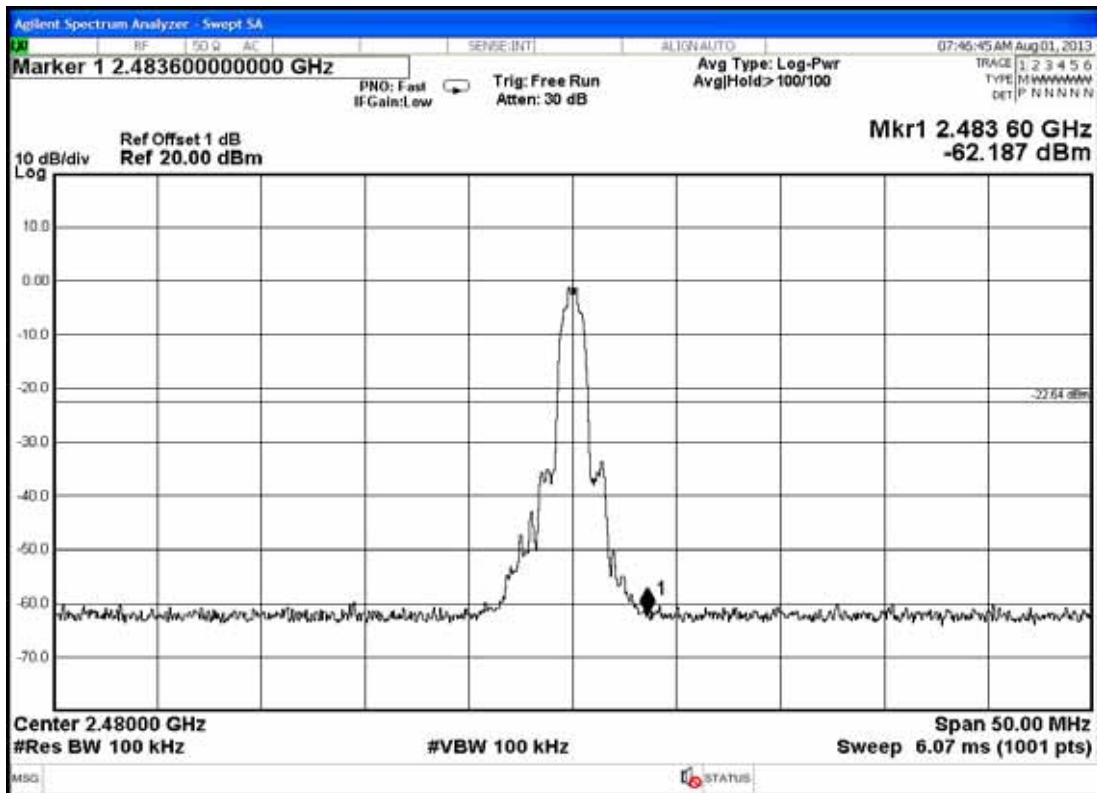


Figure 2: 8-DPSK, Below Band edge

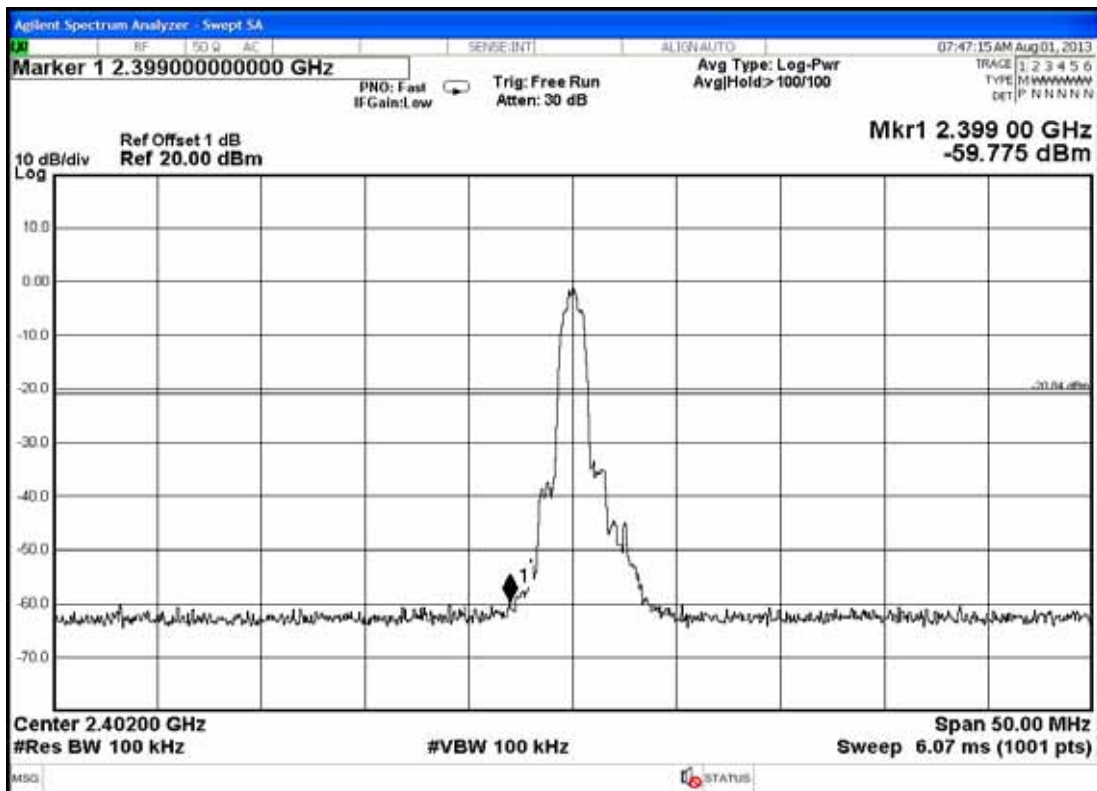


Figure 3: GFSK, Upper Band edge



Figure 4: GFSK, Below Band edge



Figure 5: Hopping Mode 8-DPSK, Upper Band edge

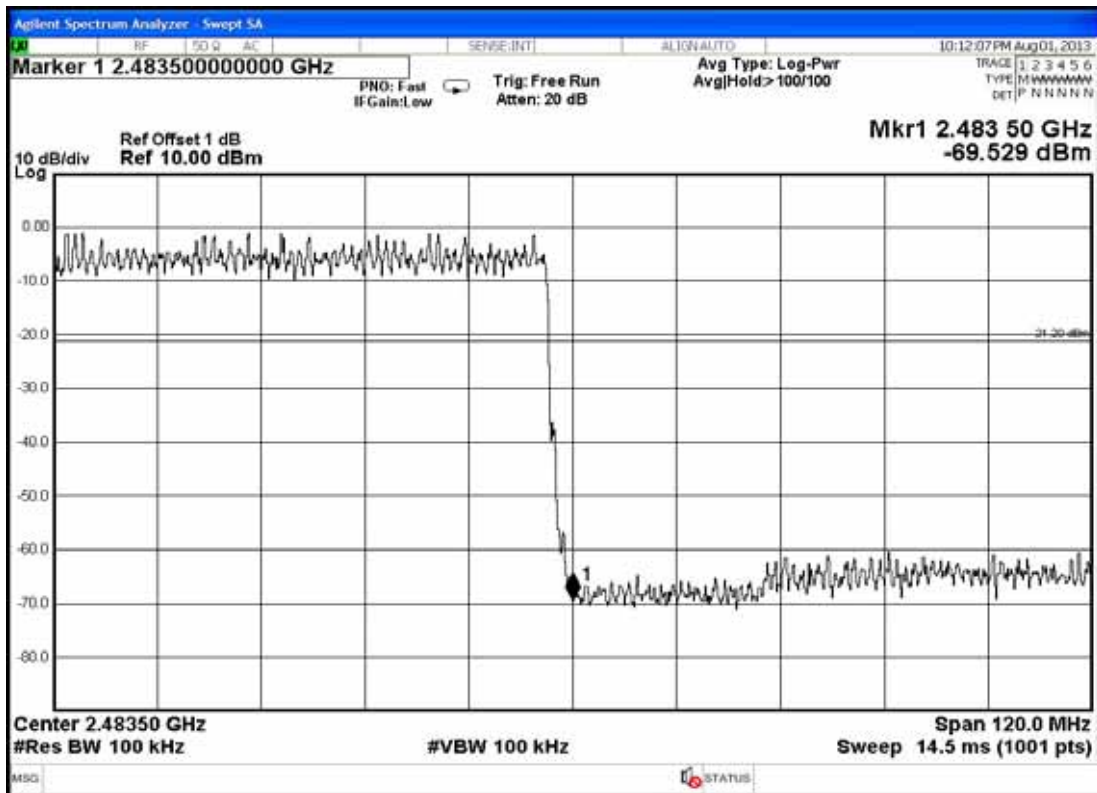


Figure 6: Hopping Mode 8-DPSK, Below Band edge

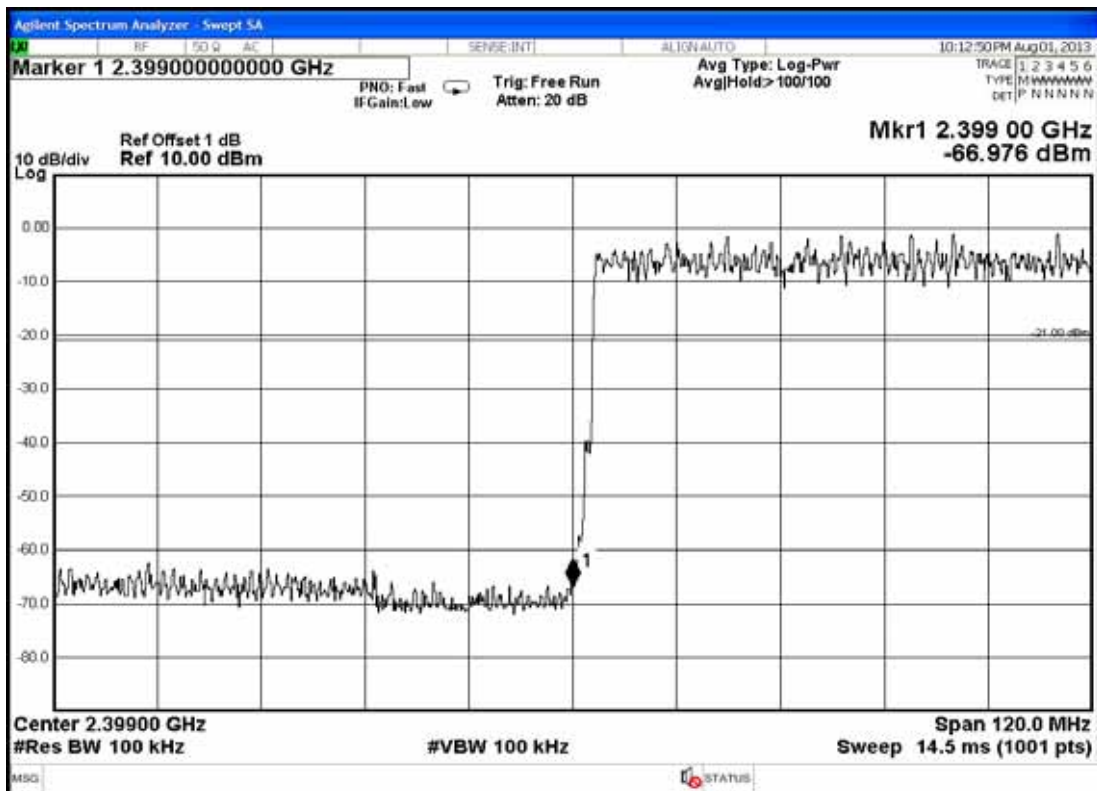


Figure 7: Hopping Mode GFSK, Upper Band edge


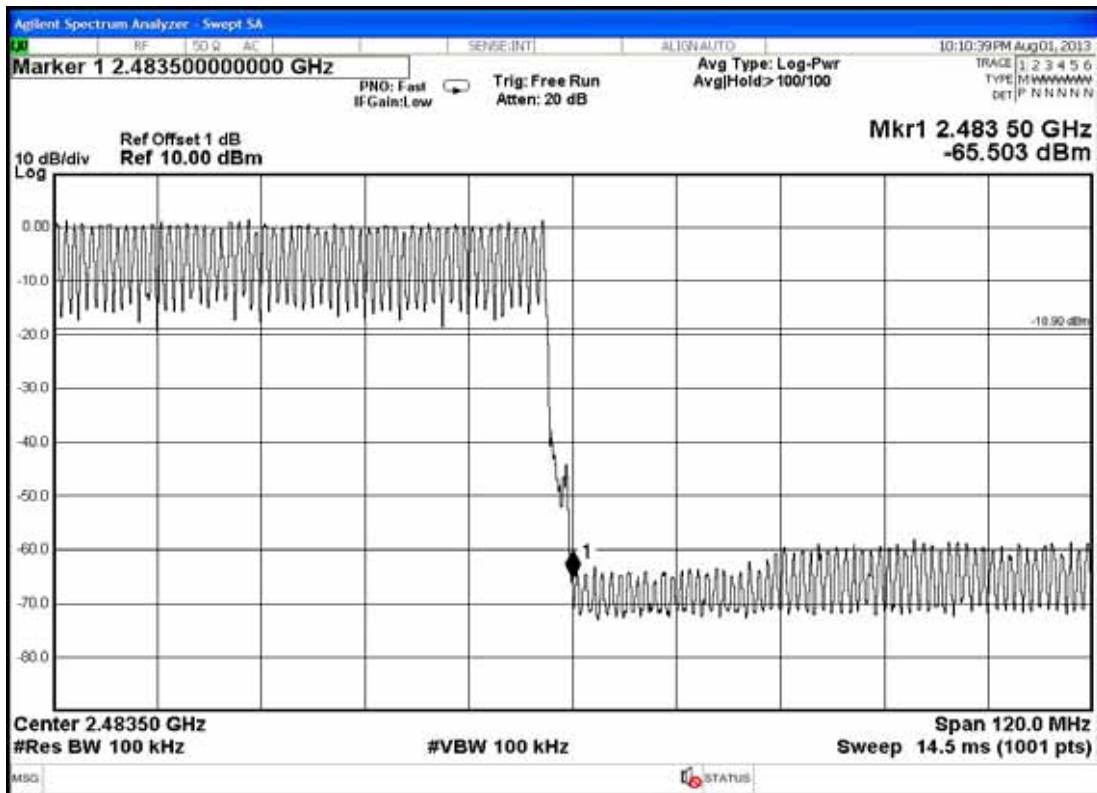


Figure 8: Hopping Mode GFSK, Below Band edge

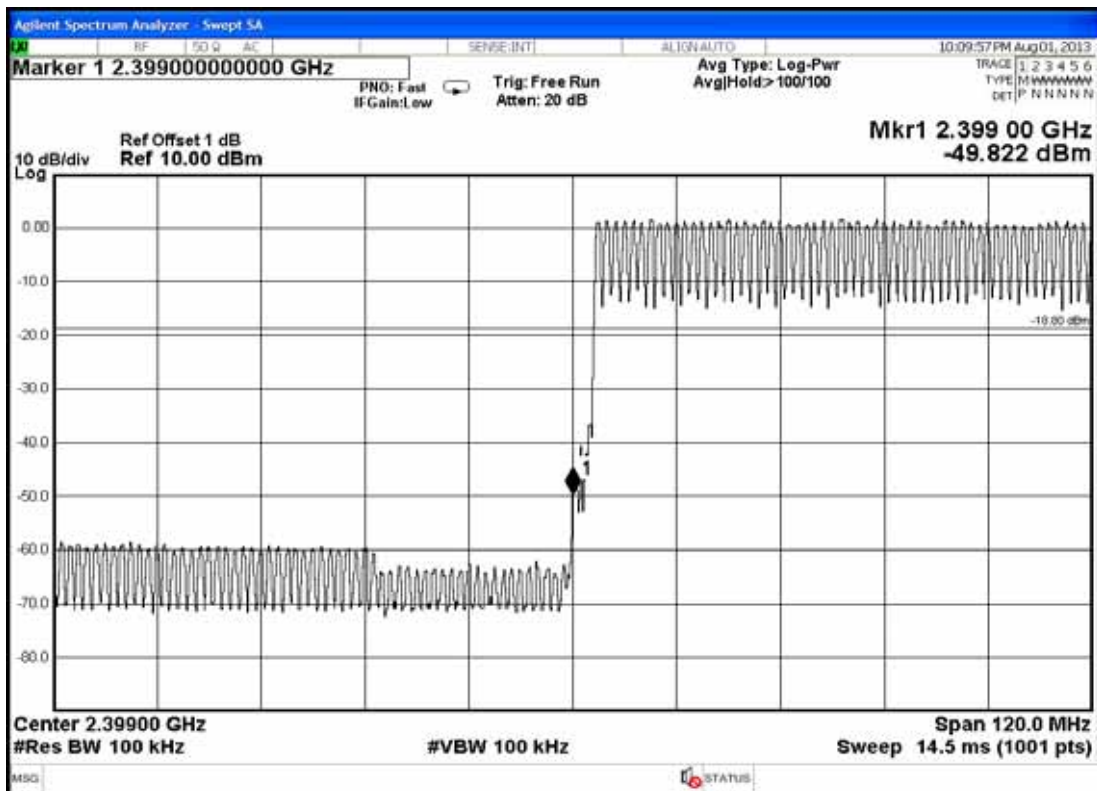

11.DEVIATION TO TEST SPECIFICATIONS

【NONE】

12.PHOTOGRAPHS

12.1.Photos of Conducted Disturbance Measurement



FRONT VIEW OF CONDUCTED MEASUREMENT



BACK VIEW OF CONDUCTED MEASUREMENT

12.2.Photos of Radiated Emission Measurement at Semi-Anechoic Chamber

12.2.1. Frequency Range 30MHz-1GHz (Charge)



(TX Mode)



12.2.2. Frequency Range Above 1GHz (TX Mode)



12.3. Photo of Section RF Conducted Measurement

