

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## CERTIFICATE

Issued date : February 14, 2005  
EUT : DVD Recorder / Video Cassette Recorder  
Model No. : TADM-H202F Serial No. : N / A  
FCC ID No. : BEJ9QKE40510  
Manufacture : LG Electronics Inc. Trade name : LG  
Applicant& Address : LG Electronics Inc,  
20 Yoido-Dong Youngdungpo-Gu, Seoul, 150-721 Korea  
Regulation : Subpart B of Part 15, 47 C.F.R; FCC Rules (Docket 87-389)  
Procedure : ANSI C63.4 : 2003  
Test Location : LG Electronics Digital-media Research Lab.  
Measurement facility (3 & 10 m site)

I hereby certify that the measurements shown in Part II of this report were made in accordance with the procedures indicated and energy emitted by this equipment was found to be within the limits applicable.

I further certify that on the basis of the measurements, the equipment tested is capable of operation in accordance with the requirements set forth in Part 15 of the FCC rules & Regulations under normal use and maintenance.

LG Electronics Inc. hereby assumes responsibility for the certification of compliance to applicable FCC limits in every measurement.

ISSUED BY



Sang-Hyun LEE

RESEARCH ENGINEER

REVIEWED BY



Heung-soo LEE

TEAM LEADER

**LG Electronics Inc.**  
**Pyungtaek Research Lab. Standards Team**

19-1, Cheongho-Ri, Jinwuy-Myun, Pyungtaek-Shi, Kyunggi-Do, 451-713, KOREA  
Tel.: 82-31-610-5336, FAX: 82-31-610-5355

# **TADM-H202F Test Report**

**Test Report No. : 4521-050214LS**

## **REPORT FOR A TV INTERFACE DEVICE**

---

Scope – Measurement and determination of electromagnetic emission (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

### **RF MODULATOR**

**Manufacturer    1    : LG Innotek Co., Ltd.**

**Model No.                : TADM-H202F**

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## PART I

### INTRODUCTION

|                                                                   |    |
|-------------------------------------------------------------------|----|
| 1. GENERAL INFORMATION                                            | 6  |
| 1.1 DESCRIPTION OF EQUIPMENT UNDER TEST                           |    |
| 1.2 REGULATIONS APPLIED TO THE EUT                                |    |
| 1.3 MEASUREMENT PROCEDURE                                         |    |
| 1.4 MEASUREMENT SITE                                              |    |
| 2. TEST CONDITIONS                                                | 7  |
| 2.1 OPERATING CONDITION OF EUT                                    |    |
| 2.2 STABILIZATION OF EUT OPERATING                                |    |
| 2.3 TEMPERATURE                                                   |    |
| 3. TEST SITE                                                      | 7  |
| 3.1 OPEN AREA TEST SITE                                           |    |
| 3.2 A SHIELDED ENCLOSURE                                          |    |
| 4. MEASURING INSTRUMENTATIONS AND CALIBRATIONS                    | 8  |
| 5. DESCRIPTION OF TEST CONDITION                                  | 8  |
| 5.1 POWER LINE CONDUCTED EMISSIONS                                | 8  |
| 5.2 RADIATED EMISSIONS                                            | 9  |
| 5.3 OUTPUT SIGNAL MEASUREMENTS                                    | 10 |
| 5.3.1 OUTPUT SIGNAL LEVEL MEASUREMENTS                            |    |
| 5.3.2 OUTPUT TERMINAL CONDUCTED SPURIOUS<br>EMISSION MEASUREMENTS |    |
| 5.4 TRANSFER SWITCH ISOLATION MEASUREMENTS                        | 11 |
| 6. MEASURING INSTRUMENTS AND SET-UP                               | 12 |
| 6.1 POWER LINE CONDUCTED EMISSIONS                                | 12 |
| 6.2 RADIATED EMISSIONS                                            | 12 |
| 6.3 OUTPUT SIGNAL MEASUREMENTS                                    | 12 |
| 6.4 TRANSFER SWITCH ISOLATION MEASUREMENTS                        | 13 |
| 6.5 VITS SIGNAL GENERATOR ; COMMONLY USED.                        | 13 |

# **TADM-H202F Test Report**

**Test Report No. : 4521-050214LS**

## **PART II TEST DATA**

|                                                                            |           |
|----------------------------------------------------------------------------|-----------|
| <b>1. CONDUCTED EMISSIONS</b>                                              | <b>15</b> |
| <b>2. RADIATED EMISSIONS</b>                                               | <b>19</b> |
| <b>3. OUTPUT SIGNAL LEVEL MEASUREMENTS</b>                                 | <b>20</b> |
| <b>4. OUTPUT TERMINAL CONDUCTED SPURIOUS<br/>EMISSION MEASUREMENTS</b>     | <b>21</b> |
| <b>5. TRANSFER SWITCH ISOLATION MEASUREMENTS</b>                           | <b>22</b> |
| <b>APPENDIX A PHOTOGRAPH OF TEST SET-UP</b>                                | <b>23</b> |
| <b>APPENDIX B LIST OF TEST EQUIPMENT</b>                                   | <b>25</b> |
| <b>APPENDIX C LIST OF SUPPORT DEVICE &amp; ACCESSORIES IN<br/>THE TEST</b> | <b>26</b> |
| <b>APPENDIX D LABELLING REQUIREMENTS</b>                                   | <b>27</b> |

# **TADM-H202F Test Report**

**Test Report No. : 4521-050214LS**

## **PART I**

### **INTRODUCTION**

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 1. GENERAL INFORMATION

### 1.1 DESCRIPTIONS OF EQUIPMENT UNDER TEST( EUT)

- |       |                                                                    |                                                |
|-------|--------------------------------------------------------------------|------------------------------------------------|
| 1.1.1 | Manufacture                                                        | LG Electronics Inc.;                           |
|       |                                                                    | 19-1, CHEONGHO-RI, JINWUY-MYUN, PYUNGTAEK-SHI, |
|       |                                                                    | KYUNGGI-DO 451-713, KOREA                      |
| 1.1.2 | Applicant                                                          | LG Electronics Inc.; 20, YOIDO-DONG            |
|       |                                                                    | YOUNGDUNGPO-GU, SEOUL, 150-721, KOREA          |
| 1.1.3 | MODEL Name                                                         | TADM-H202F                                     |
| 1.1.4 | SERIAL NO                                                          | NOT ATTACHED                                   |
| 1.1.5 | TRADE NAME                                                         | LG                                             |
| 1.1.6 | FCC ID NO                                                          | BEJ9QKE40510                                   |
| 1.1.7 | DESCRIPTIONS                                                       |                                                |
|       | a) Product Type                                                    | DVD Recorder / Video Cassette Recorder         |
|       | b) RF Output Channel                                               | Channel 3 and 4                                |
|       | c) RF IN/OUT Terminal Impedance                                    | 75 ohms (Unbalance F-type coaxial)             |
|       | d) Number of RF IN/OUT terminal                                    | 1EA at each                                    |
|       | e) Terminal for signal                                             | Video/Audio in/out with RCA-type jacks         |
|       | f) Power Supply                                                    | AC120V, 60Hz                                   |
| 1.1.8 | Accessories connected to the EUT                                   |                                                |
|       | a) Video Coaxial cable for RF-OUT terminal provided by manufacture |                                                |
|       | b) Video/Audio cables                                              |                                                |

### 1.2 Regulations applied to the EUT .. FCC Part 15.115

### 1.3 Measurement Procedure ..... ANSI C63.4 : 2003

### 1.4 Measurement site description

- Location of measurement facility  
LG Electronics Inc : Pyungtaek plant  
Digital-Media Standards Team  
19-1, Cheongho-Ri, Jinwuy-Myun, Pyungtak - Shi, 451-713 Korea

Note;

The detailed description of measuring facility was found to be in compliance  
With Federal Communications Commission requirements of 2.948 according to  
ANSI C63.4 on June 27, 2003.

# **TADM-H202F Test Report**

**Test Report No. : 4521-050214LS**

## **2. GENERAL TEST CONDITIONS**

The test data contained in this report was obtained by use of the measurement method recommended in FCC Rules, 47 C.F.R. 15.31(a)(3), with equipment and at the test site filed by the Federal Communications Commission (FCC). The technical standard for a TV interface device are set forth in Subpart B of Part 15 of FCC Rules and regulation. The measurement for Radiated Emissions, Power line Conducted Emissions, Output signal levels, Output Terminal Conducted Spurious Emissions and Transfer Switch Isolation were performed in accordance with the procedures described in ANSI C63.4 : 2003.

### **2. 1 OPERATING CONDITIONS OF THE EUT**

According to the requirements in Subpart B of Part 15, the measurement is made at each function of the EUT being connected with appropriate cables and loads. The model, TADM-H202F has either a video/audio output terminal in RCA-type plugs and antenna input terminal. Therefore, every measurement was investigated in the operation modes, 1)Playing VITS 1Vp-p recorded tape, 2) Recording 1 &5 Vp-p VITS signal supplied through the video input terminal, 3) Recording NTSC TV signal supplied through the at antenna input terminal at each Ch. 3 or/and 4 for each mode applicable.

### **2. 2 STABILIZATION OF EUT OPERATION**

The EUT was operated for sufficient minutes before testing to make it stabilized in a normal operating condition. The power supplied to the EUT was filtered to meet the requirements.

### **2. 3 TEMPERATURE**

Measurement procedure recommended by FCC requires the test to be performed at the site with ambient temperature within 10 to 40 degrees centigrade (50 to 104 F ). The specification for operating temperature of EUT is from 5 to 35 degrees centigrade (41 to 95 F ) as described in owner's manual. The measurement data in this report was obtained at the temperature in the range of 15 ~ 20 degrees centigrade.

## **3. TEST SITE**

### **3. 1 OPEN AREA TEST SITE**

Measurement of radiated emissions from EUT was made at open area test site, a description of which has been submitted to the FCC pursuant to Part 15 of 47 C.F.R., 2.948.

### **3 .2 A SHIELDED ENCLOSURE.**

All other measurements, including power line conducted emissions, output signal levels, and transfer switch isolation, and transfer switch isolation were made in a shielded enclosure providing sufficient shielding effectiveness.

# **TADM-H202F Test Report**

**Test Report No. : 4521-050214LS**

## **4. MEASURING INSTRUMENTATIONS AND CALIBRATIONS.**

Measurements of output signal level, output terminal conducted spurious emissions, and transfer switch isolation (if applicable) were made with instruments calibrated according to the recommendation by manufacturer. Measurement of radiated emissions and power line conducted emissions were made with instruments conforming to American National Standard Specification, ANSI C63.4 (2003).

The calibration of measuring instrument, including any accessories that may affect test results, was performed according to the recommendation by manufactures.

## **5. DESCRIPTION OF TEST CONDITION.**

### **5.1 POWERLINE CONDUCTED EMISSION MEASUREMENT.**

#### **5.1.1 SHIELDED ENCLOSURE.**

The measurement for power-line emissions from EUT was made in shielded enclosure which provides sufficient shielding effectiveness enough not to affect test results.

#### **5.1.2 DETECTOR FUNCTION SELECTION AND BANDWIDTH.**

During conducted emission measurement, a radio noise meter (ESCS 30, Rohde & Schwarz) that has a CISPR quasi-peak detector with 9 KHz IF bandwidth of 6 dB was utilized.

#### **5.1.3 FREQUENCY RANGE TO BE SCANNED.**

For conducted emissions measurement, frequency range of 150 KHz to 30 MHz, included, was investigated.

#### **5.1.4 UNIT OF MEASUREMENT.**

Test results for conducted emissions are reported in micro-volts.

#### **5.1.5 LINE IMPEDANCE STABILIZATION NETWORK**

A LISN with characteristics that conform to the requirements of Part 15 of FCC Rules was used for the measurement of conducted power-line radio noise; (50 micro-henries /50 ohms). Chassis and earth-points for grounding of the LISN were earth-grounded.

#### **5.1.6 TEST CONDITIONS AND CONFIGURATION OF THE EUT.**

The EUT was configured and operated in all modes of operation so as to find the maximum emanation of emissions from EUT.

The EUT has designed to use the public AC lines with rated AC voltage as specified in Owner 's Manual of EUT and filtered to meet the requirement. AC power was supplied to the EUT through LISN with characteristics described in 5.1.5 of part I of this report.

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

The EUT was placed on a 1m \*1.5m \* 80Cm high of wooden table which is place on the earth- grounded conducting surface larger than 2 square-meter. The vertical conducting surface was located 40Cm to the EUT. Length of the power lead in excess of 80 Cm horizontally separating the EUT from LISN was folded back-and-forth form at the center of the power cord not exceeding 40 Cm in length.

Each type of accessory provided by manufacturer or typically used and support equipment were connected to the EUT during measurement to the typical usage and applicable as nearly as practicable.

## 5.2 RADIATED EMISSIONS MEASUREMENT..

### 5.2.1 TEST SITE.

Preliminary measurements were performed in the anechoic chamber to determine the emissions characteristics of the EUT. Final measurements were made in outdoors as described at 3.1 of Part I in this report.

### 5. 2. 2 DETECTOR FUNCTION SELECTION AND BANDWIDTH.

In radiated emissions measurement, a field strength meter (ESCS 30, Rohde & Schwarz) that has a CISPR quasi-peak detector was used. The 6dB bandwidth of the detector of instrument is 120 KHz over frequency range of 9KHz to 2750 MHz. Emissions to be scanned above 1000 MHz may be detected in peak mode.

### 5. 2. 3 UNIT OF MEASUREMENT.

Test results of radiated emissions measurement are reported in micro-volts per meter at the specific distance. Using the unit of dBuV on the test instrument, the indication unit was converted to field strength unit of uV/m as following method;

$$F(\text{uV/m}) = 10^{(R+CL+AF)/20} \text{ (dBuV/m)}$$

here, F : Field Strength in uV/m

R : Meter Reading Level in dBuV,

CL : Cable Loss from antenna to meter in dB,

AF : Antenna Factor of receiving antenna in dB(/m)

# **TADM-H202F Test Report**

**Test Report No. : 4521-050214LS**

## **5. 2. 4 ANTENNAS.**

Measurements were made using calibrated half-wave tuned Bi-log antenna in range of 30 to 1000 MHz that are correctable to levels obtained with a tuned dipole antenna.

For emissions above 1000MHz, horn antenna may be used.

Measurements were also made for both horizontal and vertical polarization.

The horizontal distance between the receiving antenna and the closest periphery of the EUT was 3 meters as described in 8.2.3 of ANSI C63.4-2001.

## **5. 2. 5 FREQUENCY RANGE TO BE SCANNED.**

For radiated emissions measurements, the spectrum in the range of 30 to 1000 MHz and above, if found, was investigated. The measurement for power-line emissions from EUT was made in shielded enclosure which provides

## **5. 2. 6 TEST CONDITIONS AND CONFIGURATION OF EUT.**

The EUT was configured and operated in all modes of operation so as to find the maximum emanation of emissions from EUT.

The power was furnished with rated (normal) AC 120 volts, as specified in the Owner's Manual of EUT. The EUT was placed on the 80 Cm high of non-metallic table(1 \*1.5 meter). The turn table containing the system was rotated and the antenna height was varied 1~4 m to find the maximum emanation of emissions from EUT.

Each type of accessory provided by manufacturer or typically used and support equipment were connected to the EUT during measurement to the typical usage and applicable as nearly as practicable.

## **5. 3 OUTPUT SIGNAL MEASUREMENT.**

During measurements for output signal levels as the RF-out terminal, a spectrum analyzer was used with characteristics described at 4 and 9.3 of part I in this report.

### **5. 3. 1 OUTPUT SIGNAL LEVEL MEASUREMENT.**

RF-out terminal of EUT is designed to feed modulated signals to a TV broadcast receiver via coaxial cable with 75 ohm of rated output impedance.

The output voltage of video carrier frequency at the RF-output terminal of the EUT was measured at each channel (CH. 3 & 4) connecting directly to a spectrum analyzer with 50 ohm input impedance via 75-to-50 ohm matching pad. Indicated voltage on screen of measuring instrument was converted to the voltage of 75 ohm system.

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

- Data conversion method.

$$V_{75}[\text{uV}] = 10^{\frac{(V_r + CF)}{20}} [\text{dBuV}]$$

here,:  $V_{75}$  : Voltage at the RF-out terminal of 75 ohm in uV

$V_r$  : Voltage read at analyzer with 50 ohm input-impedance in dBuV

$CF$  : Conversion Factor of the matching pad in dB.

## 5.3.2 OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSION MEASUREMENT.

Any other spectrum at RF-output terminal appearing on frequencies removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was searched at each channel.

To clarify the emissions emanated from RF output terminal of the EUT, RF pre-amplifier was utilized. The gain of pre-amplifier at each frequency measured from EUT were obtained after sufficient warm-up for stabilization of gain.

- \* Data conversion method.

$$V_{75}[\text{uV}] = 10^{\frac{(V_r + CF - PG + AT)}{20}} [\text{dBuV}]$$

Where,  $V_{75}$  : Voltage at the RF-out terminal of 75 ohm in uV,

$V_r$  : Voltage read at analyzer with 50 ohm input-impedance in dBuV

$CF$  : Conversion Factor of the matching pad in dB,

$PG$  : Gain of pre-amplifier in dB,

$AT$  : Attenuation of attenuator in dB.

## 5.4 TRANSFER SWITCH ISOLATION MEASUREMENT.

As a transfer switch was equipped with EUT as an antenna-in, measurement of isolation were made at RF-input terminal with rated input impedance.

The maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

To clarify the emissions emanated from RF output terminal of the EUT, RF pre-amplifier was utilized. The gain of pre-amplifier at each frequency measured from EUT were obtained after sufficient warm-up for stabilization of gain.

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

\* DATA CONVERSION METHOD.

$$V_{75}[\mu V] = 10^{\frac{(V_r + CF - PG + AT)}{20}} [dB\mu V]$$

where,  $V_{75}$  : Voltage at the RF-out terminal of 75 ohm in  $\mu V$   
 $V_r$  : Voltage read at analyzer with 50 ohm input-impedance in dB $\mu V$   
 $CF$  : Conversion Factor of the matching pad in dB,  
 $PG$  : Gain of pre-amplifier in dB,  
 $AT$  : Attenuation of attenuator in dB.

## 6. MEASURING INSTRUMENTS AND SET-UP.

### 6.1 POWERLINE CONDUCTED EMISSIONS.

#### 6.1.1 Radio Noise Meter.

Rohde & Schwarz, Model ESCS 30 { 9 KHz to 2750 MHz }

Detector function : CISPR Quasi-Peak  
IF Bandwidth : 9 KHz

#### 6.1.2 Line Impedance Stabilization Network (LISN).

R&S, Model ESH2- Z5  
Impedance Characteristic : 50  $\mu H$  / 50 ohm

### 6.2 RADIATED EMISSIONS.

#### 6.2.1 Field Strength Meter.

Rohde & Schwarz, Model ESCS 30 { 9 KHz to 2750 MHz }  
ESMI { 20 Hz to 26.5 GHz }

Detector function : CISPR Quasi-Peak  
IF Bandwidth : 120 KHz

#### 6.2.2 Receiving Antennas.

- a) Chase, Model CBL611A : Bilog antenna { 30 to 1000 MHz }
- b) Schwarzbeck, Model BBA9102-B : Horn antenna { 1 GHz to 9.5 GHz }

### 6.3 OUTPUT SIGNAL MEASUREMENTS.

#### 6.3.1 Spectrum Analyzer.

Hewlett-Packard, Model HP8568B  
Span : 10 MHz SWP : 20 msec.  
RBW : 100 KHz VBW : 300 KHz

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 6.3.2 RF Pre-amplifier.

Hewlett-Packard, Model HP8447F : 25 dB (typical gain)

## 6.3.3 Impedance matching pad.

Rohde & Schwarz, Model RAM : 7.5 dB loss , from 75 ohm to 50 ohm

## 6.3.4 Attenuator.

Rohde & Schwarz, Model DNF (N type) : 3 dB attenuation

## 6.4 TRANSFER SWITCH ISOLATION MEASUREMENTS.

### 6.4.1 Spectrum Analyzer.

Hewlett-Packard, Model HP8568B

Span : 1 MHz

SWP : 30 msec.

RBW : 10 KHz

VBW : 30 KHz

### 6.4.2 RF Pre-amplifier.

Hewlett-Packard, Model HP8447F : About 25 dB

### 6.4.3 Impedance matching pad.

Rohde & Schwarz, Model RAM : 7.5 dB loss , from 75 ohm to 50 ohm

### 6.4.4 Attenuator.

Rohde & Schwarz, Model DNF (N type) : 3 dB attenuation

## 6.5 VITS SIGNAL GENERATOR ; COMMONLY USED.

Anritsu, Model MG-318A : VITS 1 Vp-p, 5 Vp-p Generator.

[NOTE] 1) The list of instruments and accessories used the measurements are attached at the end of the report, Appendix A and B

2) In every test results, the margins against the limits are shown.

The margins are calculated as following;

$$\text{MARGIN[ dB]} = 20\log(R/L)$$

where, R : Corrected Results, [uV] or [uV/m],

L : Corresponding Limit, [uV] or [uV/m]

3) The tight limit is applied at the edge of two frequency band.

# **TADM-H202F Test Report**

**Test Report No. : 4521-050214LS**

## **Part II**

### **TEST DATA**

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 1. POWER LINE CONDUCTED EMISSIONS (\*15.107)

PRODUCT : DVD Recorder / Video Cassette Recorder

MODEL Name : TADM-H202F

Modulator Maker : LG Innotek Co., Ltd.

TEST DATE : February. 3th, 2005

### 1.1) LG IT Modulator(TADM-H202F) Data;

| Tuner Mode              |                     |         |                |         |               |         |      |
|-------------------------|---------------------|---------|----------------|---------|---------------|---------|------|
| Frequency               | RF Voltage [ dBuV ] |         | Limit [ dBuV ] |         | Margin [ dB ] |         | Line |
| (MHz)                   | Q-peak              | Average | Q-peak         | Average | Q-peak        | Average |      |
| 0.54                    | 43.3                | 31.5    | 56.0           | 46.0    | 12.7          | 14.5    | N    |
| 0.58                    | 42.1                | 29.5    | 56.0           | 46.0    | 13.9          | 16.5    | L1   |
| 4.66                    | 35.7                | 24.7    | 56.0           | 46.0    | 20.3          | 21.3    | L1   |
| 4.87                    | 34.7                | 23.7    | 56.0           | 46.0    | 21.3          | 22.3    | L1   |
| DVD Play & VCR REC Mode |                     |         |                |         |               |         |      |
| Frequency               | RF Voltage [ dBuV ] |         | Limit [ dBuV ] |         | Margin [ dB ] |         | Line |
| (MHz)                   | Q-peak              | Average | Q-peak         | Average | Q-peak        | Average |      |
| 0.55                    | 43.9                | 32.1    | 56.0           | 46.0    | 12.1          | 13.9    | L1   |
| 0.58                    | 39.5                | 27.5    | 56.0           | 46.0    | 16.5          | 18.5    | N    |
| 4.10                    | 35.6                | 23.6    | 56.0           | 46.0    | 20.4          | 22.4    | N    |
| 4.83                    | 35.3                | 23.8    | 56.0           | 46.0    | 20.7          | 22.2    | N    |
| VCR Play & DVD REC Mode |                     |         |                |         |               |         |      |
| Frequency               | RF Voltage [ dBuV ] |         | Limit [ dBuV ] |         | Margin [ dB ] |         | Line |
| (MHz)                   | Q-peak              | Average | Q-peak         | Average | Q-peak        | Average |      |
| 0.50                    | 41.6                | 30.1    | 56.0           | 46.0    | 14.4          | 15.9    | L1   |
| 0.53                    | 43.6                | 31.7    | 56.0           | 46.0    | 12.4          | 14.3    | L1   |
| 0.58                    | 42.4                | 29.8    | 56.0           | 46.0    | 13.6          | 16.2    | L1   |
| 4.67                    | 35.1                | 24.4    | 56.0           | 46.0    | 20.9          | 21.6    | L1   |

#### NOTES:


- 1. All modes of operation were investigated. The RF modulator was switched to Channel 3 or 4 and worst-case emissions are reported*
- 2. All other emissions are non-significant.**

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 1.3) LG IT Modulator(TADM-H202F) Data;


### 1.3.1) Tuner Mode

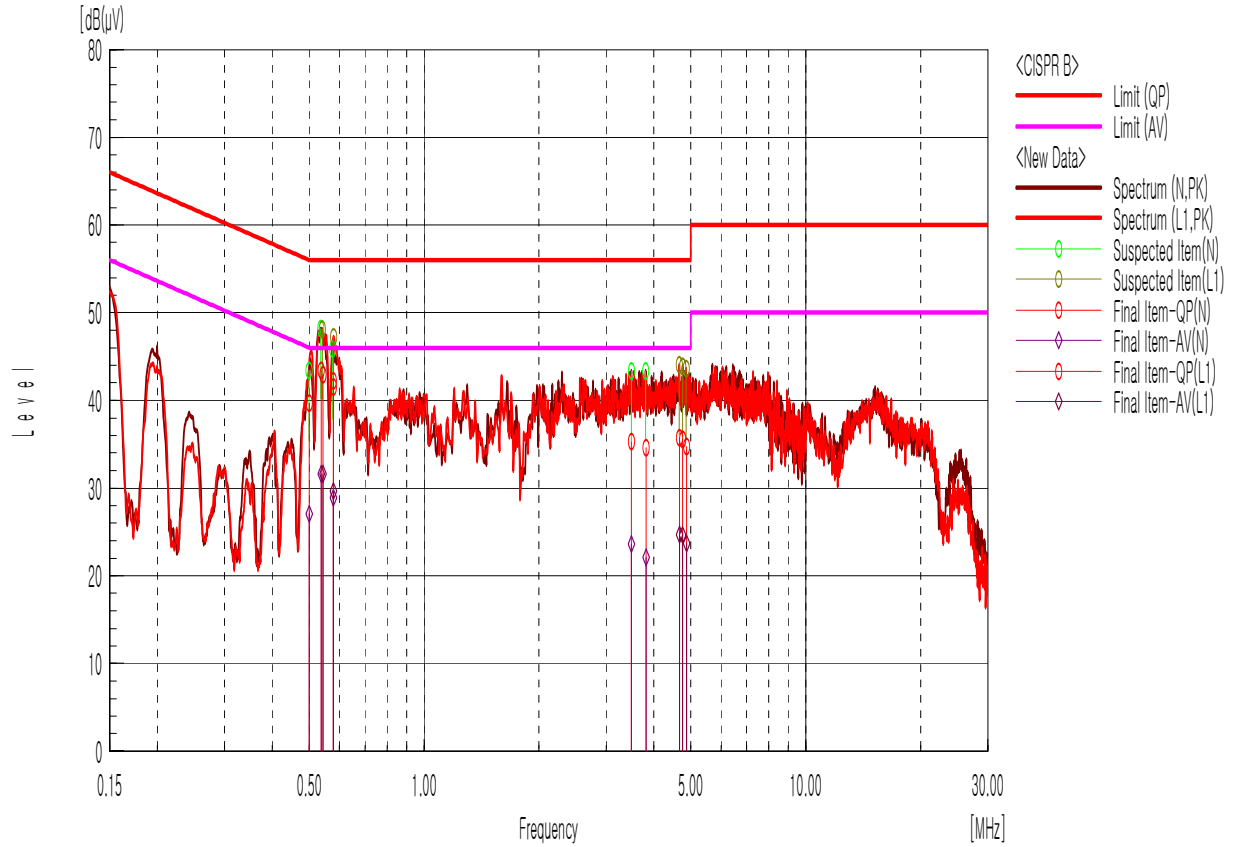

# TADM-H202F Test Report

Test Report No. : 4521-050214LS


## 1.3.2) DVD PLAY & VCR REC Mode

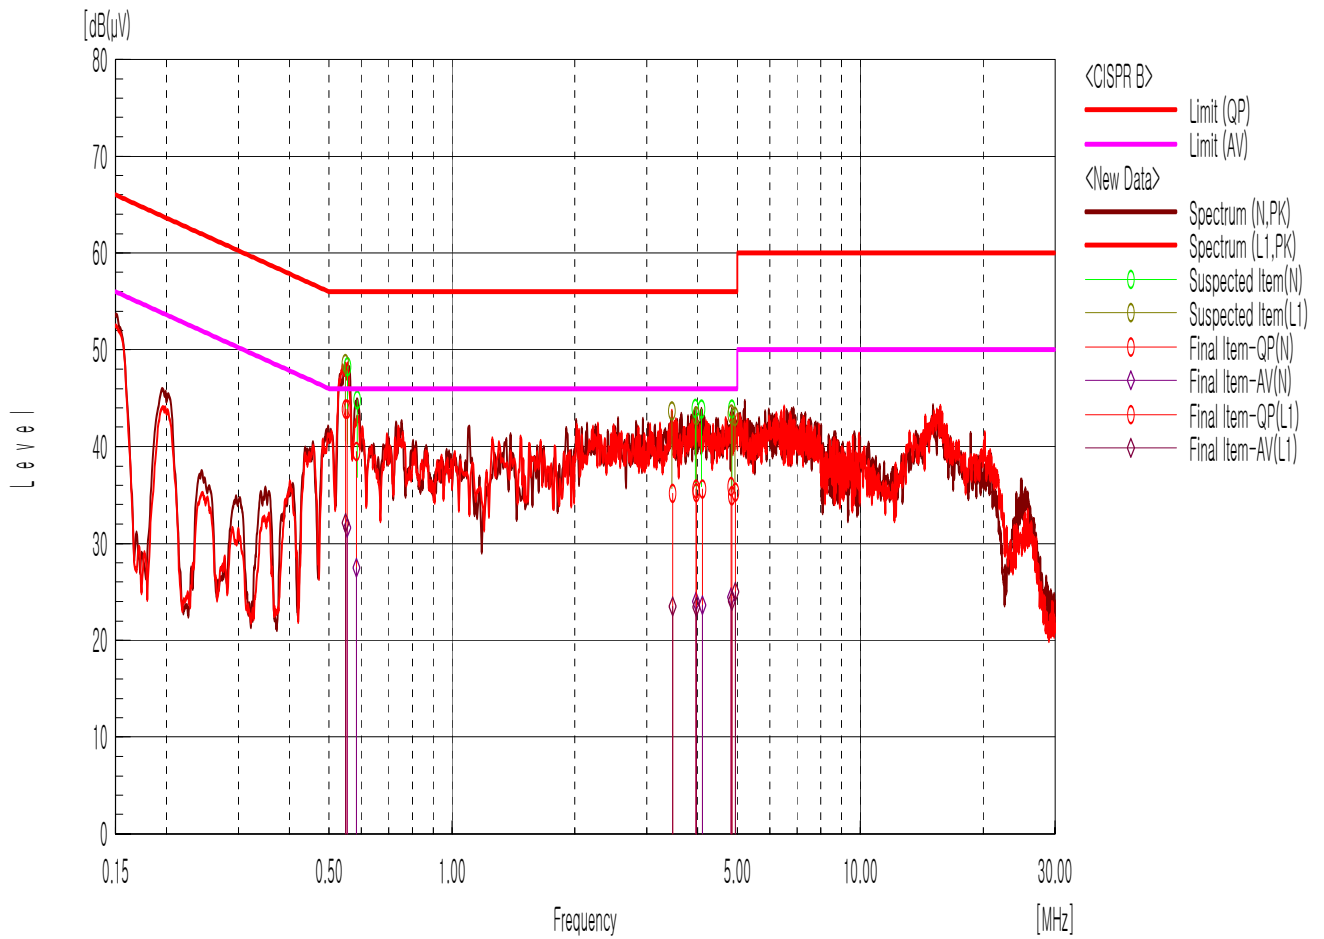

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 1.3.3) VCR PLAY & DVD REC Mode

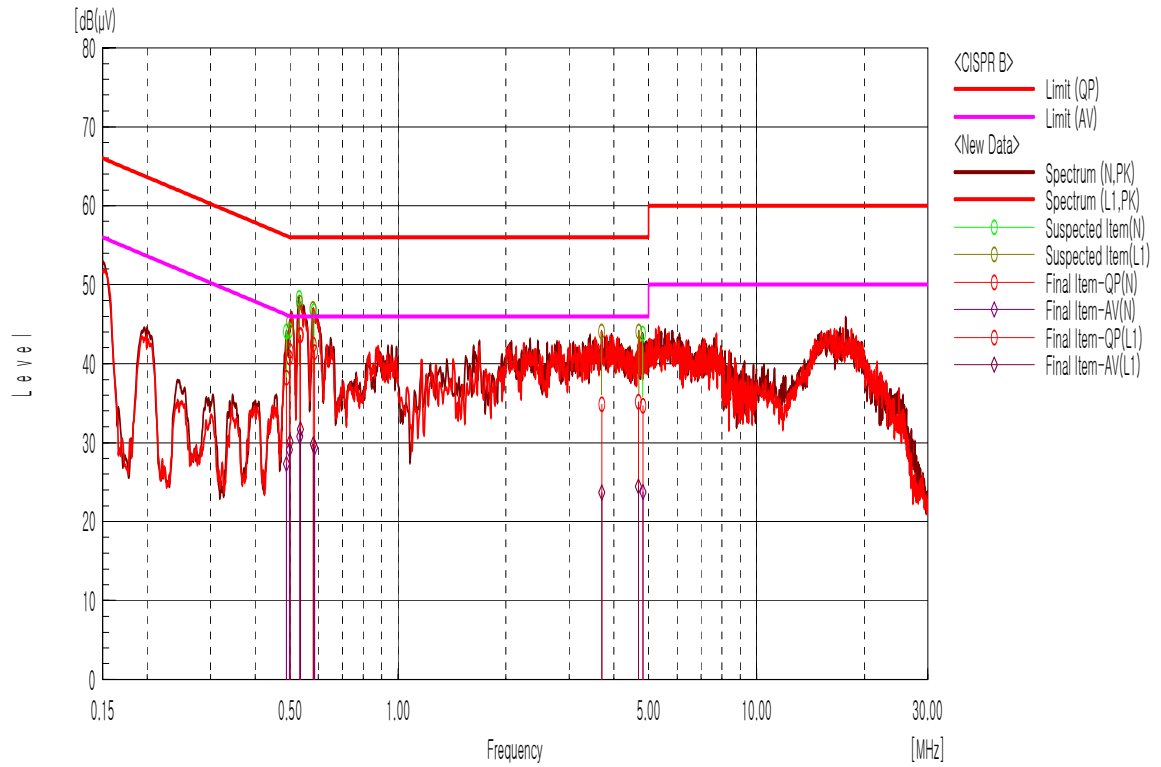

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 2. RADIATED EMISSIONS (\*15.109)

PRODUCT : DVD Recorder / Video Cassette Recorder

MODEL Name : TADM-H202F

Modulator Maker : LG Innotek Co., Ltd.

TEST DATE : February. 3th, 2005

### 2.1) LG IT Modulator (TADM-H202F) Data;

| <i>FREQ.</i><br>[MHz] | <i>Reading</i><br>[dBuV] | <i>AF</i><br>[dB/m] | <i>CL</i><br>[dB] | <i>Pol.</i><br>(Hor / Ver) | <i>F/S</i><br>[uV/m] | <i>Limit</i><br>[uV/m] | <i>Margin</i><br>[dB] |
|-----------------------|--------------------------|---------------------|-------------------|----------------------------|----------------------|------------------------|-----------------------|
| 33.8                  | 15.80                    | 15.50               | 0.92              | Ver                        | 40.8                 | 100                    | -7.8                  |
| 297.0                 | 22.53                    | 13.60               | 2.65              | Hor                        | 86.9                 | 200                    | -7.2                  |
| 375.0                 | 23.56                    | 15.50               | 2.94              | Ver                        | 125.9                | 200                    | -4.0                  |
| 525.1                 | 16.10                    | 18.50               | 3.53              | Ver                        | 80.6                 | 200                    | -7.9                  |
| 884.7                 | 12.90                    | 22.75               | 4.65              | Ver                        | 103.5                | 200                    | -5.7                  |
| 900.1                 | 14.50                    | 22.80               | 4.70              | Ver                        | 125.9                | 200                    | -4.0                  |
|                       |                          |                     |                   |                            |                      |                        |                       |

\* Sample Calculation at 33.8 MHz = 10  $\frac{[(15.8+15.5+0.92)/20]}{10}$  = 40.8 uV/m

#### NOTES:

1. All modes of operation were investigated. The RF modulator was switched to Channel 3 or 4 and worst-case emissions are reported.
2. All other emissions are non-significant.
3. AF = Antenna factor      CL = Cable loss      F/S = Field Strength

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 3.OUTPUT TERMINAL SIGNAL LEVEL (\*15.115)

PRODUCT : DVD Recorder / Video Cassette Recorder  
MODEL Name : TADM-H202F  
Modulator Maker : LG Innotek Co., Ltd.  
TEST DATE : February. 3th, 2005

### 3.1) LGIT Modulator(TADM-H202F) Data;

| CH            | Frequency<br>(MHz) | Reading<br>[dBuV] | M/P<br>Loss (dB) | RF Voltage<br>[uV] | Limit<br>[uV] | Margin [dB]<br>Q-peak |
|---------------|--------------------|-------------------|------------------|--------------------|---------------|-----------------------|
| 3<br>(Visual) | 61.22              | 60.50             | 7.5              | 2511.89            | 3000          | -1.5                  |
| 3<br>(Aural)  | 65.75              | 45.90             |                  | 467.74             | 671           | -3.1                  |
| 4<br>(Visual) | 67.22              | 60.20             | 7.5              | 2426.61            | 3000          | -1.8                  |
| 4<br>(Aural)  | 71.75              | 45.80             |                  | 462.38             | 671           | -3.2                  |

\* Sample Calculation at 61.22 MHz =  $10^{[(60.5+7.5)/20]}$  = 2511.89 uV

#### NOTES:

1. All modes of operation were investigated and worst -case emissions are reported.
2. Output Impedance of RF-Output Terminal : 75 ohm
3. MP = Impedance Matching Pad

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 4. OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSIONS

PRODUCT : DVD Recorder / Video Cassette Recorder  
 MODEL Name : TADM-H202F  
 Modulator Maker : LG Innotek Co., Ltd.  
 TEST DATE : February. 3th, 2005

### 4.1) LGIT Modulator (TADM-H202F) Data ;

| CH | Frequency<br>(MHz) | Reading<br>[dBuV] | M/P<br>Loss [dB] | PreAmp Gain<br>[dB] | Attn.<br>[dB] | Output Level<br>[uV] | Limit<br>[uV] | Margin<br>[dB] |
|----|--------------------|-------------------|------------------|---------------------|---------------|----------------------|---------------|----------------|
| 3  | 122.2              | 31.00             | 7.5              | 20.0                | 3.0           | 11.9                 | 95            | -18.1          |
|    | 245.8              | 33.80             |                  | 20.0                |               | 16.4                 |               | -15.3          |
|    | 469.8              | 33.60             |                  | 20.0                |               | 16.0                 |               | -15.5          |
|    | 495.6              | 34.40             |                  | 20.0                |               | 17.6                 |               | -14.7          |
|    | 798.7              | 30.40             |                  | 20.0                |               | 11.1                 |               | -18.7          |
|    | 857.3              | 31.20             |                  | 20.0                |               | 12.2                 |               | -17.9          |
| 4  | 134.2              | 21.60             | 7.5              | 20.0                | 3.0           | 4.0                  | 95            | -27.5          |
|    | 202.1              | 33.30             |                  | 20.0                |               | 15.5                 |               | -15.8          |
|    | 595.0              | 32.30             |                  | 20.0                |               | 13.8                 |               | -16.8          |
|    | 609.5              | 26.60             |                  | 20.0                |               | 7.2                  |               | -22.5          |
|    | 802.1              | 26.60             |                  | 20.0                |               | 7.2                  |               | -22.5          |
|    | 810.8              | 29.50             |                  | 20.0                |               | 10.0                 |               | -19.6          |

$$* \text{ Sample Calculation at 122.2 MHz} = 10^{[(31.0+7.5-20.0+3.0)/20]} = 11.9 \text{ uV}$$

#### NOTES:

1. Frequency range of 30 MHz to 1000 MHz removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was investigated at each channel.
2. All other emissions are not significant.

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 5. TRANSFER SWITCH ISOLATION (\* 1 5 . 1 1 5)

PRODUCT : DVD Recorder / Video Cassette Recorder  
MODEL Name : TADM-H202F  
Modulator Maker : LG Innotek Co., Ltd.  
TEST DATE : February. 3th, 2005

### 5-1) LGIT Modulator(TADM-H202F) Data;

| CH | Frequency<br>(MHz) | Reading<br>[dBuV] | M/P<br>Loss [dB] | PreAmp Gain<br>[dB] | Attn.<br>[dB] | Output Level<br>[uV] | Limit<br>[uV] | Margin<br>[dB] |
|----|--------------------|-------------------|------------------|---------------------|---------------|----------------------|---------------|----------------|
| 3  | 61.250             | 14.36             | 7.5              | 20.0                | 3.0           | 1.75                 | 3.0           | -4.7           |
| 4  | 67.253             | 15.17             | 7.5              | 20.0                | 3.0           | 1.92                 | 3.0           | -3.9           |

#### NOTES:

1. The transfer switch is internal to the device and is access automatically.
2. The transfer isolation switch provides automatic selection of either antenna/TV or VCR.

$$\begin{aligned} & \text{[(14.36+7.5-20.0+3.0)/20]} \\ * \text{ Sample Calculation at 61.250 MHz} &= 10 \qquad \qquad \qquad = 1.75 \text{ uV} \end{aligned}$$

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## Appendix A

Photograph of Test Set-up ( Power line conducted emissions)



# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## Photographs of Test Set-up ( Radiated emissions)



# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## Appendix B

### LIST OF TEST EQUIPMENT

| Type                      | Model             | Cal. Due Date | S / N      |
|---------------------------|-------------------|---------------|------------|
| EMI measurement system    | R&S, ESMI         | 09/04/05      | 846064/004 |
| Test receiver             | R&S, ESCS 30      | 09/04/05      | 100093     |
| Test receiver             | R&S, ESCS 30      | 03/05/05      | 100094     |
| Spectrum Analyzer         | HP8568B           | 07/03/05      | 3107A01571 |
| Quasi-peak Adaptor        | HP85650A          | 07/03/05      | 3107A01237 |
| RF Pre-selector           | HP85685A          | 07/03/05      | 3107A01237 |
| Pre-Amplifier             | HP8447F           | 07/03/05      | 2805A02879 |
|                           | (BNC-type)        |               |            |
| Pre-Amplifier             | HP8447F (N-type)  | 07/01/05      | 3113A05259 |
| Pre-Amplifier             | HP8447C (N-type)  | 07/03/05      | 1937A00732 |
| RF Signal Generator       | Fluk, 6060B       | 07/03/05      | 5655209    |
| IRE STD. signal Generator | Shibasoku, VG 40A | 03/05/05      | M-56221002 |
| TV CH. Signal Generator   | Shibasoku, 363US  | 03/05/05      | M-14817005 |
| TV CH. Signal Generator   | Shibasoku, 363VS  | 03/05/05      | M-12762002 |
| NTSC Pattern Generator    | Leader, LCG-400   | 03/14/05      | 705008     |
| VITS Generator            | Anritsu, MG318A   | 10/03/05      | M11122     |
| VITS Generator            | Anritsu, MG318A   | 02/23/05      | M10478     |
| Tuned Dipole Antenna      | EMCO, 3121C       | 07/26/05      | 9160-620   |
| Tuned Dipole Antenna      | EMCO, 3121C       | 07/26/05      | 9160-621   |
| VHF Dipole Antenna        | S/B, VHA9103      |               | N/A        |
| UHF Dipole Antenna        | S/B, UHA9105      |               | N/A        |
| Bilog Antenna             | Chase, CBL611A    | 10/11/05      | 1838       |
| Biconical Antenna         | R&S, HUF-Z2       | 10/11/05      | N/A        |
| Biconical Antenna         | S/B, BBA9106      | 07/21/05      | N/A        |
| Biconical Antenna         | S/B, BBA9106      | 07/21/05      | N/A        |
| Log-periodic Antenna      | S/B, UHAL9107     | 10/11/05      | N/A        |
| Log-periodic Antenna      | S/B, UHAL9107     | 07/21/05      | N/A        |
| Log-periodic Antenna      | EMCO, 3146        | 07/21/05      | 1583       |
| Horn Antenna              | S/B, BBA 9102-B   | 10/11/05      | 106        |
| Laurel Antenna            |                   |               | N/A        |
| IEC 106 Antenna           | HFU2-Z4           |               | N/A        |
| Absorbing Clamp           | R&S, MDS21        | 10/25/05      | 860846/004 |
| Absorbing Clamp           | R&S, MDS21        | 07/21/05      | 301116/072 |
| Kyoritsu LISN             | KNW-407           | 07/05/05      | 8-6555-4   |
| Shibasoku LISN            | 563               | 07/03/05      | 55416001   |
| R & S LISN                | ESH3-Z5           | 07/03/05      | 862770/013 |
| Schwarzbeck LISN          | NSLK8126          | 07/05/05      | 8126259    |
| R & S Artificial Mains    | ESH2-Z5           |               | 861741/014 |
| Test receiver             | ESPI3             | 12/03/05      | 101012     |
| Spectrum Analyzer         | E4402B            | 11/23/05      | MY44211574 |

]

# **TADM-H202F Test Report**

**Test Report No. : 4521-050214LS**

## **Appendix C**

### **List of Support Device and Accessories in the test**

1. EUT : DVD Recorder / Video Cassette Recorder

Model : TADM-H202F                      S / N : N/A

2. Accessories

1.5 m. unshielded RF coaxial cable supplied by manufacturer (1 EA)

1.5 m. unshielded RCA cables for Video/Audio

IEC-106 Antenna

3. TV Monitor

Model : CT-21Q22KE

S/N : 110KT00542

4. VITS Signal Generator

Anritsu, Model MG-318A : VITS 1 Vp-p, 5 Vp-p Generator.


# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## Appendix D

### SAMPLE LABEL :

According to Labeling Requirements per \* 2.295 & \* 15.19

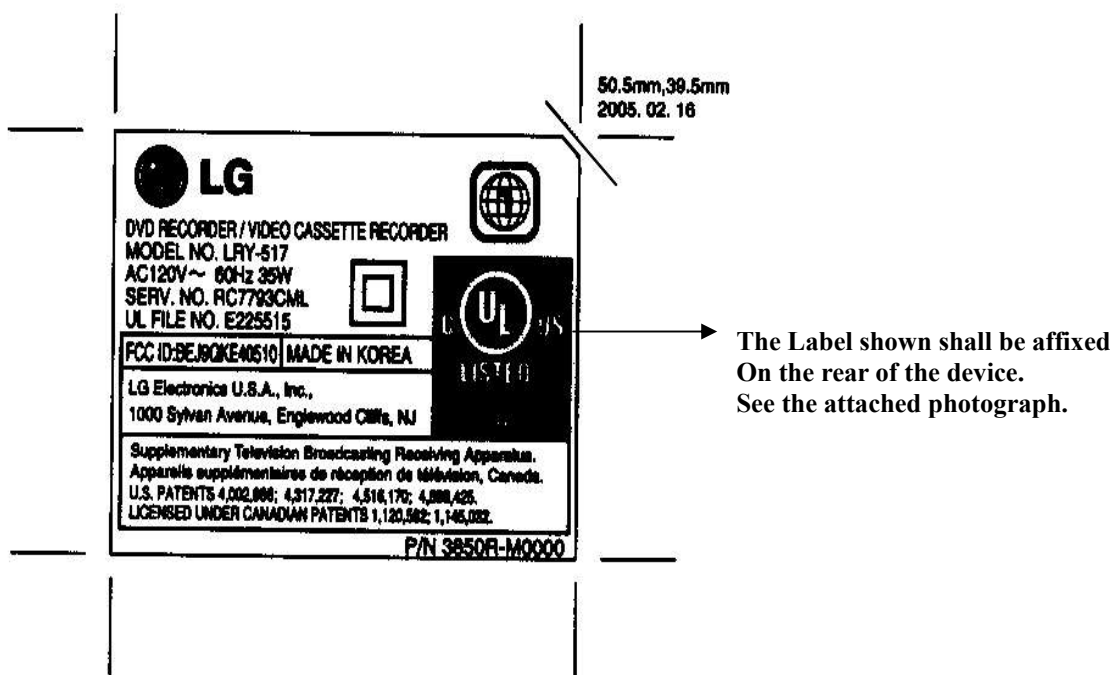

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES.  
OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:  
1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE AND  
2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING  
INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.

The statement is molded on the backside of the device.  
See the attached photograph

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## Report of Measurements for TV Interface Device under FCC Part 15

Manufacture : LG Electronics Inc  
19-1, CHEONGHO-RI, JINWUY-MYUN, PYUNGTAEK-SHI,  
KYUNGGI-DO 451-713, KOREA

PRODUCT : DVD Recorder / Video Cassette Recorder  
EUT Model Name : TADM-H202F  
Serial No : N/A

Description of the Modulator & Tuner unit ;  
Tuner Maker : LG Innotek Co., Ltd.  
Tuner type : TADM-H202F

Frequency range tuned by the receiver : 54 ~ 806 MHz

This receiver meets FCC Regulations covering comparable systems of VHF and UHF TV tuning .

Measurement Procedure : EIA RS – 378 , MP – 2 , ANSI C63.4 : 2001

Date of Measurements : June. 10~15, 2004

Measurements Results : The results obtained from the measuring of this device  
Are as shown in the attached sheets.  
And comply with new rules adapted under Docket 87-389

1. Peak Picture Sensitivity : UHF – VHF < 8.0 dBuV
2. UHF Noise figure : Meet noise figure of 14 dB
3. Radiation of VHF/UHF Portion : Highest 33.5 dBuV/m at 847 MHz
4. Antenna Power conduction : Highest 41.16 dBuV at 1694 MHz



Sang-Hyun Lee  
Research engineer  
Digital-media standards team

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 1. Peak Picture Sensitivity :

1) LGIT Tuner (TADM-H202F) : Limit UHF-VHF < 8 dBuV Result : O . K

## 2. UHF Noise Figure ;

### 2-1) LGIT Tuner (TADM-H202F) ;

| Channels (UHF)                                                                   | Reading (dB) | Matching Loss(dB) | Noise Figure (dB) | Limit (dB) |
|----------------------------------------------------------------------------------|--------------|-------------------|-------------------|------------|
| 14                                                                               | 9.5          | 1.75              | 7.35              | 14.0       |
| 20                                                                               | 9.6          |                   | 7.55              |            |
| 26                                                                               | 10.2         |                   | 7.75              |            |
| 32                                                                               | 9.7          |                   | 7.65              |            |
| 38                                                                               | 10.2         |                   | 7.75              |            |
| 44                                                                               | 9.5          |                   | 7.55              |            |
| 50                                                                               | 9.3          |                   | 7.65              |            |
| 56                                                                               | 10.2         |                   | 7.85              |            |
| 62                                                                               | 10.2         |                   | 7.95              |            |
| 69                                                                               | 10.4         |                   | 7.85              |            |
| 4.0dB subtracted for power splitter,      < 0.3 dB added for IF amp contribution |              |                   |                   |            |

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 3. Radiated Emission Measurements

### 3-1) LGIT Tuner (TADM-H202F) ;

| Frequency to which tuned |        | Frequency of the emission (MHz) | Result at 3 m (dBuV/m) | Limit at 3 m (dBuV/m) |
|--------------------------|--------|---------------------------------|------------------------|-----------------------|
| Channel                  | (MHz)  |                                 |                        |                       |
| 2                        | 55.25  | 101                             | <20                    | 43.5                  |
| 3                        | 61.25  | 107                             | <20                    | 43.5                  |
| 4                        | 67.25  | 113                             | <20                    | 43.5                  |
| 5                        | 77.25  | 123                             | <20                    | 43.5                  |
| 6                        | 83.25  | 129                             | <20                    | 43.5                  |
| 7                        | 175.25 | 221                             | <20                    | 46.0                  |
| 8                        | 181.25 | 227                             | <20                    | 46.0                  |
| 9                        | 187.25 | 233                             | <20                    | 46.0                  |
| 10                       | 193.25 | 239                             | <20                    | 46.0                  |
| 11                       | 199.25 | 245                             | <20                    | 46.0                  |
| 12                       | 205.25 | 251                             | <20                    | 46.0                  |
| 13                       | 211.25 | 257                             | <20                    | 46.0                  |
| 14                       | 471.25 | 517                             | 28.5                   | 46.0                  |
|                          |        | 1034                            | <40                    | 54.0                  |
| 19                       | 501.25 | 547                             | 27.6                   | 46.0                  |
|                          |        | 1094                            | <40                    | 54.0                  |
| 28                       | 555.25 | 601                             | 28.6                   | 46.0                  |
|                          |        | 1202                            | <40                    | 54.0                  |
| 36                       | 603.25 | 649                             | 29.7                   | 46.0                  |
|                          |        | 1298                            | <40                    | 54.0                  |
| 44                       | 651.25 | 697                             | 29.9                   | 46.0                  |
|                          |        | 1394                            | <40                    | 54.0                  |
| 53                       | 705.25 | 751                             | 30.7                   | 46.0                  |
|                          |        | 1502                            | <40                    | 54.0                  |
| 61                       | 753.25 | 799                             | 31.4                   | 46.0                  |
|                          |        | 1598                            | <40                    | 54.0                  |
| 69                       | 801.25 | 847                             | 33.5                   | 46.0                  |
|                          |        | 1694                            | <40                    | 54.0                  |

# TADM-H202F Test Report

Test Report No. : 4521-050214LS

## 4. Antenna Power Conduction Measurements

### 4-1) LGIT Tuner (TADM-H202F) ;

| Frequency to which tuned |        | Frequency of the emission (MHz) | Result ( dBuV ) | Limit ( dBuV ) |
|--------------------------|--------|---------------------------------|-----------------|----------------|
| Channel                  | (MHz)  |                                 |                 |                |
| 2                        | 55.25  | 101                             | <35.0           | 51.8           |
| 3                        | 61.25  | 107                             | <35.0           |                |
| 4                        | 67.25  | 113                             | <35.0           |                |
| 5                        | 77.25  | 123                             | <35.0           |                |
| 6                        | 83.25  | 129                             | <35.0           |                |
| 7                        | 175.25 | 221                             | <35.0           |                |
| 8                        | 181.25 | 227                             | <35.0           |                |
| 9                        | 187.25 | 233                             | <35.0           |                |
| 10                       | 193.25 | 239                             | <35.0           |                |
| 11                       | 199.25 | 245                             | <35.0           |                |
| 12                       | 205.25 | 251                             | <35.0           |                |
| 13                       | 211.25 | 257                             | <35.0           |                |
| 14                       | 471.25 | 517<br>1034                     | 33.86<br>33.87  |                |
| 19                       | 501.25 | 547<br>1094                     | 33.40<br>34.14  |                |
| 28                       | 555.25 | 601<br>1202                     | 32.88<br>34.33  |                |
| 36                       | 603.25 | 649<br>1298                     | 33.65<br>35.16  |                |
| 44                       | 651.25 | 697<br>1394                     | 34.28<br>34.50  |                |
| 53                       | 705.25 | 751<br>1502                     | 34.98<br>35.47  |                |
| 61                       | 753.25 | 799<br>1598                     | 34.62<br>37.78  |                |
| 69                       | 801.25 | 847<br>1694                     | 34.78<br>41.16  |                |