

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-212-RWD-056

Reception No. : 2012005262

Applicant : LG Electronics USA

Address : 111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States

Manufacturer : LG Electronics Inc.

Address : 10, Magokjungang 10-ro, Gangseo-gu, Seoul, Republic of Korea

Type of Equipment : CAR NAVIGATION SYSTEM

FCC ID. : BEJCCICUS

Model Name : CCIC US

Serial number : N/A

Total page of Report : 80 pages (including this page)

Date of Incoming : January 08, 2021

Date of issue : February 16, 2021


SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.



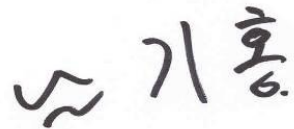

Tested by
Ju Yun Park / Manager
ONETECH Corp.

Reviewed by
Ha-Ram Lee / Manager
ONETECH Corp.

Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY.....	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY.....	7
2.6 TEST FACILITY.....	7
3. GENERAL INFORMATION.....	8
3.1 PRODUCT DESCRIPTION.....	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	10
4. EUT MODIFICATIONS.....	10
5. SYSTEM TEST CONFIGURATION	11
5.1 JUSTIFICATION.....	11
5.2 PERIPHERAL EQUIPMENT	11
5.3 MODE OF OPERATION DURING THE TEST	11
5.4 CONFIGURATION OF TEST SYSTEM.....	14
5.5 ANTENNA REQUIREMENT	14
6. PRELIMINARY TEST	14
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	14
6.2 GENERAL RADIATED EMISSIONS TESTS	14
7. MINIMUM 20 DB BANDWIDTH.....	15
7.1 OPERATING ENVIRONMENT	15
7.2 TEST SET-UP	15
7.3 TEST DATE	15
7.4 TEST DATA FOR 1 MBPS.....	16
7.5 TEST DATA FOR 2 MBPS.....	18
7.6 TEST DATA FOR 3 MBPS.....	20
8. HOPPING FREQUENCY SEPARATION.....	22
8.1 OPERATING ENVIRONMENT	22
8.2 TEST SET-UP	22
8.3 TEST DATE	22

8.4 TEST DATA FOR 1 MBPS23

8.5 TEST DATA FOR 2 MBPS24

8.6 TEST DATA FOR 3 MBPS25

9. NUMBER OF HOPPING CHANNELS26

9.1 OPERATING ENVIRONMENT26

9.2 TEST SET-UP26

9.3 TEST DATE26

9.4 TEST DATA FOR 1 MBPS27

9.5 TEST DATA FOR 2 MBPS30

9.6 TEST DATA FOR 3 MBPS33

10. TIME OF OCCUPANCY36

10.1 OPERATING ENVIRONMENT36

10.2 TEST SET-UP36

10.3 TEST DATE36

10.4 TEST DATA FOR 1 MBPS37

10.5 TEST DATA FOR 2 MBPS39

10.6 TEST DATA FOR 3 MBPS41

11. MAXIMUM PEAK OUTPUT POWER43

11.1 OPERATING ENVIRONMENT43

11.2 TEST SET-UP43

11.3 TEST DATE43

11.4 TEST DATA FOR 1 MBPS44

11.5 TEST DATA FOR 2 MBPS46

11.6 TEST DATA FOR 3 MBPS48

12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....50

12.1 OPERATING ENVIRONMENT50

12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT50

12.3 TEST SET-UP FOR RADIATED MEASUREMENT.....50

12.4 TEST DATE50

12.5 TEST DATA FOR CONDUCTED EMISSION51

 12.5.1 Test data for 1 Mbps51

 12.5.2 Test data for 2 Mbps57

 12.5.3 Test data for 3 Mbps63

12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION69

 12.6.1 Radiated Emission which fall in the Restricted Band.....69

 12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz.....72

13. RADIATED EMISSION TEST	75
13.1 OPERATING ENVIRONMENT	75
13.2 TEST SET-UP	75
13.3 TEST DATE	75
13.4 TEST DATA FOR 30 MHz ~ 1 000 MHz	76
<i>13.4.1 Test data for Bluetooth Mode</i>	<i>76</i>
<i>13.4.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz)</i>	<i>77</i>
<i>13.4.3 Test data for Intermodulation Mode(Bluetooth + WLAN 5 GHz)</i>	<i>78</i>
13.5 TEST DATA FOR BELOW 30 MHz	79
13.6 TEST DATA FOR ABOVE 1 GHz	79
14. LIST OF TEST EQUIPMENT	80

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-212-RWD-056	February 16, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Electronics USA
 Address : 111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States
 Contact Person : Dae Woong Kim / Director, Regulatory and Environmental Affairs
 Telephone No. : 201-266-2215
 FCC ID : BEJCCICUS
 Model Name : CCIC US
 Brand Name : LG
 Serial Number : N/A
 Date : February 16, 2021

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	CAR NAVIGATION SYSTEM
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	N/A / See Note
15.203	Antenna Requirement	Met requirement / PASS

Note.: This test item is not required as this product is only using DC power

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Electronics USA, Model CCIC US (referred to as the EUT in this report) is a CAR NAVIGATION SYSTEM. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	CAR NAVIGATION SYSTEM		
Temperature Range	-30 °C ~ 85 °C		
OPERATING FREQUENCY	Bluetooth	2 402 MHz ~ 2 480 MHz	
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))	
	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))	
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))	
		5 210 MHz (802.11ac(VHT80))	
	5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))	
		5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))	
5 775 MHz (802.11ac(VHT80))			
MODULATION TYPE	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps	
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
RF OUTPUT POWER	Bluetooth	1 Mbps	-0.05 dBm
		2 Mbps	-2.30 dBm
		3 Mbps	-1.87 dBm
	WLAN 2.4 GHz	15.15 dBm(802.11b) 11.58 dBm(802.11g) 11.54 dBm(802.11n_HT20)	

RF OUTPUT POWER	5 150 MHz ~ 5 250 MHz Band	Antenna 0	10.60 dBm(802.11a) 10.05 dBm(802.11n_HT20) 5.63 dBm(802.11ac_VHT20) 7.16 dBm(802.11n_HT40) 5.11 dBm(802.11ac_VHT40) 5.24 dBm(802.11ac_VHT80)
		Antenna 1	12.28 dBm(802.11a) 12.03 dBm(802.11n_HT20) 7.77 dBm(802.11ac_VHT20) 9.25 dBm(802.11n_HT40) 6.78 dBm(802.11ac_VHT40) 6.72 dBm(802.11ac_VHT80)
		Multiple Antenna	14.47 dBm(802.11a) 14.16 dBm(802.11n_HT20) 9.84 dBm(802.11ac_VHT20) 11.34 dBm(802.11n_HT40) 9.03 dBm(802.11ac_VHT40) 9.05 dBm(802.11ac_VHT80)
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	10.44 dBm(802.11a) 10.23 dBm(802.11n_HT20) 5.98 dBm(802.11ac_VHT20) 10.05 dBm(802.11n_HT40) 5.70 dBm(802.11ac_VHT40) 5.62 dBm(802.11ac_VHT80)
		Antenna 1	11.88 dBm(802.11a) 12.14 dBm(802.11n_HT20) 8.91 dBm(802.11ac_VHT20) 11.91 dBm(802.11n_HT40) 8.52 dBm(802.11ac_VHT40) 8.15 dBm(802.11ac_VHT80)
		Multiple Antenna	14.13 dBm(802.11a) 14.26 dBm(802.11n_HT20) 10.57 dBm(802.11ac_VHT20) 14.06 dBm(802.11n_HT40) 10.35 dBm(802.11ac_VHT40) 10.08 dBm(802.11ac_VHT80)

ANTENNA TYPE	PCB Antenna			
ANTENNA GAIN	Bluetooth	-1.59 dBi		
	WLAN 2.4 GHz	-1.45 dBi		
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	-1.15 dBi	
		Antenna 1	-0.89 dBi	
		Multiple Antenna	1.99 dBi	
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	-1.08 dBi	
		Antenna 1	-1.07 dBi	
		Multiple Antenna	1.94 dBi	
	List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	8 MHz, 24 MHz, 24.576 MHz, 25 MHz, 26 MHz, 32 MHz, 37.4 MHz, 38.4 MHz, 55.46667 MHz		
Rated Supply Voltage	DC 12.0 V			

Note. : - Bluetooth transmit simultaneously with 2.4 GHz or 5 GHz WiFi.

- Directional Gain Calculations

$$\text{Directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{\text{ANT}}] \text{ dBi}$$

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Electronics Inc.	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
CCIC US	LG Electronics Inc.	CAR NAVIGATION SYSTEM (EUT)	

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 441MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Frequency / Channel Operations

Channel	Frequency
0	2 402
39	2 441
78	2 480


- Duty Cycle


Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth [1 Mbps]	2.88	0.86	77.01	1.13
Bluetooth [2 Mbps]	2.88	0.88	76.60	1.16
Bluetooth [3 Mbps]	2.88	0.86	77.01	1.13

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100


Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

- Test Plot

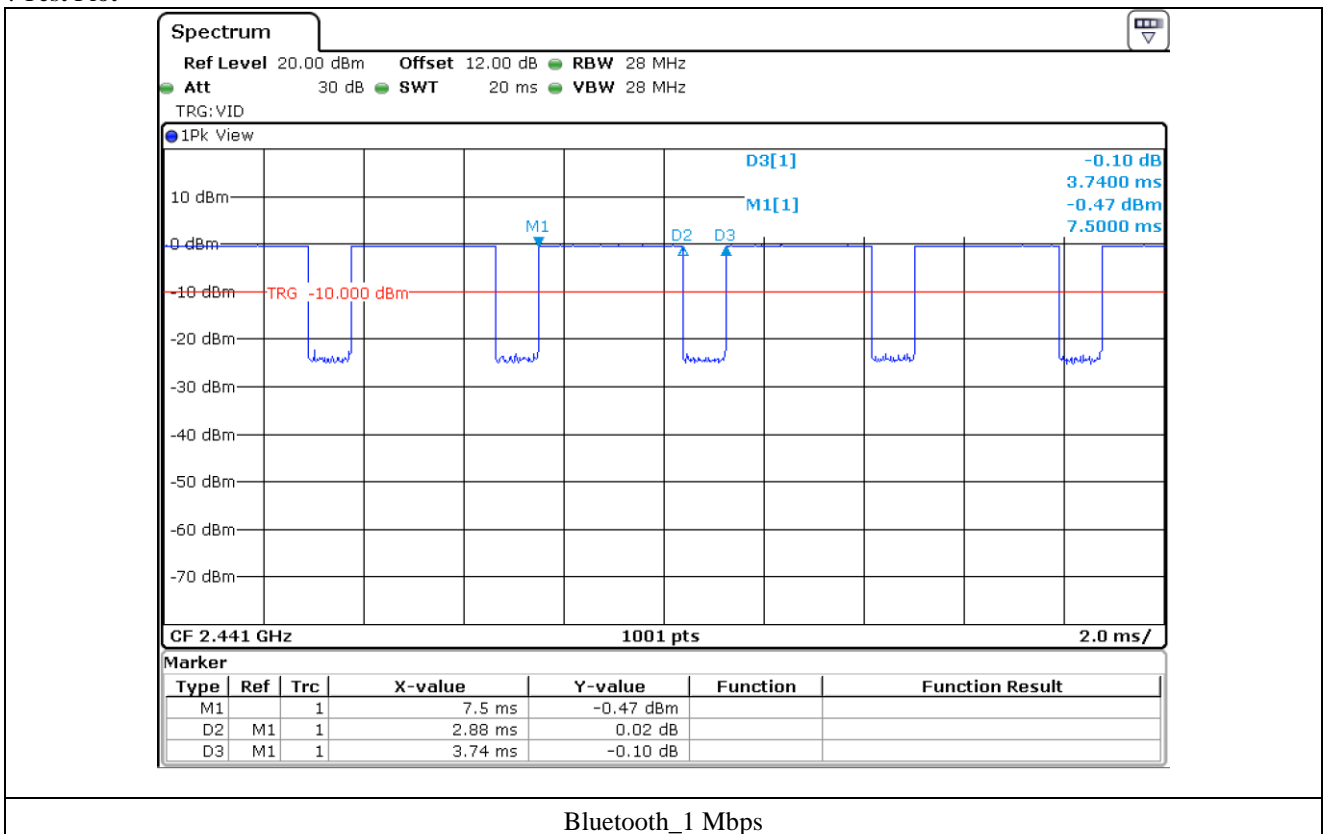

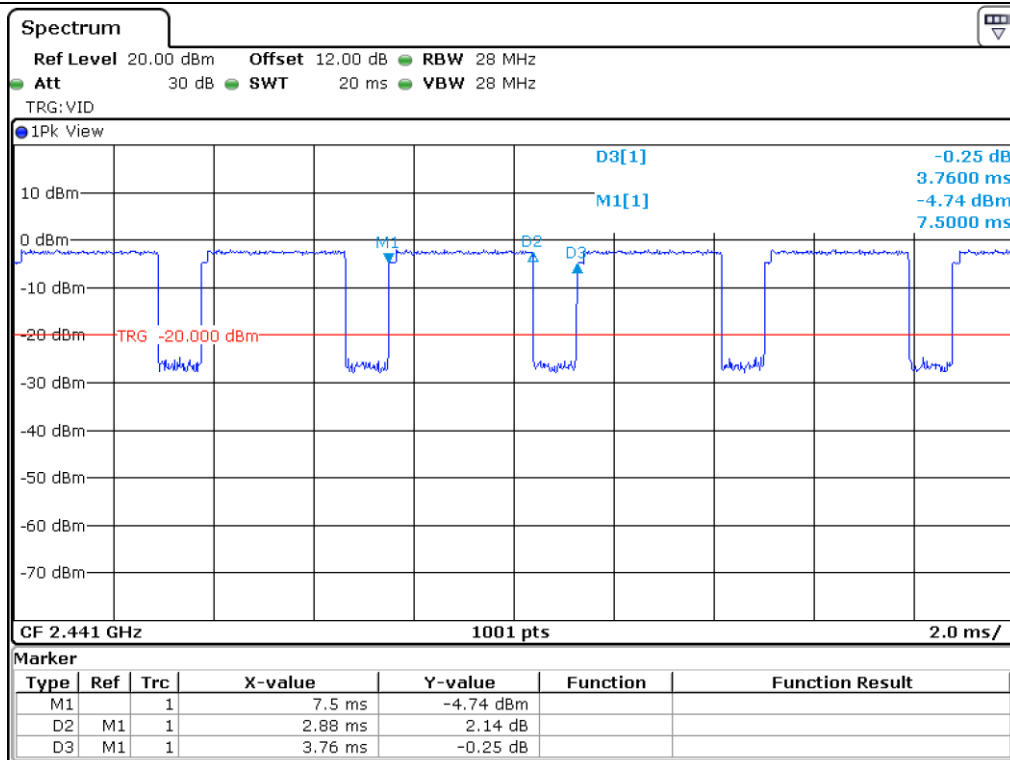

Bluetooth_2 Mbps

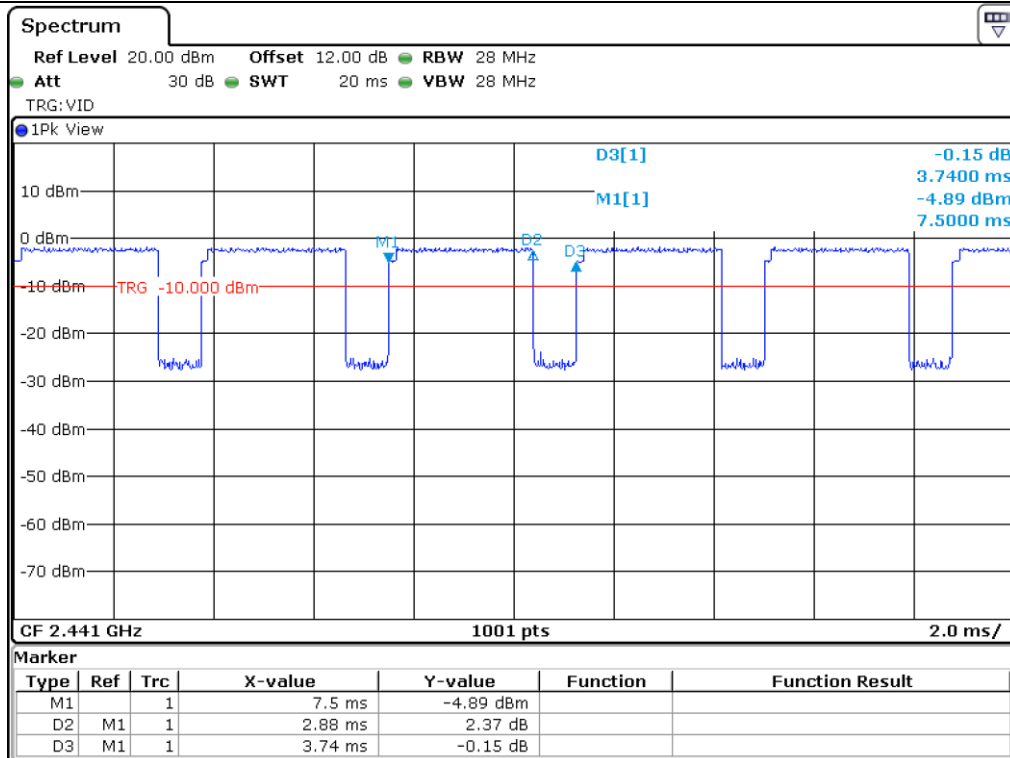

Bluetooth_3 Mbps

5.4 Configuration of Test System

Line Conducted Test: As This product is only using DC power, AC conducted emission test has not been performed

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The Left & Right sides PCB Antenna of the EUT is located the in the EUT internally, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

As This product is only using DC power, AC conducted emission test has not been performed

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz(1 Mbps), 20 kHz(2 Mbps, 3 Mbps) and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

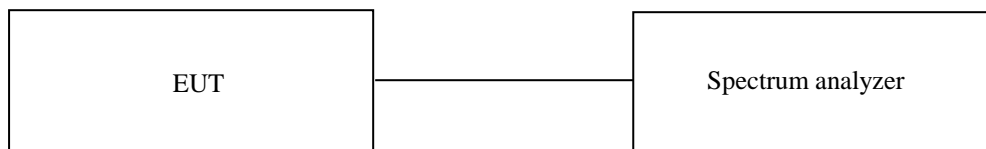



7.3 Test Date

January 07, 2021 ~ January 28, 2021


7.4 Test data for 1 Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 004.00
Middle	2 441.00	1 007.00
High	2 480.00	1 004.00

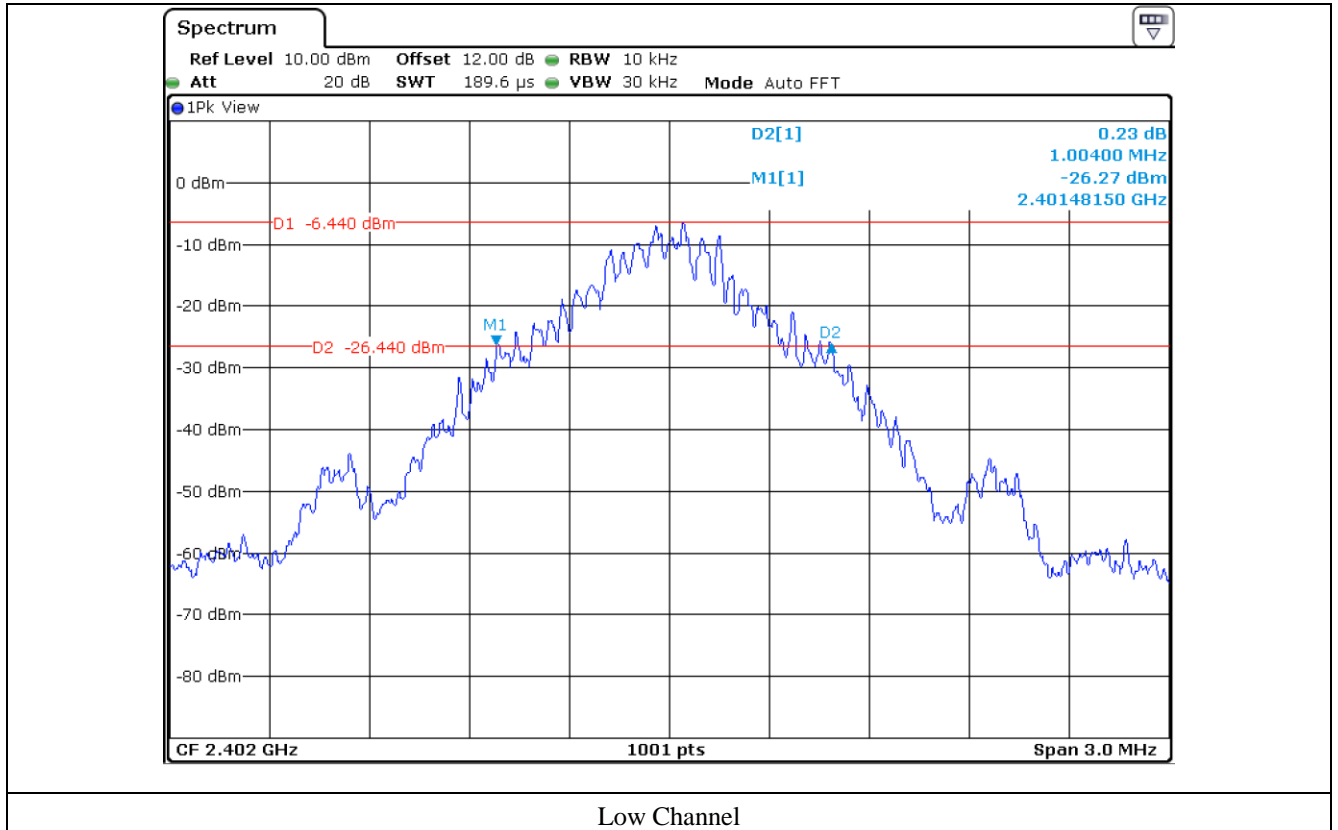

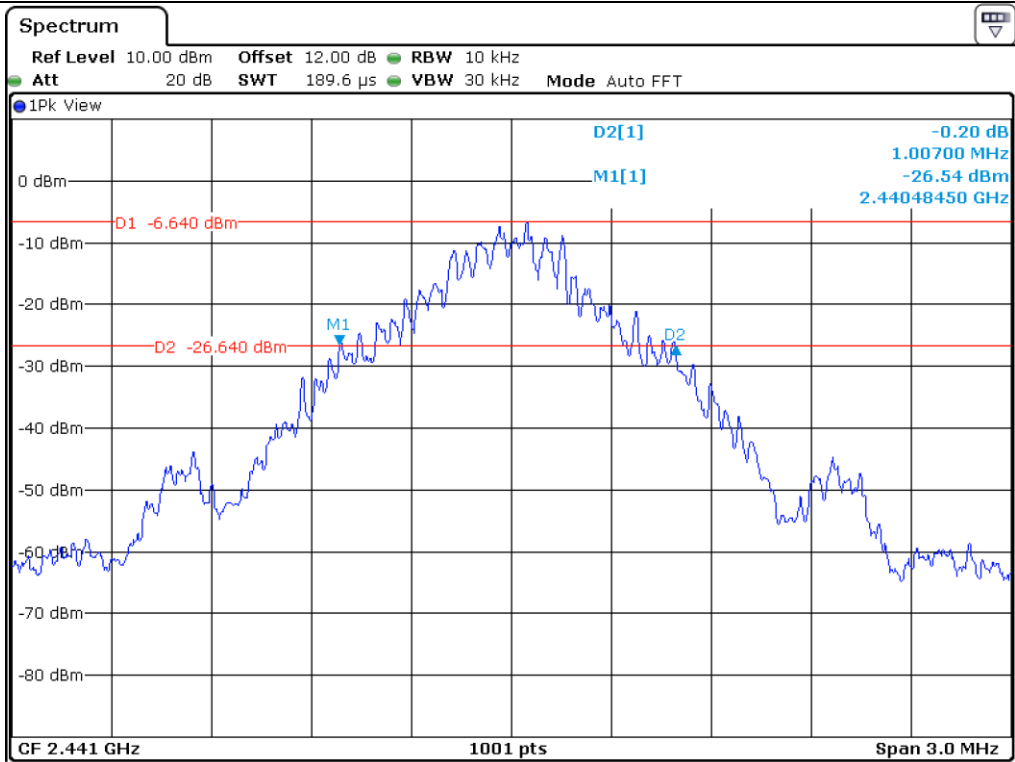


Middle Channel

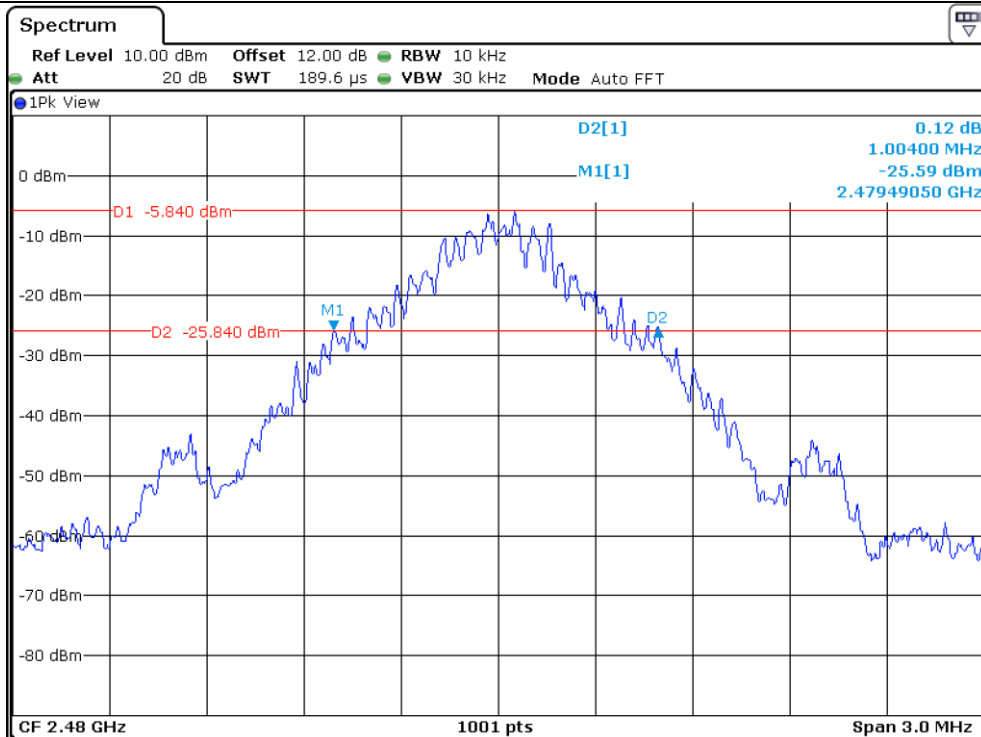


High Channel


7.5 Test data for 2 Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 353.60
Middle	2 441.00	1 353.60
High	2 480.00	1 353.60

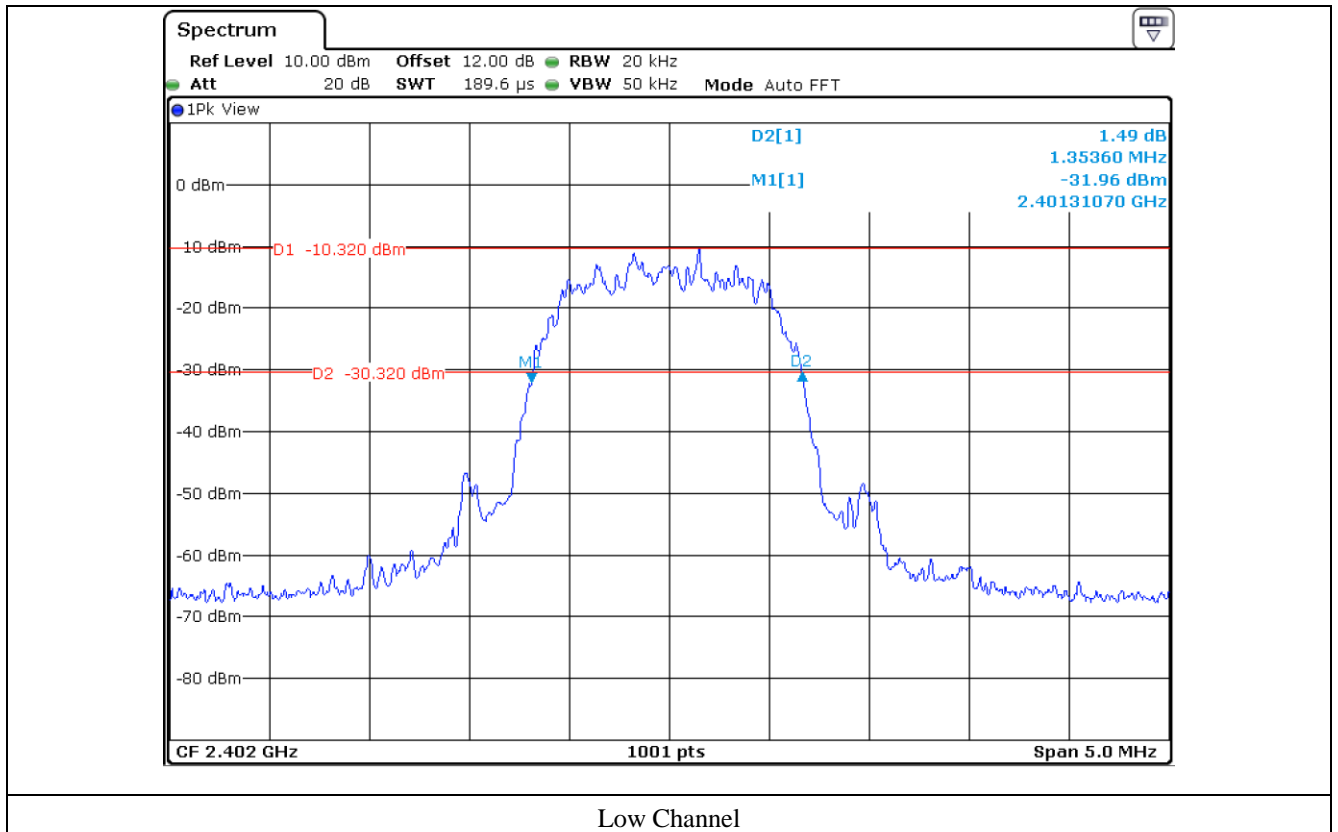

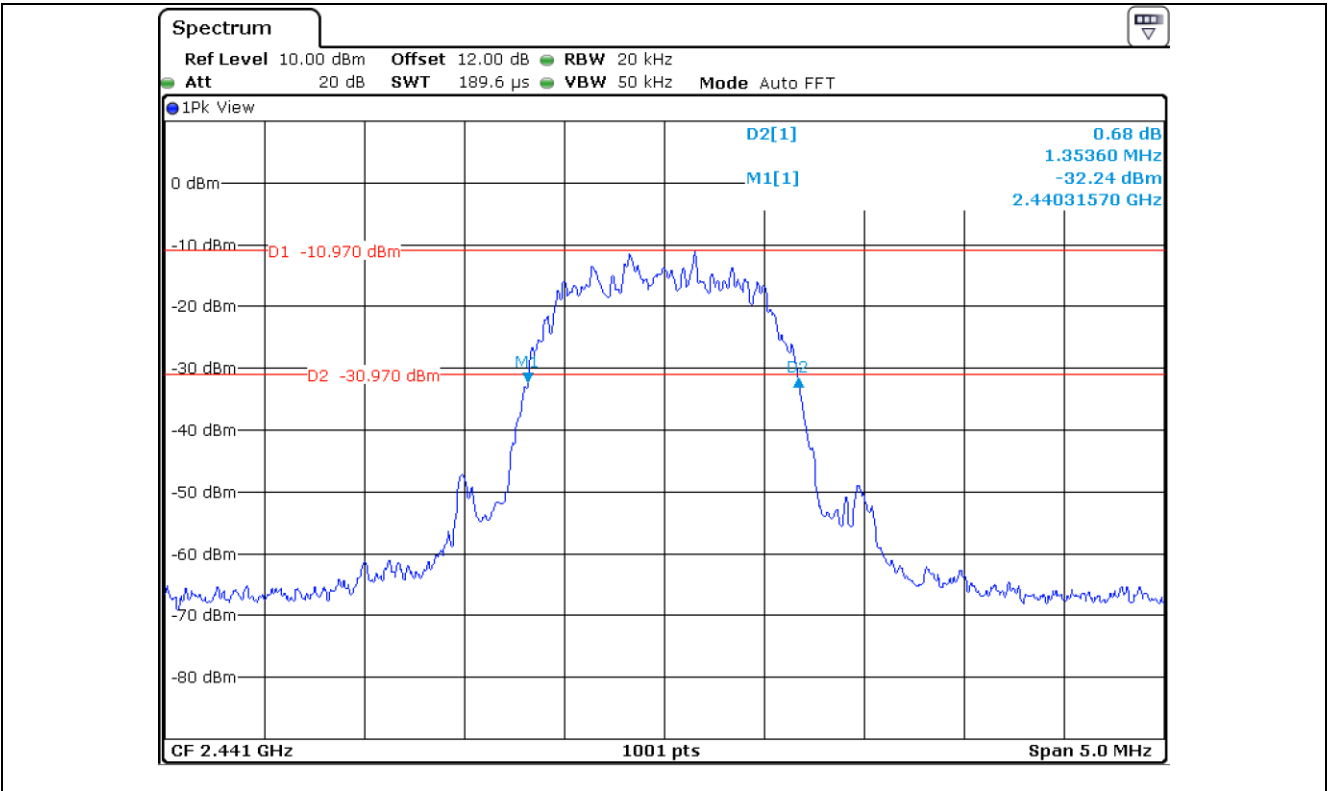


Middle Channel

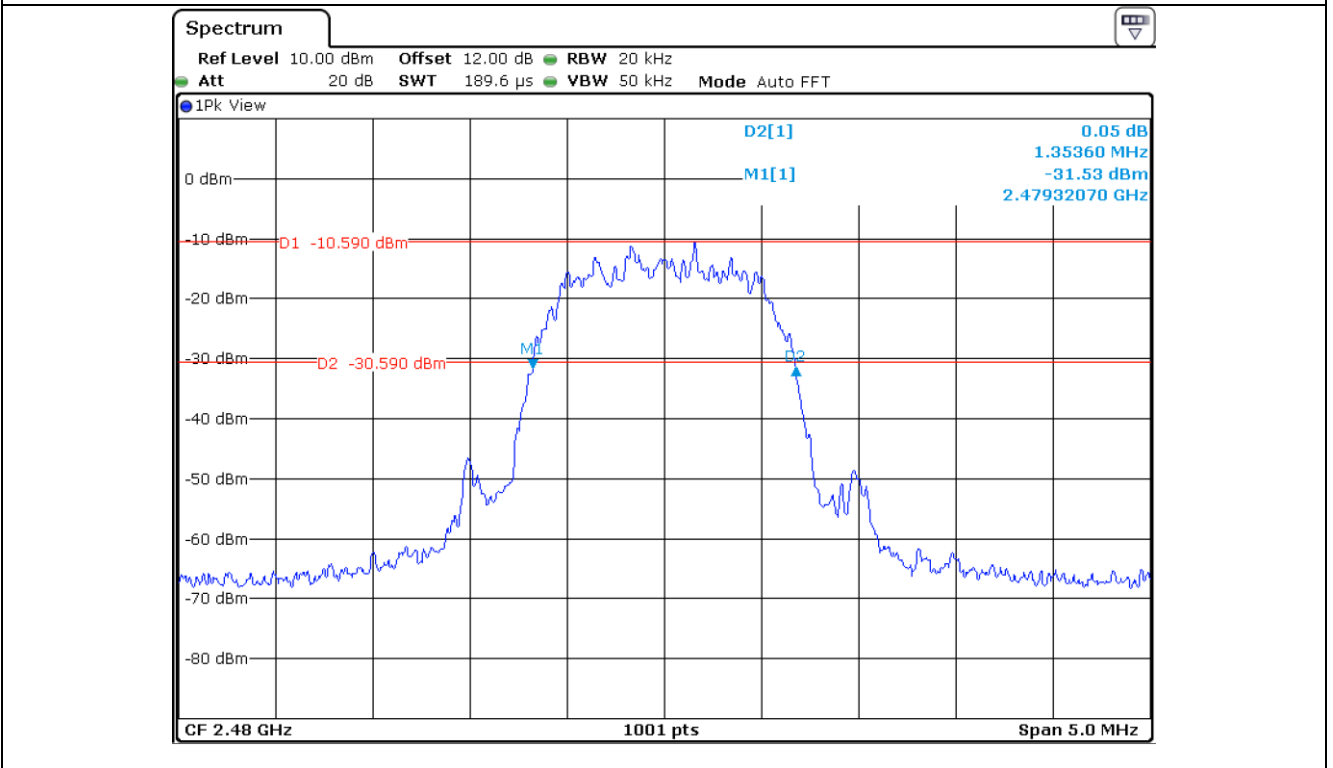


High Channel


7.6 Test data for 3 Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 348.70
Middle	2 441.00	1 348.70
High	2 480.00	1 348.70

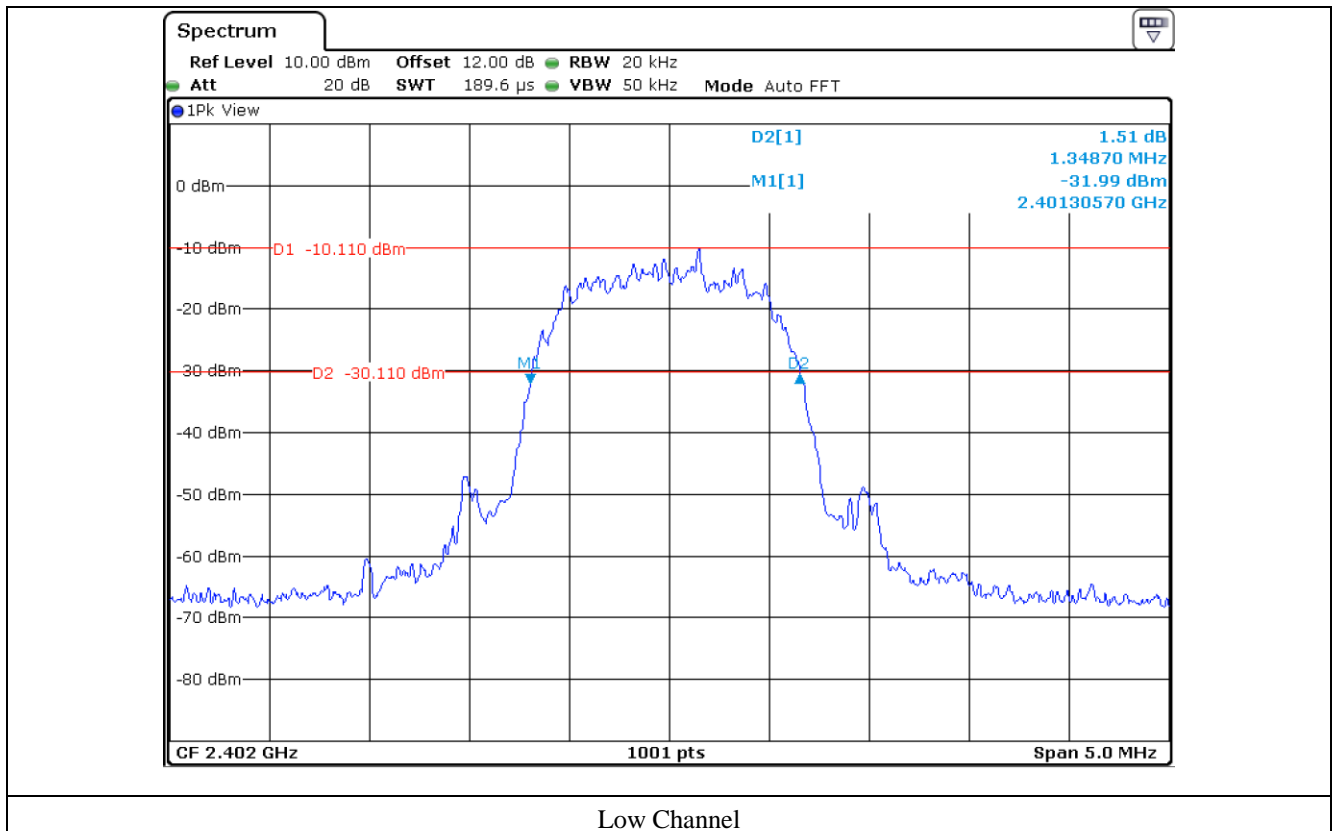

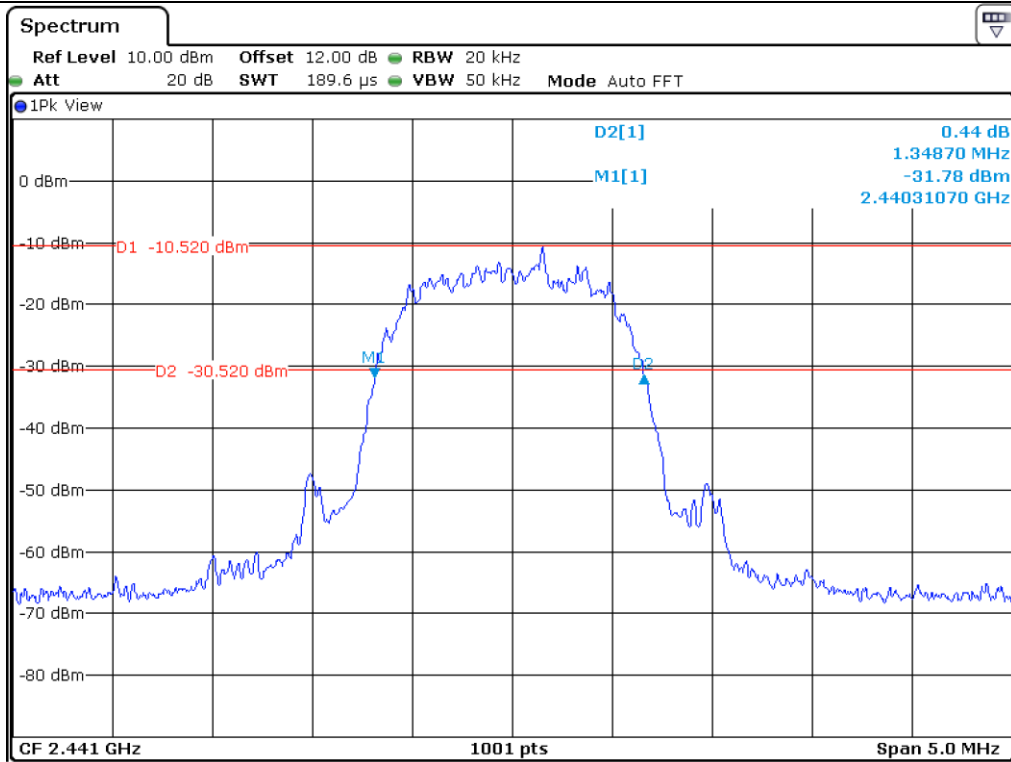

Middle Channel

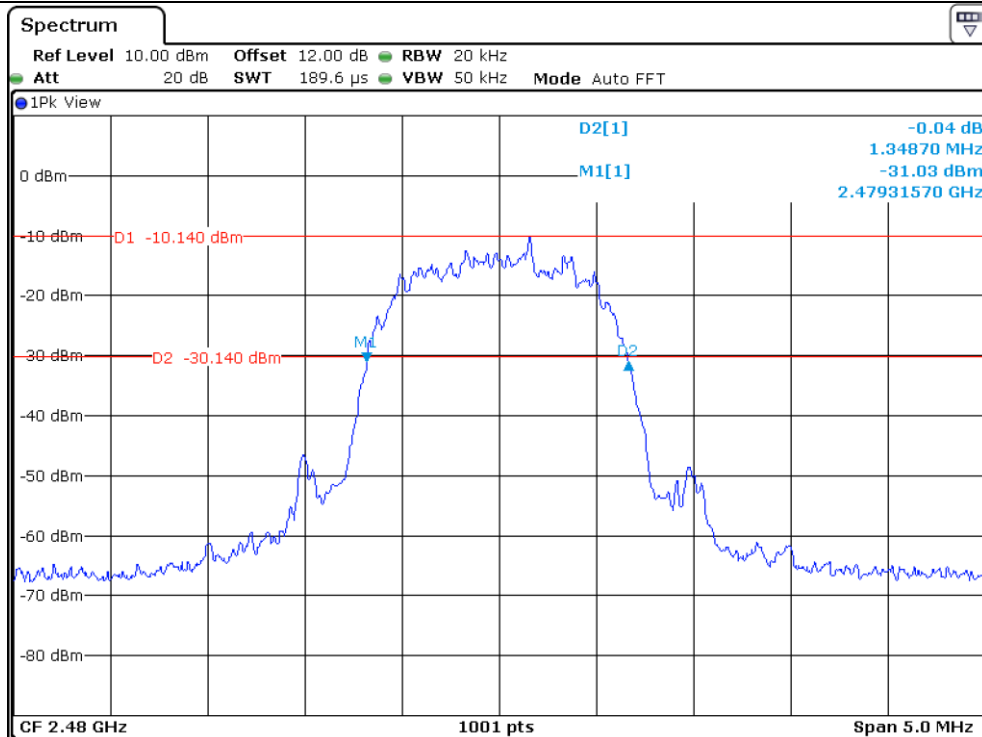

High Channel


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

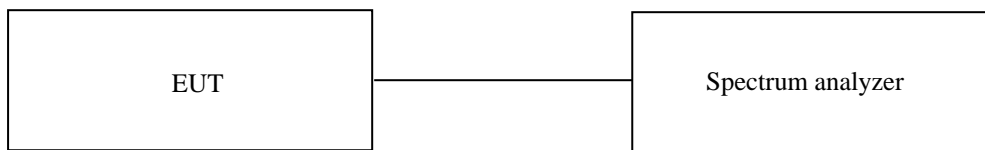


8.3 Test Date

January 07, 2021 ~ January 28, 2021

8.4 Test data for 1 Mbps

-. Test Result : Pass


Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
989.00	671.33	Separated by a minimum of 671.33 kHz

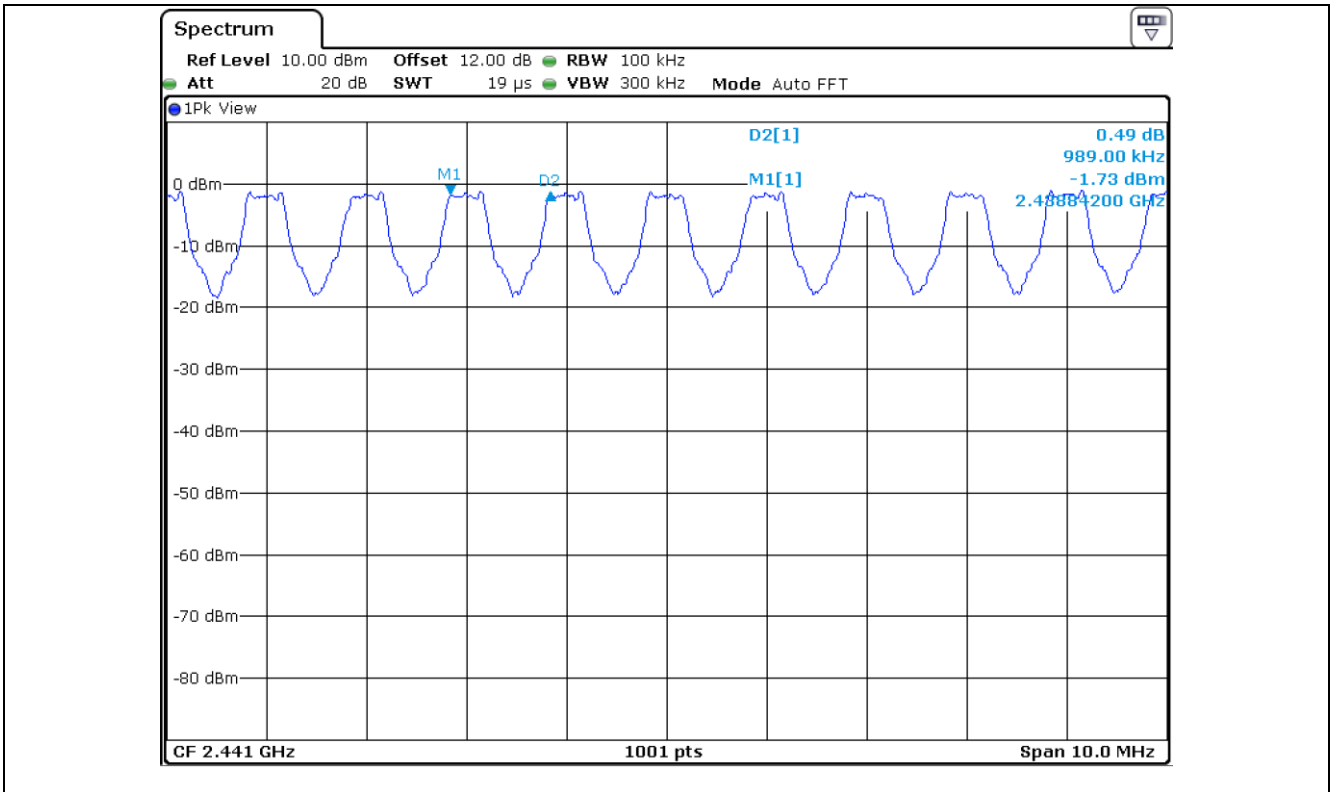

8.5 Test data for 2 Mbps

-. Test Result : Pass


Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
999.00	902.40	Separated by a minimum of 902.40 kHz

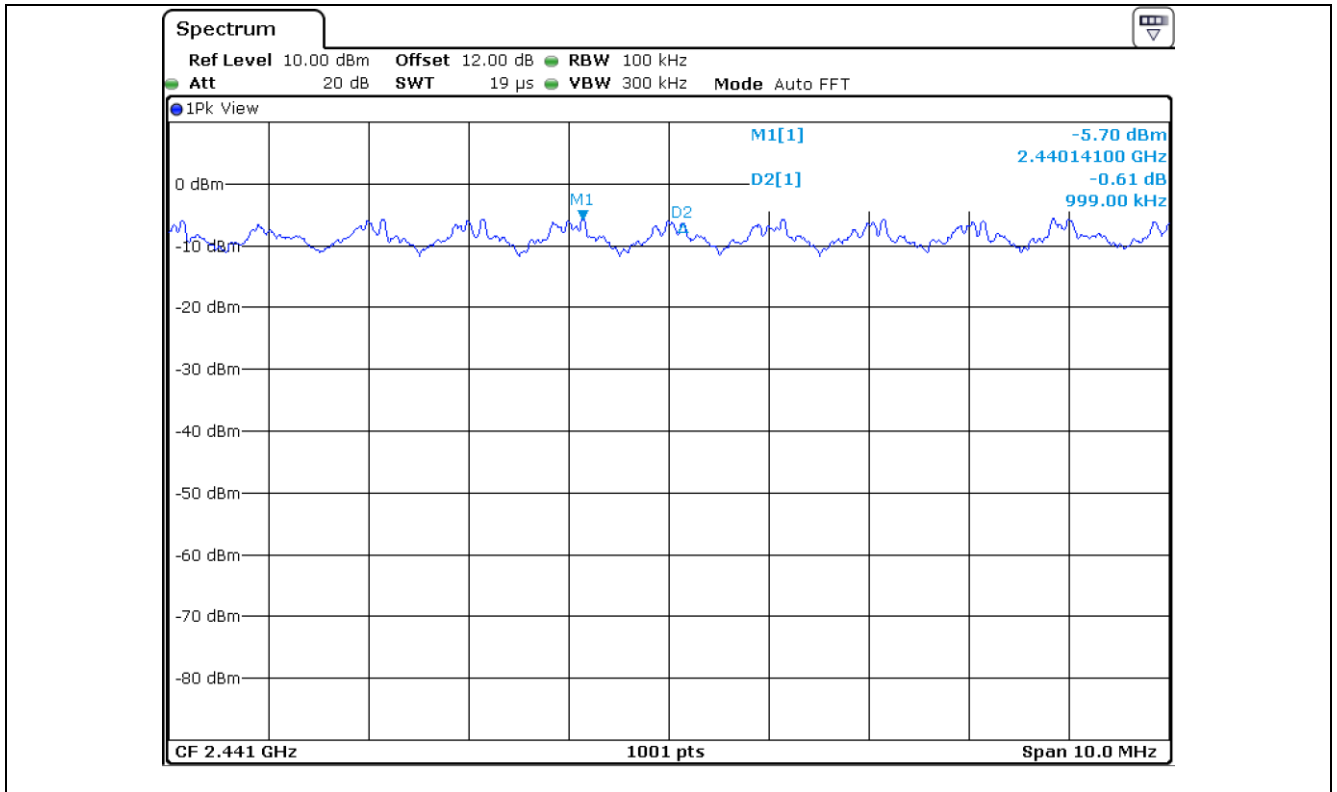

8.6 Test data for 3 Mbps

-. Test Result : Pass

Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
999.00	899.13	Separated by a minimum of 899.13 kHz

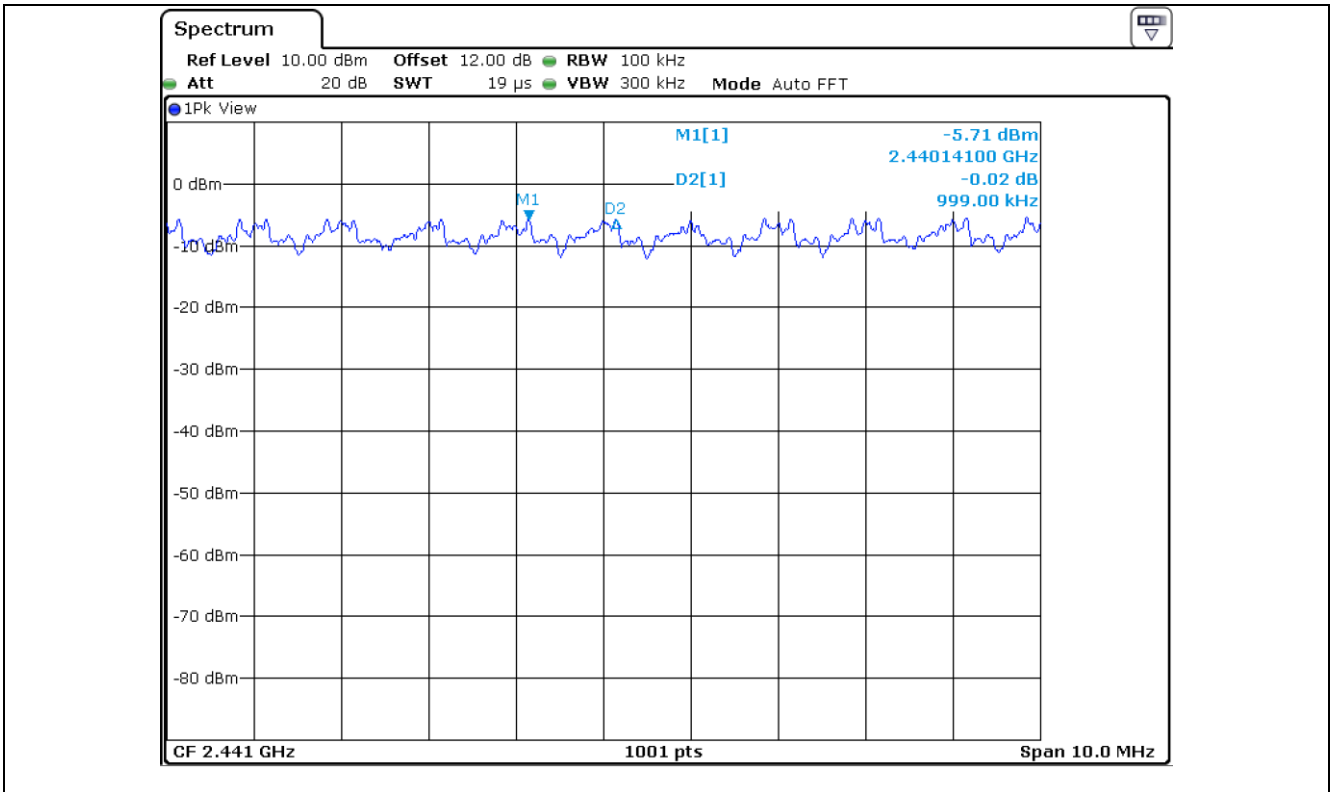


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

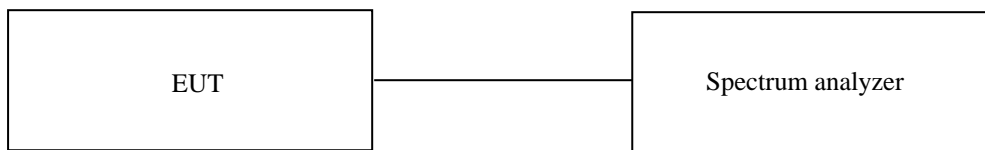


9.3 Test Date



January 07, 2021 ~ January 28, 2021


9.4 Test data for 1 Mbps

-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64

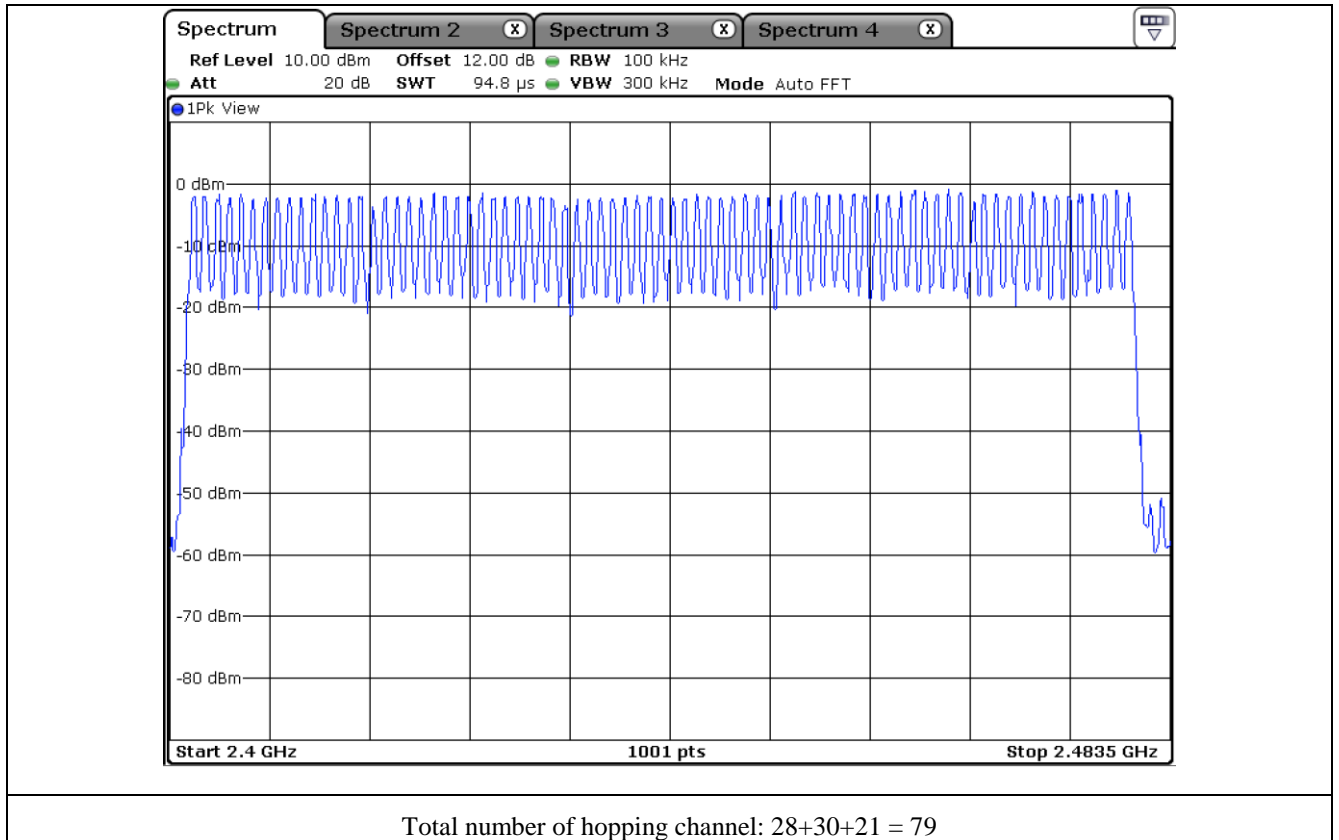

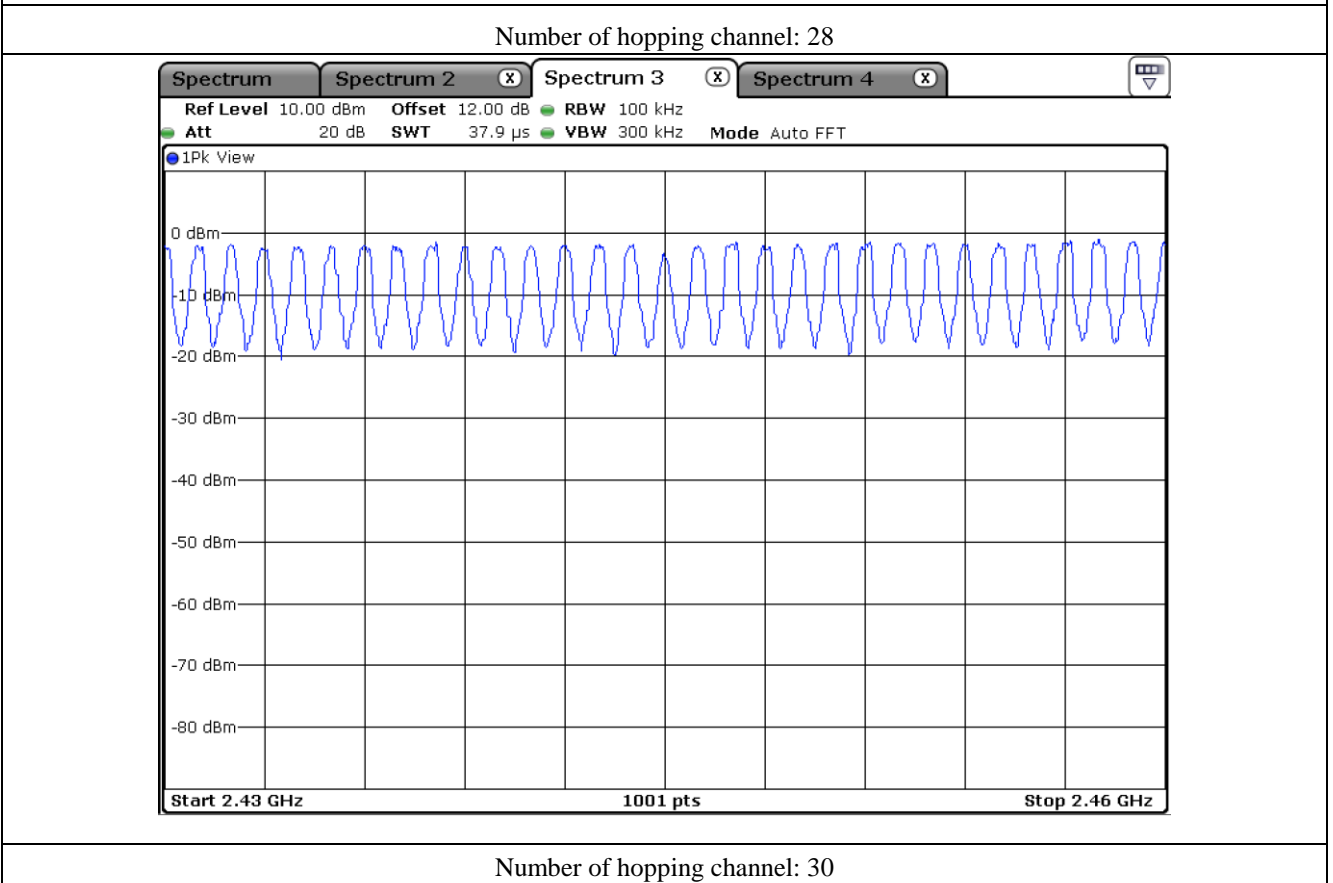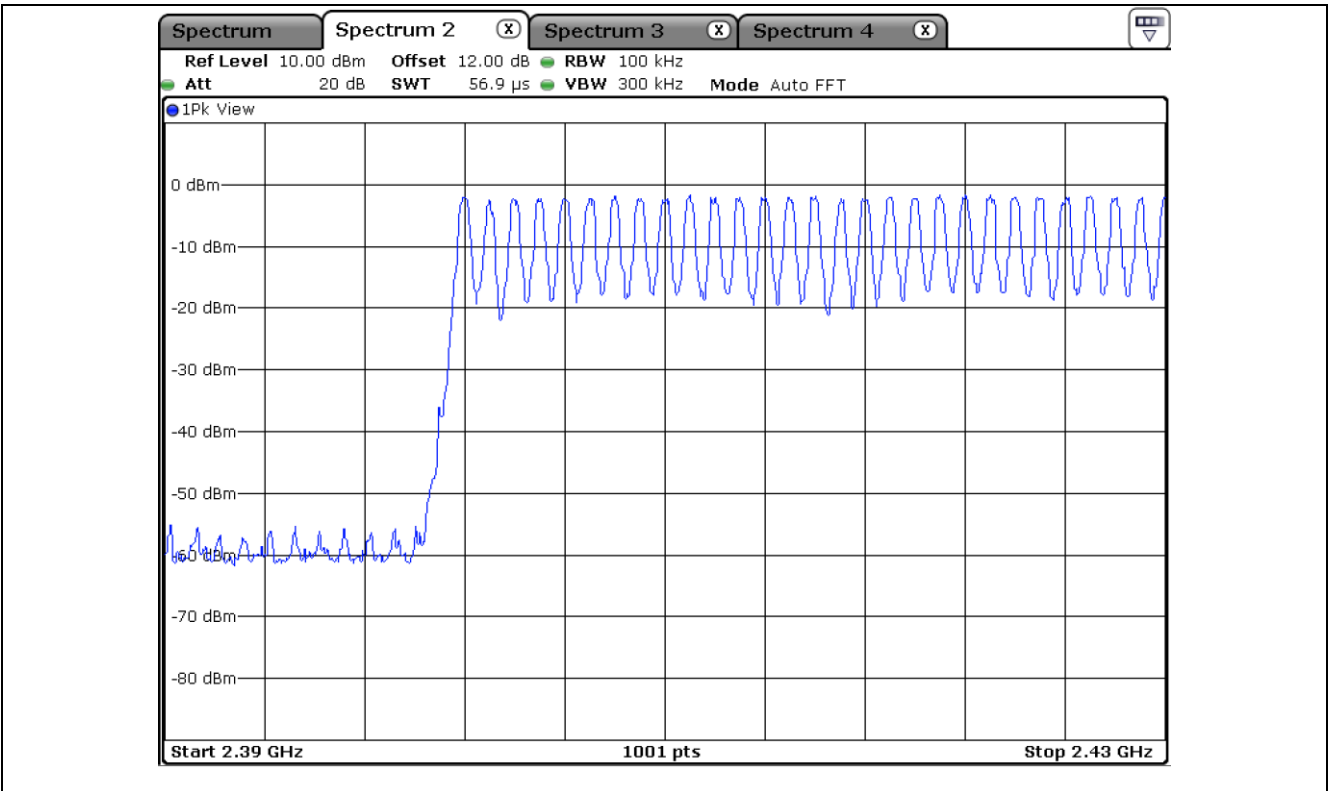


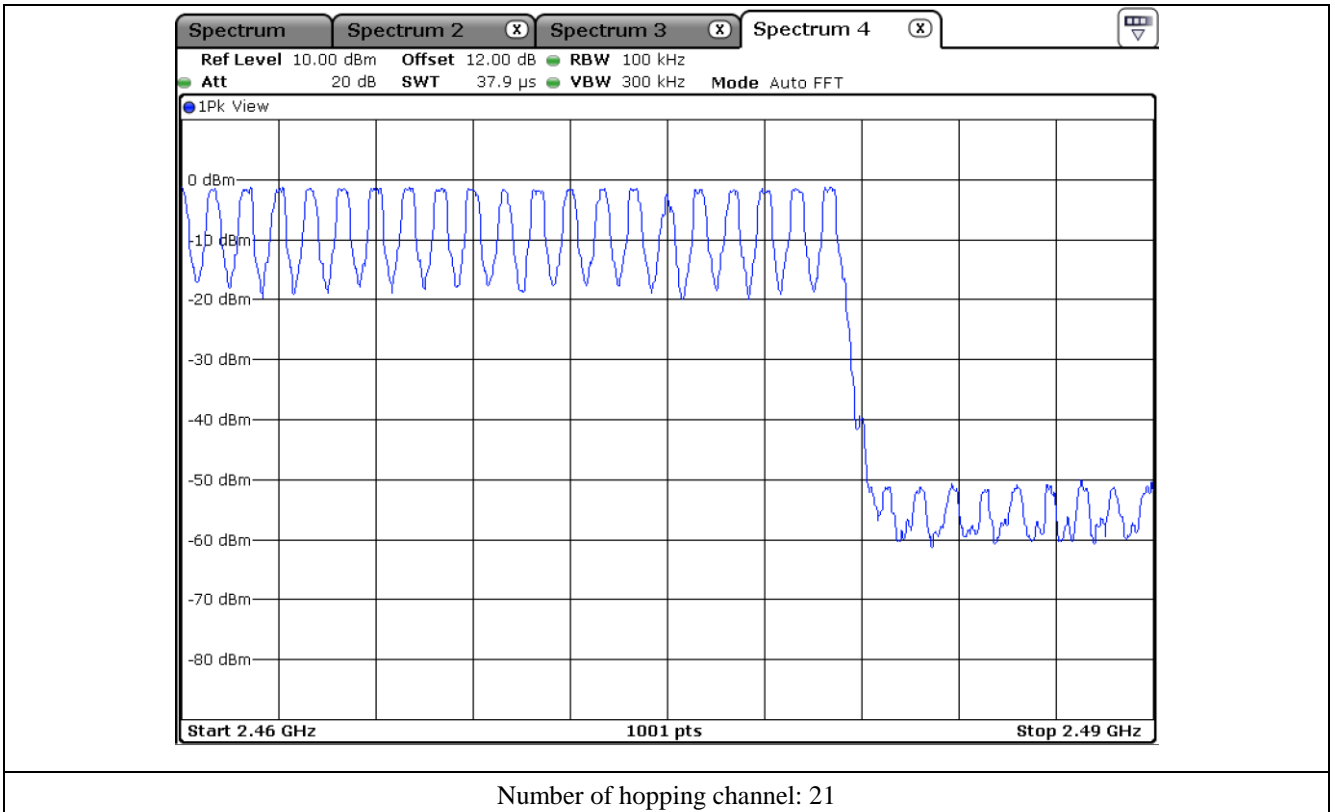


9.5 Test data for 2 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

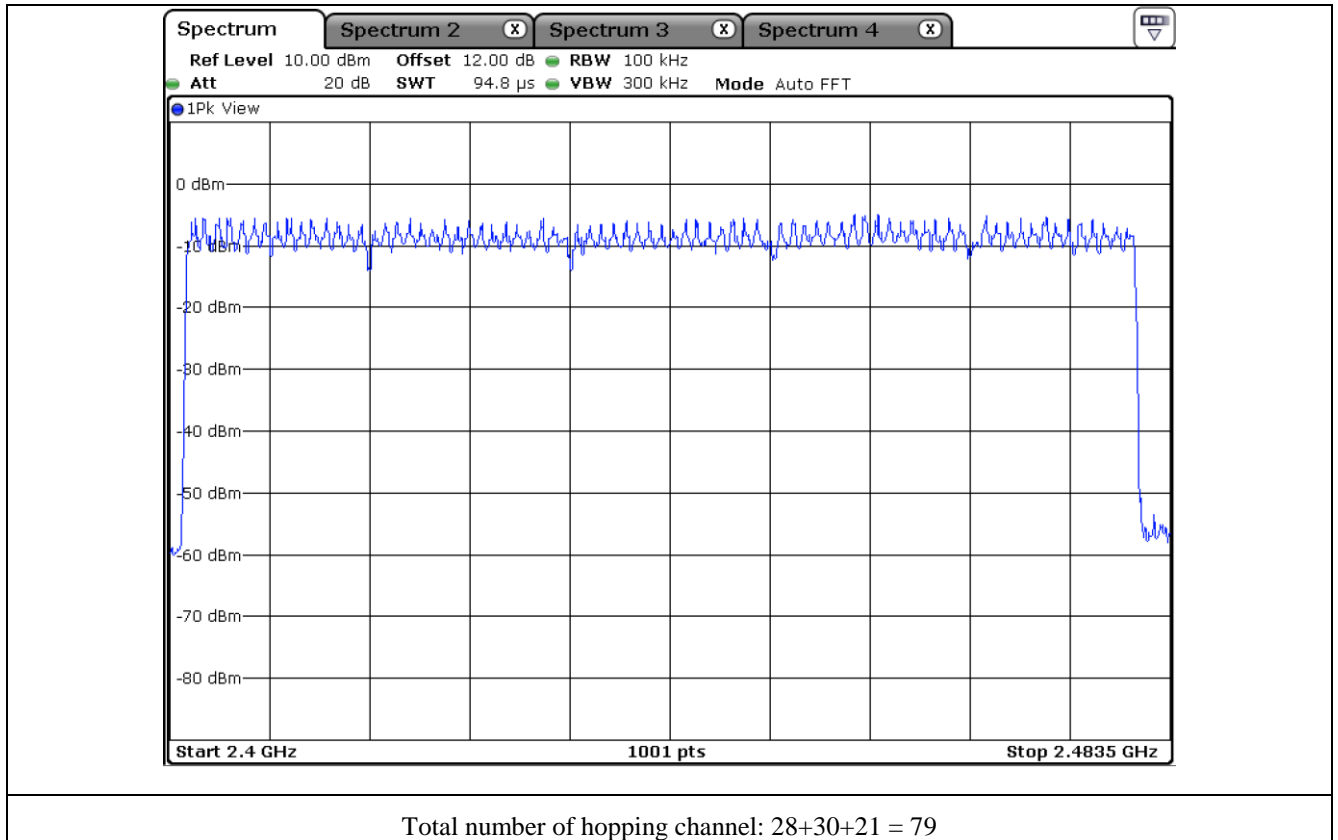


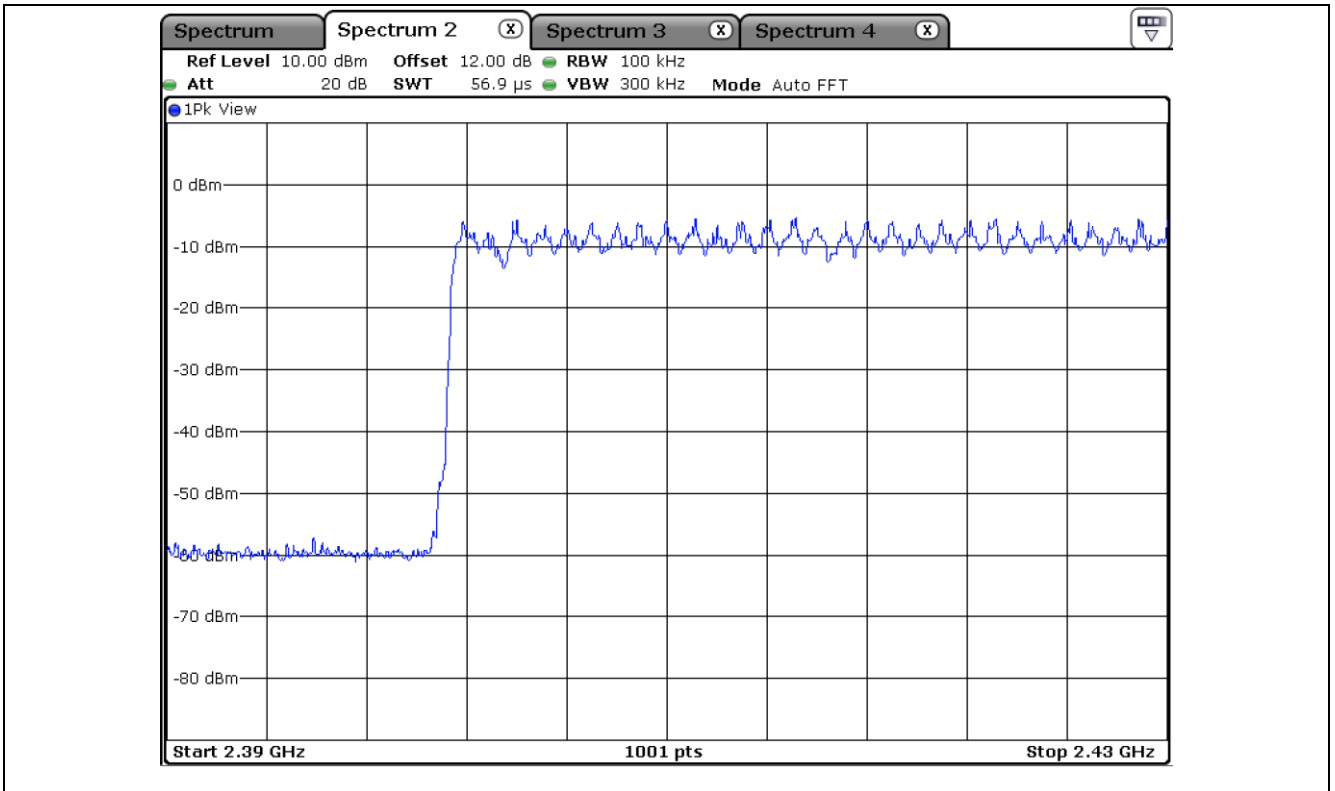

Number of hopping channel: 28

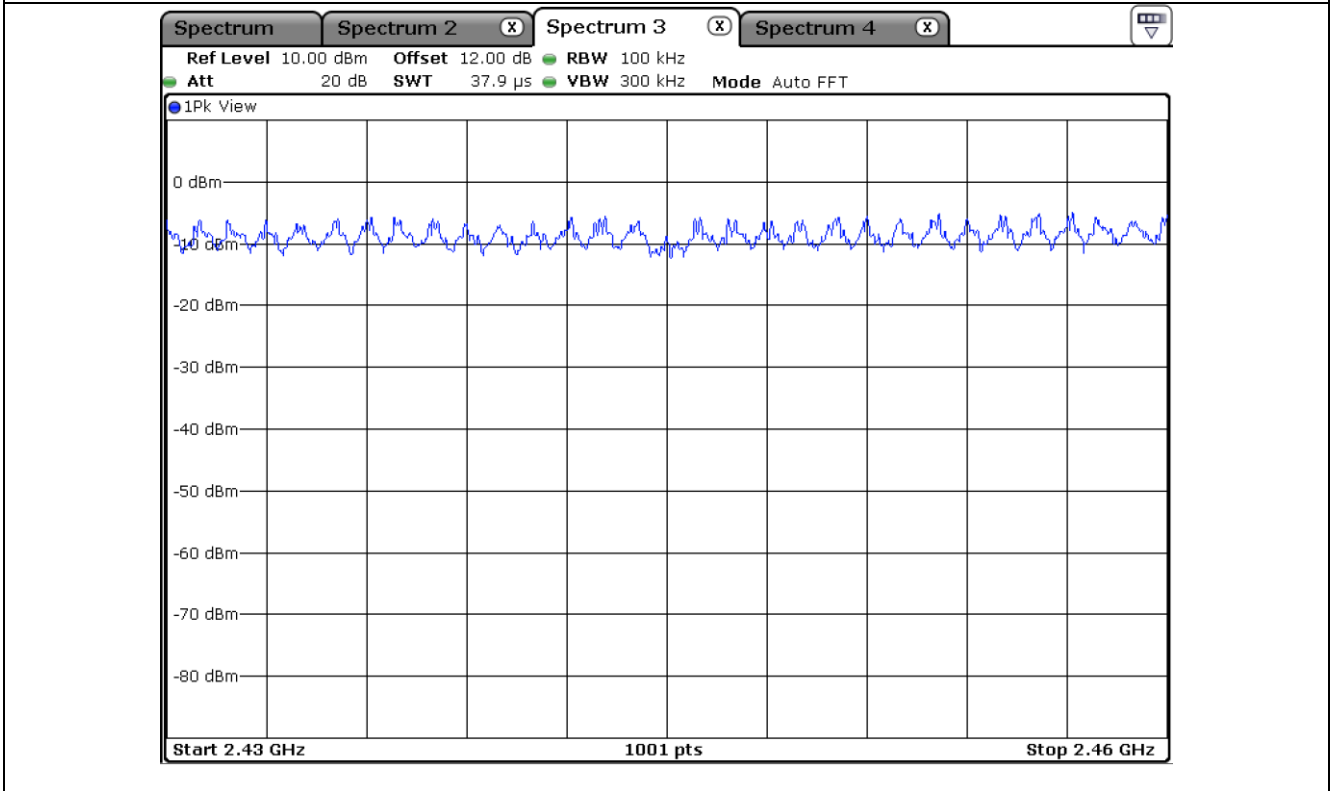

Number of hopping channel: 30

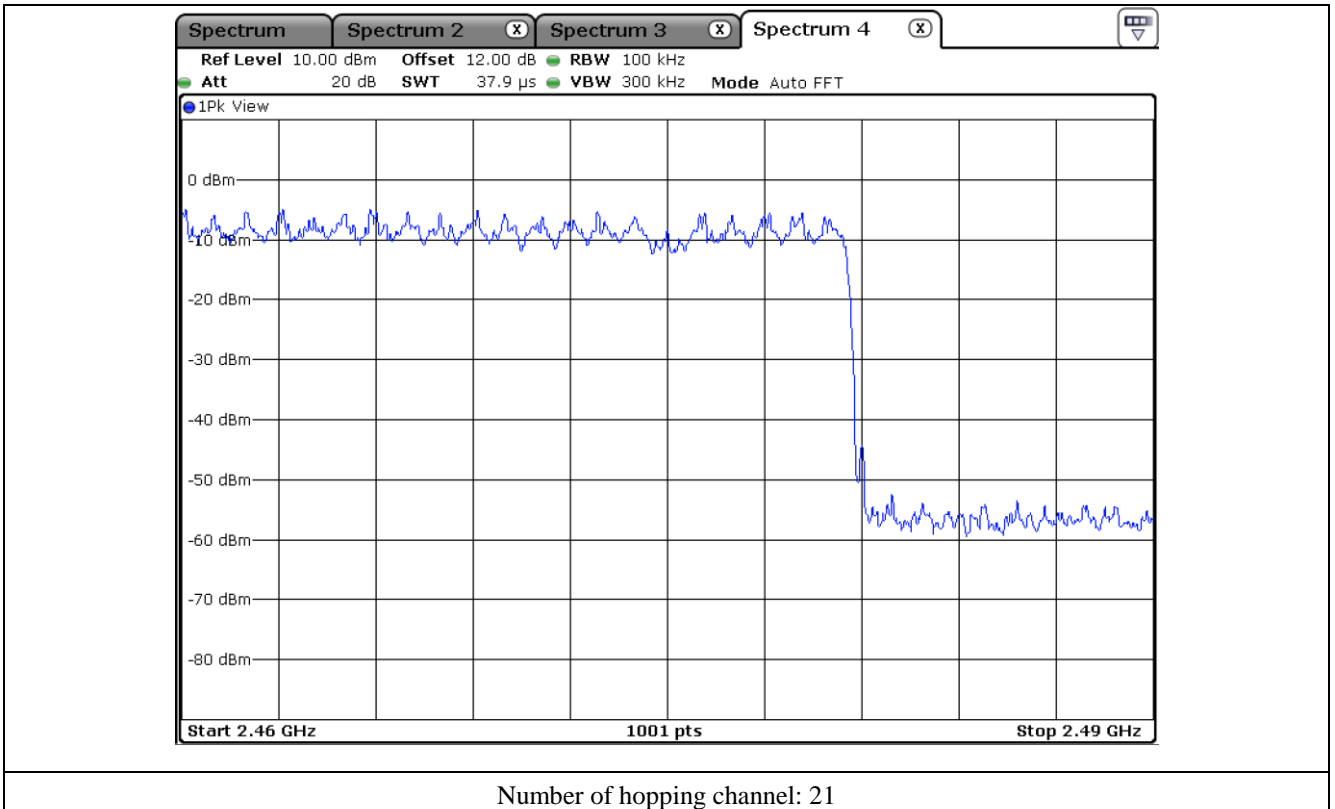




Number of hopping channel: 21


9.6 Test data for 3 Mbps

-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64

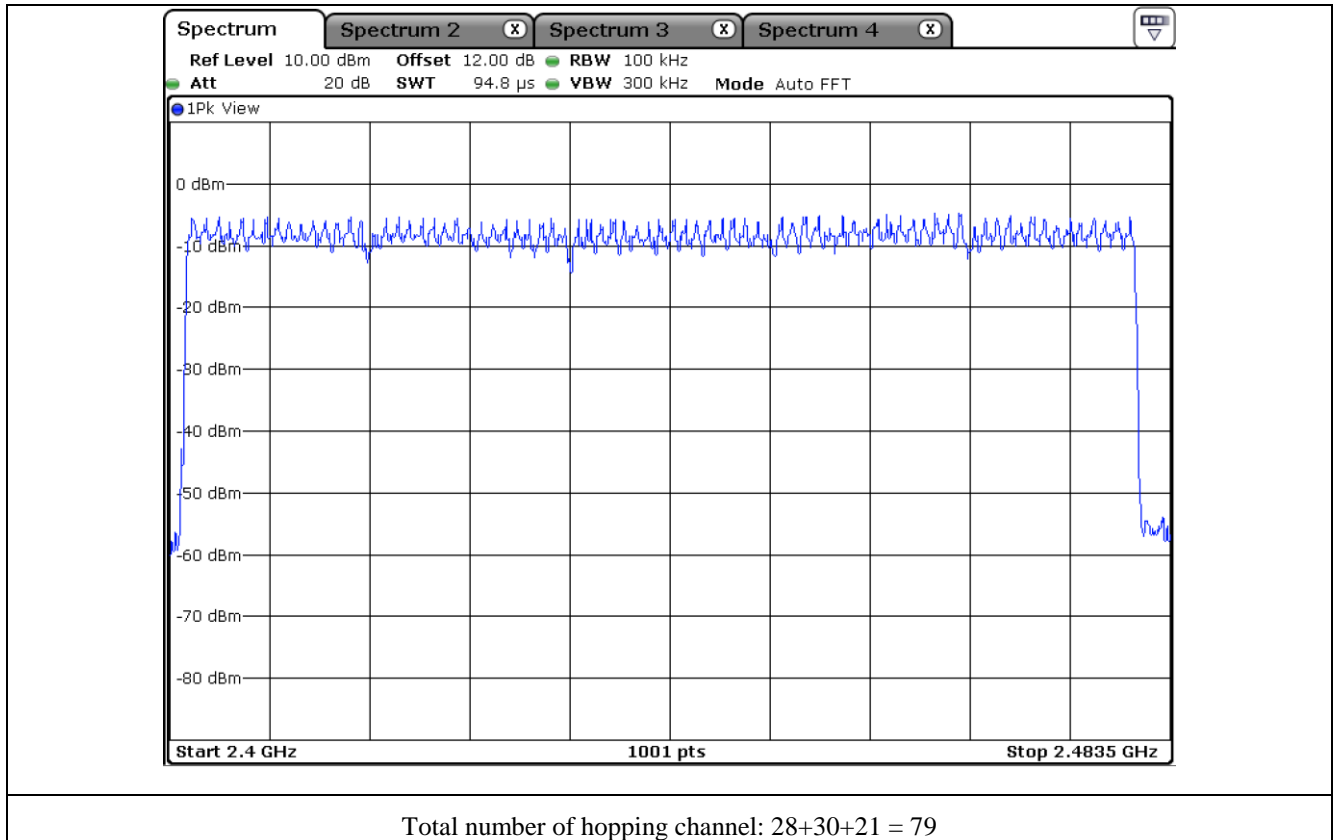

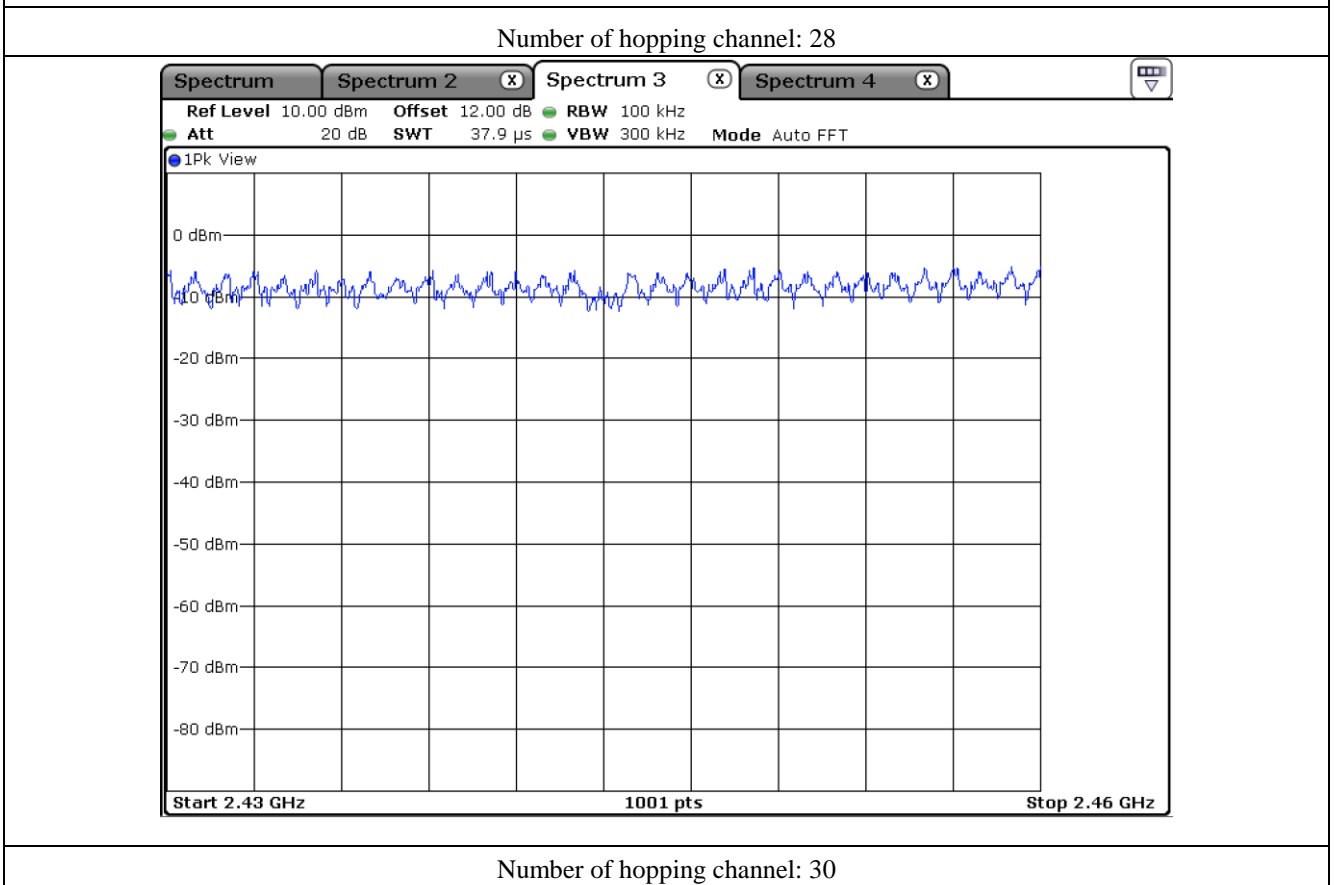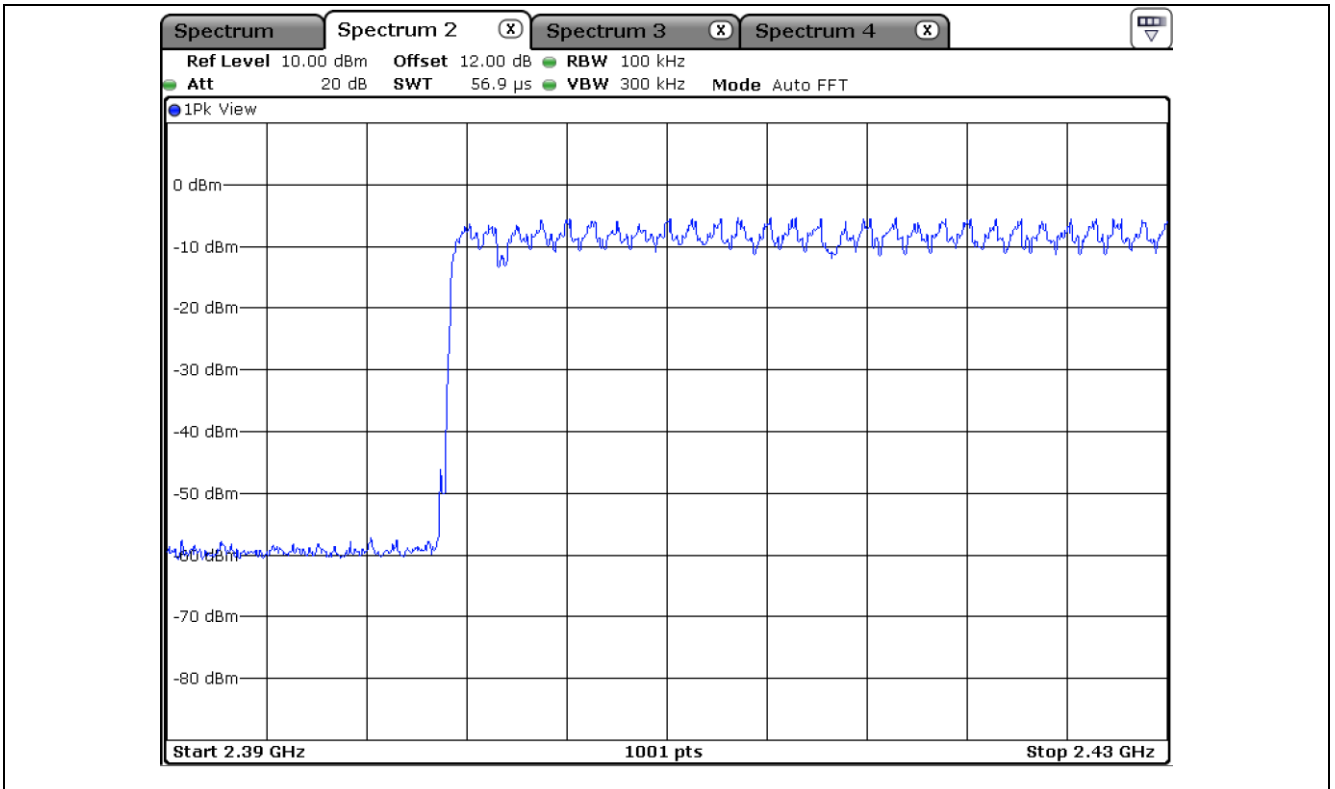

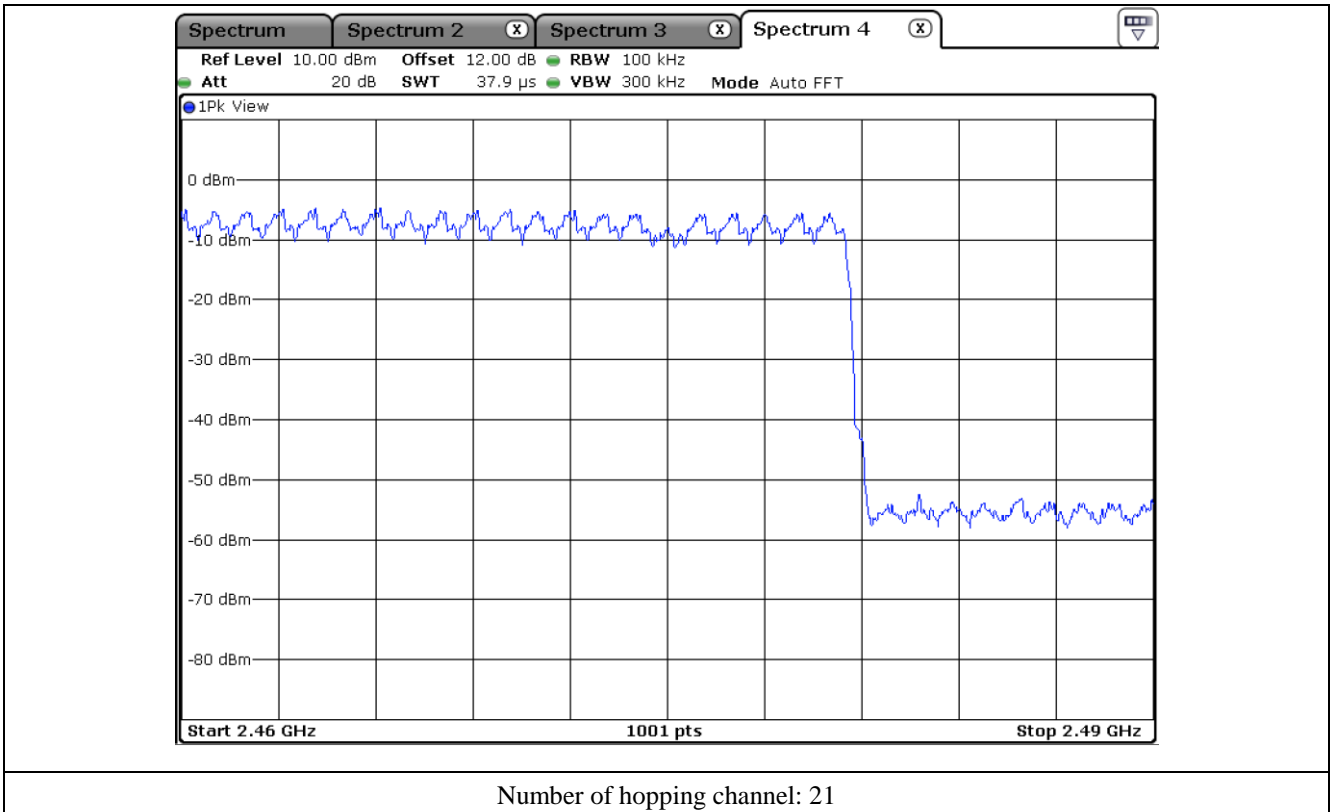


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

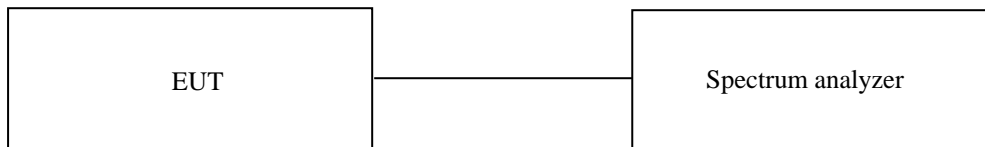

10.3 Test Date

January 07, 2021 ~ January 28, 2021

10.4 Test data for 1 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.390	10.13	31.60	124.84	400	PASS
DH3	1.635	5.06	31.60	261.43	400	
DH5	2.880	3.38	31.60	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.

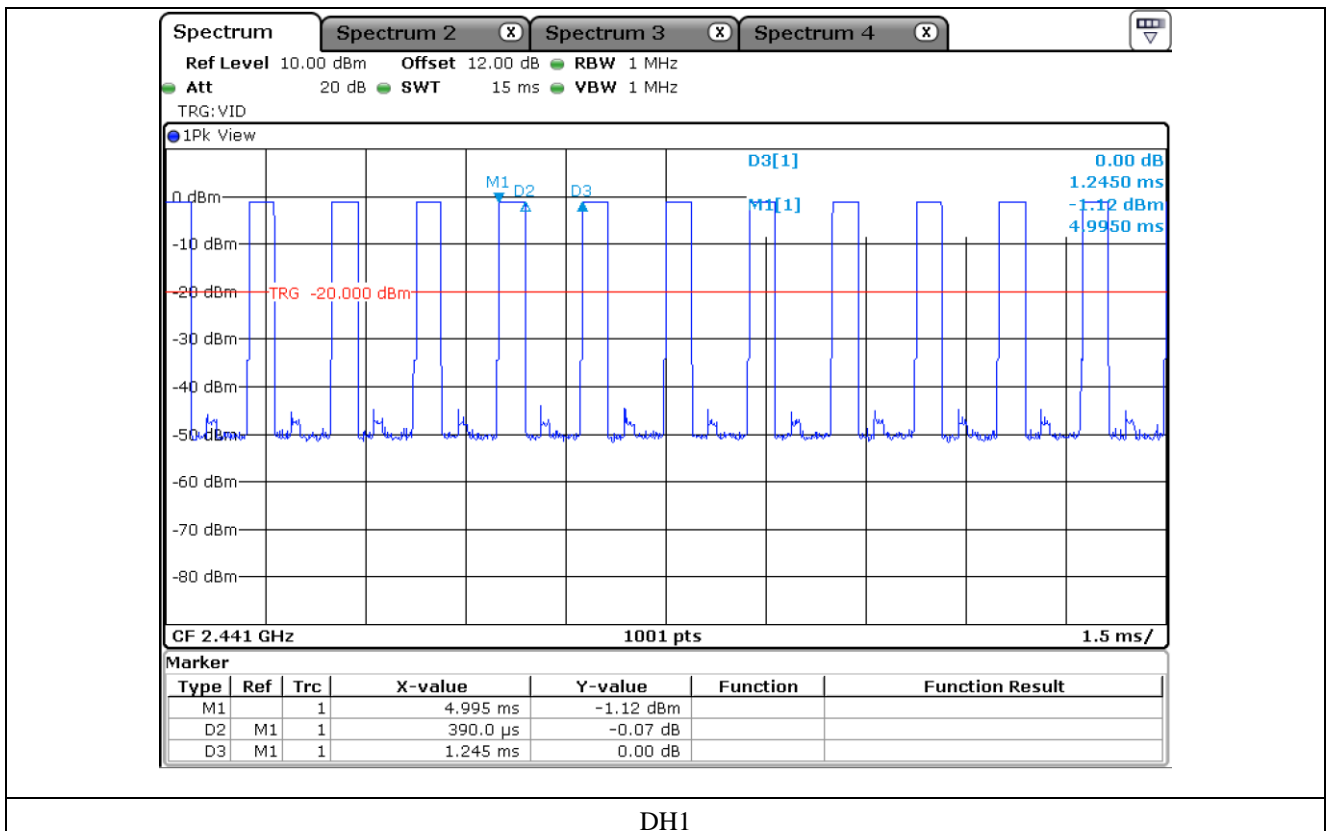

DH1

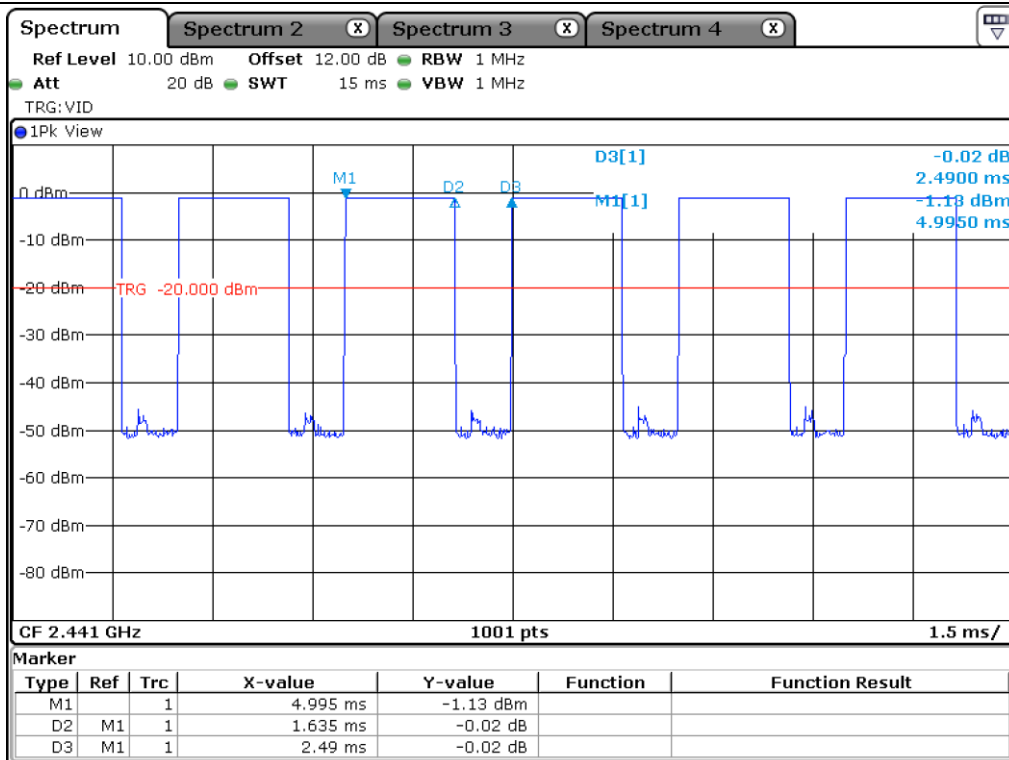

DH3

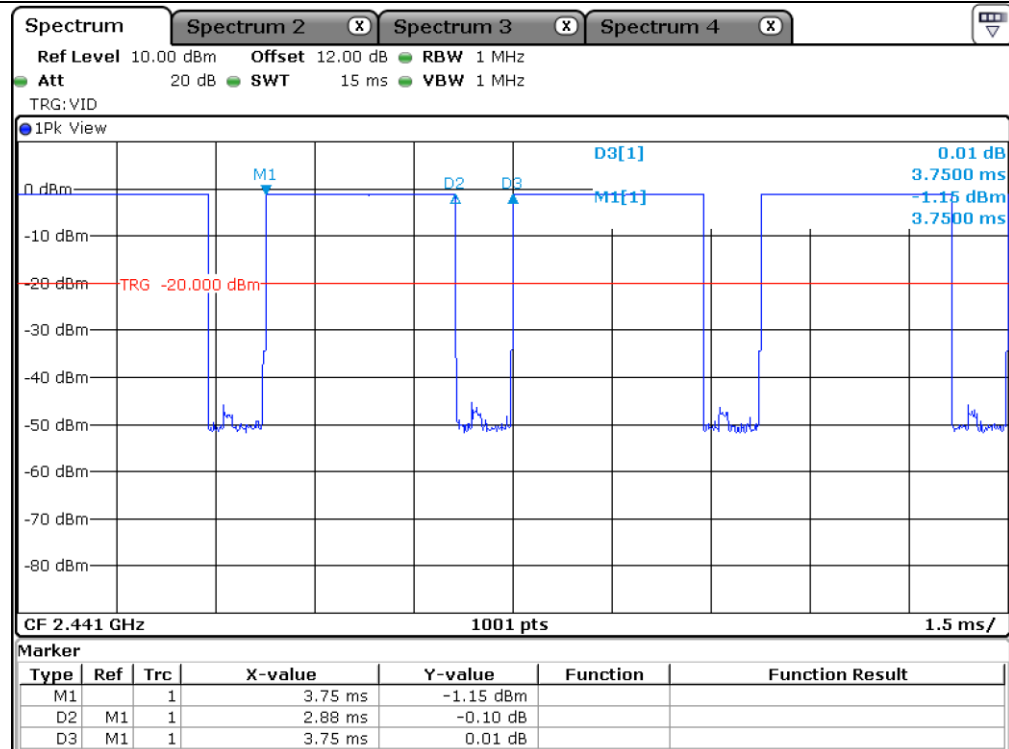

DH5

10.5 Test data for 2 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.390	10.13	31.60	124.84	400	PASS
DH3	1.650	5.06	31.60	263.83	400	
DH5	2.880	3.38	31.60	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.

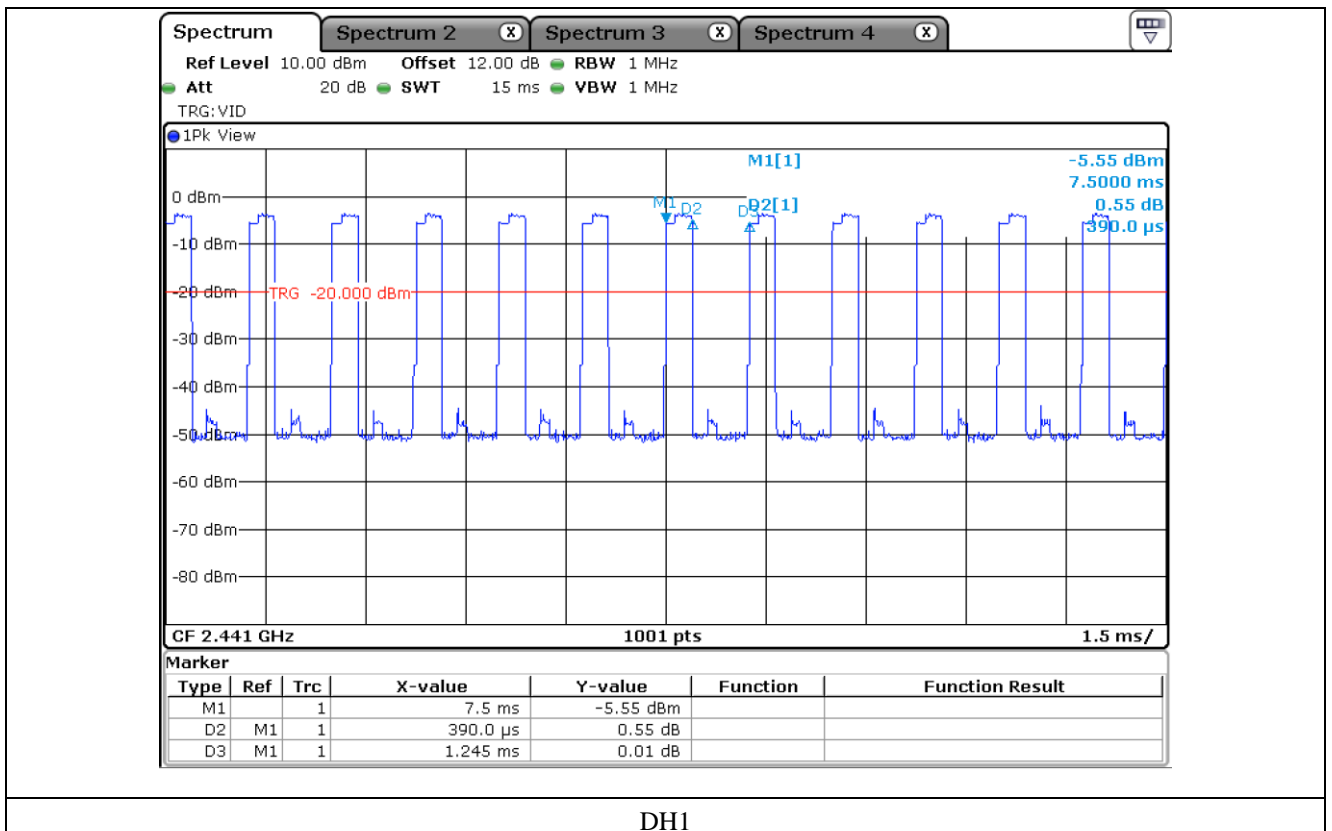

DH1

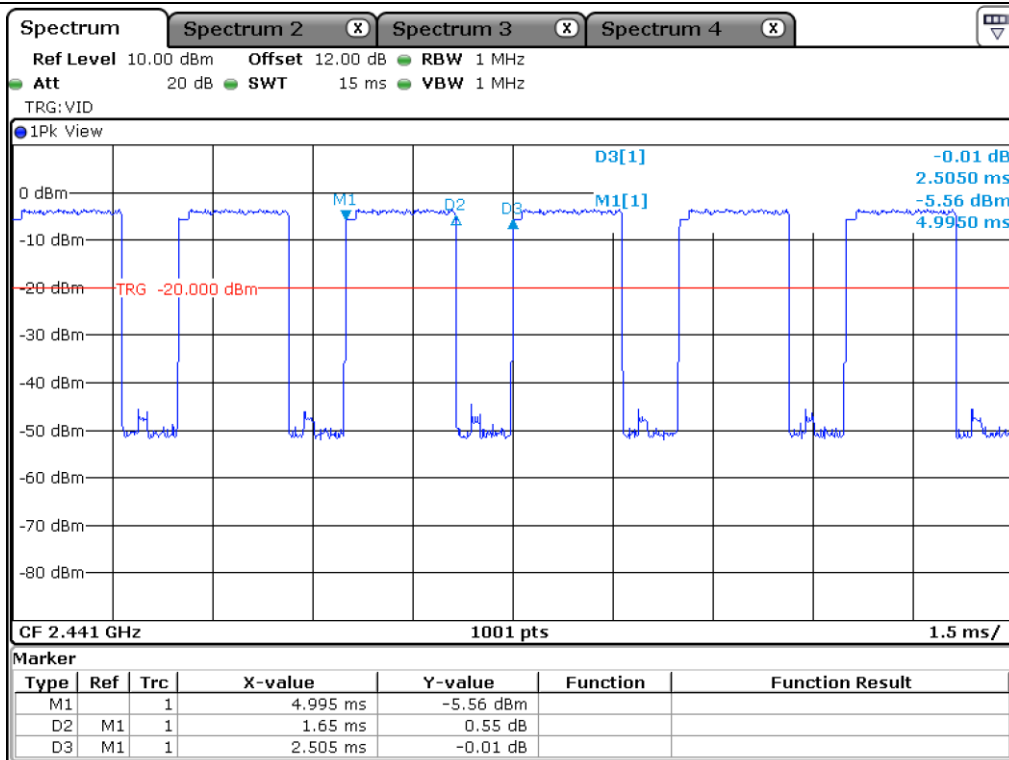

DH3

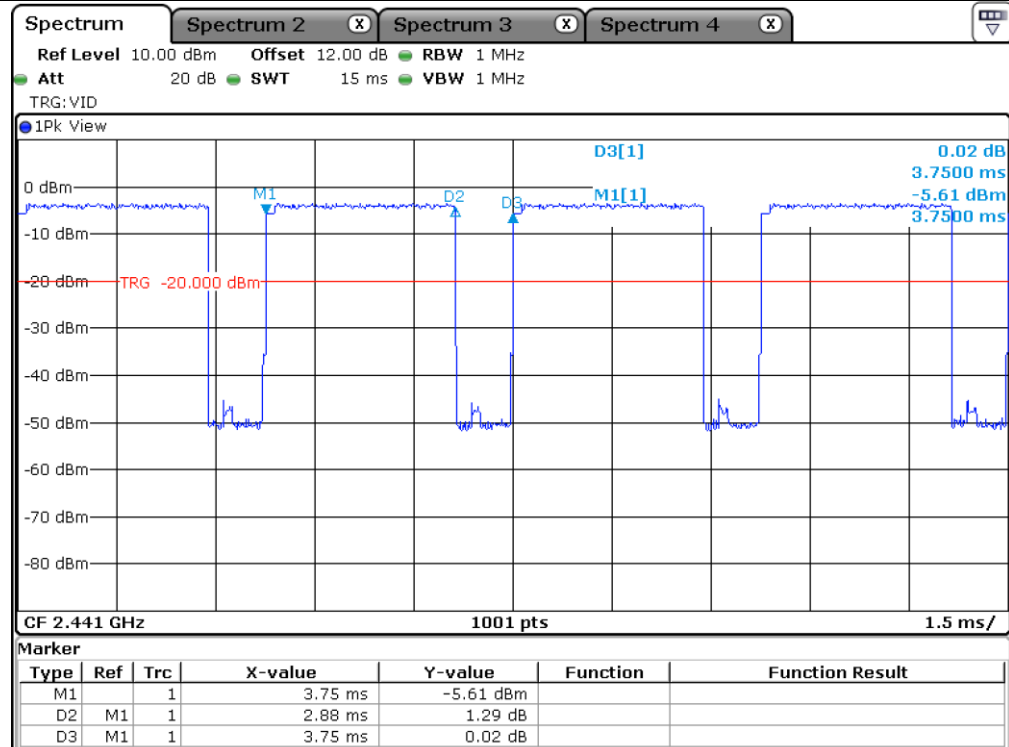

DH5

10.6 Test data for 3 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.390	10.13	31.60	124.84	400	PASS
DH3	1.635	5.06	31.60	261.43	400	
DH5	2.895	3.38	31.60	309.21	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.

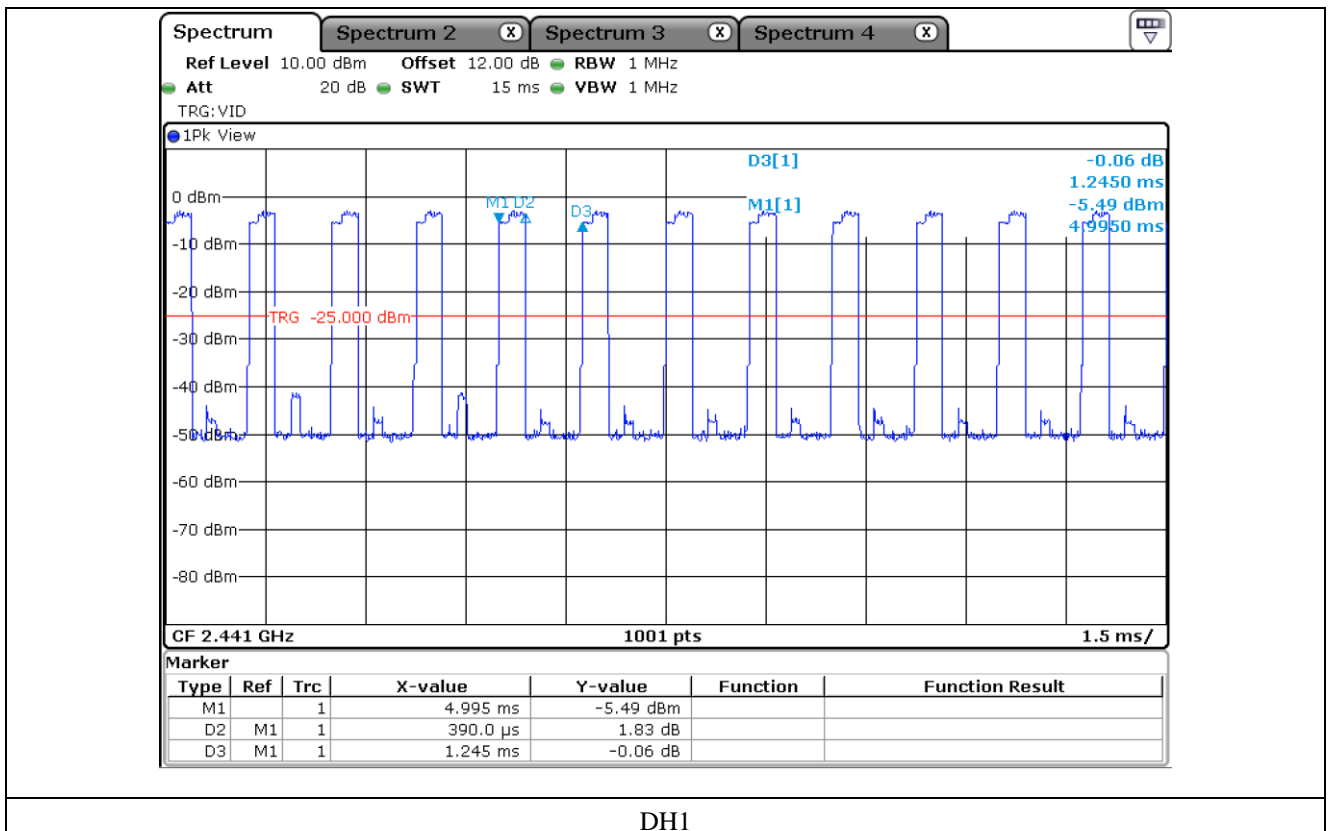

DH1

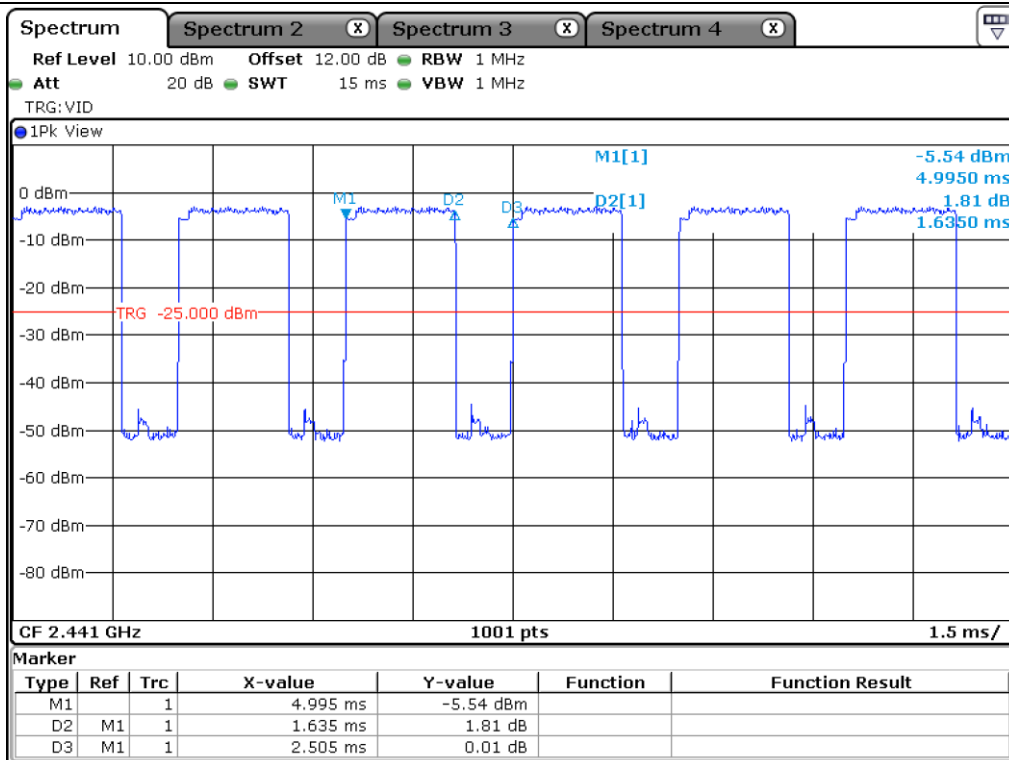

DH3

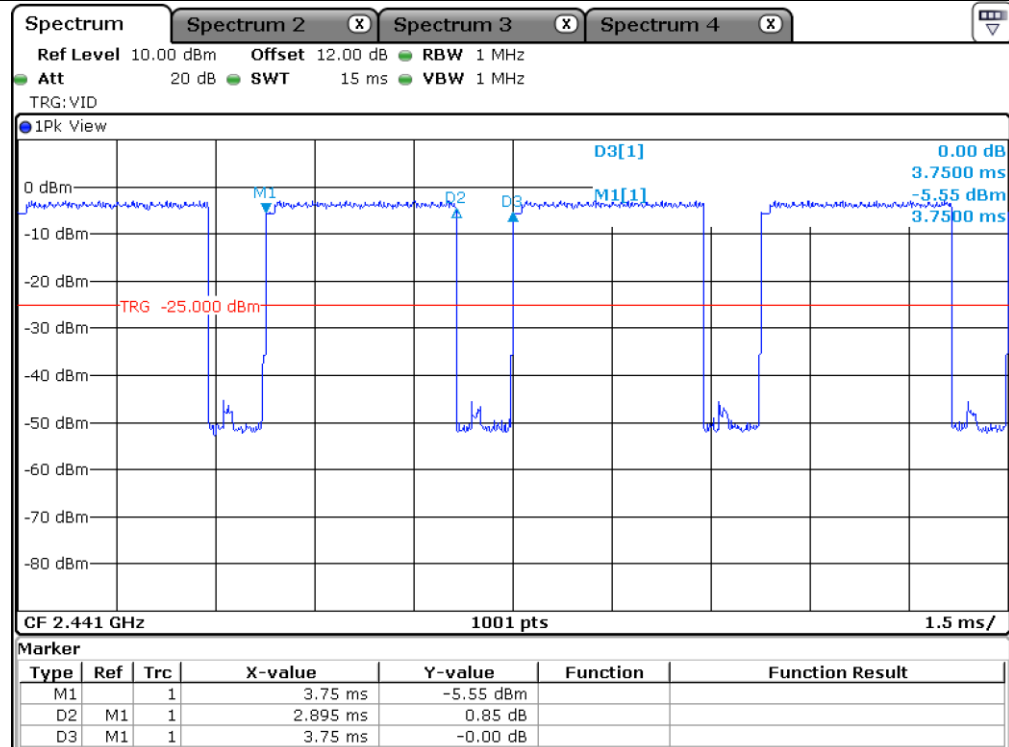

DH5

11. MAXIMUM PEAK OUTPUT POWER


11.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

11.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

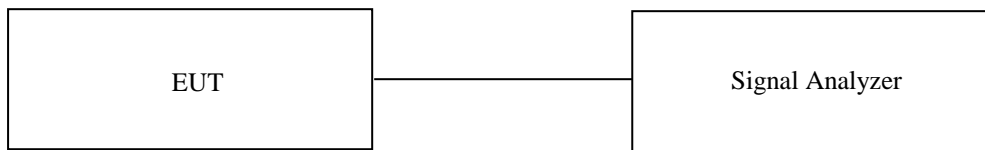

11.3 Test Date


January 07, 2021 ~ January 28, 2021


11.4 Test data for 1 Mbps

-. Test Result : Pass


Channel	Frequency (MHz)	Measured Value VLAUE (dBm)	Limit (dBm)	Margin (dB)
LOW	2 402.00	-0.60	21.00	21.60
MIDDLE	2 441.00	-0.81	21.00	21.81
HIGH	2 480.00	-0.05	21.00	21.05

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

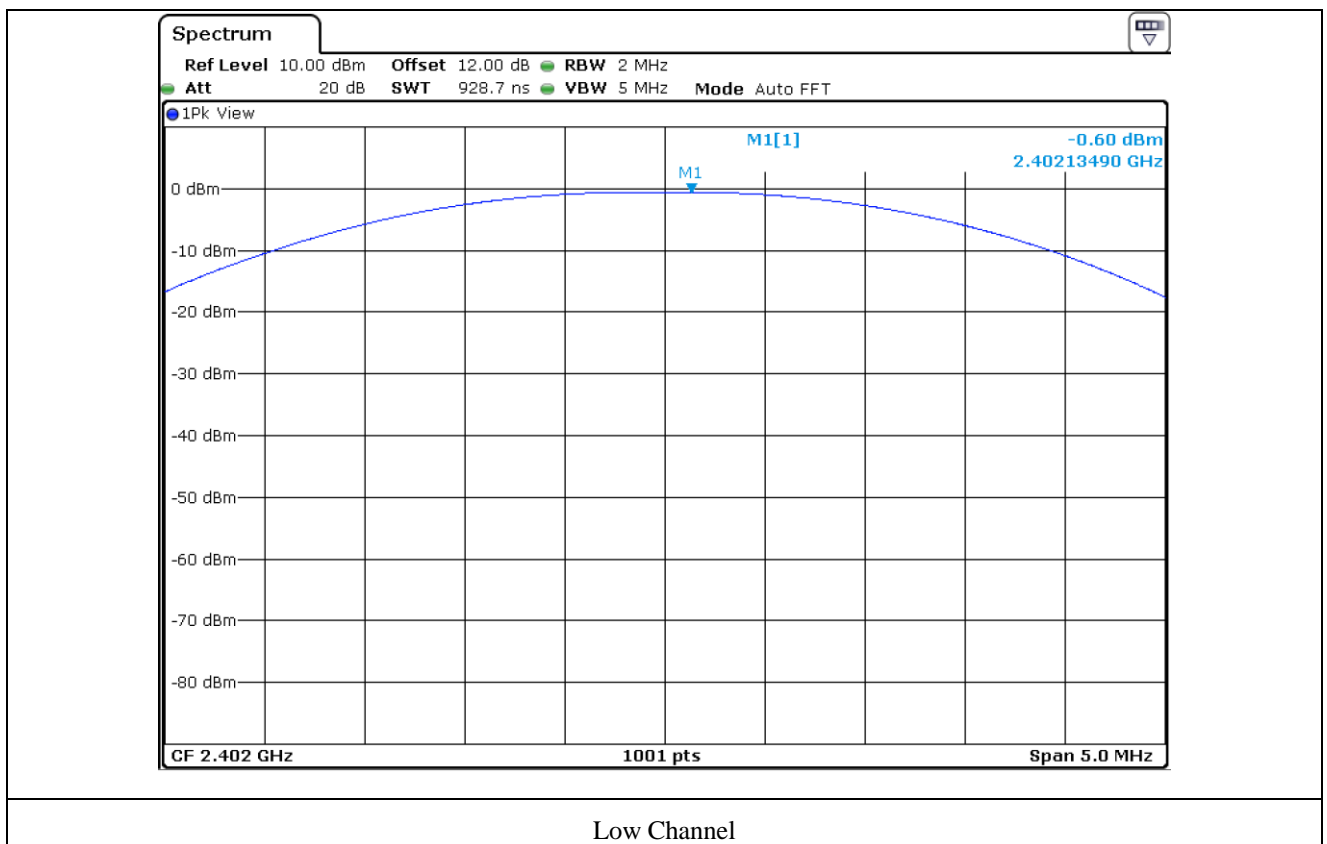

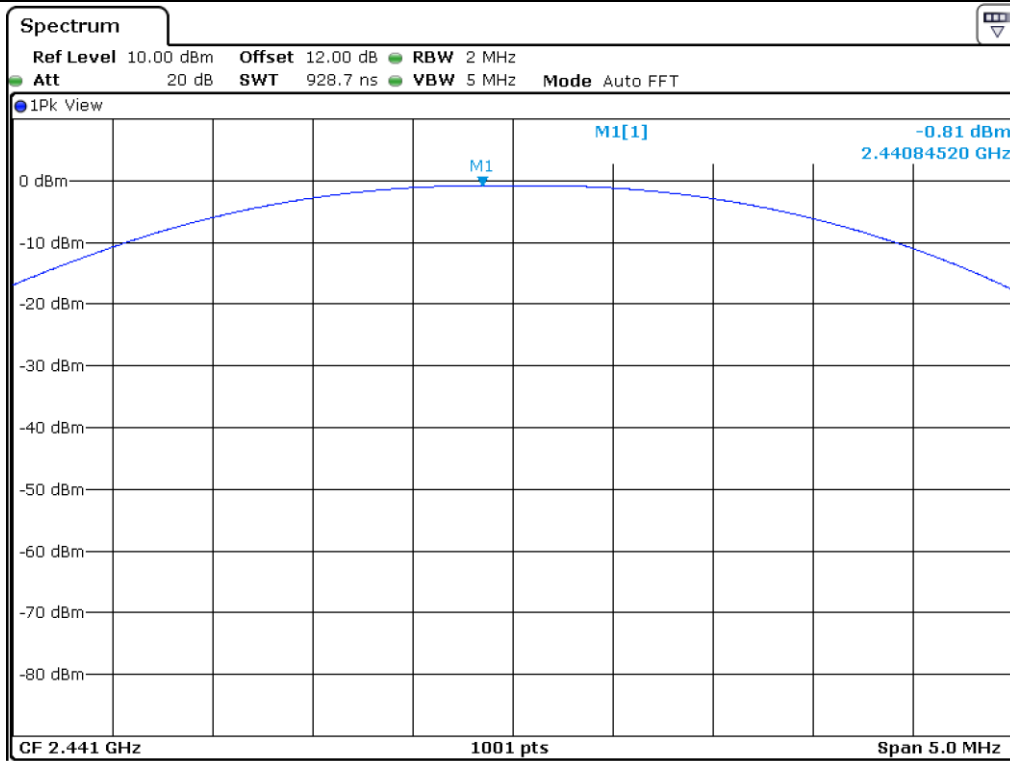

Middle Channel

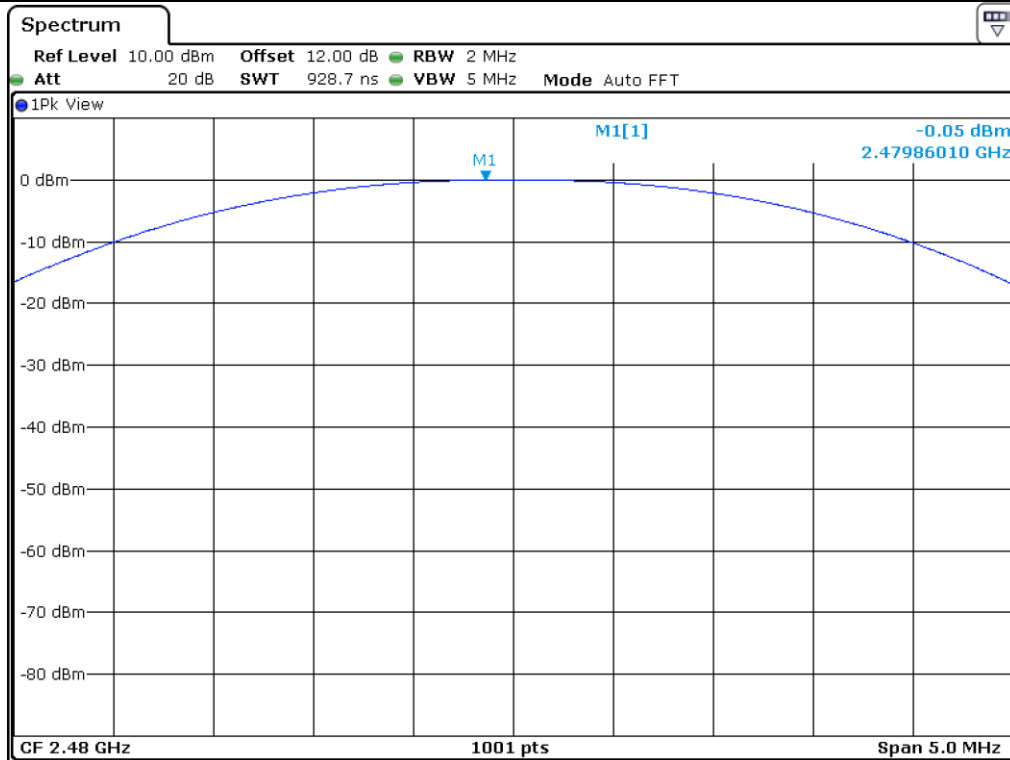


High Channel

11.5 Test data for 2 Mbps


-. Test Result : Pass

Channel	Frequency (MHz)	Measured Value VLAUE (dBm)	Limit (dBm)	Margin (dB)
LOW	2 402.00	-2.30	21.00	23.30
MIDDLE	2 441.00	-2.74	21.00	23.74
HIGH	2 480.00	-2.55	21.00	23.55


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

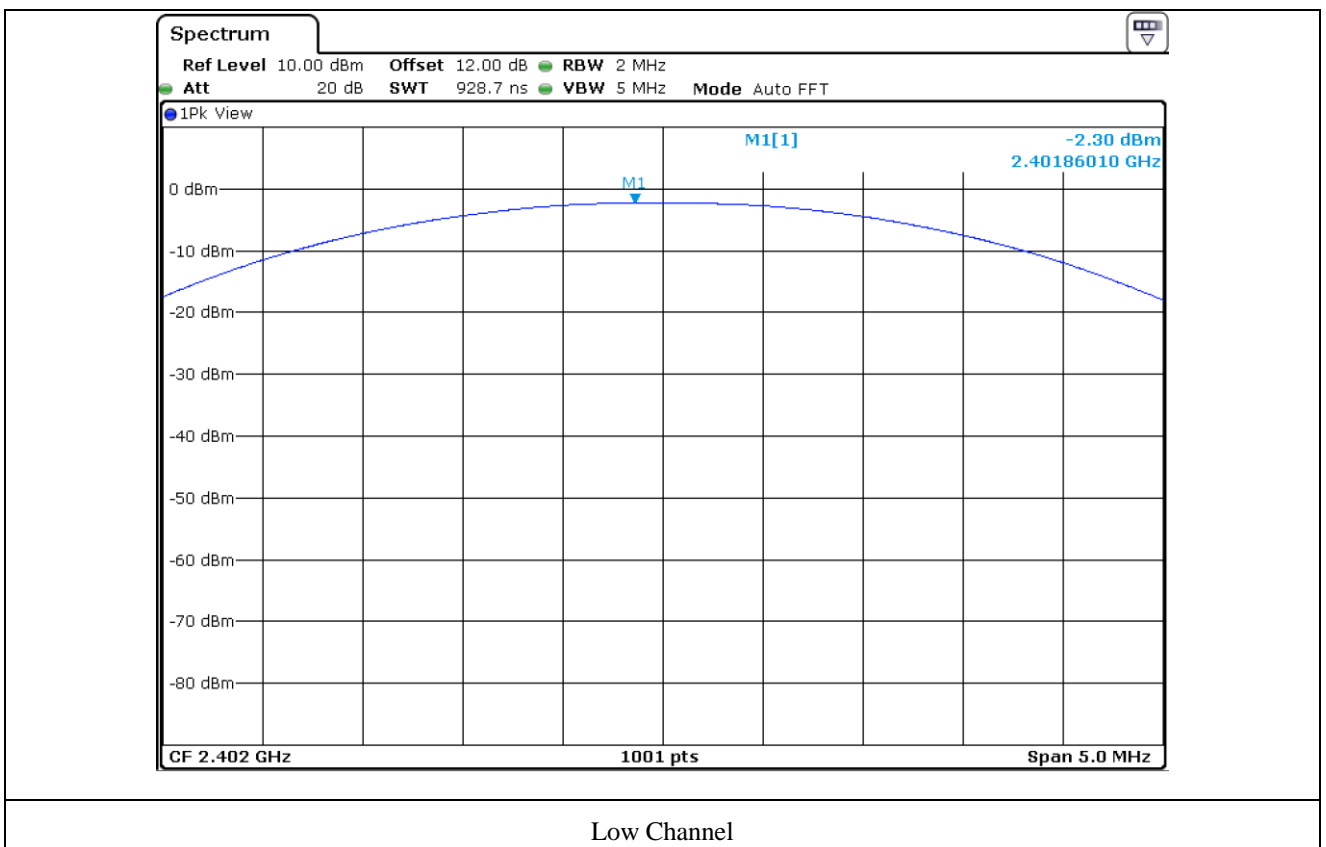

Low Channel

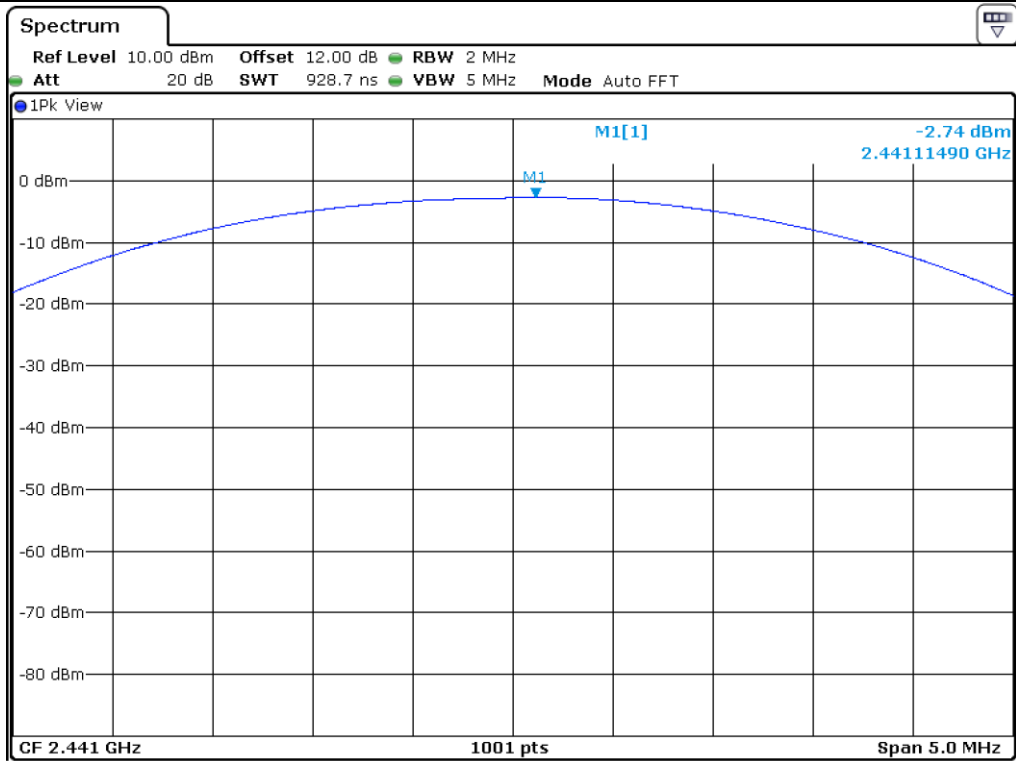

Middle Channel

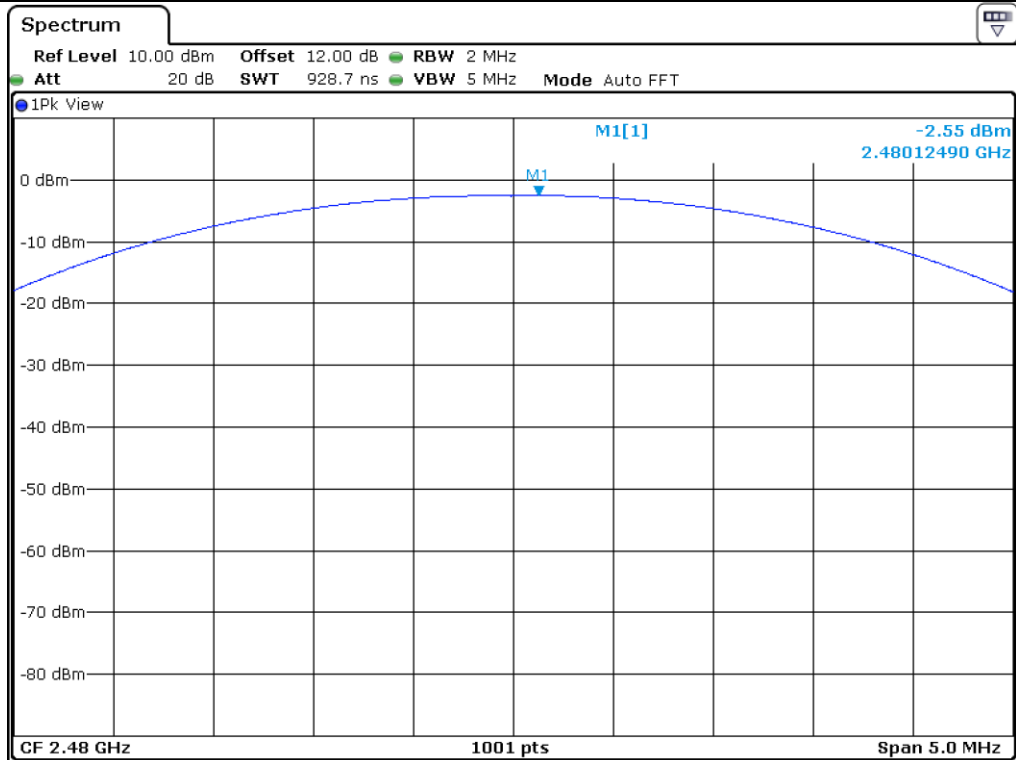


High Channel


11.6 Test data for 3 Mbps

-. Test Result : Pass


Channel	Frequency (MHz)	Measured Value VLAUE (dBm)	Limit (dBm)	Margin (dB)
LOW	2 402.00	-1.87	21.00	22.87
MIDDLE	2 441.00	-2.33	21.00	23.33
HIGH	2 480.00	-2.05	21.00	23.05

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

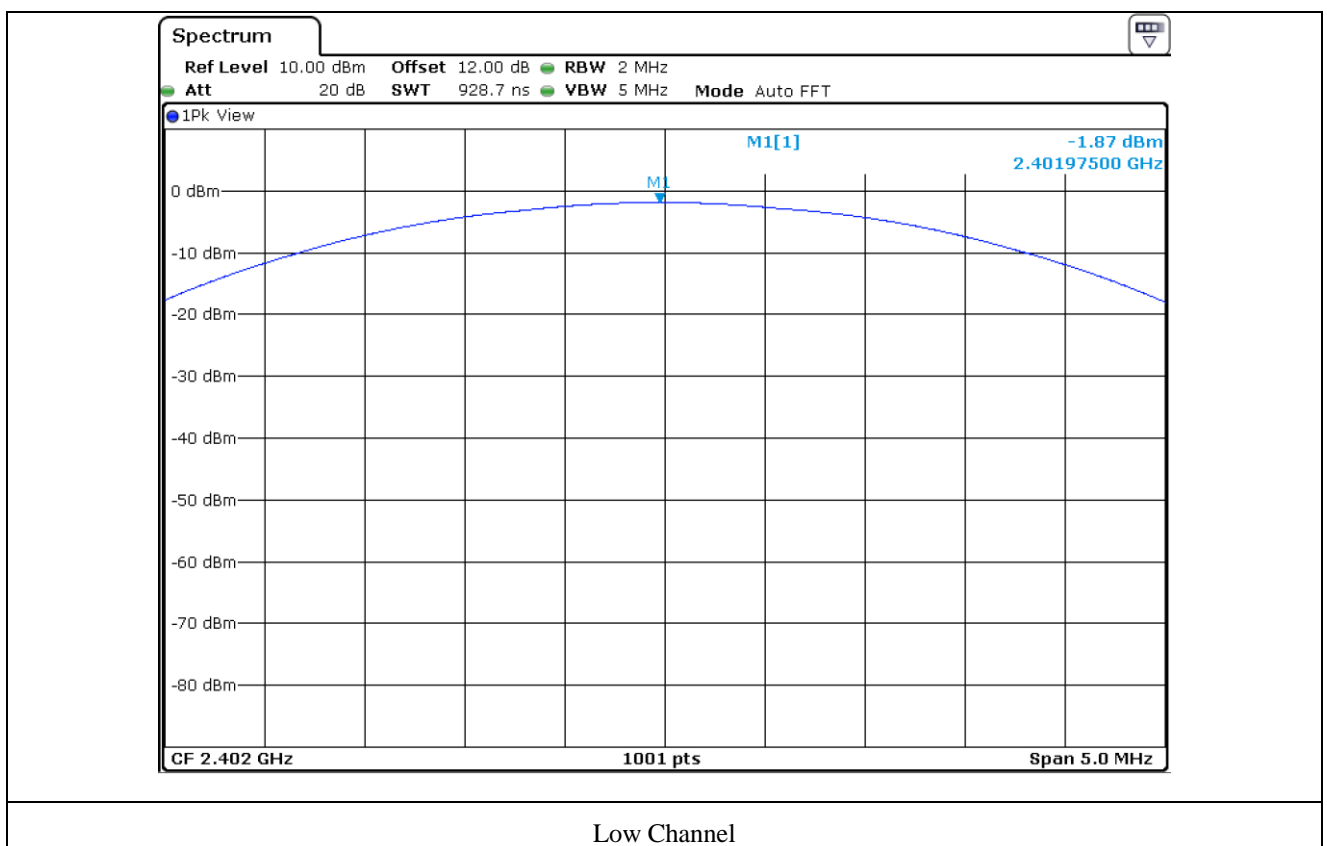

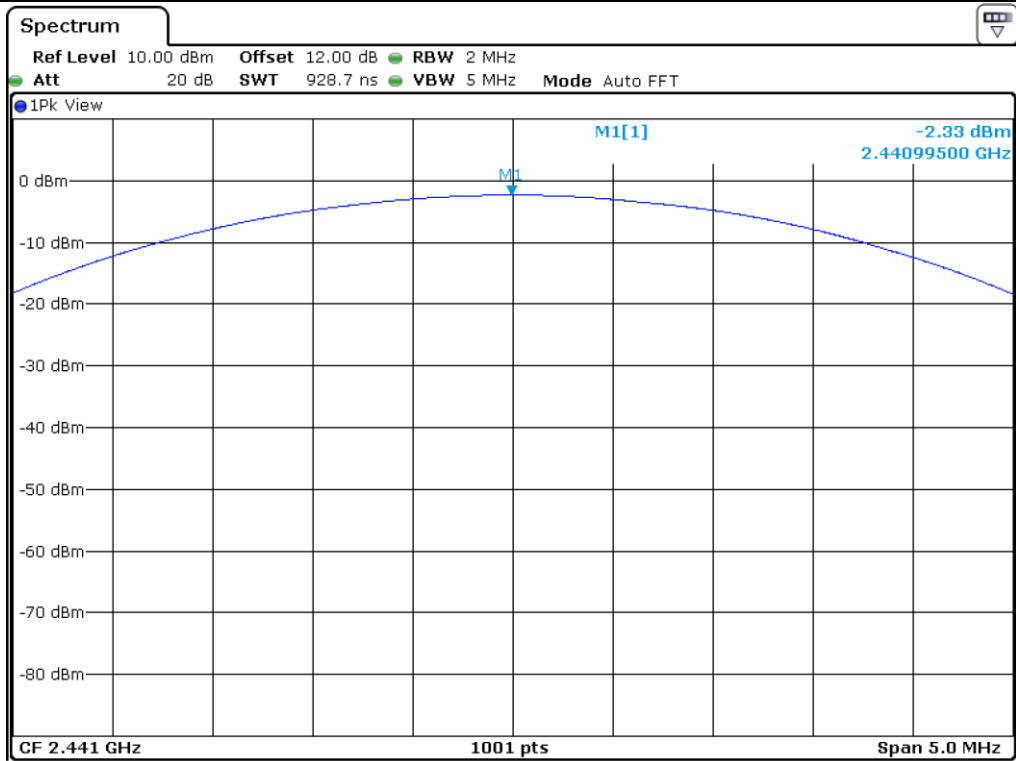

Middle Channel

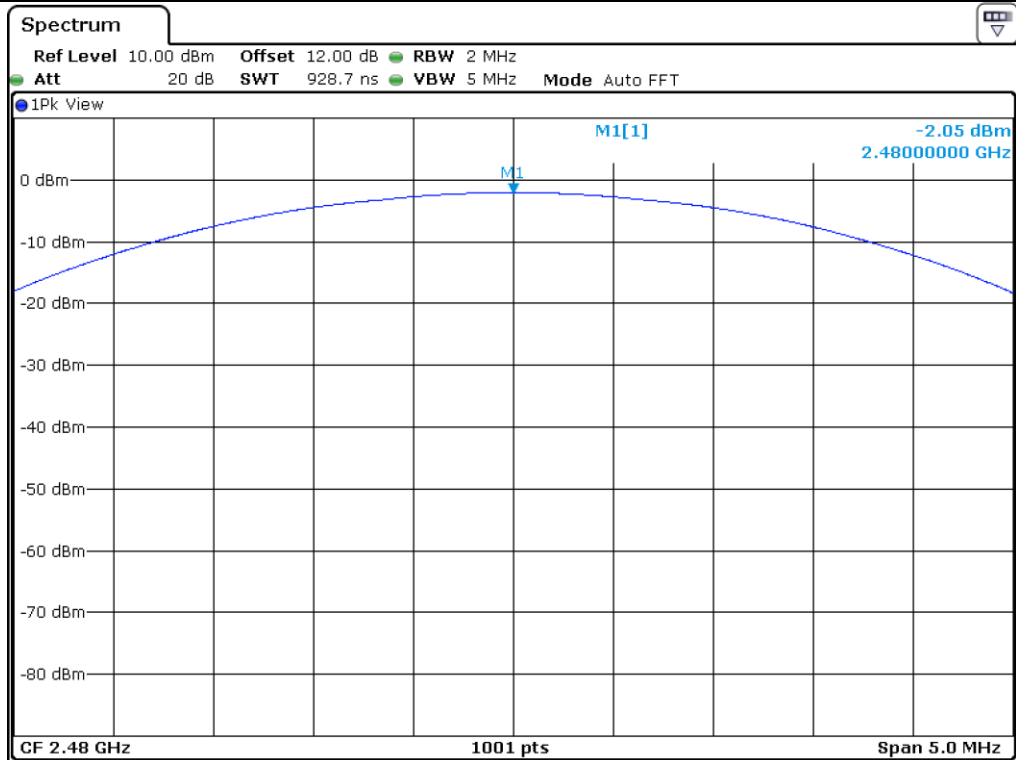

High Channel

12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.



12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

12.4 Test Date


January 07, 2021 ~ January 28, 2021

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

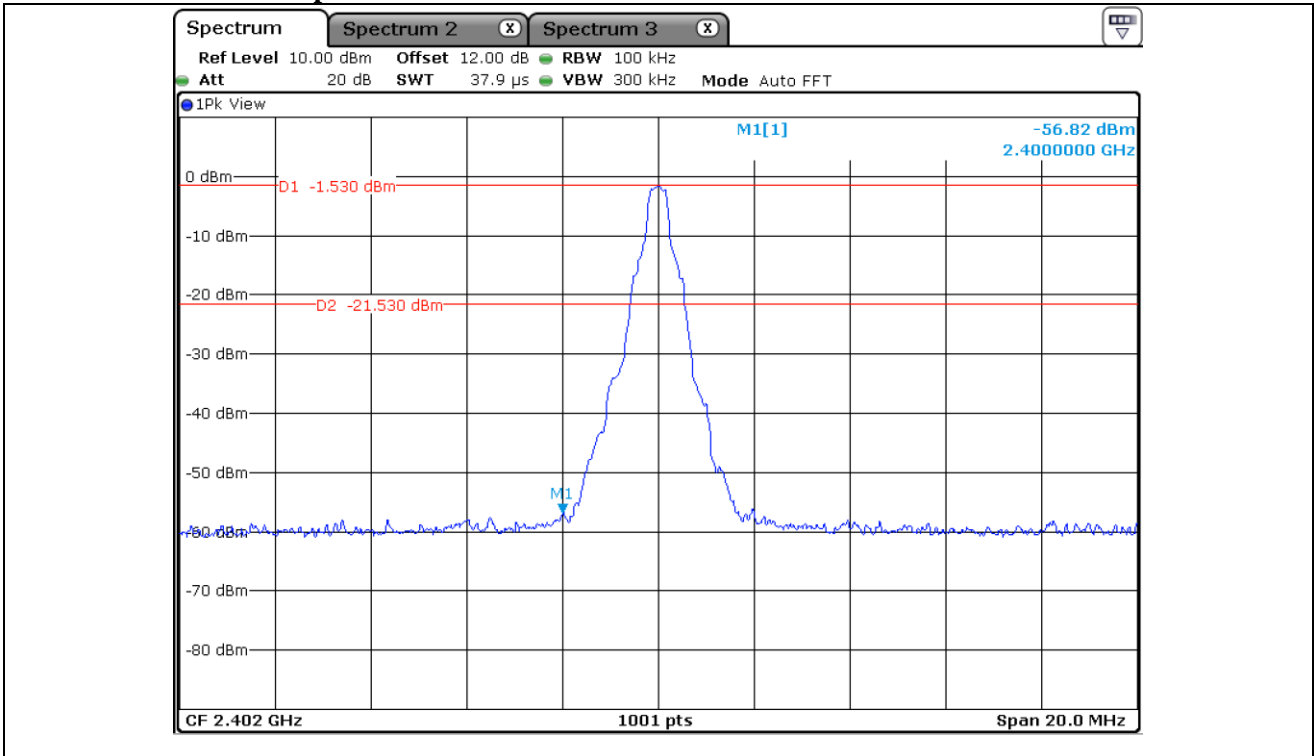


Low Channel

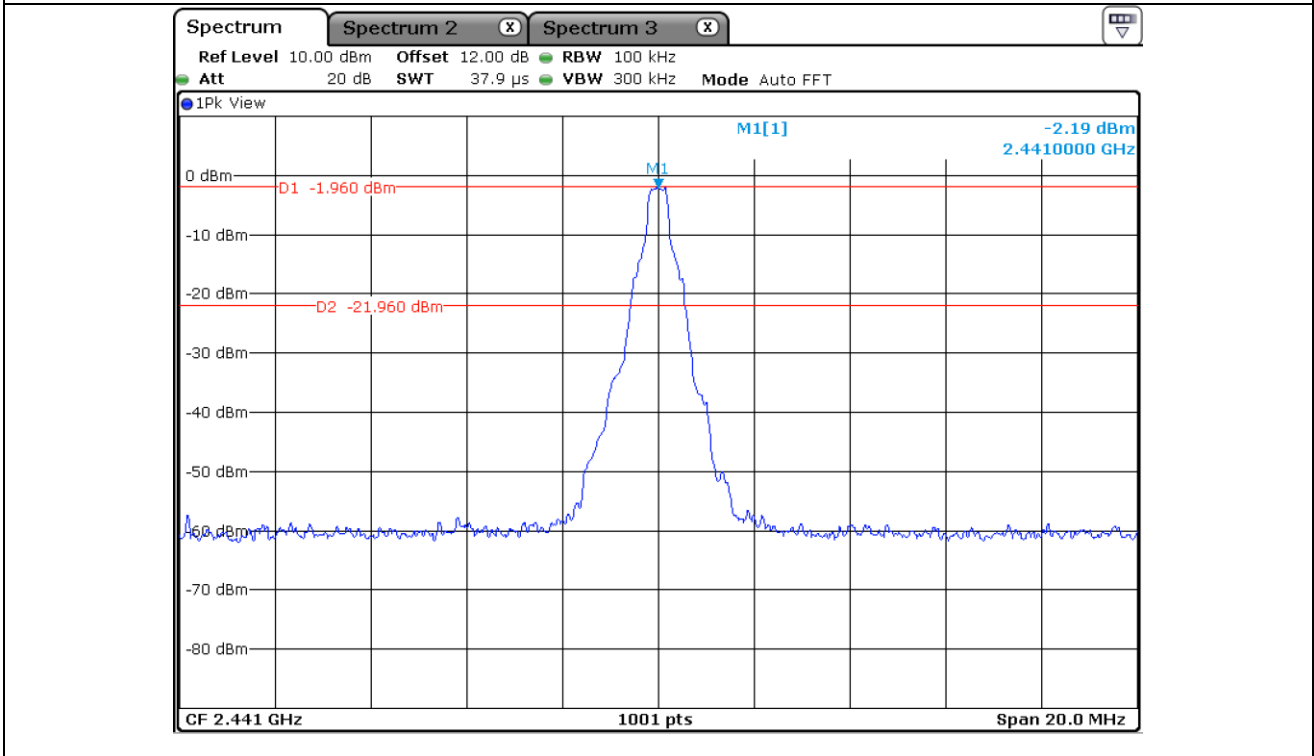


Middle Channel

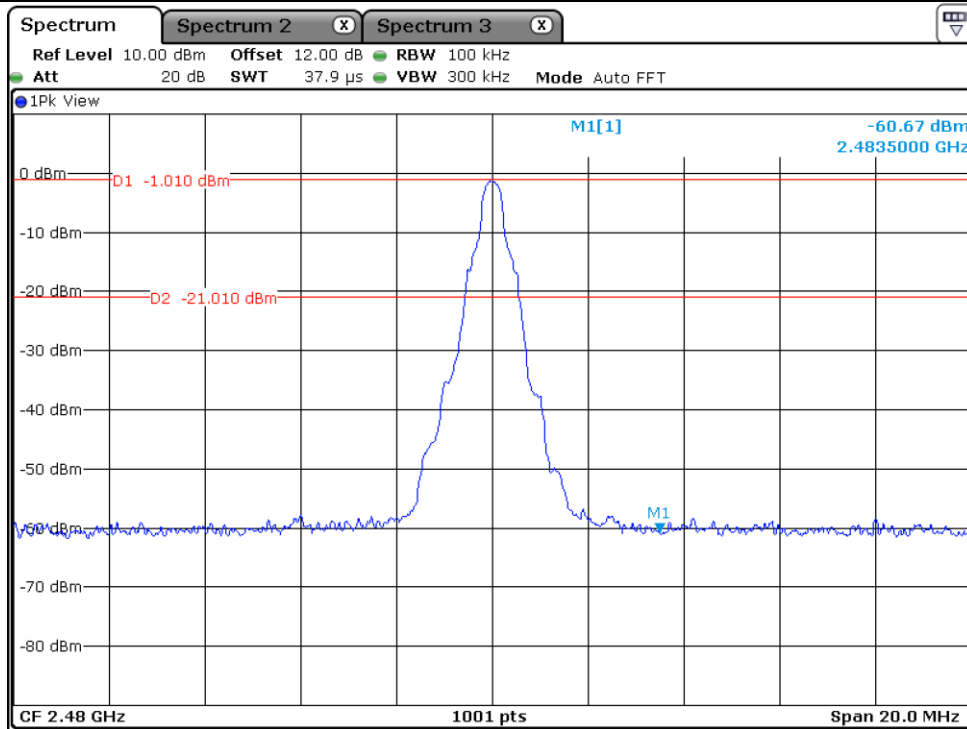


High Channel

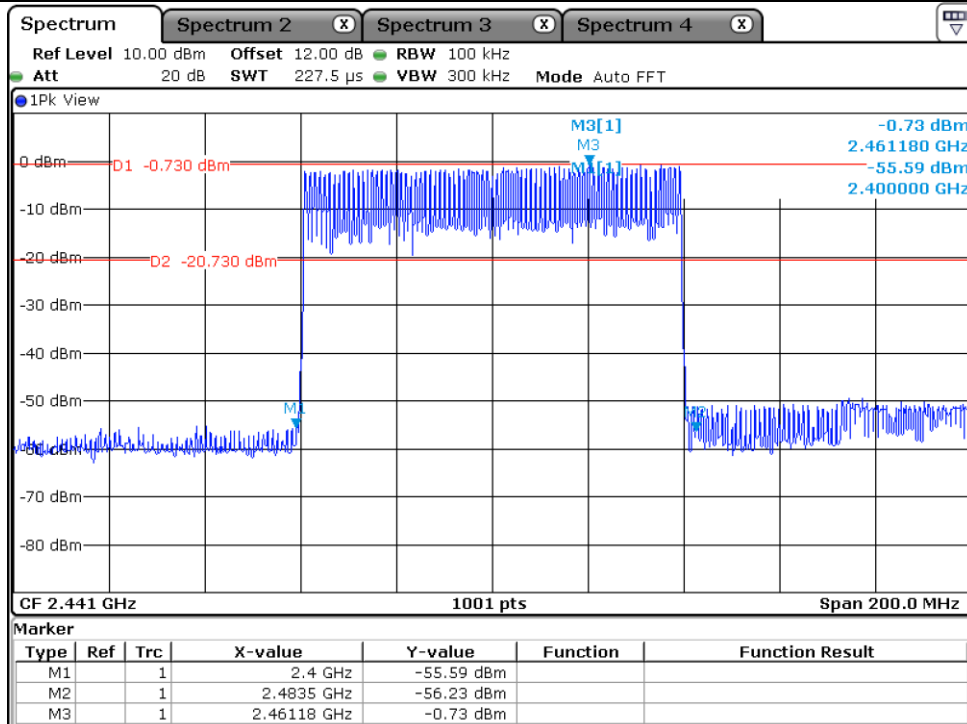


Hopping Mode

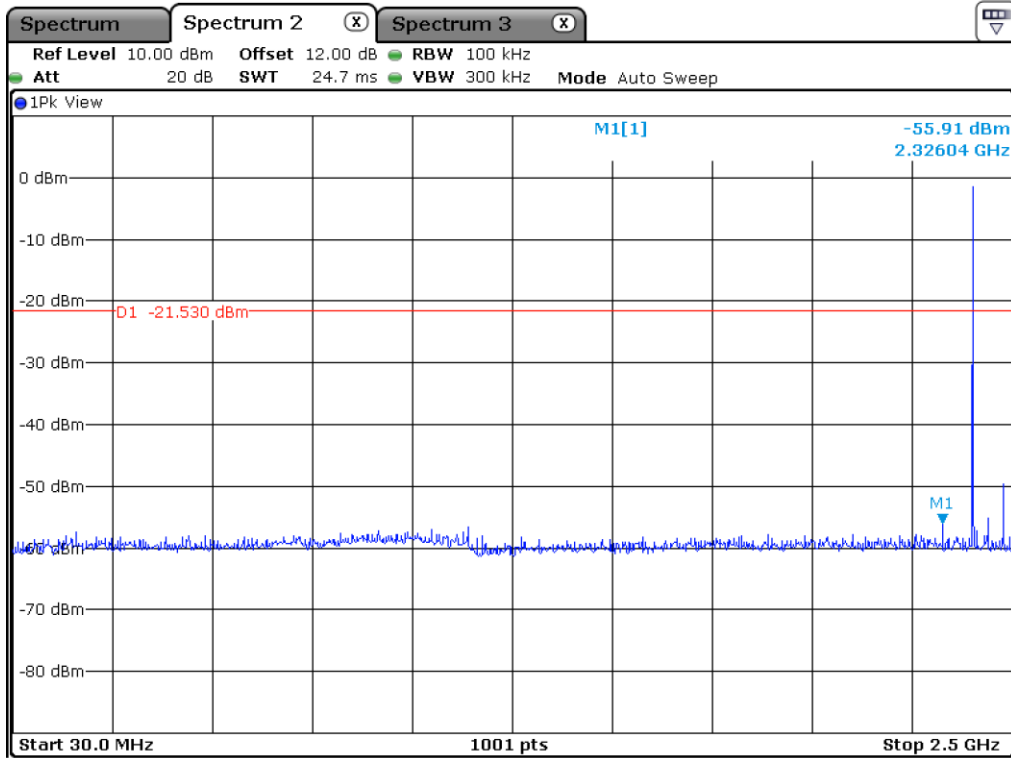


Low Channel

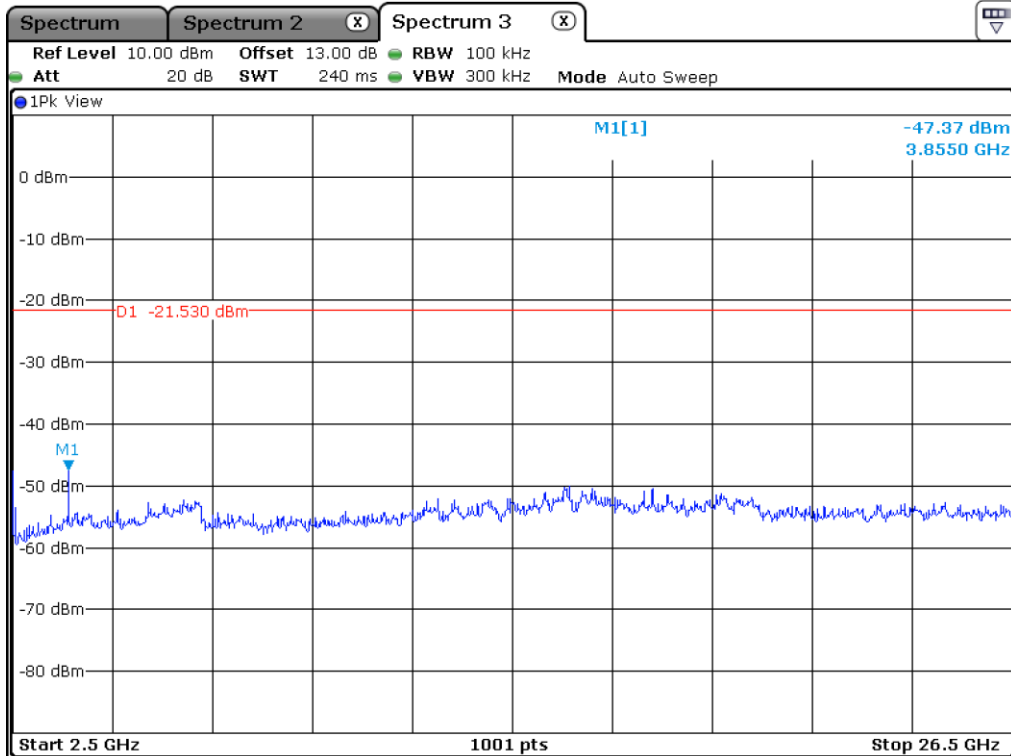


Low Channel

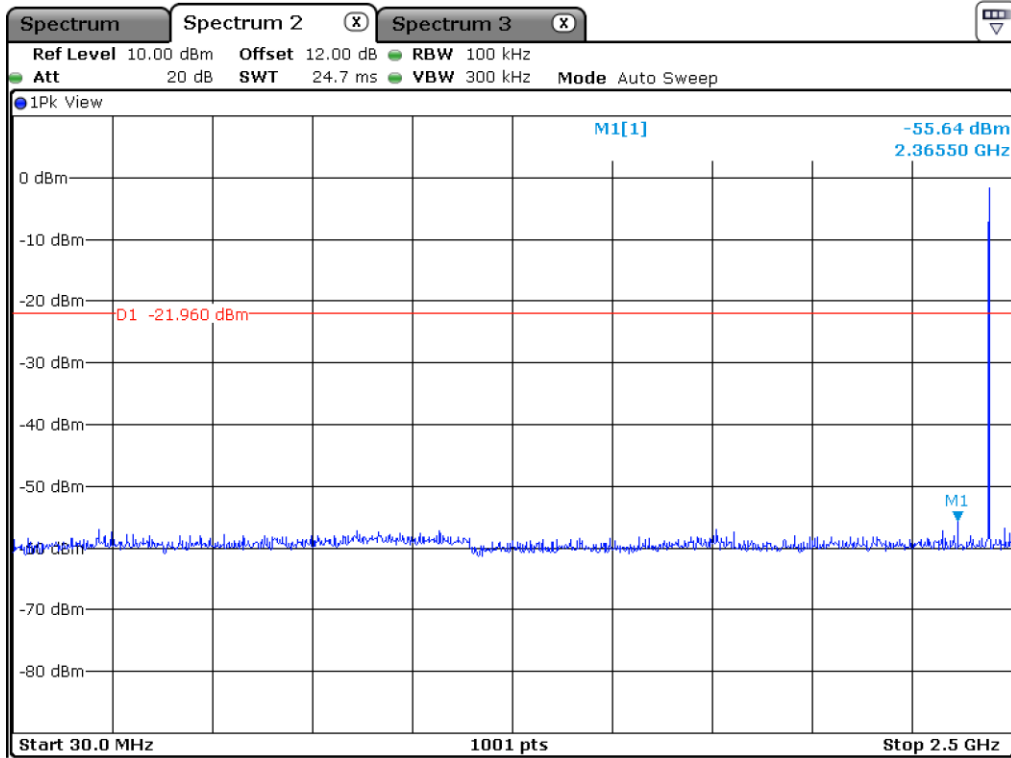


Middle Channel

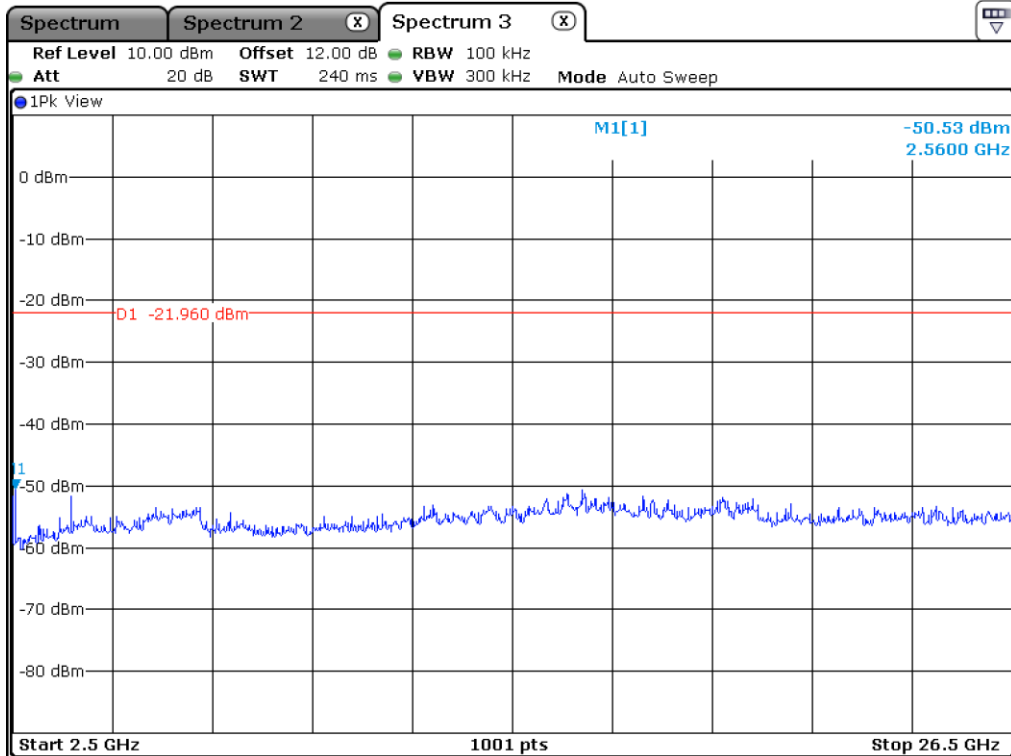


Middle Channel

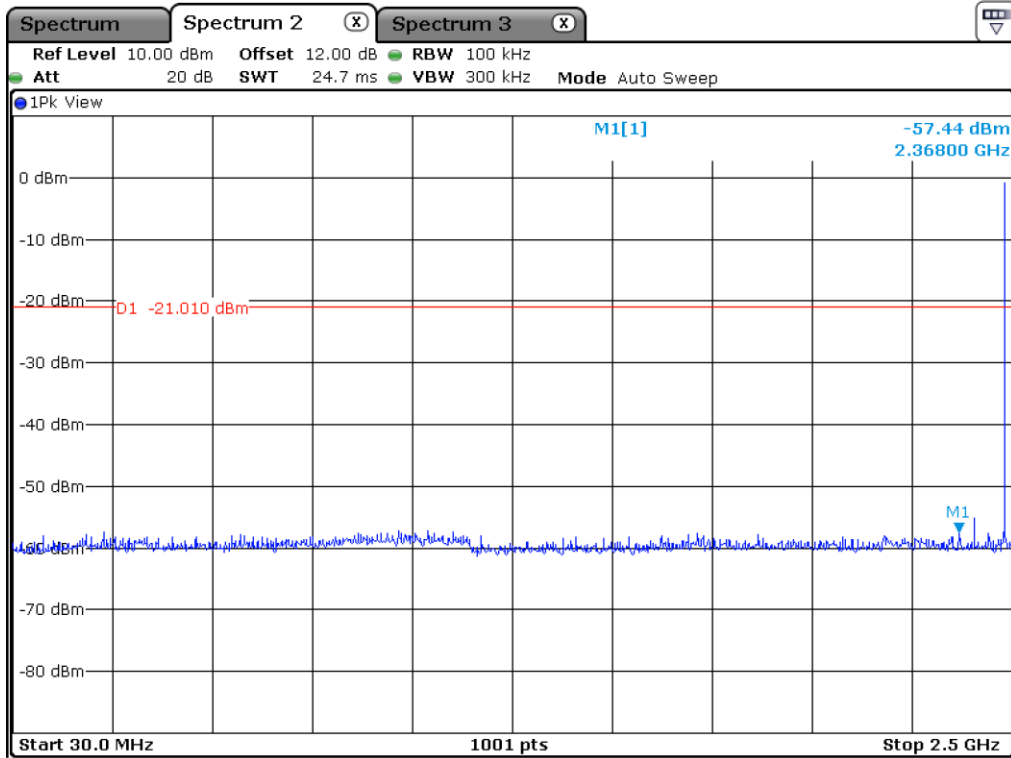


High Channel

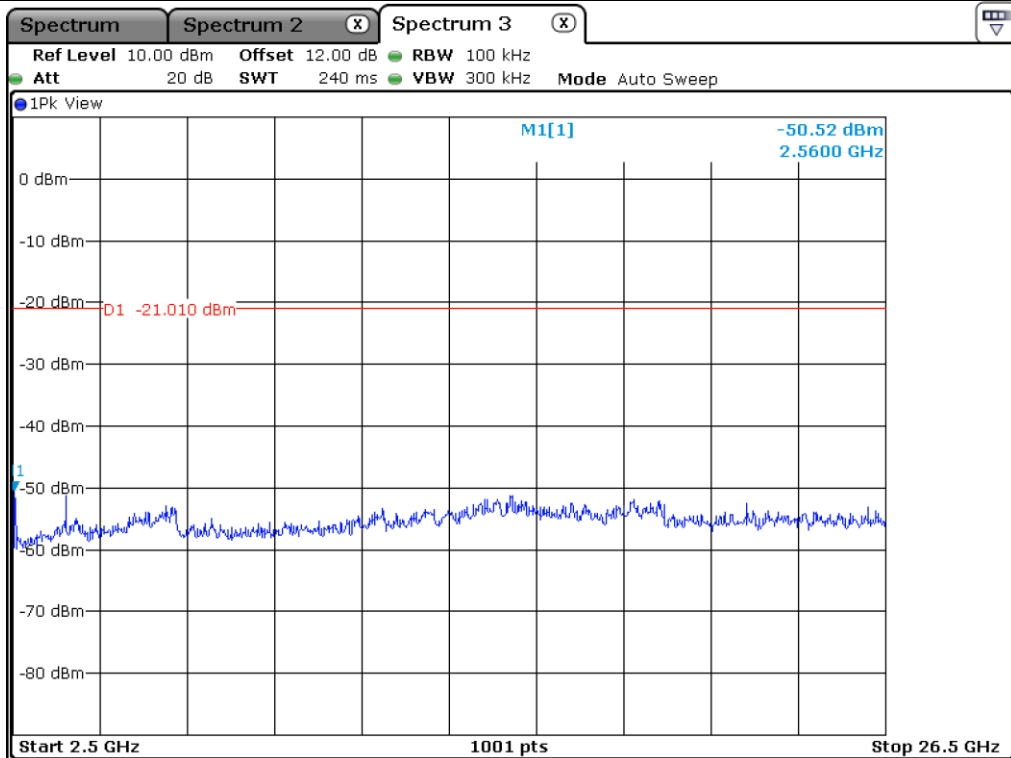

High Channel

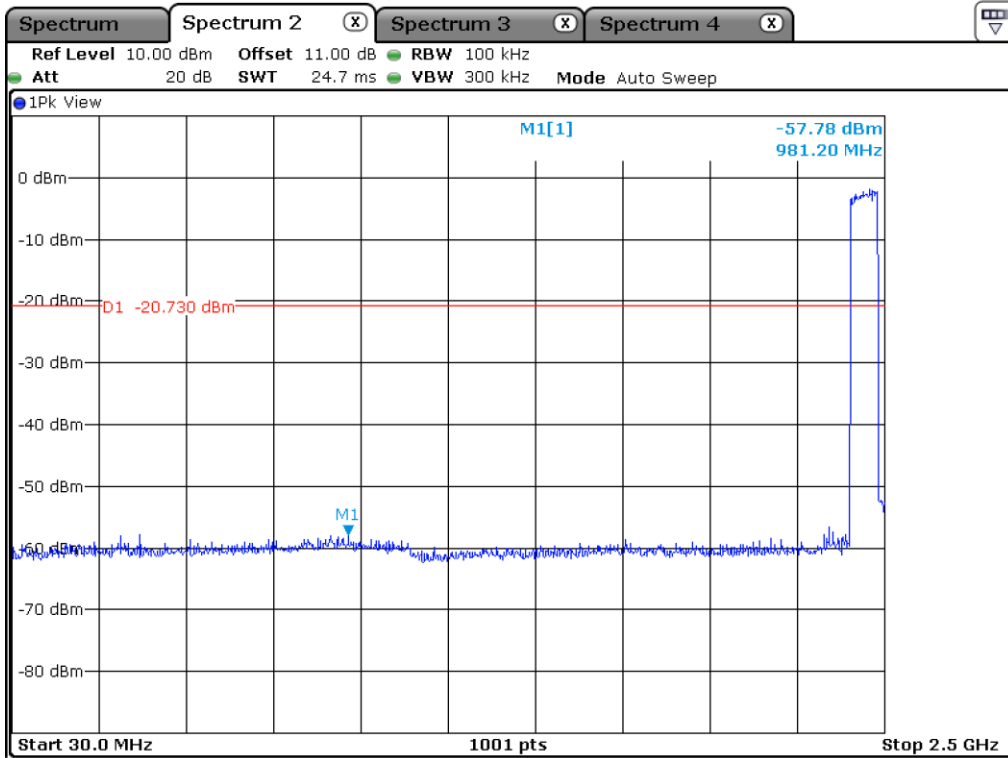


Hopping Mode

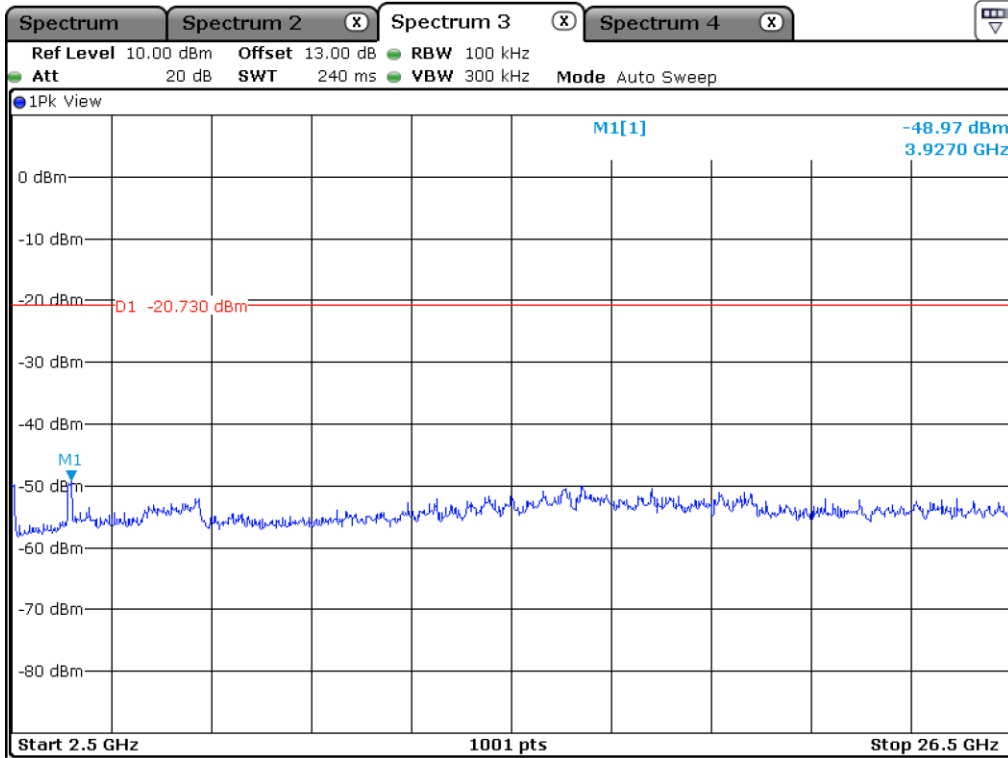


Hopping Mode


12.5.2 Test data for 2 Mbps

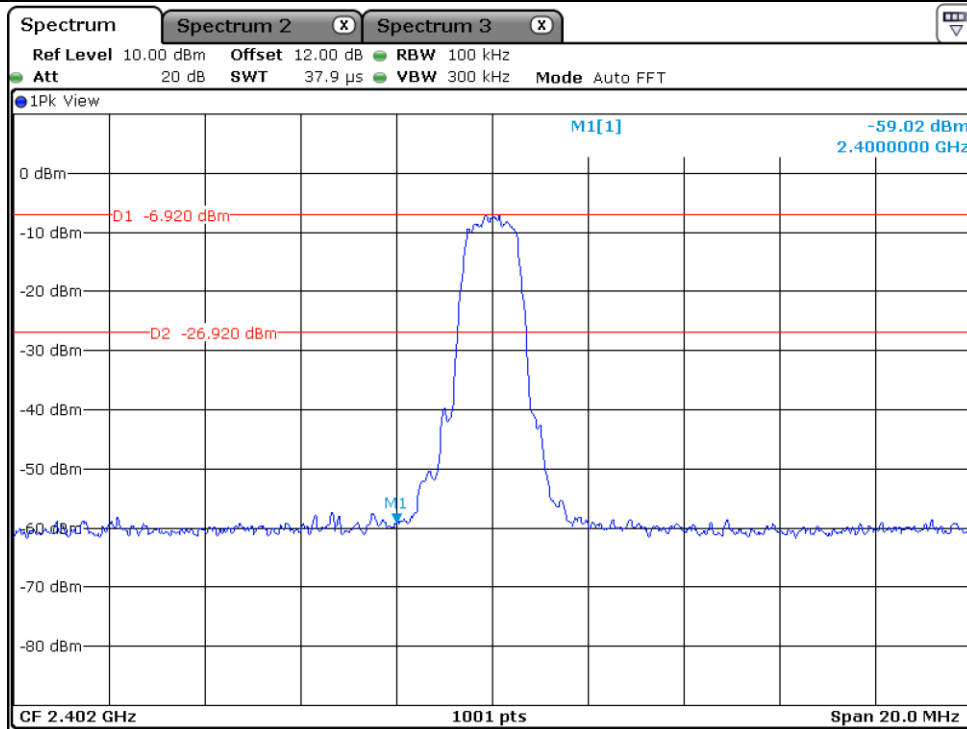


Low Channel

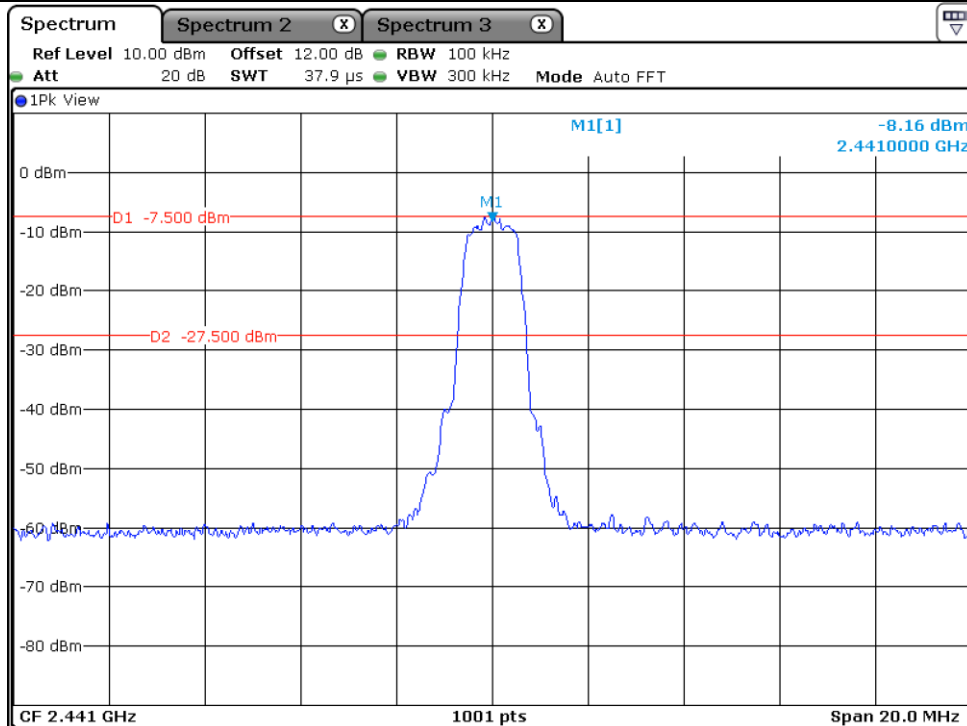


Middle Channel

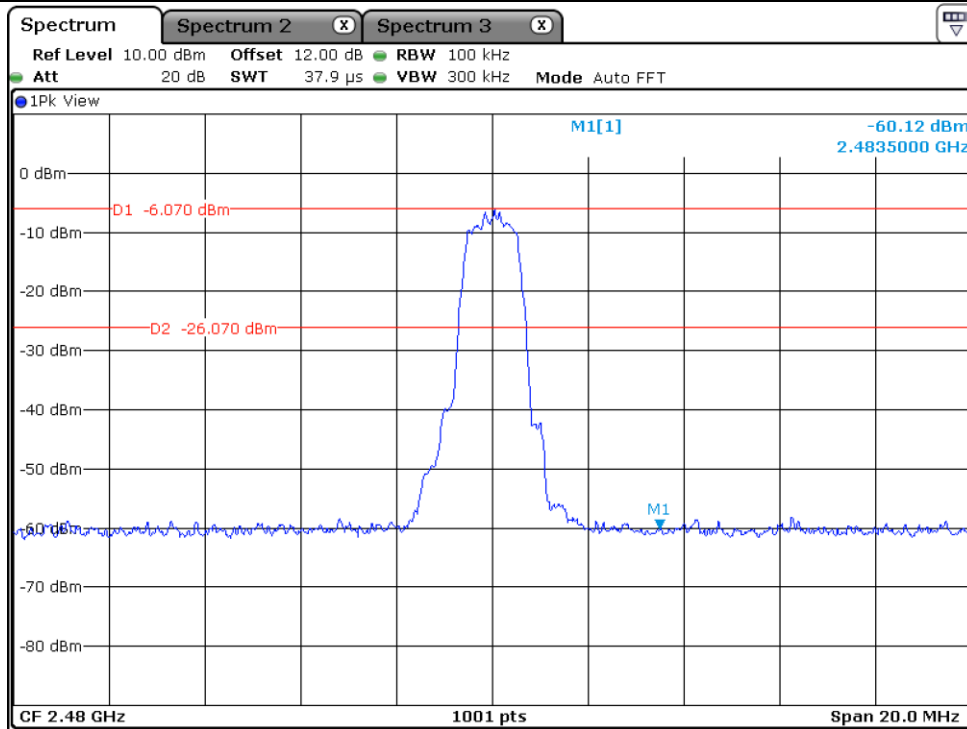


High Channel

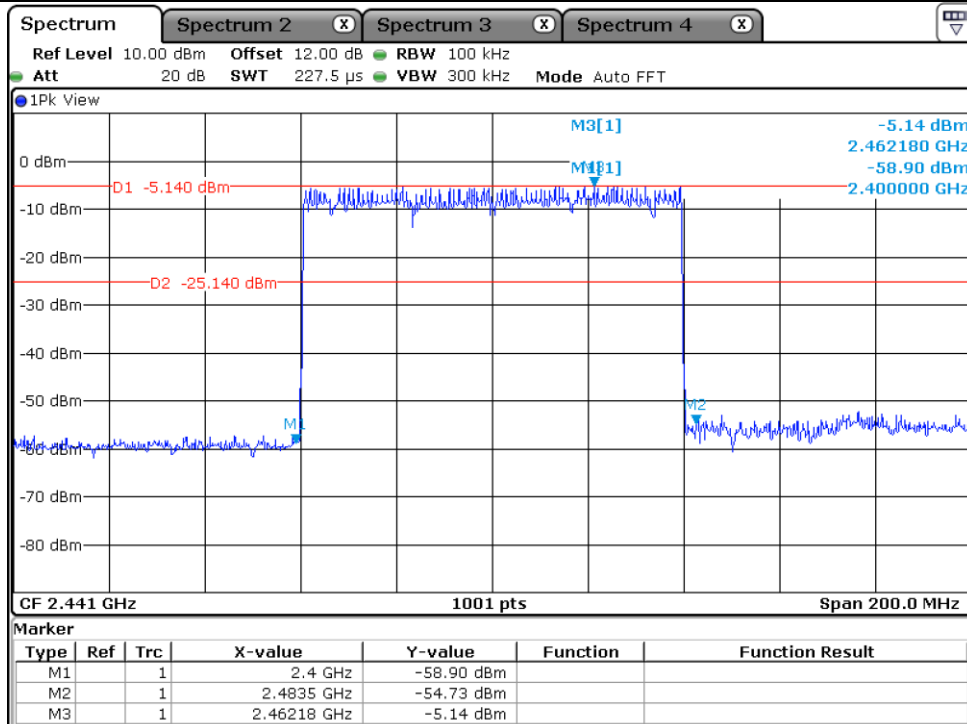


Hopping Mode

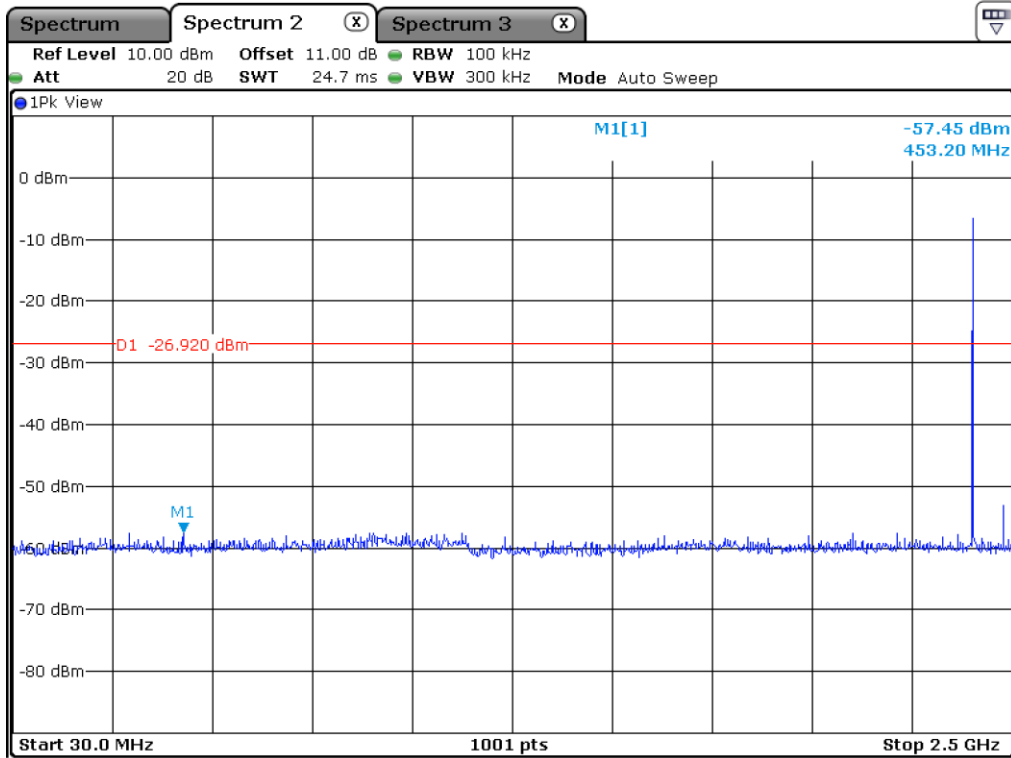


Low Channel

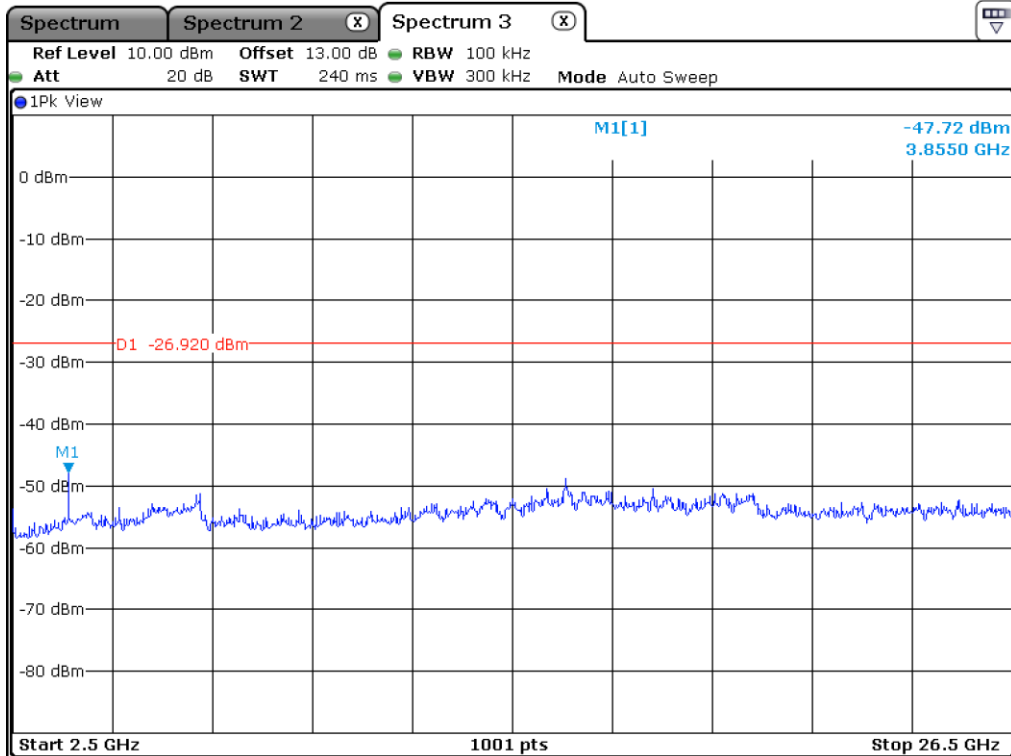


Low Channel

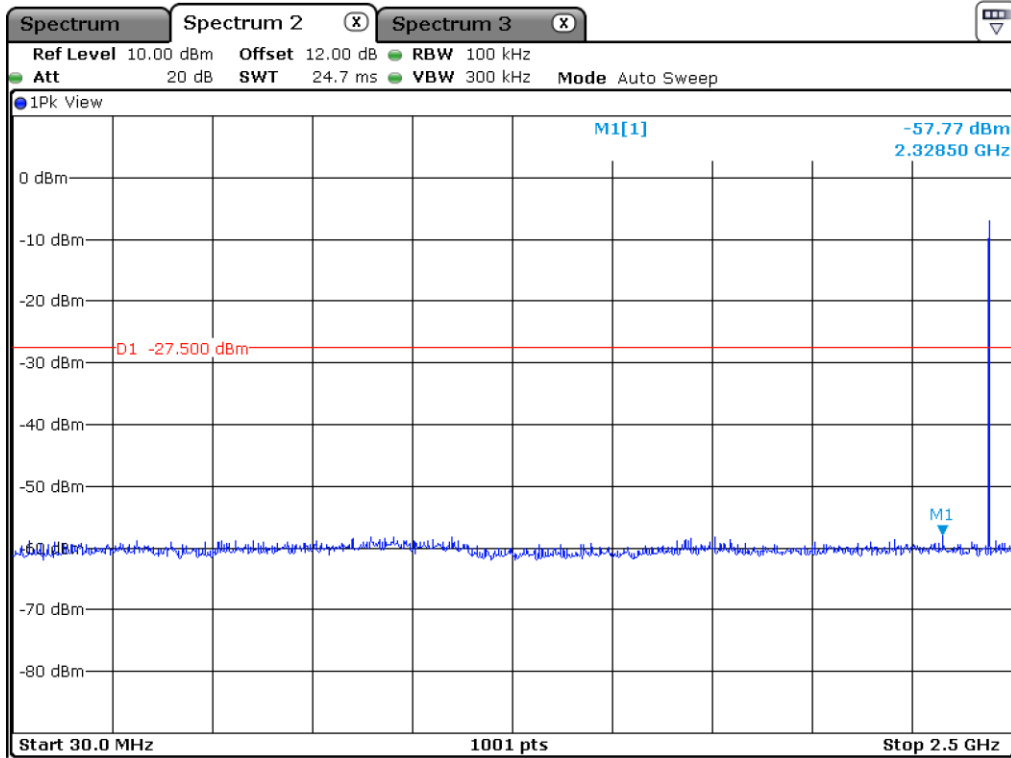


Middle Channel

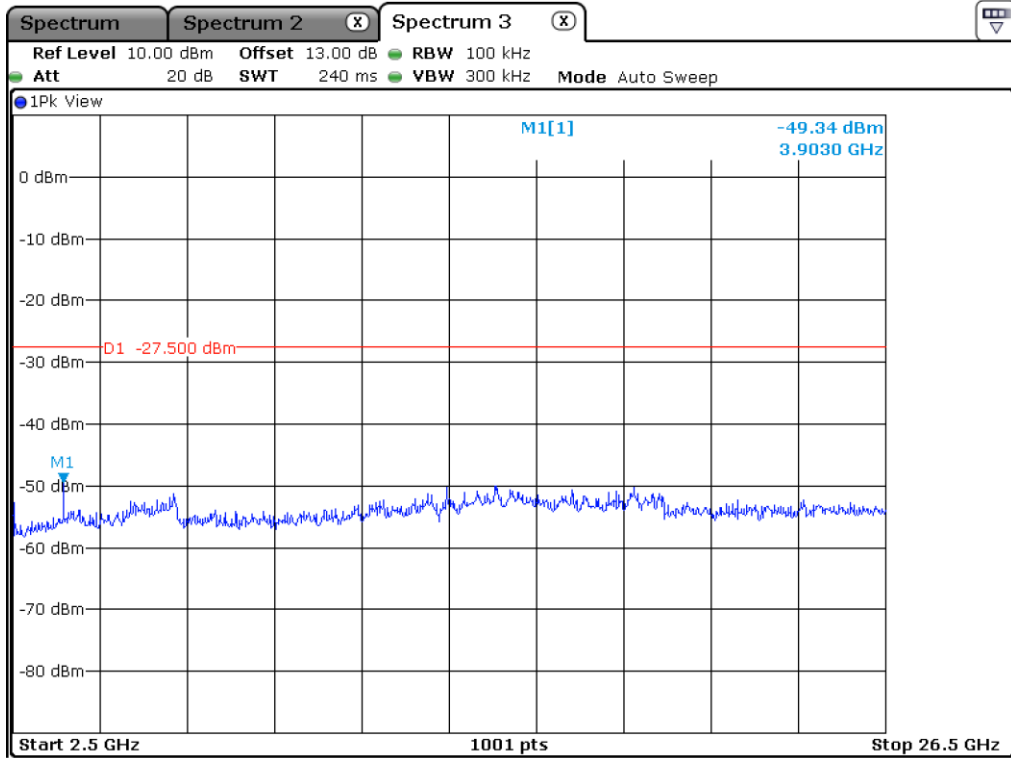


Middle Channel

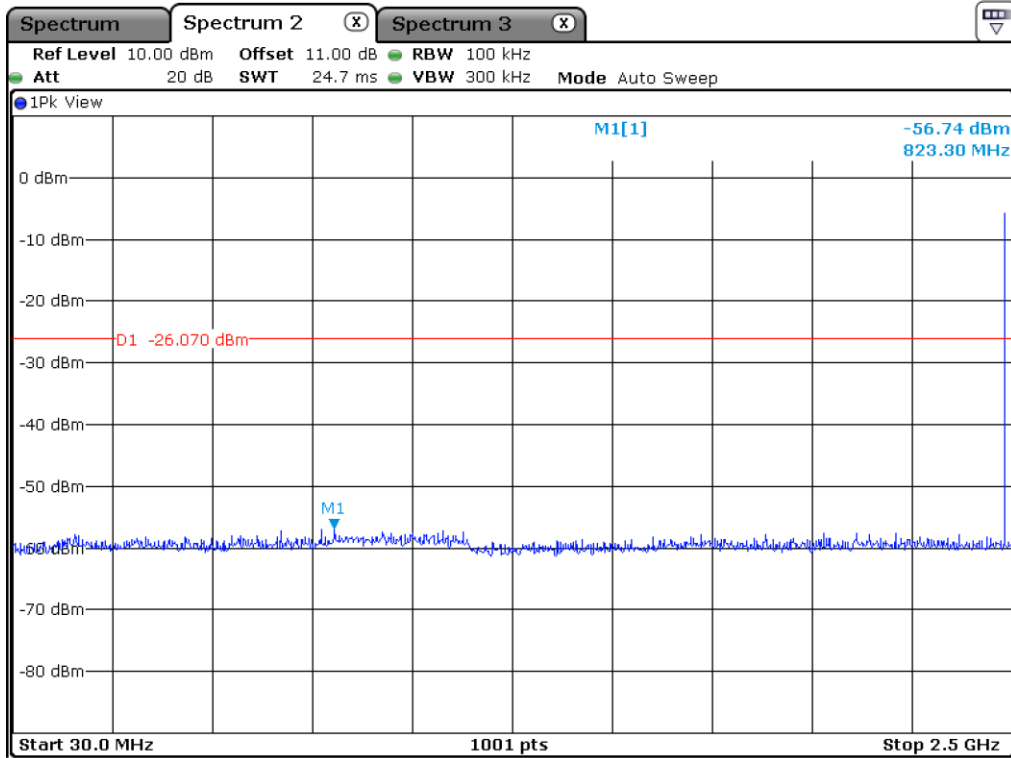


High Channel

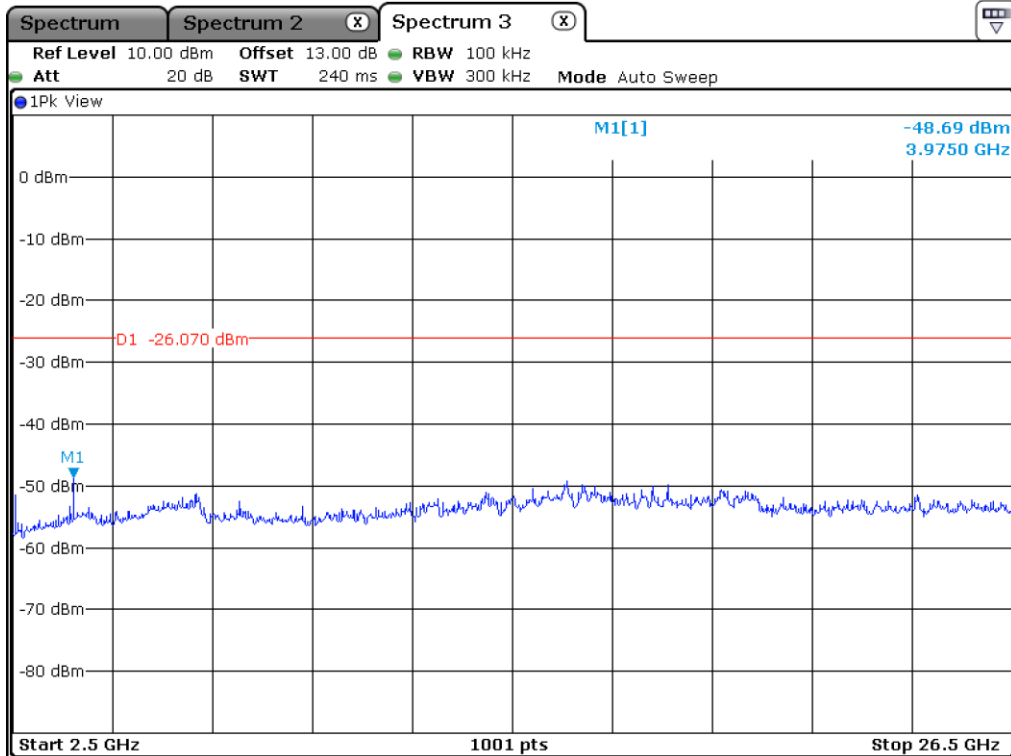

High Channel

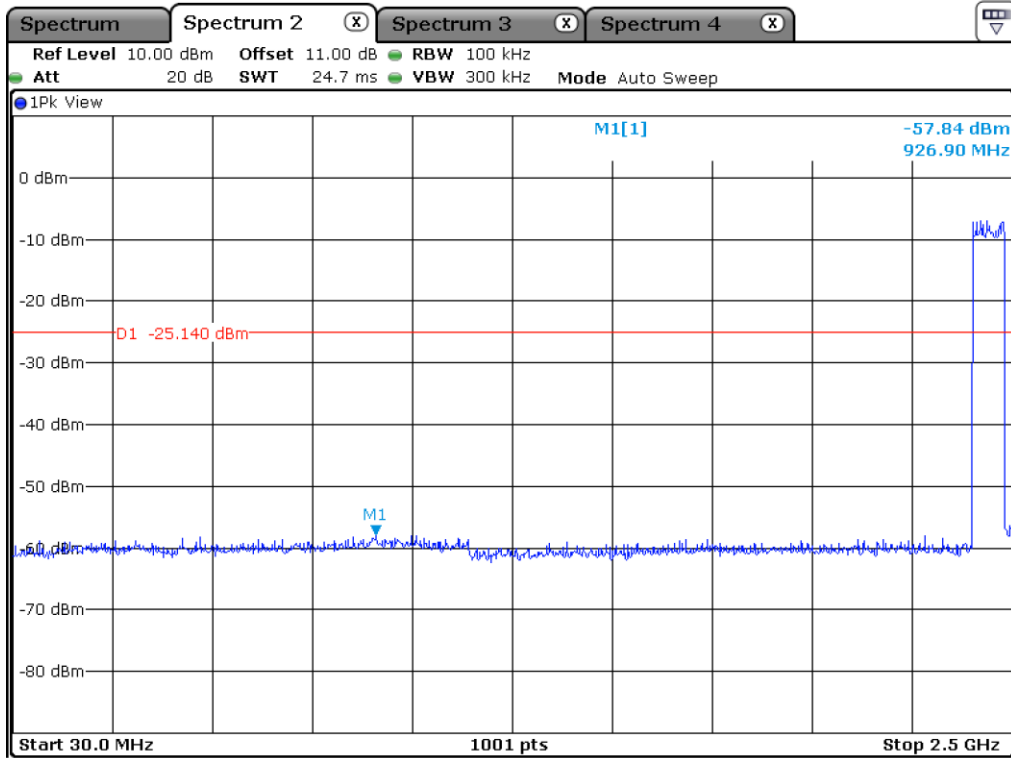


Hopping Mode

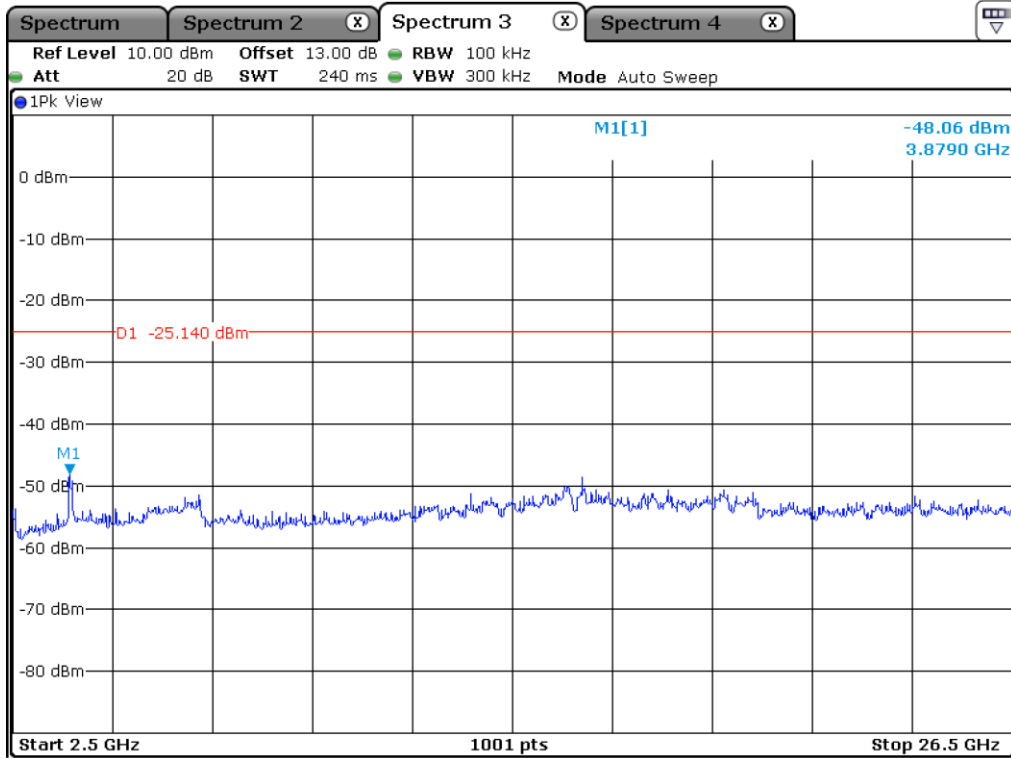


Hopping Mode


12.5.3 Test data for 3 Mbps

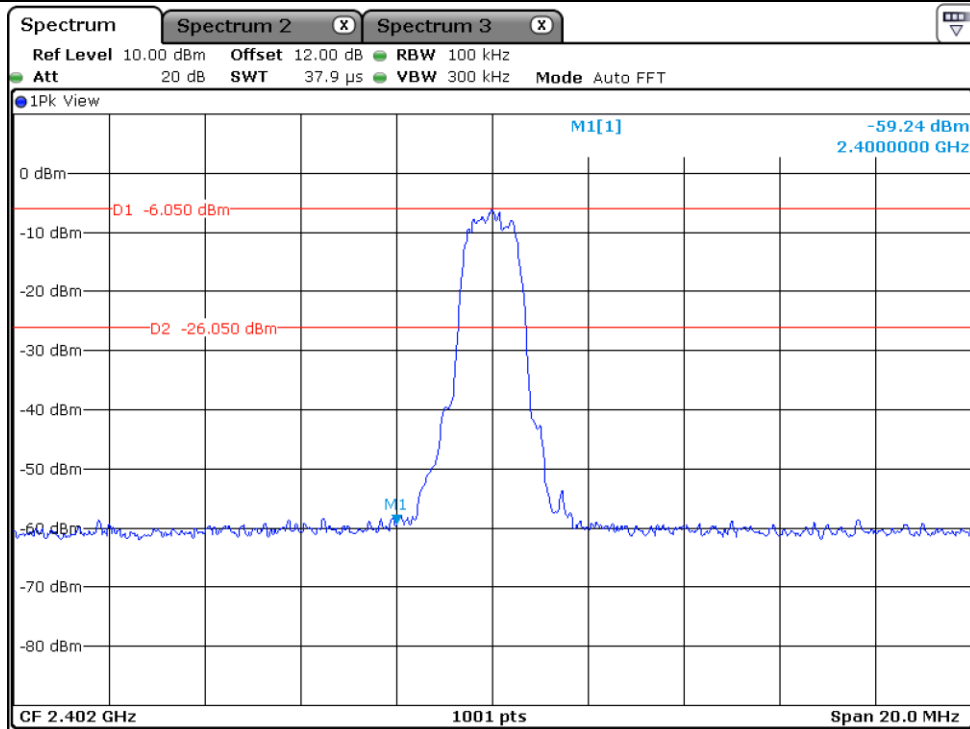


Low Channel

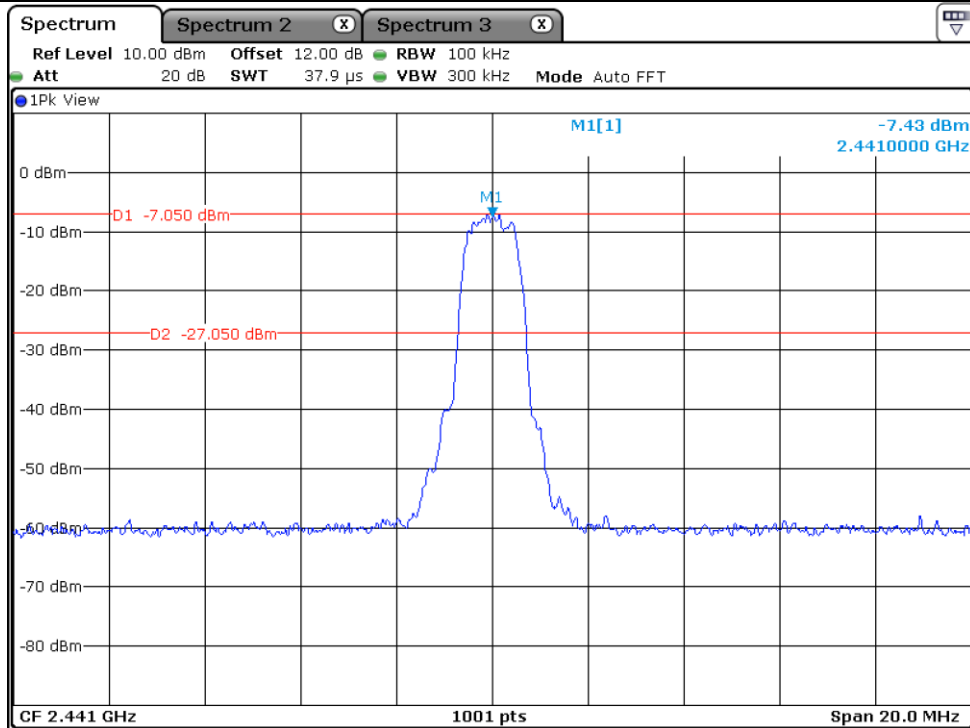


Middle Channel

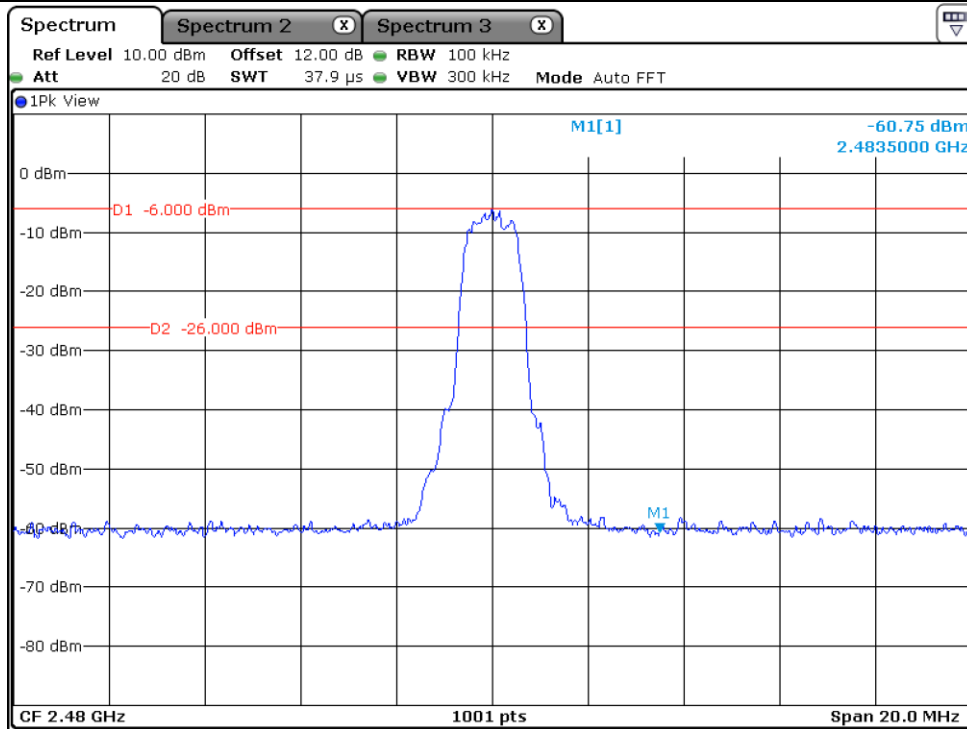


High Channel

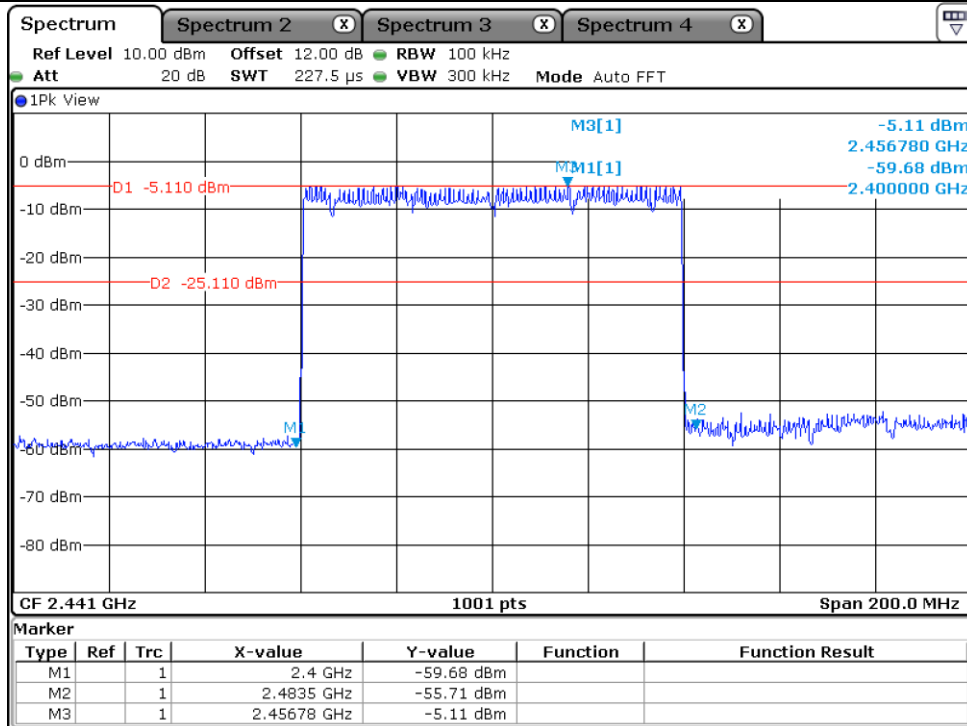


Hopping Mode

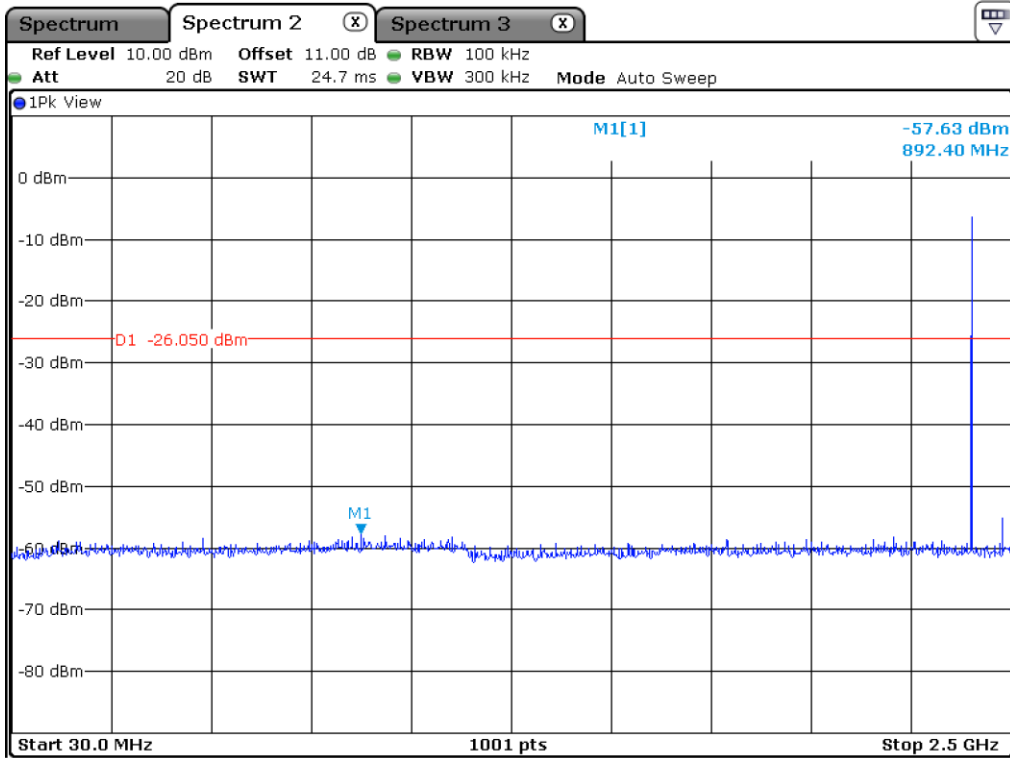


Low Channel

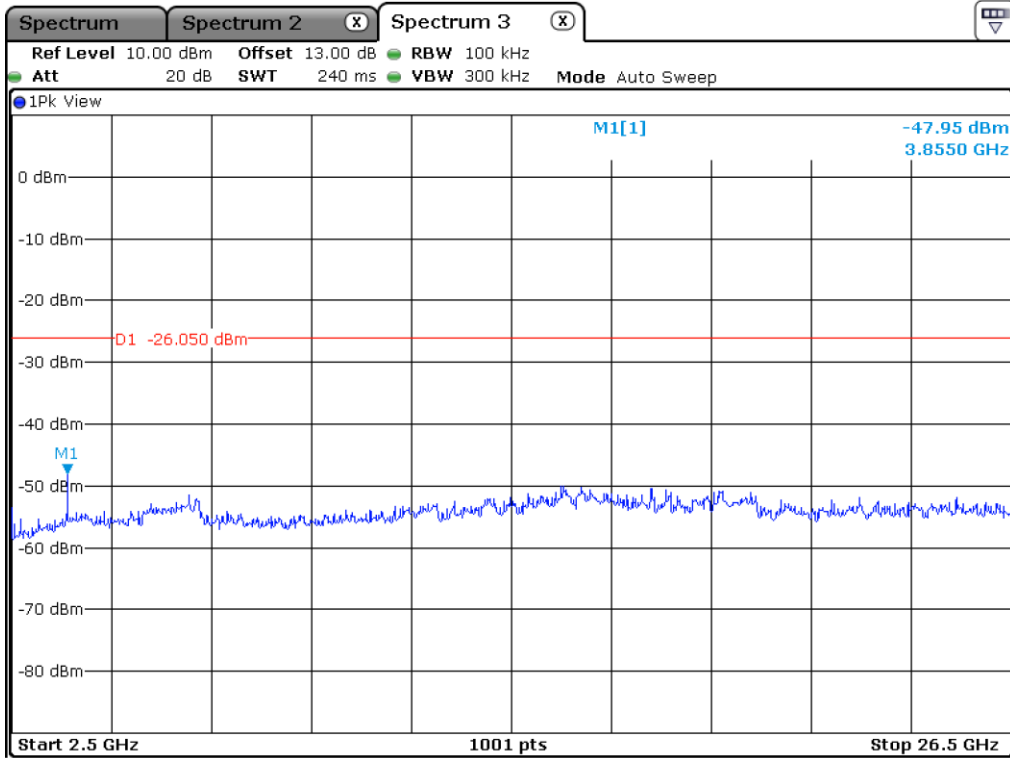


Low Channel

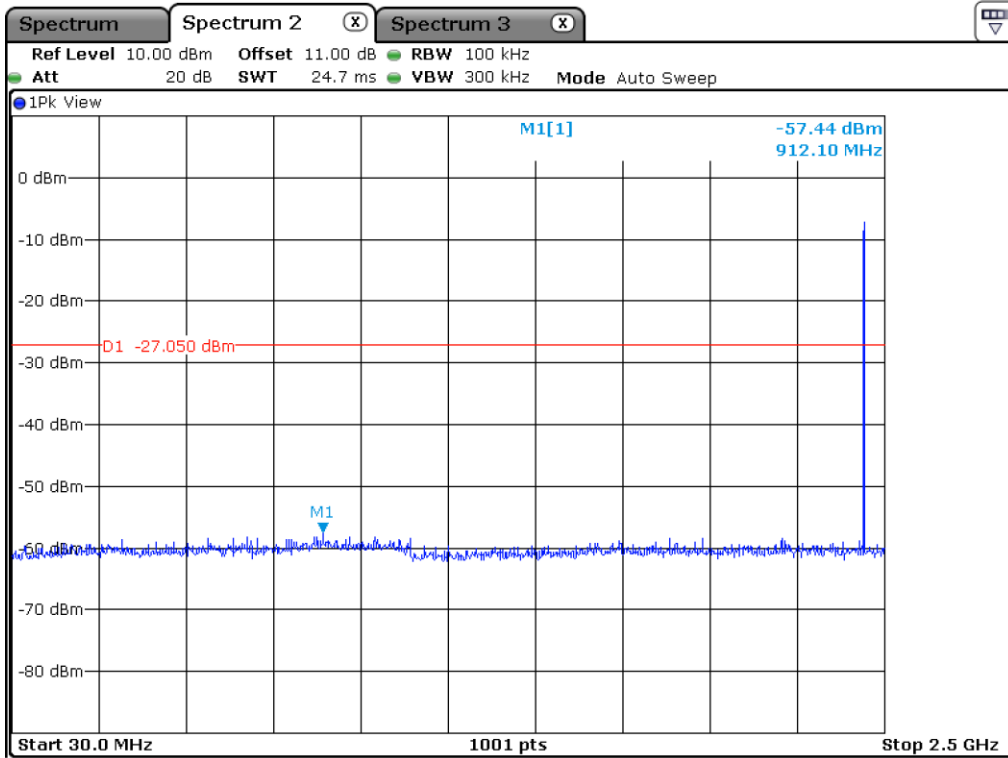


Middle Channel

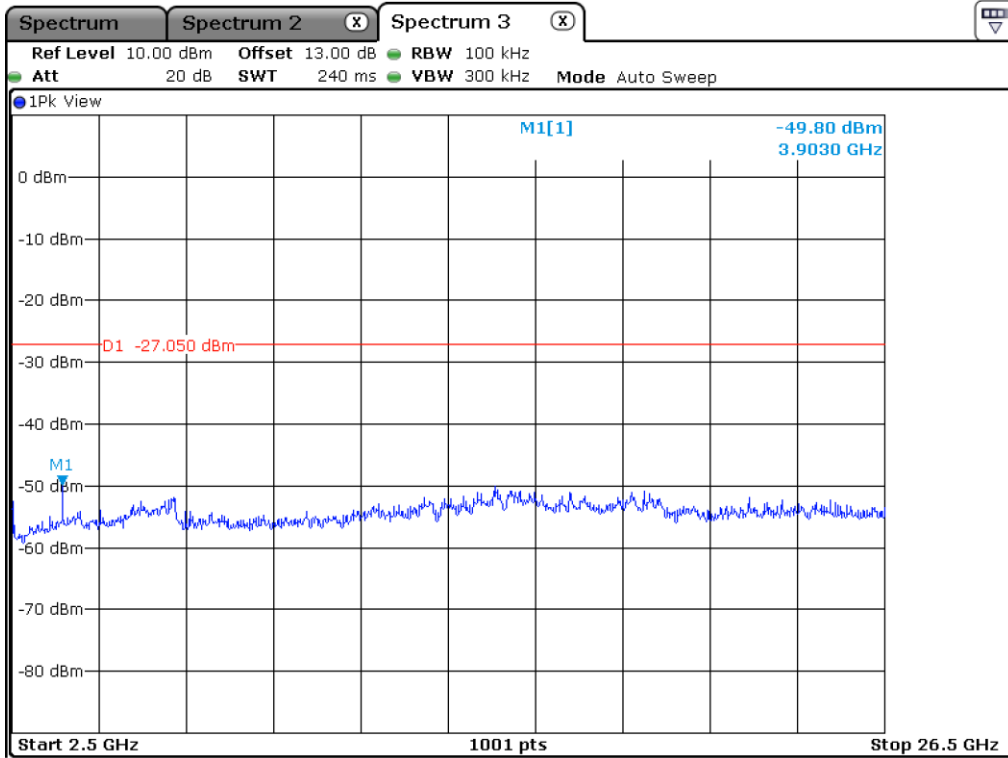


Middle Channel

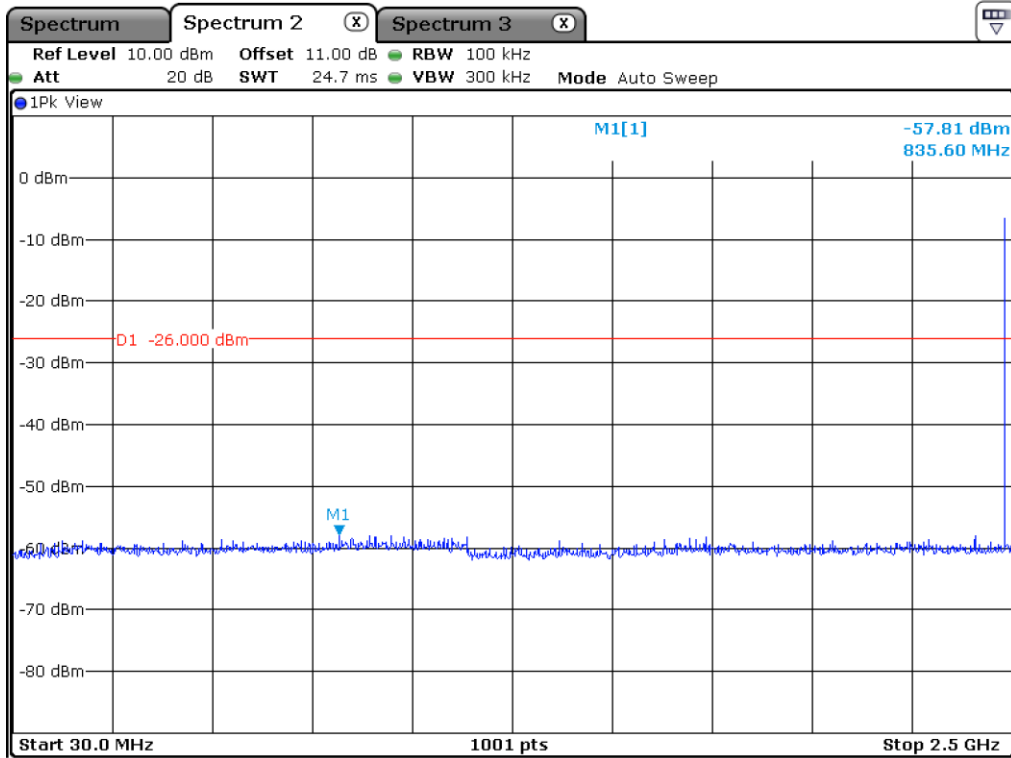


High Channel

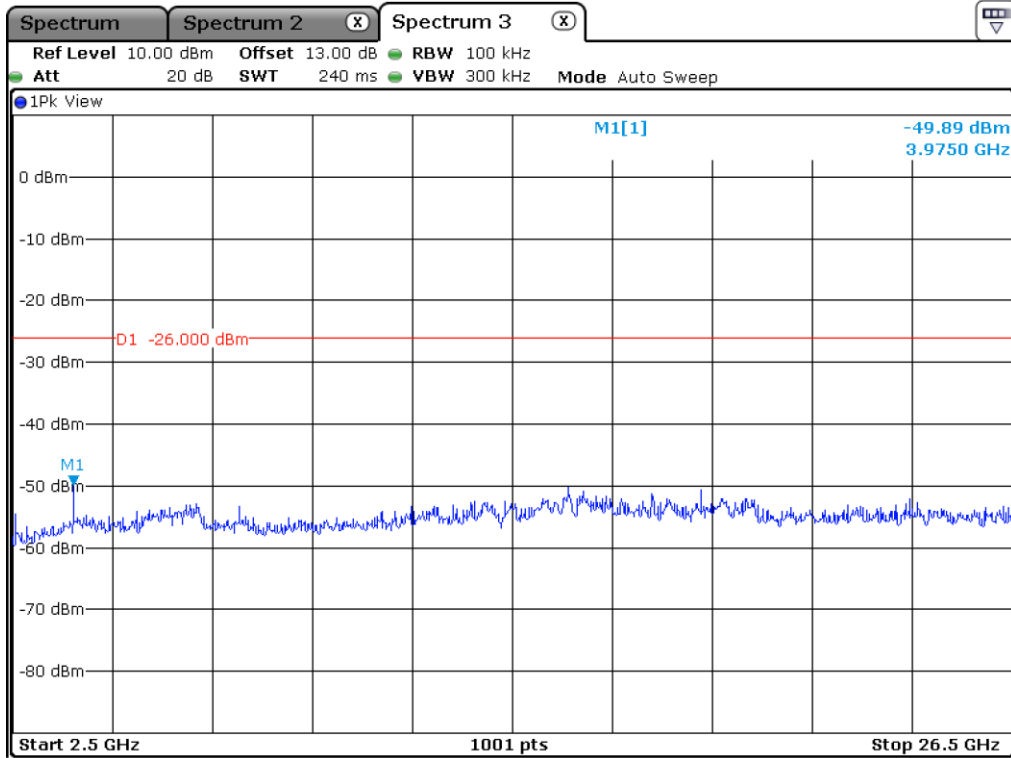

High Channel

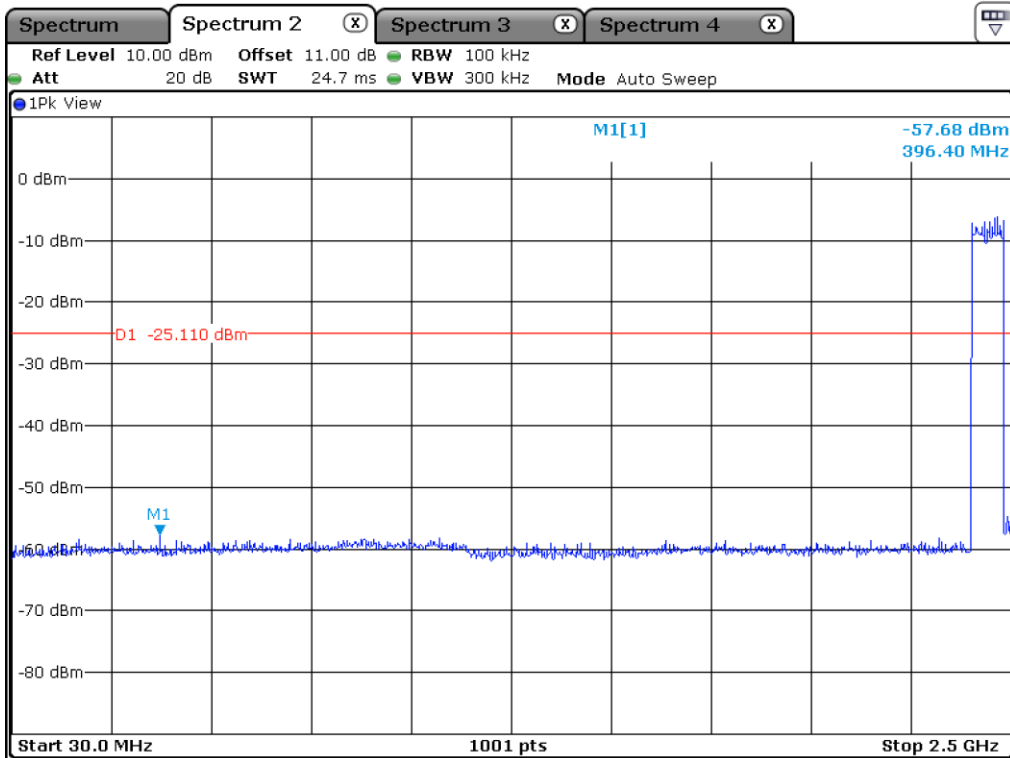

Hopping Mode

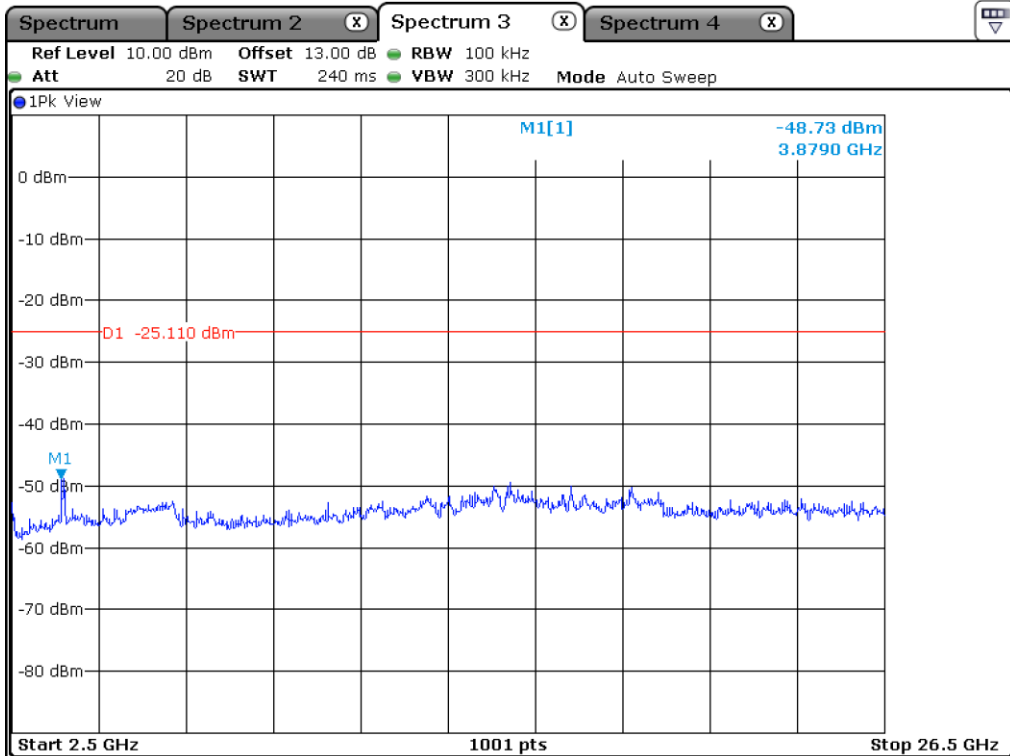

Hopping Mode

12.6 Test data for Transmitting mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band

12.6.1.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.01 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 327.463	52.61	Peak	H	28.30	8.21	45.31	-	43.81	74.00	30.19
2 327.143	45.27	Average	H	28.30	8.21	45.31	1.13	37.60	54.00	16.40
2 389.321	52.23	Peak	V	28.30	8.21	45.31	-	43.43	74.00	30.57
2 327.143	42.46	Average	V	28.30	8.21	45.31	1.13	34.79	54.00	19.21
Test Data for High Channel										
2 483.739	51.70	Peak	H	28.80	8.33	45.81	-	43.02	74.00	30.98
2 483.607	42.74	Average	H	28.80	8.33	45.81	1.13	35.19	54.00	18.81
2 484.365	51.33	Peak	V	28.80	8.33	45.81	-	42.65	74.00	31.35
2 494.816	42.18	Average	V	28.80	8.33	45.81	1.13	34.63	54.00	19.37

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Factor} + \text{Correction Factor}$$

12.6.1.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 76.60 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 364.625	51.29	Peak	H	28.30	8.21	45.31	-	42.49	74.00	31.51
2 327.463	41.53	Average	H	28.30	8.21	45.31	1.16	33.89	54.00	20.11
2 365.185	51.40	Peak	V	28.30	8.21	45.31	-	42.60	74.00	31.40
2 337.692	40.19	Average	V	28.30	8.21	45.31	1.16	32.55	54.00	21.45
Test Data for High Channel										
2 497.486	51.82	Peak	H	28.80	8.33	45.81	-	43.14	74.00	30.86
2 484.168	40.04	Average	H	28.80	8.33	45.81	1.16	32.52	54.00	21.48
2 487.909	52.20	Peak	V	28.80	8.33	45.81	-	43.52	74.00	30.48
2 497.173	40.04	Average	V	28.80	8.33	45.81	1.16	32.52	54.00	21.48

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Factor} + \text{Correction Factor}$$

12.6.1.3 Test data for 3 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.01 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 327.782	51.23	Peak	H	28.30	8.21	45.31	-	42.43	74.00	31.57
2 327.223	41.62	Average	H	28.30	8.21	45.31	1.13	33.95	54.00	20.05
2 332.498	51.24	Peak	V	28.30	8.21	45.31	-	42.44	74.00	31.56
2 326.983	40.05	Average	V	28.30	8.21	45.31	1.13	32.38	54.00	21.62
Test Data for High Channel										
2 484.036	51.14	Peak	H	28.80	8.33	45.81		42.46	74.00	31.54
2 483.607	40.21	Average	H	28.80	8.33	45.81	1.13	32.66	54.00	21.34
2 487.118	50.99	Peak	V	28.80	8.33	45.81		42.31	74.00	31.69
2 499.201	40.09	Average	V	28.80	8.33	45.81	1.13	32.54	54.00	21.46

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Factor} + \text{Correction Factor}$$

12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

12.6.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.01 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.000	50.25	Peak	H	33.40	11.18	46.33	-	48.50	74.00	25.50
4 804.000	37.02	Average	H	33.40	11.18	46.33	1.13	36.40	54.00	17.60
4 804.000	50.34	Peak	V	33.40	11.18	46.33	-	48.59	74.00	25.41
4 804.000	37.12	Average	V	33.40	11.18	46.33	1.13	36.50	54.00	17.50
Test Data for Middle Channel										
4 882.000	50.42	Peak	H	33.30	11.31	46.35	-	48.68	74.00	25.32
4 882.000	37.12	Average	H	33.30	11.31	46.35	1.13	36.51	54.00	17.49
4 882.000	50.22	Peak	V	33.30	11.31	46.35	-	48.48	74.00	25.52
4 882.000	37.03	Average	V	33.30	11.31	46.35	1.13	36.42	54.00	17.58
Test Data for High Channel										
4 960.000	50.41	Peak	H	33.30	11.41	46.35	-	48.77	74.00	25.23
4 960.000	36.79	Average	H	33.30	11.41	46.35	1.13	36.28	54.00	17.72
4 960.000	50.32	Peak	V	33.30	11.41	46.35	-	48.68	74.00	25.32
4 960.000	36.65	Average	V	33.30	11.41	46.35	1.13	36.14	54.00	17.86

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Factor} + \text{Correction Factor}$$

12.6.2.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 76.60 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.000	50.20	Peak	H	33.40	11.18	46.33	-	48.45	74.00	25.55
4 804.000	37.13	Average	H	33.40	11.18	46.33	1.16	36.54	54.00	17.46
4 804.000	49.95	Peak	V	33.40	11.18	46.33	-	48.20	74.00	25.80
4 804.000	36.63	Average	V	33.40	11.18	46.33	1.16	36.04	54.00	17.96
Test Data for Middle Channel										
4 882.000	50.15	Peak	H	33.30	11.31	46.35	-	48.41	74.00	25.59
4 882.000	36.84	Average	H	33.30	11.31	46.35	1.16	36.26	54.00	17.74
4 882.000	50.08	Peak	V	33.30	11.31	46.35	-	48.34	74.00	25.66
4 882.000	36.52	Average	V	33.30	11.31	46.35	1.16	35.94	54.00	18.06
Test Data for High Channel										
4 960.000	50.31	Peak	H	33.30	11.41	46.35	-	48.67	74.00	25.33
4 960.000	37.25	Average	H	33.30	11.41	46.35	1.16	36.77	54.00	17.23
4 960.000	50.34	Peak	V	33.30	11.41	46.35	-	48.70	74.00	25.30
4 960.000	37.16	Average	V	33.30	11.41	46.35	1.16	36.68	54.00	17.32

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Factor} + \text{Correction Factor}$$

12.6.2.3 Test data for 3 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.01 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.000	50.11	Peak	H	33.40	11.18	46.33	-	48.36	74.00	25.64
4 804.000	36.84	Average	H	33.40	11.18	46.33	1.13	36.22	54.00	17.78
4 804.000	49.98	Peak	V	33.40	11.18	46.33	-	48.23	74.00	25.77
4 804.000	36.71	Average	V	33.40	11.18	46.33	1.13	36.09	54.00	17.91
Test Data for Middle Channel										
4 882.000	50.21	Peak	H	33.30	11.31	46.35	-	48.47	74.00	25.53
4 882.000	36.83	Average	H	33.30	11.31	46.35	1.13	36.22	54.00	17.78
4 882.000	50.38	Peak	V	33.30	11.31	46.35	-	48.64	74.00	25.36
4 882.000	36.66	Average	V	33.30	11.31	46.35	1.13	36.05	54.00	17.95
Test Data for High Channel										
4 960.000	50.16	Peak	H	33.30	11.41	46.35	-	48.52	74.00	25.48
4 960.000	36.72	Average	H	33.30	11.41	46.35	1.13	36.21	54.00	17.79
4 960.000	50.38	Peak	V	33.30	11.41	46.35	-	48.74	74.00	25.26
4 960.000	36.96	Average	V	33.30	11.41	46.35	1.13	36.45	54.00	17.55

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Factor} + \text{Correction Factor}$$

13. RADIATED EMISSION TEST

13.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

13.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.


13.3 Test Date

January 07, 2021 ~ January 28, 2021

13.4 Test data for 30 MHz ~ 1 000 MHz

13.4.1 Test data for Bluetooth Mode

- . Resolution bandwidth : 120 kHz
- . Frequency range : 30 MHz ~ 1 000 MHz
- . Measurement distance : 3 m

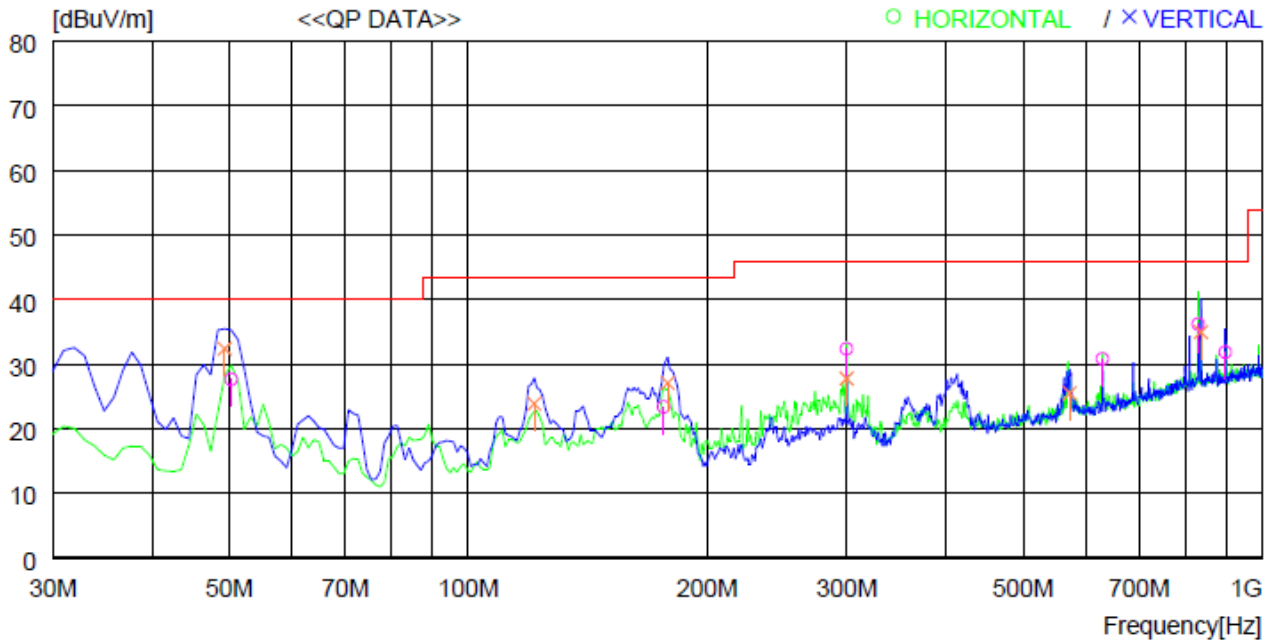

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	50.370	45.8	13.1	0.9	32.1	27.7	40.0	12.3	400	187
2	176.470	36.9	16.8	1.7	32.0	23.4	43.5	20.1	200	53
3	299.660	43.1	19.2	2.1	32.0	32.4	46.0	13.6	100	0
4	629.457	35.5	24.6	3.1	32.4	30.8	46.0	15.2	200	359
5	831.211	36.8	27.2	4.1	31.9	36.2	46.0	9.8	100	299
6	899.109	31.5	27.5	4.6	31.7	31.9	46.0	14.1	100	0
----- Vertical -----										
7	49.400	50.2	13.4	0.9	32.1	32.4	40.0	7.6	100	180
8	121.180	35.8	18.7	1.4	32.0	23.9	43.5	19.6	100	359
9	178.410	40.7	16.7	1.7	32.0	27.1	43.5	16.4	100	359
10	299.660	38.5	19.2	2.1	32.0	27.8	46.0	18.2	100	359
11	572.229	31.1	23.9	2.9	32.4	25.5	46.0	20.5	100	359
12	837.031	35.5	27.2	4.2	31.9	35.0	46.0	11.0	200	0

13.4.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz)


Humidity Level : 45 % R.H. Temperature: 23 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : CAR NAVIGATION SYSTEM

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

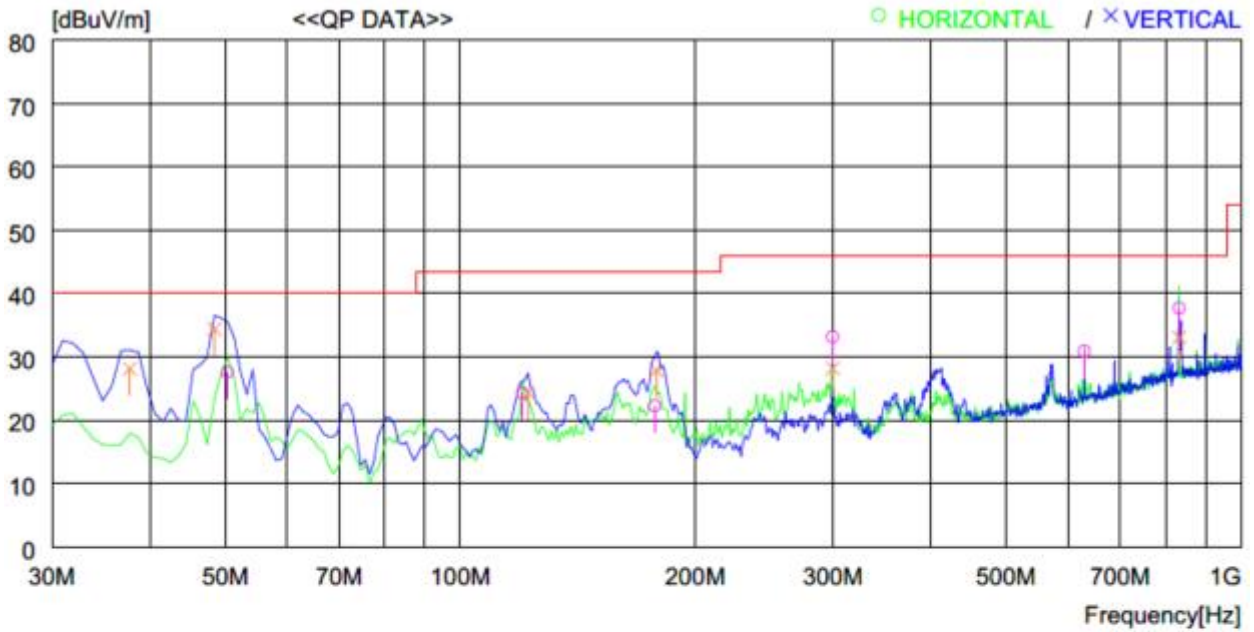

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	50.370	45.7	13.1	0.9	32.1	27.6	40.0	12.4	400	359
2	120.210	36.3	18.6	1.4	32.0	24.3	43.5	19.2	300	0
3	177.440	35.8	16.8	1.7	32.0	22.3	43.5	21.2	300	0
4	299.660	43.9	19.2	2.1	32.0	33.2	46.0	12.8	100	10
5	629.457	35.6	24.6	3.1	32.4	30.9	46.0	15.1	200	137
6	832.181	38.3	27.2	4.1	31.9	37.7	46.0	8.3	100	156
----- Vertical -----										
7	37.760	41.1	18.1	0.9	32.0	28.1	40.0	11.9	100	359
8	48.430	51.8	13.8	0.9	32.1	34.4	40.0	5.6	100	359
9	122.150	36.3	18.7	1.4	32.0	24.4	43.5	19.1	100	99
10	178.410	41.5	16.7	1.7	32.0	27.9	43.5	15.6	100	359
11	299.660	38.9	19.2	2.1	32.0	28.2	46.0	17.8	100	359
12	832.181	33.7	27.2	4.1	31.9	33.1	46.0	12.9	300	359

13.4.3 Test data for Intermodulation Mode(Bluetooth + WLAN 5 GHz)


Humidity Level : 45 % R.H. Temperature: 23 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : CAR NAVIGATION SYSTEM

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

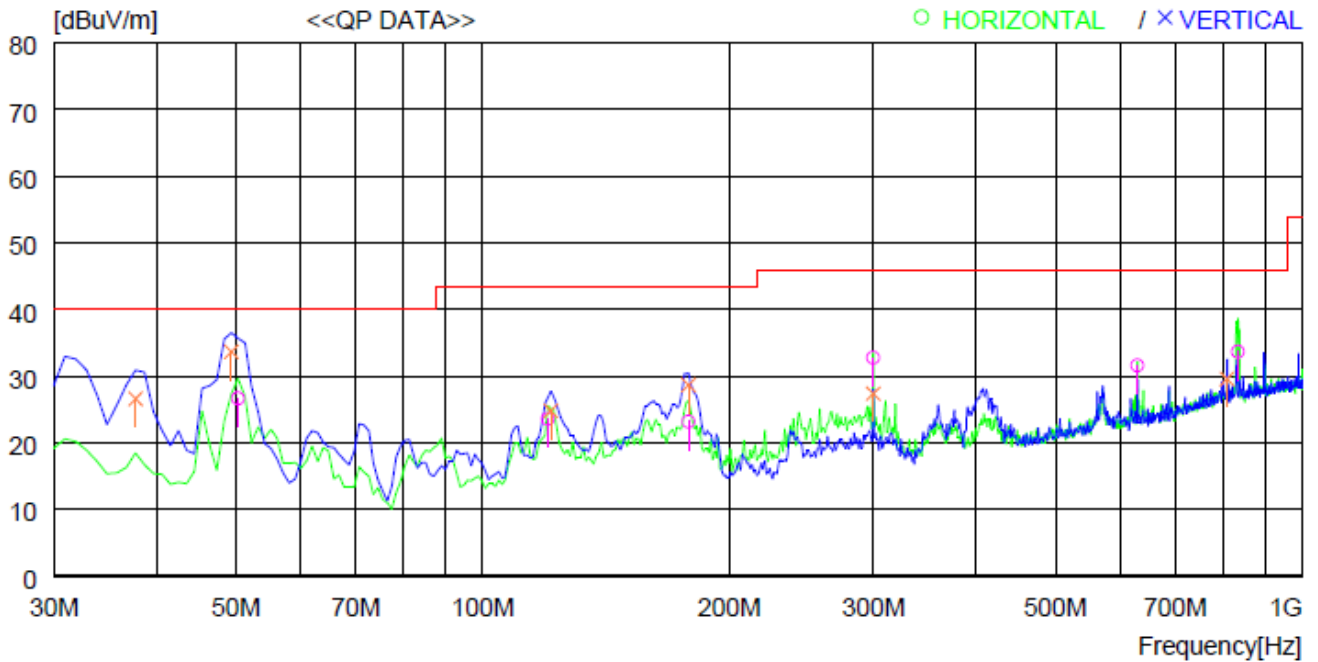

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	50.370	44.8	13.1	0.9	32.1	26.7	40.0	13.3	400	359
2	120.210	35.6	18.6	1.4	32.0	23.6	43.5	19.9	300	0
3	178.410	36.8	16.7	1.7	32.0	23.2	43.5	20.3	300	58
4	299.660	43.5	19.2	2.1	32.0	32.8	46.0	13.2	100	0
5	629.457	36.3	24.6	3.1	32.4	31.6	46.0	14.4	200	359
6	835.091	34.2	27.2	4.2	31.9	33.7	46.0	12.3	300	0
----- Vertical -----										
7	37.760	39.6	18.1	0.9	32.0	26.6	40.0	13.4	100	263
8	49.400	51.5	13.4	0.9	32.1	33.7	40.0	6.3	100	196
9	121.180	36.7	18.7	1.4	32.0	24.8	43.5	18.7	100	91
10	178.410	42.3	16.7	1.7	32.0	28.7	43.5	14.8	100	128
11	299.660	38.1	19.2	2.1	32.0	27.4	46.0	18.6	100	359
12	809.872	30.5	27.1	4.0	32.0	29.6	46.0	16.4	100	359

13.5 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

13.6 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

14. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	102177	Apr. 20, 2020 (1Y)
FSW43	Rohde & Schwarz	Signal Analyzer	104544	Jul. 15, 2020 (1Y)
ESW	Rohde & Schwarz	EMI Test Receiver	101851	Mar. 27, 2020 (1Y)
CMW500	Rohde & Schwarz	WIDEBAND RADIO COMMUNICATION TESTER	145762	Feb. 09, 2021 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 16, 2020 (1Y)
PAM-118A	Com-Power	Pre-Amplifier	18040081	Oct. 12, 2020 (1Y)
PAM-840A	Com-Power	Pre-Amplifier	461339	Oct. 16, 2020 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020 (2Y)
HLP-2008	TDK	Hybrid Antenna	131316	Feb. 27, 2020 (2Y)
AH-118	Com-Power	Horn Antenna	10050061	Oct. 15, 2020 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2021(1Y)