

FCC EVALUATION REPORT FOR CERTIFICATION

FCC Class B (Class II Permissive Change)

Applicant: LG Electronics Inc.

19-1, Cheongho-ri, Jinwi-myeon,

Pyeongteak-si, Gyeonggi-do, Korea.

Attn: Mr. Do-Hyung Kim, Chief research engineer

Date of Issue: April 18, 2012

Order Number: GETEC-C1-12-107

Test Report Number: GETEC-E3-12-045

Test Site: GUMI COLLEGE EMC CENTER

FCC Registration Number: (100749, 443957)

FCC ID. : BEJDM2752D

Applicant : LG Electronics Inc.

Rule Part(s)	: FCC Part 15 Subpart B
Equipment Class	: Class B computing device peripheral (JBP)
EUT Type	: LED LCD TV/Monitor
Type of Authority	: Certification
Model Name	: M2752D
Trade Name	: LG
Class II Change(s)	: With alternate panel

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2009 / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,



Hyun Kim, Engineer
GUMI COLLEGE EMC CENTER



Jae-Hoon Jeong, Senior Engineer
GUMI COLLEGE EMC CENTER



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S)	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
4.2 CONDUCTED EMISSION	9
4.3 RADIATED EMISSION.....	10
5. CONDUCTED EMISSION.....	11
5.1 OPERATING ENVIRONMENT	11
5.2 TEST SET-UP	11
5.3 MEASUREMENT UNCERTAINTY.....	11
5.4 LIMIT	12
5.5 TEST EQUIPMENT USED.....	12
5.6 TEST DATA FOR CONDUCTED EMISSION	12
6. RADIATED EMISSION	21
6.1 OPERATING ENVIRONMENT	21
6.2 TEST SET-UP	21
6.3 MEASUREMENT UNCERTAINTY.....	21
6.4 LIMIT	22
6.5 TEST EQUIPMENT USED.....	22
6.6 TEST DATA FOR RADIATED EMISSION	22
7. SAMPLE CALCULATIONS.....	31
7.1 EXAMPLE 1 :	31
7.2 EXAMPLE 2 :	31
8. RECOMMENDATION & CONCLUSION.....	32

APPENDIX A – INFORMATION

APPENDIX B – TEST SET-UP PHOTOGRAPHS



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics Inc.

Applicant Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Manufacturer: LG Electronics Inc.

Manufacturer Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Contact Person: Mr. Do-Hyung Kim, Chief research engineer

Tel Number: +82-31-610-9623

- **FCC ID.** BEJDM2752D
- **EUT Type** LED LCD TV/Monitor
- **Model Name** M2752D
- **Trade Name** LG
- **Serial Number** Prototype
- **Rule Part(s)** FCC Part 15 Subpart B
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2009) / Canadian standard ICES-003
- **Dates of Test** April 12 ~ 13, 2012
- **Place of Test** GUMI COLLEGE EMC CENTER (FCC Registration Number: 100749, 443957)
407, Bugok-Dong, Gumi-City, Gyungbok, 730-711, Republic of Korea
- **Test Report Number** GETEC-E3-12-045
- **Dates of Issue** April 17, 2012
- **Class II Change(s)** With alternate panel



2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc.**

LED LCD TV/Monitor (Model Name: M2752D)

These measurement tests were conducted at **GUMI COLLEGE EMC CENTER**.

The site address is 407, Bugok-Dong, Gumi-City, Gyungbok, 730-711, Republic of Korea.

This test site is one of the highest point of Gumi 1 college at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2009)



GUMI COLLEGE EMC CENTER
407, Bugok-Dong, Gumi-City,
Gyungbok, 730-711, Republic of Korea
Tel.: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics Inc.**

LED LCD TV/Monitor (Model Name: M2752D) FCC ID.: BEJDM2752D

Panel	Screen Type	685.65 mm Wide (27 inch) Visible diagonal size : 685.65 mm
	Pixel Pitch	0.31 mm (H) x 0.31 mm (V)
Video Signal	Max. Resolution	1920 × 1080 @ 60 Hz
	Recommended Resolution	1920 × 1080 @ 60 Hz
	Horizontal Frequency	30 kHz to 83 kHz
	Vertical Frequency	56 Hz to 75 Hz
	Synchronization Type	Separate Sync, Digital
Input Connector		TV, D-Sub Analog, SCART, PC Audio In, Component, CVBS, HDMI*2
Power	Rated Voltage	19 V $\overline{=}$
	Power Consumption	On Mode : 31 W (typ.) Off Mode $\leq$ 0.4 W
AC/DC Adapter		Manufacturer: LITE-ON, Model PA-1650-64 Manufacturer: LG Innotek, Model PSAB-L101A
Tilt	Tilt Range	-5 to 20°
Dimensions (Width x Depth x Height) Weight	With Stand	
	641.3 mm x 199.4 mm x 458.3 mm 4.65 kg	
	Without Stand	
	641.3 mm x 53.0 mm x 391.2 mm 3.7 kg	
Environmental conditions	Operating Temperature	10 °C to 35 °C
	Operating Humidity	20 % to 80 %
	Storage Temperature	-10 °C to 60 °C
	Storage Humidity	5 % to 90 %

-. Maximum Frequency Range : 667 MHz



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
PC	ASUSTEK COMPUTER INC.	P8H61	S/N: 0BG084-02014-MIBFE0-A05 FCC ID.: DoC
Video card	Digital Greentech Co., Ltd.	VX4850	S/N: LG1112056668 FCC ID.: DoC
PS2 keyboard	COMPAQ	166516-AD6	S/N: B13BBOR391006D FCC ID.: AQ6-23K15
USB mouse	Microsoft Corporation	1484	S/N: 0352700289761 FCC ID: DoC
DVD player	ILIKE ELECTRONICS CO., LTD.	CVX-3800 Full-HD	S/N: CVX380020110110493 FCC ID.: Verification
USB memory stick	SAMSUNG	SUM-PSB4	S/N: TBBB202478F FCC ID.: DoC
Digital TV pattern generator	Teleview	TPG430B	S/N: 93.01.20.05.09.00.00.02 FCC ID.: Verification
8-VSB modulator	Ktech	VSB-ENC-150E	S/N: 2005-726 FCC ID.: Verification

See “Appendix B – Test Setup Photographs” for actual system test set-up

3.2.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
IR remote controller	LG Electronics Inc.	AKB73655823	S/N: None. FCC ID.: N/A
Adapter #1 ¹⁾	LITE-ON TECHNOLOGY CORPORATION	PA-1650-64	S/N: OC2KN612314050044 FCC ID.: None.
Adapter #2 ¹⁾	LG Innotek Co., Ltd.	PSAB-L101A	S/N: LC2E1627104010036 FCC ID.: None.

1) Input ratings: AC (100 – 240) V~, (50 – 60) Hz, 1.4 A / Output ratings: DC 19 V, 2.53 A



3.2.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the adapter	1.80 m unshielded
Adapter cable	Connected to the EUT	1.50 m shielded with a ferrite core
RGB(Analog) in cable	Connected to the EUT and PC	1.50 m shielded
HDMI/DVI (Digital) in cable	Connected to the EUT and PC	2.00 m shielded
Audio(RGB/DVI) in cable	Connected to the EUT and PC	1.50 m shielded with a ferrite core
Component in cable	Connected to the EUT and DVD player	3.00 m shielded
Headset cable	Connected to the EUT and headset	1.20 m shielded
Antenna cable	Connected to the EUT and digital TV pattern generator	10.00 m shielded with two ferrite cores

3.3 Modification Item(s)

- None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used.

The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency : AC 120 V / 60 Hz

- Test Mode(s)

- . Monitor mode with adapter #1 (model name: PA-1650-64) or adapter #2 (model name: PSAB-L101A)

Radiated emission: 1 920 × 1 080 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

Conducted emission: 1 920 × 1 080 / 60 Hz (RGB: Analog, HDMI/DVI: Digital),

1 024 × 768 / 60 Hz (RGB: Analog), 640 × 480 / 60 Hz (RGB: Analog)

◆ Operating test pattern

- . “H” character scrolling mode (Font size: 10)
- . Black background white character
- . Brightness and contrast was adjusted as maximum level
- . Continuous playback of 1 kHz audio file with winamp player
- . USB memory stick was connected to the USB port

“The verification report for TV/AV mode would be issued by LG Electronics Inc.”



4.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Registration No.: 100749)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30 MHz with 20 ms sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

Each EME reported was calibrated using the R/S signal generator

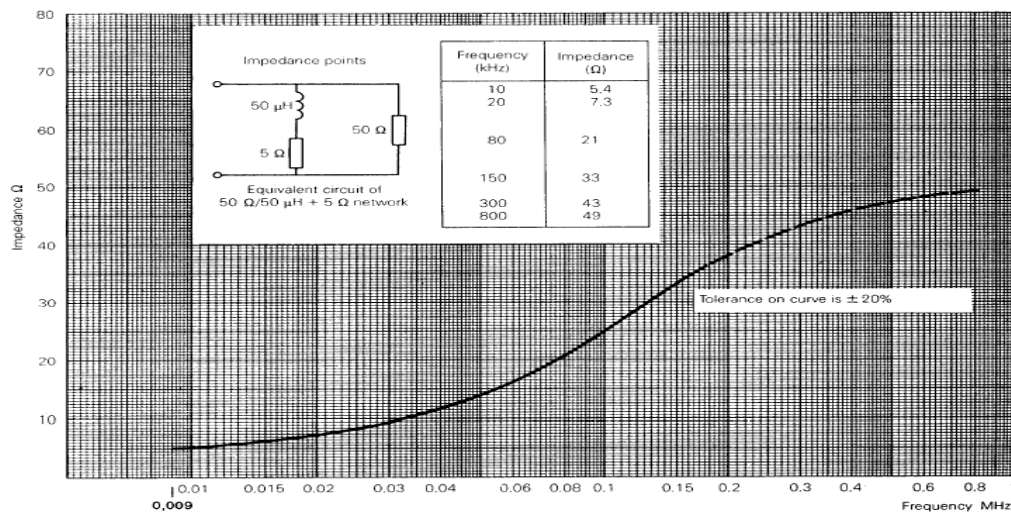


Fig 2. Impedance of LISN



4.3 Radiated Emission

Measurements (below 1 GHz) were made at Open area test site that complies to CISPR 16/ANSI C63.4. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 10 m. The EUT was rotated 360° about its azimuth with the receive antenna located at 1, 2, 3 and 4 meter heights in both horizontal and vertical polarities. Final measurements (quasi-peak or average as noted) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.

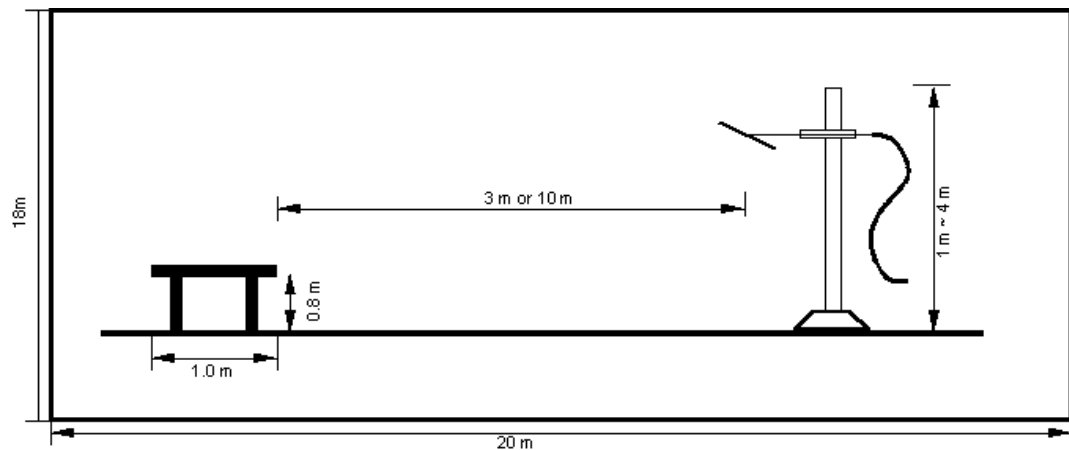


Fig 3. Dimensions of test site

The measurements (above 1 GHz) were made 3 m distance test site that complies to CISPR 16-1-4 (2007). In order to meet SVSWR Limit (Within 6 dB), the bottom side of test site was installed with absorbers. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna. The measurements were conducted with Average and Peak value.

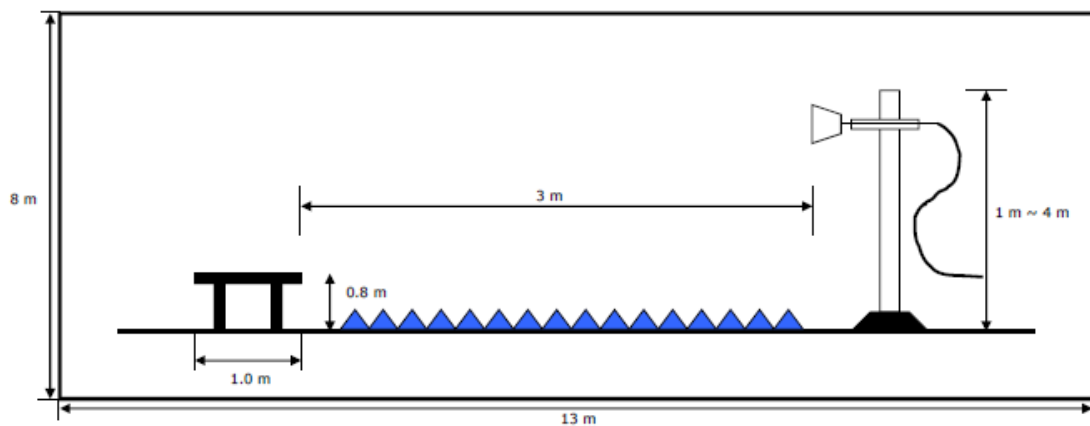


Fig 4. Dimensions of test site



5. Conducted Emission

5.1 Operating Environment

Temperature : 23.0 °C
Relative Humidity : 40.0 % R.H.

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	± 2.74 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	± 4.25 dB	Confidence level of approximately 95 % ($k = 2$)



5.4 Limit

RFI Conducted	FCC Limit(dB μ V/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI Test Receiver	839809/003	12. 05. 2012
■ - ESH3-Z5	Rohde & Schwarz	LISN	838979/020	12. 07. 2012
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	12. 07. 2012
□ - ENY81-CA6	Rohde & Schwarz	Impedance Network	101573	10. 19. 2012

5.6 Test data for Conducted Emission

- . Test Date : April 12, 2012
- . Resolution Bandwidth : 9 kHz
- . Frequency Range : 0.15 MHz ~ 30 MHz
- . Line : L1: Live line, N: Neutral line



◆ Operating condition: Monitor with adapter #1, 1 920 × 1 080 / 60 Hz (RGB: Analog)

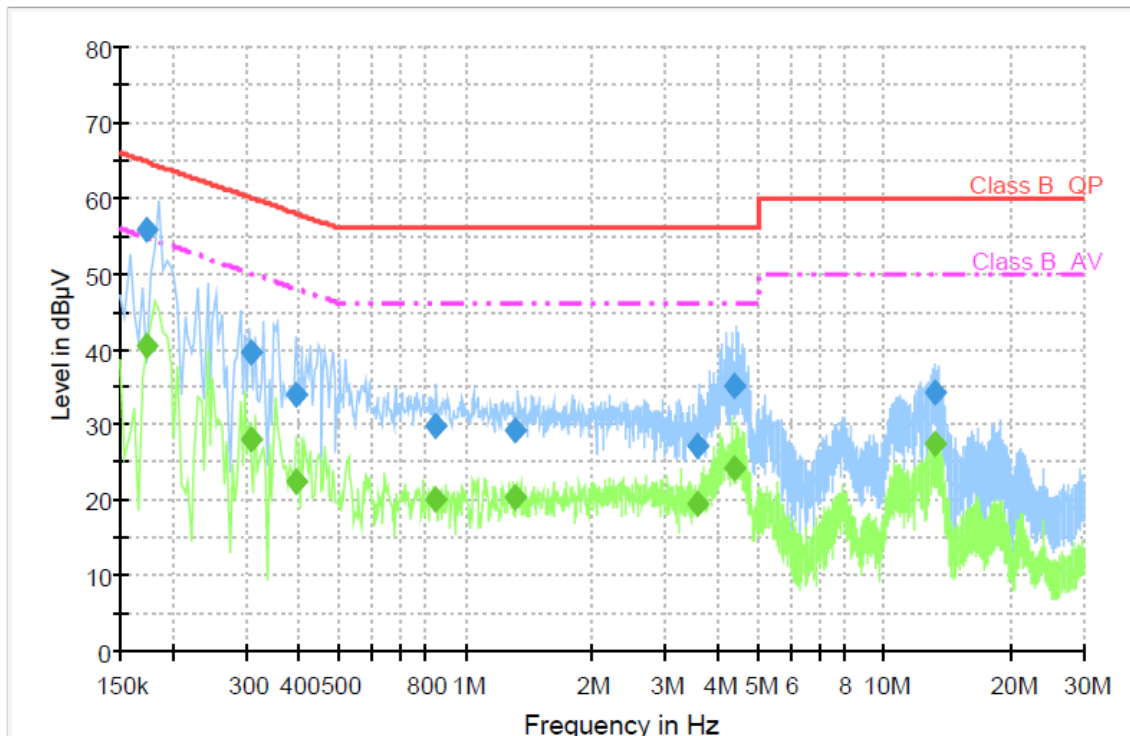

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	55.8	1000.0	9.000	GND	L1	10.1	9.0	64.8	
0.308000	39.6	1000.0	9.000	GND	L1	10.1	20.4	60.0	
0.396000	34.0	1000.0	9.000	GND	N	10.1	24.0	57.9	
0.848000	29.9	1000.0	9.000	GND	N	10.1	26.1	56.0	
1.308000	29.3	1000.0	9.000	GND	N	10.2	26.7	56.0	
3.596000	27.1	1000.0	9.000	GND	L1	10.2	28.9	56.0	
4.384000	35.2	1000.0	9.000	GND	L1	10.3	20.8	56.0	
13.148000	34.3	1000.0	9.000	GND	N	10.3	25.7	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	40.3	1000.0	9.000	GND	L1	10.1	14.5	54.8	
0.308000	28.2	1000.0	9.000	GND	L1	10.1	21.9	50.0	
0.396000	22.3	1000.0	9.000	GND	N	10.1	25.6	47.9	
0.848000	20.0	1000.0	9.000	GND	N	10.1	26.0	46.0	
1.308000	20.3	1000.0	9.000	GND	N	10.2	25.7	46.0	
3.596000	19.4	1000.0	9.000	GND	L1	10.2	26.6	46.0	
4.384000	24.3	1000.0	9.000	GND	L1	10.3	21.7	46.0	
13.148000	27.5	1000.0	9.000	GND	N	10.3	22.5	50.0	

< Fig 5. Conducted emission result >



◆ Operating condition: Monitor with adapter #1, 1 024 × 768 / 60 Hz (RGB: Analog)

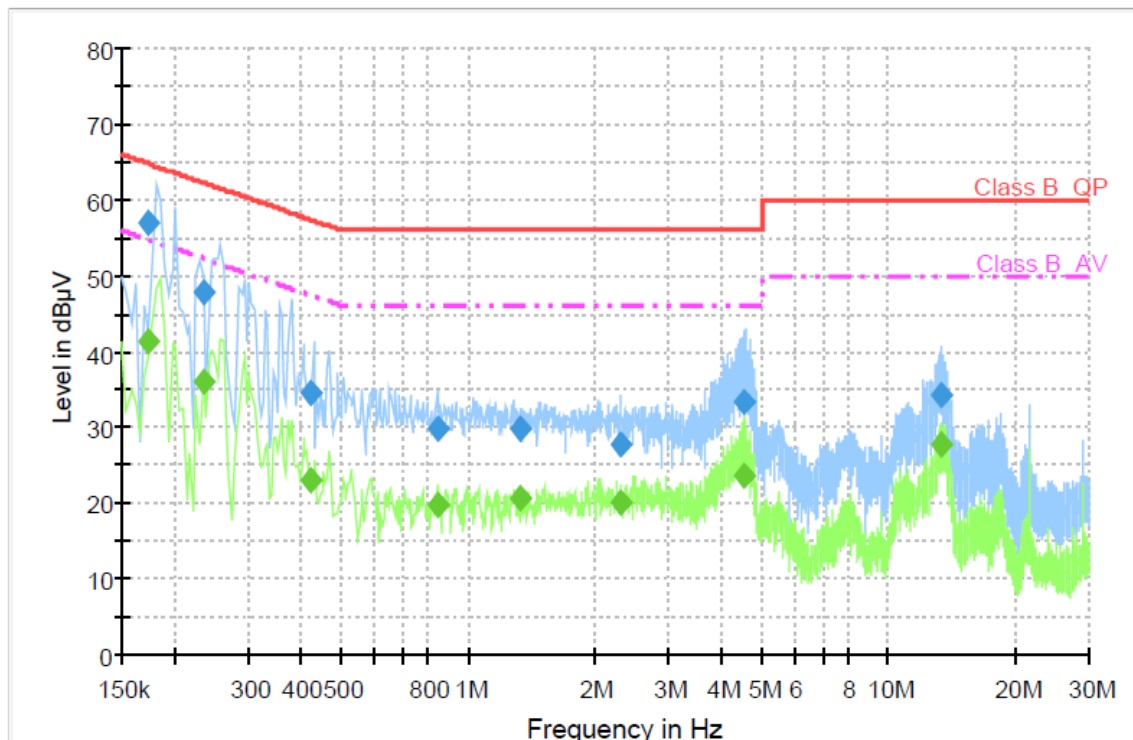

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	56.8	1000.0	9.000	GND	L1	10.1	7.9	64.8	
0.236000	47.9	1000.0	9.000	GND	L1	10.1	14.3	62.2	
0.420000	34.6	1000.0	9.000	GND	L1	10.1	22.9	57.4	
0.848000	29.9	1000.0	9.000	GND	N	10.1	26.1	56.0	
1.332000	29.7	1000.0	9.000	GND	N	10.2	26.3	56.0	
2.312000	27.9	1000.0	9.000	GND	N	10.2	28.1	56.0	
4.528000	33.3	1000.0	9.000	GND	L1	10.3	22.7	56.0	
13.360000	34.3	1000.0	9.000	GND	N	10.3	25.7	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	41.4	1000.0	9.000	GND	L1	10.1	13.4	54.8	
0.236000	36.0	1000.0	9.000	GND	L1	10.1	16.2	52.2	
0.420000	23.1	1000.0	9.000	GND	L1	10.1	24.3	47.4	
0.848000	19.9	1000.0	9.000	GND	N	10.1	26.1	46.0	
1.332000	20.7	1000.0	9.000	GND	N	10.2	25.3	46.0	
2.312000	20.0	1000.0	9.000	GND	N	10.2	26.0	46.0	
4.528000	23.6	1000.0	9.000	GND	L1	10.3	22.4	46.0	
13.360000	27.7	1000.0	9.000	GND	N	10.3	22.3	50.0	

< Fig 6. Conducted emission result >



◆ Operating condition: Monitor with adapter #1, 640 × 480 / 60 Hz (RGB: Analog)

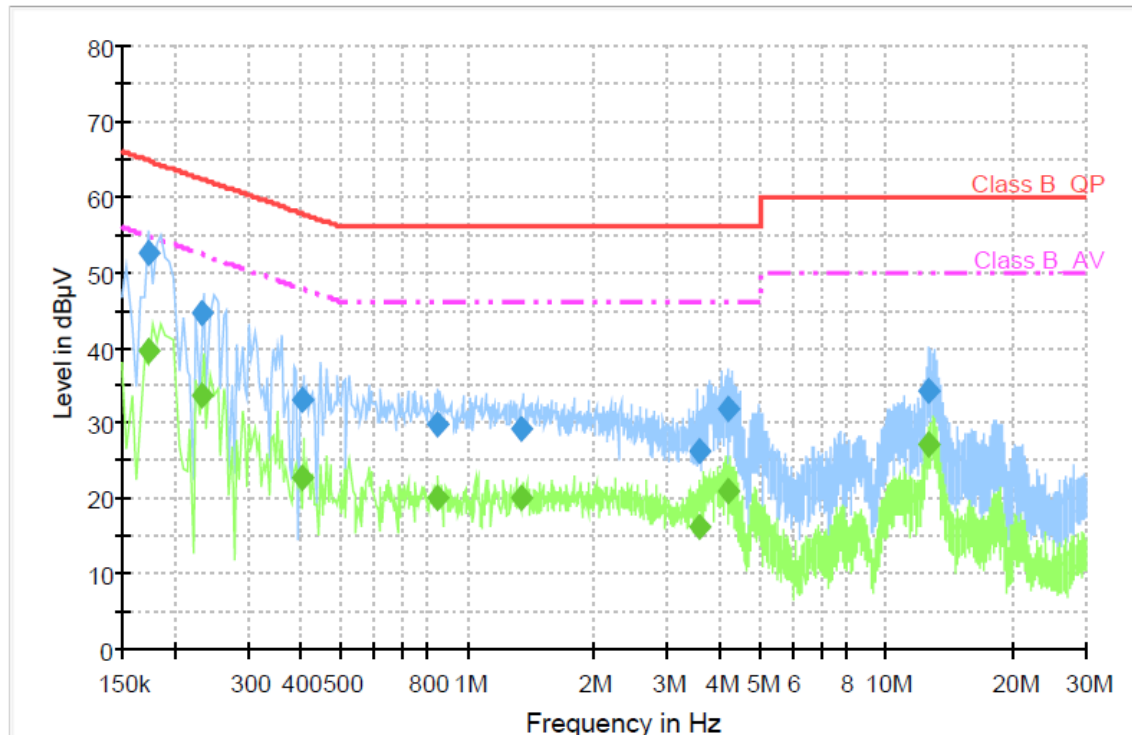

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	52.6	1000.0	9.000	GND	L1	10.1	12.2	64.8	
0.232000	44.5	1000.0	9.000	GND	L1	10.1	17.9	62.4	
0.404000	33.1	1000.0	9.000	GND	N	10.1	24.7	57.8	
0.844000	29.9	1000.0	9.000	GND	N	10.1	26.1	56.0	
1.344000	29.2	1000.0	9.000	GND	N	10.2	26.8	56.0	
3.592000	26.2	1000.0	9.000	GND	L1	10.2	29.8	56.0	
4.168000	31.7	1000.0	9.000	GND	L1	10.3	24.3	56.0	
12.672000	34.3	1000.0	9.000	GND	N	10.3	25.7	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	39.5	1000.0	9.000	GND	L1	10.1	15.3	54.8	
0.232000	33.6	1000.0	9.000	GND	L1	10.1	18.8	52.4	
0.404000	22.8	1000.0	9.000	GND	N	10.1	25.0	47.8	
0.844000	20.0	1000.0	9.000	GND	N	10.1	26.0	46.0	
1.344000	20.2	1000.0	9.000	GND	N	10.2	25.8	46.0	
3.592000	16.2	1000.0	9.000	GND	L1	10.2	29.8	46.0	
4.168000	20.9	1000.0	9.000	GND	L1	10.3	25.1	46.0	
12.672000	27.3	1000.0	9.000	GND	N	10.3	22.7	50.0	

< Fig 7. Conducted emission result >



◆ Operating condition: Monitor with adapter #1, 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)

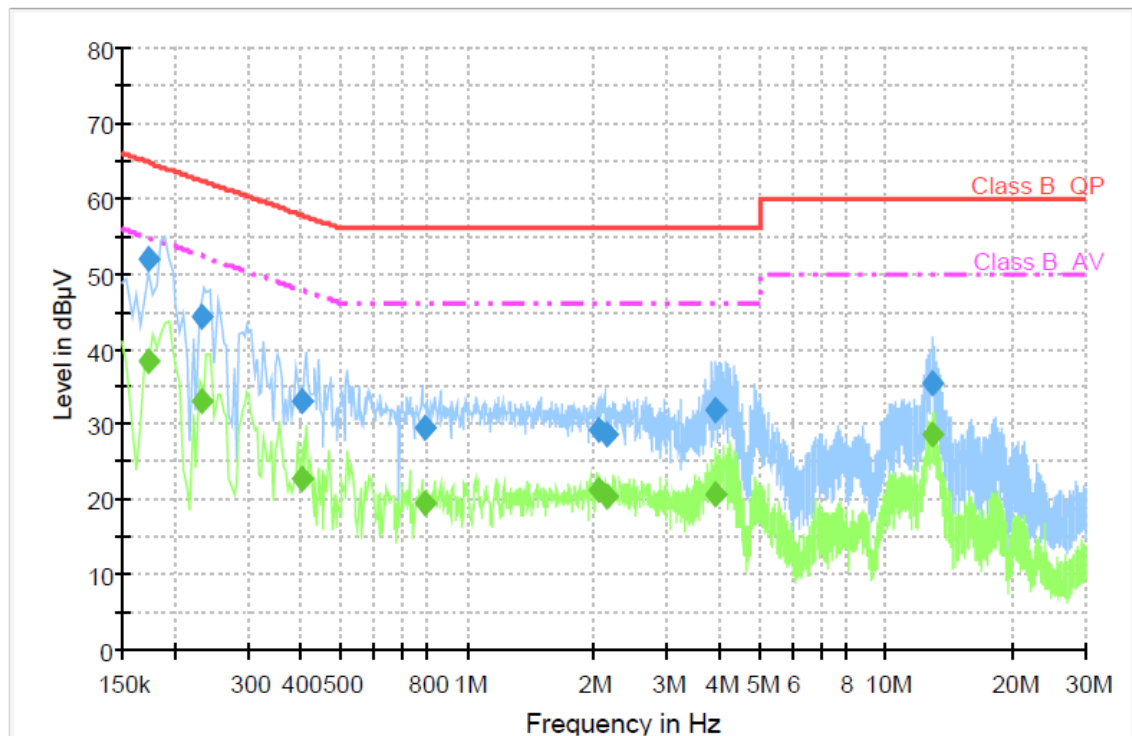

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	52.1	1000.0	9.000	GND	L1	10.1	12.7	64.8	
0.232000	44.2	1000.0	9.000	GND	L1	10.1	18.2	62.4	
0.404000	33.0	1000.0	9.000	GND	N	10.1	24.7	57.8	
0.792000	29.5	1000.0	9.000	GND	L1	10.1	26.5	56.0	
2.056000	29.4	1000.0	9.000	GND	L1	10.2	26.6	56.0	
2.156000	28.8	1000.0	9.000	GND	L1	10.2	27.2	56.0	
3.908000	31.8	1000.0	9.000	GND	L1	10.2	24.2	56.0	
12.944000	35.4	1000.0	9.000	GND	N	10.3	24.6	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	38.3	1000.0	9.000	GND	L1	10.1	16.5	54.8	
0.232000	33.0	1000.0	9.000	GND	L1	10.1	19.3	52.4	
0.404000	22.6	1000.0	9.000	GND	N	10.1	25.2	47.8	
0.792000	19.5	1000.0	9.000	GND	L1	10.1	26.5	46.0	
2.056000	21.2	1000.0	9.000	GND	L1	10.2	24.8	46.0	
2.156000	20.5	1000.0	9.000	GND	L1	10.2	25.5	46.0	
3.908000	20.6	1000.0	9.000	GND	L1	10.2	25.4	46.0	
12.944000	28.6	1000.0	9.000	GND	N	10.3	21.4	50.0	

< Fig 8. Conducted emission result >



◆ Operating condition: Monitor with adapter #2, 1 920 × 1 080 / 60 Hz (RGB: Analog)

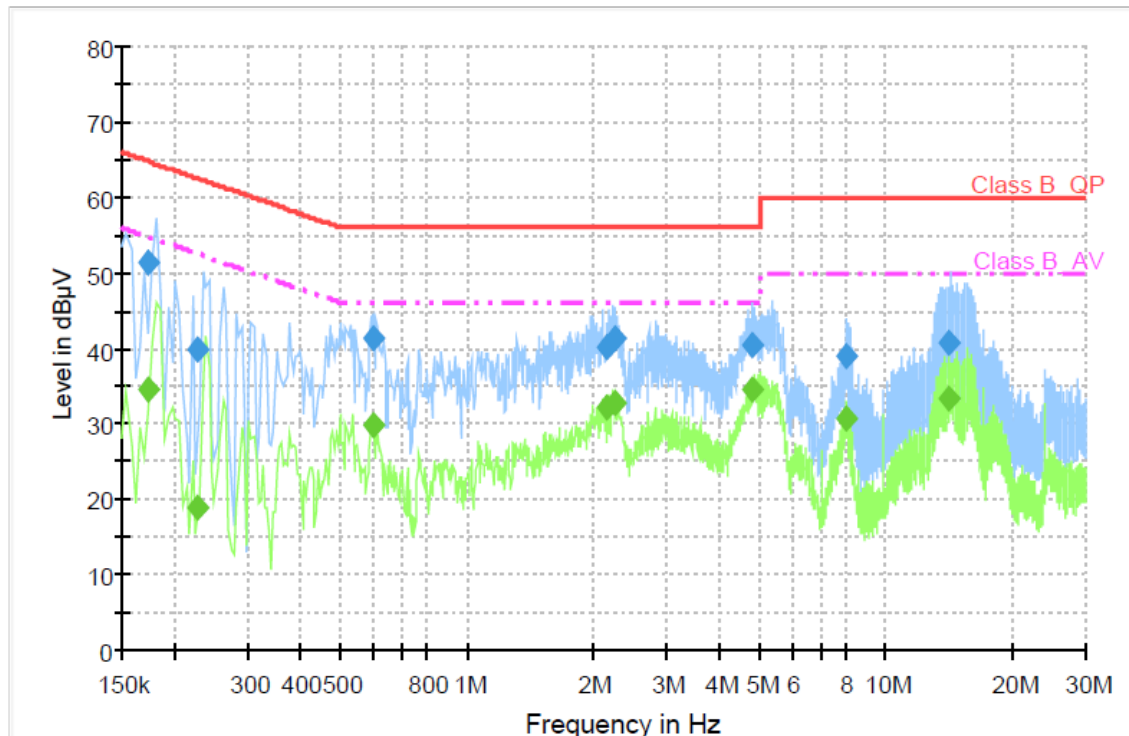

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	51.5	1000.0	9.000	GND	L1	10.1	13.3	64.8	
0.228000	39.9	1000.0	9.000	GND	L1	10.1	22.6	62.5	
0.600000	41.2	1000.0	9.000	GND	L1	10.1	14.8	56.0	
2.160000	40.0	1000.0	9.000	GND	L1	10.2	16.0	56.0	
2.268000	41.5	1000.0	9.000	GND	N	10.2	14.5	56.0	
4.808000	40.4	1000.0	9.000	GND	N	10.3	15.6	56.0	
8.064000	39.0	1000.0	9.000	GND	N	10.3	21.0	60.0	
14.188000	40.7	1000.0	9.000	GND	N	10.3	19.3	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174000	34.5	1000.0	9.000	GND	L1	10.1	20.2	54.8	
0.228000	18.9	1000.0	9.000	GND	L1	10.1	33.6	52.5	
0.600000	29.9	1000.0	9.000	GND	L1	10.1	16.1	46.0	
2.160000	32.2	1000.0	9.000	GND	L1	10.2	13.8	46.0	
2.268000	32.7	1000.0	9.000	GND	N	10.2	13.3	46.0	
4.808000	34.5	1000.0	9.000	GND	N	10.3	11.5	46.0	
8.064000	30.8	1000.0	9.000	GND	N	10.3	19.2	50.0	
14.188000	33.3	1000.0	9.000	GND	N	10.3	16.7	50.0	

< Fig 9. Conducted emission result >



◆ Operating condition: Monitor with adapter #2, 1 024 × 768 / 60 Hz (RGB: Analog)

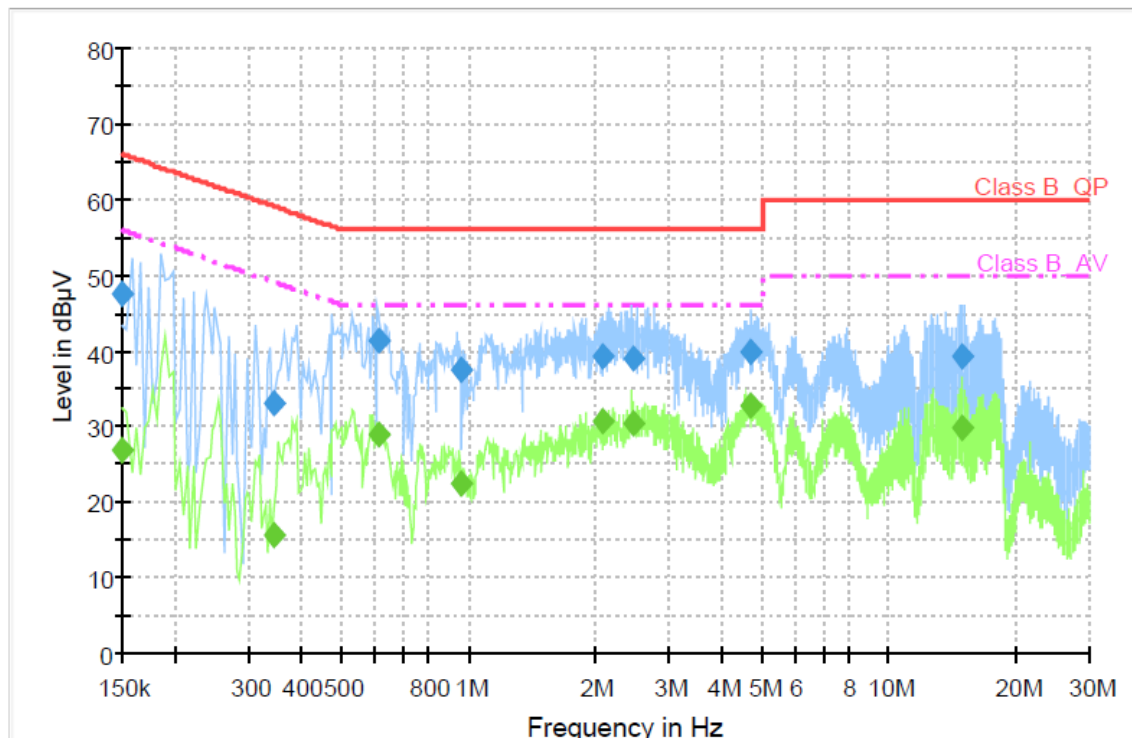

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	47.6	1000.0	9.000	GND	L1	10.1	18.4	66.0	
0.344000	33.1	1000.0	9.000	GND	N	10.1	26.0	59.1	
0.612000	41.4	1000.0	9.000	GND	L1	10.1	14.6	56.0	
0.960000	37.4	1000.0	9.000	GND	N	10.2	18.6	56.0	
2.096000	39.4	1000.0	9.000	GND	L1	10.2	16.6	56.0	
2.468000	39.0	1000.0	9.000	GND	L1	10.2	17.0	56.0	
4.704000	39.8	1000.0	9.000	GND	L1	10.3	16.2	56.0	
14.904000	39.3	1000.0	9.000	GND	L1	10.3	20.7	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	27.0	1000.0	9.000	GND	L1	10.1	29.0	56.0	
0.344000	15.7	1000.0	9.000	GND	N	10.1	33.4	49.1	
0.612000	29.0	1000.0	9.000	GND	L1	10.1	17.0	46.0	
0.960000	22.4	1000.0	9.000	GND	N	10.2	23.6	46.0	
2.096000	30.7	1000.0	9.000	GND	L1	10.2	15.3	46.0	
2.468000	30.3	1000.0	9.000	GND	L1	10.2	15.7	46.0	
4.704000	32.6	1000.0	9.000	GND	L1	10.3	13.4	46.0	
14.904000	30.0	1000.0	9.000	GND	L1	10.3	20.0	50.0	

< Fig 10. Conducted emission result >



- ◆ Operating condition: Monitor with adapter #2, 640 × 480 / 60 Hz (RGB: Analog)

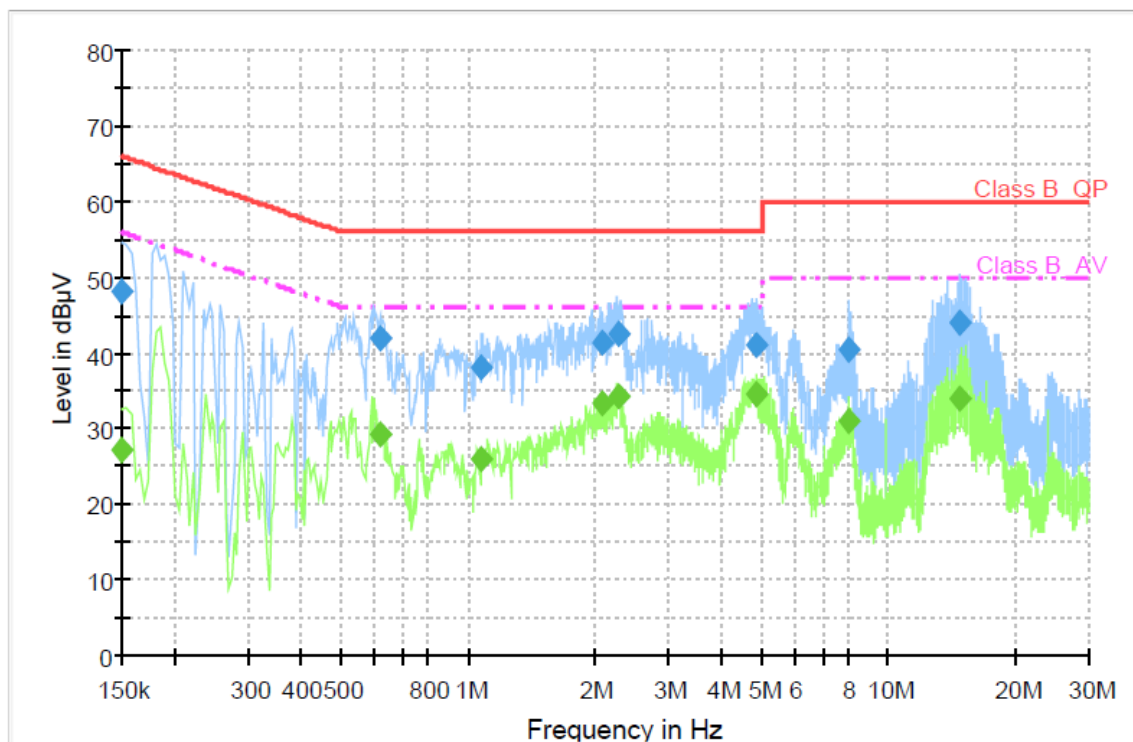

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	48.2	1000.0	9.000	GND	N	10.1	17.8	66.0	
0.616000	41.9	1000.0	9.000	GND	L1	10.1	14.1	56.0	
1.072000	38.2	1000.0	9.000	GND	L1	10.2	17.8	56.0	
2.096000	41.2	1000.0	9.000	GND	L1	10.2	14.8	56.0	
2.276000	42.7	1000.0	9.000	GND	N	10.2	13.3	56.0	
4.840000	41.1	1000.0	9.000	GND	L1	10.3	14.9	56.0	
8.052000	40.5	1000.0	9.000	GND	N	10.3	19.5	60.0	
14.812000	43.9	1000.0	9.000	GND	N	10.3	16.1	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	27.3	1000.0	9.000	GND	N	10.1	28.7	56.0	
0.616000	29.3	1000.0	9.000	GND	L1	10.1	16.7	46.0	
1.072000	25.9	1000.0	9.000	GND	L1	10.2	20.1	46.0	
2.096000	33.3	1000.0	9.000	GND	L1	10.2	12.7	46.0	
2.276000	34.3	1000.0	9.000	GND	N	10.2	11.7	46.0	
4.840000	34.6	1000.0	9.000	GND	L1	10.3	11.4	46.0	
8.052000	31.0	1000.0	9.000	GND	N	10.3	19.0	50.0	
14.812000	34.1	1000.0	9.000	GND	N	10.3	15.9	50.0	

< Fig 11. Conducted emission result >



◆ Operating condition: Monitor with adapter #2, 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)

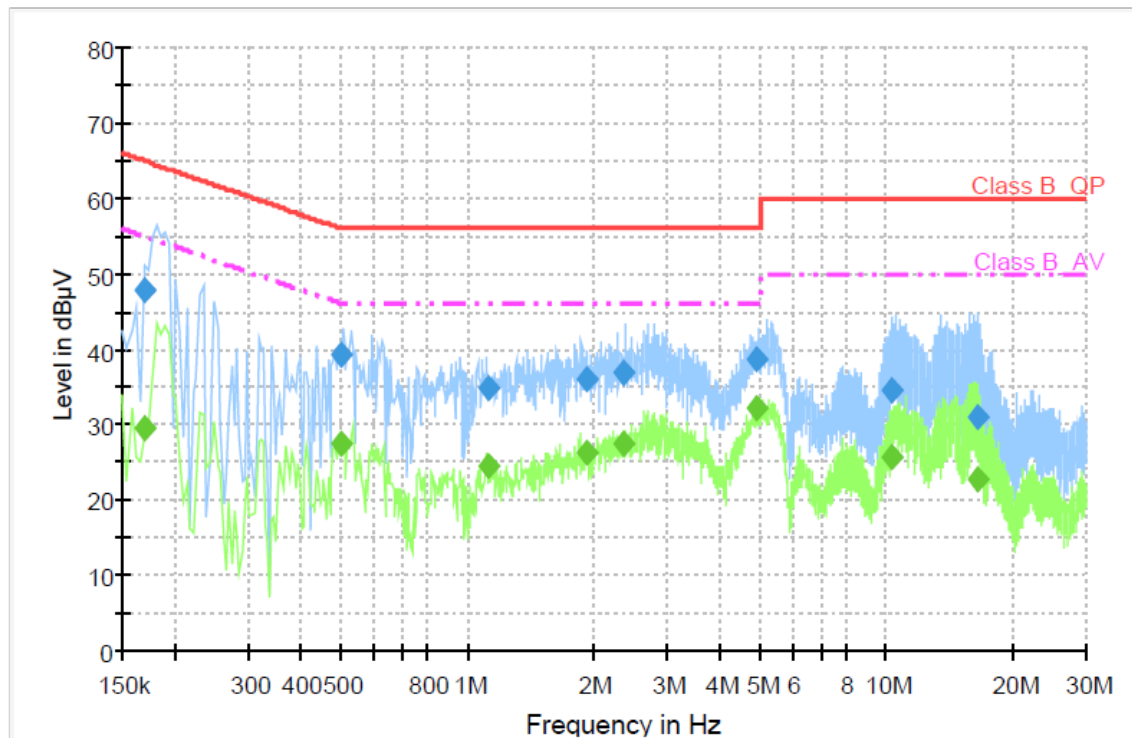

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.170000	47.9	1000.0	9.000	GND	L1	10.1	17.0	65.0	
0.500000	39.2	1000.0	9.000	GND	L1	10.1	16.8	56.0	
1.120000	34.9	1000.0	9.000	GND	N	10.2	21.2	56.0	
1.920000	35.9	1000.0	9.000	GND	N	10.2	20.1	56.0	
2.368000	36.9	1000.0	9.000	GND	N	10.2	19.1	56.0	
4.920000	38.5	1000.0	9.000	GND	N	10.3	17.5	56.0	
10.292000	34.4	1000.0	9.000	GND	N	10.3	25.6	60.0	
16.456000	30.9	1000.0	9.000	GND	L1	10.3	29.1	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.170000	29.4	1000.0	9.000	GND	L1	10.1	25.6	55.0	
0.500000	27.3	1000.0	9.000	GND	L1	10.1	18.7	46.0	
1.120000	24.4	1000.0	9.000	GND	N	10.2	21.6	46.0	
1.920000	26.4	1000.0	9.000	GND	N	10.2	19.6	46.0	
2.368000	27.5	1000.0	9.000	GND	N	10.2	18.5	46.0	
4.920000	32.0	1000.0	9.000	GND	N	10.3	14.0	46.0	
10.292000	25.6	1000.0	9.000	GND	N	10.3	24.4	50.0	
16.456000	22.7	1000.0	9.000	GND	L1	10.3	27.3	50.0	

< Fig 12. Conducted emission result >



6. Radiated Emission

6.1 Operating Environment

Temperature : 24.0 °C
Relative Humidity : 42.0 % R.H.

6.2 Test Set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 4.38 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 3.50 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	± 3.75 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	± 3.59 dB	Confidence level of approximately 95 % ($k = 2$)



6.4 Limit

Frequency (MHz)	FCC Limit @ 3 m. dB μ V/m	CISPR Limit @ 10 m. dB μ V/m
30 ~ 88	40.0	30.0
88 ~ 216	43.5	30.0
216 ~ 230	46.0	30.0
230 ~ 960	46.0	37.0
960 ~ 1 000	54.0	37.0
> 1 000	54.0	No Specified limit

6.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	12. 05. 2012
■ - VULB9160	Schwarzbeck	Broadband Test Antenna	3193	03. 14. 2013
■ - BBHA9120D	Schwarzbeck	Horn ANT	597	01. 23. 2013
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
■ - AM 4.0	maturo GmbH	Antenna Mast	1390308	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	11. 12. 2012

6.6 Test data for Radiated Emission


-. Test Date : April 13, 2012
-. Measurement Distance : 3 m
-. Note : The highest frequency of the internal source of the EUT is between 500 MHz and 1 000 MHz (667 MHz). The measurement was made up to 5 000 MHz

-. Measurement

Frequency range	30 MHz ~ 1 GHz	Above 1 GHz
Detector type	Quasi peak	Peak / Average
IF bandwidth	120 kHz	1 MHz



- ◆ Operating condition: Monitor with adapter #1, 1 920 × 1 080 / 60 Hz (RGB: Analog)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

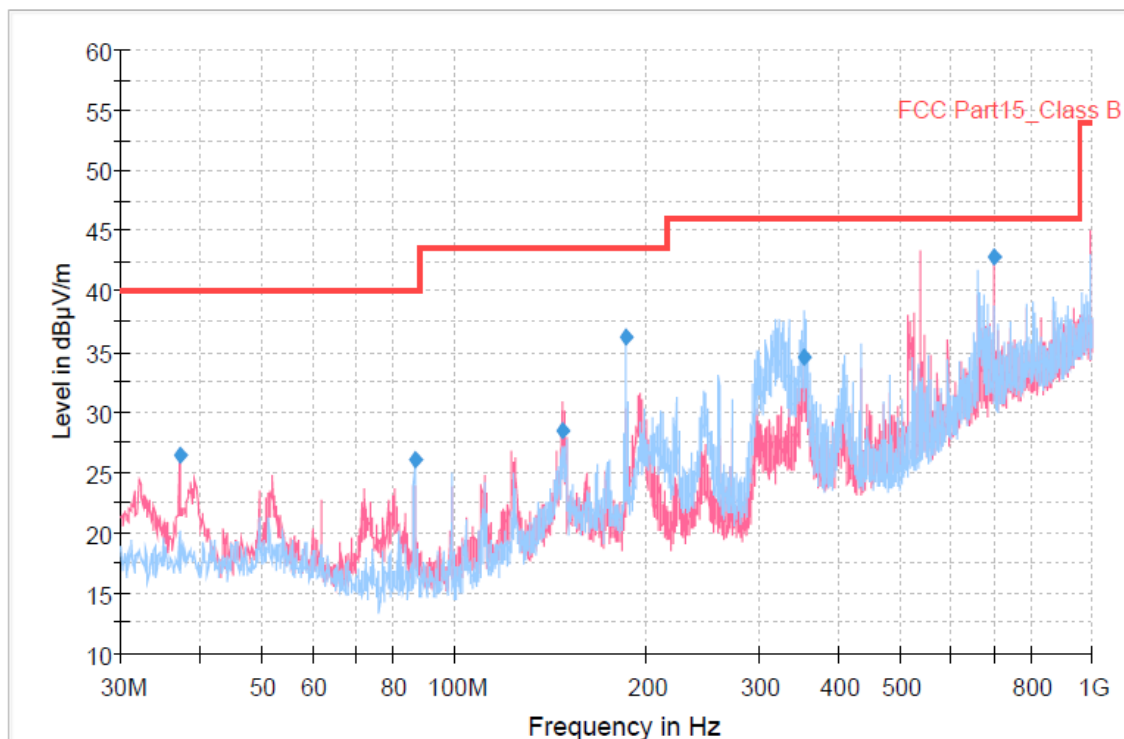


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
37.132500	26.4	1000.0	120.000	100.0	V	88.0	12.4	13.6	40.0
86.643750	26.0	1000.0	120.000	200.0	H	224.0	9.1	14.0	40.0
147.308750	28.5	1000.0	120.000	100.0	V	159.0	13.9	15.0	43.5
185.665000	36.1	1000.0	120.000	150.0	H	246.0	12.3	7.4	43.5
353.916250	34.6	1000.0	120.000	110.0	H	139.0	16.3	11.4	46.0
700.007500	42.9	1000.0	120.000	100.0	V	341.0	24.0	3.1	46.0

< Fig 13. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating condition: Monitor with adapter #1, 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

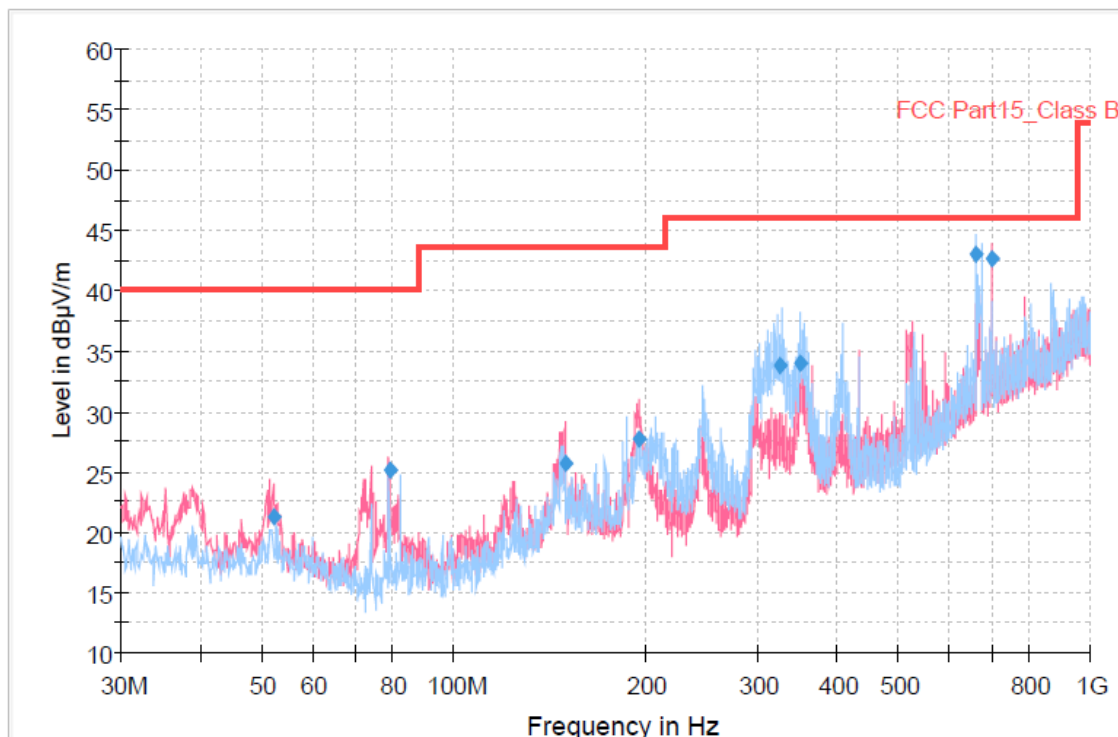


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
52.041250	21.3	1000.0	120.000	100.0	V	180.0	13.0	18.8	40.0
79.206250	25.1	1000.0	120.000	140.0	V	287.0	9.0	14.9	40.0
149.977500	25.7	1000.0	120.000	119.0	V	145.0	13.9	17.8	43.5
195.328750	27.8	1000.0	120.000	100.0	V	35.0	11.2	15.7	43.5
326.043750	33.8	1000.0	120.000	100.0	H	174.0	15.6	12.2	46.0
350.116250	34.0	1000.0	120.000	109.0	H	140.0	16.2	12.0	46.0
662.258750	42.9	1000.0	120.000	119.0	H	209.0	23.6	3.1	46.0
700.007500	42.7	1000.0	120.000	100.0	V	342.0	24.0	3.3	46.0

< Fig 14. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating condition: Monitor with adapter #2, 1 920 × 1 080 / 60 Hz (RGB: Analog)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

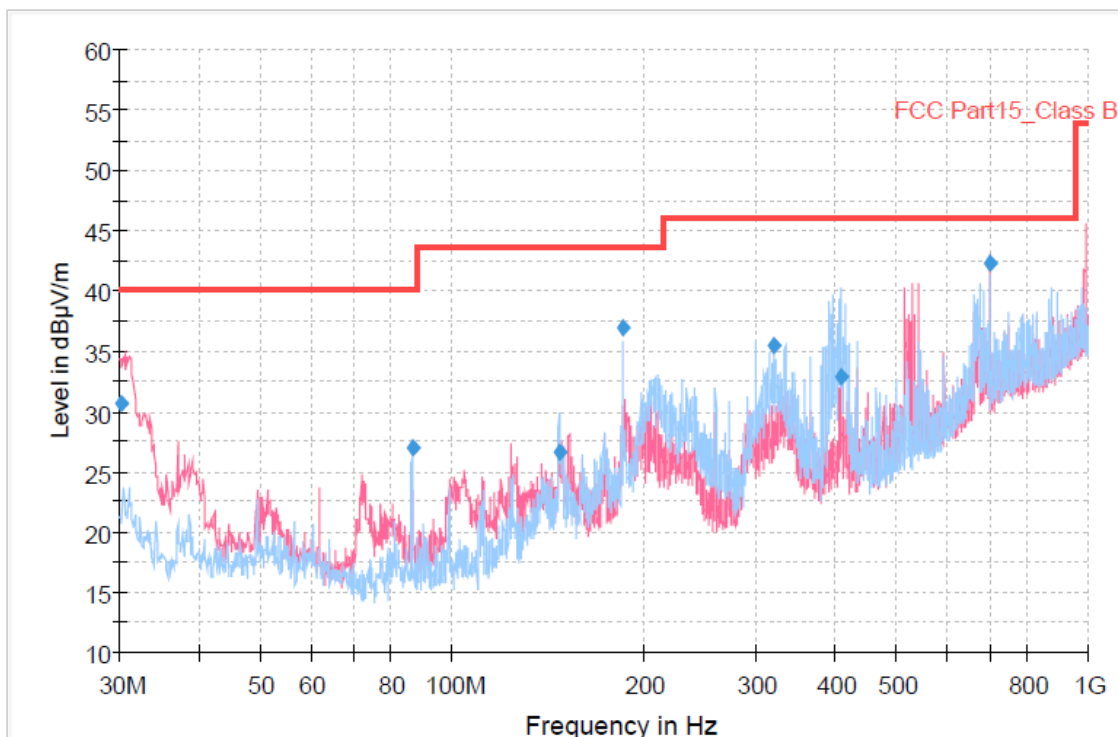


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.200000	30.7	1000.0	120.000	100.0	V	310.0	12.4	9.3	40.0
86.643750	27.1	1000.0	120.000	198.0	H	219.0	9.1	12.9	40.0
147.308750	26.6	1000.0	120.000	198.0	H	353.0	13.9	16.9	43.5
185.663750	37.0	1000.0	120.000	148.0	H	241.0	12.3	6.5	43.5
321.828750	35.4	1000.0	120.000	109.0	H	173.0	15.4	10.6	46.0
408.082500	32.8	1000.0	120.000	100.0	H	281.0	17.7	13.2	46.0
699.967500	42.2	1000.0	120.000	100.0	V	345.0	24.0	3.8	46.0

< Fig 15. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating condition: Monitor with adapter #2, 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

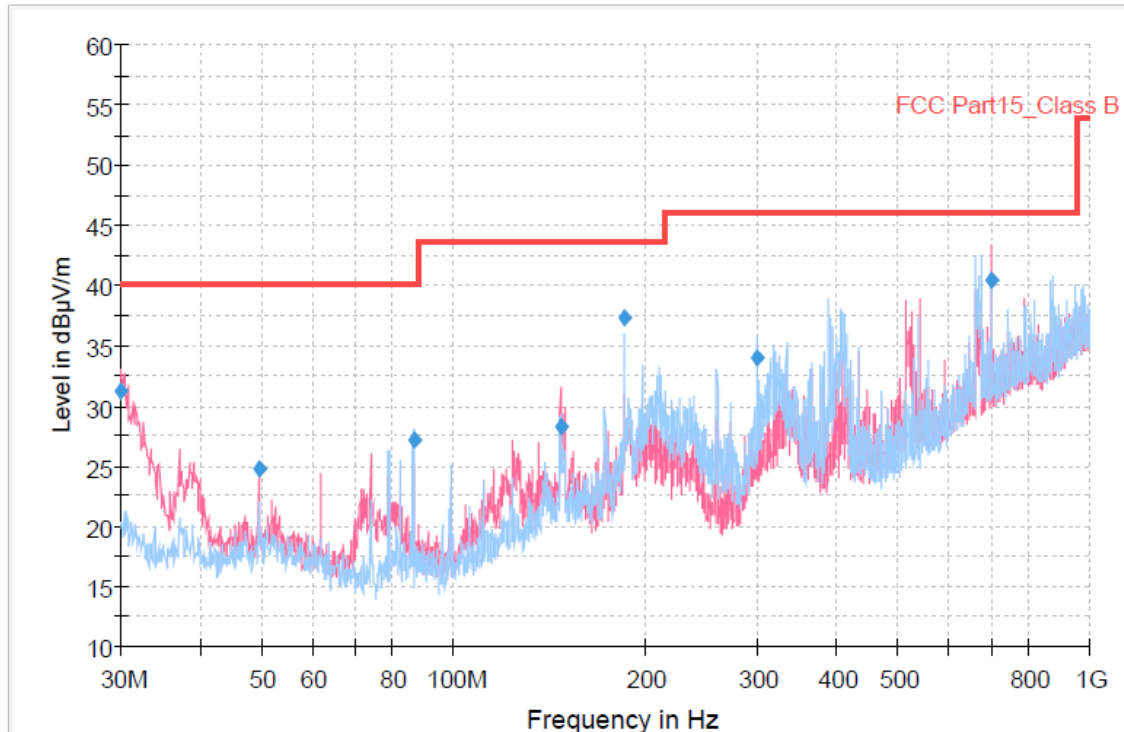


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.000000	31.2	1000.0	120.000	100.0	V	237.0	12.4	8.8	40.0
49.501250	24.8	1000.0	120.000	100.0	V	183.0	13.1	15.2	40.0
86.643750	27.2	1000.0	120.000	200.0	H	237.0	9.1	12.8	40.0
147.268750	28.3	1000.0	120.000	100.0	V	176.0	13.9	15.2	43.5
185.665000	37.2	1000.0	120.000	150.0	H	237.0	12.3	6.3	43.5
300.003750	33.9	1000.0	120.000	132.0	H	59.0	14.9	12.1	46.0
700.007500	40.5	1000.0	120.000	100.0	V	-25.0	24.0	5.5	46.0

< Fig 16. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: Monitor with adapter #1, 1 920 × 1080 / 60 Hz (RGB: Analog)
Green trace: Average detector, Blue trace: Peak detector

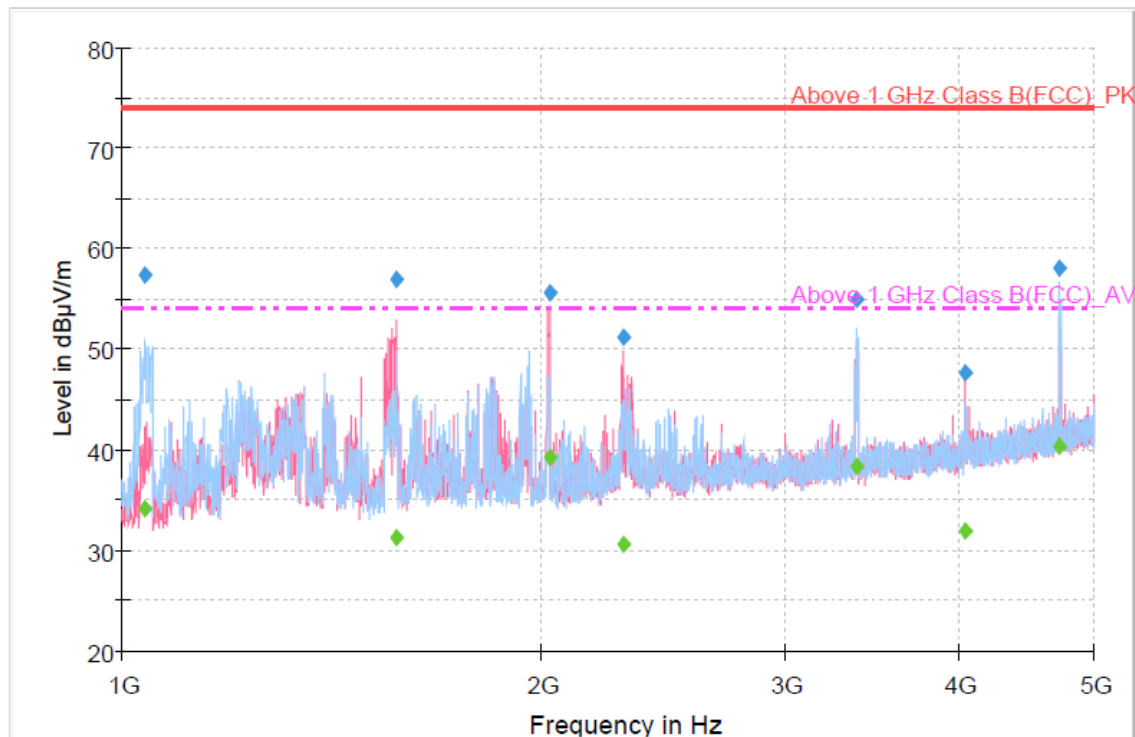

Final Result 1

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1039.060000	57.4	1000.0	1000.000	118.0	H	195.0	-11.2	16.6	74.0
1577.200000	56.9	1000.0	1000.000	121.0	V	182.0	-8.3	17.1	74.0
2028.340000	55.7	1000.0	1000.000	100.0	V	216.0	-7.5	18.3	74.0
2294.640000	51.2	1000.0	1000.000	100.0	V	175.0	-6.2	22.8	74.0
3370.980000	55.0	1000.0	1000.000	111.0	H	216.0	-3.4	19.0	74.0
4044.580000	47.6	1000.0	1000.000	100.0	V	243.0	-1.6	26.4	74.0
4719.260000	58.1	1000.0	1000.000	100.0	H	209.0	0.4	15.9	74.0


Final Result 2

Frequency (MHz)	CAverage (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1039.060000	34.1	1000.0	1000.000	118.0	H	195.0	-11.2	19.9	54.0
1577.200000	31.3	1000.0	1000.000	121.0	V	182.0	-8.3	22.7	54.0
2028.340000	39.3	1000.0	1000.000	100.0	V	216.0	-7.5	14.7	54.0
2294.640000	30.5	1000.0	1000.000	100.0	V	175.0	-6.2	23.5	54.0
3370.980000	38.4	1000.0	1000.000	111.0	H	216.0	-3.4	15.6	54.0
4044.580000	31.9	1000.0	1000.000	100.0	V	243.0	-1.6	22.1	54.0
4719.260000	40.3	1000.0	1000.000	100.0	H	209.0	0.4	13.7	54.0

< Fig 17. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



- ◆ Operating Condition: Monitor with adapter #1, 1 920 × 1080 / 60 Hz (HDMI/DVI: Digital)
Green trace: Average detector, Blue trace: Peak detector

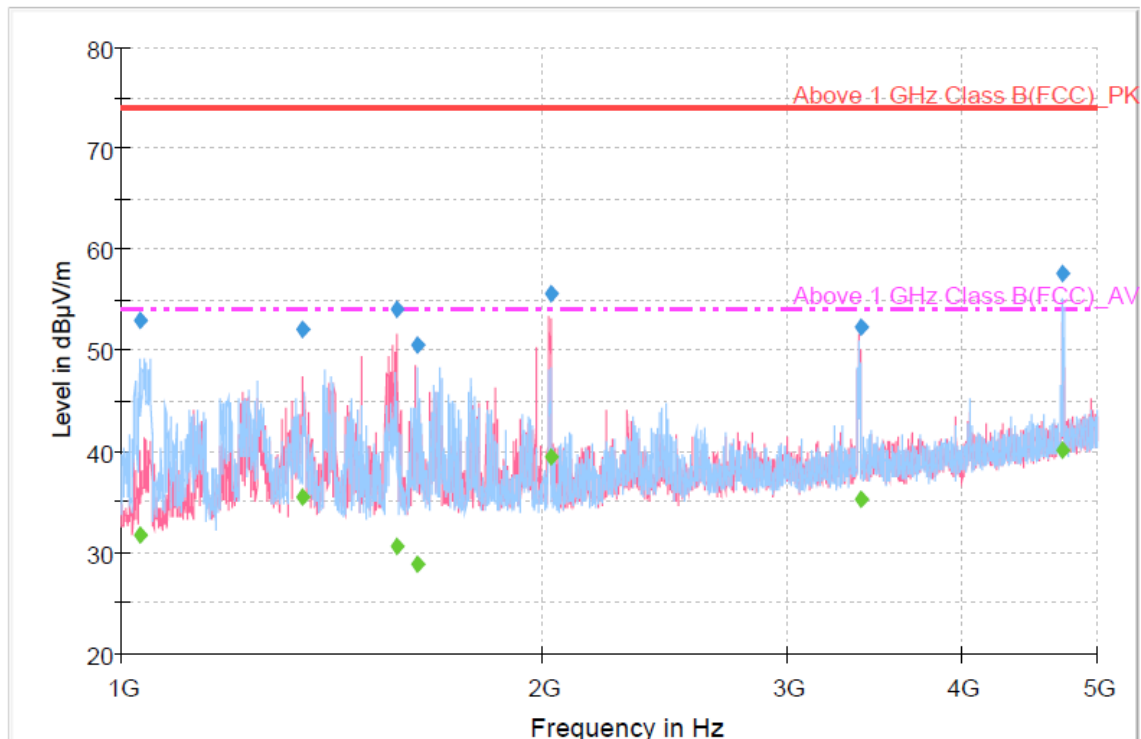

Final Result 1

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1031.600000	53.0	1000.0	1000.000	150.0	H	182.0	-11.2	21.0	74.0
1347.980000	52.1	1000.0	1000.000	100.0	V	159.0	-9.4	21.9	74.0
1576.500000	54.0	1000.0	1000.000	100.0	V	199.0	-8.3	20.0	74.0
1630.500000	50.6	1000.0	1000.000	100.0	V	192.0	-8.2	23.4	74.0
2028.540000	55.5	1000.0	1000.000	100.0	V	213.0	-7.5	18.5	74.0
3381.540000	52.4	1000.0	1000.000	110.0	V	200.0	-3.3	21.6	74.0
4719.340000	57.6	1000.0	1000.000	100.0	H	207.0	0.4	16.4	74.0


Final Result 2

Frequency (MHz)	CAverage (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1031.600000	31.8	1000.0	1000.000	150.0	H	182.0	-11.2	22.2	54.0
1347.980000	35.5	1000.0	1000.000	100.0	V	159.0	-9.4	18.5	54.0
1576.500000	30.5	1000.0	1000.000	100.0	V	199.0	-8.3	23.5	54.0
1630.500000	28.8	1000.0	1000.000	100.0	V	192.0	-8.2	25.2	54.0
2028.540000	39.6	1000.0	1000.000	100.0	V	213.0	-7.5	14.4	54.0
3381.540000	35.4	1000.0	1000.000	110.0	V	200.0	-3.3	18.6	54.0
4719.340000	40.1	1000.0	1000.000	100.0	H	207.0	0.4	13.9	54.0

< Fig 18. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



- ◆ Operating Condition: Monitor with adapter #2, 1 920 × 1080 / 60 Hz (RGB: Analog)
Green trace: Average detector, Blue trace: Peak detector

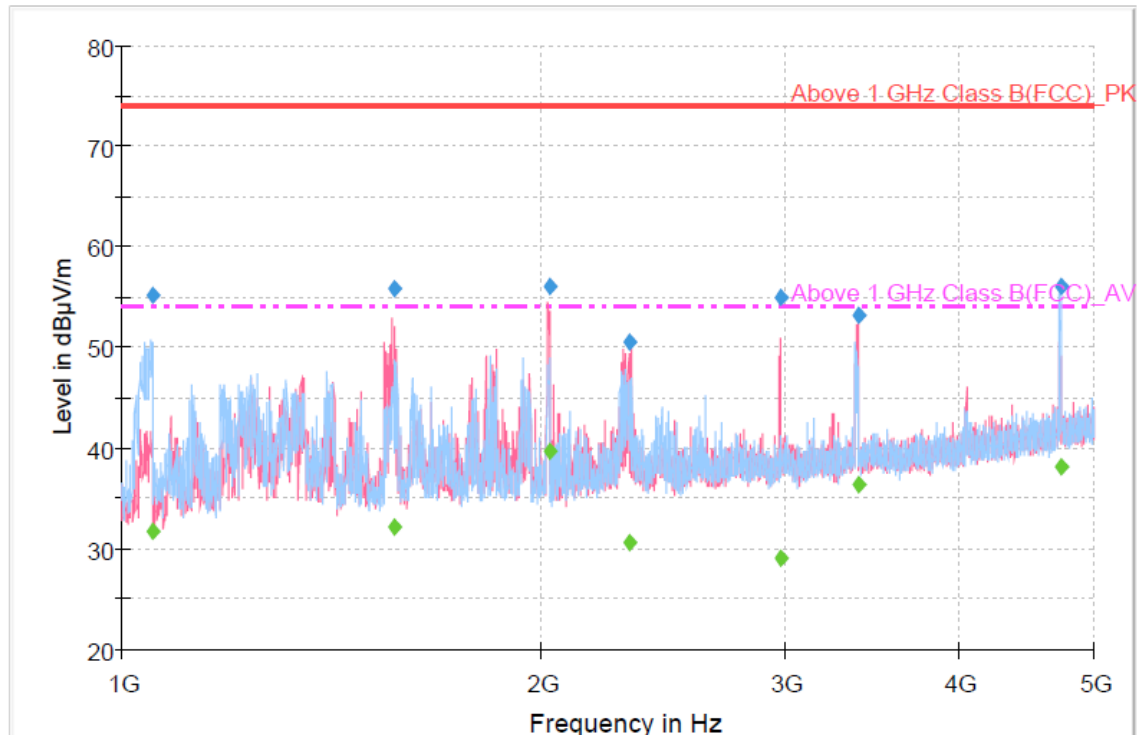

Final Result 1

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1051.420000	55.3	1000.0	1000.000	109.0	H	194.0	-11.1	18.7	74.0
1568.780000	55.8	1000.0	1000.000	150.0	V	165.0	-8.4	18.2	74.0
2028.940000	56.0	1000.0	1000.000	100.0	V	216.0	-7.5	18.0	74.0
2318.040000	50.6	1000.0	1000.000	100.0	V	180.0	-6.0	23.4	74.0
2973.620000	55.1	1000.0	1000.000	100.0	V	263.0	-4.3	18.9	74.0
3382.280000	53.3	1000.0	1000.000	100.0	V	203.0	-3.3	20.7	74.0
4732.780000	56.1	1000.0	1000.000	100.0	H	208.0	0.4	17.9	74.0


Final Result 2

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1051.420000	31.6	1000.0	1000.000	109.0	H	194.0	-11.1	22.4	54.0
1568.780000	32.2	1000.0	1000.000	150.0	V	165.0	-8.4	21.8	54.0
2028.940000	39.6	1000.0	1000.000	100.0	V	216.0	-7.5	14.4	54.0
2318.040000	30.7	1000.0	1000.000	100.0	V	180.0	-6.0	23.3	54.0
2973.620000	29.2	1000.0	1000.000	100.0	V	263.0	-4.3	24.8	54.0
3382.280000	36.3	1000.0	1000.000	100.0	V	203.0	-3.3	17.7	54.0
4732.780000	38.1	1000.0	1000.000	100.0	H	208.0	0.4	15.9	54.0

< Fig 19. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



- ◆ Operating Condition: Monitor with adapter #2, 1 920 × 1080 / 60 Hz (HDMI/DVI: Digital)
Green trace: Average detector, Blue trace: Peak detector

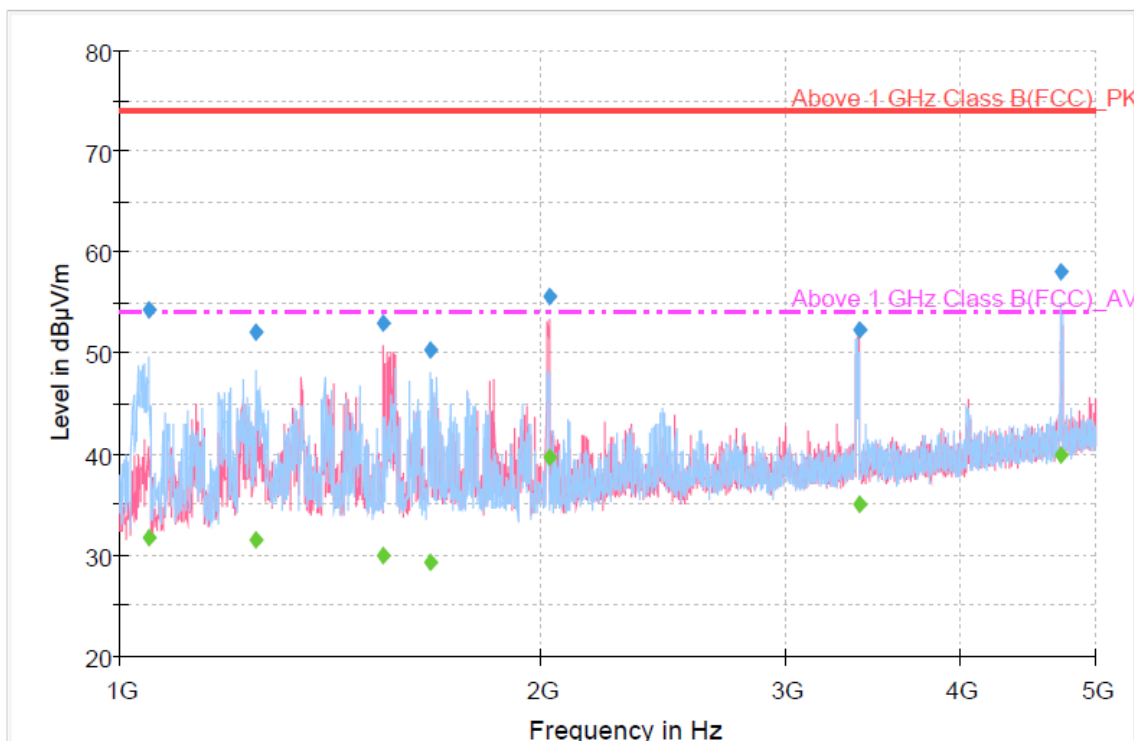

Final Result 1

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1047.820000	54.3	1000.0	1000.000	120.0	H	200.0	-11.1	19.7	74.0
1250.520000	52.1	1000.0	1000.000	100.0	H	215.0	-9.8	21.9	74.0
1544.960000	53.0	1000.0	1000.000	119.0	V	192.0	-8.5	21.0	74.0
1667.520000	50.4	1000.0	1000.000	100.0	H	134.0	-8.1	23.6	74.0
2028.680000	55.7	1000.0	1000.000	100.0	V	212.0	-7.5	18.3	74.0
3382.420000	52.2	1000.0	1000.000	110.0	V	199.0	-3.3	21.8	74.0
4721.120000	58.0	1000.0	1000.000	100.0	H	208.0	0.4	16.0	74.0

Final Result 2

Frequency (MHz)	CAverage (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1047.820000	31.8	1000.0	1000.000	120.0	H	200.0	-11.1	22.2	54.0
1250.520000	31.5	1000.0	1000.000	100.0	H	215.0	-9.8	22.5	54.0
1544.960000	30.1	1000.0	1000.000	119.0	V	192.0	-8.5	23.9	54.0
1667.520000	29.4	1000.0	1000.000	100.0	H	134.0	-8.1	24.6	54.0
2028.680000	39.7	1000.0	1000.000	100.0	V	212.0	-7.5	14.3	54.0
3382.420000	35.2	1000.0	1000.000	110.0	V	199.0	-3.3	18.8	54.0
4721.120000	40.0	1000.0	1000.000	100.0	H	208.0	0.4	14.0	54.0

< Fig 20. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



7. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

7.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss = 5.8 dB	
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



8. Recommendation & Conclusion

The data collected shows that the **LG Electronics Inc. LED LCD TV/Monitor (Model Name: M2752D)** was complies with §15.107 and 15.109 of the FCC Rules.

- The end -