

Application for FCC Certificate
On Behalf of
LG Electronics U.S.A., Inc.

LCD Monitor

Model No.: E1641SX

Serial No.: E1103051-01/01

FCC ID : BEJE1641SX

Prepared For : LG Electronics U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs,
NJ 07632, United States

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai 200233, China

Tel: +86-21-64955500
Fax: +86-21-64955491

Report No. : ACI-F11036
Date of Test : Mar 15 - 19, 2011
Date of Report : Mar 28, 2011

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS.....	4
1.1 Description of Standards and Results.....	4
2 GENERAL INFORMATION.....	5
2.1 Description of Equipment Under Test.....	5
2.2 Peripherals.....	6
2.3 Description of Test Facility.....	7
2.4 Measurement Uncertainty.....	7
3 CONDUCTED EMISSION TEST.....	8
3.1 Test Equipment.....	8
3.2 Block Diagram of Test Setup.....	8
3.3 Conducted Emission Limit [FCC Part 15 Subpart B 15.107(a)].....	9
3.4 Test Configuration.....	9
3.5 Operating Condition of EUT.....	10
3.6 Test Procedures.....	10
3.7 Test Results.....	11
4 RADIATED EMISSION TEST.....	15
4.1 Test Equipment.....	15
4.2 Block Diagram of Test Setup.....	15
4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)].....	16
4.4 Test Configuration.....	16
4.5 Operating Condition of EUT.....	17
4.6 Test Procedures.....	17
4.7 Test Results.....	18
5 DEVIATION TO TEST SPECIFICATIONS.....	22
6 DEBUG DESCRIPTION.....	23

TEST REPORT FOR FCC CERTIFICATE

Applicant : LG Electronics U.S.A., Inc.
 Manufacturer : LG Electronics Nanjing Display Co., Ltd.
 EUT Description : LCD Monitor
 (A) Model No. : E1641SX
 (B) Serial No. : E1103051-01/01
 (C) Power Supply : 120V/60Hz

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 2009
 AND ANSI C63.4-2003*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B (Class B) and ICES-003, Issue 4 February 2004 (CISPR 22:2002) limits both radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report shows that the EUT (M/N: E1641SX; S/N: E1103051-01/01) which was tested in 3m anechoic chamber Mar 15 - 19, 2011 is technically compliance with the FCC official limits also.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.


This report contains data that are not covered by the NVLAP accreditation.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Mar 15 - 19, 2011 Date of Report : Mar 28, 2011

Producer : 
 KATHY WANG / Assistant

Review : 
 DIO YANG / Deputy Assistant Manager

 For and on behalf of
 Audix Technology (Shanghai) Co., Ltd.

Signatory : 
 Authorized Signature EMC SAMMY CHEN / Deputy Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description of Test Item	Standard	Limits	Results
EMISSION			
Conducted Disturbance at the Mains Terminal	FCC RULES AND REGULATIONS PART 15 SUBPART B OCTOBER 2009 AND ANSI C63.4-2003	15.107(a) Class B	Pass
Radiated Disturbance	FCC RULES AND REGULATIONS PART 15 SUBPART B OCTOBER 2009 AND ANSI C63.4-2003	15.109(a) Class B	Pass

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description : LCD Monitor

Type of EUT : Production Pre-product Pro-type

Model No. : E1641SX

Serial No. : E1103051-01/01

Real Power : 9.80W

Applicant : LG Electronics U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs,
NJ 07632, United States

Manufacturer : LG Electronics Nanjing Display Co., Ltd.
No.346, Yao Xin Road, Economic & Technical
Development Zone, Nanjing, China

LCD Panel : Manufacturer: CHI MEI OPTOELECTRONICS
M/N : M156BGE-L10

Max Resolution : 1366*768@60Hz

D-Sub Cable #1 : Shielded, Detachable, 1.50m,
with two cores on cable

D-Sub Cable #2 : Shielded, Detachable, 1.50m,
with two cores in connector

Power Cord : Unshielded, Detachable, 1.80m

Note : The D-Sub cable#2 was selected to be used in the test.

Remark:

The EUT is a LCD Monitor which input/output ports as follows:

- (1) One D-Sub Port : Connected with PC
- (2) One AC In Port : Connected with Power

2.2 Peripherals

2.2.1 PC

Manufacturer : HP
Model Number : dx7400MT
Serial Number : CNG8130K89
Power Cord : Unshielded, Detachable, 1.8m
Certificate : FCC DoC; CE/EMC; VCCI; C-Tick; UL
BSMI (R33001) 3C (A000111)
MIC (E-A011-04-2659(B))

2.2.2 Printer

Manufacturer : HP
Model Number : C3990A
Serial Number : JPZX020487
Data Cable : Shielded, Detachable, 1.5m
Certificate : GS, CE/EMC, C-Tick, FCC DoC

2.2.3 Keyboard

Manufacturer : Microsoft
Model Number : RT2300
Serial Number : 7668200662248
Data Cable : Shielded, Undetachable, 1.8m
Certificate : CE/EMC, FCC DoC, VCCI, MIC,
C-Tick, BSMI

2.2.4 Mouse

Manufacturer : Microsoft
Model Number : RT2300
Serial Number : 6965712071551
Data Cable : Shielded, Undetachable, 1.8m.
Certificate : CE/EMC, FCC DoC, VCCI, MIC,
C-Tick, BSMI

2.2.5 Modem

Manufacturer : TP-LINK
Model Number : TM-EC5658V
Serial Number : 07123301053
Data Cable : Shielded, Detachable, 1.8m
Certificate : FCC DoC, CE/EMC, CCC

2.3 Description of Test Facility

Site Description (Semi-Anechoic Chamber)	:	Sept. 17, 1998 file on Apr 29, 2009 Renewed Federal Communications Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, USA
Name of Firm	:	Audix Technology (Shanghai) Co., Ltd.
Site Location	:	3F 34Bldg 680 Guiping Rd, Caohejing Hi-Tech Park, Shanghai 200233, China
NVLAP Lab Code	:	200371-0

2.4 Measurement Uncertainty

Conducted Emission Expanded Uncertainty:	U = 3.38 dB
Radiated Emission Expanded Uncertainty (30-200MHz):	U = 4.58 dB (horizontal) U = 4.70 dB (vertical)
Radiated Disturbance Expanded Uncertainty (200M-1GHz):	U = 4.84 dB (horizontal) U = 4.70 dB (vertical)

3 CONDUCTED EMISSION TEST


3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESCI	100841	Oct 15, 2010	Oct 15, 2011
2.	Artificial Mains Network (AMN)	R&S	ESH2-Z5	843890/011	Apr 02, 2010	Apr 02, 2011
3.	Line Impedance Stabilization Network (LISN)	Kyoritsu	KNW-407	8-1280-4	Apr 02, 2010	Apr 02, 2011
4.	50 Ω Coaxial Switch	Anritsu	MP59B	6200426389	Sep 19, 2011	Mar 19, 2012
5.	50Ω Terminator	Anritsu	BNC	001	Apr 02, 2010	Apr 02, 2011
6.	Software	Audix	E3	SET00200 9804M592	--	--

3.2 Block Diagram of Test Setup

3.2.1 EUT & Peripherals

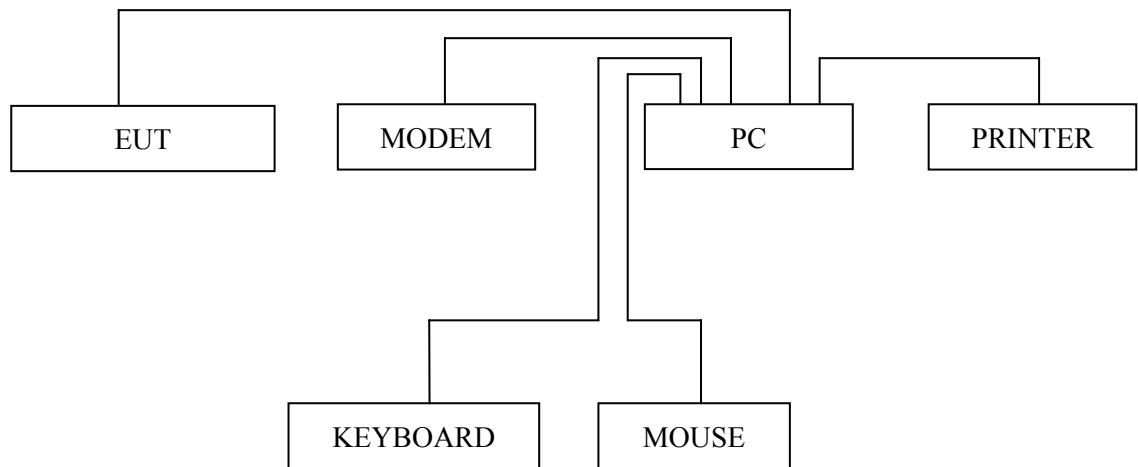

3.2.2 Conducted Disturbance Test Setup

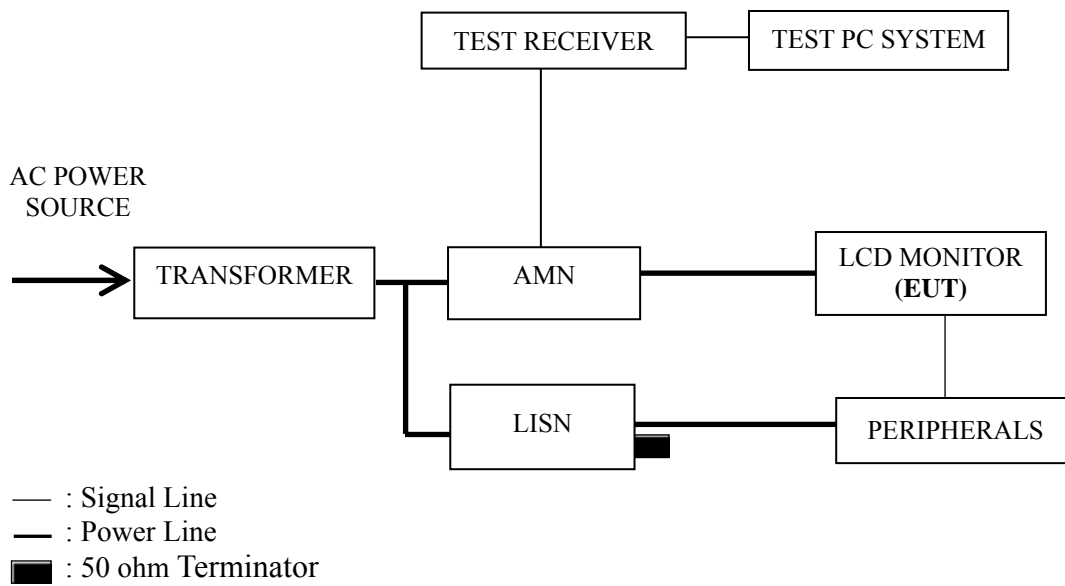

3.3 Conducted Emission Limit [FCC Part 15 Subpart B 15.107(a)]

Frequency Range (MHz)	Limits dB (μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE 1 – The lower limit shall apply at the transition frequencies.
 NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz

3.4 Test Configuration

The EUT (listed in Sec.2.1) and the peripherals (listed in Sec 2.2) were installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner that tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

- 3.5.1 Setup the EUT and peripherals as shown in Sec. 3.2.
- 3.5.2 Turn on the power of all equipments and the EUT.
- 3.5.3 Set the contrast & brightness of EUT to maximum.
- 3.5.4 PC system ran the self-test program “EMC Test” by windows XP and sent “H” characters to EUT through graphic card, the EUT’s screen displayed and filled with “H” pattern by its resolution (Via D-Sub Input).
- 3.5.5 Repeat above procedure from 3.5.3 to 3.5.4 for difference test mode.
- 3.5.6 The other peripherals devices were driven and operated during the test.
- 3.5.7 The test modes are as follows:

Test Mode
D-Sub 640*480@60Hz
D-Sub 1024*768@60Hz
D-Sub 1366*768@60Hz

3.6 Test Procedures

The EUT and peripherals were connected to the power mains through an Artificial Mains Network (AMN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line (Line & Neutral) were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to ANSI C63.4:2003 during conducted emission test.

The bandwidth of R&S Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7.

3.7 Test Results

< **PASS** >

The frequency and amplitude of the highest conducted emission relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

Test Mode	Page
D-Sub 640*480@60Hz	P12
D-Sub 1024*768@60Hz	P13
D-Sub 1366*768@60Hz	P14

NOTE 1 – The **bold test mode** listed above means the worst test mode.

NOTE 2 – Factor = Cable Loss + AMN Factor.

NOTE 3 – Emission Level = Meter Reading + Factor.

NOTE 4 – “QP” means “Quasi-Peak” values, “AV” means “Average” values.

NOTE 5 – The worst case is for D-Sub 640*480@60Hz test mode. The worst emission is detected at 19.950 MHz (Average Value) with corrected signal level of 32.38 dB (μV) (limit is 50.00 dB (μV)), when the Line of the EUT is connected to AMN.

EUT : LCD Monitor Temperature : 22°C

Model No. : E1641SX Humidity : 48%RH

Serial No. : E1103051-01/01 Date of Test : Mar 15, 2011

Test Mode : D-Sub 640*480@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.184	41.46	0.38	41.84	64.28	22.44	QP
	0.249	33.98	0.42	34.40	61.78	27.38	
	0.421	32.87	0.49	33.36	57.42	24.06	
	3.074	30.03	0.70	30.73	56.00	25.27	
	7.175	33.80	0.90	34.70	60.00	25.30	
	19.950	39.51	1.62	41.13	60.00	18.87	
	0.184	30.64	0.38	31.02	54.28	23.26	AV
	0.249	22.75	0.42	23.17	51.78	28.61	
	0.421	21.75	0.49	22.24	47.42	25.18	
	3.074	19.76	0.70	20.46	46.00	25.54	
	7.175	22.56	0.90	23.46	50.00	26.54	
	19.950	30.76	1.62	32.38	50.00	17.62	
Neutral	0.184	41.47	0.31	41.78	64.28	22.50	QP
	0.244	34.42	0.34	34.76	61.95	27.19	
	0.421	32.17	0.45	32.62	57.42	24.80	
	3.041	24.40	0.66	25.06	56.00	30.94	
	7.175	29.31	0.87	30.18	60.00	29.82	
	26.139	38.49	1.89	40.38	60.00	19.62	
	0.184	30.64	0.31	30.95	54.28	23.33	AV
	0.244	23.60	0.34	23.94	51.95	28.01	
	0.421	21.65	0.45	22.10	47.42	25.32	
	3.041	13.59	0.66	14.25	46.00	31.75	
	7.175	18.64	0.87	19.51	50.00	30.49	
	26.139	29.63	1.89	31.52	50.00	18.48	

TEST ENGINEER: WENCY YANG

EUT : LCD Monitor Temperature : 22°C
 Model No. : E1641SX Humidity : 48%RH
 Serial No. : E1103051-01/01 Date of Test : Mar 15, 2011
 Test Mode : D-Sub 1024*768@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.183	41.73	0.38	42.11	64.33	22.22	QP
	0.244	33.99	0.41	34.40	61.95	27.55	
	0.421	32.61	0.49	33.10	57.42	24.32	
	3.041	31.45	0.70	32.15	56.00	23.85	
	7.175	33.84	0.90	34.74	60.00	25.26	
	24.790	37.92	1.80	39.72	60.00	20.28	
	0.183	30.60	0.38	30.98	54.33	23.35	AV
	0.244	22.86	0.41	23.27	51.95	28.68	
	0.421	21.84	0.49	22.33	47.42	25.09	
	3.041	20.64	0.70	21.34	46.00	24.66	
	7.175	22.76	0.90	23.66	50.00	26.34	
	24.790	26.86	1.80	28.66	50.00	21.34	
Neutral	0.183	41.70	0.31	42.01	64.33	22.32	QP
	0.247	34.08	0.34	34.42	61.86	27.44	
	0.421	32.50	0.45	32.95	57.42	24.47	
	3.840	24.72	0.69	25.41	56.00	30.59	
	7.175	30.34	0.87	31.21	60.00	28.79	
	19.021	37.88	1.72	39.60	60.00	20.40	
	0.183	30.42	0.31	30.73	54.33	23.60	AV
	0.247	23.41	0.34	23.75	51.86	28.11	
	0.421	21.62	0.45	22.07	47.42	25.35	
	3.840	13.64	0.69	14.33	46.00	31.67	
	7.175	19.50	0.87	20.37	50.00	29.63	
	19.021	28.42	1.72	30.14	50.00	19.86	

TEST ENGINEER: WENCY YANG

EUT : LCD Monitor Temperature : 22°C

Model No. : E1641SX Humidity : 48%RH

Serial No. : E1103051-01/01 Date of Test : Mar 15 2011

Test Mode : D-Sub 1366*768@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.184	42.05	0.38	42.43	64.28	21.85	QP
	0.247	34.16	0.41	34.57	61.86	27.29	
	0.421	32.52	0.49	33.01	57.42	24.41	
	3.140	31.00	0.70	31.70	56.00	24.30	
	7.175	33.52	0.90	34.42	60.00	25.58	
	24.790	37.97	1.80	39.77	60.00	20.23	
	0.184	31.20	0.38	31.58	54.28	22.70	AV
	0.247	23.40	0.41	23.81	51.86	28.05	
	0.421	21.60	0.49	22.09	47.42	25.33	
	3.140	19.76	0.70	20.46	46.00	25.54	
	7.175	22.46	0.90	23.36	50.00	26.64	
	24.790	26.83	1.80	28.63	50.00	21.37	
Neutral	0.184	41.49	0.31	41.80	64.28	22.48	QP
	0.252	34.57	0.35	34.92	61.69	26.77	
	0.421	32.13	0.45	32.58	57.42	24.84	
	3.107	25.01	0.66	25.67	56.00	30.33	
	7.175	30.59	0.87	31.46	60.00	28.54	
	25.055	35.19	1.87	37.06	60.00	22.94	
	0.184	30.60	0.31	30.91	54.28	23.37	AV
	0.252	23.43	0.35	23.78	51.69	27.91	
	0.421	21.35	0.45	21.80	47.42	25.62	
	3.107	14.30	0.66	14.96	46.00	31.04	
	7.175	19.50	0.87	20.37	50.00	29.63	
	25.055	24.50	1.87	26.37	50.00	23.63	

TEST ENGINEER: WENCY YANG

4 RADIATED EMISSION TEST


4.1 Test Equipment

The following test equipments are used during the radiated emission test in a semi-anechoic chamber:


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESVS10	844594/001	Mar 07, 2011	Mar 07, 2012
2.	Preamplifier	Agilent	8447D	2944A10548	Mar 19, 2011	Sep 19, 2011
3.	Bi-log Antenna	TESEQ	CBL6112D	23192	Dec 01, 2010	Dec 01, 2011
4.	Spectrum	Agilent	E7405A	MY45106600	Mar 22, 2011	Mar 22, 2012
5.	50Ω Coaxial Switch	Anritsu	MP59B	6200426390	Mar 18, 2011	Sep 18, 2011
6.	Software	Audix	E3	SET00200 9912M295-2	--	--

4.2 Block Diagram of Test Setup

4.2.1 EUT and Peripherals

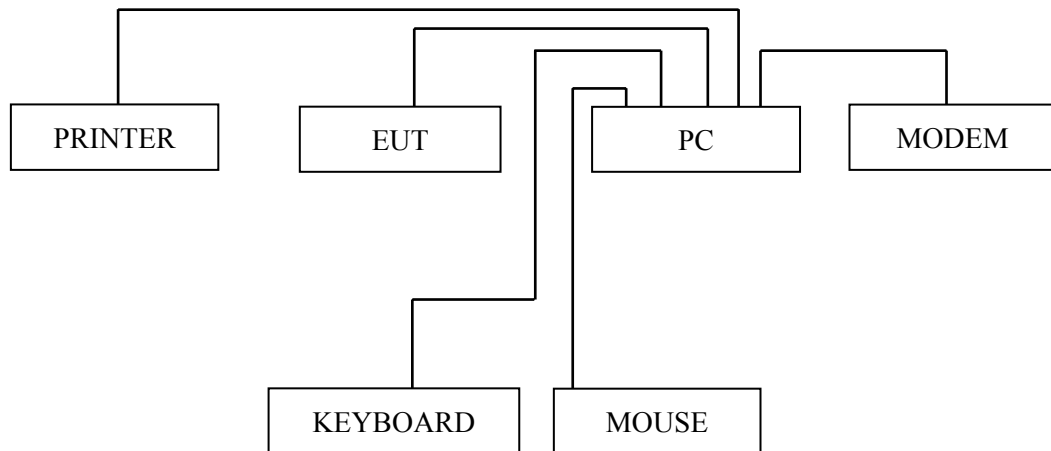

4.2.2 Radiated emission test setup

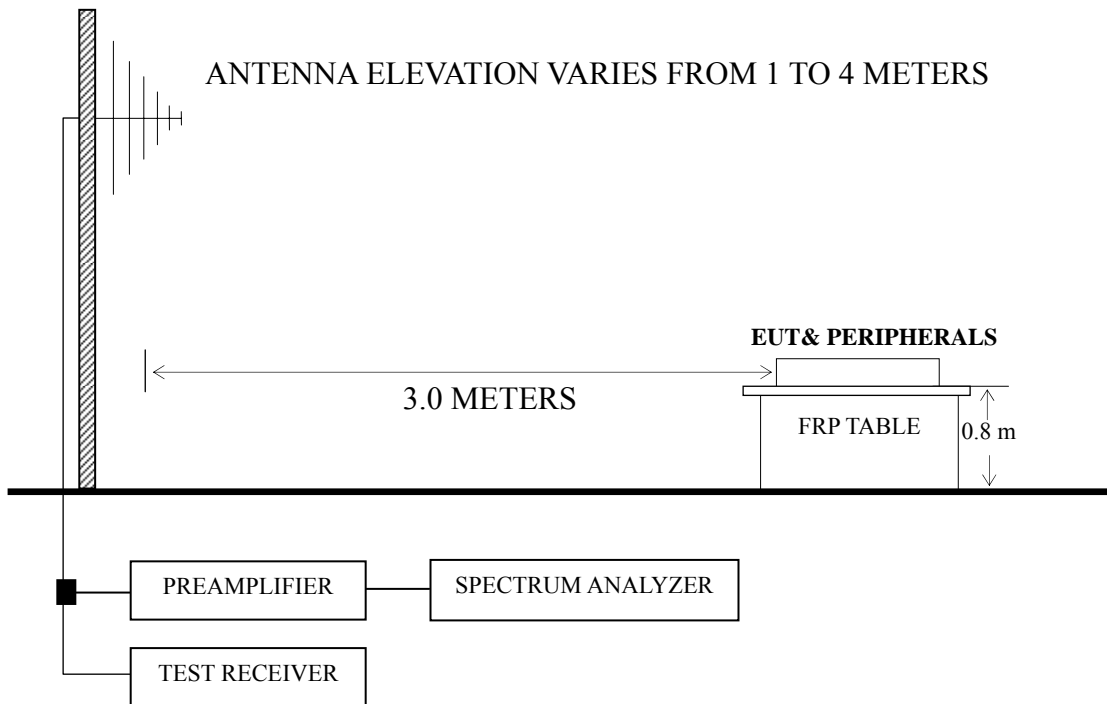

■ : 50 ohm Coaxial Switch

4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)]

Frequency (MHz)	Distance (m)	Field strength limits	
		($\mu\text{V/m}$)	dB ($\mu\text{V/m}$)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB ($\mu\text{V/m}$) = 20 log Emission Level ($\mu\text{V/m}$)

NOTE 2 - The tighter limit applies at the band edges.

NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

NOTE 4 - The limits shown are based on Quasi-peak value detector below or equal to 1GHz and Average value detector above 1GHz.

NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT.

4.4 Test Configuration

The configuration of the EUT and peripherals are same as those used in conducted emission test.

Please refer to Sec.3.4.

4.5 Operating Condition of EUT

Same as conducted emission test which is listed in Sec.3.5, except for the test setup replaced by Sec.4.2.

4.6 Test Procedures

The EUT and peripherals were placed on a FRP turntable that is 0.8 meter above ground. The FRP turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. Broadband antenna (Calibrated Bilog Antenna) was used as receiving antenna. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.4:2003 requirements during radiated emission test.

The I.F. bandwidth of Test Receiver R&S ESVS10 was set at 120 kHz below 1GHz.

The frequency range from 30 MHz to 1000MHz was checked for all test modes.

The test modes were done on radiated disturbance test and all the test results are listed in Sec.4.7.

4.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Test Mode	Page
D-Sub 640*480@60Hz	P19
D-Sub 1024*768@60Hz	P20
D-Sub 1366*768@60Hz	P22

NOTE 1 – **The bold test mode** listed above means the worst test mode.

NOTE 2 – Emission Level = Antenna Factor + Cable Loss + Meter Reading. (< 1GHz)

NOTE 3 – All readings are Quasi-Peak values.

NOTE 4 – The emission levels that are 20dB below the official limit are not reported.

NOTE 5 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

NOTE 6 – The worst case is for D-Sub 680*480@60Hz test mode. The worst emission at horizontal polarization was detected at 106.630 MHz with corrected signal level of 32.02 dB (μV/m) (limit is 43.50 dB (μV/m)), when the antenna was 1.00 m height and the turntable was at 110°. The worst emission at vertical polarization was detected at 44.550 MHz with corrected signal level of 33.70 dB (μV/m) (limit is 40.00 dB (μV/m)), when the antenna was 1.00 m height and the turntable was at 330°.

EUT : LCD Monitor Temperature : 22°C

Model No. : E1641SX Humidity : 60%RH

Serial No. : E1103051-01/01 Date of Test : Mar 19, 2011

Test Mode : D-Sub 640*480@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	74.620	10.19	10.21	0.92	21.32	40.00	18.68
	106.630	19.71	11.24	1.07	32.02	43.50	11.48
	149.310	18.84	10.43	1.24	30.51	43.50	12.99
	302.570	8.80	13.77	1.77	24.34	46.00	21.66
	483.960	11.20	17.42	2.24	30.86	46.00	15.14
	666.320	2.68	19.08	2.61	24.37	46.00	21.63
Vertical	44.550	22.48	10.47	0.75	33.70	40.00	6.30
	106.630	21.14	11.24	1.07	33.45	43.50	10.05
	199.750	20.57	9.81	1.45	31.83	43.50	11.67
	385.990	10.09	16.00	2.02	28.11	46.00	17.89
	557.680	14.40	17.96	2.38	34.74	46.00	11.26
	666.320	8.55	19.08	2.61	30.24	46.00	15.76

TEST ENGINEER: RAVEN JIN

EUT : LCD Monitor Temperature : 22°C
 Model No. : E1641SX Humidity : 60%RH
 Serial No. : E1103051-01/01 Date of Test : Mar 19, 2011
 Test Mode : D-Sub 1024*768@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (µV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (µV/m)	Limits dB (µV/m)	Margin (dB)
Horizontal	43.580	16.88	10.86	0.74	28.48	40.00	11.52
	105.660	20.63	11.26	1.07	32.96	43.50	10.54
	150.280	18.03	10.41	1.24	29.68	43.50	13.82
	285.110	11.80	13.28	1.72	26.80	46.00	19.20
	483.960	6.31	17.42	2.24	25.97	46.00	20.03
	871.960	4.82	20.38	2.98	28.18	46.00	17.82
Vertical	44.550	21.71	10.47	0.75	32.93	40.00	7.07
	105.660	20.74	11.26	1.07	33.07	43.50	10.43
	200.720	16.69	9.83	1.45	27.97	43.50	15.53
	299.660	6.05	13.70	1.77	21.52	46.00	24.48
	399.570	8.16	16.30	2.06	26.52	46.00	19.48
	666.320	5.25	19.08	2.61	26.94	46.00	19.06

TEST ENGINEER: RAVEN JIN

EUT : LCD Monitor Temperature : 22°C
 Model No. : E1641SX Humidity : 60%RH
 Serial No. : E1103051-01/01 Date of Test : Mar 19, 2011
 Test Mode : D-Sub 1366*768@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (µV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (µV/m)	Limits dB (µV/m)	Margin (dB)
Horizontal	43.580	20.49	10.86	0.74	32.09	40.00	7.91
	107.600	19.50	11.22	1.07	31.79	43.50	11.71
	199.750	11.62	9.81	1.45	22.88	43.50	20.62
	278.320	12.24	13.05	1.70	26.99	46.00	19.01
	373.380	13.37	15.72	1.99	31.08	46.00	14.92
	481.050	9.38	17.39	2.22	28.99	46.00	17.01
Vertical	44.550	8.35	10.47	0.75	19.57	40.00	20.43
	110.510	17.10	11.18	1.09	29.37	43.50	14.13
	159.010	12.57	10.27	1.28	24.12	43.50	19.38
	217.210	14.85	10.48	1.51	26.84	46.00	19.16
	282.200	11.51	13.21	1.72	26.44	46.00	19.56
	483.960	7.71	17.42	2.24	27.37	46.00	18.63

TEST ENGINEER: RAVEN JIN

5 DEVIATION TO TEST SPECIFICATIONS

None.


6 DEBUG DESCRIPTION

The following components are used during the countermeasure procedures:

Name	M/N	Specifications (mm)	Manufacturer	Location
SPONGE	LG END 3940TKK043C	90*10*2	EXPAN Electronics SUZHOU Co., Ltd.	See Internal Photos Figure 10
SPONGE	LG END 3940TKK043C	28*10*1	EXPAN Electronics SUZHOU Co., Ltd.	See Internal Photos Figure 10
SPONGE	LG END 3940TKK043C	120*10*1	EXPAN Electronics SUZHOU Co., Ltd.	See Internal Photos Figure 10
SPONGE	LG END 3940TKK043C	295*10*1	EXPAN Electronics SUZHOU Co., Ltd.	See Internal Photos Figure 10
SPONGE	LG END 3940TKK043C	155*10*1	EXPAN Electronics SUZHOU Co., Ltd.	See Internal Photos Figure 10
SPONGE	LG END 3940TKK043C	120*10*1	EXPAN Electronics SUZHOU Co., Ltd.	See Internal Photos Figure 10

Note: We had required the applicant and manufacturer that all electrical and mechanical devices employed for spurious radiation suppression, including any modifications made during certification testing, must be incorporated in each unit marked

TEST ENGINEER:



(RAVEN JIN)