



# FCC TEST REPORT

According to

**47 CFR, Part 2, Part 15 and CISPR PUB. 22**

Applicant	: LG Electronics USA
Address	: 1000 Sylvan Avenue Englewood Cliffs New Jersey United States
Manufacturer	: LG Electronics Nanjing Display Co., Ltd.
Address	: No.346, Yaoxin Road Economic & Technical Development Zone Nanjing China
Equipment	: LCD Monitor
Model No.	: E1941TX
FCC ID	: BEJE1941TX
Trade Name	: LG

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **CerpPASS Technology Corp.** the test report shall not be reproduced except in full.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.



## Table of Contents

<b>1. Summary of Test Procedure and Test Result .....</b>	<b>5</b>
<b>2. Test Configuration of Equipment under Test.....</b>	<b>6</b>
2.1. Feature of Equipment under Test .....	6
2.2. Test Manner.....	6
2.3. Description of Test System .....	7
2.4. Connection Diagram of Test System .....	7
2.5. General Information of Test .....	8
2.6. Measurement Uncertainty .....	8
<b>3. Test of Conducted Emission .....</b>	<b>9</b>
3.1. Test Limit .....	9
3.2. Test Procedures.....	9
3.3. Typical test Setup .....	10
3.4. Measurement equipment.....	10
3.5. Test Result and Data .....	11
<b>4. Test of Radiated Emission.....</b>	<b>12</b>
4.1. Test Limit .....	12
4.2. Test Procedures.....	13
4.3. Typical test Setup .....	13
4.4. Measurement equipment.....	14
4.5. Test Result and Data .....	15





# FCC TEST REPORT

According to

**47 CFR, Part 2, Part 15 and CISPR PUB. 22**

Applicant : LG Electronics USA

---

Address : 1000 Sylvan Avenue Englewood Cliffs New Jersey  
United States

---

Manufacturer : LG Electronics Nanjing Display Co., Ltd.

---

Address : No.346, Yaoxin Road Economic & Technical  
Development Zone Nanjing China

---

Equipment : LCD Monitor

---

Model No. : E1941TX

---

FCC ID : BEJE1941TX

---

Trade Name : LG

---

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 – 2003** and the energy emitted by this equipment was **passed CISPR PUB. 22 and FCC Part 15** in both radiated and conducted emission class B limits. Testing was carried out on Oct 26, 2010 at **CerpPASS Technology Corp.**

Documented By:

Approved By:

Cathy Chen/ Administration

Clinton Kao/ Technical director



## 1. Summary of Test Procedure and Test Result

Test Item	Normative References	Test Result
Conducted Emission	ANSI C63.4-2003 FCC Part 15 Subpart B	PASS
Radiated Emission	ANSI C63.4-2003 FCC Part 15 Subpart B	PASS



## 2. Test Configuration of Equipment under Test

### 2.1. Feature of Equipment under Test

LCD Monitor	Model No:	E1941TX
VGA Cable	Shielded, 1.8m, with two ferrite cores bonded	
DVI Cable	Shielded, 1.8m, with two ferrite cores bonded	
Power Supply cable	Non-Shielded, 1.8m	

### 2.2. Test Manner


Test Software	
a	During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
b	The complete test system included the PC, USB Mouse, USB Keyboard, Printer and EUT for EMI test.
c	During the test, setup up the EUT and all system, turn on the power of all Equipments, run the EMC test software "H", set the contrast control to maximum, set the brightness control to maximum, use white letters on a black background to represent all colors, make the EUT at the test mode and it is normal operation, and then test.
The pre-test modes	
	Test Mode 1: Full system (VGA mode 1024*768@75Hz)
	Test Mode 2: Full system (VGA mode 1366*768@60Hz)
	Test Mode 3: Full system (VGA mode 800*600@60Hz )
	Test Mode 4: Full system (DVI mode 1366*768@60Hz)
	Test Mode 5: Full system (DVI mode 1024*768@75Hz)
	Test Mode 6: Full system (DVI mode 800*600@60Hz)
Select the worst case of the pre-test modes as the final test mode	
	Test Mode 1: Full system (VGA mode 1024*768@75Hz)



### 2.3. Description of Test System

No	Device	Manufacturer	Model No.	Description
1	PC	Dell	DCSM	N/A
2	USB Keyboard	DELL	SK-8115	N/A
3	USB Mouse	DELL	G0K02XYK	N/A
4	Printer	Epson	EX3	N/A

### 2.4. Connection Diagram of Test System

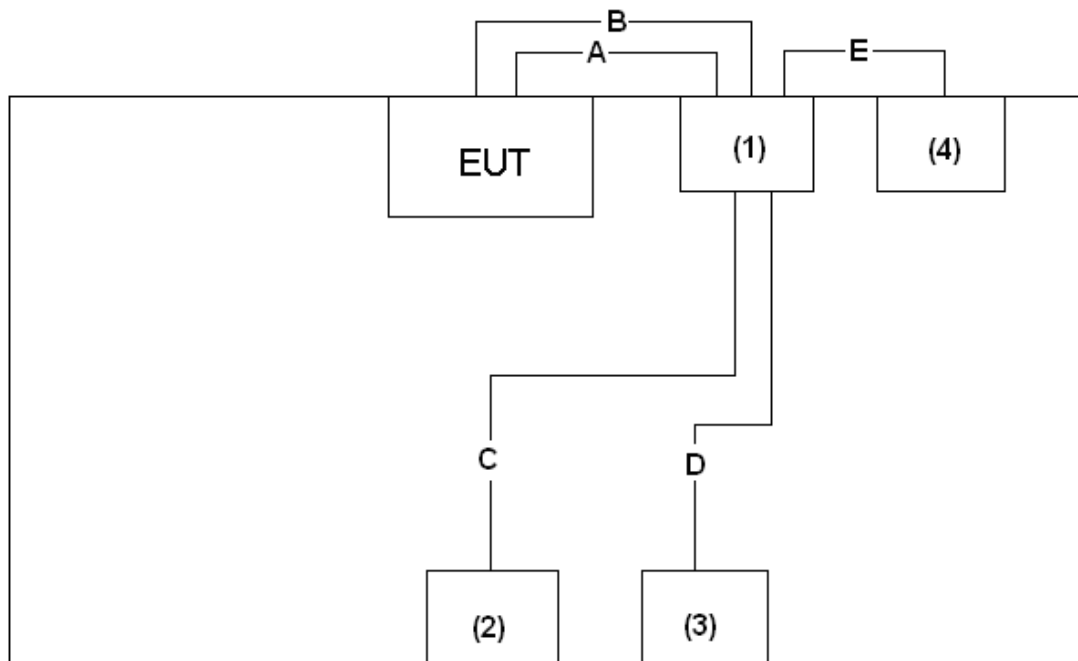

No	Cable	Quantity	Description
A	VGA Cable	1	Shielded, 1.8m, with two ferrite cores bonded
B	DVI Cable	1	Shielded, 1.8m, with two ferrite cores bonded
C	USB Cable	1	Shielded, 1.8m, with one ferrite core bonded
D	USB Cable	1	Shielded, 1.5m
E	Parallel Cable	1	Shielded, 1.8m



2.5. General Information of Test

Test Site:	CerpPASS Technology Corp.
Performand Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2
VCCI Registration Number :	T-343 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test below 1GHz G-227 for Radiated emission test above 1GHz
Frequency Range Investigated :	Conducted Emission Test: from 150kHz to 30 MHz Radiated Emission Test: from 30 MHz to 1,000 MHz Radiated Emission Test: from 1GHz to 18GHz
Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 3 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.

Laboratory accreditation



2.6. Measurement Uncertainty

Conducted Emission		
The measurement uncertainty is evaluated as ± 2.71 dB.		
Radiated Emission		
(30MHz -1000MHz)	Horizontal	The measurement uncertainty is evaluated as ±3.89dB.
	Vertical	The measurement uncertainty is evaluated as ± 3.59 dB.
(1G-18GHz)	Horizontal	The measurement uncertainty is evaluated as ± 2.31 dB.
	Vertical	The measurement uncertainty is evaluated as ± 2.15 dB.



### 3. Test of Conducted Emission

#### 3.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

#### 3.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



### 3.3. Typical test Setup

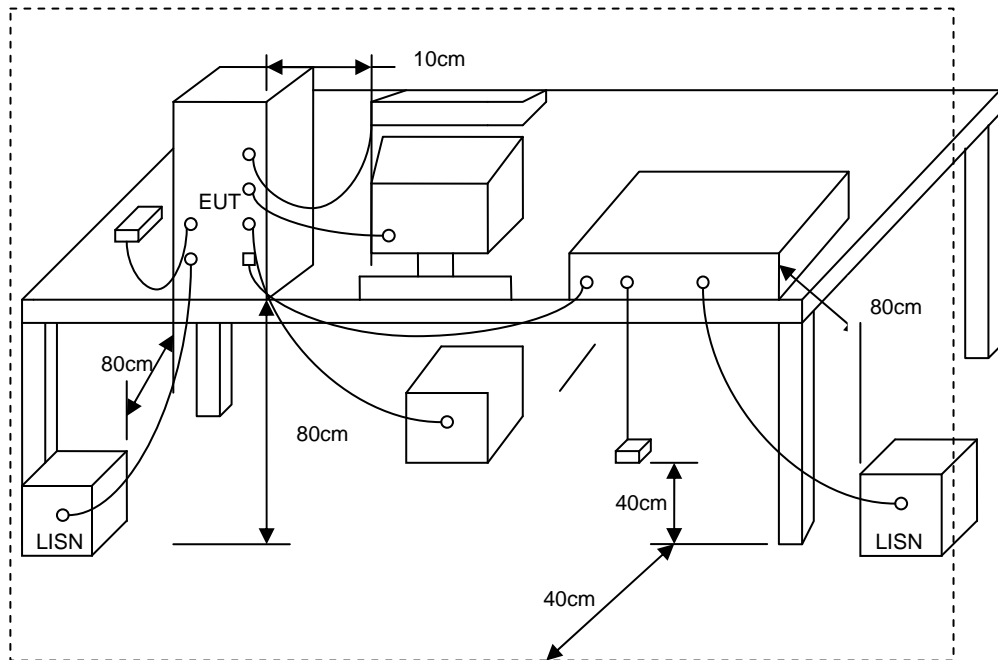


### 3.4. Measurement equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date
Test Receiver	R&S	ESCI	100565	2010.01.15
AMN	R&S	ESH2-Z5	100182	2010.06.23
Two-Line V-Network	R&S	ENV216	100325	2010.04.18
ISN	FCC	FCC-TLISN-T2-02	20379	2010.06.23
ISN	FCC	FCC-TLISN-T4-02	20380	2010.06.23
ISN	FCC	FCC-TLISN-T8-02	20381	2010.06.23
Current Probe	R&S	EZ-17	100303	2010.06.23
Attenuator	R&S	ESH3-Z2	100529	2010.01.11
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2010.08.14



### 3.5. Test Result and Data

Test Mode :	Mode 1: Full system (VGA mode 1024*768@75Hz)		
AC Power :	AC 120V/60Hz	Phase :	L&N
EUT :	LCD Monitor	Model No.:	E1941TX
Temperature :	22°C	Humidity :	50%
Pressur(mbar) :	1002	Date :	2010/10/20

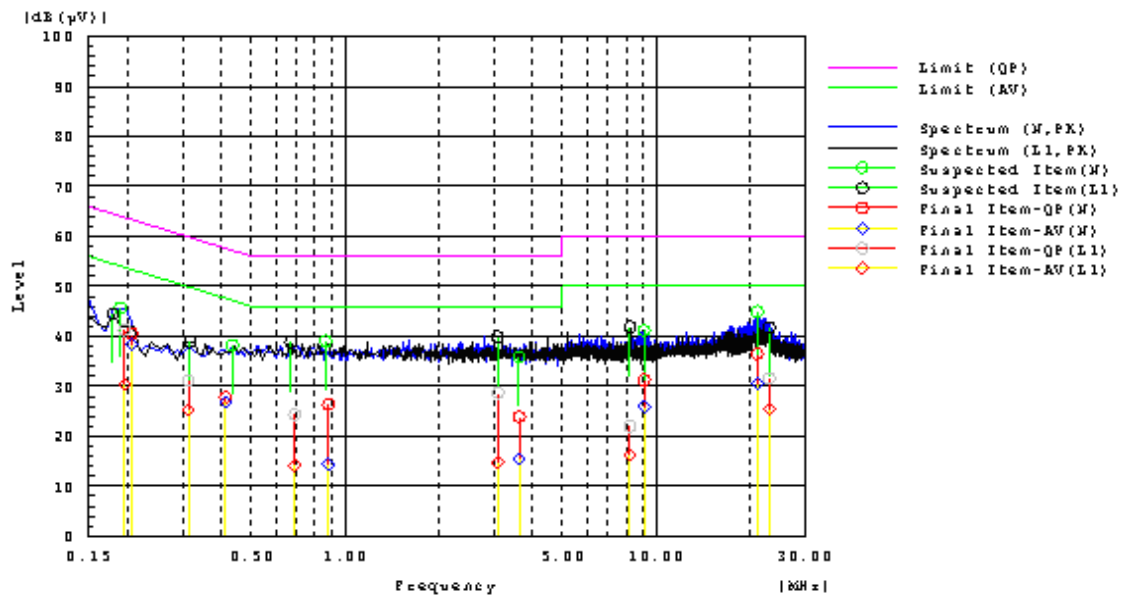

Frequency MHz	Line Phase	Reading dB(uV) QP	Reading dB(uV) AV	Factor dB	Level dB(uV) QP	Level dB(uV) AV	Limit dB(uV) QP	Limit dB(uV) AV	Margin dB QP	Margin dB AV	Pass/Fail
0.19501	L1	21.4	10.5	19.9	41.3	30.4	63.8	53.8	22.5	23.4	Pass
0.68961	L1	4.5	-5.7	19.8	24.3	14.1	56.0	46.0	31.7	31.9	Pass
3.10152	L1	9.0	-5.0	19.7	28.7	14.7	56.0	46.0	27.3	31.3	Pass
23.0348	L1	11.9	5.9	19.6	31.5	25.5	60.0	50.0	28.5	24.5	Pass
8.233	L1	2.3	-3.5	19.7	22.0	16.2	60.0	50.0	38.0	33.8	Pass
0.31335	L1	11.3	5.2	19.9	31.2	25.1	59.9	49.9	28.7	24.8	Pass
0.20626	N	21.0	18.9	19.5	40.5	38.4	63.4	53.4	22.9	15.0	Pass
9.1304	N	11.5	6.1	19.8	31.3	25.9	60.0	50.0	28.7	24.1	Pass
21.1308	N	16.6	10.7	19.9	36.5	30.6	60.0	50.0	23.5	19.4	Pass
0.88439	N	6.9	-5.1	19.5	26.4	14.4	56.0	46.0	29.6	31.6	Pass
3.62561	N	4.3	-4.2	19.6	23.9	15.4	56.0	46.0	32.1	30.6	Pass
0.41209	N	8.3	7.3	19.5	27.8	26.8	57.6	47.6	29.8	20.8	Pass

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: cheney yan



## 4. Test of Radiated Emission

### 4.1. Test Limit

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-2003. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 3.2. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (m)	Level (dBuV/m)	Level (dBuV/m)
30 - 88	3	40(QP)	N/A
88 - 216	3	43(QP)	N/A
216-960	3	46(QP)	N/A
960-1000	3	54(QP)	N/A
1000-18000	3	74(PK)	54(AV)

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

Frequency (MHz)	Distance Meters	Radiated (dB $\mu$ V/ M)
30-230	10	30
230-1000	10	37




## 4.2. Test Procedures

- a. The EUT was placed on a Rota table top 0.8 meter above ground.
- b. The EUT and its simulators are placed on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters or 1 meter.
- c. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.
- d. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.
- e. Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120KHz and the frequency range from 1GHz to 18GHz using a receiver bandwidth of 1MHz.


## 4.3. Typical test Setup

### Below 1GHz Test Setup

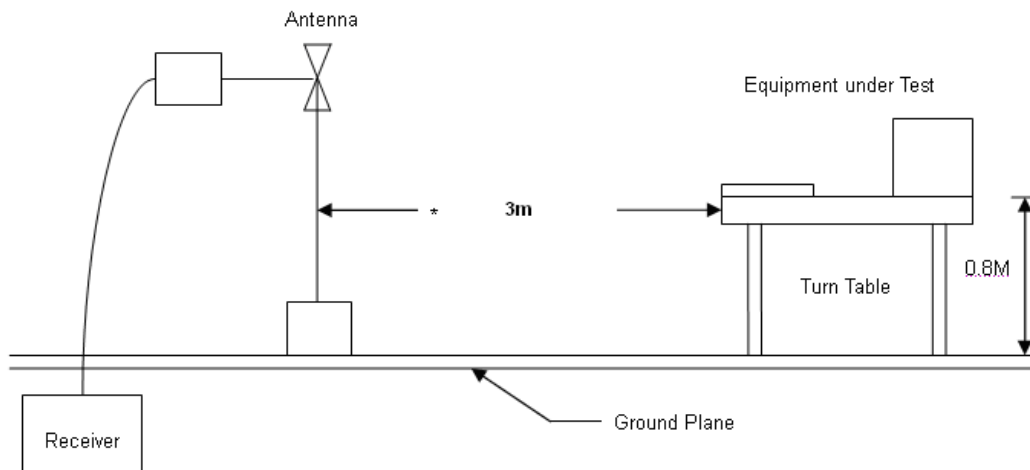



Above 1GHz Test Setup

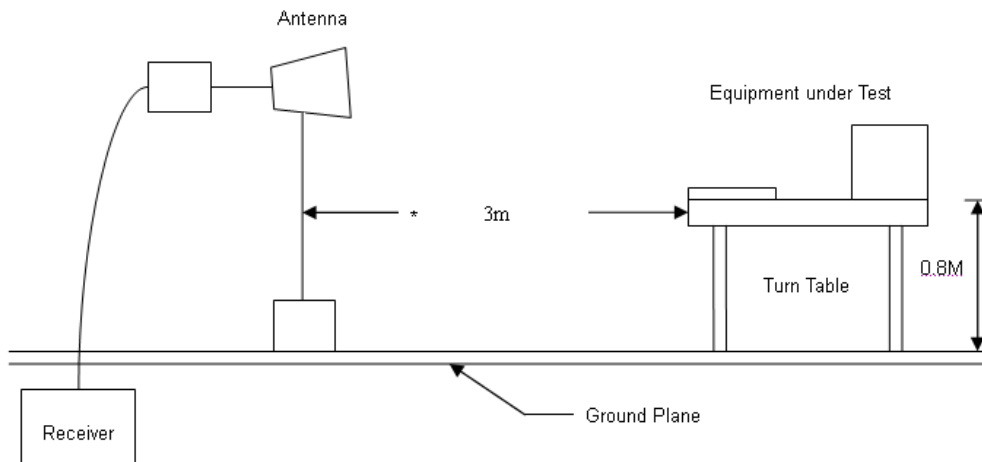

4.4. Measurement equipment


Instrument	Model No.	Manufacturer	Serial No.	Calibration Date
EMI Test Receiver	R&S	ESCI	100563	2010.06.23
H64 Amplifier	HP	8447F	3113A05582	2010.08.14
Preamplifier	Agilent	8449B	ED-HE-EMI-077	2010.02.10
Ultra Broadband Antenna	R&S	HL562	100363	2009.11.03
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2009.11.10
Spectrum Analyzer	R&S	FSP40	100324	2010.08.14
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2010.08.17



### 4.5. Test Result and Data

#### Under 1G

Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/10/26 - 14:55
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : LCD Monitor	Probe : (30-1000MHz)- HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1: Full system (VGA mode 1024*768@75Hz)

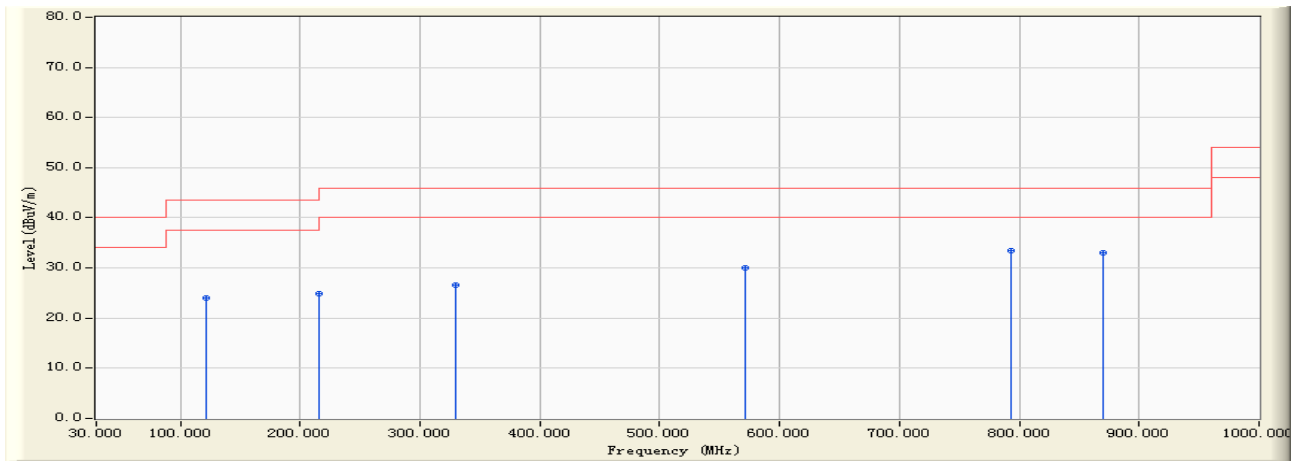


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	121.570	-13.235	37.360	24.125	-19.375	43.500	QUASIPeAK	200.000	241.500
2	215.930	-11.628	36.470	24.842	-18.658	43.500	QUASIPeAK	200.000	286.600
3	329.870	-10.984	37.480	26.495	-19.505	46.000	QUASIPeAK	200.000	279.500
4	571.190	-4.235	34.280	30.044	-15.956	46.000	QUASIPeAK	100.000	214.500
5	* 793.170	-0.748	34.250	33.503	-12.497	46.000	QUASIPeAK	200.000	345.600
6	869.710	0.115	32.870	32.985	-13.015	46.000	QUASIPeAK	200.000	217.500

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/10/26 - 14:55
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : LCD Monitor	Probe : (30-1000MHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 1: Full system (VGA mode 1024*768@75Hz)

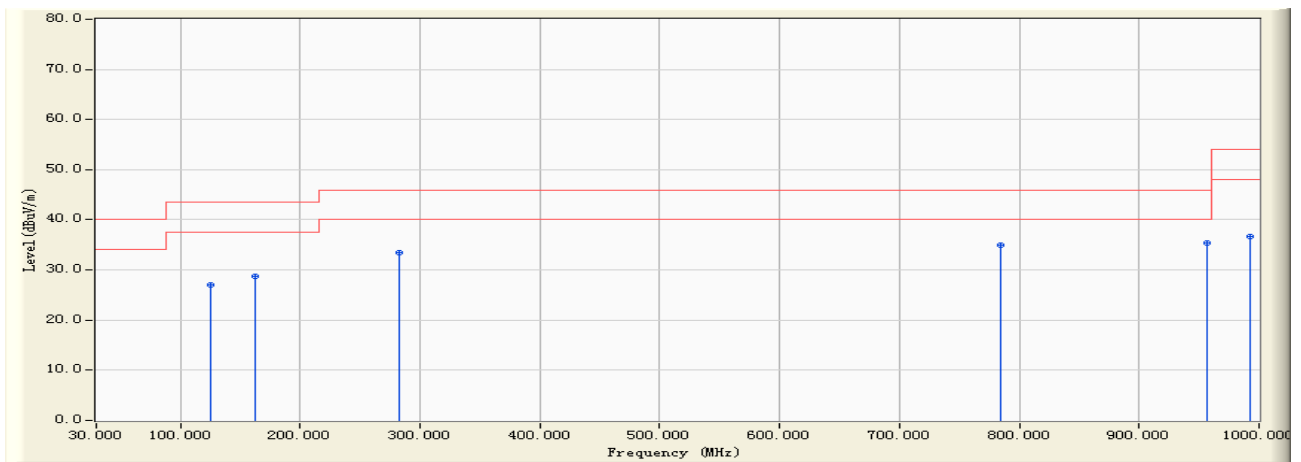

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	125.630	-13.097	40.170	27.073	-16.427	43.500	QUASIPeAK	100.000	243.600
2	162.850	-10.666	39.420	28.753	-14.747	43.500	QUASIPeAK	100.000	322.800
3	282.530	-10.443	43.870	33.428	-12.572	46.000	QUASIPeAK	100.000	175.600
4	784.520	2.284	32.580	34.865	-11.135	46.000	QUASIPeAK	100.000	152.600
5	* 956.650	4.949	30.520	35.469	-10.531	46.000	QUASIPeAK	100.000	241.500
6	992.540	5.025	31.570	36.595	-17.405	54.000	QUASIPeAK	200.000	163.500


Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Above 1G:

Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/10/26 - 15:47
Limit : FCC_15_03M_PK	Margin : 6
EUT : LCD Monitor	Probe : (1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1: Full system (VGA mode 1024*768@75Hz)

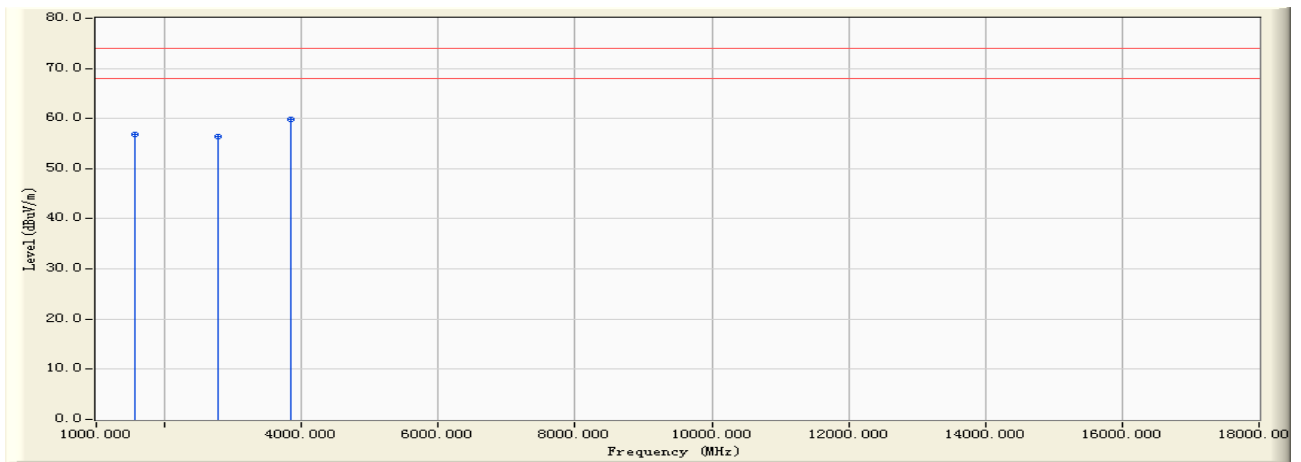


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	1564.740	4.515	52.400	56.915	-17.085	74.000	PEAK	200.000	313.700
2	2784.690	9.870	46.500	56.370	-17.630	74.000	PEAK	200.000	214.100
3	* 3845.580	10.950	48.900	59.850	-14.150	74.000	PEAK	400.000	267.500

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/10/26 - 15:47
Limit : FCC_15_03M_AV	Margin : 6
EUT : LCD Monitor	Probe : (1-18GHz)- HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1: Full system (VGA mode 1024*768@75Hz)

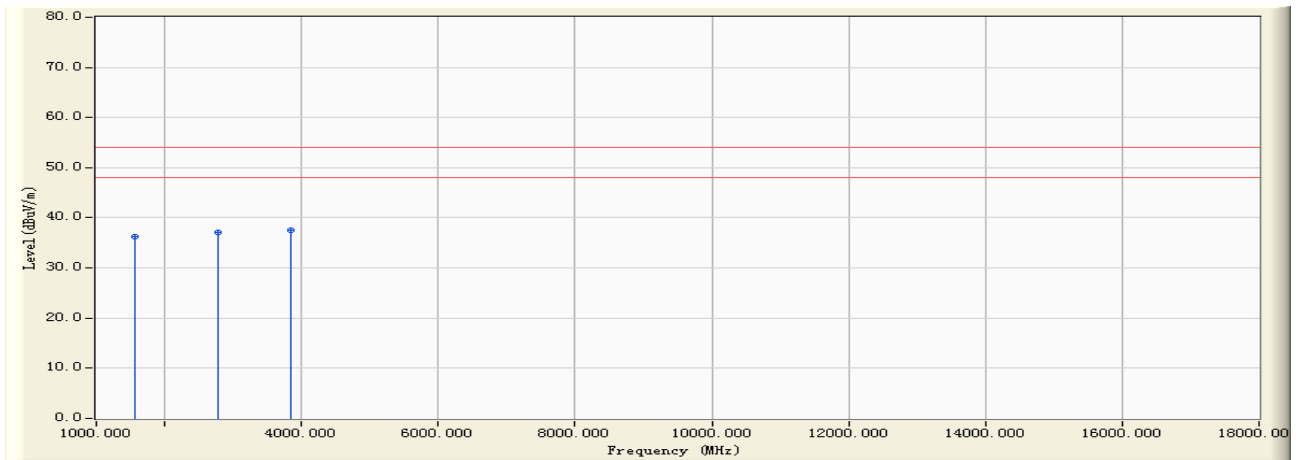


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	1564.740	4.515	31.700	36.215	-17.785	54.000	AVERAGE	200.000	313.700
2	2784.690	9.870	27.200	37.070	-16.930	54.000	AVERAGE	200.000	214.100
3	* 3845.580	10.950	26.500	37.450	-16.550	54.000	AVERAGE	400.000	267.500

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/10/26 - 15:47
Limit : FCC_15_03M_PK	Margin : 6
EUT : LCD Monitor	Probe : (1-18GHz)- VERTICAL
Power : AC 120V/60Hz	Note : Mode 1: Full system (VGA mode 1024*768@75Hz)

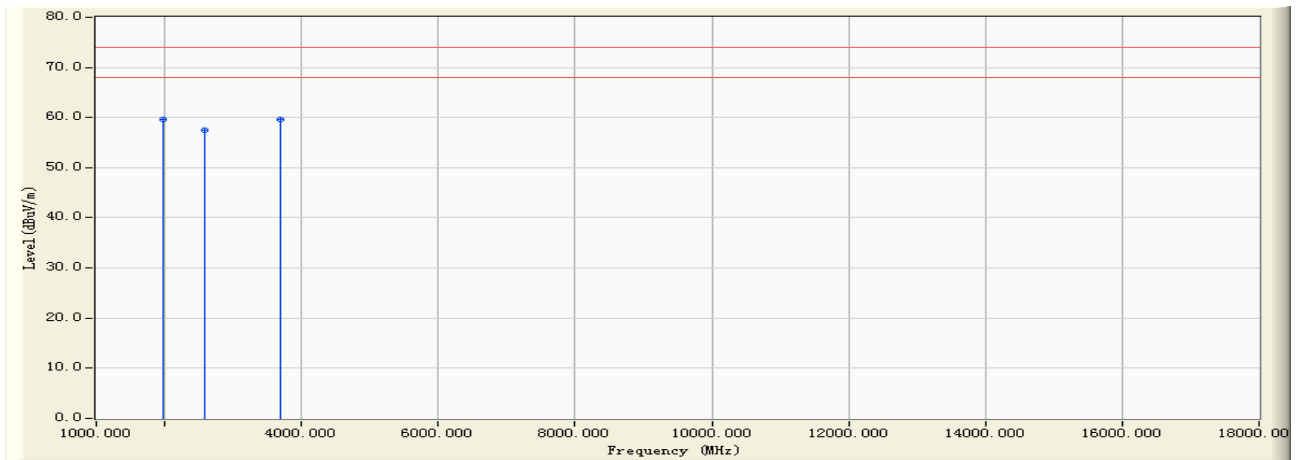


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	1974.780	9.158	50.400	59.558	-14.442	74.000	PEAK	100.000	256.900
2	2587.130	10.520	46.900	57.420	-16.580	74.000	PEAK	100.000	287.200
3	* 3697.280	10.950	48.700	59.650	-14.350	74.000	PEAK	100.000	223.200

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/10/26 - 15:47
Limit : FCC_15_03M_AV	Margin : 6
EUT : LCD Monitor	Probe : (1-18GHz)- VERTICAL
Power : AC 120V/60Hz	Note : Mode 1: Full system (VGA mode 1024*768@75Hz)

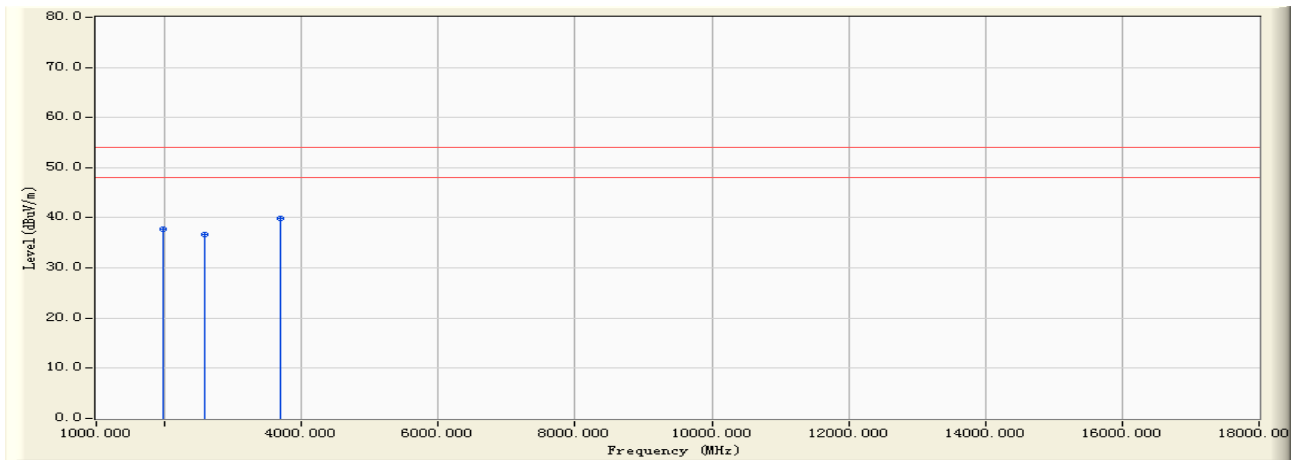

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	1974.780	9.158	28.500	37.658	-16.342	54.000	AVERAGE	100.000	256.900
2	2587.130	10.520	26.200	36.720	-17.280	54.000	AVERAGE	100.000	287.200
3	* 3697.280	10.950	28.900	39.850	-14.150	54.000	AVERAGE	100.000	223.200

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Test engineer: Fred Guo