

































































































































## 8. Frequency Stability

### 8.1. Limit

#### FCC

- § 2.1055 (a), § 2.1055 (d) & following:

- §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table of this section.

For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is +/- 2.5 ppm.

- §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### IC

- RSS-132 Issue 3


5.3, the carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations and  $\pm 1.5$  ppm for base stations.

- RSS-133 Issue 6

6.3, the carrier frequency shall not depart from the reference frequency, in excess of  $\pm 2.5$  ppm for mobile stations and  $\pm 1.0$  ppm for base stations.

### 8.2. Test Procedure

1. Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Mobile Test Unit via feed-through attenuators.
2. The EUT was placed inside the temperature chamber.
3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from Mobile Test Unit.

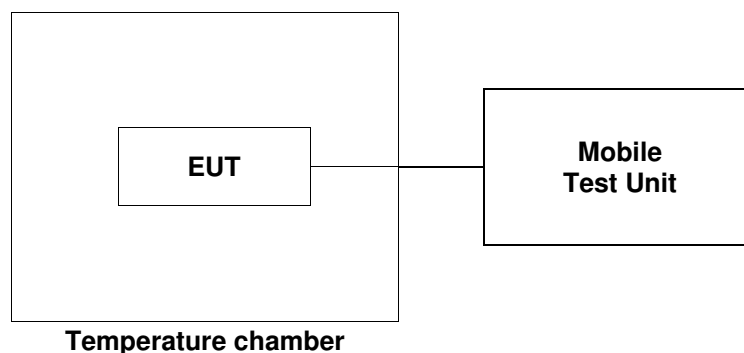

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*



**GSM 1 900 mode at middle channel**

| Reference Frequency: 1 880.0 MHz        |                                   |                                    |          |
|-----------------------------------------|-----------------------------------|------------------------------------|----------|
| Frequency Stability versus Temperature  |                                   |                                    |          |
| Environment Temperature (°C)            | Power Supplied (V <sub>dc</sub> ) | Frequency Measure with Time Elapse |          |
|                                         |                                   | Frequency Error (Hz)               | Ppm      |
| 50                                      | 12                                | 8                                  | 0.004 3  |
| 40                                      |                                   | 7                                  | 0.003 7  |
| 30                                      |                                   | -5                                 | -0.002 7 |
| 23                                      |                                   | -3                                 | -0.001 6 |
| 10                                      |                                   | 2                                  | 0.001 1  |
| 0                                       |                                   | 1                                  | 0.000 5  |
| -10                                     |                                   | 6                                  | 0.003 2  |
| -20                                     |                                   | -5                                 | -0.002 7 |
| -30                                     |                                   | 7                                  | 0.003 7  |
| Frequency Stability versus Power Supply |                                   |                                    |          |
| Environment Temperature (°C)            | Power Supplied (V <sub>dc</sub> ) | Frequency Measure with Time Elapse |          |
|                                         |                                   | Frequency Error (Hz)               | ppm      |
| 23                                      | 13.8                              | 3                                  | 0.001 6  |
|                                         | 10.2                              | -1                                 | -0.000 5 |

**- End of the Test Report -**

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*