



On your side

**HCT**

# TEST REPORT

FCC/ISED BT Test for GVMRB  
Certification

**APPLICANT**  
LG Electronics Inc.

**REPORT NO.**  
HCT-RF-2302-FI005

**DATE OF ISSUE**  
February 23, 2023

**Tested by**  
Kyung Jun Woo



**Technical Manager**  
Jong Seok Lee

Accredited by KOLAS, Republic of KOREA

**HCT CO., LTD.**  
*BongJai Huh*  
BongJai Huh / CEO



HCT CO.,LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401



# TEST REPORT

FCC/ISED BT Test  
for GVMRB

**REPORT NO.**

HCT-RF-2302-FI005

**DATE OF ISSUE**

February 23, 2023

**Additional Model**

-

**Applicant**

**LG Electronics Inc.**

222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Republic of Korea

**Eut Type  
Model Name**

Generic Video Module  
GVMRB

**FCC ID**

BEJGVMRB

**IC**

2703H-GVMRB

**Max. RF Output Power**

Ant. 1: 5.526 dBm (3.57 mW)  
Ant. 2: 5.220 dBm (3.33 mW)

**FCC Rule Part(s)**

Part 15 subpart C 15.247

**ISED Rule Part(s)**

RSS-247 Issue 2 (February 2017)  
RSS-Gen Issue 5\_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	February 23, 2023	Initial Release

Test Report Statement:

KOLAS Statement:

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (KOLAS Accreditation No. KT197)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

If this report is required to confirmation of authenticity, please contact to [www.hct.co.kr](http://www.hct.co.kr)

## CONTENTS

1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. Requirements for Bluetooth transmitter(15.247/ RSS-247)	7
3. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	9
4. INSTRUMENT CALIBRATION	9
5. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
6. ANTENNA REQUIREMENTS	10
7. MEASUREMENT UNCERTAINTY	11
8. DESCRIPTION OF TESTS	12
9. SUMMARY OF TEST RESULTS	33
10. TEST RESULT	34
10.1 PEAK POWER	34
10.2 BAND EDGES	39
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)	44
10.4 NUMBER OF HOPPING FREQUENCY	54
10.5 TIME OF OCCUPANCY (DWELL TIME)	57
10.6 SPURIOUS EMISSIONS	65
10.6.1 CONDUCTED SPURIOUS EMISSIONS	65
10.6.2 RADIATED SPURIOUS EMISSIONS	72
10.6.3 RADIATED RESTRICTED BAND EDGES	80
10.7 RECEIVER SPURIOUS EMISSIONS	85
11. LIST OF TEST EQUIPMENT	86
12. ANNEX A_ TEST SETUP PHOTO	88

## 1. EUT DESCRIPTION

Model	GVMRB
EUT Type	Generic Video Module
Power Supply	DC 12 V
Frequency Range	2 402 MHz – 2 480 MHz
Max. RF Output Power	Ant. 1: 5.526 dBm (3.57 mW) Ant. 2: 5.220 dBm (3.33 mW)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi$ /4DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79 Channels, Minimum 20 Channels(AFH)
Date(s) of Tests	January 02, 2023 ~ February 09, 2023
EUT serial numbers	Radiated: 211950362 Conducted : 211950348
Antenna	Type: PCB Trace Antenna Peak gain: Ant. 1: 6.39 dBi Ant. 2: 6.94 dBi
PMN (Product Marketing Number)	Generic Video Module
HVIN (Hardware Version Identification Number)	GVMRB
FVIN (Firmware Version Identification Number)	1.0
HMN (Host Marketing Name)	N/A

## ANTENNA CONFIGURATIONS

1. Below are the possible configurations

Configurations	SISO		Dual BT
	Ant. 1(core-0)	Ant. 2(Core-1)	Ant. 1 & Ant. 2
Bluetooth	O	O	X

**Note:**

- 1) O = Support, X = Not Support
- 2) SISO = Single Input Single Output
- 3) Dual BT = Single Output 1& 2

## 2. Requirements for Bluetooth transmitter(15.247/ RSS-247)

This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.

- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.

- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

- RSS-247 5.1 (a): The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013, KDB 558074) is used in the measurement of the test device.

#### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the RSS-GEN issue 5, RSS-247 issue 2.

#### GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector and add the DCCF calculations.



## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

### According to RSS-GEN(Issue 5) Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.52 ( Confidence level about 95 %, $k=2$ )

## 8. DESCRIPTION OF TESTS


### 8.1. Conducted Maximum Peak Output Power

#### Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W.  
For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

#### Test Configuration

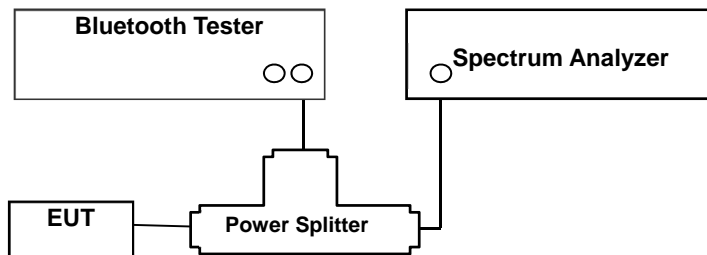

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013 & Procedure 10(b)(6)(i) in KDB 558074 v05r02)

- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW ≥ RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

#### Sample Calculation


$$\begin{aligned} \text{Output Power} &= \text{Spectrum Measured Power} + \text{Power Splitter loss} + \text{Cable loss(2 ea)} \\ &= 10 \text{ dBm} + 6 \text{ dB} + 1.5 \text{ dB} = 17.5 \text{ dBm} \end{aligned}$$

## 8.2. Conducted Band Edge(Out of Band Emissions)

### Limit

According to § 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### Test Configuration

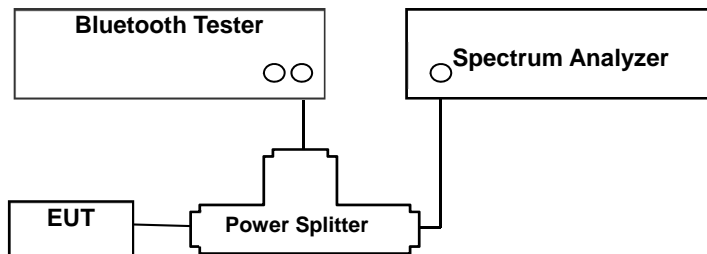

### Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

### 8.3. Frequency Separation & 20 dB Bandwidth

#### Limit

According to § 15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### Test Configuration

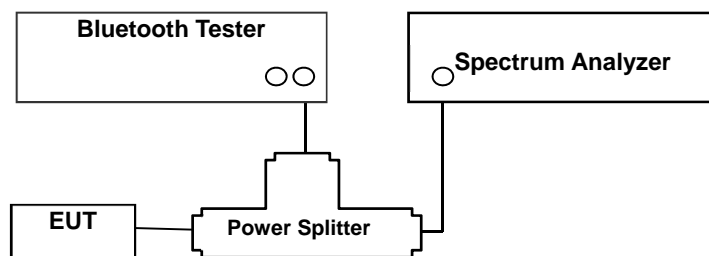

#### Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.  
And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013 & Procedure 10(b)(6)(iii) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW  $\geq$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

**Test Procedure (20 dB Bandwidth)**

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1 % to 5 % of the OBW.
- 3) VBW  $\geq 3 \times$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

#### 8.4. Number of Hopping Frequencies

##### Limit

According to § 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

##### Test Configuration

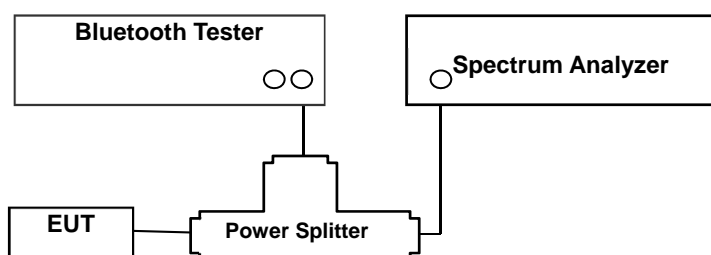

##### Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013 & Procedure 10(b)(4) in KDB 558074 v05r02)

- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW  $\geq$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.




## 8.5. Time of Occupancy

### Limit

According to § 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### Test Configuration

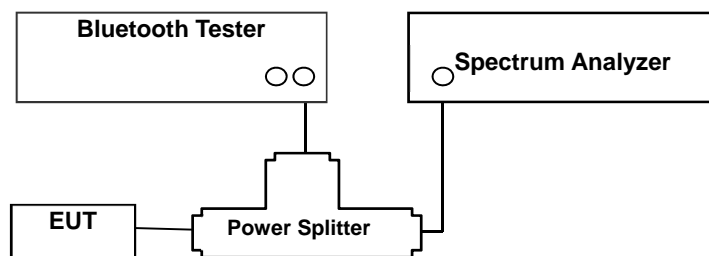

### Test Procedure

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013 & Procedure 10(b)(6)(iv) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

### Sample Calculation

The following calculation process is not relevant to our measurement results. It is just an example.

(1) Non-AFH Mode

- DH 5 (GFSK) :  $2.890 \times (1600/6)/79 \times 31.6 = 308.27$  (ms)
- 2-DH 5 ( $\pi/4$ DQPSK) :  $2.890 \times (1600/6)/79 \times 31.6 = 308.27$  (ms)
- 3-DH 5 (8DPSK) :  $2.890 \times (1600/6)/79 \times 31.6 = 308.27$  (ms)

(2) AFH Mode

- DH 5 (GFSK) :  $2.890 \times (800/6)/20 \times 8.0 = 154.13$  (ms)
- 2-DH 5 ( $\pi/4$ DQPSK) :  $2.890 \times (800/6)/20 \times 8.0 = 154.13$  (ms)
- 3-DH 5 (8DPSK) :  $2.890 \times (800/6)/20 \times 8.0 = 154.13$  (ms)

Note :

DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving.

Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.667 times of appearance.

Each tx-time per appearance of DH5 is 2.890 ms.


Dwell time = Tx-time x 106.667 = 308.27 (ms)

## 8.6. Conducted Spurious Emissions

### Limit

Conducted > 20 dBc

### Test Configuration

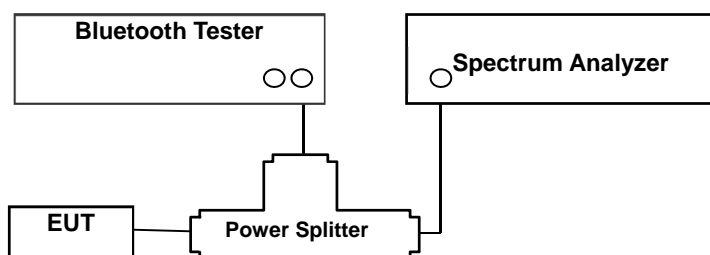

### Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	6.55
100	6.61
200	6.63
300	6.65
400	6.64
500	6.63
600	6.69
700	6.70
800	6.68
900	6.71
1000	6.85
2000	7.02
2400	7.20
2500	7.20
3000	7.36
4000	7.49
5000	7.84
6000	8.02
7000	8.47
8000	8.47
9000	8.58
10000	8.67
11000	8.79
12000	8.84
13000	8.98
14000	9.03
15000	9.09
16000	9.26
17000	9.56
18000	9.72
19000	9.75
20000	9.65
21000	9.68
22000	9.57
23000	9.83
24000	10.27
25000	10.09
26000	10.22

Note :

1. 2400 ~ 2500 MHz is fundamental frequency range.
2. Factor = Cable loss(2 EA) + Splitter loss(6 dB)

### 8.7. Radiated Test

**Limit**

**FCC**

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

**ISED**


Frequency (MHz)	Field Strength ( $\mu$ A/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

**FCC&ISED**


Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

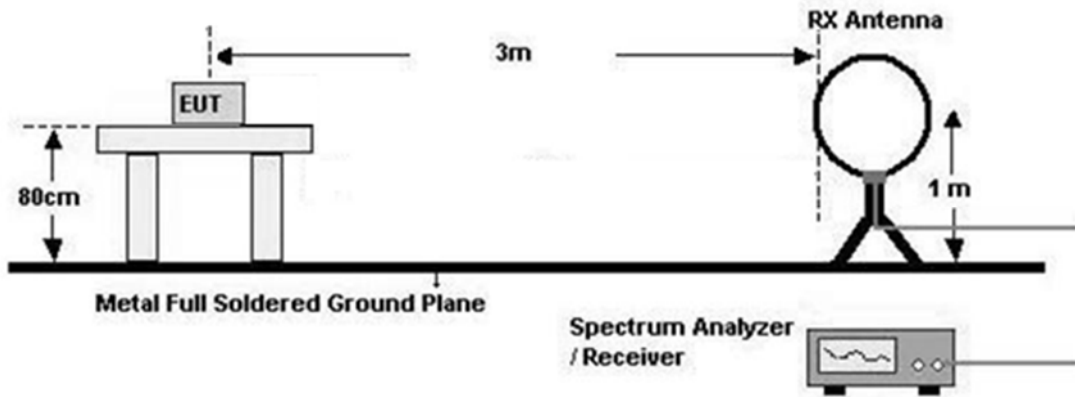

30 MHz - 1 GHz

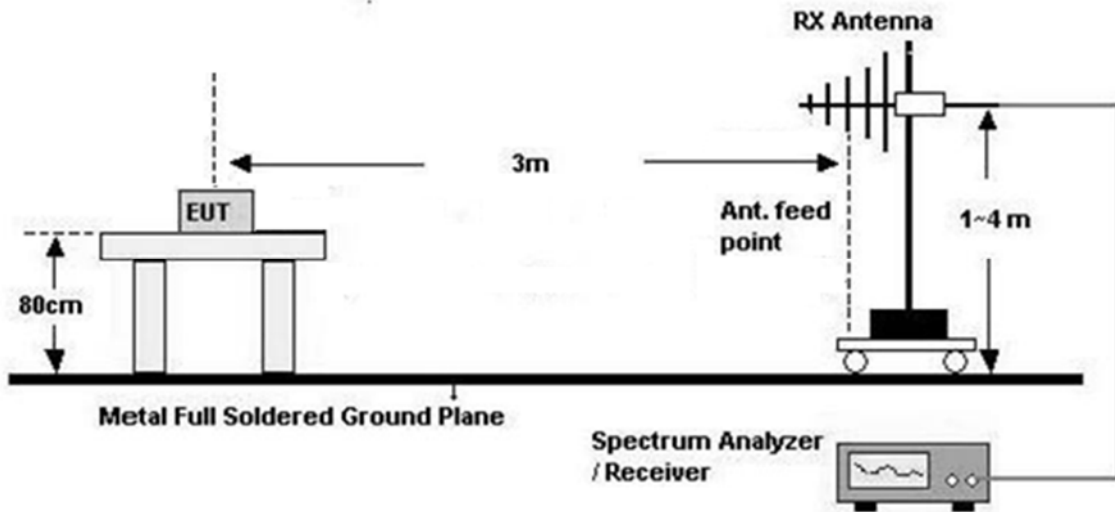

Above 1 GHz

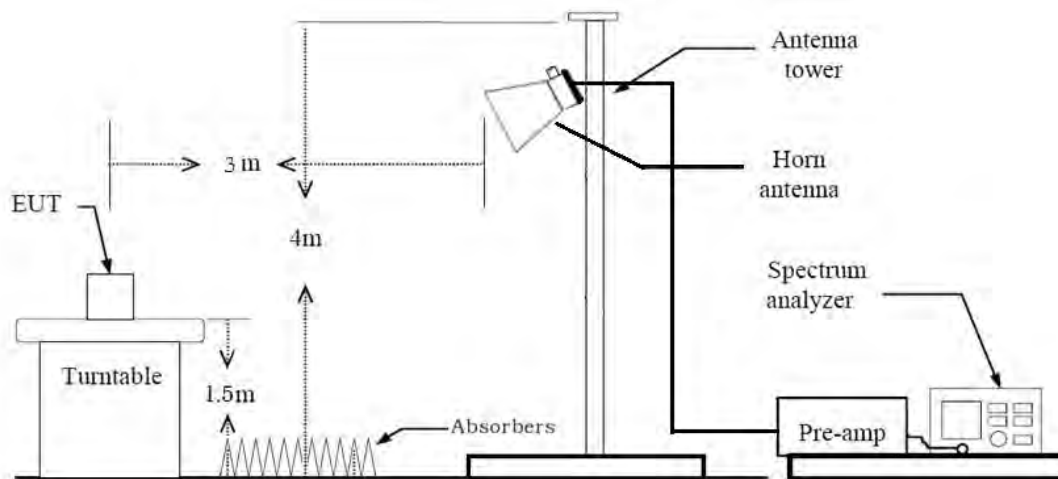

### Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific

emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions (Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW ≥ 3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz

※In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.



**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Average value of pulsed emissions
    - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determined from the peak field strength after correcting for the worst-case duty cycle as described in Number.14
    - Duty Cycle Correction(AFH) =  $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
12. Total
  - (1)Measurement(Peak)  
 Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
  - (2)Measurement(Avg)  
 Measured Value (Peak) + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

+ D.C.C.F(AFH)

13. Duty Cycle Correction Factor (79 channel hopping)

- a. Time to cycle through all channels =  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
- b.  $100 \text{ ms} / \Delta t$  [ms] = H → Round up to next highest integer, H' = 1
- c. Worst Case Dwell Time =  $\tau$  [ms] x H' = 2.9 ms
- d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100 \text{ms})$  dB = -30.752 dB

14. Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)

- a. Time to cycle through all channels =  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
- b.  $100 \text{ ms} / \Delta t$  [ms] = H → Round up to next highest integer, H' = 2
- c. Worst Case Dwell Time =  $\tau$  [ms] x H' = 5.800 ms
- d. Duty Cycle Correction(AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100 \text{ms})$  dB = -24.7314 dB

### Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Average value of pulsed emissions
    - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determined from the peak field strength after correcting for the worst-case duty cycle as described in Number.14
    - ◆ Duty Cycle Correction(AFH) =  $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
9. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
10. Total
  - (1) Measurement(Peak)
    - = Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) – Amp Gain(A.G) + Attenuator(ATT) + Distance Factor(D.F)
  - (2) Measurement(Avg)
    - = Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) – Amp Gain(A.G) + Attenuator(ATT) + Distance Factor(D.F) + D.C.C.F(AFH)
11. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

### 8.8. Receiver Spurious Emissions

#### Limit


Frequency (MHz)	Field Strength ( V/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

#### Test Configuration


30 MHz - 1 GHz

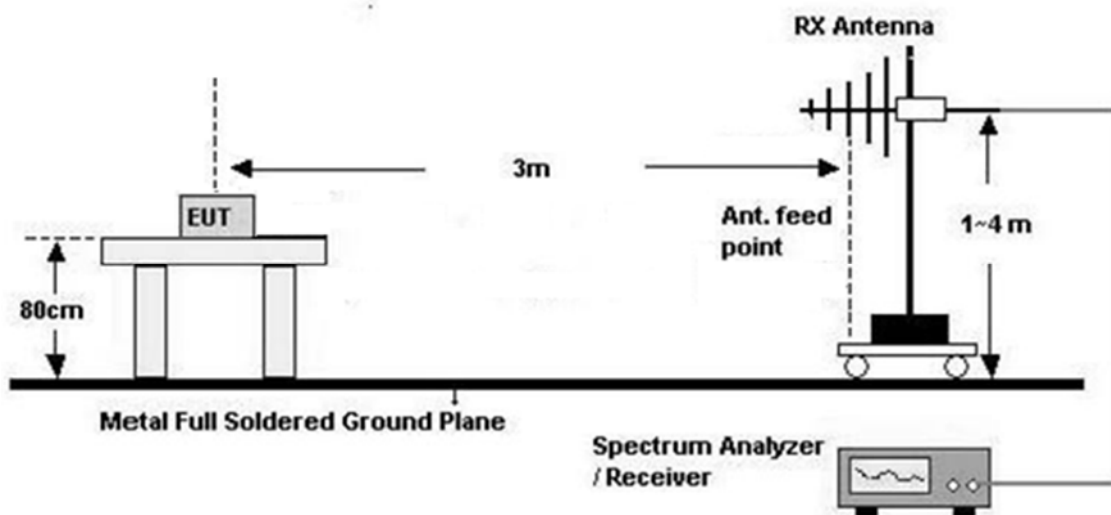

### Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

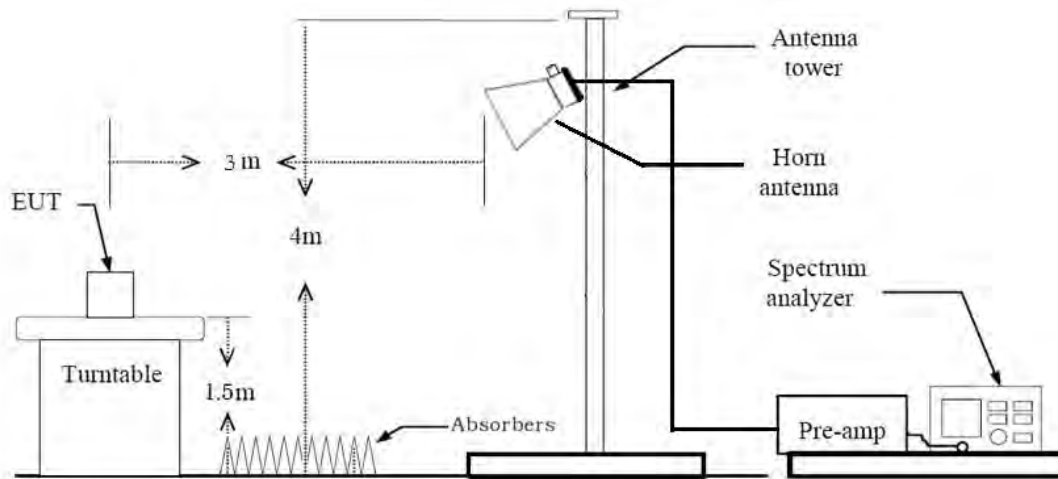

### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - We performed using a reduced video BW method was done with the analyzer in linear mode

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds

The actual setting value of VBW = 1 kHz

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

9. Total(Measurement Type : Peak)

= Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

## 8.9. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone
  - Worstcase : Stand alone
2. EUT Axis
  - (1) Ant. 1
    - Radiated Spurious Emissions : Y
    - Radiated Restricted Band Edge : X
  - (2) Ant. 2
    - Radiated Spurious Emissions : Z
    - Radiated Restricted Band Edge : Y
3. All data rate of operation were investigated and the test results are worst case in highest data rate of each mode.
  - GFSK : DH5
  - $\pi/4$ DQPSK : 2-DH5
  - 8DPSK : 3-DH5
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. Because this EUT is used DC.

### Conducted test

1. The EUT was configured with data rate of highest power.
  - GFSK : DH5
  - $\pi/4$ DQPSK : 2-DH5
  - 8DPSK : 3-DH5
2. AFH & Non-AFH were tested and the worst case results are reported.  
(Worst case : Non-AFH)



## 9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	ISED Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§ 15.247(a)(1)	RSS-247, 5.1	N/A	Conducted	PASS
Occupied Bandwidth	N/A	RSS-GEN, 6.7	N/A		N/A
Conducted Maximum Peak Output Power	§ 15.247(b)(1)	RSS-247, 5.1 b)	Note 2		PASS
Carrier Frequency Separation	§ 15.247(a)(1)	RSS-247, 5.1 b)	> 25 kHz or >2/3 of the 20dB BW		PASS
Number of Hopping Frequencies	§ 15.247(a)(1)(iii)	RSS-247, 5.1 d)	≥ 15		PASS
Time of Occupancy	§ 15.247(a)(1)(iii)	RSS-247, 5.1 d)	< 400 ms		PASS
Conducted Spurious Emissions	§ 15.247(d)	RSS-247, 5.5	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	RSS-247, 5.5	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§ 15.207(a)	RSS-GEN, 8.8	cf. Section 8.8		N/A (Note 1)
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	RSS-GEN, 8.9	cf. Section 8.7		Radiated
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	RSS-GEN, 8.9 RSS-GEN, 8.10	cf. Section 8.7	PASS	
Receiver Spurious Emissions	N/A	RSS-GEN, 7	cf. Section 8.9	PASS	

**Note:**

1. Not Tested.

2. Ant. 1 Power Limit : 21 dBm(0.125 W) – 0.39 dBi(Ant.1 Gain Exceeding 6 dBi) = 20.61 dBm = 115.08 mW

Ant. 2 Power Limit : 21 dBm(0.125 W) – 0.94 dBi(Ant.2 Gain Exceeding 6 dBi) = 20.06 dBm = 101.39 mW

## 10. TEST RESULT

### 10.1 PEAK POWER

[Ant. 1]

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	2.290	1.69	115.08
Mid	2441	2.779	1.90	
High	2480	2.462	1.76	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	5.213	3.32	115.08
Mid	2441	5.526	3.57	
High	2480	4.728	2.97	

Channel	Frequency (MHz)	Output Power ( $\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	4.897	3.09	115.08
Mid	2441	5.257	3.36	
High	2480	4.384	2.74	

[Ant. 2]


Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	1.565	1.43	101.39
Mid	2441	1.773	1.50	
High	2480	1.877	1.54	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	4.865	3.07	101.39
Mid	2441	5.179	3.30	
High	2480	5.220	3.33	

Channel	Frequency (MHz)	Output Power ( $\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	4.407	2.76	101.39
Mid	2441	4.754	2.99	
High	2480	4.782	3.01	

TEST PLOTS

Ant. 1 GFSK : Peak Power (CH.0)

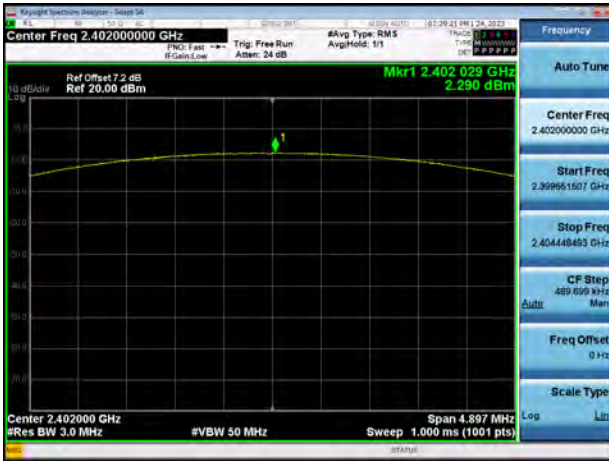


Ant. 2 GFSK : Peak Power (CH.0)



Ant. 1 GFSK : Peak Power (CH.39)




Ant. 2 GFSK : Peak Power (CH.39)

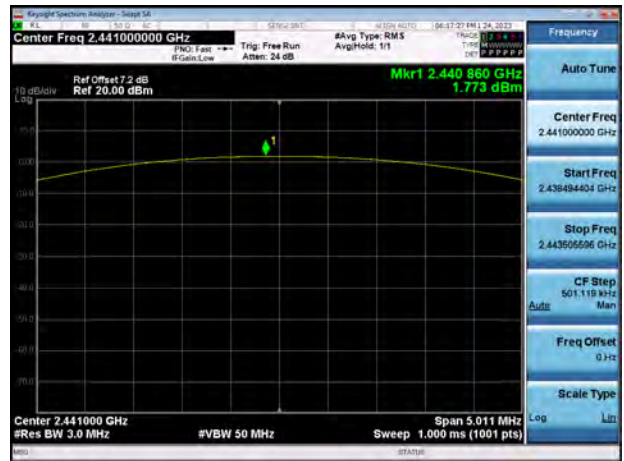

Ant. 1 GFSK : Peak Power (CH.78)




Ant. 2 GFSK : Peak Power (CH.78)

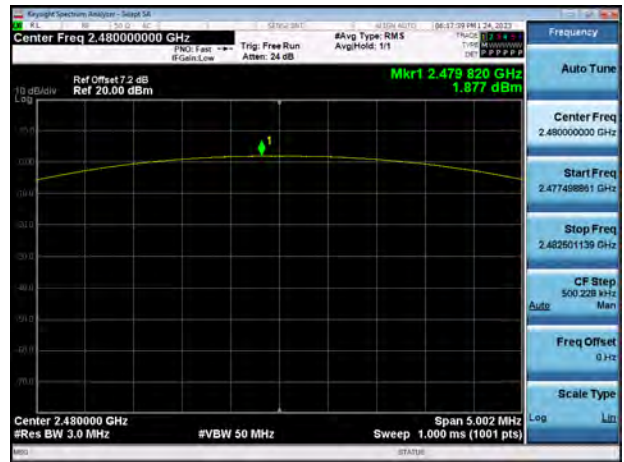

Ant. 1 8DPSK : Peak Power (CH.0)




Ant. 2 8DPSK : Peak Power (CH.0)

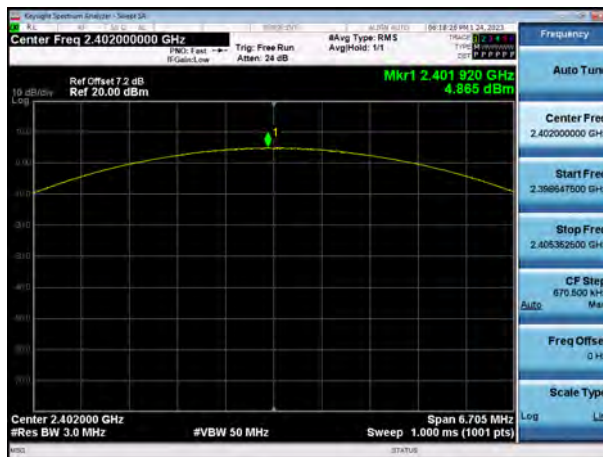

Ant. 1 8DPSK : Peak Power (CH.39)




Ant. 2 8DPSK : Peak Power (CH.39)

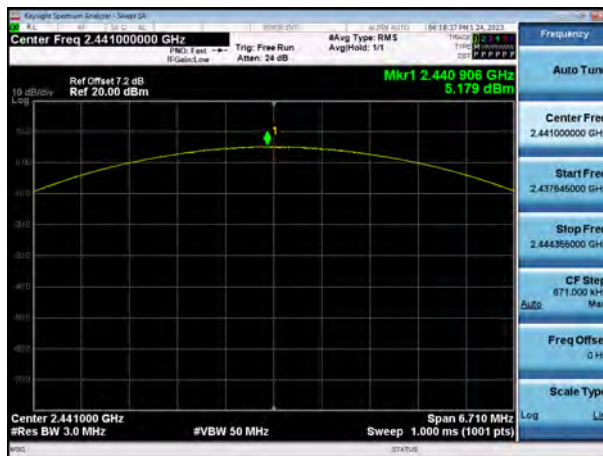

Ant. 1 8DPSK : Peak Power (CH.78)




Ant. 2 8DPSK : Peak Power (CH.78)

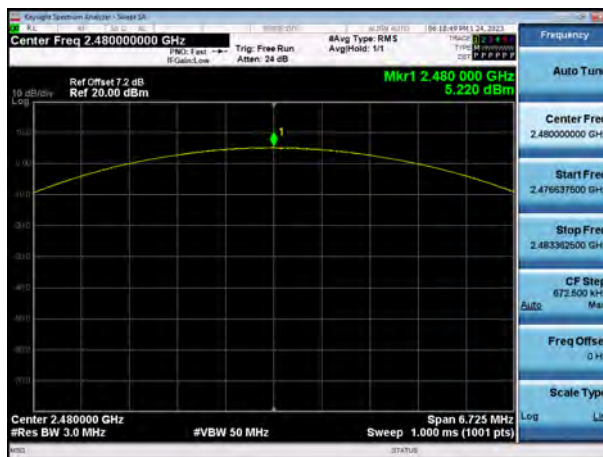





Ant. 1  $\pi/4$ DQPSK : Peak Power (CH.0)

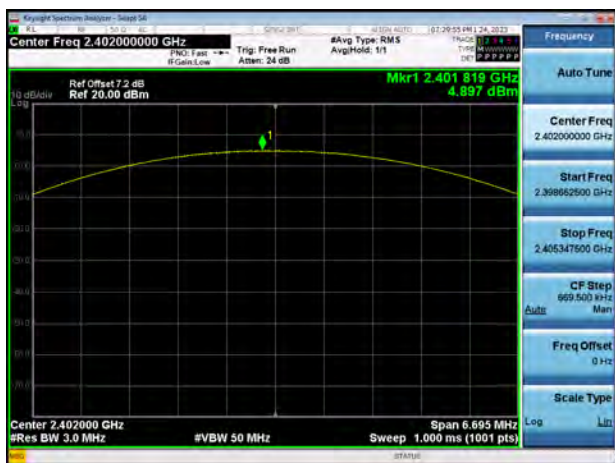


Ant. 2  $\pi/4$ DQPSK : Peak Power (CH.0)

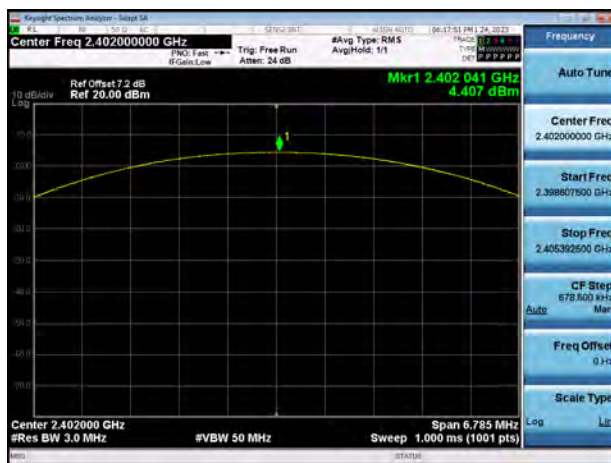

Ant. 1  $\pi/4$ DQPSK : Peak Power (CH.39)

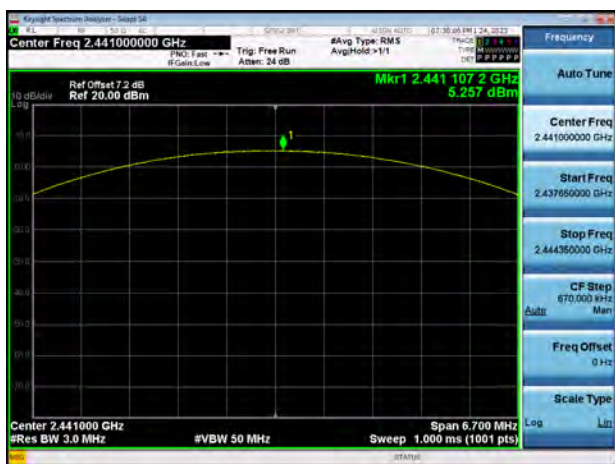


Ant. 2  $\pi/4$ DQPSK : Peak Power (CH.39)

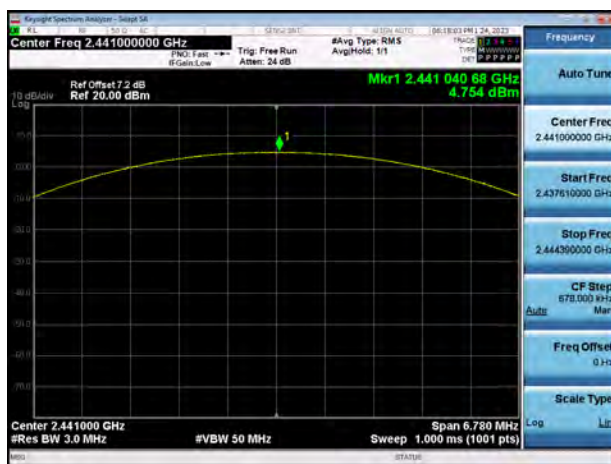

Ant. 1  $\pi/4$ DQPSK : Peak Power (CH.78)



Ant. 2  $\pi/4$ DQPSK : Peak Power (CH.78)

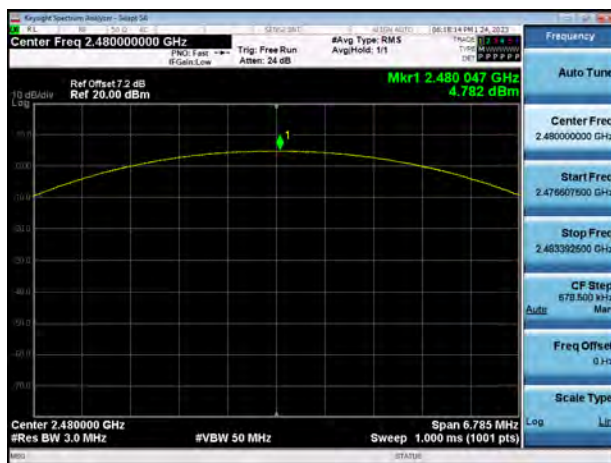

## 10.2 BAND EDGES

[Ant. 1]

### Without hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	57.335	57.976	57.456	20
Upper	59.448	58.215	59.188	

### With hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	58.009	58.327	58.919	20
Upper	58.931	57.808	58.335	

[Ant. 2]

### Without hopping


Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	43.611	44.087	43.902	20
Upper	49.357	50.060	48.828	

### With hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	55.250	57.248	56.487	20
Upper	58.007	58.747	58.890	

□ TEST PLOTS[Ant. 1]


GFSK(without hopping) Band Edge(CH.0)

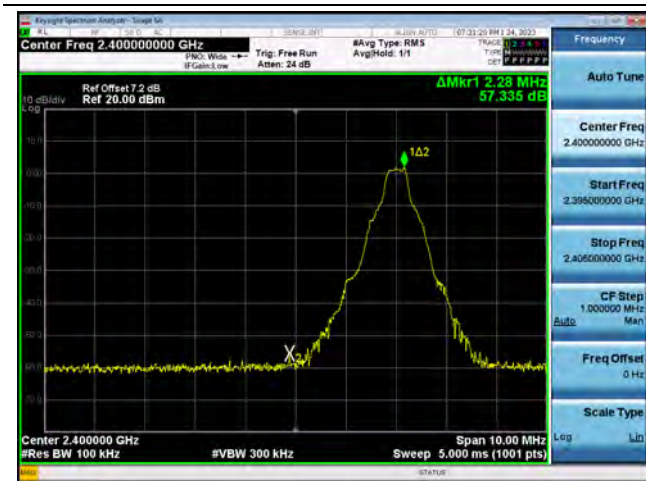


GFSK(without hopping) Band Edge(CH.78)




8DPSK(without hopping) Band Edge(CH.0)

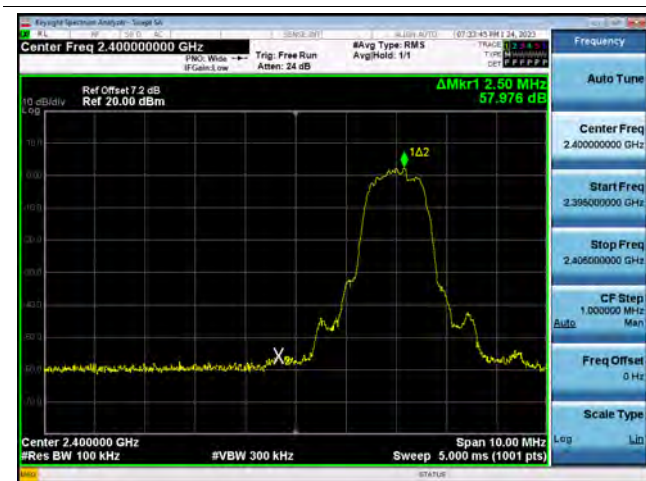


8DPSK(without hopping) Band Edge(CH.78)

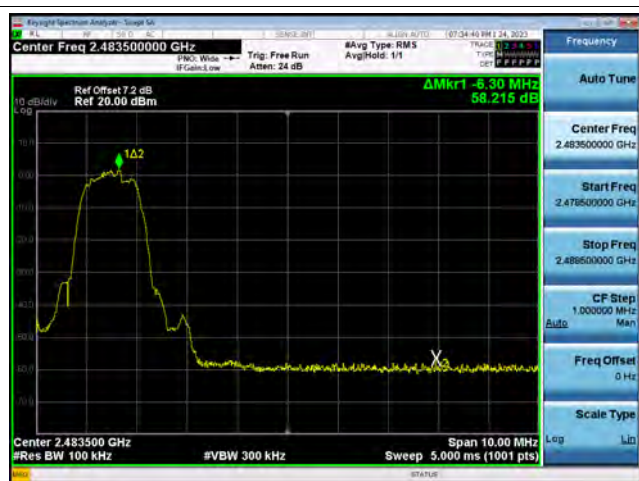

$\pi/4$ DQPSK(without hopping) Band Edge(CH.0)

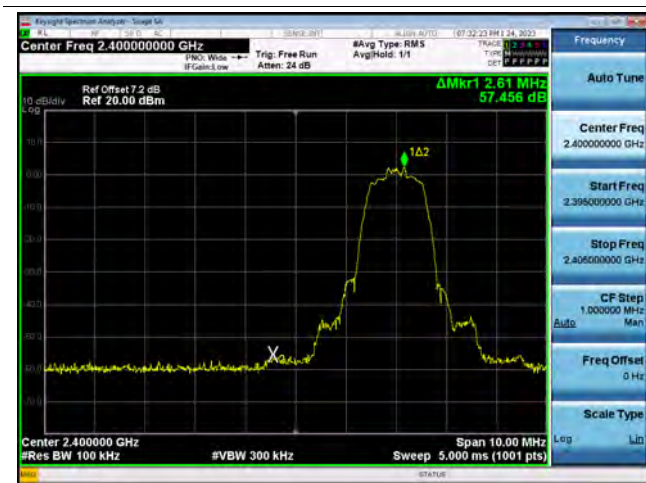

$\pi/4$ DQPSK (without hopping) Band Edge(CH.78)

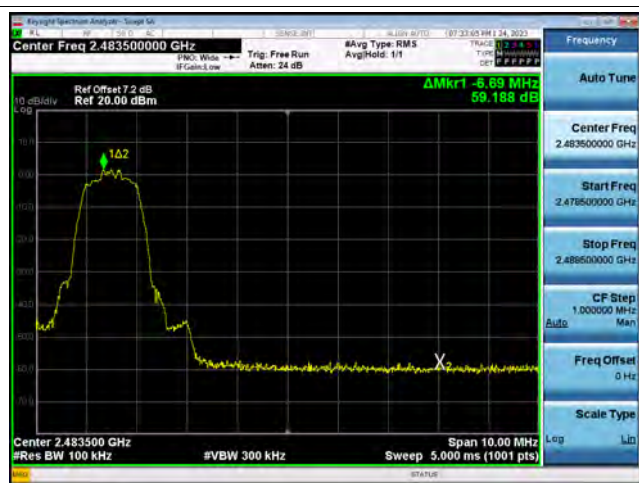



GFSK(with hopping) Band Edge(CH.0)



GFSK(with hopping) Band Edge(CH.78)



8DPSK(with hopping) Band Edge(CH.0)



8DPSK(with hopping) Band Edge(CH.78)



$\pi/4$ DQPSK(with hopping) Band Edge(CH.0)




$\pi/4$ DQPSK (with hopping) Band Edge(CH.78)



□ TEST PLOTS[Ant. 2]


GFSK(without hopping) Band Edge(CH.0)

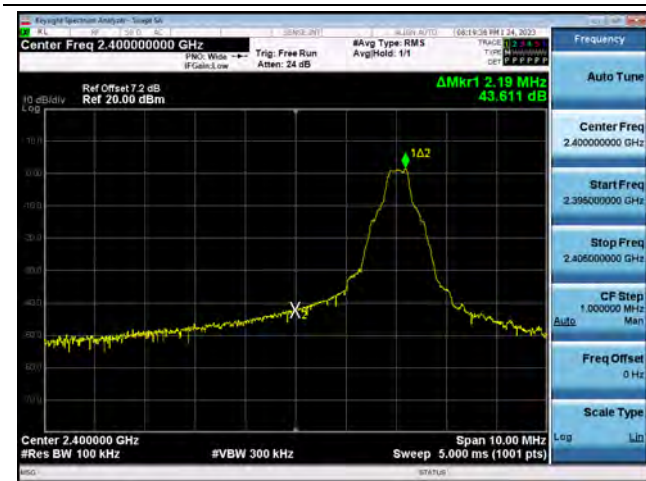


GFSK(without hopping) Band Edge(CH.78)




8DPSK(without hopping) Band Edge(CH.0)

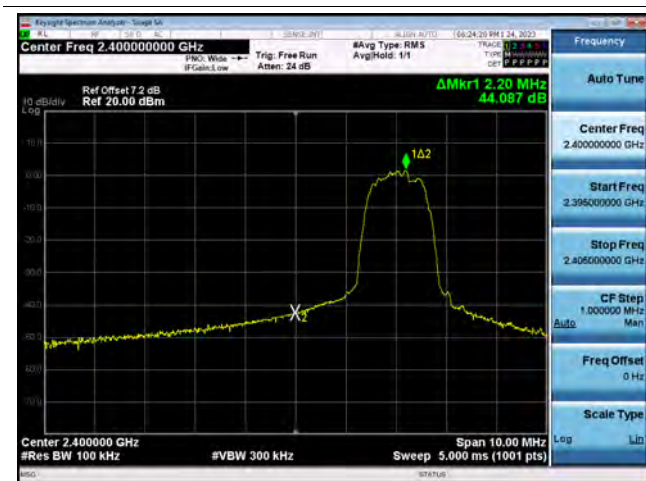


8DPSK(without hopping) Band Edge(CH.78)

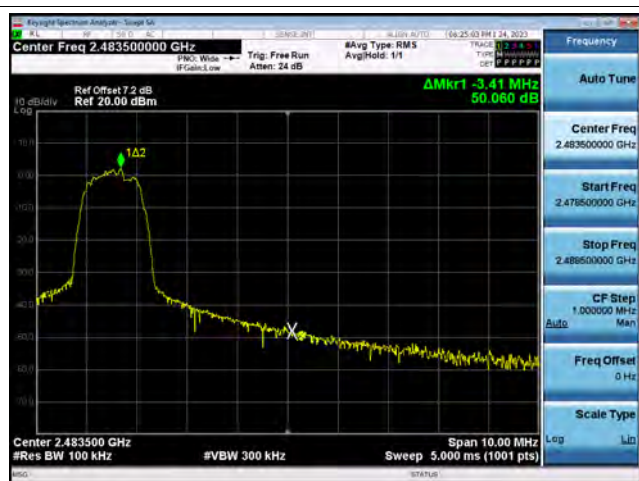

$\pi/4$ DQPSK(without hopping) Band Edge(CH.0)

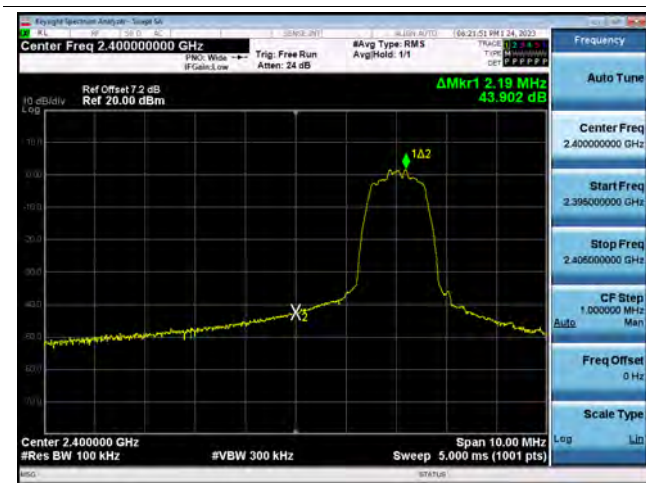

$\pi/4$ DQPSK (without hopping) Band Edge(CH.78)

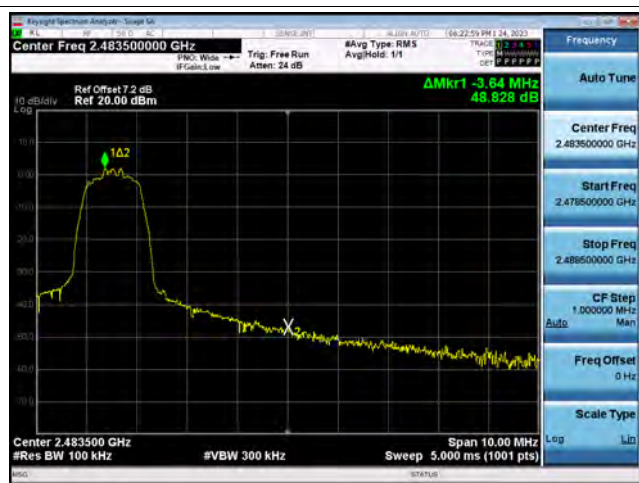





GFSK(with hopping) Band Edge(CH.0)



GFSK(with hopping) Band Edge(CH.78)

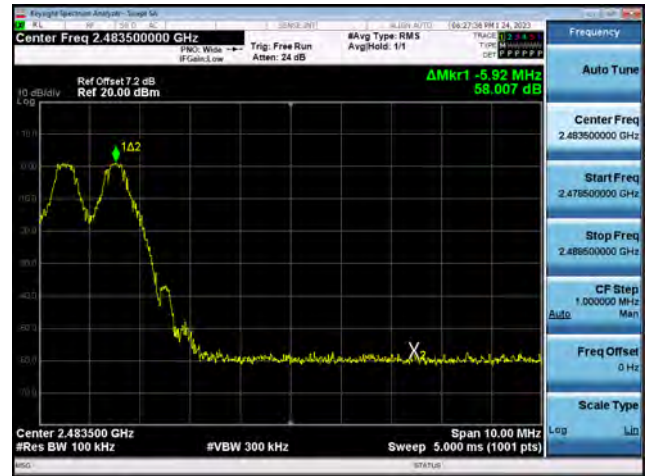

8DPSK(with hopping) Band Edge(CH.0)

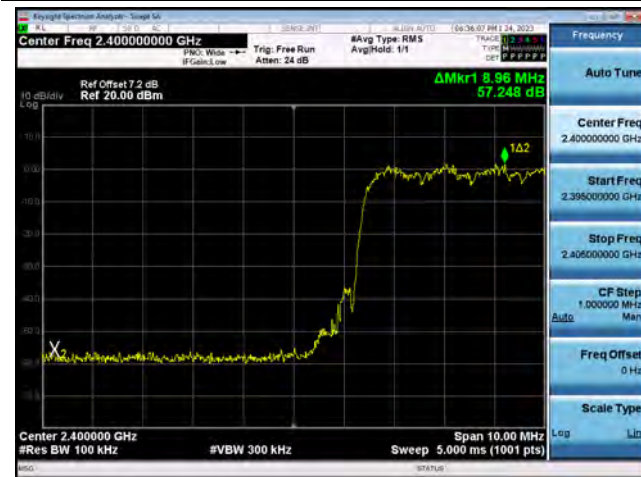

8DPSK(with hopping) Band Edge(CH.78)



$\pi/4$ DQPSK(with hopping) Band Edge(CH.0)



$\pi/4$ DQPSK (with hopping) Band Edge(CH.78)



### 10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)

[Ant. 1]

99 % BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ QPSK
CH.0	884.14	1201.8	1195.6
CH.39	885.80	1203.2	1196.7
CH.78	881.40	1202.9	1193.5

20 dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ QPSK
CH.0	979.4	1329	1339
CH.39	996.2	1330	1340
CH.78	994.1	1329	1341

Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ QPSK	
1001	994	998	>25 kHz or >2/3 of the 20 dB BW

[Ant. 2]

99 % BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	900.23	1214.9	1209.7
CH.39	902.67	1215.6	1212.9
CH.78	903.06	1216.0	1210.4

20 dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	998.1	1341	1357
CH.39	1002	1342	1356
CH.78	1000	1345	1357


Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
998	1001	1001	>25 kHz or >2/3 of the 20 dB BW

[Ant. 1]


Test Plots (GFSK) Channel Separation




Test Plots (8DPSK) Channel Separation

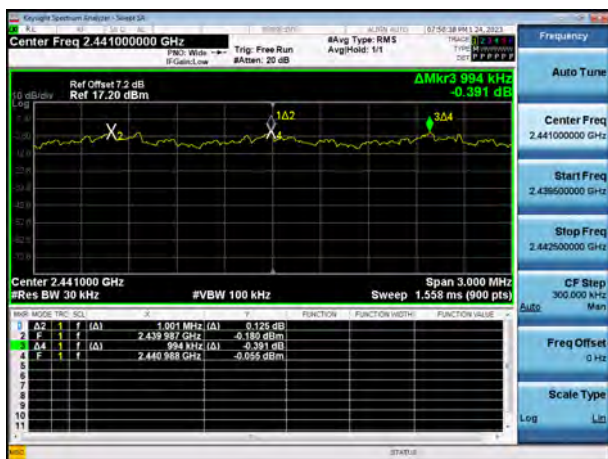

Test Plots ( $\pi/4$ DQPSK) Channel Separation

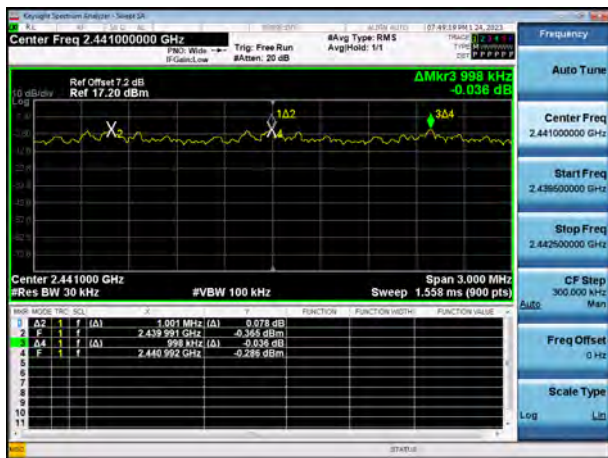

Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

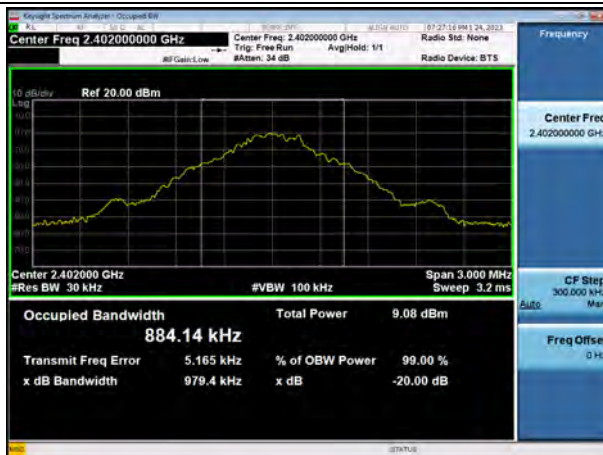

Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)




Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)





Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

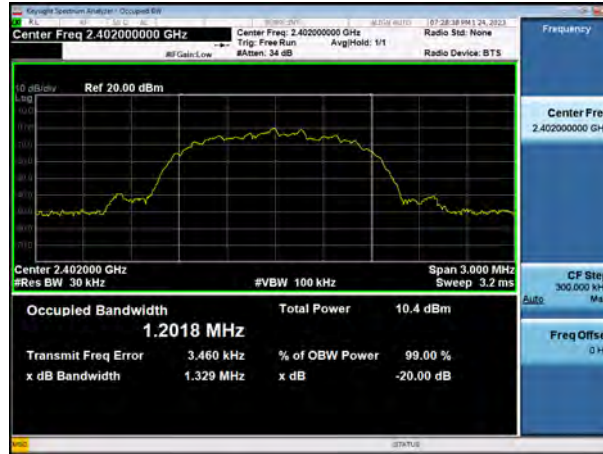

Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)




Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)





Test Plots ( $\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

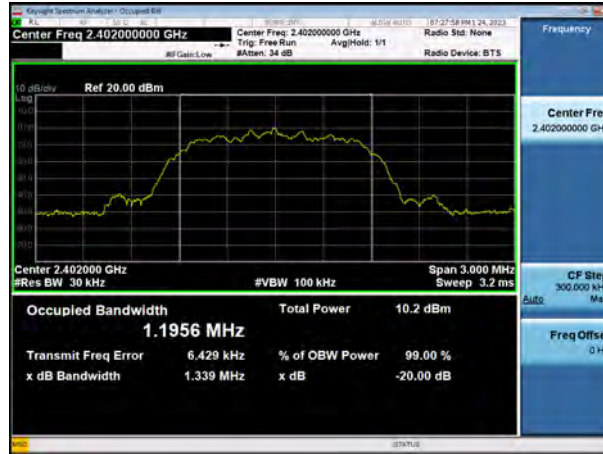

Test Plots ( $\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)



Test Plots ( $G \pi/4$ DQPSK FSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)



[Ant. 2]


Test Plots (GFSK) Channel Separation




Test Plots (8DPSK) Channel Separation



Test Plots ( $\pi/4$ DQPSK) Channel Separation

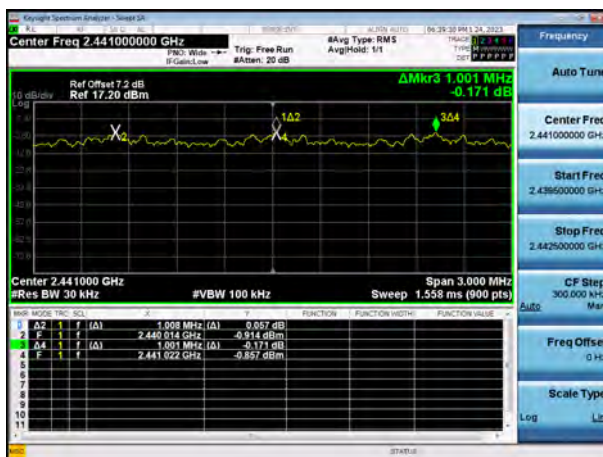

Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

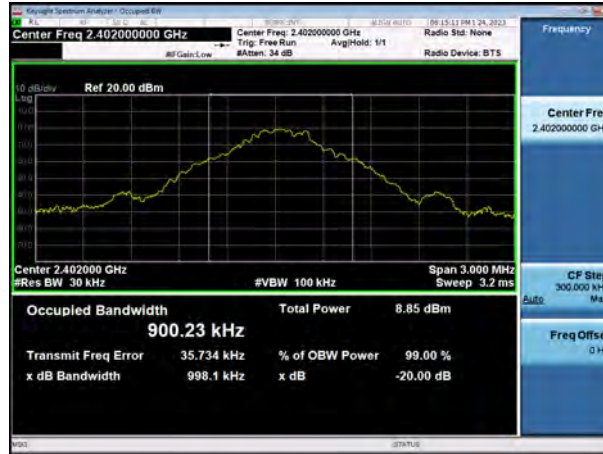


Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)



Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)



Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

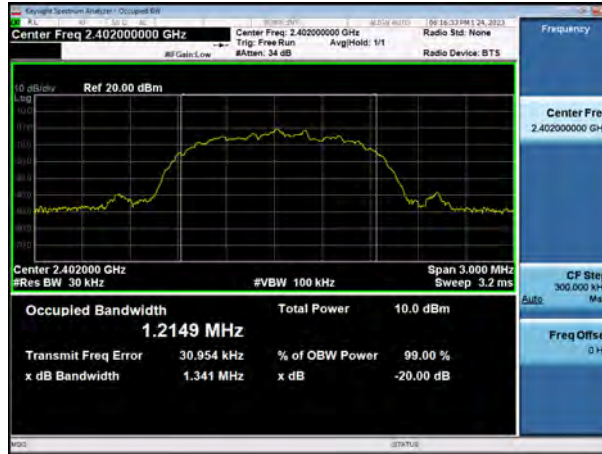

Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)




Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)





Test Plots ( $\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

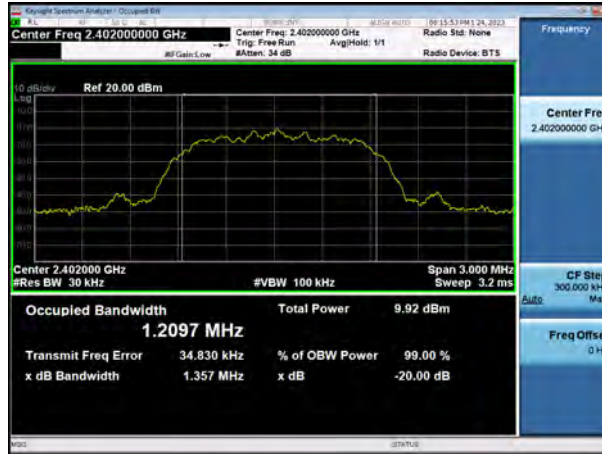

Test Plots ( $\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)



Test Plots ( $G \pi/4$ DQPSK FSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)



#### 10.4 NUMBER OF HOPPING FREQUENCY

[Ant. 1]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

[Ant. 2]


Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

**Note :**

In case of AFH mode, minimum number of hopping channels is 20.

□ TEST PLOTS [Ant. 1]

GFSK Number of Channels (2.4 GHz - 2.441 GHz)

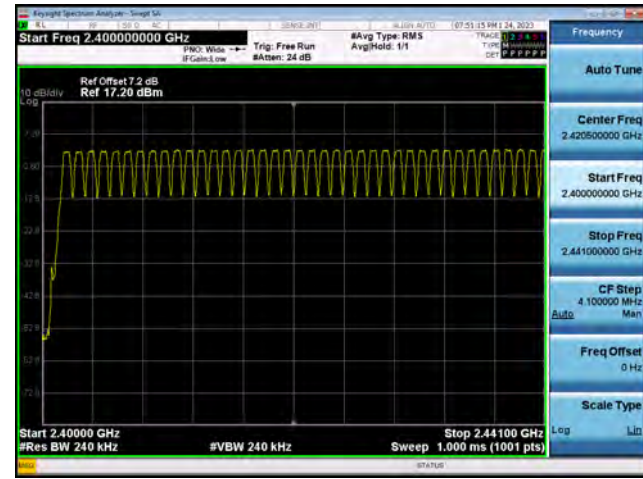


GFSK Number of Channels (2.441 GHz - 2.483.5 GHz)




8DPSK Number of Channels (2.4 GHz - 2.441 GHz)



8DPSK Number of Channels (2.441 GHz - 2.483.5 GHz)

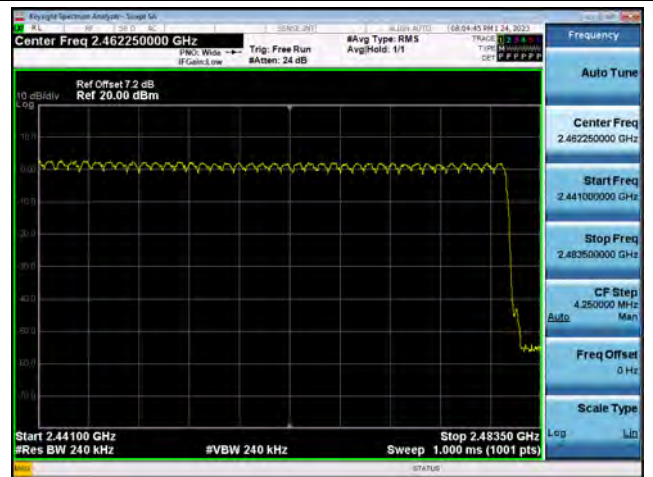

$\pi/4$ DQPSK Number of Channels (2.4 GHz - 2.441 GHz)

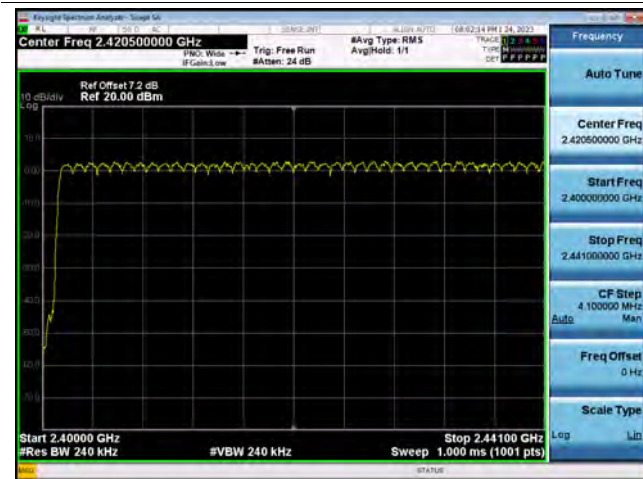


$\pi/4$ DQPSK Number of Channels (2.441 GHz - 2.483.5 GHz)






□ TEST PLOTS [Ant. 2]

GFSK Number of Channels (2.4 GHz - 2.441 GHz)

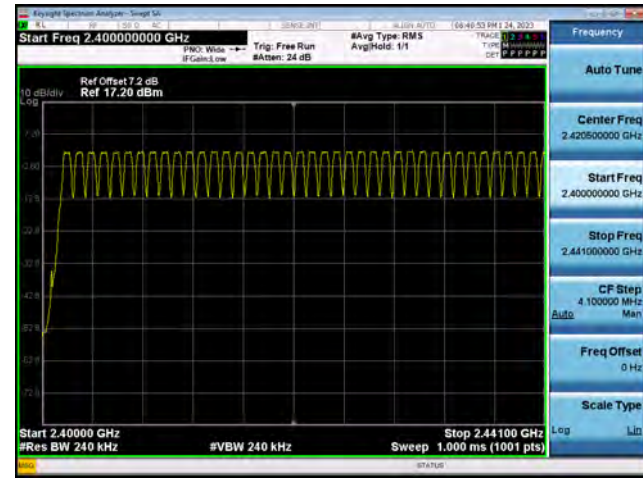


GFSK Number of Channels (2.441 GHz - 2.483.5 GHz)

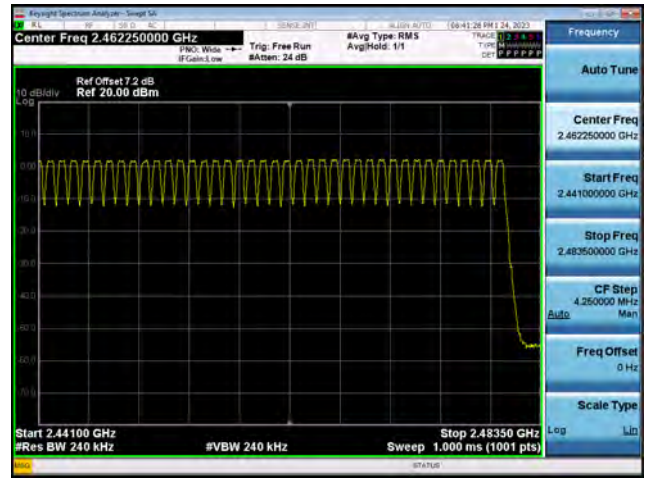


8DPSK Number of Channels (2.4 GHz - 2.441 GHz)




8DPSK Number of Channels (2.441 GHz - 2.483.5 GHz)

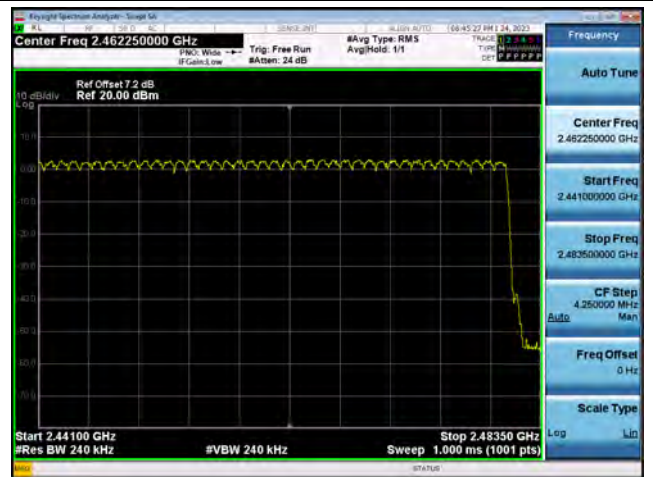

$\pi/4$ DQPSK Number of Channels (2.4 GHz - 2.441 GHz)

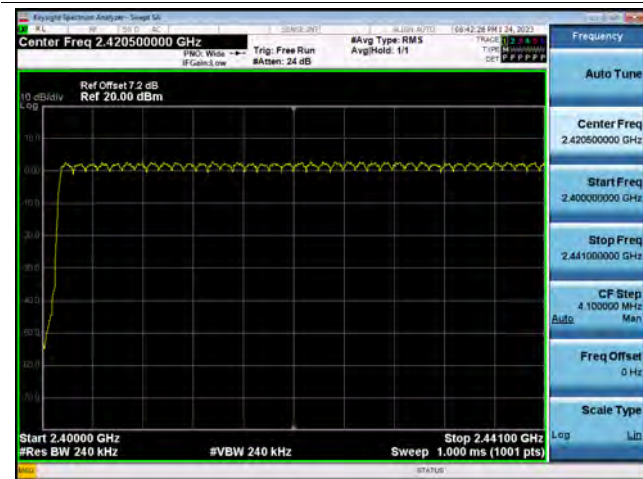

$\pi/4$ DQPSK Number of Channels (2.441 GHz - 2.483.5 GHz)

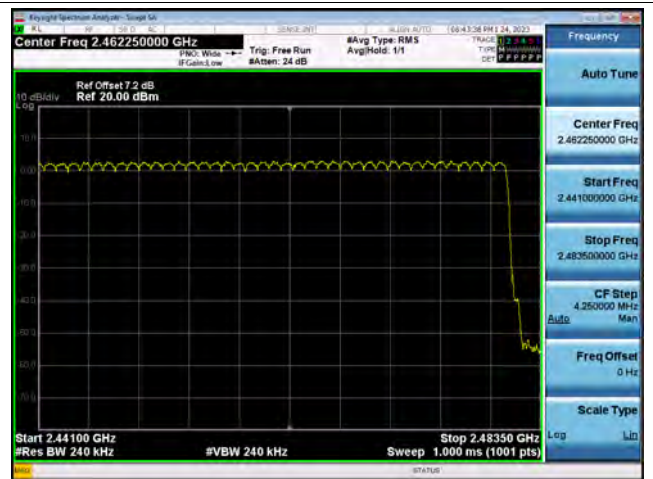



### 10.5 TIME OF OCCUPANCY (DWELL TIME)

[Ant. 1]

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Low	2.880	2.885	2.885
	Mid	2.880	2.885	2.885
	High	2.880	2.885	2.885

#### Non-AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	307.20	307.73	307.73	31.6	
	Mid	307.20	307.73	307.73	31.6	
	High	307.20	307.73	307.73	31.6	

#### AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	153.60	153.87	153.87	8.0	
	Mid	153.60	153.87	153.87	8.0	
	High	153.60	153.87	153.87	8.0	

[Ant. 2]

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Low	2.890	2.890	2.890
	Mid	2.885	2.890	2.885
	High	2.885	2.890	2.890

**Non-AFH Mode**


Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	308.27	308.27	308.27	31.6	
	Mid	307.73	308.27	307.73	31.6	
	High	307.73	308.27	308.27	31.6	

**AFH Mode**


Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	154.13	154.13	154.13	8.0	
	Mid	153.87	154.13	153.87	8.0	
	High	153.87	154.13	154.13	8.0	

[Ant. 1]


Test Plots (GFSK) Dwell Time (CH.0)

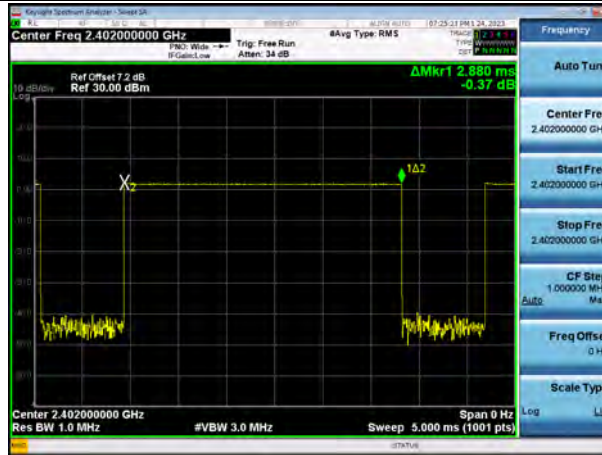


Test Plots (GFSK) Dwell Time (CH.39)

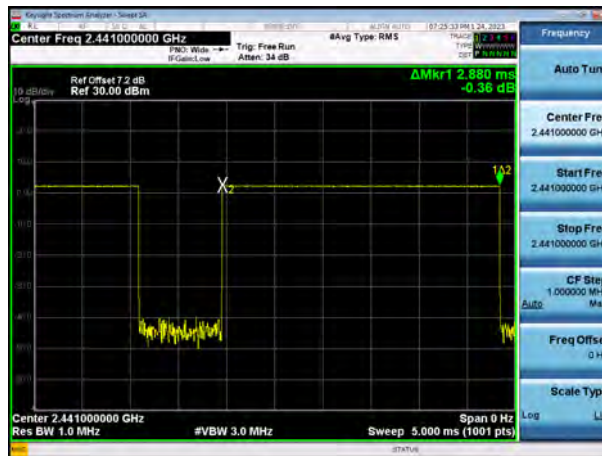

Test Plots (GFSK) Dwell Time (CH.78)

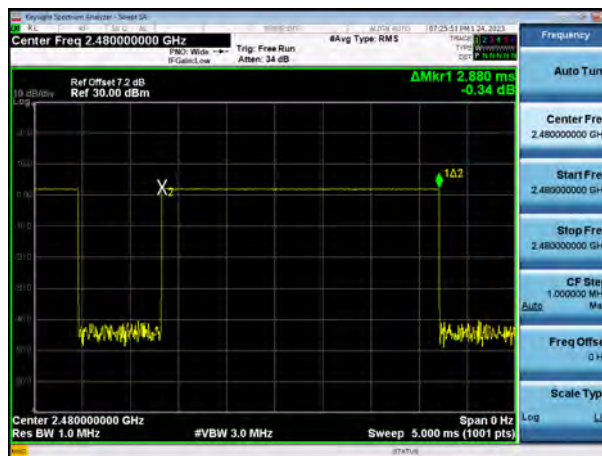

### Test Plots (8DPSK) Dwell Time (CH.0)

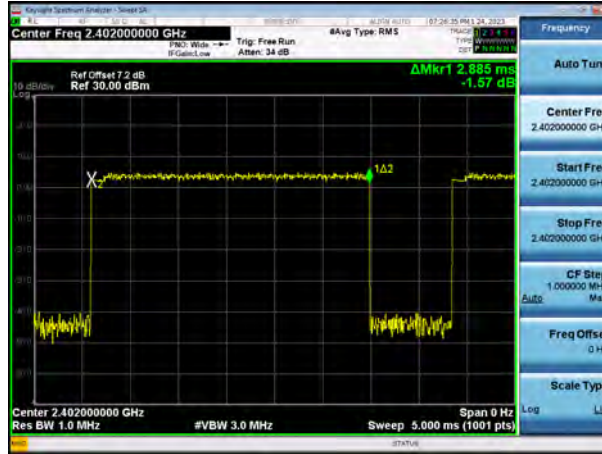

### Test Plots (8DPSK) Dwell Time (CH.39)



### Test Plots (8DPSK) Dwell Time (CH.78)




Test Plots ( $\pi/4$ DQPSK) Dwell Time (CH.0)



Test Plots ( $\pi/4$ DQPSK) Dwell Time (CH.39)




Test Plots ( $\pi/4$ DQPSK) Dwell Time (CH.78)

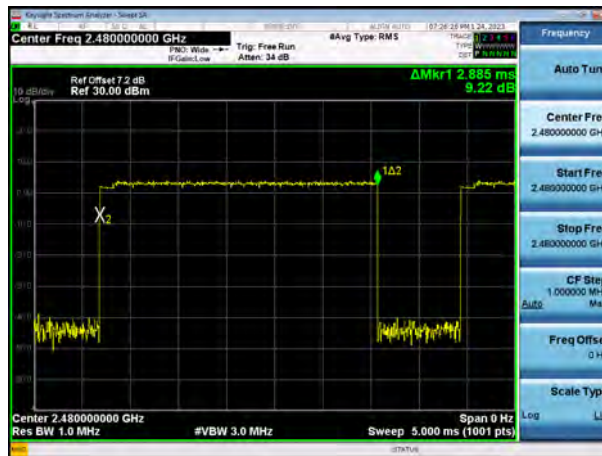


[Ant. 2]


Test Plots (GFSK) Dwell Time (CH.0)

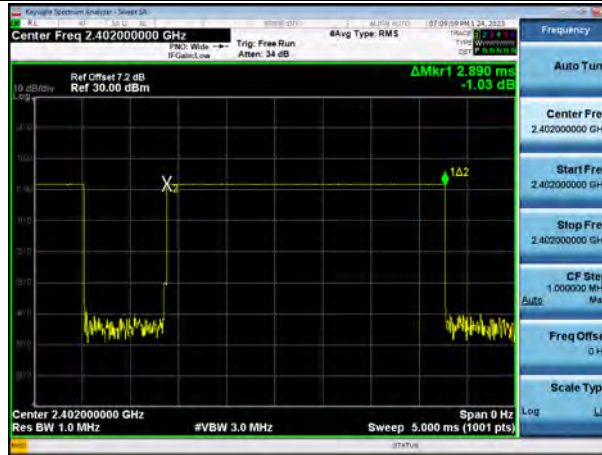

Test Plots (GFSK) Dwell Time (CH.39)

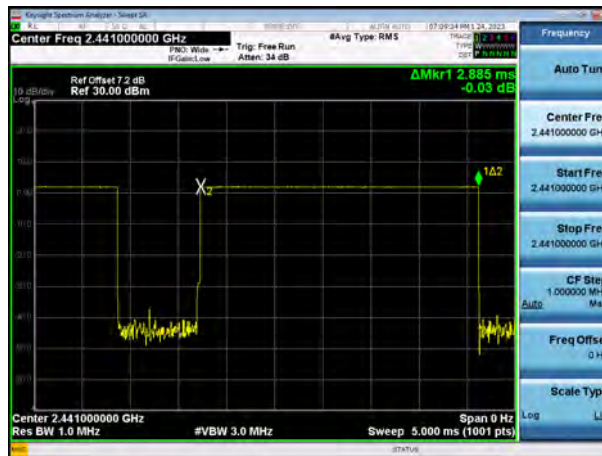

Test Plots (GFSK) Dwell Time (CH.78)

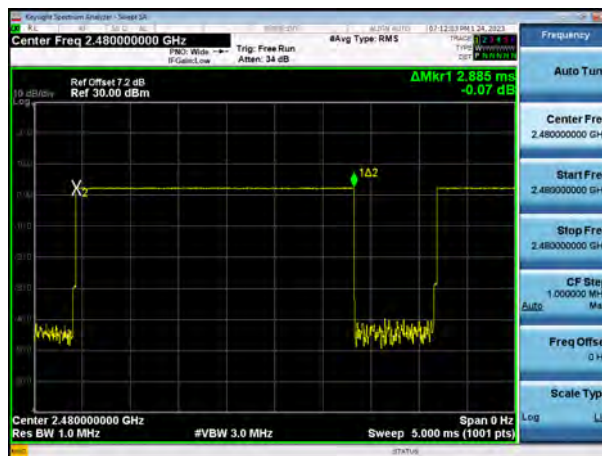





Test Plots (8DPSK) Dwell Time (CH.0)



Test Plots (8DPSK) Dwell Time (CH.39)

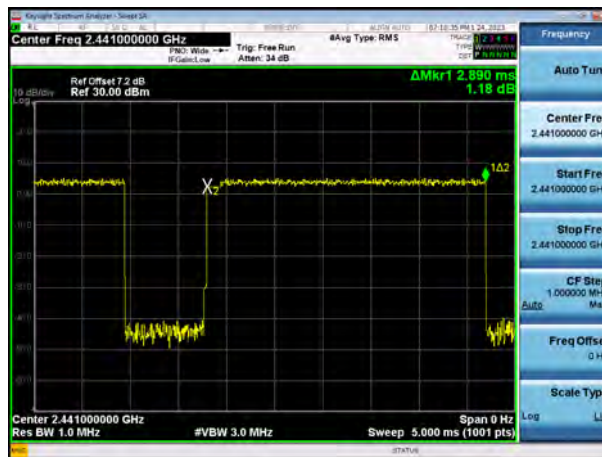

Test Plots (8DPSK) Dwell Time (CH.78)

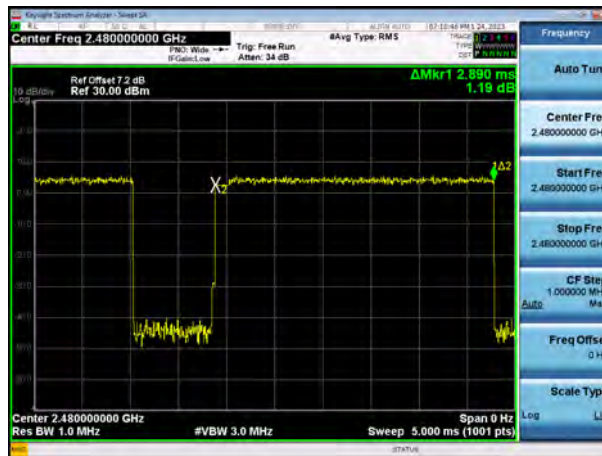


Test Plots ( $\pi/4$ DQPSK) Dwell Time (CH.0)



Test Plots ( $\pi/4$ DQPSK) Dwell Time (CH.39)



Test Plots ( $\pi/4$ DQPSK) Dwell Time (CH.78)

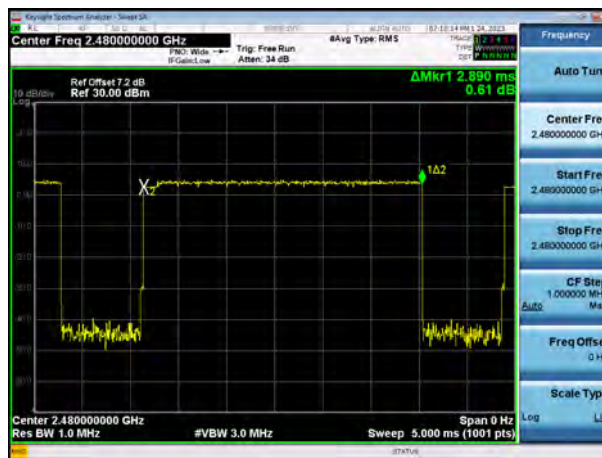





## 10.6 SPURIOUS EMISSIONS

### 10.6.1 CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

Test Plots [Ant. 1 Worst Case : 8DPSK, CH.39]


Spurious Emission (30 MHz - 1 GHz)




Spurious Emission (1 GHz - 3 GHz)

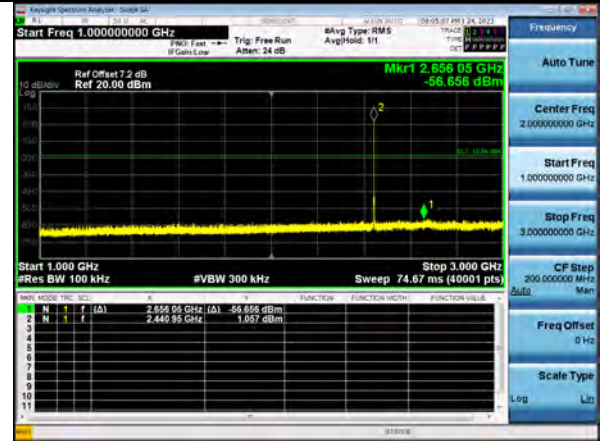


Spurious Emission (3 GHz - 5 GHz)

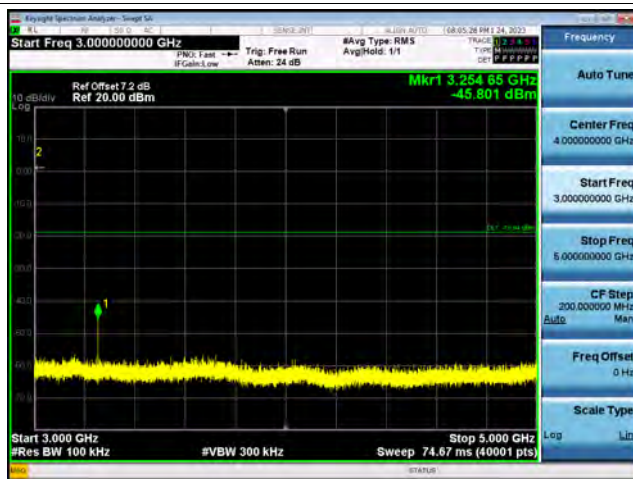


Spurious Emission (5 GHz - 7 GHz)

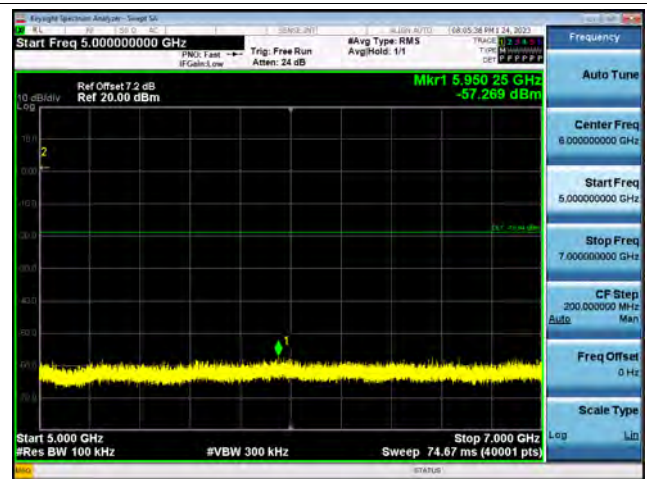


Spurious Emission (7 GHz - 9 GHz)

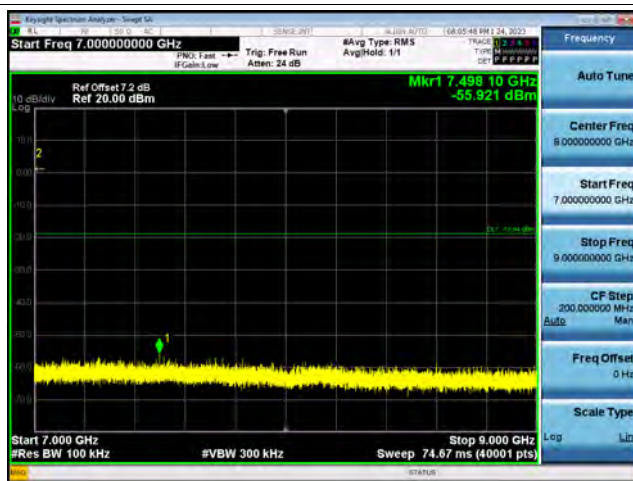


Spurious Emission (9 GHz - 11 GHz)

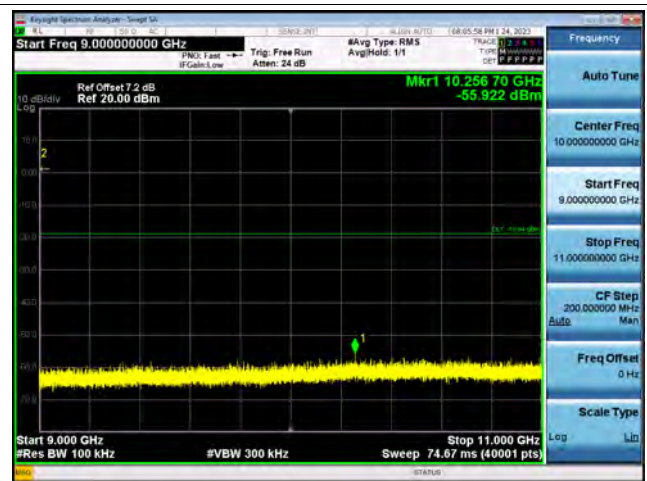


Spurious Emission (11 GHz - 13 GHz)

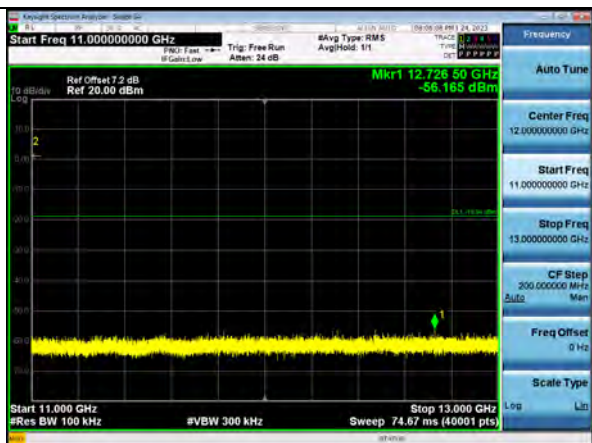


Spurious Emission (13 GHz - 15 GHz)

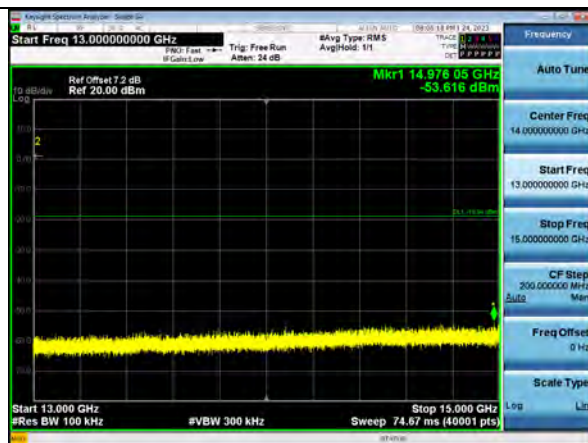


Spurious Emission (15 GHz - 17 GHz)

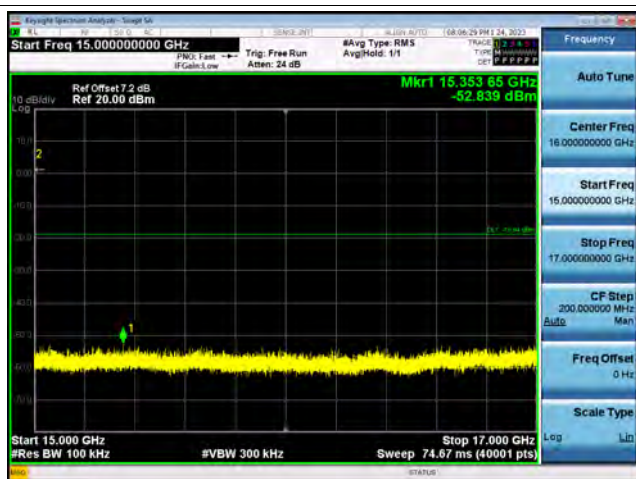


Spurious Emission (17 GHz - 19 GHz)

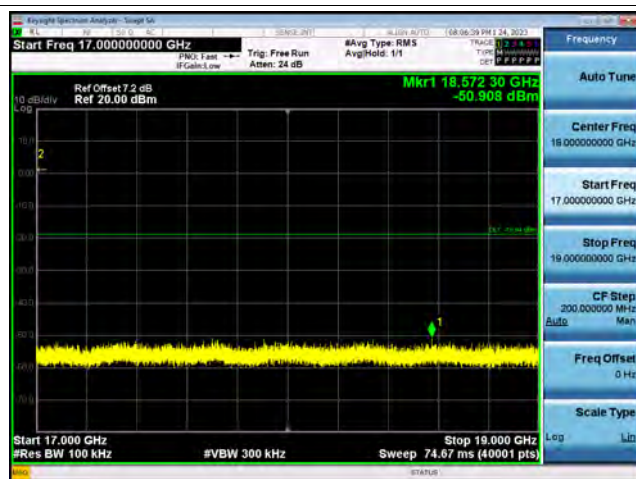

Spurious Emission (19 GHz - 21 GHz)

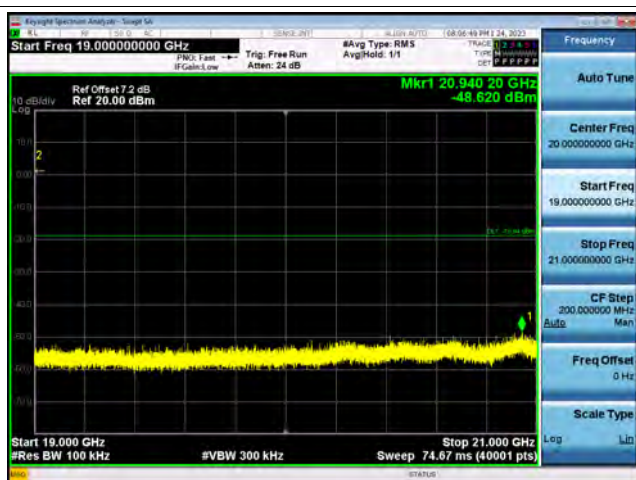


Spurious Emission (21 GHz - 23 GHz)

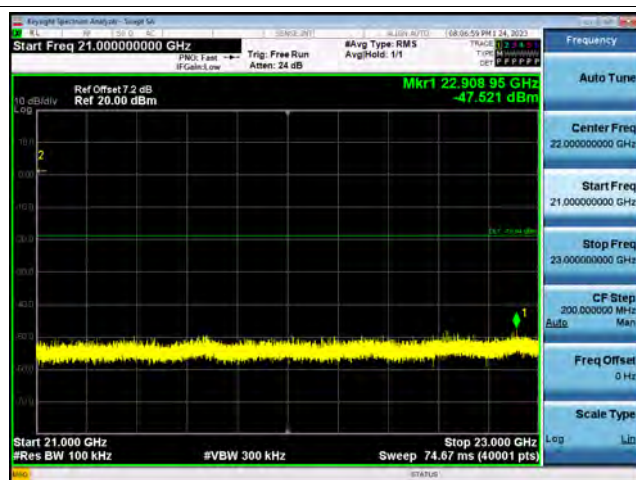



### Spurious Emission (23 GHz - 25 GHz)

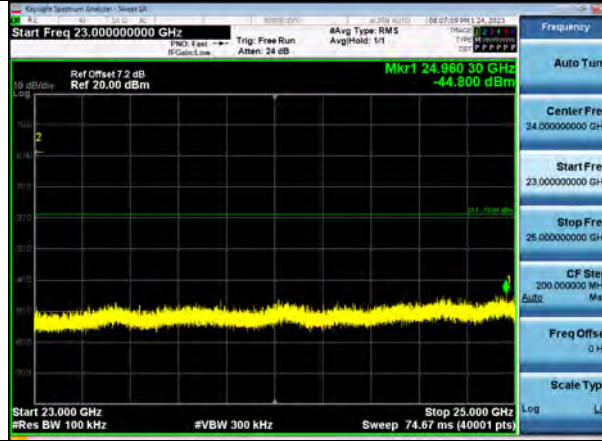

- Limit : -18.94 dBm




Test Plots [Ant. 2 Worst Case : 8DPSK, CH.78]


Spurious Emission (30 MHz - 1 GHz)




Spurious Emission (1 GHz - 3 GHz)

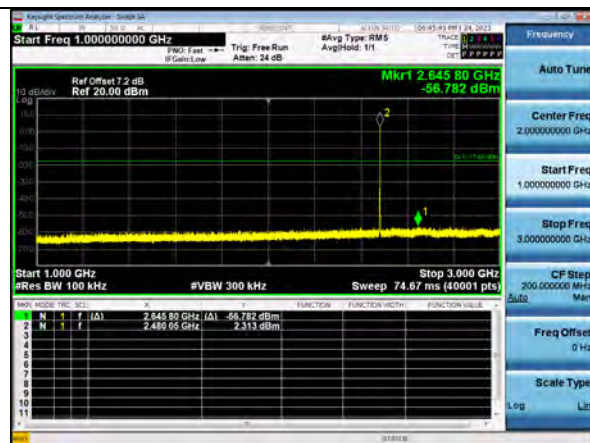

Spurious Emission (3 GHz - 5 GHz)

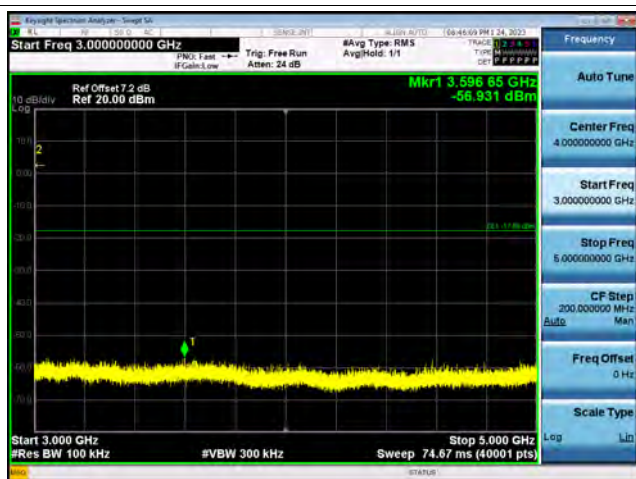


Spurious Emission (5 GHz - 7 GHz)

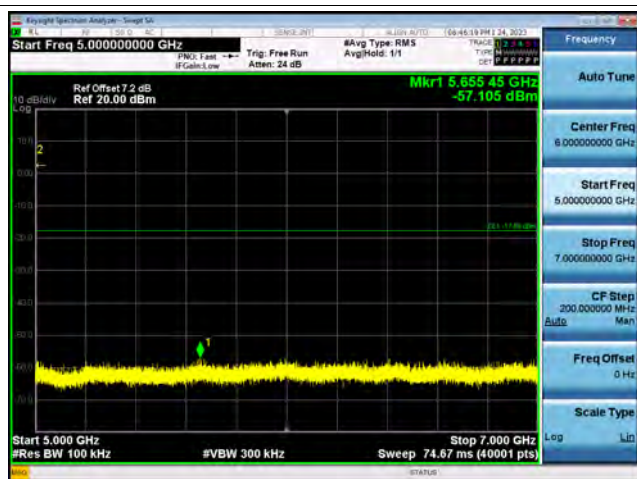


Spurious Emission (7 GHz - 9 GHz)




Spurious Emission (9 GHz - 11 GHz)

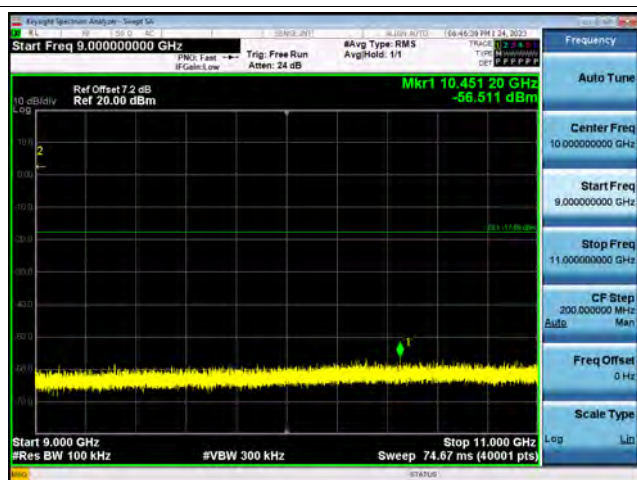


Spurious Emission (11 GHz - 13 GHz)

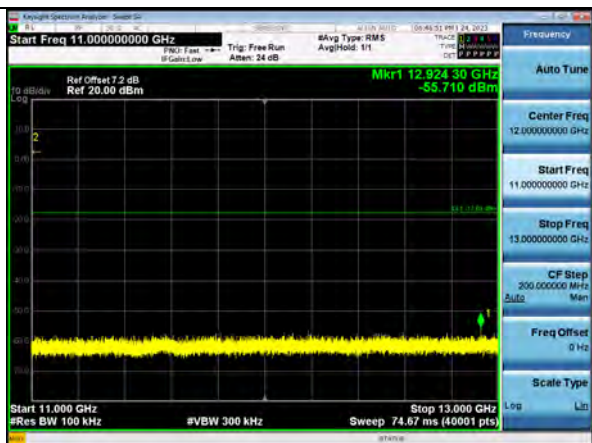


Spurious Emission (13 GHz - 15 GHz)

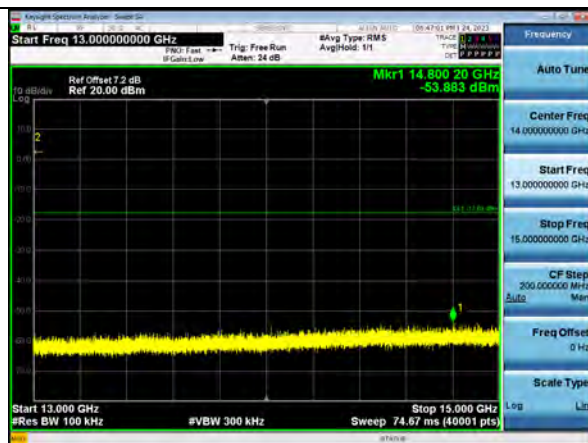


Spurious Emission (15 GHz - 17 GHz)

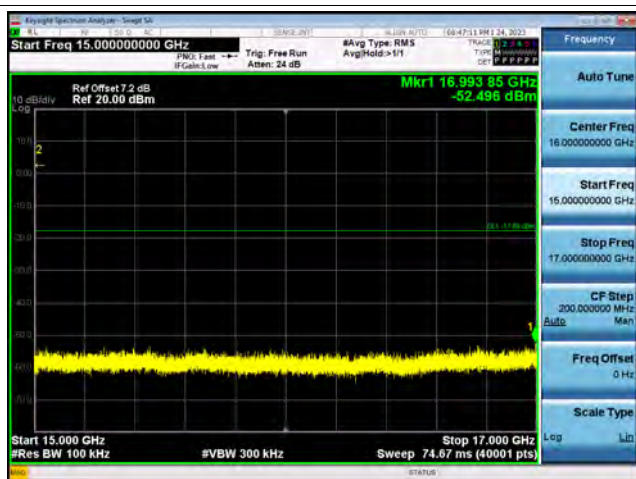


Spurious Emission (17 GHz - 19 GHz)

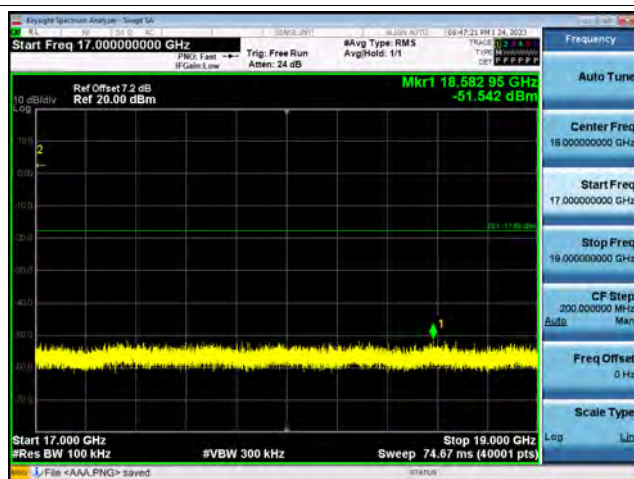


Spurious Emission (19 GHz - 21 GHz)

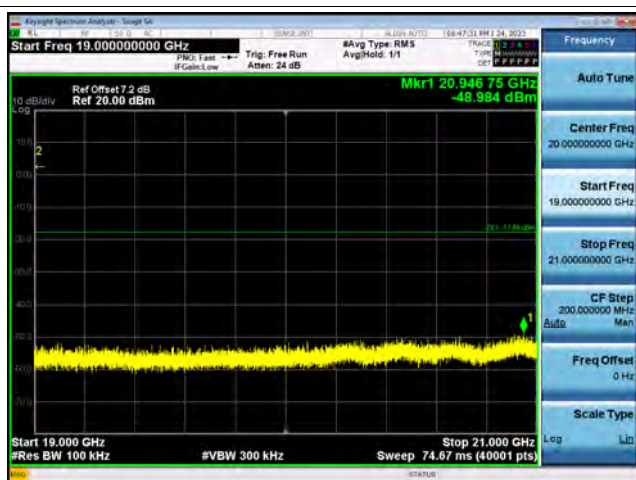

Spurious Emission (21 GHz - 23 GHz)

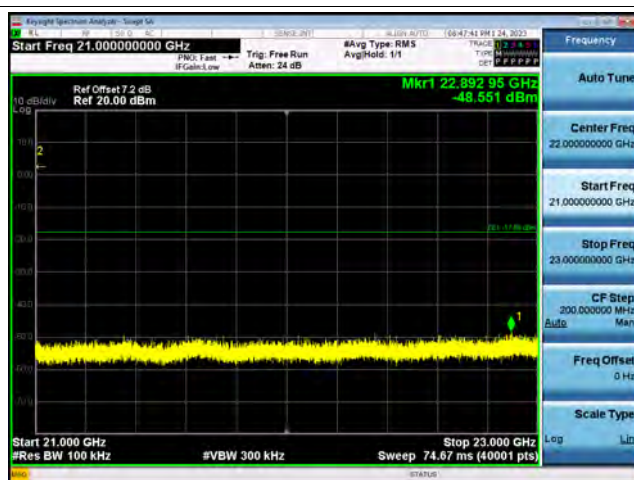

### Spurious Emission (23 GHz - 25 GHz)

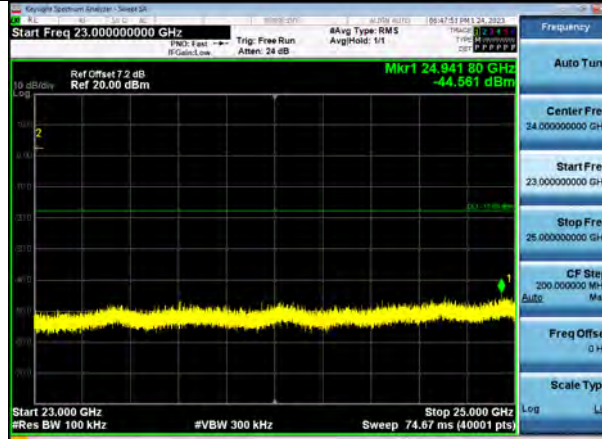

- Limit : -17.69 dBm

## 10.6.2 RADIATED SPURIOUS EMISSIONS

### Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]
No Critical peaks found						

**Note:**

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = 40log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

### Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]
No Critical peaks found						

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.





**[Ant. 1] Frequency Range : Above 1 GHz**

Operation Mode: CH Low(GFSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4804	46.28	2.51	V	0	48.79	73.98	25.19	PK
4804	46.28	2.51	V	-24.73	24.06	53.98	29.92	AV
7206	42.19	9.10	V	0	51.29	73.98	22.69	PK
7206	42.19	9.10	V	-24.73	26.55	53.98	27.43	AV
4804	46.50	2.51	H	0	49.01	73.98	24.97	PK
4804	46.50	2.51	H	-24.73	24.28	53.98	29.70	AV
7206	42.35	9.10	H	0	51.45	73.98	22.53	PK
7206	42.35	9.10	H	-24.73	26.71	53.98	27.27	AV

Operation Mode: CH Mid(GFSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4882	44.31	2.92	V	0	47.23	73.98	26.75	PK
4882	44.31	2.92	V	-24.73	22.50	53.98	31.48	AV
7323	41.28	9.42	V	0	50.70	73.98	23.28	PK
7323	41.28	10.20	V	-24.73	26.75	53.98	27.23	AV
4882	44.72	2.92	H	0	47.64	73.98	26.34	PK
4882	44.72	2.92	H	-24.73	22.91	53.98	31.07	AV
7323	41.95	9.42	H	0	51.37	73.98	22.61	PK
7323	41.95	10.20	H	-24.73	27.42	53.98	26.56	AV

Operation Mode: CH High(GFSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	44.05	2.00	V	0	46.05	73.98	27.93	PK
4960	44.05	2.00	V	-24.73	21.32	53.98	32.66	AV
7440	40.65	9.99	V	0	50.64	73.98	23.34	PK
7440	40.65	9.99	V	-24.73	25.91	53.98	28.07	AV
4960	44.35	2.00	H	0	46.35	73.98	27.63	PK
4960	44.35	2.00	H	-24.73	21.62	53.98	32.36	AV
7440	40.26	9.99	H	0	50.25	73.98	23.73	PK
7440	40.26	9.99	H	-24.73	25.52	53.98	28.46	AV

Operation Mode: CH Low( $\pi/4$ DQPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4804	46.24	2.51	V	0	48.75	73.98	25.23	PK
4804	46.24	2.51	V	-24.73	24.02	53.98	29.96	AV
7206	40.37	9.10	V	0	49.47	73.98	24.51	PK
7206	40.37	9.10	V	-24.73	24.73	53.98	29.25	AV
4804	46.31	2.51	H	0	48.82	73.98	25.16	PK
4804	46.31	2.51	H	-24.73	24.09	53.98	29.89	AV
7206	40.86	9.10	H	0	49.96	73.98	24.02	PK
7206	40.86	9.10	H	-24.73	25.22	53.98	28.76	AV

Operation Mode: CH Mid( $\pi/4$ DQPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4882	42.87	2.92	V	0	45.79	73.98	28.19	PK
4882	42.87	2.92	V	-24.73	21.06	53.98	32.92	AV
7323	42.11	9.42	V	0	51.53	73.98	22.45	PK
7323	42.11	10.20	V	-24.73	27.58	53.98	26.40	AV
4882	43.10	2.92	H	0	46.02	73.98	27.96	PK
4882	43.10	2.92	H	-24.73	21.29	53.98	32.69	AV
7323	42.26	9.42	H	0	51.68	73.98	22.30	PK
7323	42.26	10.20	H	-24.73	27.73	53.98	26.25	AV

Operation Mode: CH High( $\pi/4$ DQPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4960	42.74	2.00	V	0	44.74	73.98	29.24	PK
4960	42.74	2.00	V	-24.73	20.01	53.98	33.97	AV
7440	41.18	9.99	V	0	51.17	73.98	22.81	PK
7440	41.18	9.99	V	-24.73	26.44	53.98	27.54	AV
4960	42.37	2.00	H	0	44.37	73.98	29.61	PK
4960	42.37	2.00	H	-24.73	19.64	53.98	34.34	AV
7440	40.47	9.99	H	0	50.46	73.98	23.52	PK
7440	40.47	9.99	H	-24.73	25.73	53.98	28.25	AV

Operation Mode: CH Low(8DPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4804	44.62	2.51	V	0	47.13	73.98	26.85	PK
4804	44.62	2.51	V	-24.73	22.40	53.98	31.58	AV
7206	41.30	9.10	V	0	50.40	73.98	23.58	PK
7206	41.30	9.10	V	-24.73	25.66	53.98	28.32	AV
4804	45.10	2.51	H	0	47.61	73.98	26.37	PK
4804	45.10	2.51	H	-24.73	22.88	53.98	31.10	AV
7206	41.73	9.10	H	0	50.83	73.98	23.15	PK
7206	41.73	9.10	H	-24.73	26.09	53.98	27.89	AV

Operation Mode: CH Mid(8DPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4882	42.64	2.92	V	0	45.56	73.98	28.42	PK
4882	42.64	2.92	V	-24.73	20.83	53.98	33.15	AV
7323	41.05	9.42	V	0	50.47	73.98	23.51	PK
7323	41.05	10.20	V	-24.73	26.52	53.98	27.46	AV
4882	43.45	2.92	H	0	46.37	73.98	27.61	PK
4882	43.45	2.92	H	-24.73	21.64	53.98	32.34	AV
7323	41.15	9.42	H	0	50.57	73.98	23.41	PK
7323	41.15	10.20	H	-24.73	26.62	53.98	27.36	AV

Operation Mode: CH High(8DPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4960	42.93	2.00	V	0	44.93	73.98	29.05	PK
4960	42.93	2.00	V	-24.73	20.20	53.98	33.78	AV
7440	40.92	9.99	V	0	50.91	73.98	23.07	PK
7440	40.92	9.99	V	-24.73	26.18	53.98	27.80	AV
4960	42.91	2.00	H	0	44.91	73.98	29.07	PK
4960	42.91	2.00	H	-24.73	20.18	53.98	33.80	AV
7440	40.66	9.99	H	0	50.65	73.98	23.33	PK
7440	40.66	9.99	H	-24.73	25.92	53.98	28.06	AV

**[Ant. 2] Frequency Range : Above 1 GHz**

Operation Mode: CH Low(GFSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4804	44.02	2.51	V	0	46.53	73.98	27.45	PK
4804	44.02	2.51	V	-24.73	21.80	53.98	32.18	AV
7206	39.69	9.10	V	0	48.79	73.98	25.19	PK
7206	39.69	9.10	V	-24.73	24.05	53.98	29.93	AV
4804	44.26	2.51	H	0	46.77	73.98	27.21	PK
4804	44.26	2.51	H	-24.73	22.04	53.98	31.94	AV
7206	39.95	9.10	H	0	49.05	73.98	24.93	PK
7206	39.95	9.10	H	-24.73	24.31	53.98	29.67	AV

Operation Mode: CH Mid(GFSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4882	41.97	2.92	V	0	44.89	73.98	29.09	PK
4882	41.97	2.92	V	-24.73	20.16	53.98	33.82	AV
7323	40.30	9.42	V	0	49.72	73.98	24.26	PK
7323	40.30	10.20	V	-24.73	25.77	53.98	28.21	AV
4882	42.33	2.92	H	0	45.25	73.98	28.73	PK
4882	42.33	2.92	H	-24.73	20.52	53.98	33.46	AV
7323	40.44	9.42	H	0	49.86	73.98	24.12	PK
7323	40.44	10.20	H	-24.73	25.91	53.98	28.07	AV

Operation Mode: CH High(GFSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	41.45	2.00	V	0	43.45	73.98	30.53	PK
4960	41.45	2.00	V	-24.73	18.72	53.98	35.26	AV
7440	40.39	9.99	V	0	50.38	73.98	23.60	PK
7440	40.39	9.99	V	-24.73	25.65	53.98	28.33	AV
4960	41.92	2.00	H	0	43.92	73.98	30.06	PK
4960	41.92	2.00	H	-24.73	19.19	53.98	34.79	AV
7440	40.75	9.99	H	0	50.74	73.98	23.24	PK
7440	40.75	9.99	H	-24.73	26.01	53.98	27.97	AV

Operation Mode: CH Low( $\pi/4$ DQPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4804	44.61	2.51	V	0	47.12	73.98	26.86	PK
4804	44.61	2.51	V	-24.73	22.39	53.98	31.59	AV
7206	40.25	9.10	V	0	49.35	73.98	24.63	PK
7206	40.25	9.10	V	-24.73	24.61	53.98	29.37	AV
4804	44.95	2.51	H	0	47.46	73.98	26.52	PK
4804	44.95	2.51	H	-24.73	22.73	53.98	31.25	AV
7206	40.60	9.10	H	0	49.70	73.98	24.28	PK
7206	40.60	9.10	H	-24.73	24.96	53.98	29.02	AV

Operation Mode: CH Mid( $\pi/4$ DQPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4882	42.17	2.92	V	0	45.09	73.98	28.89	PK
4882	42.17	2.92	V	-24.73	20.36	53.98	33.62	AV
7323	40.67	9.42	V	0	50.09	73.98	23.89	PK
7323	40.67	10.20	V	-24.73	26.14	53.98	27.84	AV
4882	42.82	2.92	H	0	45.74	73.98	28.24	PK
4882	42.82	2.92	H	-24.73	21.01	53.98	32.97	AV
7323	40.82	9.42	H	0	50.24	73.98	23.74	PK
7323	40.82	10.20	H	-24.73	26.29	53.98	27.69	AV

Operation Mode: CH High( $\pi/4$ DQPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4960	42.19	2.00	V	0	44.19	73.98	29.79	PK
4960	42.19	2.00	V	-24.73	19.46	53.98	34.52	AV
7440	40.35	9.99	V	0	50.34	73.98	23.64	PK
7440	40.35	9.99	V	-24.73	25.61	53.98	28.37	AV
4960	42.23	2.00	H	0	44.23	73.98	29.75	PK
4960	42.23	2.00	H	-24.73	19.50	53.98	34.48	AV
7440	40.56	9.99	H	0	50.55	73.98	23.43	PK
7440	40.56	9.99	H	-24.73	25.82	53.98	28.16	AV

Operation Mode: CH Low(8DPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4804	44.54	2.51	V	0	47.05	73.98	26.93	PK
4804	44.54	2.51	V	-24.73	22.32	53.98	31.66	AV
7206	41.28	9.10	V	0	50.38	73.98	23.60	PK
7206	41.28	9.10	V	-24.73	25.64	53.98	28.34	AV
4804	45.07	2.51	H	0	47.58	73.98	26.40	PK
4804	45.07	2.51	H	-24.73	22.85	53.98	31.13	AV
7206	41.42	9.10	H	0	50.52	73.98	23.46	PK
7206	41.42	9.10	H	-24.73	25.78	53.98	28.20	AV

Operation Mode: CH Mid(8DPSK)

Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4882	42.07	2.92	V	0	44.99	73.98	28.99	PK
4882	42.07	2.92	V	-24.73	20.26	53.98	33.72	AV
7323	40.37	9.42	V	0	49.79	73.98	24.19	PK
7323	40.37	10.20	V	-24.73	25.84	53.98	28.14	AV
4882	42.59	2.92	H	0	45.51	73.98	28.47	PK
4882	42.59	2.92	H	-24.73	20.78	53.98	33.20	AV
7323	40.96	9.42	H	0	50.38	73.98	23.60	PK
7323	40.96	10.20	H	-24.73	26.43	53.98	27.55	AV

Operation Mode: CH High(8DPSK)


Frequency	Measured Value	AF+CL+DF-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4960	41.99	2.00	V	0	43.99	73.98	29.99	PK
4960	41.99	2.00	V	-24.73	19.26	53.98	34.72	AV
7440	40.06	9.99	V	0	50.05	73.98	23.93	PK
7440	40.06	9.99	V	-24.73	25.32	53.98	28.66	AV
4960	42.36	2.00	H	0	44.36	73.98	29.62	PK
4960	42.36	2.00	H	-24.73	19.63	53.98	34.35	AV
7440	40.18	9.99	H	0	50.17	73.98	23.81	PK
7440	40.18	9.99	H	-24.73	25.44	53.98	28.54	AV



**RESULT PLOTS**


**[Ant. 1]**

Radiated Spurious Emissions plot – Peak & Average Result ( $\pi/4$ DQPSK, Ch.39 3rd Harmonic, H)

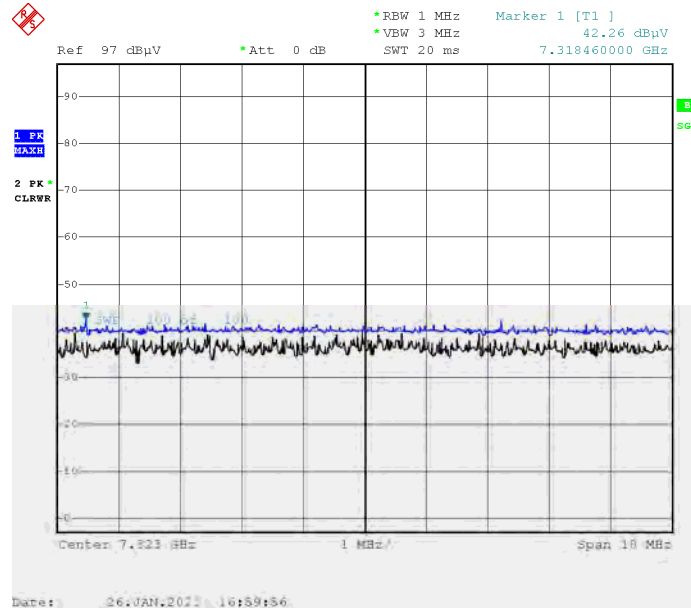

**[Ant. 2]**

Radiated Spurious Emissions plot – Peak & Average Result (GFSK, Ch.78 3rd Harmonic, H)

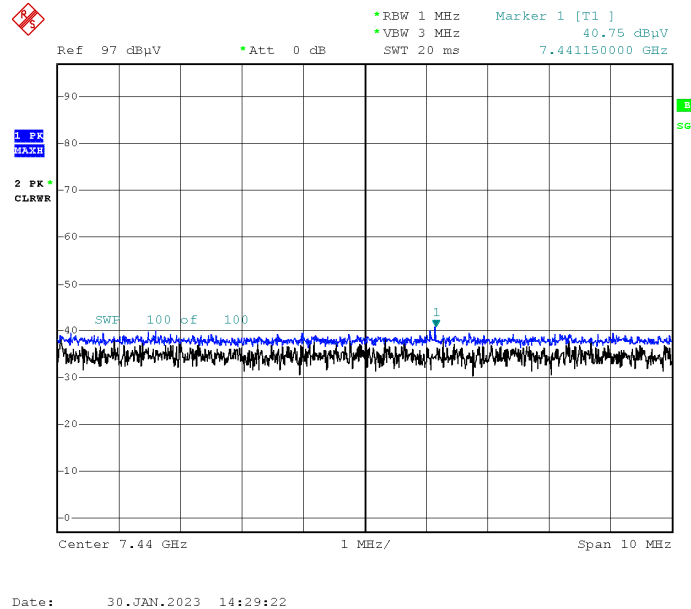

**Note:**

Plot of worst case are only reported.

### 10.6.3 RADIATED RESTRICTED BAND EDGES

**[Ant. 1]**

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency	Measured Level	A.F+C.L+D.F	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
2310.0~2390.0	19.17	34.90	H	0	54.06	73.98	19.92	PK
2310.0~2390.0	19.17	34.90	H	-24.73	29.33	53.98	24.65	AV
2310.0~2390.0	19.15	34.90	V	0	54.04	73.98	19.94	PK
2310.0~2390.0	19.15	34.90	V	-24.73	29.31	53.98	24.67	AV
2483.5~2500.0	19.65	35.10	H	0	54.75	73.98	19.23	PK
2483.5~2500.0	19.65	35.10	H	-24.73	30.02	53.98	23.96	AV
2483.5~2500.0	19.79	35.10	V	0	54.89	73.98	19.09	PK
2483.5~2500.0	19.79	35.10	V	-24.73	30.16	53.98	23.82	AV

Operation Mode	EDR( $\pi$ /4DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency	Measured Level	A.F+C.L+D.F	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
2310.0~2390.0	19.29	34.90	H	0	54.18	73.98	19.80	PK
2310.0~2390.0	19.29	34.90	H	-24.73	29.45	53.98	24.53	AV
2310.0~2390.0	19.38	34.90	V	0	54.27	73.98	19.71	PK
2310.0~2390.0	19.38	34.90	V	-24.73	29.54	53.98	24.44	AV
2483.5~2500.0	19.68	35.10	H	0	54.77	73.98	19.21	PK
2483.5~2500.0	19.68	35.10	H	-24.73	30.04	53.98	23.94	AV
2483.5~2500.0	19.90	35.10	V	0	54.99	73.98	18.99	PK
2483.5~2500.0	19.90	35.10	V	-24.73	30.26	53.98	23.72	AV





Operation Mode EDR(8DPSK)  
 Operating Frequency 2402 MHz, 2480 MHz  
 Channel No CH 0, CH 78

Frequency	Measured Level	A.F+C.L+D.F	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
2310.0~2390.0	19.55	34.90	H	0	54.44	73.98	19.54	PK
2310.0~2390.0	19.55	34.90	H	-24.73	29.71	53.98	24.27	AV
2310.0~2390.0	19.93	34.90	V	0	54.82	73.98	19.16	PK
2310.0~2390.0	19.93	34.90	V	-24.73	30.09	53.98	23.89	AV
2483.5~2500.0	19.69	35.10	H	0	54.79	73.98	19.19	PK
2483.5~2500.0	19.69	35.10	H	-24.73	30.06	53.98	23.92	AV
2483.5~2500.0	19.88	35.10	V	0	54.98	73.98	19.00	PK
2483.5~2500.0	19.88	35.10	V	-24.73	30.25	53.98	23.73	AV

**[Ant. 2]**

Operation Mode            Normal(GFSK)  
 Operating Frequency    2402 MHz, 2480 MHz  
 Channel No                CH 0, CH 78

Frequency	Measured Level	A.F+C.L+D.F	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
2390.0	19.69	34.90	H	0	54.59	73.98	19.39	PK
2390.0	19.69	34.90	H	-24.73	29.86	53.98	24.12	AV
2390.0	19.54	34.90	V	0	54.44	73.98	19.54	PK
2390.0	19.54	34.90	V	-24.73	29.71	53.98	24.27	AV
2483.5	19.72	35.10	H	0	54.82	73.98	19.16	PK
2483.5	19.72	35.10	H	-24.73	30.09	53.98	23.89	AV
2483.5	19.78	35.10	V	0	54.88	73.98	19.10	PK
2483.5	19.78	35.10	V	-24.73	30.15	53.98	23.83	AV

Operation Mode            EDR( $\pi$ /4DQPSK)  
 Operating Frequency    2402 MHz, 2480 MHz  
 Channel No                CH 0, CH 78

Frequency	Measured Level	A.F+C.L+D.F	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
2390.0	19.79	34.90	H	0	54.68	73.98	19.30	PK
2390.0	19.79	34.90	H	-24.73	29.95	53.98	24.03	AV
2390.0	19.63	34.90	V	0	54.53	73.98	19.45	PK
2390.0	19.63	34.90	V	-24.73	29.79	53.98	24.19	AV
2483.5	20.20	35.10	H	0	55.30	73.98	18.68	PK
2483.5	20.20	35.10	H	-24.73	30.57	53.98	23.41	AV
2483.5	20.31	35.10	V	0	55.41	73.98	18.57	PK
2483.5	20.31	35.10	V	-24.73	30.67	53.98	23.31	AV




Operation Mode      EDR(8DPSK)  
 Operating Frequency    2402 MHz, 2480 MHz  
 Channel No            CH 0, CH 78

Frequency	Measured Level	A.F+C.L+D.F	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
2390.0	20.33	34.90	H	0	55.23	73.98	18.75	PK
2390.0	20.33	34.90	H	-24.73	30.50	53.98	23.48	AV
2390.0	20.22	34.90	V	0	55.11	73.98	18.87	PK
2390.0	20.22	34.90	V	-24.73	30.38	53.98	23.60	AV
2483.5	19.85	35.10	H	0	54.94	73.98	19.04	PK
2483.5	19.85	35.10	H	-24.73	30.21	53.98	23.77	AV
2483.5	19.54	35.10	V	0	54.64	73.98	19.34	PK
2483.5	19.54	35.10	V	-24.73	29.91	53.98	24.07	AV

**RESULT PLOTS**


[Ant. 1]

Radiated Restricted Band Edges plot – Average & Peak Result ( $\pi/4$ DQPSK, Ch.78, X-V)

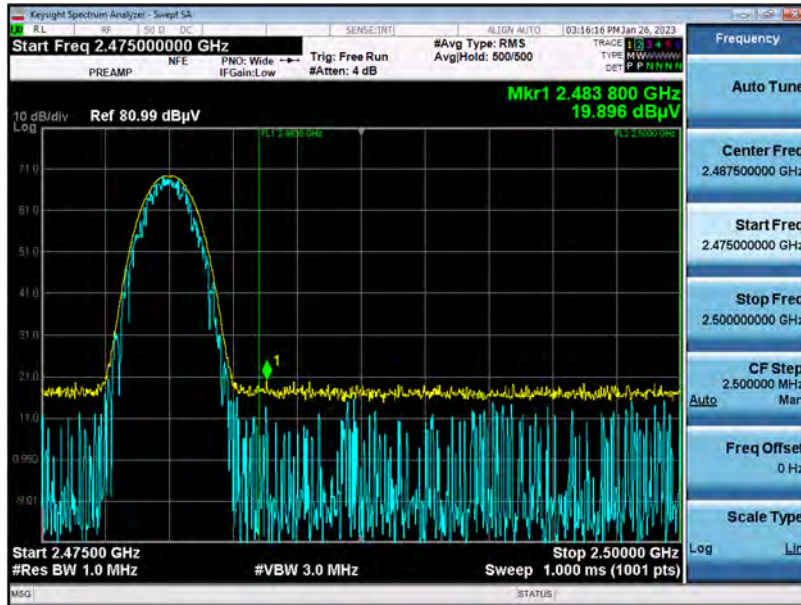

[Ant. 2]

Radiated Restricted Band Edges plot – Average & Peak Result ( $\pi/4$ DQPSK, Ch.78, Z-H)

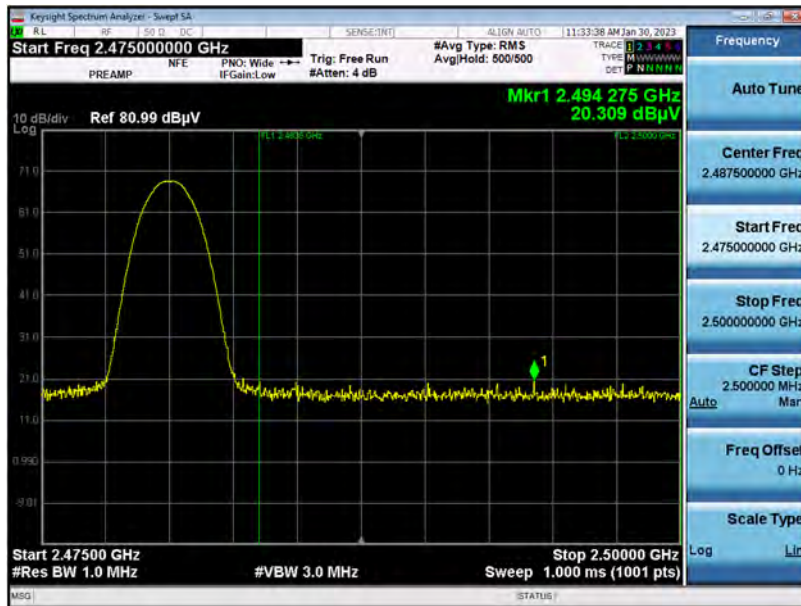

Note: Plot of worst case are only reported.

### 10.7 RECEIVER SPURIOUS EMISSIONS

#### Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB V]	[dB/m]	[H/V]	[dB V/m]	[dB V/m]	[dB]
No Critical peaks found						

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

#### Frequency Range : Above 1 GHz

Frequency	Measured Value	AF+CL+DF-AG	Ant. POL	Total	Limit	Margin
[MHz]	[dB V]	[dB/m]	[H/V]	[dB V/m]	[dB V/m]	[dB]
No Critical peaks found						

## 11. LIST OF TEST EQUIPMENT

### Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/04/2023	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/06/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/24/2023	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/24/2023	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2023	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/03/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	06/21/2023	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/07/2023	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/22/2023	Annual

#### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.



**Radiated Test**

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/07/2023	Annual
ATT(3 dB) + LNA2(6~18 GHz)	18B-03, CBL06185030	WEINSCHEL CERNEX	N/A	12/05/2023	Annual
ATT(10 dB) + LNA1(0.1~18 GHz)	56-10, CBLU1183540B-01	Api tech, CERNEX	N/A	12/05/2023	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	N/A	12/05/2023	Annual
High Pass Filter	WHKX8-6090-7000-18000-40SS	Wainwright Instruments	N/A	12/05/2023	Annual
Thru	COAXIAL ATTENUATOR	T&M SYSTEM	N/A	12/05/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/11/2023	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	04/05/2023	Annual
Spectrum Analyzer	FSP(9 kHz ~ 30 GHz)	Rohde & Schwarz	836650/016	09/06/2023	Annual
Spectrum Analyzer	FSV40-N(9 kHz ~ 30 GHz)	Rohde & Schwarz	101068-SZ	09/07/2023	Annual

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).



## 12. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2302-FI005-P