



HCT CO., LTD.

PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL: +82 31 639 8539 FAX: +82 31 639 8525 www.hct.co.kr

EMI CERTIFICATION REPORT

LG Electronics Inc.

60-39, Gasan-dong, Gumchon-gu,
Seoul, 153-023, Korea

Date of Issue: December 22, 2009
Test Report No.: HCTE0911FE16-1

Test Site: HCT CO., LTD.
HCT FRN: 0005-8664-21

FCC ID:


BEJGX200

Classification / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B
Equipment Type : Cellular/PCS GSM Phone with Bluetooth
GPRS Class 10 and GPRS mode class B
(GPRS and GSM, but not simultaneously)
Trade Name / Model(s) : LG Electronics Inc. / GX200
Port / Connector(s) : USB Data Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See test report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.


Report prepared by
: Gyeong Seon Kim
Test Engineer of EMC Tech. Part



Approved by
: Nam Wook Kang
Manager of EMC Tech. Part

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	3
1.1 Product description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested system details.....	4
1.4 Cable description.....	4
1.5 Noise suppression parts on cable. (I/O cable)	4
1.6 Test methodology.....	5
1.7 Test facility.....	5
1.8 Frequency range of radiated measurements	5
2. SYSTEM TEST CONFIGURATION.....	6
2.1 Configuration of tested system.....	6
3. PRELIMINARY TEST.....	7
3.1 Conducted Emission test.....	7
3.2 Radiated Emission test.....	7
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY.....	8
4.1 Conducted Emission test.....	8
4.2 Radiated Emission test.....	13
5. FIELD STRENGTH CALCULATION.....	14
6. TEST EQUIPMENT.....	15
7. CONCLUSION.....	16

ATTACHMENT : TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

The **LG Electronics Inc. Model: GX200, Cellular/PCS GSM Phone with Bluetooth, GPRS Class 10 and GPRS mode class B (GPRS and GSM, but not simultaneously).**

It's basic purpose is used for communications. It transmits from GSM 850 (824.20 MHz to 848.80 MHz), GSM 1 900 (1 850.20 MHz to 1 909.80 MHz) and receives from GSM 850 (869.20 MHz to 893.80 MHz), GSM 1 900 (1 930.20 MHz to 1 989.80 MHz).

Model	GX200
FCC ID	BEJGX200
E.U.T Type	Cellular/PCS GSM Phone with Bluetooth GPRS Class 10 and GPRS mode class B (GPRS and GSM, but not simultaneously)
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number /Part Number	FCC ID / DoC	Connected to
E.U.T	LG	GX200	BEJGX200	Notebook PC TA
Notebook PC	HP	Compaq6730b	DoC	E.U.T
Notebook PC adaptor	Hipro Electronics	PPP014Y-S	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
USB cable	-	-	-	E.U.T Notebook PC

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
E.U.T	USB data	Y	Y	(P,D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
E.U.T	USB data	N	-	Y	Both end
Notebook PC	USB (Mouse)	Y	Notebook PC end	Y	Notebook PC end

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Icheon-si, Kyoungki-do, 467-701, Korea. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the commission and accepted dated June 10, 2009. (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN, all other peripheral equipment were connected to another LISN. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of Tested System]

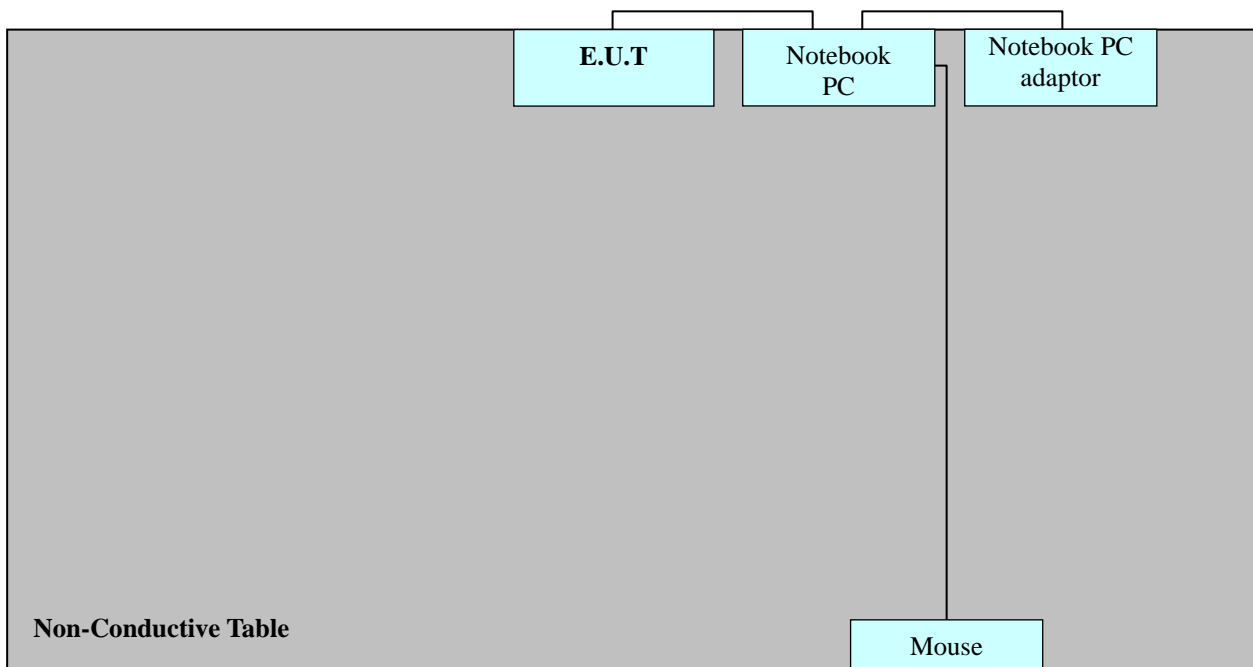

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

During preliminary tests, the following operating mode was investigated

Operation Mode	The Worst Operating Condition
Data Communication	○

3. 2 Radiated Emission Test

During preliminary test, the following operation mode was investigated

Operation Mode	The Worst Operating Condition
Data Communication	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 9.1 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 22.0 °C
Humidity level	: 31.3 %
Test date	: November 12, 2009

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB μ V)	Conductor	Result	Limit (dB μ V)	Margin (dB)
0.1901	48.5	NEUTRAL	Quasi-Peak	64.0	15.6
0.2101	47.0	HOT	Quasi-Peak	63.0	16.2
0.2741	43.6	NEUTRAL	Quasi-Peak	61.0	17.4
11.0680	46.6	HOT	Quasi-Peak	60.0	13.4
11.1360	44.5	NEUTRAL	Quasi-Peak	60.0	15.5
11.2760	46.6	HOT	Quasi-Peak	60.0	13.4
0.1941	39.7	NEUTRAL	Average	54.0	14.2
0.1981	39.5	HOT	Average	54.0	14.2
9.3640	33.8	NEUTRAL	Average	50.0	16.2
10.8520	37.1	NEUTRAL	Average	50.0	12.9
11.1920	39.6	HOT	Average	50.0	10.4
11.3760	40.9	HOT	Average	50.0	9.1


HCT

EMC

EUT: GX200
 Manufacturer: LG
 Operating Condition: DATA COMMUNICATION MODE
 Test Site: SHIELD ROOM
 Operator: GS-KIM
 Test Specification: CISPR22 CLASS B
 Comment: H

SCAN TABLE: "EN 55022 Voltage"

Short Description:		EN 55022 Voltage					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.1 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				

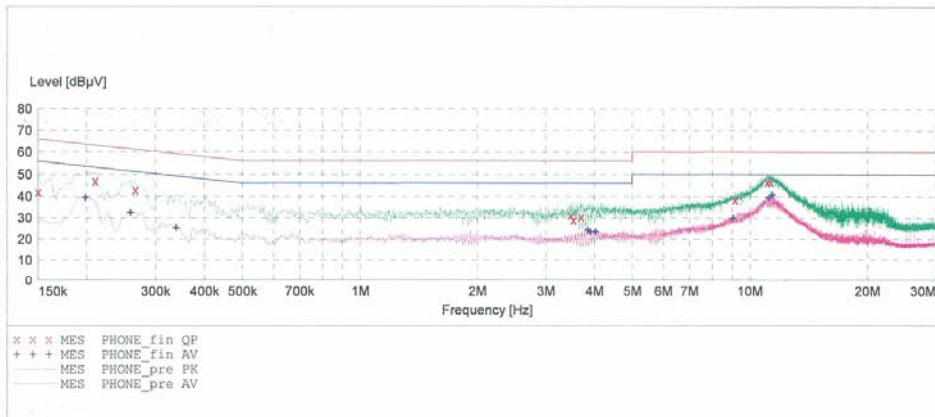

MEASUREMENT RESULT: "PHONE_fin QP"

11/12/2009 2:04PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150100	42.00	10.0	66	24.0	1	---
0.210100	47.00	10.1	63	16.2	1	---
0.266100	42.80	10.1	61	18.5	1	---
3.476000	31.10	10.2	56	24.9	1	---
3.536000	28.80	10.2	56	27.2	1	---
3.692000	30.30	10.2	56	25.7	1	---
9.152000	38.40	10.7	60	21.6	1	---
11.068000	46.60	10.8	60	13.4	1	---
11.276000	46.60	10.9	60	13.4	1	---

MEASUREMENT RESULT: "PHONE_fin AV"

11/12/2009 2:04PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.198100	39.50	10.1	54	14.2	1	---
0.258100	32.70	10.1	52	18.8	1	---

MEASUREMENT RESULT: "PHONE_fin AV"

(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.338100	25.50	10.0	49	23.7	1	---
3.836000	24.30	10.3	46	21.7	1	---
3.900000	23.60	10.3	46	22.4	1	---
4.024000	23.50	10.3	46	22.5	1	---
9.036000	30.00	10.7	50	20.0	1	---
11.192000	39.60	10.9	50	10.4	1	---
11.376000	40.90	10.9	50	9.1	1	---


HCT

EMC

EUT: GX200
 Manufacturer: LG
 Operating Condition: DATA COMMUNICATION MODE
 Test Site: SHIELD ROOM
 Operator: GS-KIM
 Test Specification: CISPR22 CLASS B
 Comment: N

SCAN TABLE: "EN 55022 Voltage"

Short Description:		EN 55022 Voltage					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.1 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				

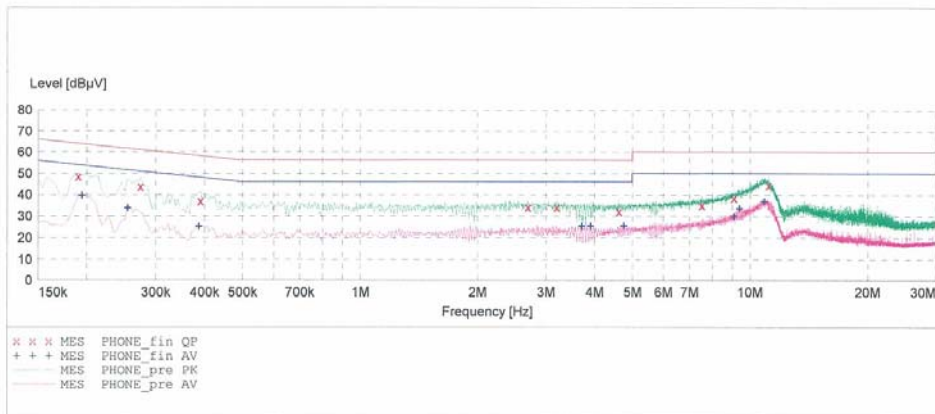

MEASUREMENT RESULT: "PHONE_fin QP"

11/12/2009 2:07PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.190100	48.50	10.1	64	15.6	1	---
0.274100	43.60	10.1	61	17.4	1	---
0.390100	37.00	10.0	58	21.0	1	---
2.696000	34.10	10.2	56	21.9	1	---
3.192000	34.10	10.2	56	21.9	1	---
4.612000	32.20	10.3	56	23.8	1	---
7.520000	35.20	10.6	60	24.8	1	---
9.080000	38.50	10.7	60	21.5	1	---
11.136000	44.50	10.8	60	15.5	1	---

MEASUREMENT RESULT: "PHONE_fin AV"

11/12/2009 2:07PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.194100	39.70	10.1	54	14.2	1	---
0.254100	33.90	10.1	52	17.7	1	---

MEASUREMENT RESULT: "PHONE_fin AV"

(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.386100	25.20	10.0	48	23.0	1	---
3.704000	25.50	10.2	46	20.5	1	---
3.900000	25.50	10.3	46	20.5	1	---
4.752000	25.60	10.3	46	20.4	1	---
9.080000	30.20	10.7	50	19.8	1	---
9.364000	33.80	10.7	50	16.2	1	---
10.852000	37.10	10.8	50	12.9	1	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to : FCC PART 15 Subpart B
 Result : Passed by 8.5 dB
 Operating condition : Data Communication mode
 Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Temperature : 12.0 °C
 Humidity level : 51.4 %
 Test date : November 12, 2009

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
57.3	14.8	12.2	0.8	V	27.8	40.0	12.2
114.3	21.5	10.3	1.2	V	33.0	43.5	10.5
149.2	15.7	12.6	1.3	H	29.6	43.5	13.9
240.0	24.7	11.1	1.7	V	37.5	46.0	8.5
264.0	19.9	11.9	1.8	H	33.6	46.0	12.4
311.0	14.1	13.3	1.9	H	29.3	46.0	16.7

Note)

For measurement over 1 GHz, noise level was more than 10 dB below the limit.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Next CAL Date</u>
EMI Test Receiver	Rohde & Schwarz	ESI40	2010.10.30
EMI Test Receiver	Rohde & Schwarz	ESCI	2010.06.02
LISN	Rohde & Schwarz	ESH3-Z5	2010.02.06
LISN	Rohde & Schwarz	ENV216	2010.04.01
Attenuator	Rohde & Schwarz	ESH3-Z2	2010.10.30
Trilog Antenna	Schwarzbeck	VULB9160	2010.12.18
Communication Antenna	TDK	LPDA-0802	-
Antenna Position Tower	HD	240/520/00	-
Base Station	Rohde & Schwarz	CMU 200	2010.02.17
Horn Antenna	Schwarzbeck	BBHA 9120D	2010.03.26
RF-Amplifier	MITEQ	AMF-6D-00101800-35.20PPS	2010.04.25
Bluetooth Base Station	TESCOM	TC-3000A	2010.01.09

7. CONCLUSION

The data collected shows that the **LG Electronics Inc. Model: GX200, Cellular/PCS GSM Phone with Bluetooth, GPRS Class 10 and GPRS mode class B (GPRS and GSM, but not simultaneously). FCC ID: BEJGX200** complies with §15.107 and §15.109 of the FCC rules.