



**DIGITAL EMC CO., LTD.**

683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080  
 Tel: +82-31-321-2664 Fax: +82-31-321-1664  
<http://www.digitalemcc.com>

**CERTIFICATION OF COMPLIANCE**

**LG Electronics USA.**

1000 Sylvan Avenue Englewood Cliffs New Jersey United States

Dates of Tests: March 10 ~ 19, 2009

Test Report S/N: DR50110903S

Test Site : DIGITAL EMC CO., LTD.

FCC ID

**BEJHBM210**

APPLICANT

**LG Electronics USA.**

**FCC Equipment Class : Part 15 Spread Spectrum Transmitter(DSS)**  
**Device name : BLUETOOTH Mono Headset**  
**Manufacturer : LG Electronics Inc.**  
**FCC ID : BEJHBM210**  
**Model name : HBM-210**  
**Test Device Serial number : Identical prototype**  
**FCC Rule Part(s) : FCC Part 15.247 Subpart C**  
**ANSI C63.4-2003**  
**Frequency Range : 2402 ~ 2480 MHz**  
**Max. Output power : 2.59 dBm Conducted**  
**Data of issue : March 20, 2009**

**TABLE OF CONTENTS**

1. GENERAL INFORMATION ----- 3

2. INFORMATION ABOUT TEST ITEM ----- 4

3. TEST REPORT ----- 5

    3.1 SUMMARY OF TESTS ----- 5

    3.2 TRANSMITTER REQUIREMENTS ----- 6

        3.2.1 CARRIER FREQUENCY SEPARATION ----- 6

        3.2.2 NUMBER OF HOPPING FREQUENCIES ----- 8

        3.2.3 20 dB BANDWIDTH ----- 11

        3.2.4 TIME OF OCCUPANCY (Dwell Time) ----- 14

        3.2.5 PEAK OUTPUT POWER ----- 16

        3.2.6 CONDUCTED SPURIOUS EMISSIONS ----- 19

        3.2.7 RADIATED EMISSION ----- 26

        3.2.8 AC LINE CONDUCTED EMISSIONS ----- 42

APPENDIX TEST EQUIPMENT FOR TESTS ----- 47

**1. General information**

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address: 683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

<http://www.digitalemccom> E-mail: [Harveysung@digitalemccom](mailto:Harveysung@digitalemccom)

Tel: +82-31-321-2664 Fax: +82-31-321-1664

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competent of calibration and testing laboratory”.

**Test operator: Engineer**



March 20, 2009

D.C. Cha

Data

Name

Signature

**Report Reviewed By: Technical Director**



March 20, 2009

Harvey Sung

Data

Name

Signature

**Ordering party:**

Company name : LG Electronics Inc.  
 Address : LG Twin Tower West Tower 22F Yoido-dong, Youngdungpo-gu  
 City/town : Seoul  
 Country : Korea  
 Date of order : March 06, 2009

## 2. Information about test item

### BEJHBM210

#### 2.1 Equipment information

Equipment model no.	HBM-210
Equipment serial no.	Identical prototype
Type of equipment	BLUETOOTH Mono Headset
Frequency band	2402 ~ 2480 MHz
Type of Modulation	GFSK
Spread Spectrum	Frequency Hopping
Channel Spacing	1.0 MHz
Power	Battery DC 3.7V
Type of antenna	Chip Antenna

- This device does not have EDR function.

#### 2.2 Tested frequency

Frequency	TX	RX
Low frequency	2402MHz	2402MHz
Middle frequency	2441MHz	2441MHz
High frequency	2480MHz	2480MHz

#### 2.3 Tested environment

Temperature	: 15 ~ 35 (°C)
Relative humidity content	: 20 ~ 75 %
Air pressure	: 86 ~ 103 kPa
Details of power supply	: 3.7 V DC

#### 2.4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
Adapter	STA-U33WR	RA8ZG0013754	SUNLIN	DC 5.6V, 0.4A
Adapter	STA-U34WRI	RA930000007	SUNLIN	DC 5.1V, 0.7A

#### 2.5 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing

→ None

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit (Using in 2400 ~ 2483.5MHz)	Test Condition	Status (note 1)
<b>I. Test Items</b>				
15.247(a)	Carrier Frequency Separation	$\geq 20\text{dB BW}$ or $\geq$ Two-Thirds of the 20dB BW	Conducted	C
	Number of Hopping Frequencies	$\geq 15$ hops		C
	20 dB Bandwidth	None		C
	Dwell Time	$\leq 0.4$ seconds		C
15.247(b)	Transmitter Output Power	$\leq 1\text{Watt}$ , if CHs $\geq 75$ Others $\leq 0.125\text{W}$		C
15.247(c)	Band-edge /Conducted	The radiated emission to any 100 kHz of outband shall be at least 20dB below the highest inband spectral density.		C
	Conducted Spurious Emissions		C	
15.205 15.209	Radiated Emissions	FCC 15.209 Limits	Radiated	C
15.207	AC Conducted Emissions	EN 55022	AC Line Conducted	C
Note 1: C=Comply    NC=Not Comply    NT=Not Tested    NA=Not Applicable				

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2003, DA00-705

### 3.2 Transmitter requirements

#### 3.2.1 Carrier Frequency Separation

**- Procedure:**

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz

Detector function = peak

Trace = max hold

**- Measurement Data:**

Frequency of marker #1 (MHz)	Frequency of marker #2 (MHz)	Test Results	
		Carrier Frequency Separation (MHz)	Result
2440.985	2441.990	1.005	<b>Comply</b>

- See next pages for actual measured spectrum plots.

**- Minimum Standard:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

**- Measurement Setup**


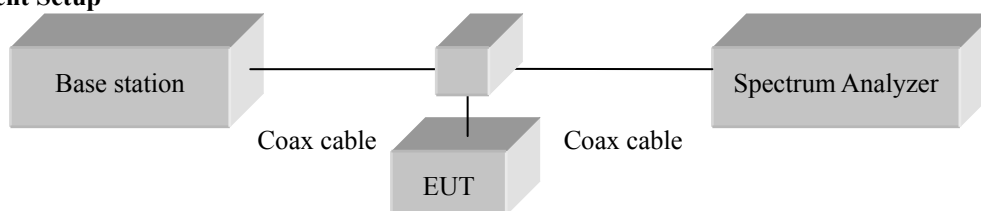


Figure 1: Measurement setup for the carrier frequency separation

### Carrier Frequency Separation

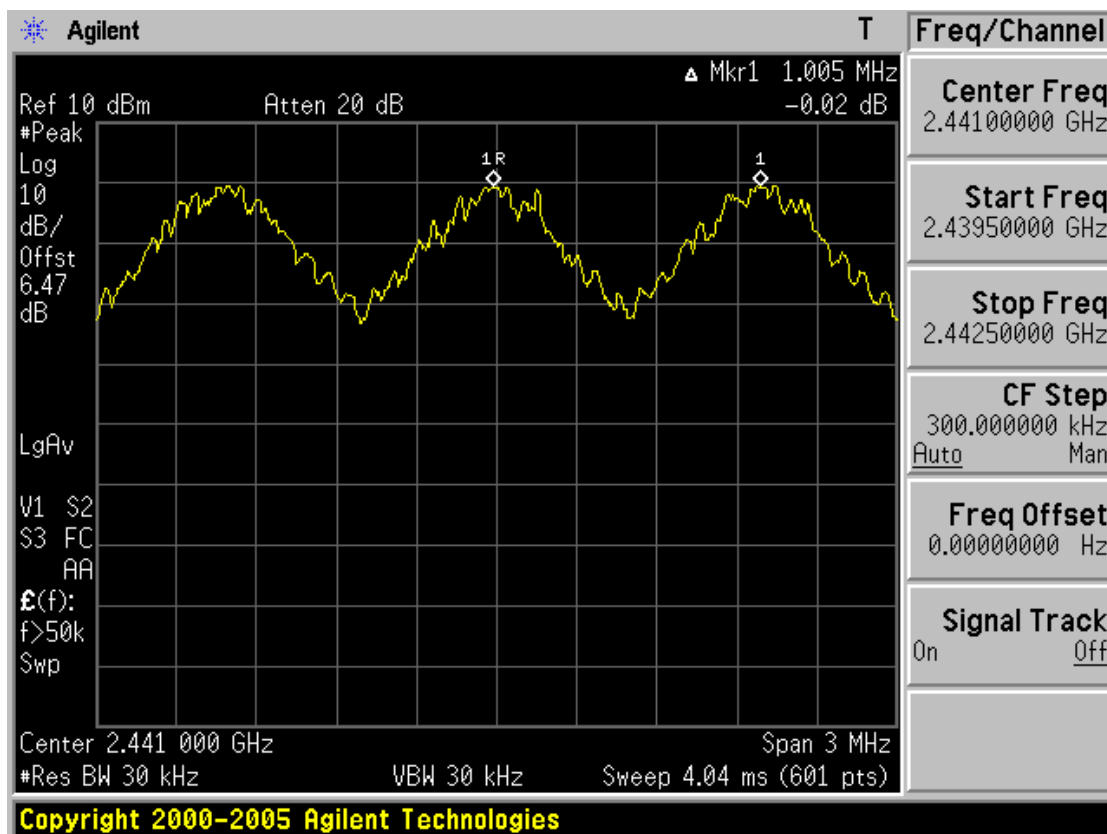

### 3.2.2 Number of Hopping Frequencies

**- Procedure:**

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to:

- Frequency range 1: Start = 2389.5MHz, Stop = 2414.5 MHz
  - 2: Start = 2414.5MHz, Stop = 2439.5 MHz
  - 3: Start = 2439.5MHz, Stop = 2464.5 MHz
  - 4: Start = 2464.5MHz, Stop = 2489.5 MHz
- RBW = 300 kHz (1% of the span or more)      Sweep = auto  
VBW = 300 kHz (VBW ≥ RBW)      Detector function = peak  
Trace = max hold      Span = 25MHz

**- Measurement Data: Comply**

<b>Total number of Hopping Channels</b>	79
---	----

- See next pages for actual measured spectrum plots.



**- Minimum Standard:**

At least 15 hopes
-------------------



**- Measurement Setup**

Same as the Chapter 3.2.1 (Figure 1)

### Number of Hopping Frequencies

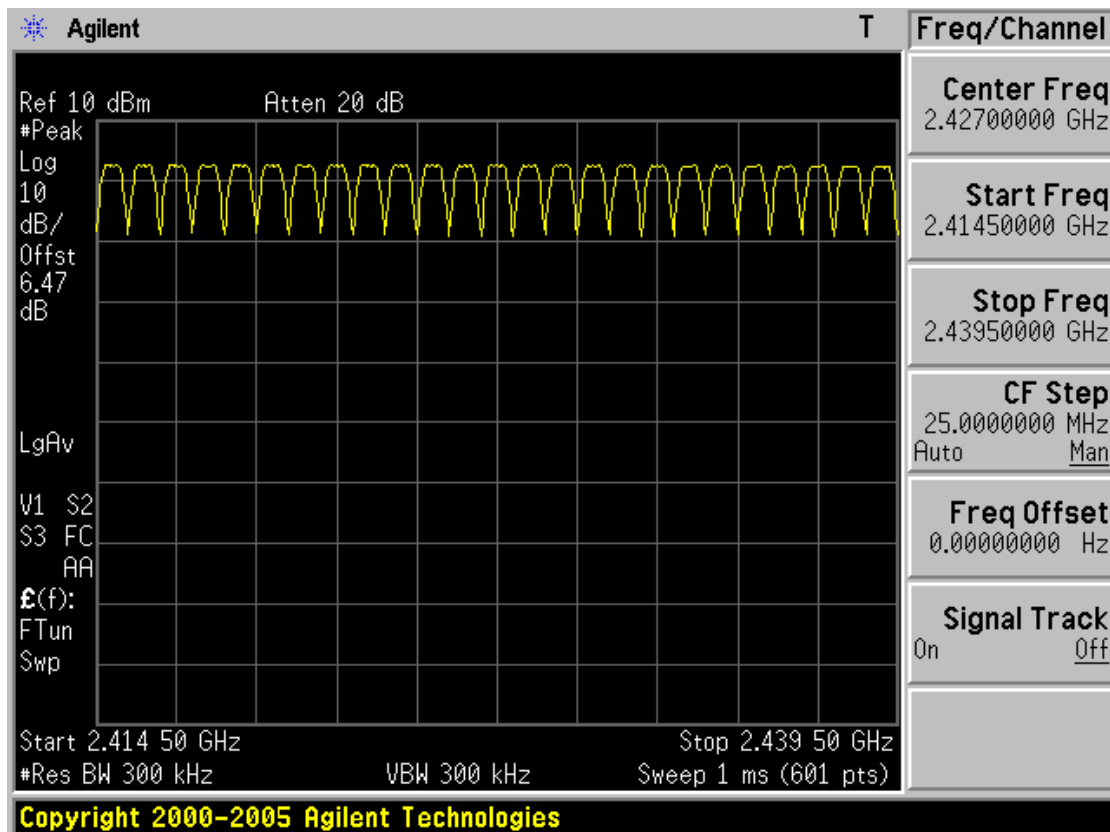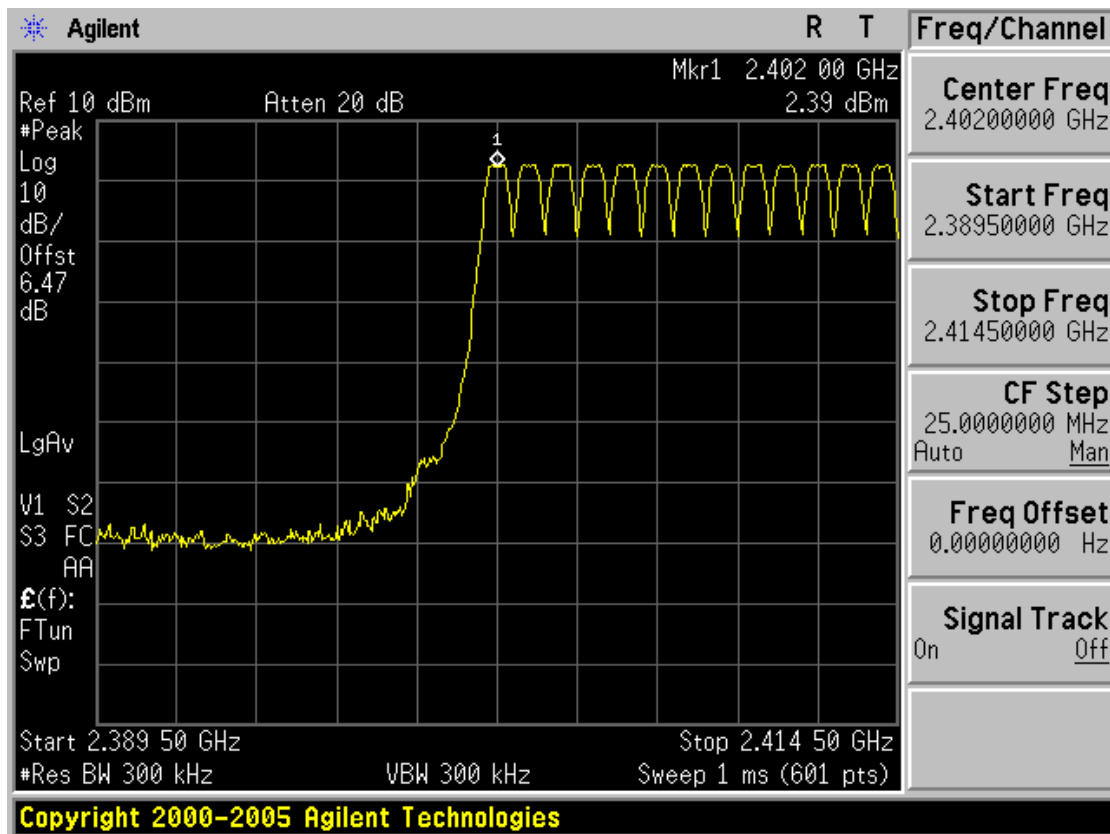

### Number of Hopping Frequencies

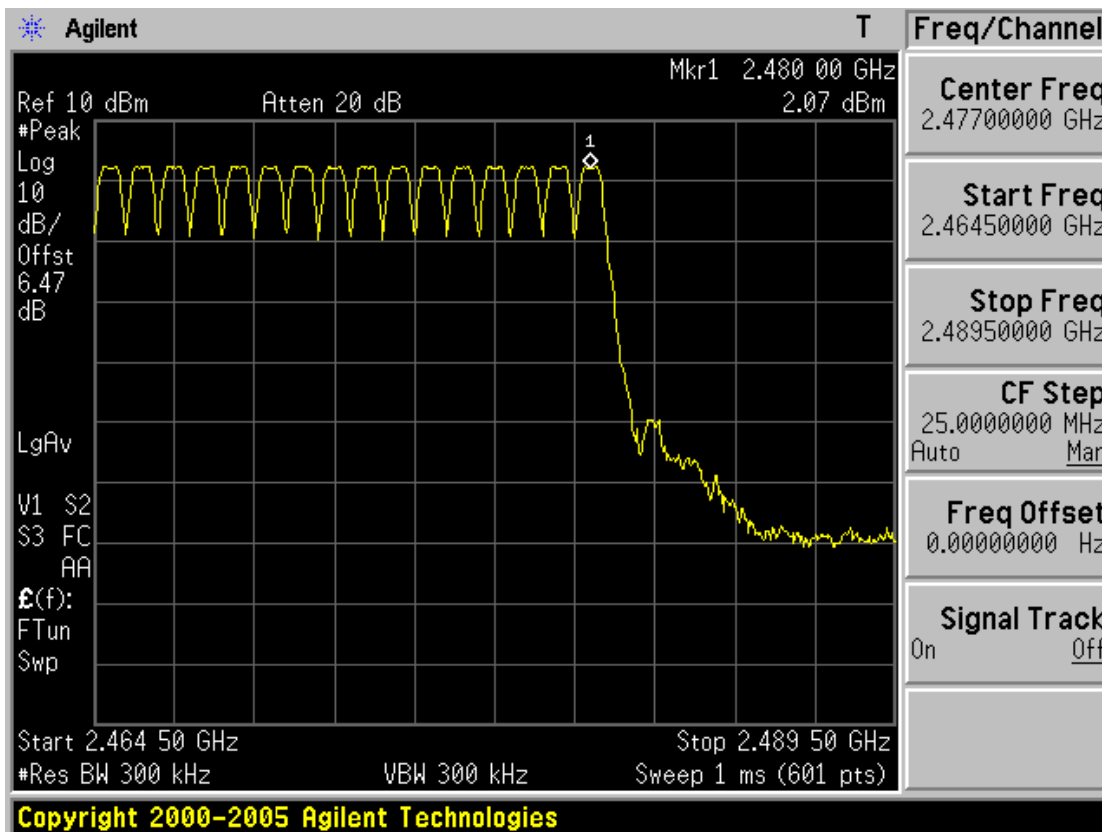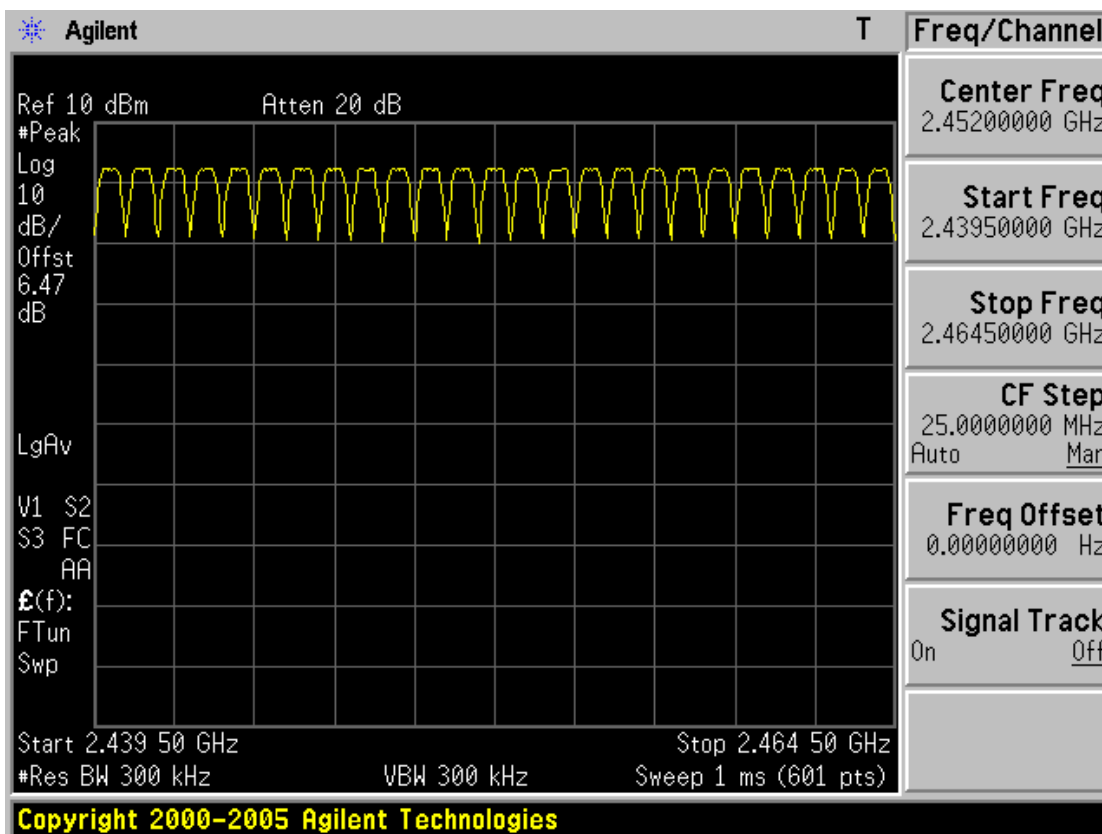

### 3.2.3 20 dB Bandwidth

**- Procedure:**

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 10 kHz (1% of the 20dB bandwidth or more) Sweep = auto

VBW = 10 kHz (VBW ≥ RBW) Detector function = peak

Trace = max hold

**- Measurement Data:**

Frequency (MHz)	Channel No.	Test Results	
		Measured Bandwidth (MHz)	Result
2402	1	0.933	Comply
2441	40	0.933	Comply
2480	79	0.933	Comply

- See next pages for actual measured spectrum plots.



**- Minimum Standard:**

None
------


**- Measurement Setup**

Same as the Chapter 3.2.1 (Figure 1)

20 dB Bandwidth

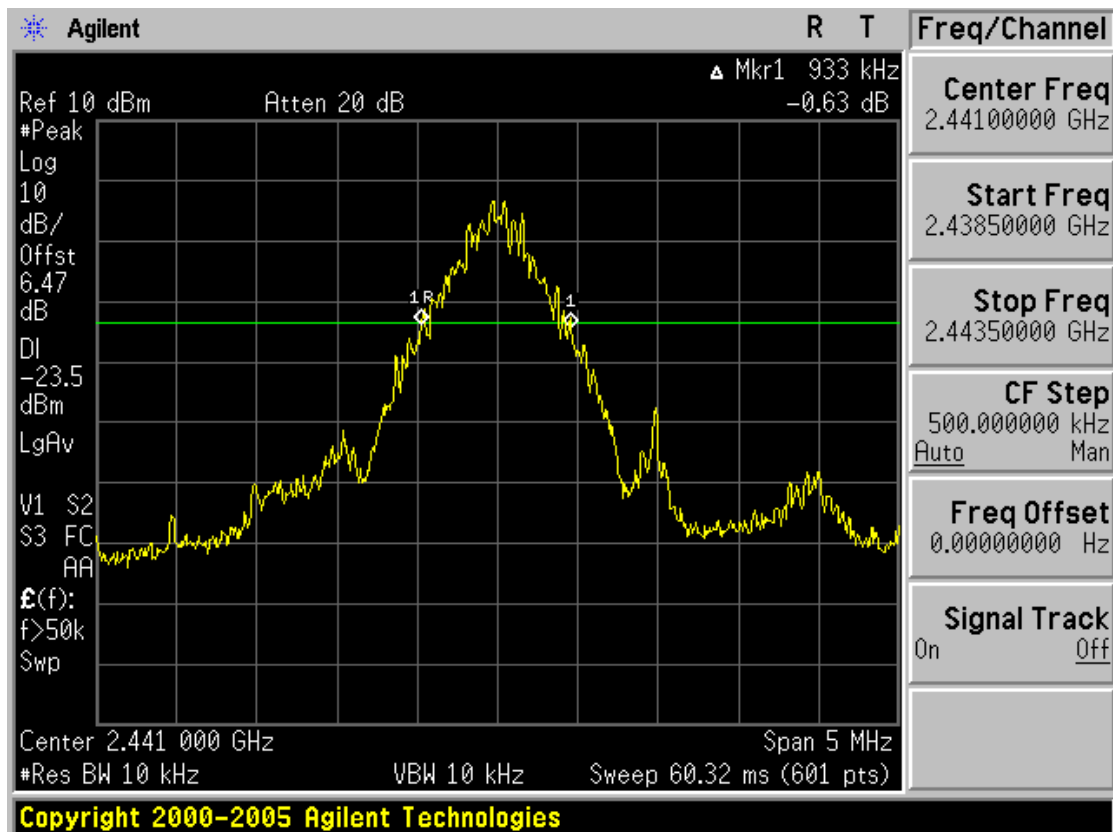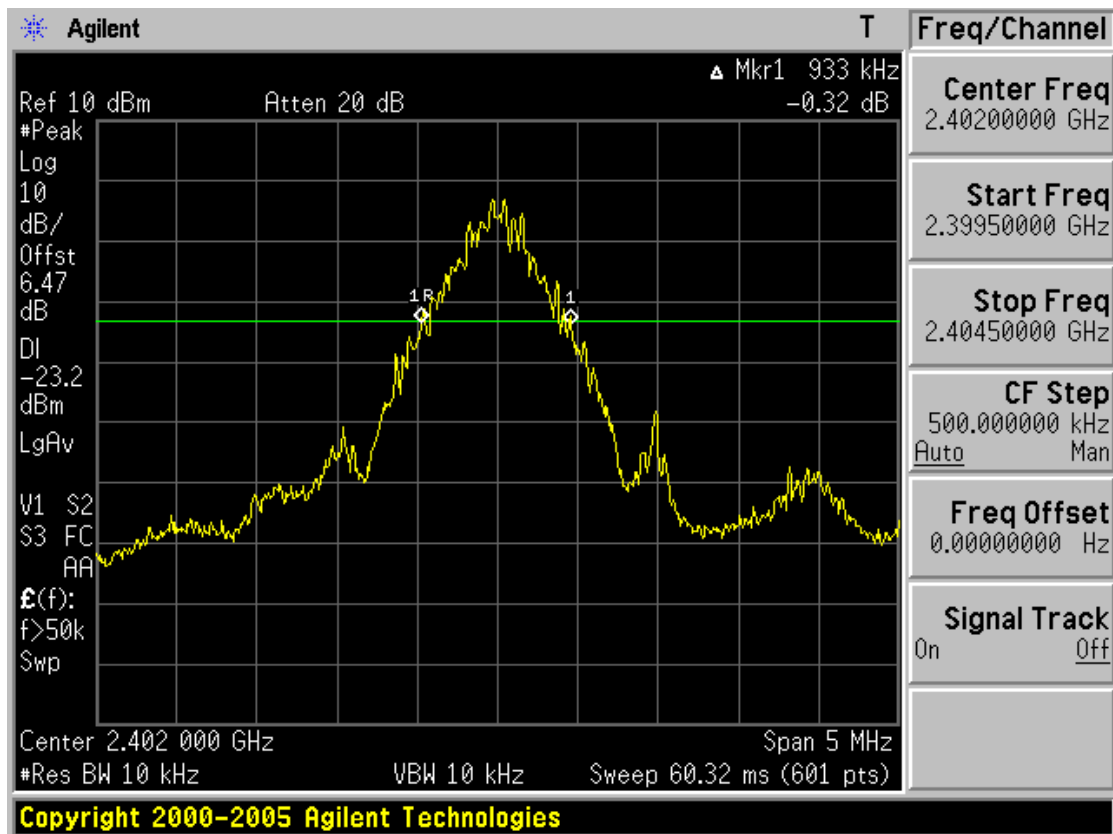

20 dB Bandwidth

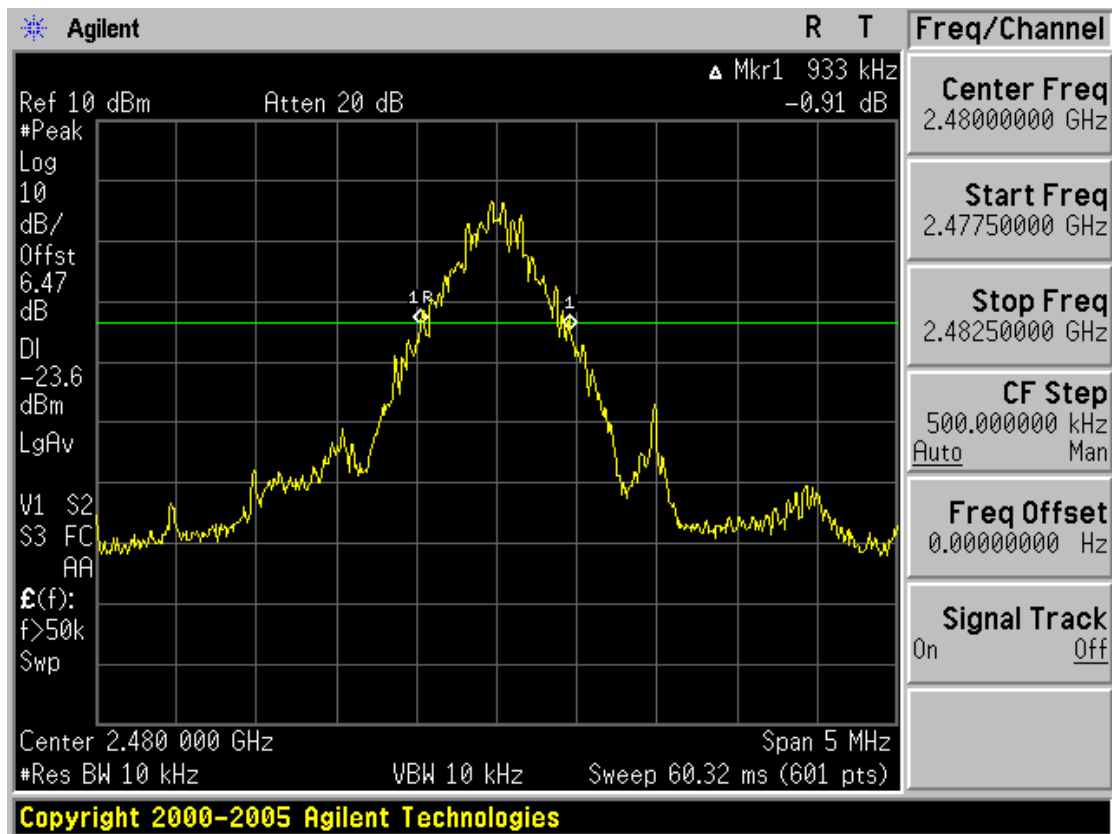

### 3.2.4 Time of Occupancy (Dwell Time)

**- Procedure:**

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

- Center frequency = 2441 MHz
- Span = zero
- RBW = 1 MHz
- VBW = 1 MHz (VBW ≥ RBW)
- Trace = max hold
- Detector function = peak

**- Measurement Data:** See next pages for actual measured spectrum plots.

Packet Type	Burst On Time (ms)	Period (ms)	Number of hopping Channels	DWELL TIME (s)	Result
DH 5	2.90	3.75	79	0.309	Comply

Note: Each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event.

$$DWELL\ TIME = (0.4 \times \text{Number of hopping Channels}) \times \text{Burst On time} / (\text{period} \times \text{Number of hopping Channels})$$


**- Minimum Standard:**

No greater than 0.4 seconds

**- Measurement Setup**

Same as the Chapter 3.2.1 (Figure 1)

**Time of Occupancy for Packet Type DH 5**

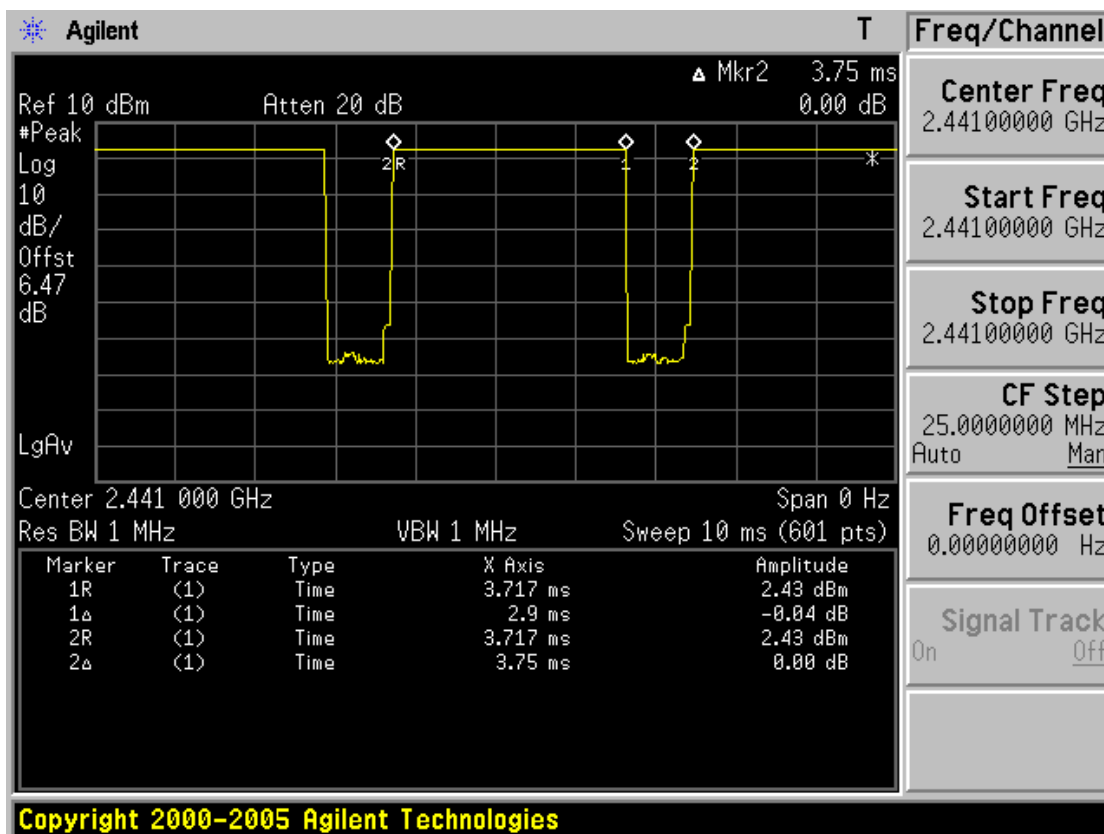

Copyright 2000-2005 Agilent Technologies

### 3.2.5 Peak Output Power

**- Procedure:**

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 1 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 1 MHz (VBW ≥ RBW)

Detector function = peak

Trace = max hold

Sweep = auto

**- Measurement Data:**

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	1	2.59	1.816	Comply
2441	40	2.35	1.718	Comply
2480	79	2.23	1.671	Comply

- See next pages for actual measured spectrum plots.



**- Minimum Standard:**

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: **1 Watt**. For all other frequency hopping systems in the 2400-2483.5 MHz band: **0.125 Watts**


**- Measurement Setup**

Same as the Chapter 3.2.1 (Figure 1)

### Peak Output Power

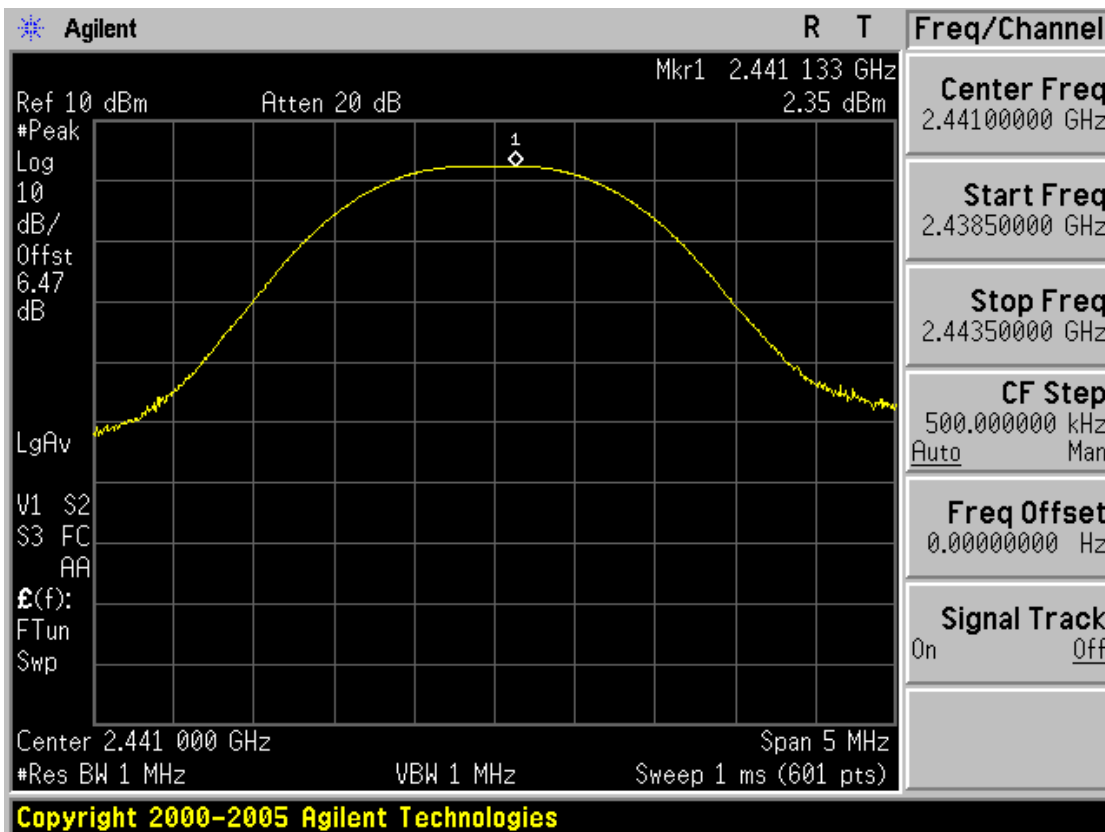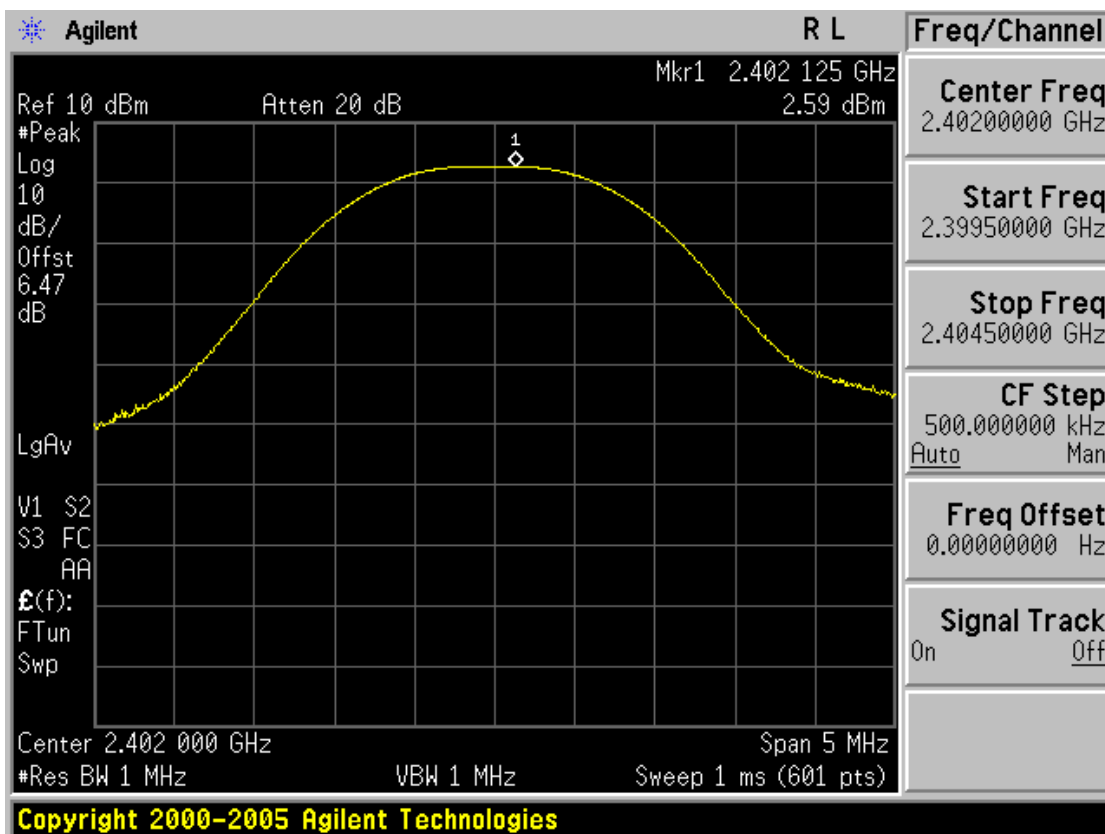

### Peak Output Power

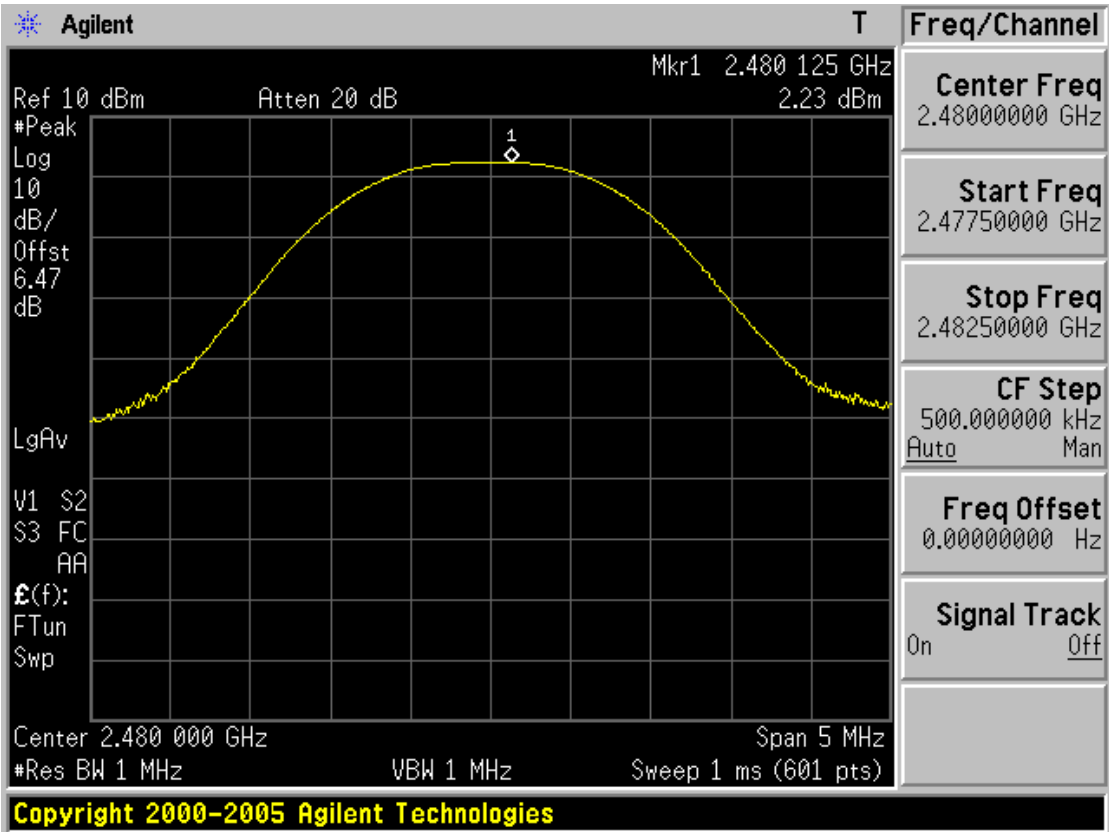

### 3.2.6 Conducted Spurious Emissions

**- Procedure:**

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Detector function = peak

Trace = max hold

Sweep = auto

**- Measurement Data: Comply**


- See next pages for actual measured spectrum plots.

<b>Minimum Standard:</b>	> 20 dBc
--------------------------	----------


**- Measurement Setup**

Same as the Chapter 3.2.1 (Figure 1)


### Low band with hopping disabled

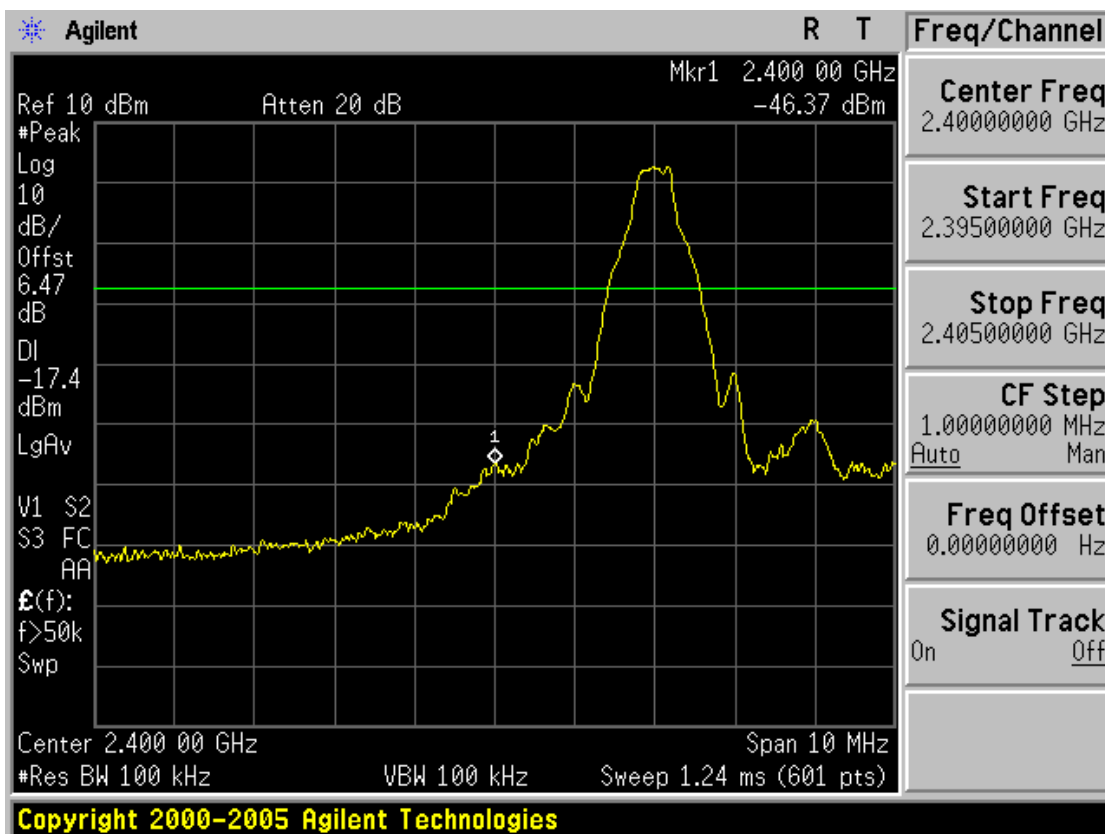


### Low band with hopping enabled

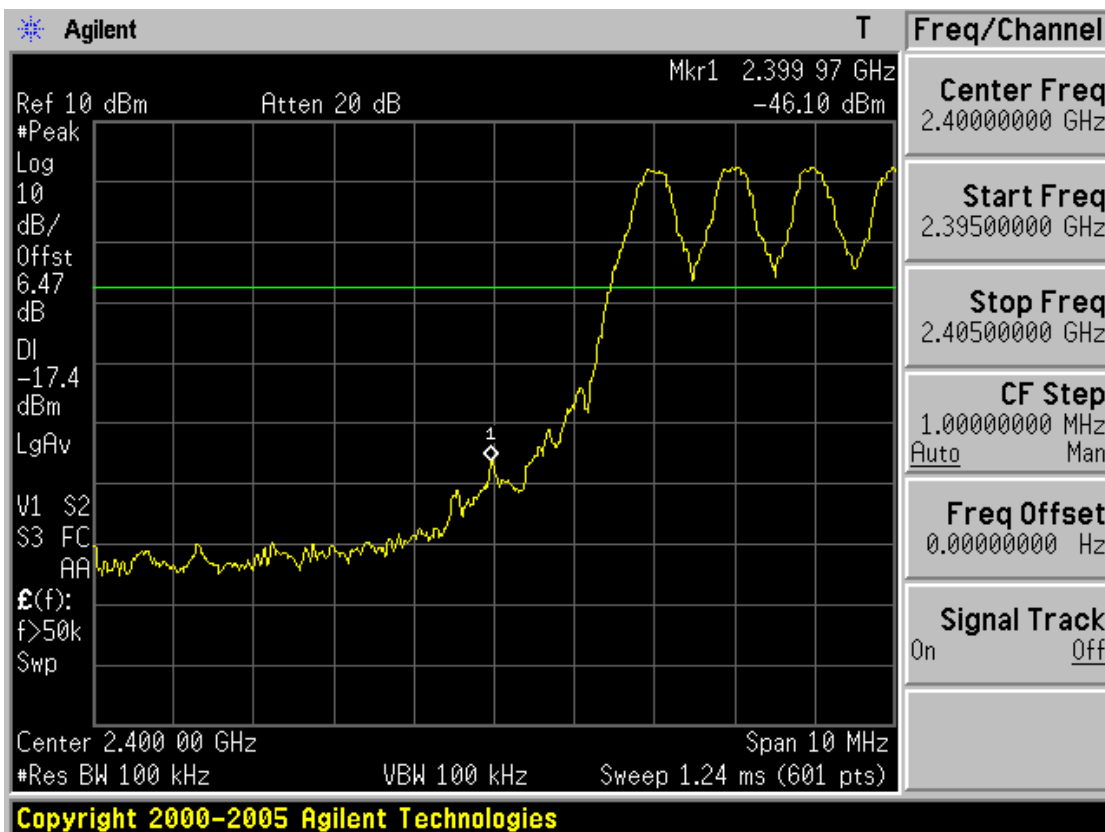


Low channel spurious

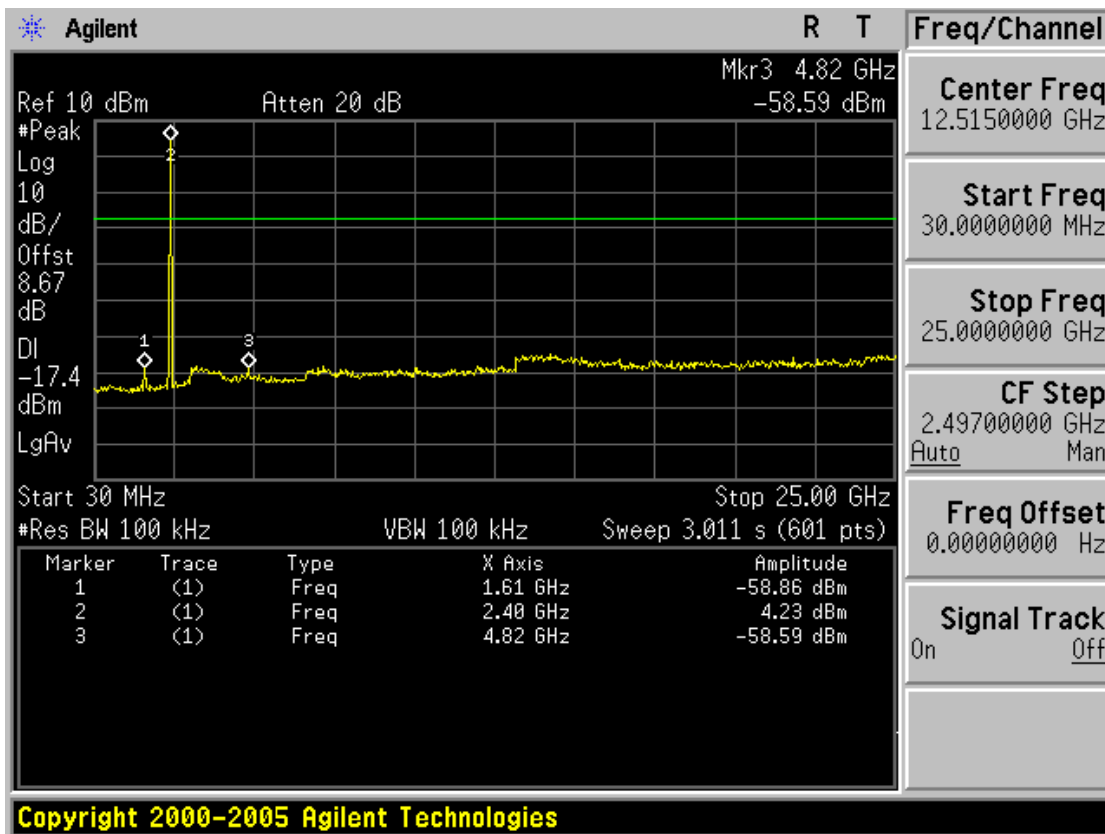


Mid channel ref

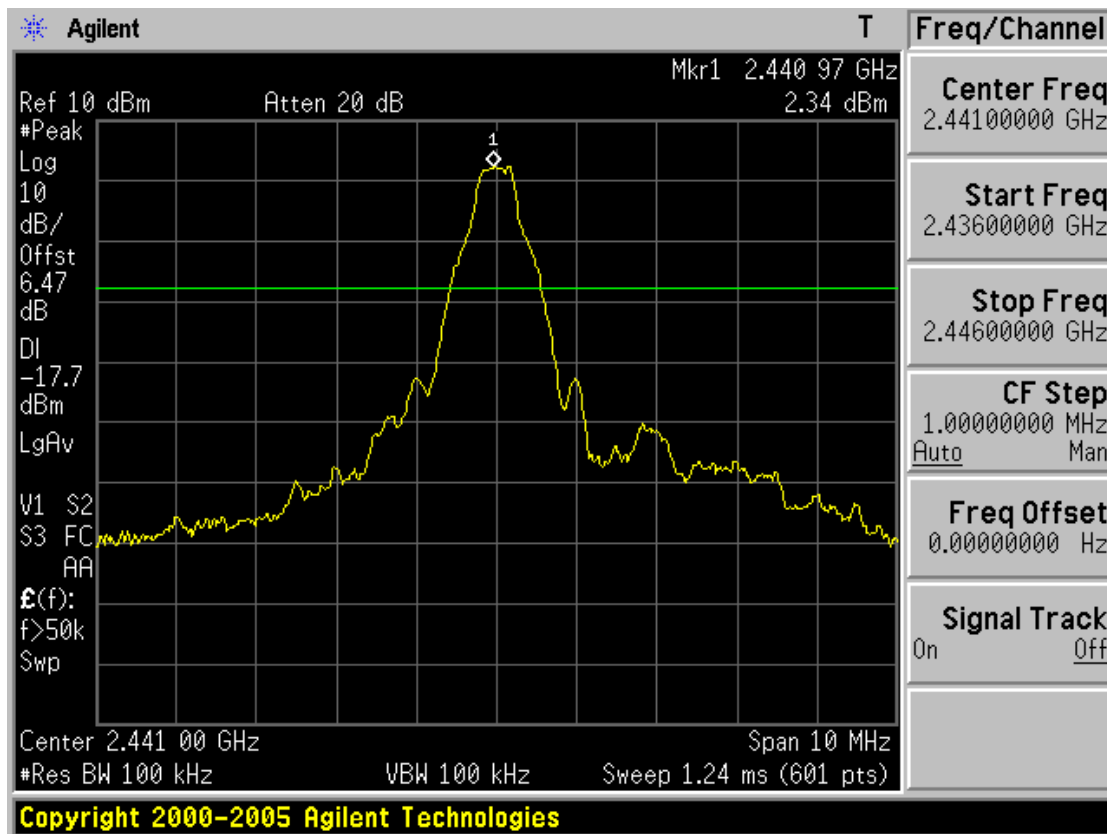


### Mid channel spurious

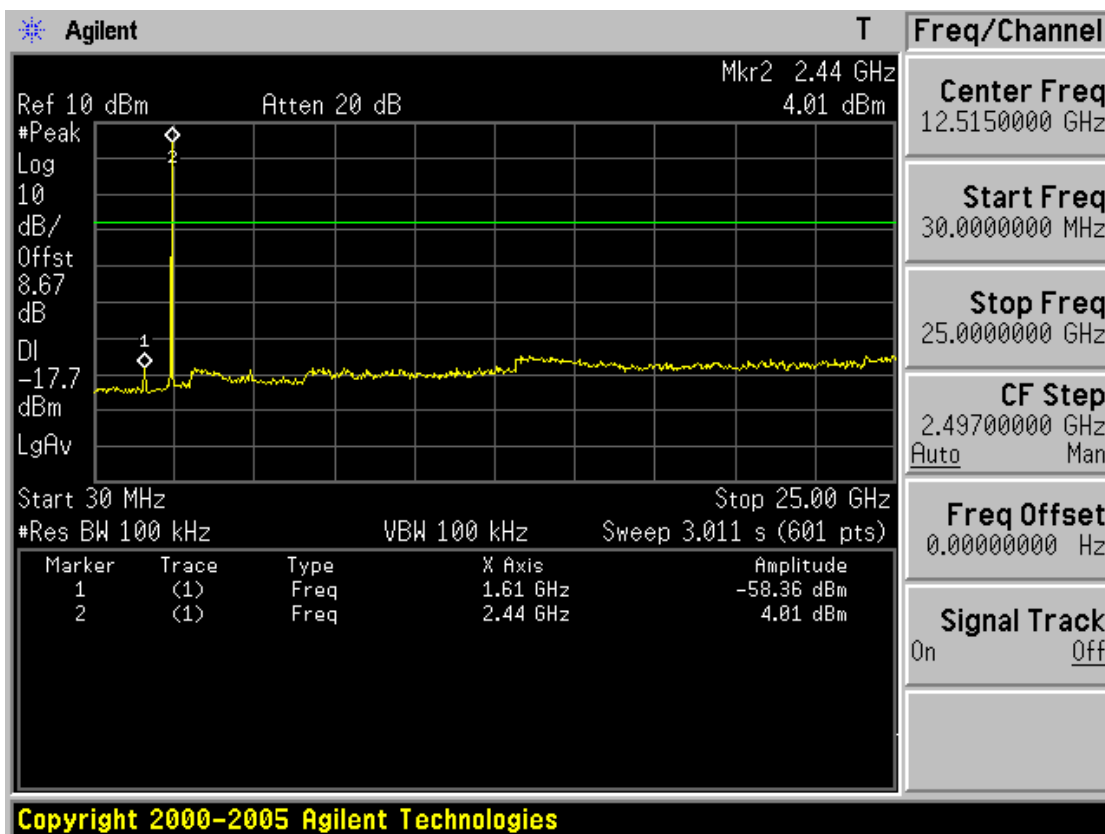


### High band with hopping disabled

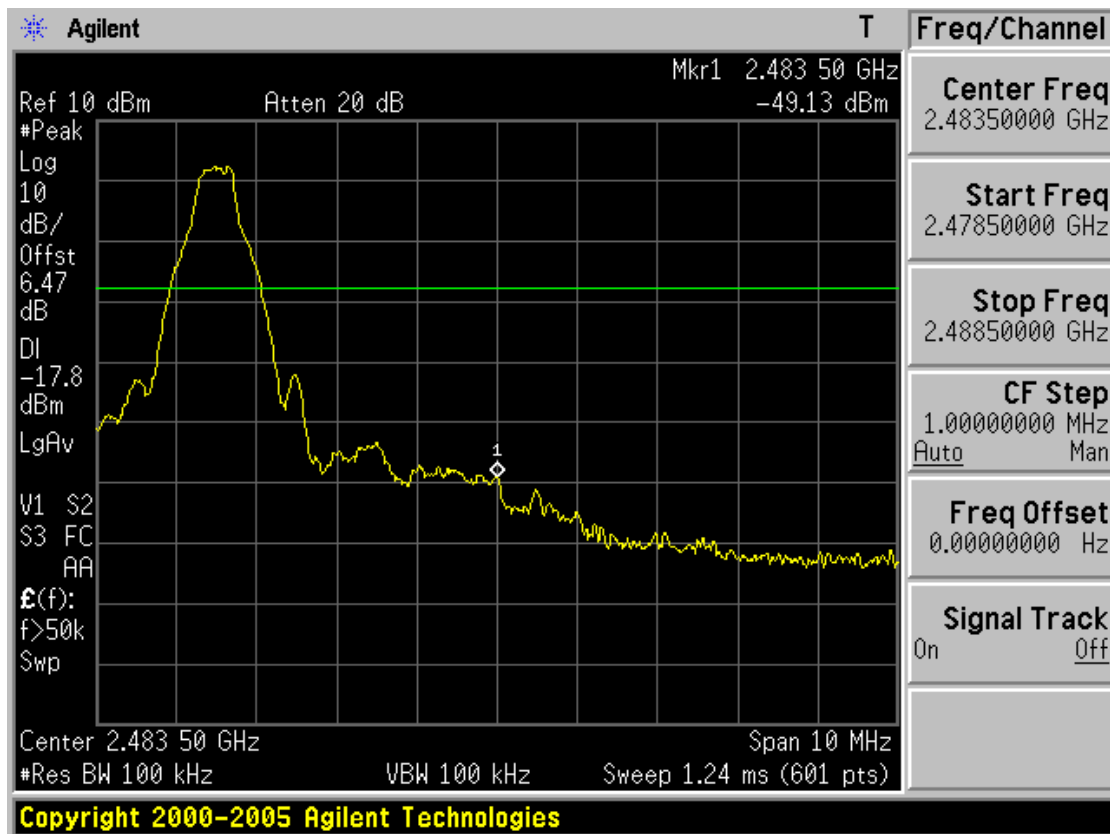

### High band with hopping enabled

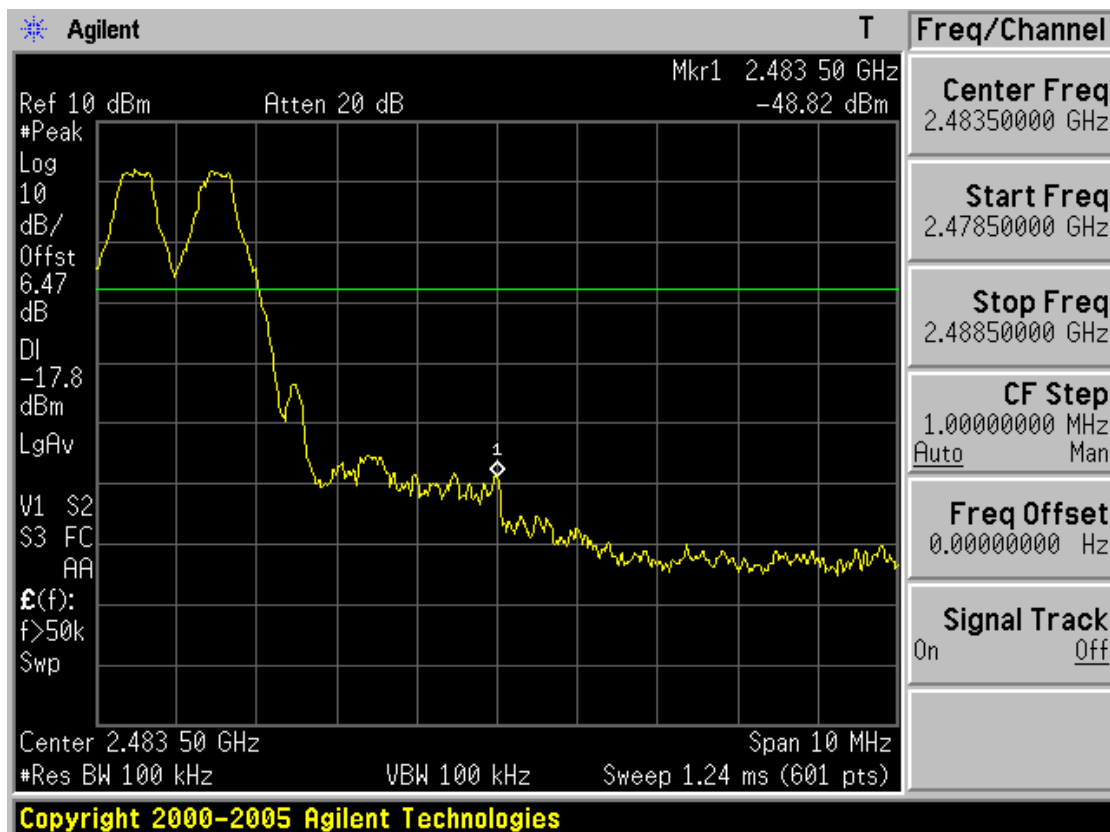


### High channel spurious

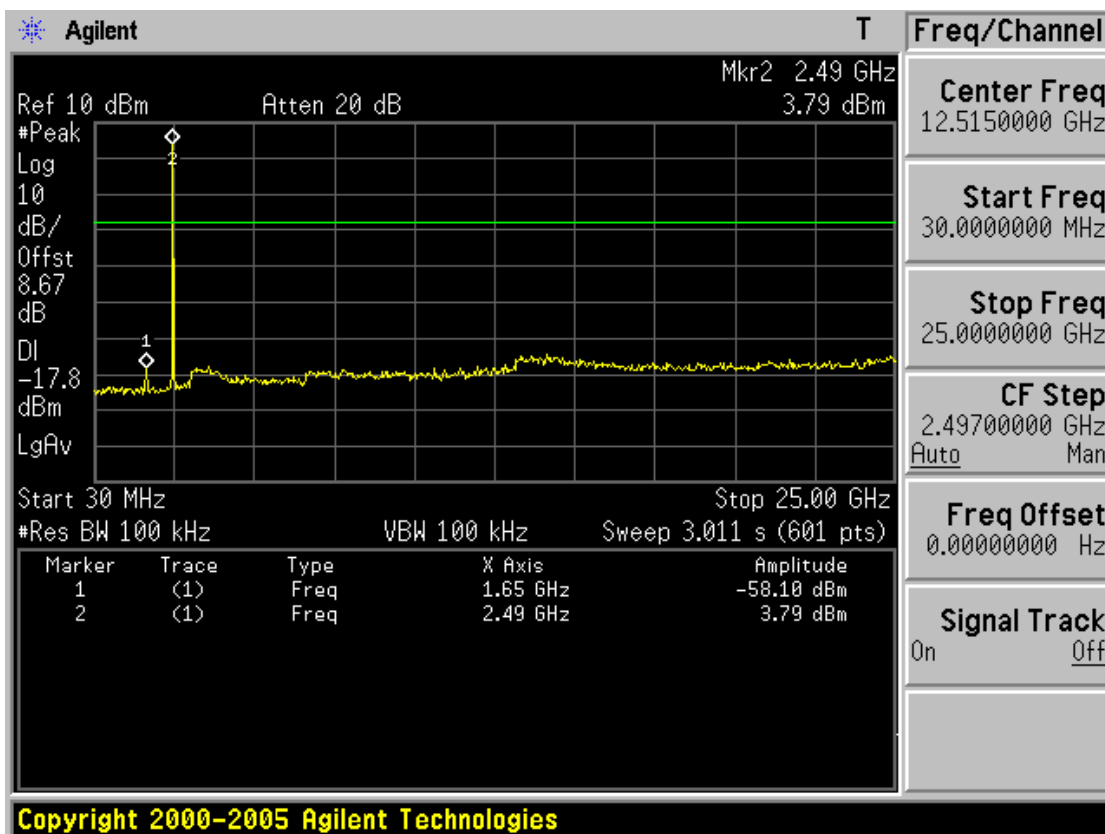




### TEST CASE 1

#### Restricted Band Edge: Low Channel (Peak, Horizontal)

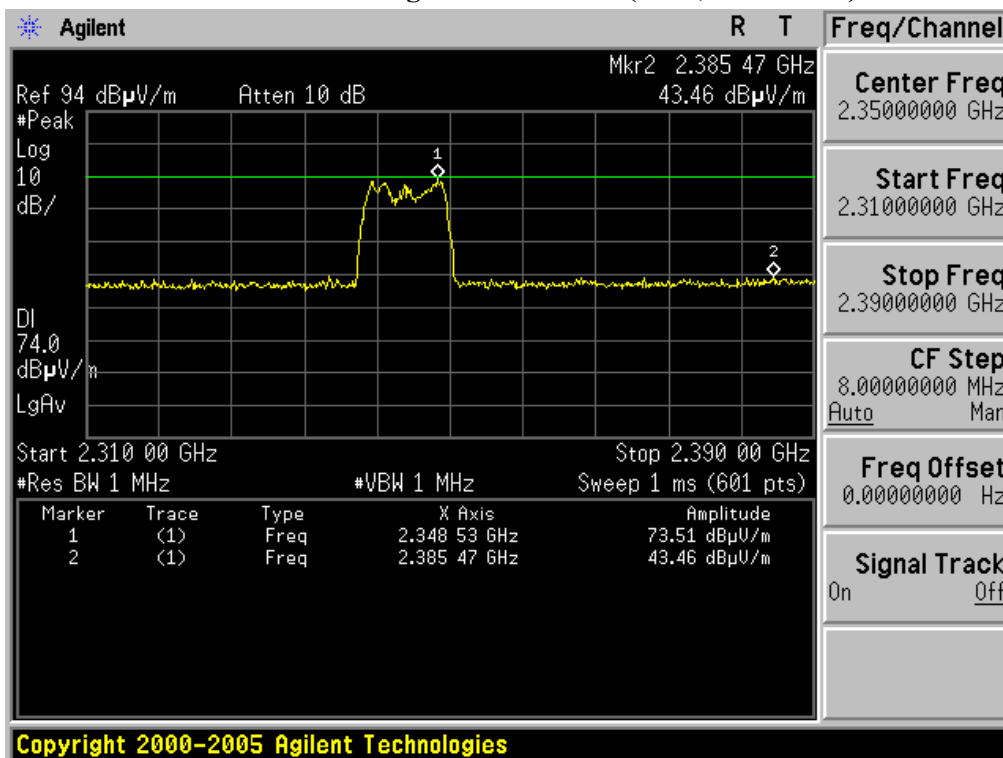


#### Restricted Band Edge: Low Channel (Average, Horizontal)

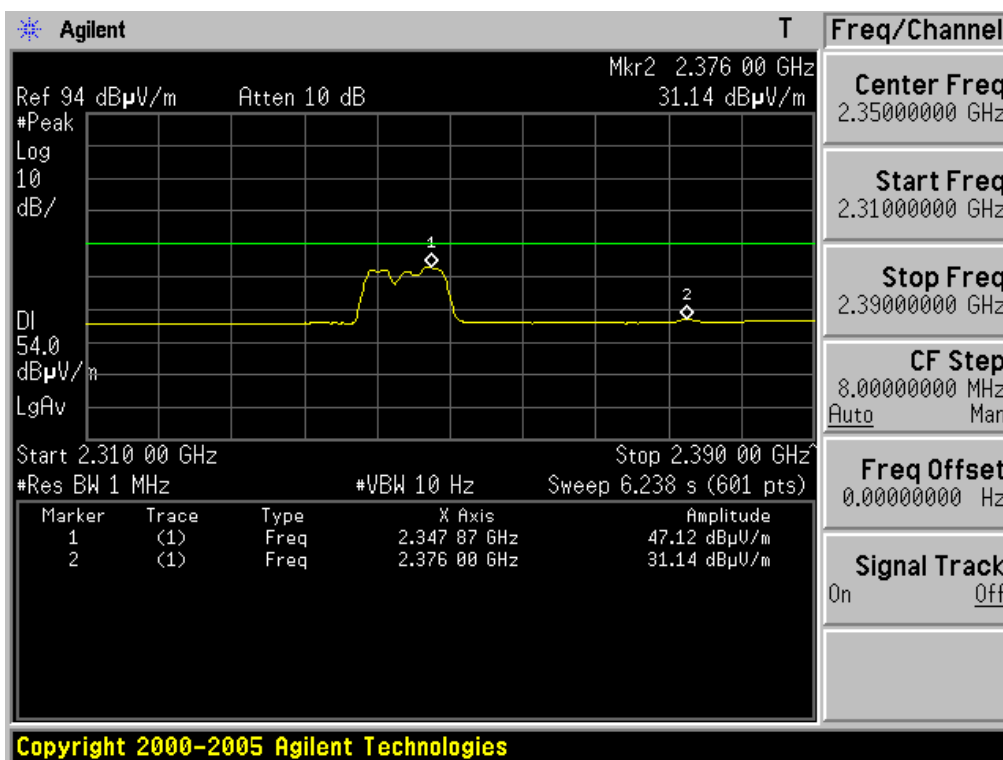


### TEST CASE 1

#### Restricted Band Edge: Low Channel (Peak, Vertical)

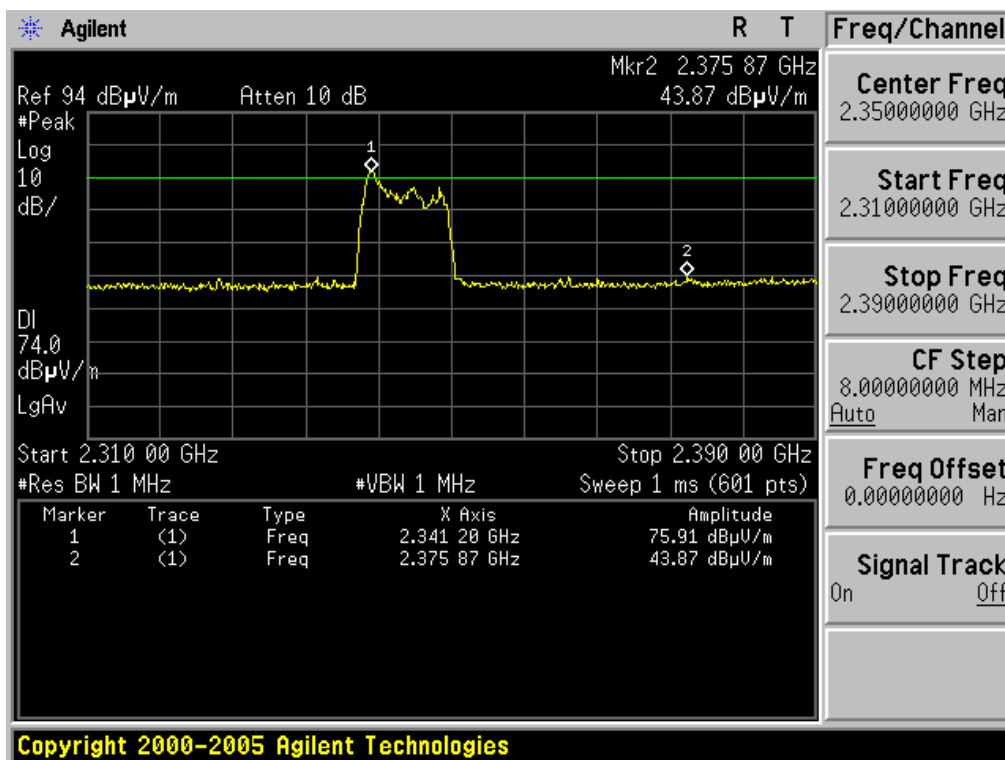


#### Restricted Band Edge: Low Channel (Average, Vertical)

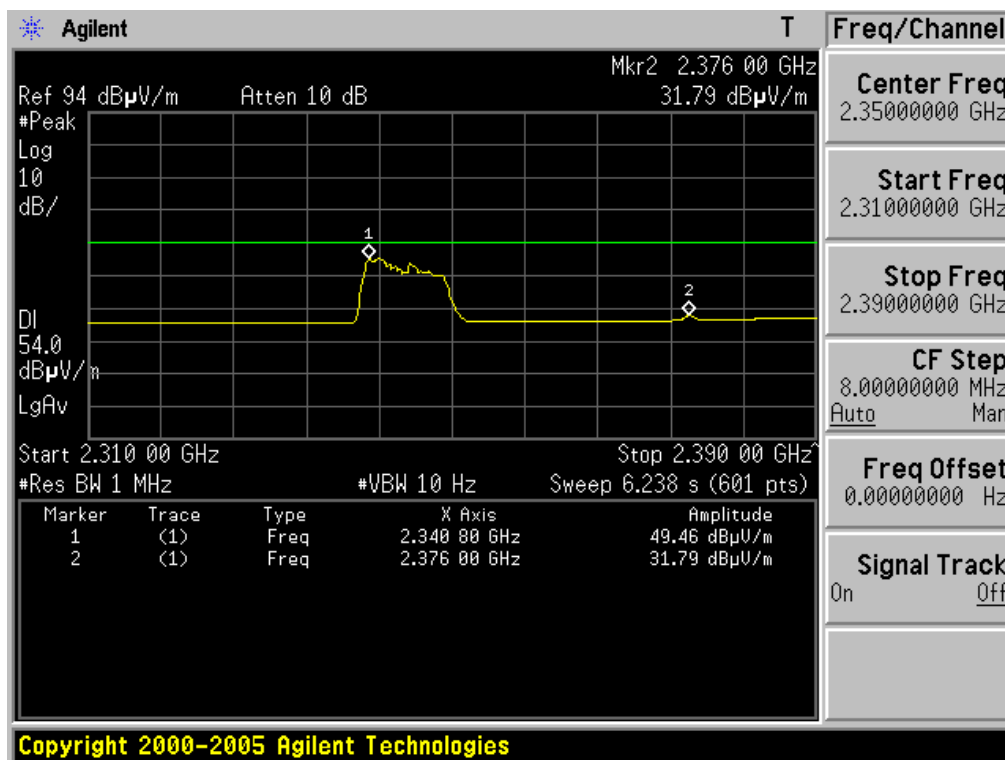


### TEST CASE 1

#### Restricted Band Edge: High Channel (Peak, Horizontal)

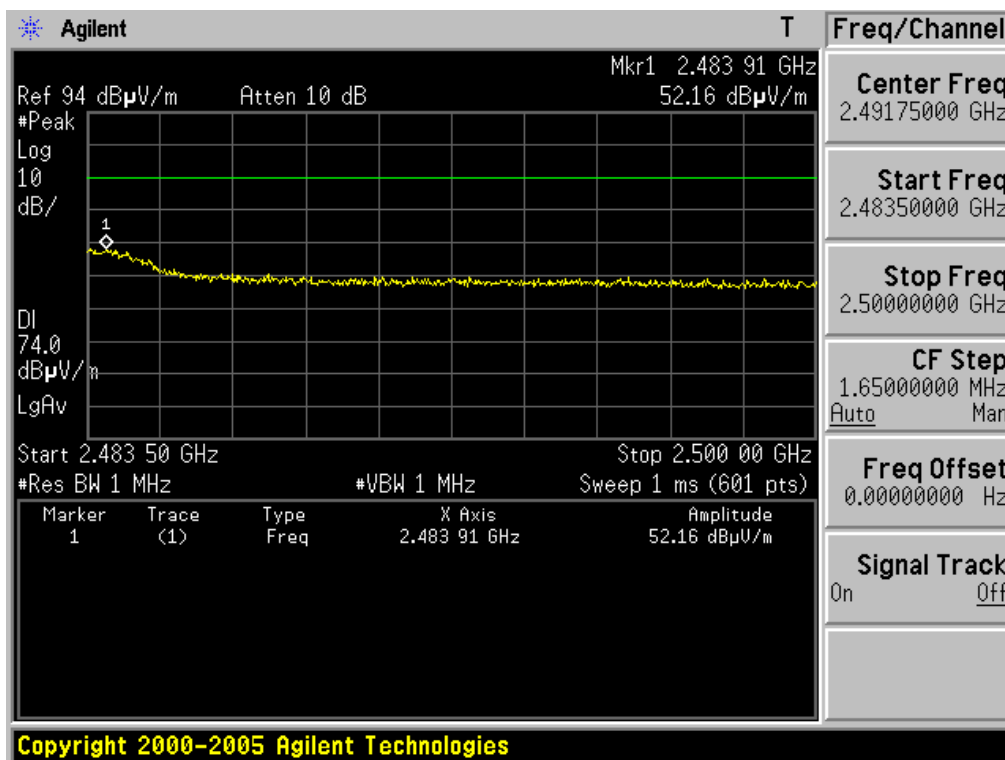


#### Restricted Band Edge: High Channel (Average, Horizontal)

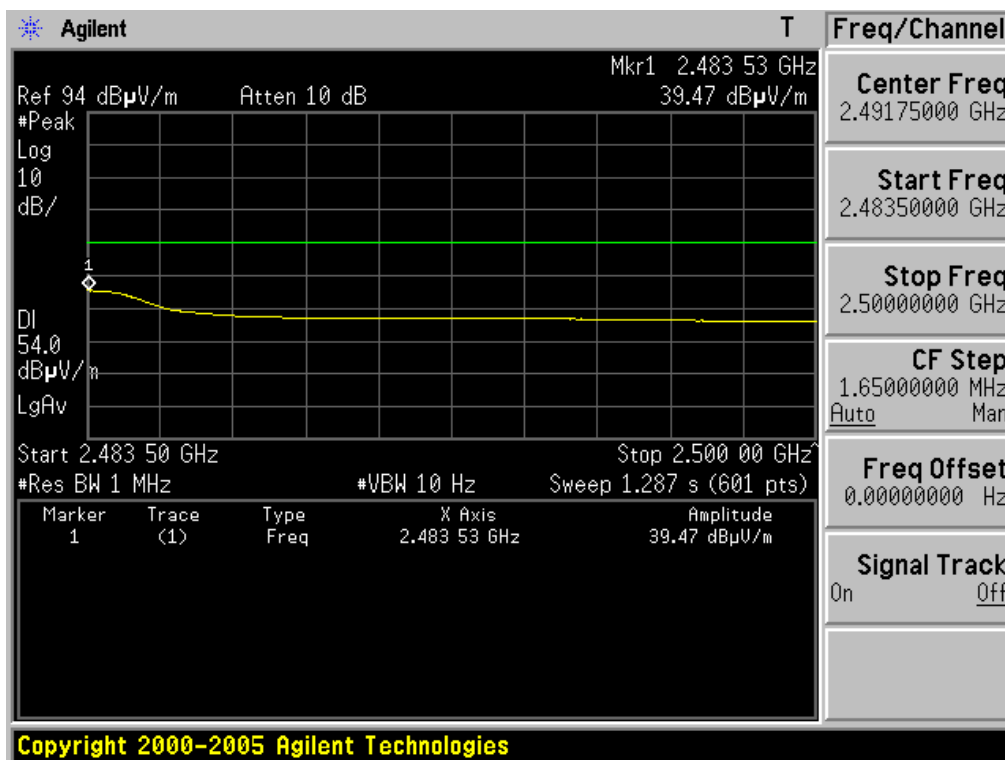


### TEST CASE 1

#### Restricted Band Edge: High Channel (Peak, Vertical)

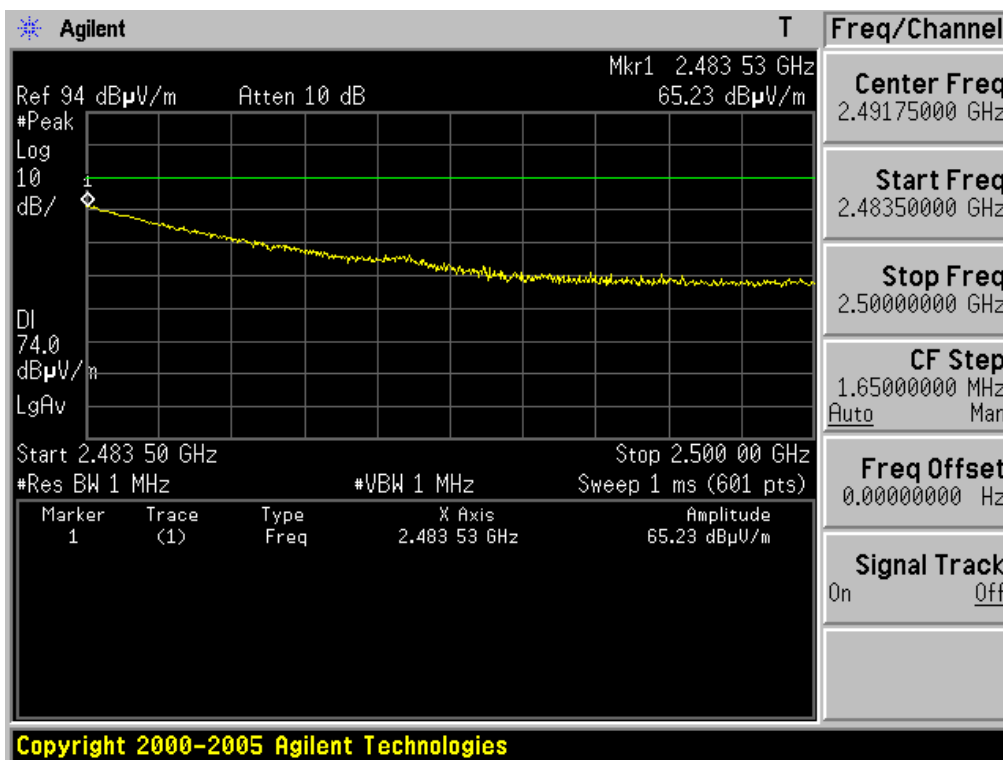


#### Restricted Band Edge: High Channel (Average, Vertical)

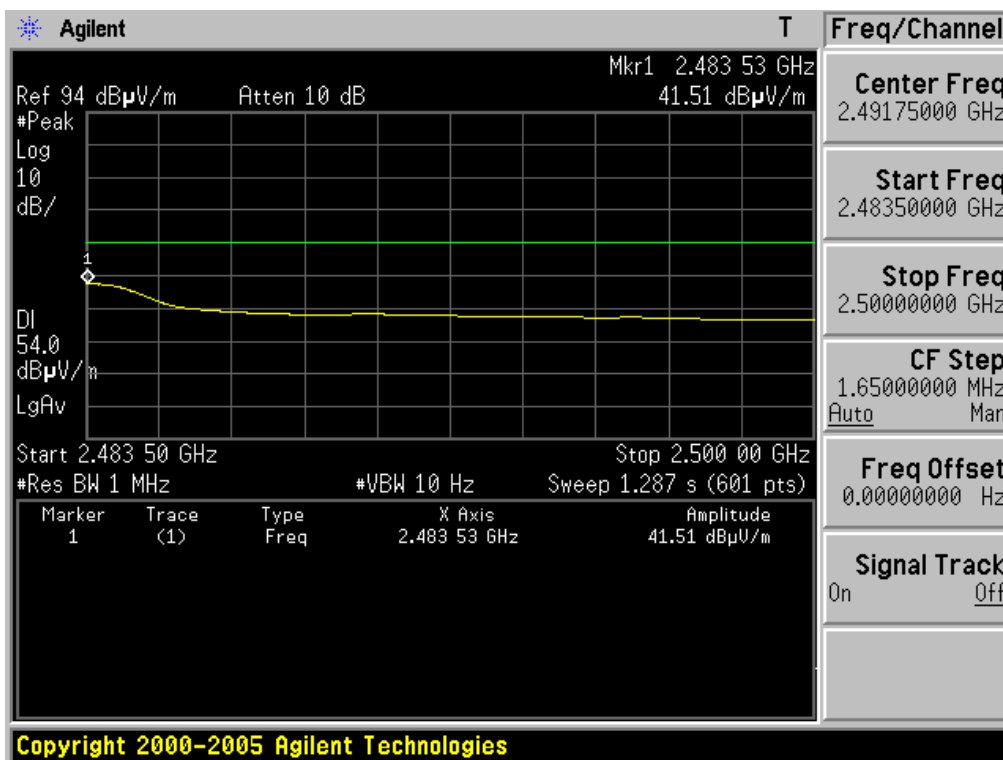


### TEST CASE 2

#### Restricted Band Edge: Low Channel (Peak, Horizontal)

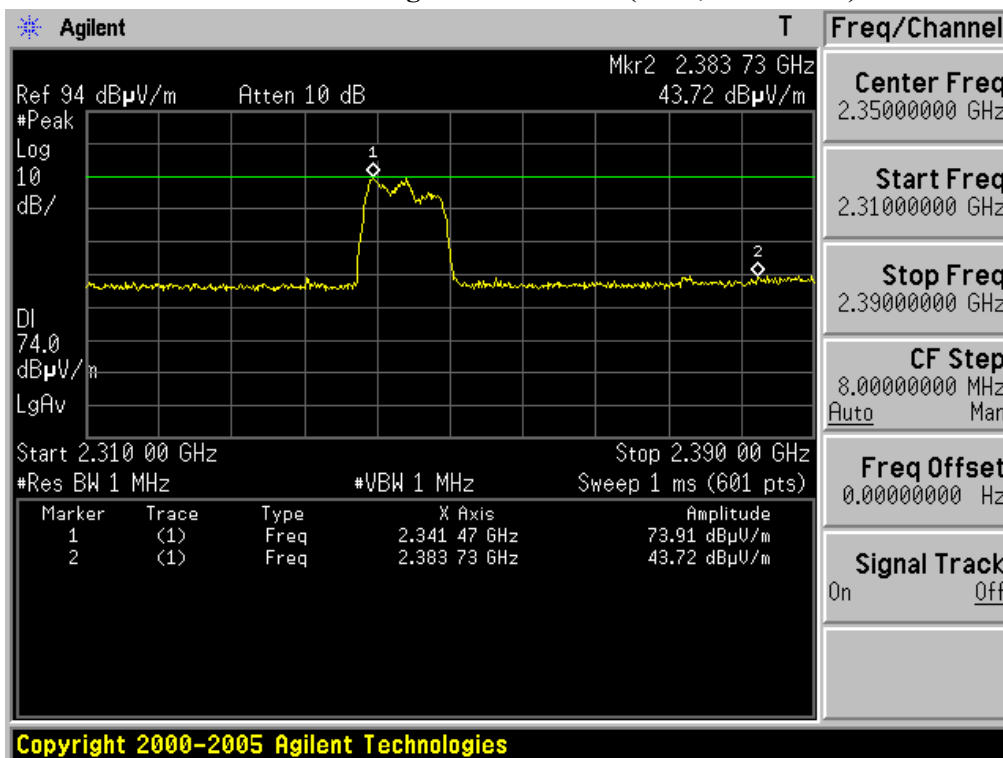


#### Restricted Band Edge: Low Channel (Average, Horizontal)

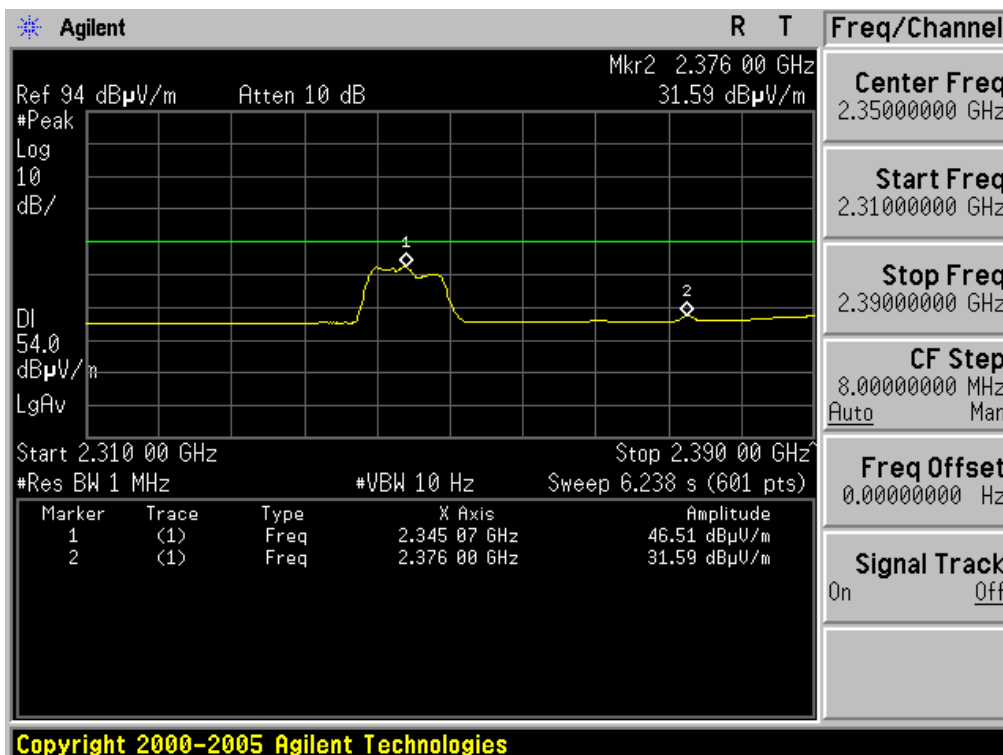


### TEST CASE 2

#### Restricted Band Edge: Low Channel (Peak, Vertical)

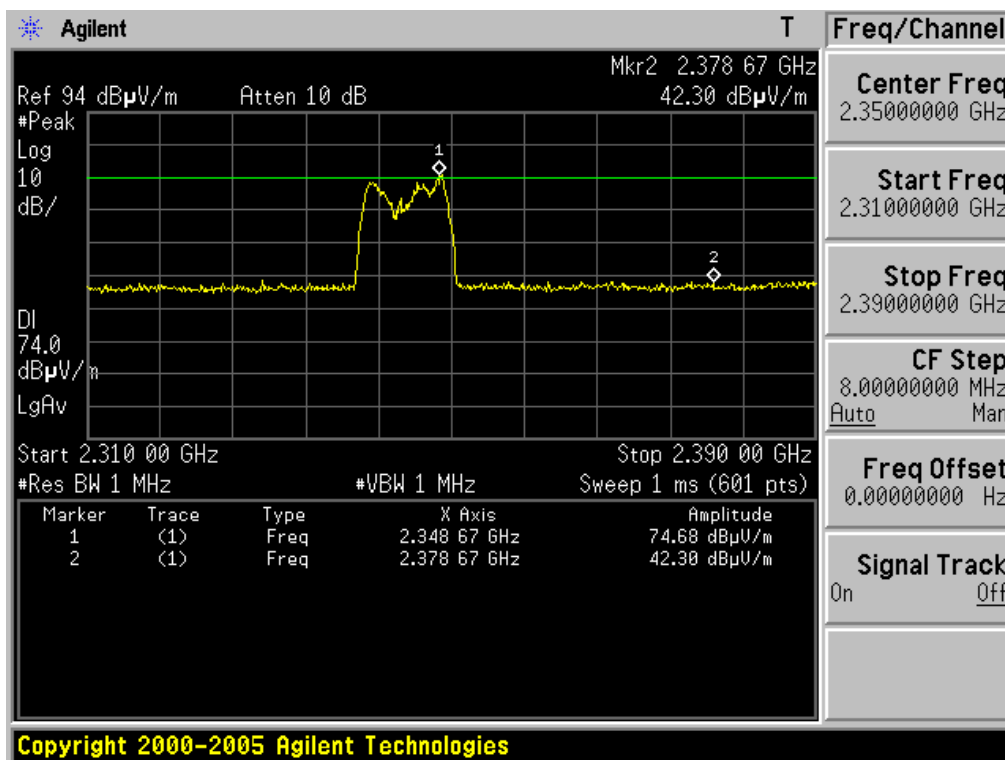


#### Restricted Band Edge: Low Channel (Average, Vertical)

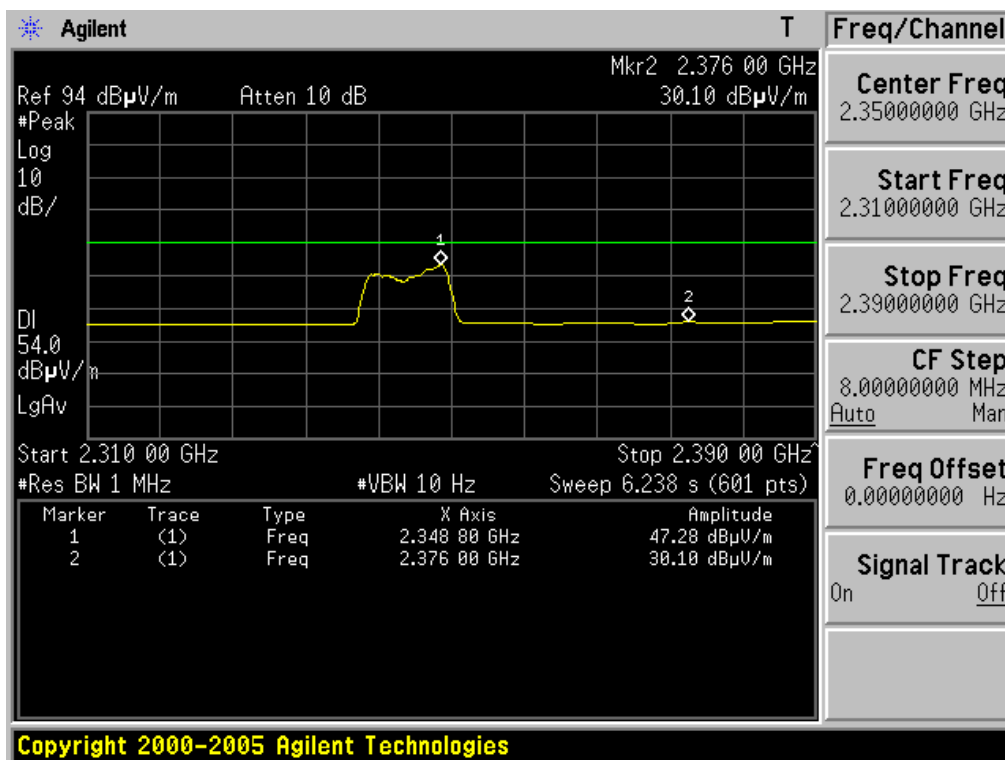


TEST CASE 2

Restricted Band Edge: High Channel (Peak, Horizontal)

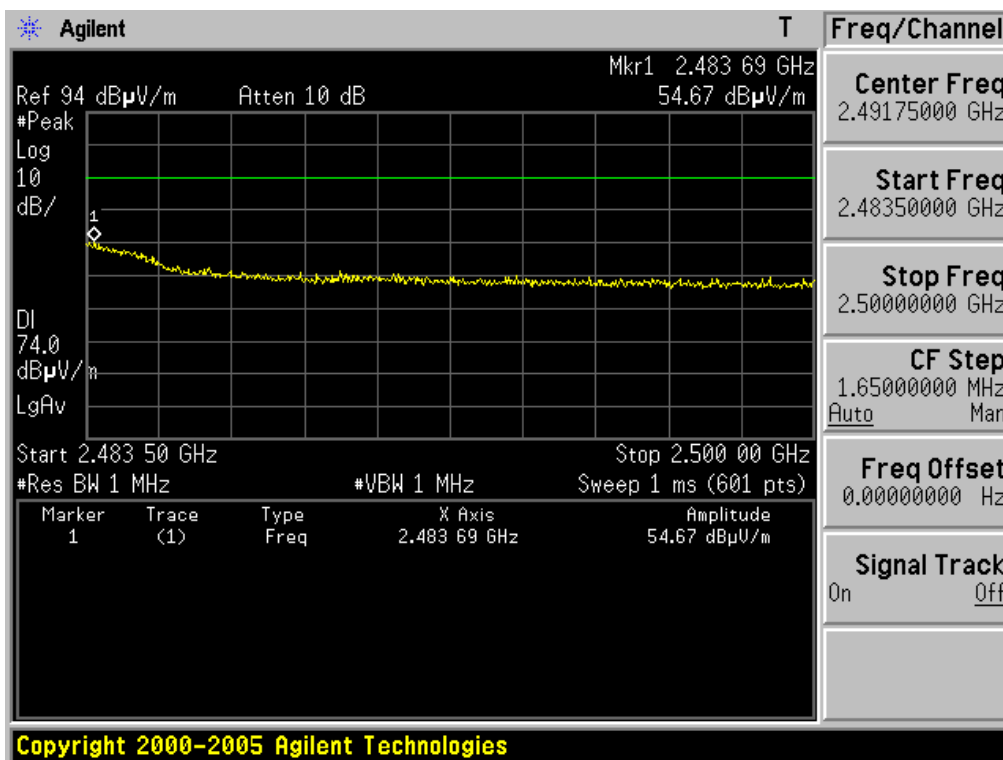


Restricted Band Edge: High Channel (Average, Horizontal)

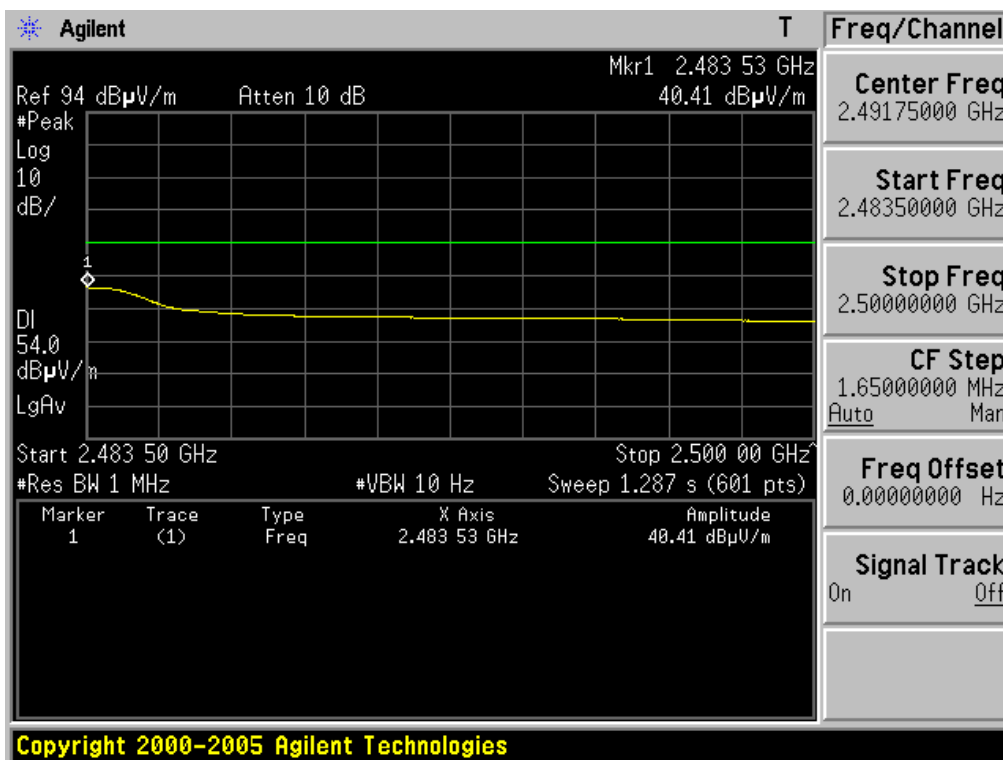


### TEST CASE 2

#### Restricted Band Edge: High Channel (Peak, Vertical)

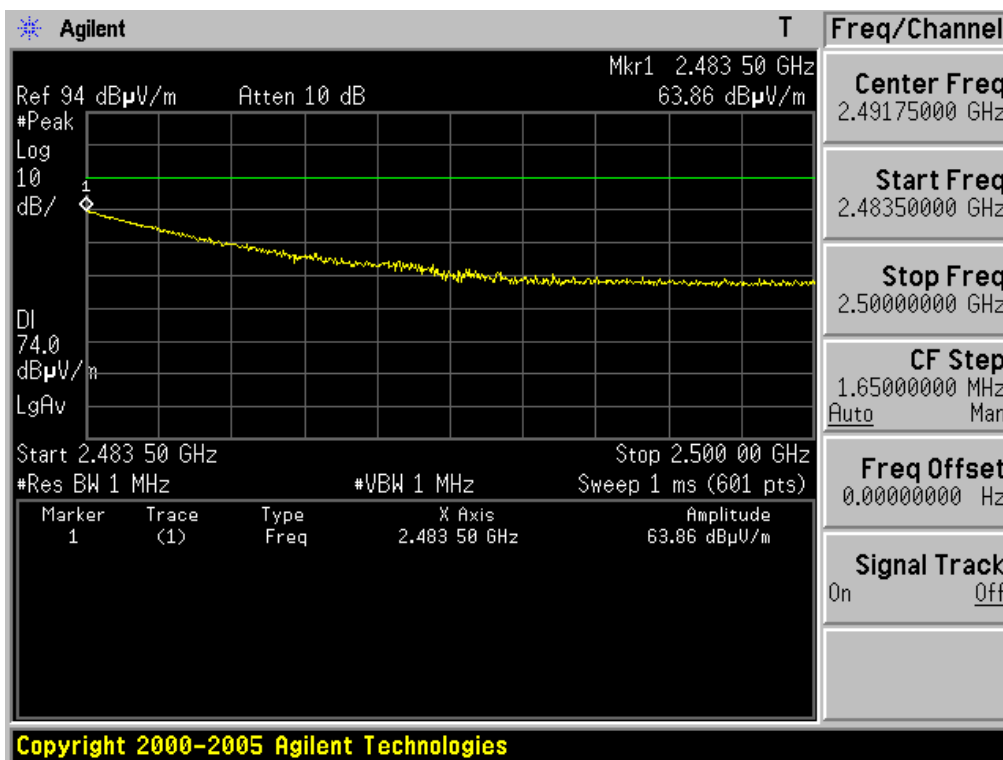


#### Restricted Band Edge: High Channel (Average, Vertical)

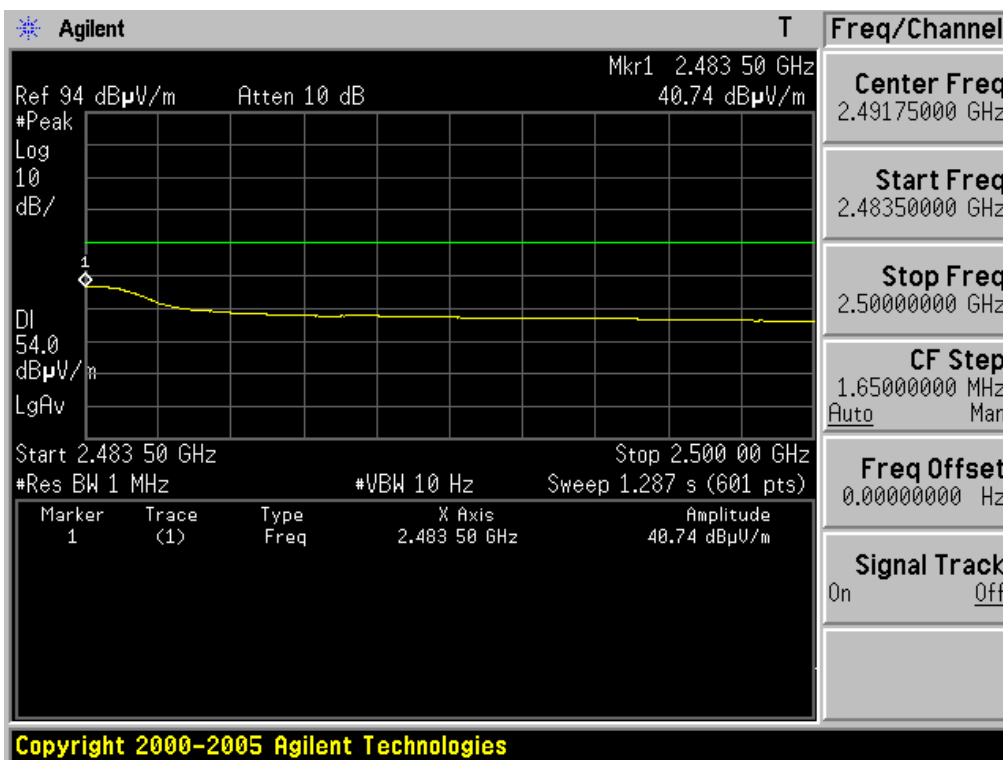


### TEST CASE 3

#### Restricted Band Edge: Low Channel (Peak, Horizontal)

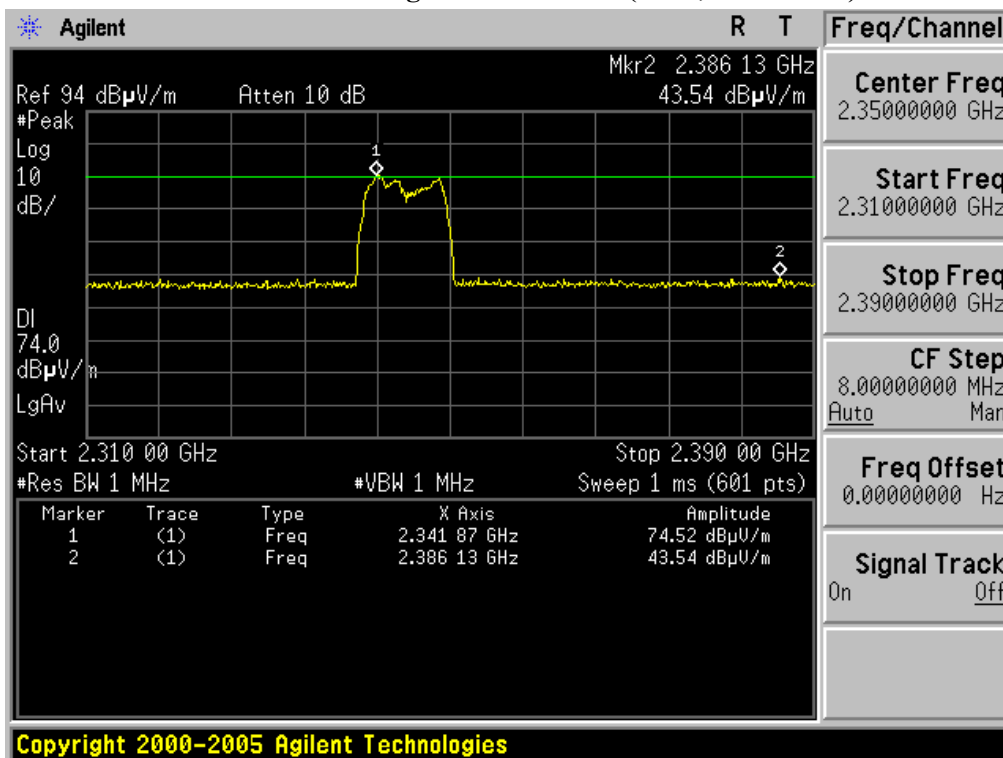


#### Restricted Band Edge: Low Channel (Average, Horizontal)

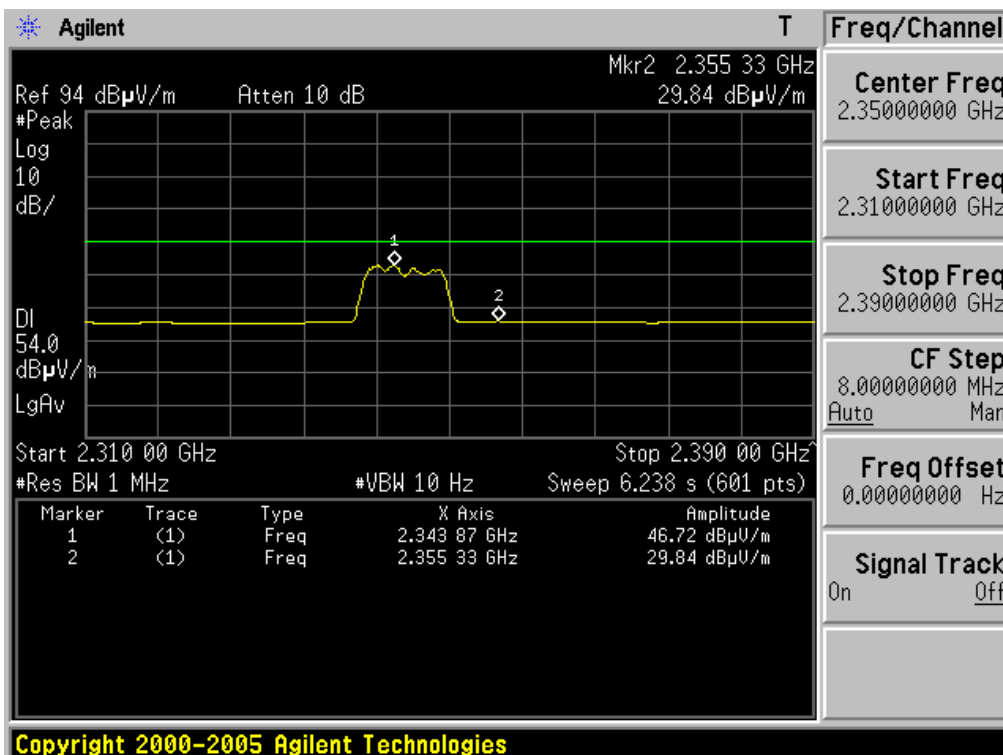


### TEST CASE 3

#### Restricted Band Edge: Low Channel (Peak, Vertical)

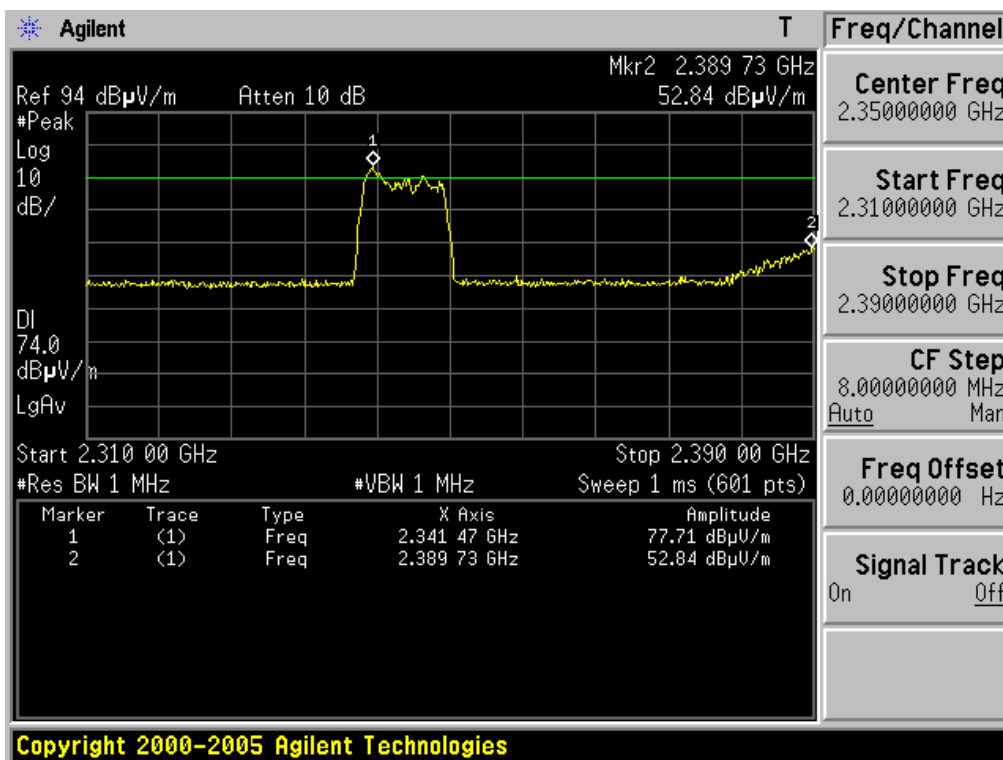


#### Restricted Band Edge: Low Channel (Average, Vertical)

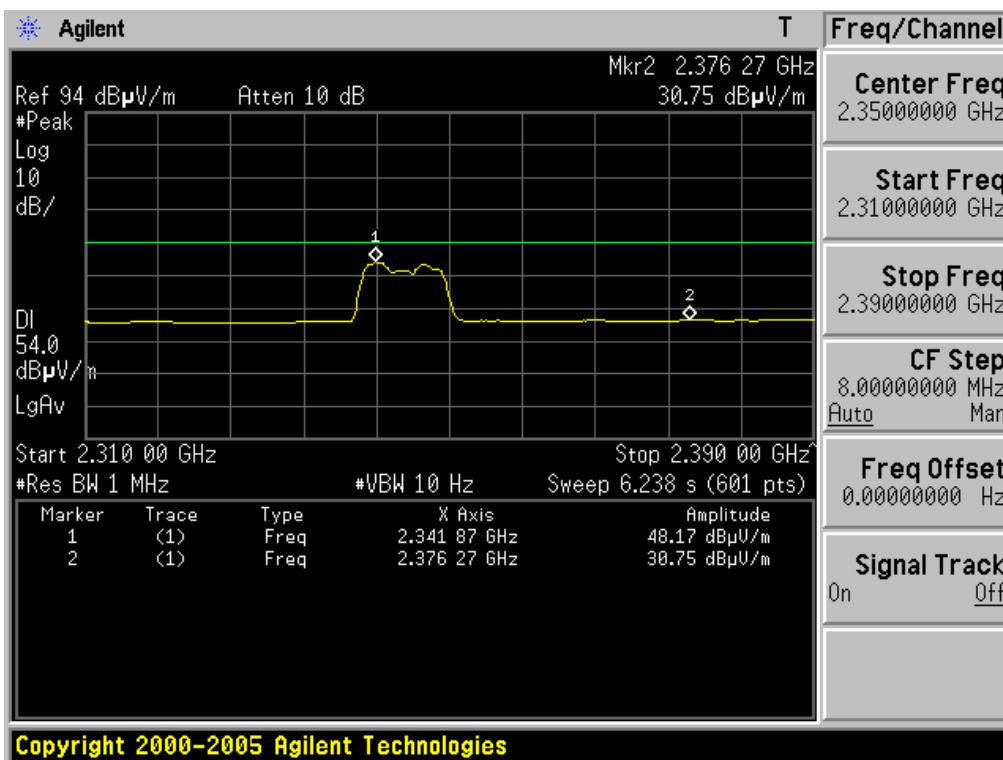


### TEST CASE 3

#### Restricted Band Edge: High Channel (Peak, Horizontal)

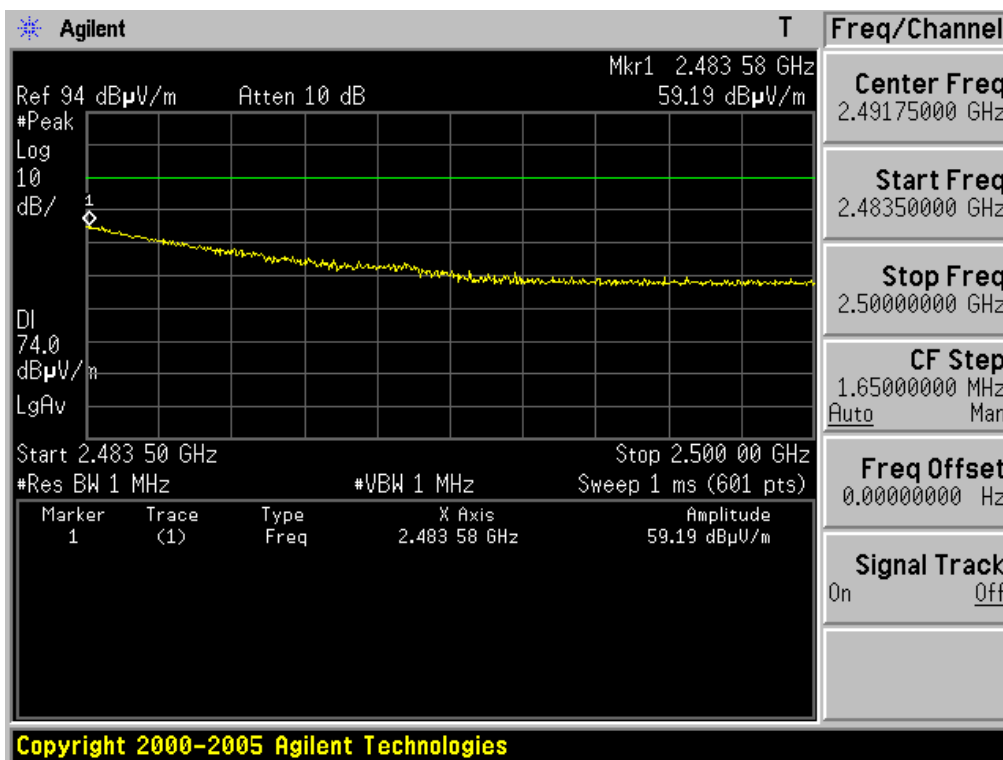


#### Restricted Band Edge: High Channel (Average, Horizontal)

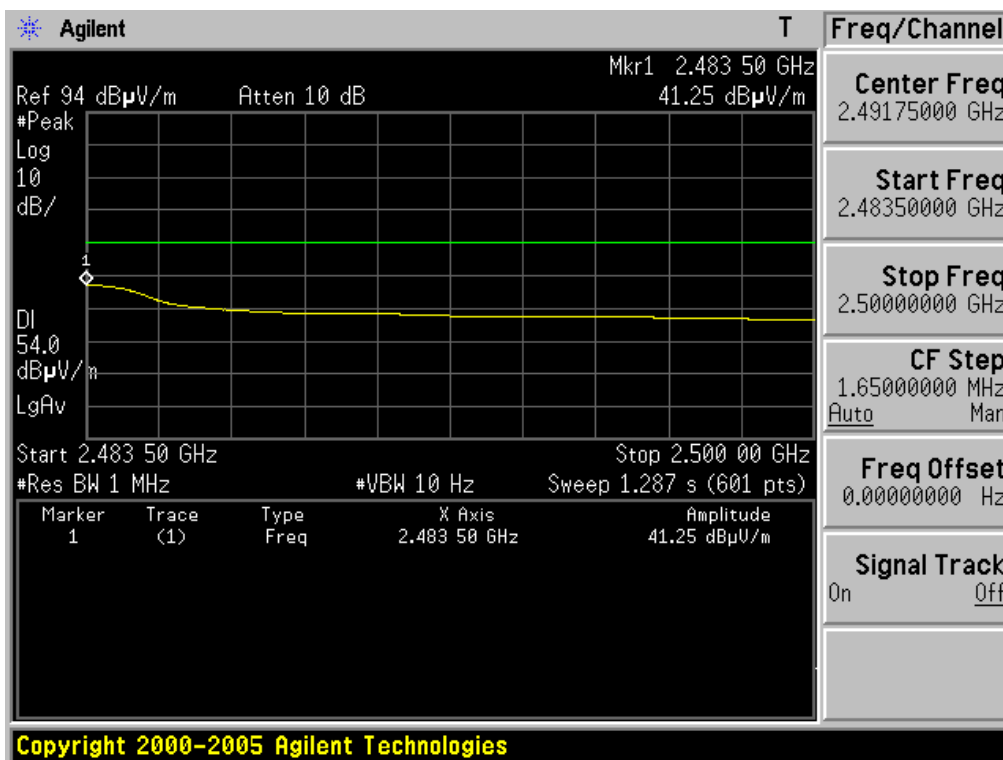


### TEST CASE 3

#### Restricted Band Edge: High Channel (Peak, Vertical)

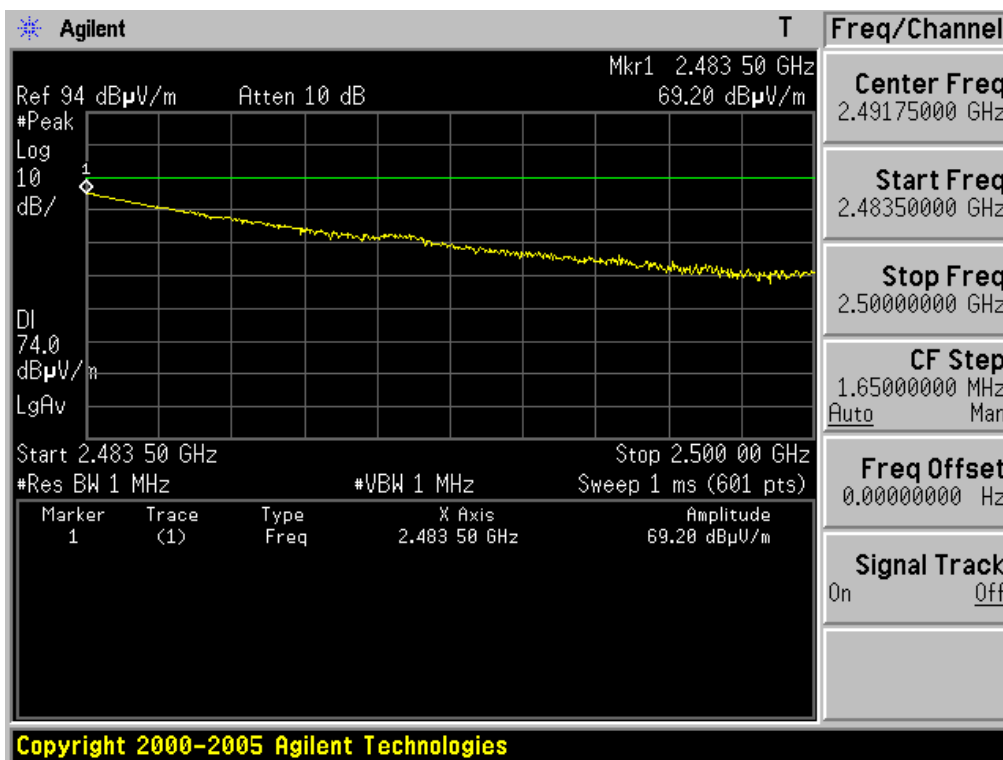

#### Restricted Band Edge: High Channel (Average, Vertical)

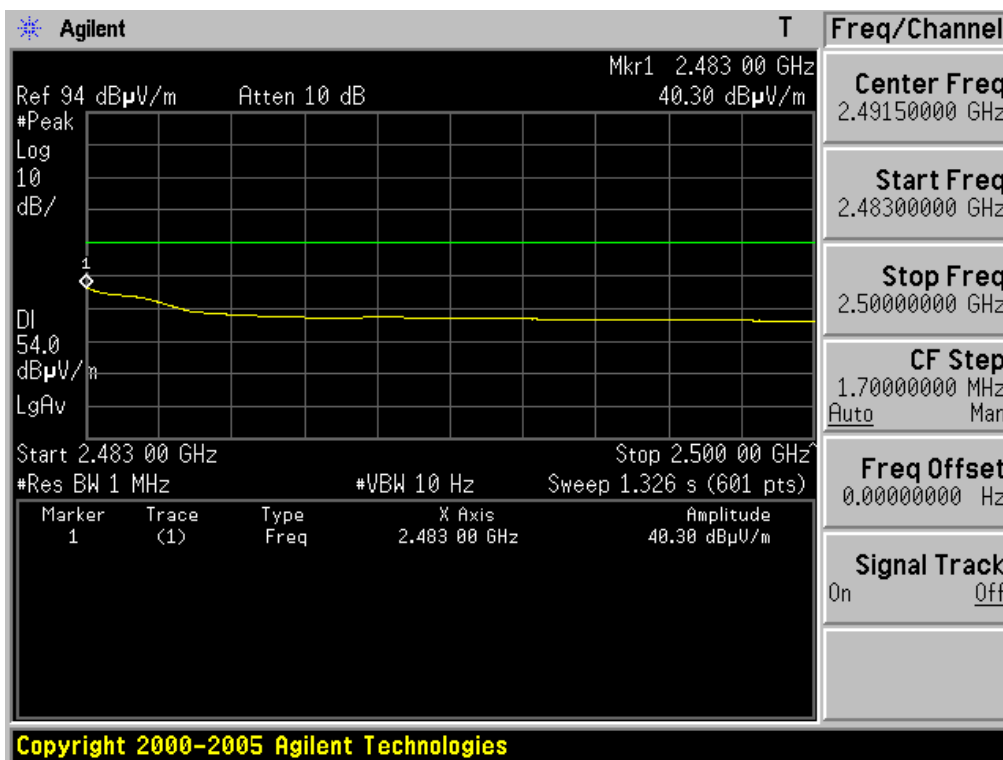

- Measurement Data: Test Case 1

(Continued...)

Harmonic and other emissions Measurement Data: Fundamental Frequency = 2402MHz

Frequency (MHz)	ANT Pol	Reading(dBuV)			T.F (dB)	Result(dBuV/m)			Limit(dBuV/m)			Margin(dB)		
		QP	PK	AV		QP	PK	AV	QP	PK	AV	QP	PK	AV
4804	Hor	-	47.44	36.35	6.25	-	53.69	42.60	-	74.00	54.00	-	20.31	11.40
4804	Ver	-	46.93	36.24	6.25	-	53.18	42.49	-	74.00	54.00	-	20.82	11.51
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Harmonic and other emissions Measurement Data: Fundamental Frequency = 2441MHz

Frequency (MHz)	ANT Pol	Reading(dBuV)			T.F (dB)	Result(dBuV/m)			Limit(dBuV/m)			Margin(dB)		
		QP	PK	AV		QP	PK	AV	QP	PK	AV	QP	PK	AV
4882	Hor	-	45.67	33.93	6.55	-	52.22	40.48	-	74.00	54.00	-	21.78	13.52
4882	Ver	-	46.18	34.31	6.55	-	52.73	40.86	-	74.00	54.00	-	21.27	13.14
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Harmonic and other emissions Measurement Data: Fundamental Frequency = 2480MHz

Frequency (MHz)	ANT Pol	Reading(dBuV)			T.F (dB)	Result(dBuV/m)			Limit(dBuV/m)			Margin(dB)		
		QP	PK	AV		QP	PK	AV	QP	PK	AV	QP	PK	AV
4960	Hor	-	44.98	33.14	6.92	-	51.90	40.06	-	74.00	54.00	-	22.10	13.94
4960	Ver	-	45.23	32.57	6.92	-	52.15	39.49	-	74.00	54.00	-	21.85	14.51
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

**Note.**

1. No other spurious and harmonic emissions were detected at a level greater than 20dB below limit.
2. If peak result meet AV limit, AV measurement is omitted.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

- Measurement Data: Test Case 2

(Continued...)

Harmonic and other emissions Measurement Data: Fundamental Frequency = 2402MHz

Frequency (MHz)	ANT Pol	Reading(dBuV)			T.F (dB)	Result(dBuV/m)			Limit(dBuV/m)			Margin(dB)		
		QP	PK	AV		QP	PK	AV	QP	PK	AV	QP	PK	AV
82.000	Ver	38.50	-	-	-17.80	20.70	-	-	40.00	-	-	19.30	-	-
391.760	Ver	33.49	-	-	-5.79	27.70	-	-	46.00	-	-	18.30	-	-
584.000	Hor	29.85	-	-	-2.25	27.60	-	-	46.00	-	-	18.40	-	-
585.050	Ver	31.33	-	-	-2.23	29.10	-	-	46.00	-	-	16.90	-	-
4804	Hor	-	46.59	35.87	6.25	-	52.84	42.12	-	74.00	54.00	-	21.16	11.88
4804	Ver	-	46.82	35.80	6.25	-	53.07	42.05	-	74.00	54.00	-	20.93	11.95

Harmonic and other emissions Measurement Data: Fundamental Frequency = 2441MHz

Frequency (MHz)	ANT Pol	Reading(dBuV)			T.F (dB)	Result(dBuV/m)			Limit(dBuV/m)			Margin(dB)		
		QP	PK	AV		QP	PK	AV	QP	PK	AV	QP	PK	AV
82.230	Ver	38.67	-	-	-17.77	20.90	-	-	40.00	-	-	19.10	-	-
390.380	Ver	34.22	-	-	-5.82	28.40	-	-	46.00	-	-	17.60	-	-
575.190	Ver	32.62	-	-	-2.42	30.20	-	-	46.00	-	-	15.80	-	-
581.710	Hor	30.10	-	-	-2.30	27.80	-	-	46.00	-	-	18.20	-	-
4882	Hor	-	45.70	32.42	6.55	-	52.25	38.97	-	74.00	54.00	-	21.75	15.03
4882	Ver	-	45.83	34.05	6.55	-	52.38	40.60	-	74.00	54.00	-	21.62	13.40

Harmonic and other emissions Measurement Data: Fundamental Frequency = 2480MHz

Frequency (MHz)	ANT Pol	Reading(dBuV)			T.F (dB)	Result(dBuV/m)			Limit(dBuV/m)			Margin(dB)		
		QP	PK	AV		QP	PK	AV	QP	PK	AV	QP	PK	AV
82.670	Ver	39.29	-	-	-17.69	21.60	-	-	40.00	-	-	18.40	-	-
383.070	Ver	34.51	-	-	-6.01	28.50	-	-	46.00	-	-	17.50	-	-
562.300	Ver	32.26	-	-	-2.66	29.60	-	-	46.00	-	-	16.40	-	-
582.390	Hor	29.78	-	-	-2.28	27.50	-	-	46.00	-	-	18.50	-	-
4960	Hor	-	45.47	32.62	6.92	-	52.39	39.54	-	74.00	54.00	-	21.61	14.46
4960	Ver	-	46.15	35.34	6.92	-	53.07	42.26	-	74.00	54.00	-	20.93	11.74

**Note.**

1. No other spurious and harmonic emissions were detected at a level greater than 20dB below limit.
2. If peak result meet AV limit, AV measurement is omitted.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

- Measurement Data: Test Case 3

(Continued...)

Harmonic and other emissions Measurement Data: Fundamental Frequency = 2402MHz

Frequency (MHz)	ANT Pol	Reading(dBuV)			T.F (dB)	Result(dBuV/m)			Limit(dBuV/m)			Margin(dB)		
		QP	PK	AV		QP	PK	AV	QP	PK	AV	QP	PK	AV
466.600	Hor	30.59	-	-	-4.39	26.20	-	-	46.00	-	-	19.80	-	-
478.400	Ver	31.39	-	-	-4.19	27.20	-	-	46.00	-	-	18.80	-	-
531.400	Ver	32.03	-	-	-3.23	28.80	-	-	46.00	-	-	17.20	-	-
545.800	Hor	31.15	-	-	-2.95	28.20	-	-	46.00	-	-	17.80	-	-
4804	Hor	-	45.99	35.52	6.25	-	52.24	41.77	-	74.00	54.00	-	21.76	12.23
4804	Ver	-	46.81	37.01	6.25	-	53.06	43.26	-	74.00	54.00	-	20.94	10.74

Harmonic and other emissions Measurement Data: Fundamental Frequency = 2441MHz

Frequency (MHz)	ANT Pol	Reading(dBuV)			T.F (dB)	Result(dBuV/m)			Limit(dBuV/m)			Margin(dB)		
		QP	PK	AV		QP	PK	AV	QP	PK	AV	QP	PK	AV
464.500	Hor	31.53	-	-	-4.43	27.10	-	-	46.00	-	-	18.90	-	-
471.200	Ver	32.51	-	-	-4.31	28.20	-	-	46.00	-	-	17.80	-	-
543.200	Ver	33.41	-	-	-3.01	30.40	-	-	46.00	-	-	15.60	-	-
564.320	Hor	33.11	-	-	-2.61	30.50	-	-	46.00	-	-	15.50	-	-
4882	Hor	-	44.86	33.30	6.55	-	51.41	39.85	-	74.00	54.00	-	22.59	14.15
4882	Ver	-	45.78	34.66	6.55	-	52.33	41.21	-	74.00	54.00	-	21.67	12.79

Harmonic and other emissions Measurement Data: Fundamental Frequency = 2480MHz

Frequency (MHz)	ANT Pol	Reading(dBuV)			T.F (dB)	Result(dBuV/m)			Limit(dBuV/m)			Margin(dB)		
		QP	PK	AV		QP	PK	AV	QP	PK	AV	QP	PK	AV
466.390	Hor	33.70	-	-	-4.40	29.30	-	-	46.00	-	-	16.70	-	-
470.140	Ver	36.13	-	-	-4.33	31.80	-	-	46.00	-	-	14.20	-	-
555.500	Hor	34.78	-	-	-2.78	32.00	-	-	46.00	-	-	14.00	-	-
555.880	Ver	35.27	-	-	-2.77	32.50	-	-	46.00	-	-	13.50	-	-
4960	Hor	-	44.01	32.60	6.92	-	50.93	39.52	-	74.00	54.00	-	23.07	14.48
4960	Ver	-	46.58	35.86	6.92	-	53.50	42.78	-	74.00	54.00	-	20.50	11.22

**Note.**

1. No other spurious and harmonic emissions were detected at a level greater than 20dB below limit.
2. If peak result meet AV limit, AV measurement is omitted.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

### 3.2.8 AC Line Conducted Emissions

**- Procedure:**

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak and average detector mode with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

**- Measurement Data: Comply** (See next pages for actual measured spectrum plots.)

**Note. 1:** This test item was performed with following 2 configurations

- Test Case 1: Headset Mode + Adaptor (STA-U33WR)
- Test Case 2: Headset Mode + Adaptor (STA-U34WRI)

**- Minimum Standard: FCC Part 15.207(a)/EN 55022**

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

**- Measurement Setup**



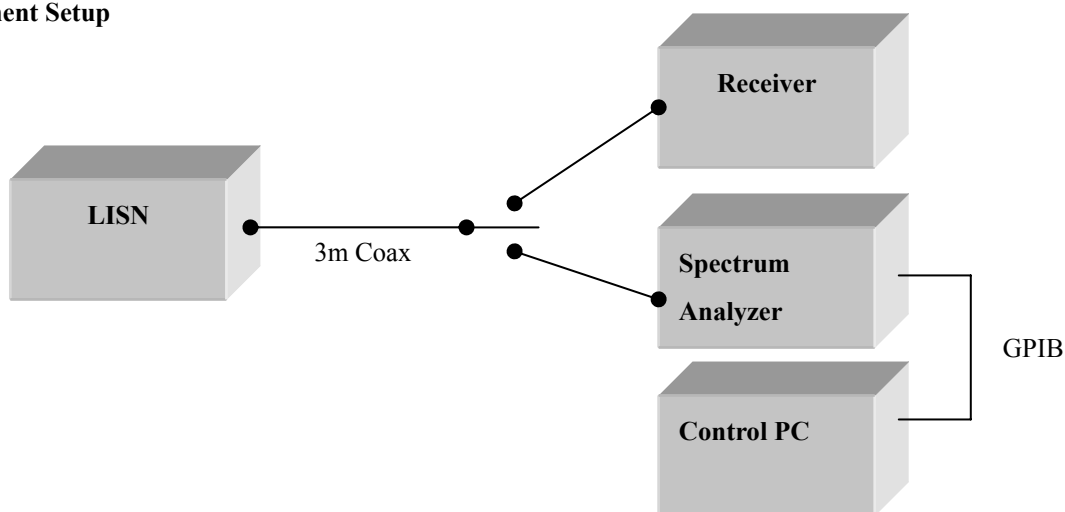


Figure 2: Measurement setup for AC Conducted Emission

### Test Case 1 - Conducted Emission Graph -

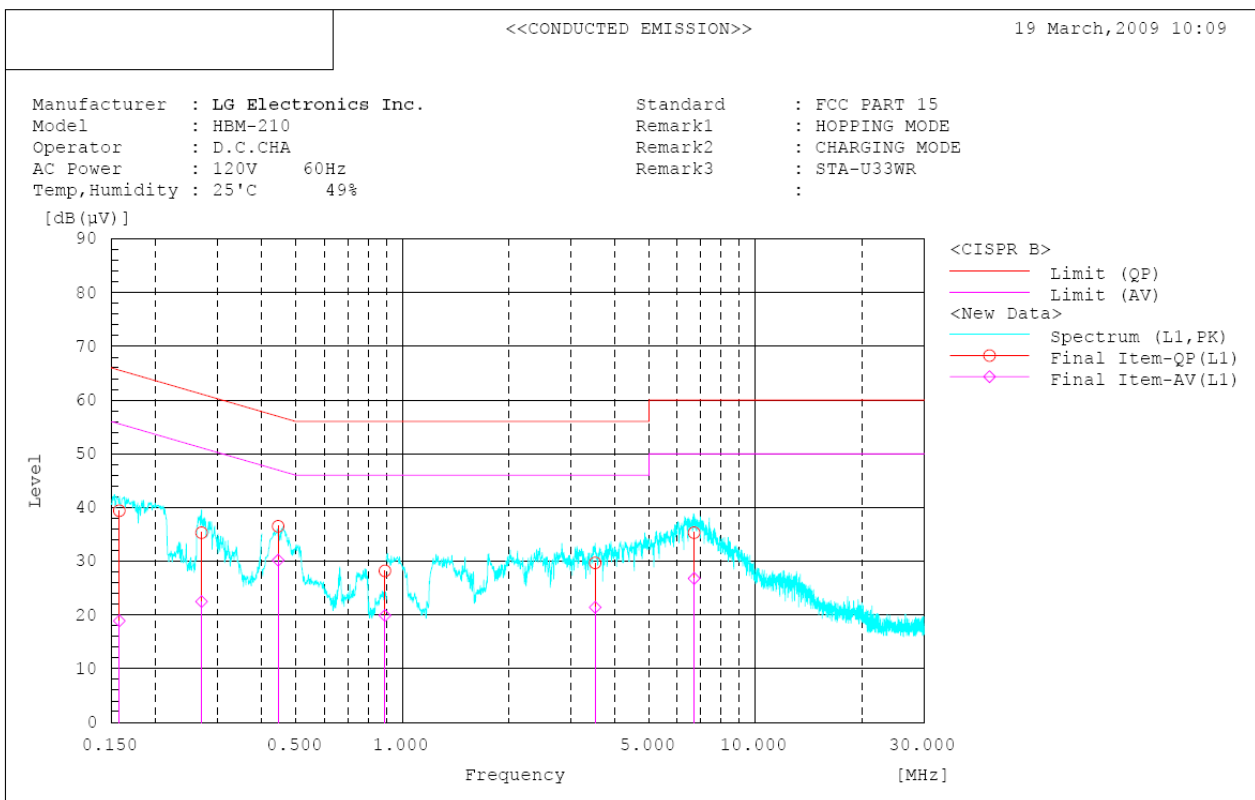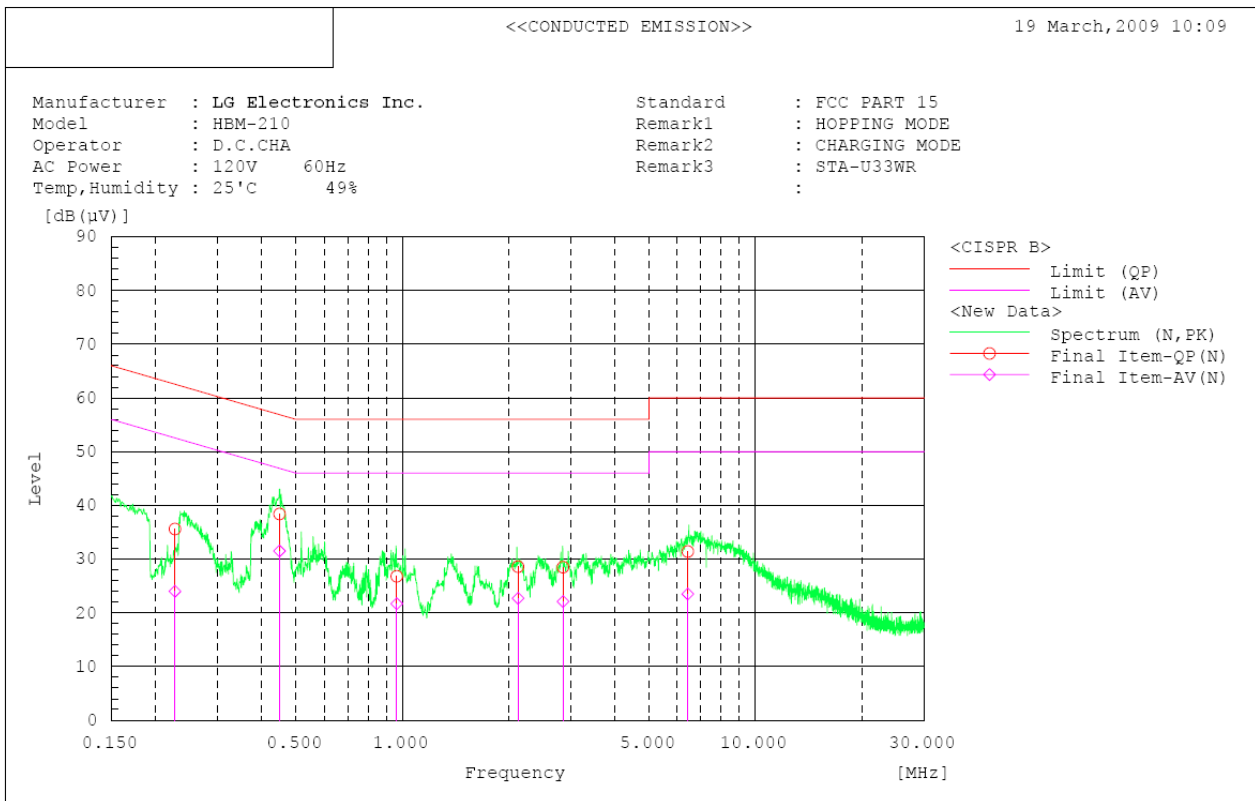

## Test Case 1 - Conducted Emission List -

<<CONDUCTED EMISSION>>

19 March, 2009 10:09

```

Standard      : FCC PART 15
Manufacturer  : LG Electronics Inc.
Model         : HBM-210
Operator      : D.C.CHA
AC Power      : 120V 60Hz
Temp, Humidity : 25°C 49%
Remark1       : HOPPING MODE
Remark2       : CHARGING MODE
Remark3       : SIA-U33WR
    
```

Final Result



--- N Phase ---

No.	Frequency [MHz]	Reading		c.f	Result		Limit		Margin		Remark
		QP [dB(µV)]	AV [dB(µV)]		QP [dB(µV)]	AV [dB(µV)]	QP [dB(µV)]	AV [dB(µV)]	QP [dB]	AV [dB]	
1	0.227	35.4	23.8	0.2	35.6	24.0	62.6	52.6	27.0	28.6	
2	0.449	38.2	31.3	0.2	38.4	31.5	56.9	46.9	18.5	15.4	
3	0.964	26.6	21.5	0.2	26.8	21.7	56.0	46.0	29.2	24.3	
4	2.127	28.3	22.4	0.3	28.6	22.7	56.0	46.0	27.4	23.3	
5	2.851	28.2	21.8	0.3	28.5	22.1	56.0	46.0	27.5	23.9	
6	6.432	31.0	23.1	0.4	31.4	23.5	60.0	50.0	28.6	26.5	

--- L1 Phase ---

No.	Frequency [MHz]	Reading		c.f	Result		Limit		Margin		Remark
		QP [dB(µV)]	AV [dB(µV)]		QP [dB(µV)]	AV [dB(µV)]	QP [dB(µV)]	AV [dB(µV)]	QP [dB]	AV [dB]	
1	0.158	39.0	18.5	0.4	39.4	18.9	65.6	55.6	26.2	36.7	
2	0.270	34.9	22.1	0.4	35.3	22.5	61.1	51.1	25.8	28.6	
3	0.445	36.1	29.8	0.4	36.5	30.2	57.0	47.0	20.5	16.8	
4	0.893	27.8	19.5	0.4	28.2	19.9	56.0	46.0	27.8	26.1	
5	3.515	29.1	20.8	0.6	29.7	21.4	56.0	46.0	26.3	24.6	
6	6.704	34.7	26.2	0.6	35.3	26.8	60.0	50.0	24.7	23.2	

## Test Case 2 - Conducted Emission Graph -

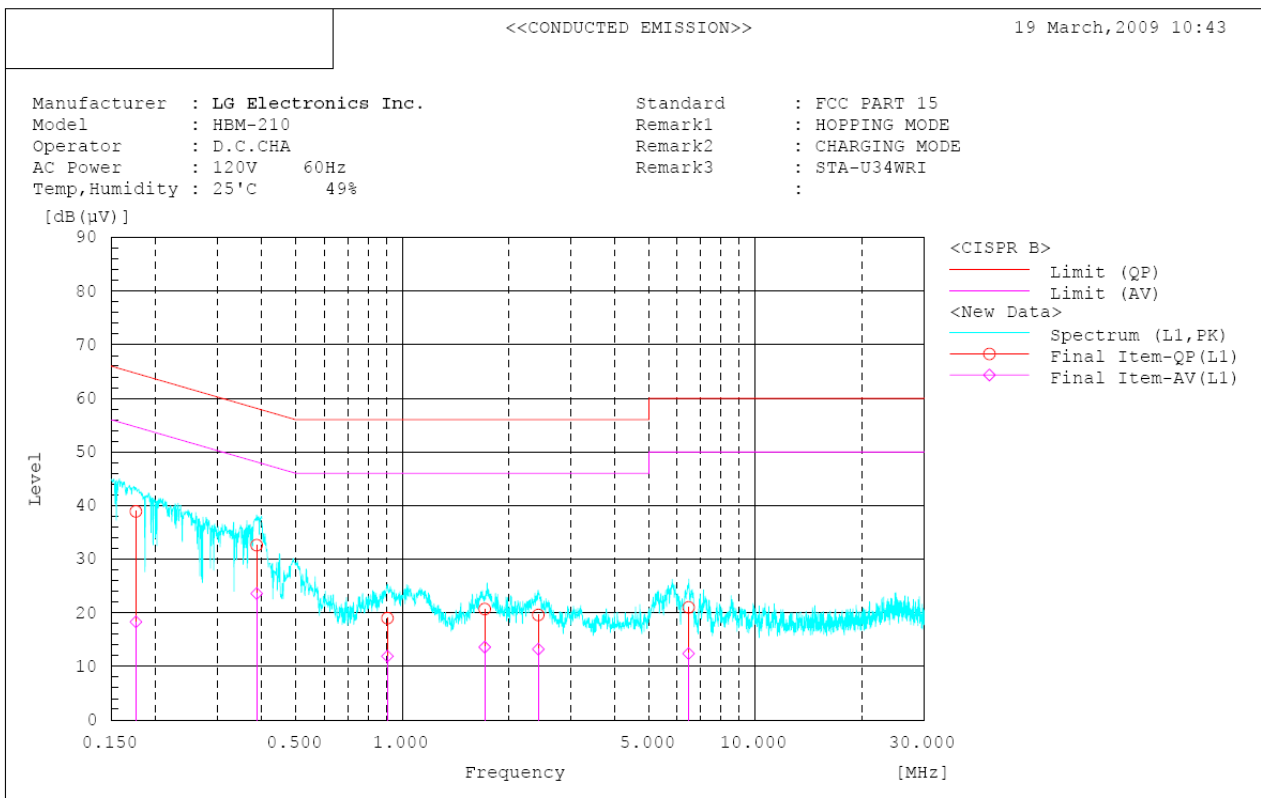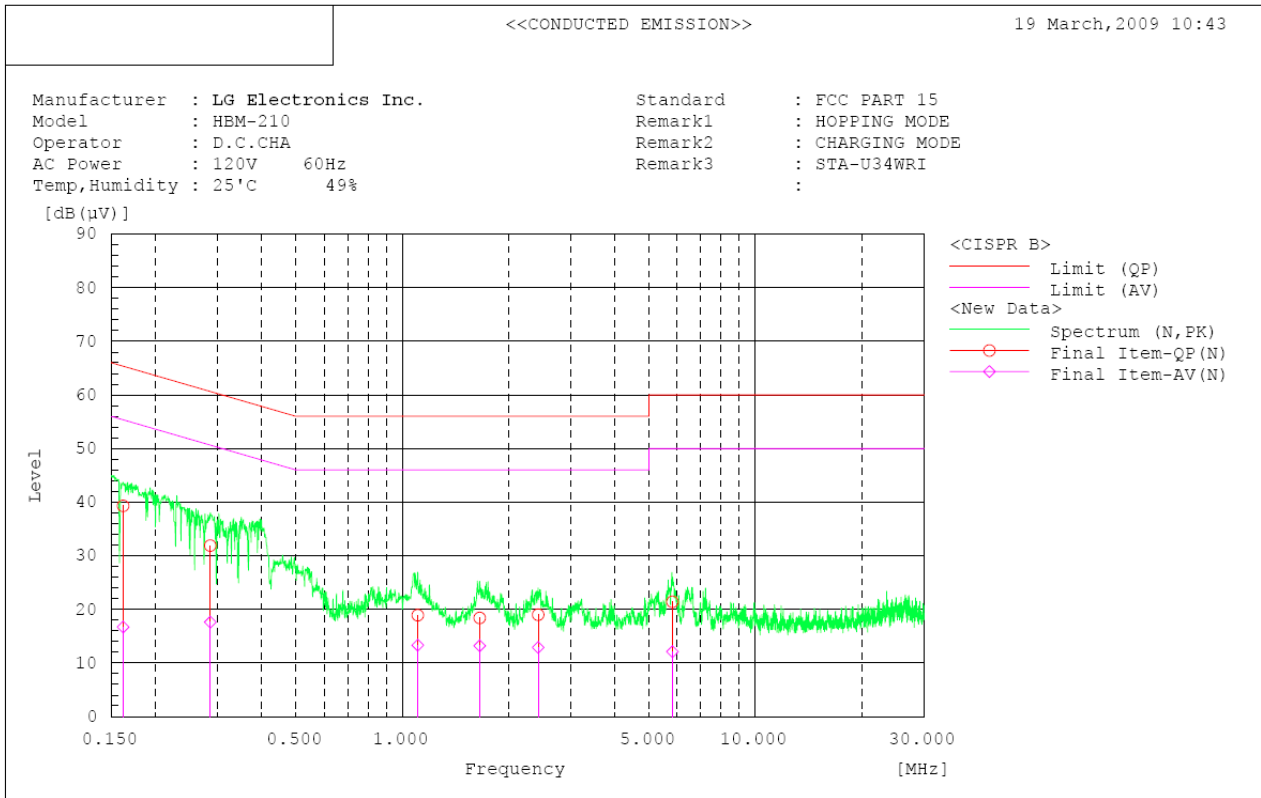

## Test Case 2 - Conducted Emission List -

\*\*\*\*\*  
<<CONDUCTED EMISSION>>  
\*\*\*\*\*

19 March, 2009 10:43

Standard : FCC PART 15  
 Manufacturer : LG Electronics Inc.  
 Model : HEM-210  
 Operator : D.C. CHA  
 AC Power : 120V 60Hz  
 Temp, Humidity : 25°C 49%  
 Remark1 : HOPPING MODE  
 Remark2 : CHARGING MODE  
 Remark3 : STA-U34WRI  
 :

\*\*\*\*\*  
Final Result  
\*\*\*\*\*

--- N Phase ---

No.	Frequency [MHz]	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Remark
		QP [dB(µV)]	AV [dB(µV)]		QP [dB(µV)]	AV [dB(µV)]	QP [dB(µV)]	AV [dB(µV)]	QP [dB]	AV [dB]	
1	0.162	39.2	16.6	0.1	39.3	16.7	65.4	55.4	26.1	38.7	
2	0.286	31.7	17.4	0.2	31.9	17.6	60.6	50.6	28.7	33.0	
3	1.106	18.7	13.1	0.2	18.9	13.3	56.0	46.0	37.1	32.7	
4	1.657	18.1	12.9	0.3	18.4	13.2	56.0	46.0	37.6	32.8	
5	2.425	18.7	12.6	0.3	19.0	12.9	56.0	46.0	37.0	33.1	
6	5.821	21.0	11.7	0.4	21.4	12.1	60.0	50.0	38.6	37.9	

--- L1 Phase ---

No.	Frequency [MHz]	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Remark
		QP [dB(µV)]	AV [dB(µV)]		QP [dB(µV)]	AV [dB(µV)]	QP [dB(µV)]	AV [dB(µV)]	QP [dB]	AV [dB]	
1	0.176	38.5	17.9	0.4	38.9	18.3	64.7	54.7	25.8	36.4	
2	0.387	32.2	23.2	0.4	32.6	23.6	58.1	48.1	25.5	24.5	
3	0.908	18.6	11.5	0.4	19.0	11.9	56.0	46.0	37.0	34.1	
4	1.712	20.2	13.1	0.5	20.7	13.6	56.0	46.0	35.3	32.4	
5	2.427	19.0	12.6	0.6	19.6	13.2	56.0	46.0	36.4	32.8	
6	6.471	20.4	11.8	0.6	21.0	12.4	60.0	50.0	39.0	37.6	

APPENDIX  
**TEST EQUIPMENT FOR TESTS**

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	Next.Due.Date (dd/mm/yy)	S/N
<input checked="" type="checkbox"/>	Spectrum Analyzer	Agilent	E4440A	06/11/08	06/11/09	MY45304199
<input type="checkbox"/>	Spectrum Analyzer(RE)	H.P	8563E	13/10/08	13/10/09	3551A04634
<input type="checkbox"/>	Spectrum Analyzer	Rohde Schwarz	FSP	09/09/08	09/09/09	100385
<input type="checkbox"/>	Power Meter	H.P	EMP-442A	10/07/08	10/07/09	GB37170413
<input type="checkbox"/>	Power Sensor	H.P	8481A	14/07/08	14/07/09	3318A96332
<input type="checkbox"/>	Power Divider	Agilent	11636B	04/12/08	04/12/09	56471
<input type="checkbox"/>	Power Splitter	Anritsu	K241B	14/10/08	14/10/09	020611
<input type="checkbox"/>	Frequency Counter	H.P	5342A	16/09/08	16/09/09	2119A04450
<input type="checkbox"/>	TEMP & HUMIDITY Chamber	JISCO	KR-100/J-RHC2	10/10/08	10/10/09	30604493/021031
<input checked="" type="checkbox"/>	Digital Multimeter	H.P	34401A	13/03/09	13/03/10	3146A13475
<input type="checkbox"/>	Thermo hygrometer	BODYCOM	BJ5478	06/02/09	06/02/10	090205-3
<input checked="" type="checkbox"/>	Thermo hygrometer	BODYCOM	BJ5478	06/02/09	06/02/10	090205-2
<input type="checkbox"/>	Thermo hygrometer	BODYCOM	BJ5478	06/02/09	06/02/10	090205-4
<input type="checkbox"/>	Multifuction Synthesizer	HP	8904A	06/10/08	06/10/09	3633A08404
<input checked="" type="checkbox"/>	Signal Generator	Rohde Schwarz	SMR20	13/03/09	13/03/10	101251
<input checked="" type="checkbox"/>	Signal Generator	H.P	ESG-3000A	09/07/08	09/07/09	US37230529
<input type="checkbox"/>	Amplifier	EMPOWER	BBS3Q7ELU	02/02/09	02/02/10	1020
<input type="checkbox"/>	Vector Signal Generator	Rohde Schwarz	SMJ100A	02/02/09	02/02/10	100148
<input type="checkbox"/>	Audio Analyzer	H.P	8903B	09/07/08	09/07/09	3011A09448
<input type="checkbox"/>	Modulation Analyzer	H.P	8901B	18/07/08	18/07/09	3028A03029
<input type="checkbox"/>	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	31/07/08	31/07/09	GB43461134
<input type="checkbox"/>	Universal Radio communication Tester	Rohde Schwarz	CMU 200	13/03/09	13/03/10	107631
<input checked="" type="checkbox"/>	Bluetooth Tester	TESCOM	TC-3000A	16/12/08	16/12/09	3000A4A0121
<input type="checkbox"/>	BAND Reject Filter	Microwave Circuits	N0308372	06/10/08	06/10/09	3125-01DC0352
<input type="checkbox"/>	BAND Reject Filter	Wainwright	WRCG1750	06/10/08	06/10/09	2
<input type="checkbox"/>	High-Pass Filter	ANRITSU	MP526D	06/10/08	06/10/09	MP27756
<input type="checkbox"/>	High-pass filter	Wainwright	WHKX2.1	N/A	N/A	1
<input checked="" type="checkbox"/>	High-Pass Filter	Wainwright	WHKX3.0	N/A	N/A	9
<input type="checkbox"/>	Tunable Notch Filter	Wainwright	WRCT800.0 /960.0-0.2/40-8SSK	N/A	N/A	10
<input type="checkbox"/>	Tunable Notch Filter	Wainwright	WRCD1700.0 /2000.0-0.2/40-10SSK	N/A	N/A	27
<input type="checkbox"/>	Tunable Notch Filter	Wainwright	WRCT1900.0/ 2200.0-5/40-10SSK	N/A	N/A	7
<input type="checkbox"/>	AC Power supply	DAEKWANG	5KVA	13/03/09	13/03/10	20060321-1
<input checked="" type="checkbox"/>	DC Power Supply	HP	6622A	13/03/09	13/03/10	3448A03760
<input type="checkbox"/>	DC Power Supply	HP	6633A	13/03/09	13/03/10	3524A06634
<input checked="" type="checkbox"/>	HORN ANT	ETS	3115	13/06/08	13/06/09	6419
<input type="checkbox"/>	HORN ANT	ETS	3115	10/09/08	10/09/09	21097
<input type="checkbox"/>	HORN ANT	A.H.Systems	SAS-574	13/06/08	13/06/09	154
<input type="checkbox"/>	HORN ANT	A.H.Systems	SAS-574	13/06/08	13/06/09	155
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	VHA9103	25/11/08	25/11/09	2116
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	VHA9103	25/11/08	25/11/09	2117
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	UHA9105	25/11/08	25/11/09	2261
<input type="checkbox"/>	Dipole Antenna	Schwarzbeck	UHA9105	25/11/08	25/11/09	2262

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	Next.Due.Date (dd/mm/yy)	S/N
<input type="checkbox"/>	Coaxial Fixed Attenuators	Agilent	8491B	01/08/08	01/08/09	MY39260700
<input type="checkbox"/>	Coaxial Fixed Attenuators	Agilent	8491B	15/07/08	15/07/09	MY39260699
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHHEL	23-10-34	01/10/08	01/10/09	BP4386
<input type="checkbox"/>	Attenuator (20dB)	WEINSCHHEL	86-20-11	06/10/08	06/10/09	432
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHHEL	86-10-11	06/10/08	06/10/09	446
<input type="checkbox"/>	Attenuator (10dB)	WEINSCHHEL	86-10-11	06/10/08	06/10/09	408
<input type="checkbox"/>	Attenuator (40dB)	WEINSCHHEL	57-40-33	01/10/08	01/10/09	NN837
<input type="checkbox"/>	Attenuator (30dB)	JFW	50FH-030-300	13/03/09	13/03/10	060320-1
<input type="checkbox"/>	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0088CAN	11/07/08	11/07/09	788
<input type="checkbox"/>	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0185CAN	11/07/08	11/07/09	790
<input type="checkbox"/>	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0215CAN	11/07/08	11/07/09	112
<input checked="" type="checkbox"/>	Amplifier (30dB)	Agilent	8449B	13/10/08	13/10/09	3008A01590
<input type="checkbox"/>	RF Power Amplifier	OPHIRRF	5069F	09/07/08	09/07/09	1006
<input type="checkbox"/>	Software	Agilent	Benchlink	N/A	N/A	A.01.09 021211
<input type="checkbox"/>	EMI TEST RECEIVER	R&S	ESU	02/02/09	02/02/10	100014
<input type="checkbox"/>	BILOG ANTENNA	SCHAFFNER	CBL6112B	13/06/08	13/06/09	2737
<input type="checkbox"/>	Amplifier (22dB)	H.P	8447E	05/02/09	05/02/10	2945A02865
<input type="checkbox"/>	Position Controller	TOKIN	5905A	N/A	N/A	N/A
<input type="checkbox"/>	Software	ToYo EMI	EP5/RE	N/A	N/A	Ver 2.0.800
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	R&S	ESCI	13/05/08	13/05/09	100364
<input checked="" type="checkbox"/>	LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A	13/06/08	13/06/09	590
<input checked="" type="checkbox"/>	BICONICAL ANT.	Schwarzbeck	VHA 9103	13/06/08	13/06/09	2233
<input type="checkbox"/>	LOG-PERIODIC ANT.	Schwarzbeck	UHALP 9108-A1	30/09/08	30/09/09	1098
<input type="checkbox"/>	BICONICAL ANT.	Schwarzbeck	VHA 9103	30/09/08	30/09/09	91031946
<input checked="" type="checkbox"/>	Low Noise Pre Amplifier	TSJ	MLA-100K01-B01-2	13/03/09	13/03/10	1252741
<input type="checkbox"/>	Amplifier (25dB)	Agilent	8447D	21/05/08	21/05/09	2944A10144
<input type="checkbox"/>	Amplifier (25dB)	Agilent	8447D	18/08/08	18/08/09	2648A04922
<input checked="" type="checkbox"/>	Position Controller	TOKIN	5901T	N/A	N/A	14173
<input type="checkbox"/>	Software	AUDIX	e3	N/A	N/A	Ver 3.0
<input type="checkbox"/>	Driver	TOKIN	5902T2	N/A	N/A	14174
<input checked="" type="checkbox"/>	Spectrum Analyzer(CE)	H.P	8591E	26/04/08	26/04/09	3649A05889
<input type="checkbox"/>	LISN	Kyoritsu	KNW-407	04/08/08	04/08/09	8-317-8
<input checked="" type="checkbox"/>	LISN	Kyoritsu	KNW-242	11/09/08	11/09/09	8-654-15
<input checked="" type="checkbox"/>	CVCF	NF Electronic	4420	N/A	N/A	304935/337980
<input checked="" type="checkbox"/>	Software	ToYo EMI	EP5/CE	N/A	N/A	Ver 2.0.801
<input checked="" type="checkbox"/>	DC BLOCK	Hyuplip	KEL-007	N/A	N/A	7-1581-5
<input checked="" type="checkbox"/>	50 ohm Terminator	HME	CT-01	22/01/09	22/01/10	N/A
<input checked="" type="checkbox"/>	RFI/FIELD Intensity Meter	Kyoritsu	KNM-2402	11/09/08	11/09/09	4N-170-3