

FCC / IC DTS REPORT

Certification

Applicant Name:
LG Electronics Inc.

Address:
222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Date of Issue:
January 28, 2019


Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-1901-FI004

FCC ID:	BEJI17S
IC:	2703H-I17S
APPLICANT:	LG Electronics Inc.

Model: I17S
EUT Type: GM AVN CADILLAC
Peak Output Power: 802.11b : 24.29 dBm
802.11g : 23.98 dBm
802.11n(HT20) : 26.81 dBm
Frequency Range: 2412 MHz - 2462 MHz
Modulation type: CCK/DSSS/OFDM
FCC Classification: Digital Transmission System(DTS)
FCC Rule Part(s): Part 15.247
ISED Rule Part(s): RSS-247 Issue 2 (February 2017), RSS-Gen Issue 5(April 2018)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance.



Report prepared by : Kwon Jeong
Engineer of Telecommunication testing center



Approved by : Jong Seok Lee
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1901-FI004	January 28, 2019	- First Approval Report

Table of Contents

1. EUT DESCRIPTION	4
EUT DESCRIPTION.....	4
ANTENNA CONFIGURATIONS	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION.....	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	7
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS.....	9
8. SUMMARY TEST OF RESULTS	28
9. TEST RESULT	30
9.1 DUTY CYCLE.....	30
9.2 6dB BANDWIDTH.....	31
9.3 OUTPUT POWER	37
9.4 POWER SPECTRAL DENSITY	51
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	58
9.6 RADIATED SPURIOUS EMISSIONS	79
9.7 RADIATED RESTRICTED BAND EDGES	94
9.8 RECEIVER SPURIOUS EMISSIONS	109
10. LIST OF TEST EQUIPMENT	110
12. ANNEX A_ TEST SETUP PHOTO	112

1. EUT DESCRIPTION

EUT DESCRIPTION

Model	I17S		
EUT Type	GM AVN CADILLAC		
Power Supply	DC 12.00 V		
Frequency Range	2412 MHz - 2462 MHz		
Max. RF Output Power	Peak Power	Ant. 1 (SISO)	802.11b : 18.45 dBm 802.11g : 23.21 dBm 802.11n(HT20) : 23.26 dBm
		Ant.2 (SISO)	802.11b : 24.29 dBm 802.11g : 23.98 dBm 802.11n(HT20) : 24.25 dBm
		Ant.1&2 (MIMO)	802.11n(HT20) : 26.81 dBm
	Average Power	Ant. 1 (SISO)	802.11b : 12.62 dBm 802.11g : 15.48 dBm 802.11n(HT20) : 15.32 dBm
		Ant.2 (SISO)	802.11b : 18.39 dBm 802.11g : 16.29 dBm 802.11n(HT20) : 16.09 dBm
		Ant.1&2 (MIMO)	802.11n(HT20) : 19.02 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
Number of Channels	11 Channels		
Antenna Type	Ant 1: Internal Antenna Ant 2: External Antenna		
Antenna Peak gain (dBi)	Ant 1: 4.34 dBi Ant 2: 3.60 dBi		
Support for datarate	<ul style="list-style-type: none"> - 802.11b(Mbps) : 1, 2, 5.5, 11 - 802.11g(Mbps) : 6, 9, 12, 18, 24 ,36, 48, 54 - [SISO] 802.11n : MCS0 ~ MCS7 - [MIMO] 802.11n : MCS8 ~ MCS15 		
Date(s) of Tests	January 09, 2019 ~ January 23, 2019		
PMN (Product Marketing Number)	GM AVN CADILLAC		
HVIN (Hardware Version Identification Number)	I17S		
FVIN (Firmware Version Identification Number)	9.40.94.16		
HMN (Host Marketing Name)	N/A		

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11b	O	O	X	X
802.11g	O	O	X	X
802.11n(HT20)	O	O	O	X

Note:

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

2. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii)

Directional gain = $G_{ANT\ MAX} + 10 \log(N_{ANT}/N_{SS})$ dBi

$$\begin{aligned}
 & (N_{ANT} = 2, N_{SS} = 2, G_{ANT\ MAX} \text{ is the gain of the antenna having the highest gain}) \\
 & = 4.34 + 0 = 4.34 \text{ dBi}
 \end{aligned}$$

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05 dated August 24, 2018 entitled "guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 8.3.(KDB 558074 v05)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated December 20, 2016(Registration Number: 5944A-3)

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

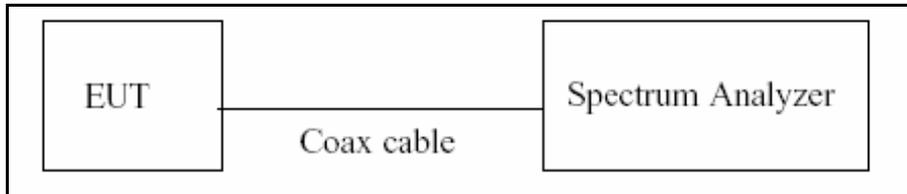

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth


Limit

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05, Procedure 11.8.2 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

7.3. Output Power


Limit

Test Requirements and limit, §15.247(b)(3)

The transmitter output is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Configuration

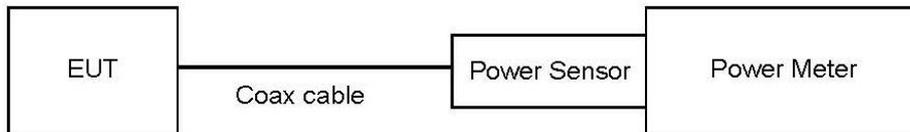

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 8.3.1.3 in KDB 558074 v05, Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 8.3.2.3 in KDB 558074 v05, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

- Total Power (Peak) = Reading Value + ATT loss + Cable loss
- Total Power (Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density


Limit

Test Requirements and limit, §15.247(e)

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Configuration

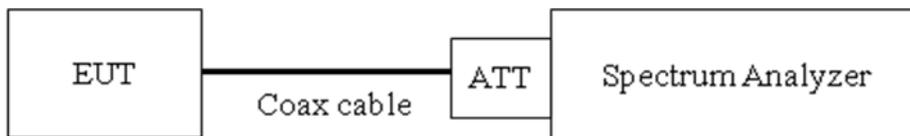

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure in KDB 558074 v05, Procedure 11.10.3 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss

7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions


Limit

Test Requirements and limit, §15.247(d)

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration

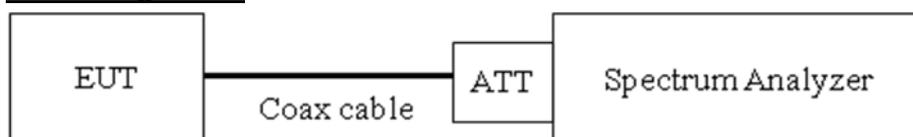

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Internal Antenna

Freq(MHz)	Factor(dB)
30	21.33
100	19.86
200	20.22
300	20.16
400	20.26
500	20.28
600	20.35
700	20.38
800	20.38
900	20.37
1000	20.42
2000	20.67
2400*	20.68
2500*	20.7
3000	20.71
4000	20.92
5000	21.1
6000	21.09
7000	21.38
8000	21.35
9000	21.51
10000	21.59
11000	21.59
12000	21.71
13000	21.86
14000	21.93
15000	22.01
16000	22.07
17000	22.05
18000	22.11
19000	22.1
20000	22.17
21000	22.2
22000	22.34
23000	22.63
24000	22.37
25000	22.56
26000	22.05

Note : 1. '*' is fundamental frequency range.
2. Factor = Attenuator loss + Cable loss

External Antenna

Freq(MHz)	Factor(dB)
30	23.88
100	22.41
200	22.77
300	22.71
400	22.81
500	22.83
600	22.9
700	22.93
800	22.93
900	22.92
1000	22.97
2000	23.22
2400*	23.23
2500*	23.25
3000	23.26
4000	23.47
5000	23.65
6000	23.64
7000	23.93
8000	23.9
9000	24.06
10000	24.14
11000	24.14
12000	24.26
13000	24.41
14000	24.48
15000	24.56
16000	24.62
17000	24.6
18000	24.66
19000	24.65
20000	24.72
21000	24.75
22000	24.89
23000	25.18
24000	24.92
25000	25.11
26000	24.6

Note : 1. '**' is fundamental frequency range.
2. Factor = Attenuator loss + Cable loss

7.6. Radiated Test


Limit

Test Requirements and limit, §15.205, §15.209


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

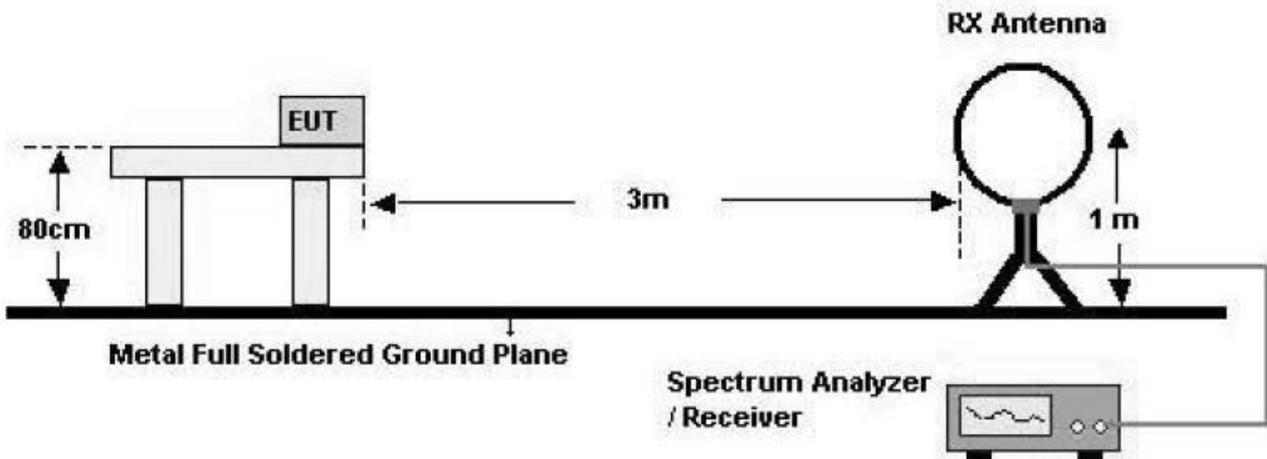

30 MHz - 1 GHz

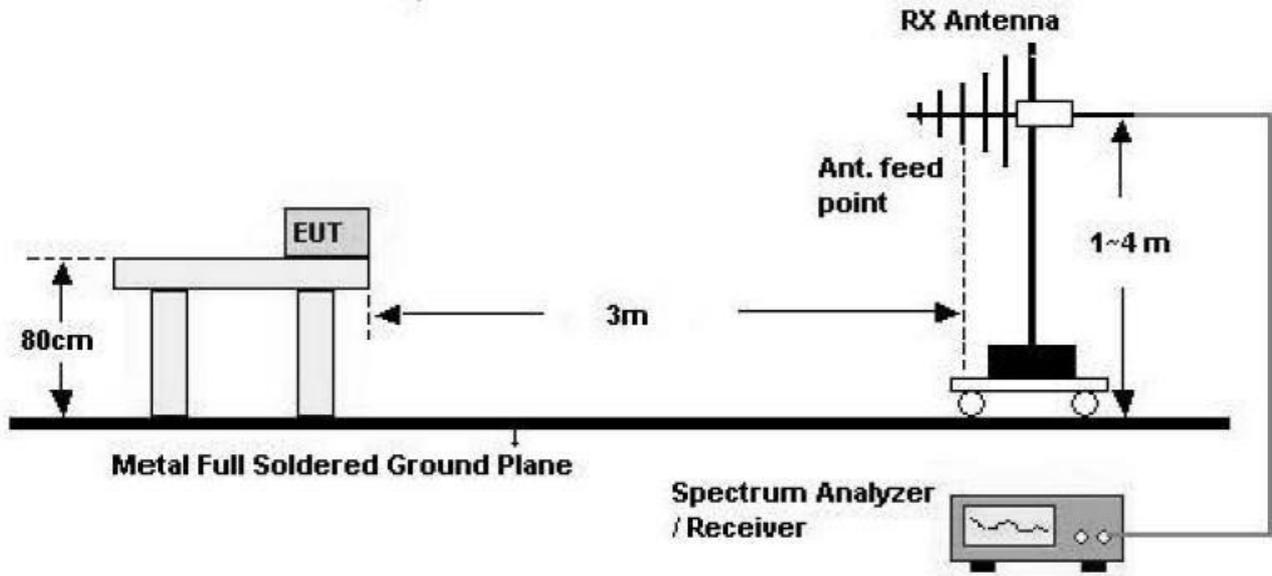

Above 1 GHz

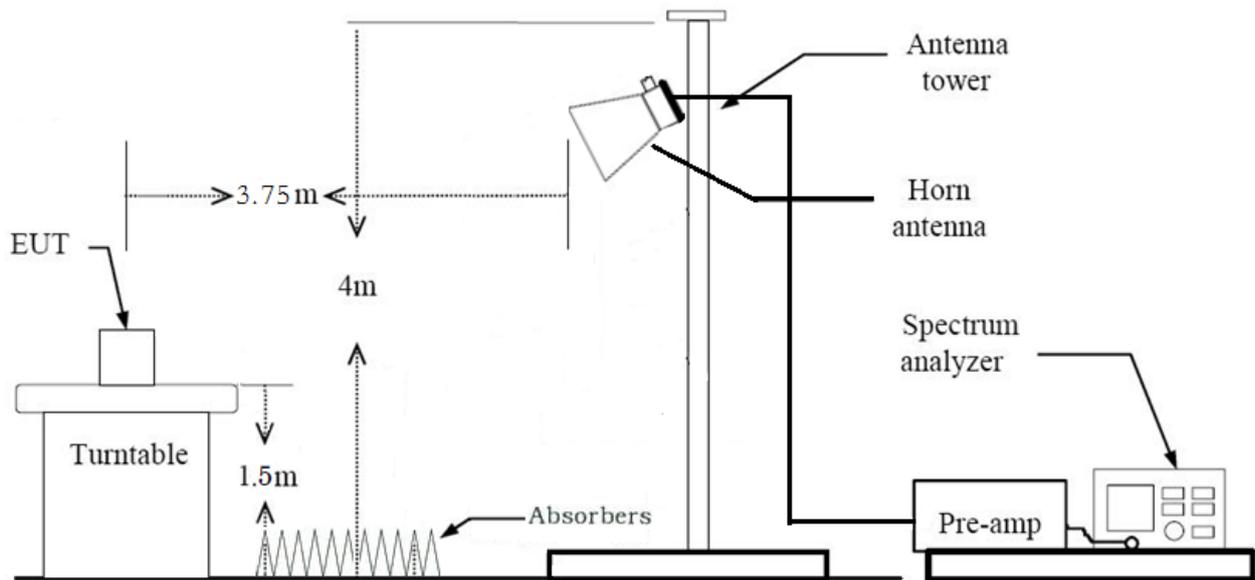

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW \geq 3*RBW

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. The test results for below 30 MHz is correlated to an open site.

The result on OATS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

5. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3*RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

*In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - (2) Measurement Type(Average): Duty cycle \geq 98%
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - (2) Measurement Type(Average): Duty cycle \geq 98%,
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration

30 MHz - 1 GHz

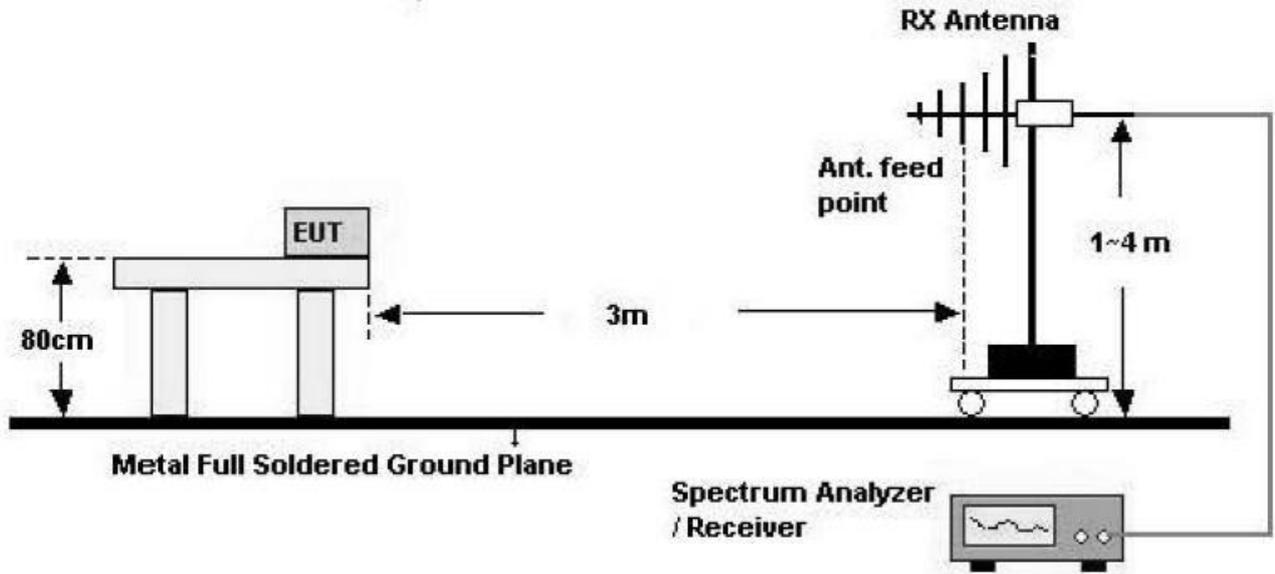

Above 1 GHz

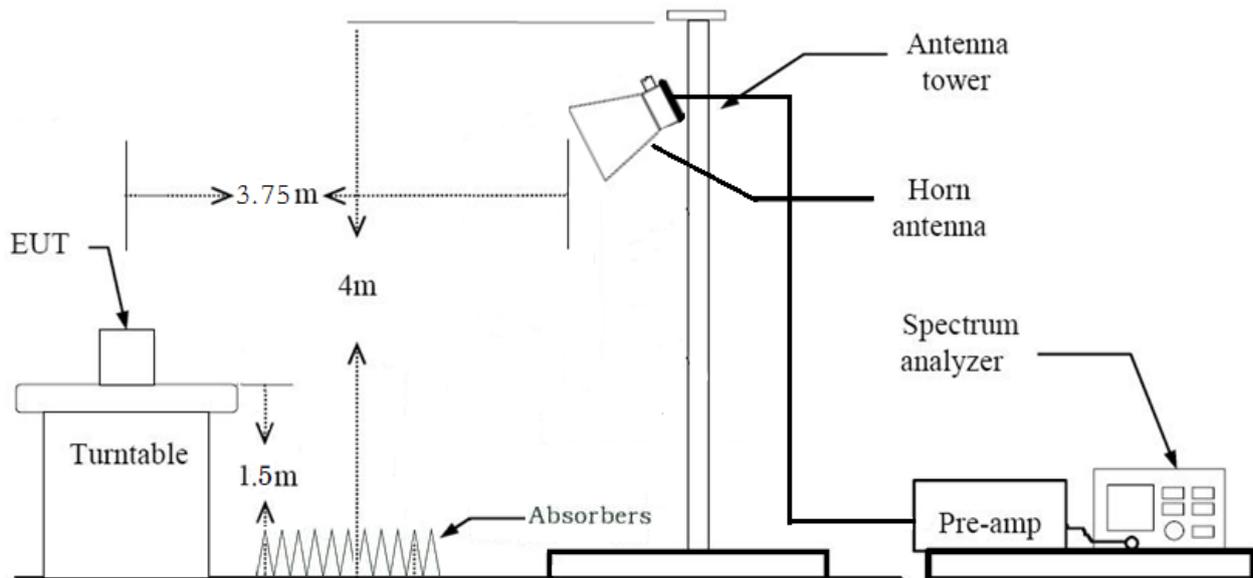

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \cdot \text{RBW}$
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

7.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(SDM)
 - Worstcase : Ant1(SISO), Ant2(SISO),
3. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : Y
4. Duty cycle factor applies only 802.11g/n (Duty cycle < 98%).
5. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n : MCS0

AC Power line Conducted Emissions

We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.

[Ant1]

- 802.11b : 1 Mbps
- 802.11g : 9 Mbps
- 802.11n(SISO) : MCS1

[Ant2]

- 802.11b : 1 Mbps
- 802.11g : 6 Mbps
- 802.11n(SISO) : MCS0

[Ant1+2]

- 802.11n(MIMO) : MCS9

2. SISO & MIMO(Multiple spatial streams) were tested and the worst case results are reported.

- Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(SDM)
- Worstcase : Ant1(SISO), Ant2(SISO),

8. SUMMARY TEST OF RESULTS

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		N/A (Note1)
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

Note:

1. We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

IC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	CONDUCTED	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		N/A (Note1)
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6		RADIATED
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8	PASS	
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6	PASS	

Note:

1. We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

9. TEST RESULT

9.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.607	8.708	0.988	0.051
	2	4.301	4.398	0.978	0.097
	5.5	1.627	1.721	0.946	0.243
	11	0.864	0.956	0.903	0.441
802.11g	6	1.427	1.530	0.933	0.301
	9	0.960	1.063	0.904	0.439
	12	0.727	0.826	0.881	0.551
	18	0.495	0.594	0.834	0.791
	24	0.375	0.474	0.791	1.016
	36	0.256	0.358	0.716	1.450
	48	0.199	0.298	0.667	1.757
	54	0.183	0.282	0.648	1.882
802.11n (HT20)	MCS0	1.336	1.438	0.929	0.321
	MCS1	0.690	0.789	0.874	0.583
	MCS2	0.474	0.574	0.826	0.829
	MCS3	0.471	0.574	0.821	0.854
	MCS4	0.259	0.358	0.723	1.408
	MCS5	0.203	0.302	0.672	1.729
	MCS6	0.184	0.286	0.643	1.920
	MCS7	0.171	0.270	0.633	1.988
	MCS8	0.694	0.793	0.874	0.583
	MCS9	0.371	0.470	0.789	1.027
	MCS10	0.263	0.362	0.726	1.390
	MCS11	0.204	0.306	0.668	1.754
	MCS12	0.152	0.254	0.600	2.221
	MCS13	0.127	0.226	0.561	2.511
	MCS14	0.119	0.218	0.547	2.619
MCS15	0.111	0.210	0.527	2.778	

9.2 6dB BANDWIDTH

[Ant1]


802.11b Mode		6 dB Bandwidth [MHz]	OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.			
2412	1	7.09	10.029	> 0.5
2437	6	7.09	10.024	> 0.5
2462	11	7.13	9.986	> 0.5

802.11g Mode		6 dB Bandwidth [MHz]	OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.			
2412	1	16.33	16.401	> 0.5
2437	6	15.87	16.423	> 0.5
2462	11	15.89	16.419	> 0.5


802.11n Mode		6 dB Bandwidth [MHz]	OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.			
2412	1	17.29	17.613	> 0.5
2437	6	17.00	17.625	> 0.5
2462	11	17.57	17.622	> 0.5

■ Test Plots [Ant1]


6dB Bandwidth plot (802.11b-CH 6)

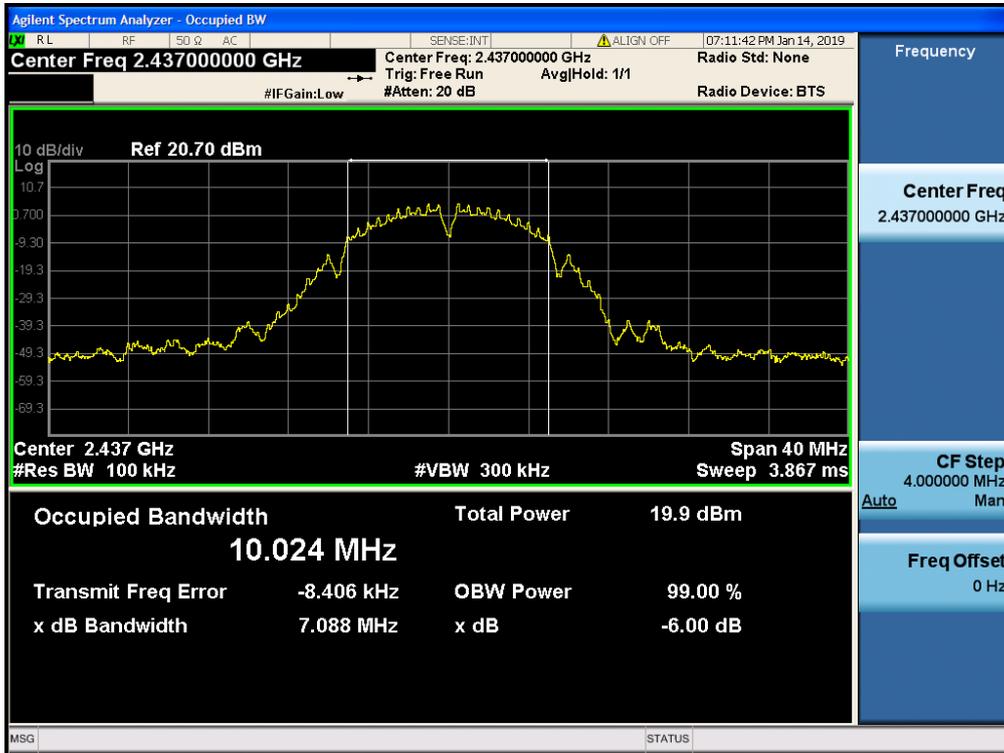

6dB Bandwidth plot (802.11g-CH 6)

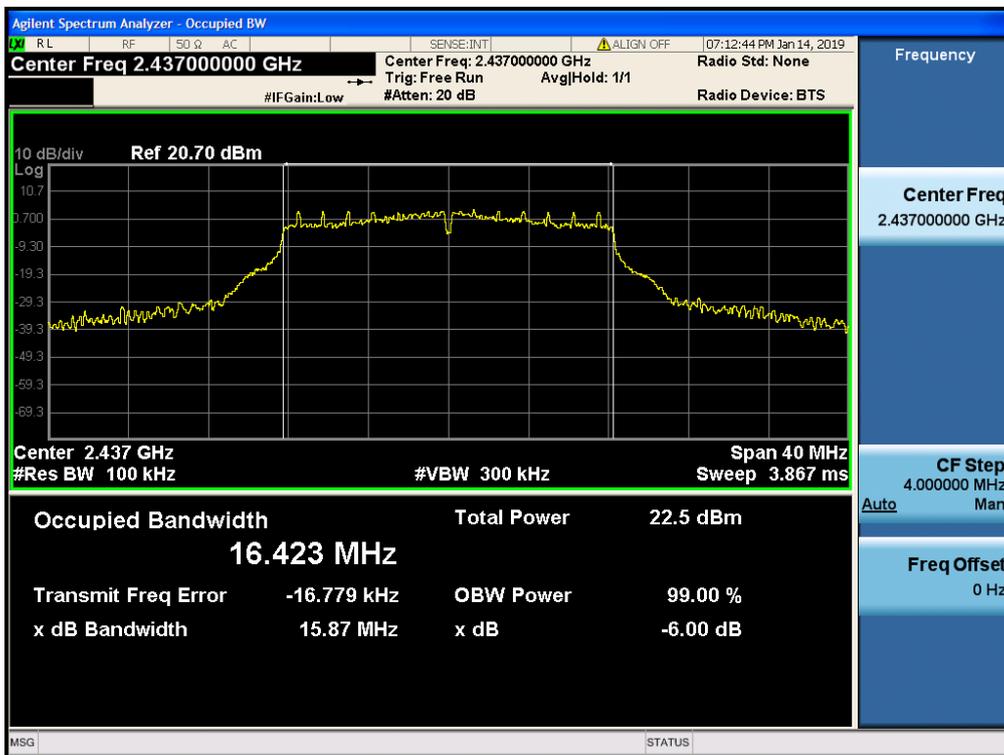

6dB Bandwidth plot (802.11n_HT20-CH 6)

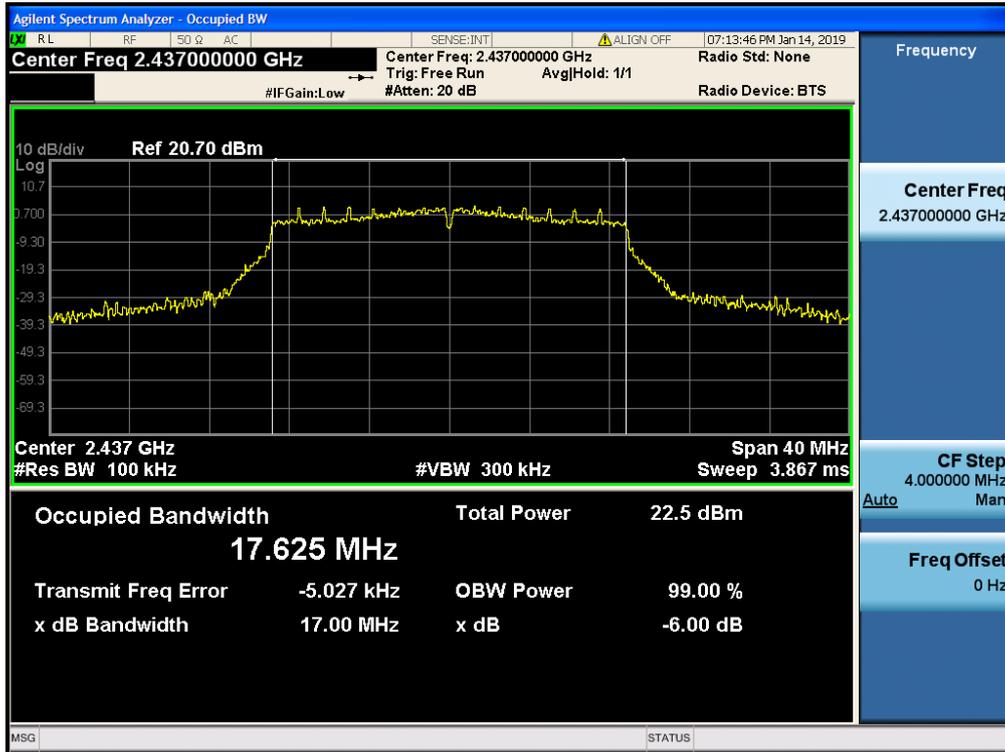

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

[Ant2]


802.11b Mode		6 dB Bandwidth [MHz]	OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.			
2412	1	7.11	10.122	> 0.5
2437	6	7.12	10.191	> 0.5
2462	11	7.10	10.238	> 0.5

802.11g Mode		6 dB Bandwidth [MHz]	OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.			
2412	1	16.06	16.395	> 0.5
2437	6	15.83	16.474	> 0.5
2462	11	16.32	16.420	> 0.5


802.11n Mode		6 dB Bandwidth [MHz]	OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.			
2412	1	17.56	17.615	> 0.5
2437	6	17.56	17.657	> 0.5
2462	11	17.03	17.608	> 0.5

■ Test Plots [Ant2]


6dB Bandwidth plot (802.11b-CH 11)

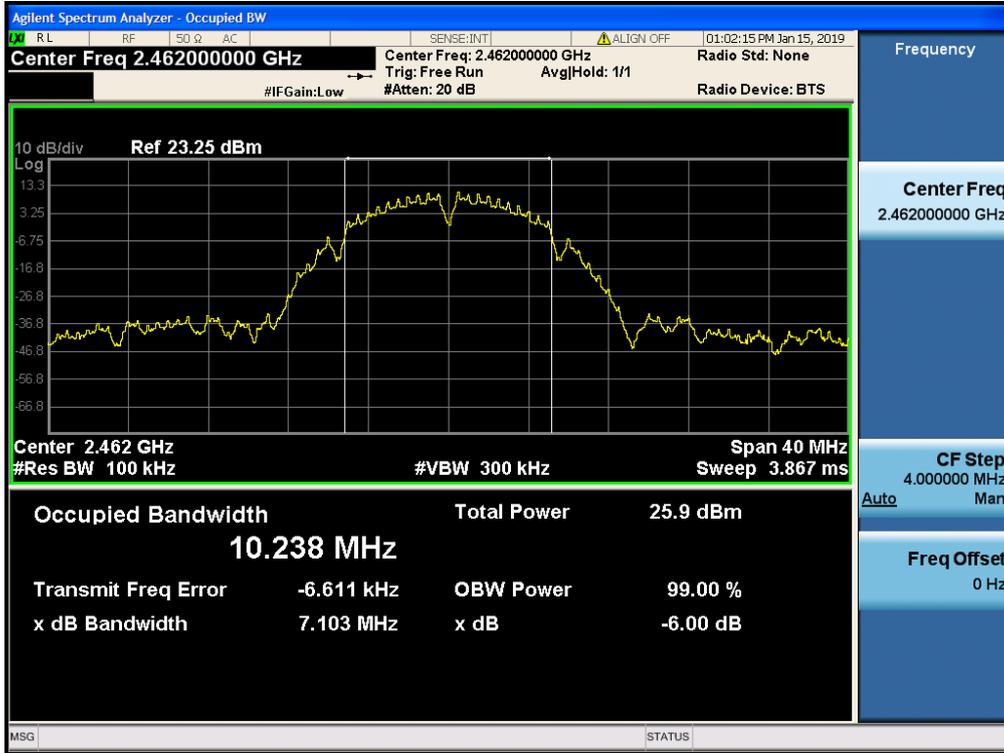

6dB Bandwidth plot (802.11g-CH 6)

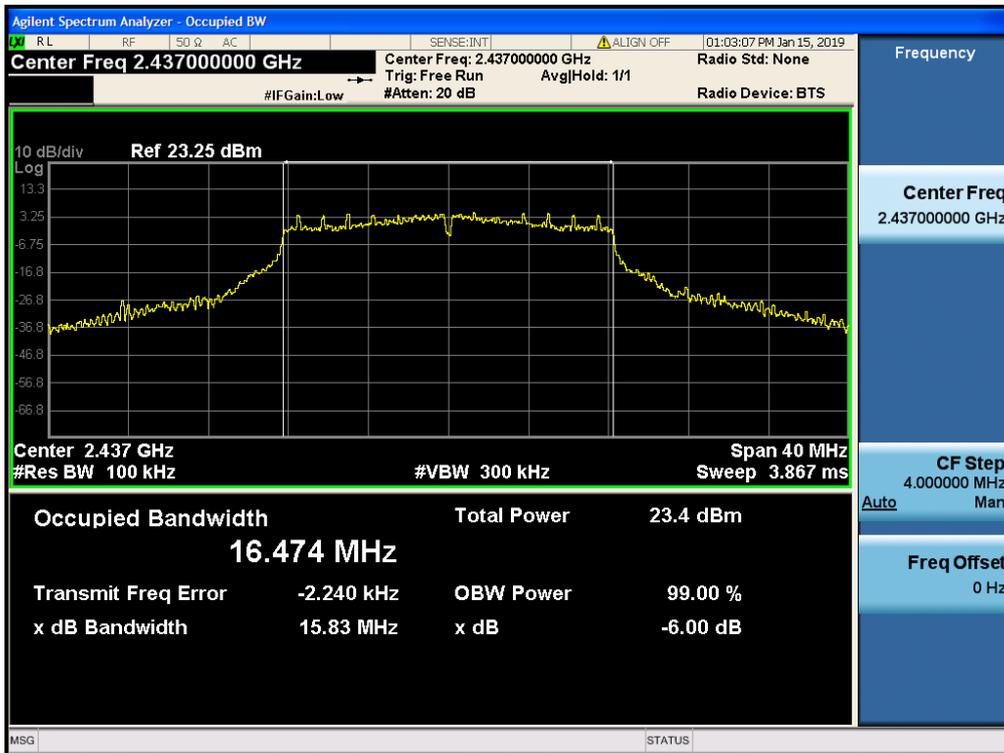

6dB Bandwidth plot (802.11n_HT20-CH 11)

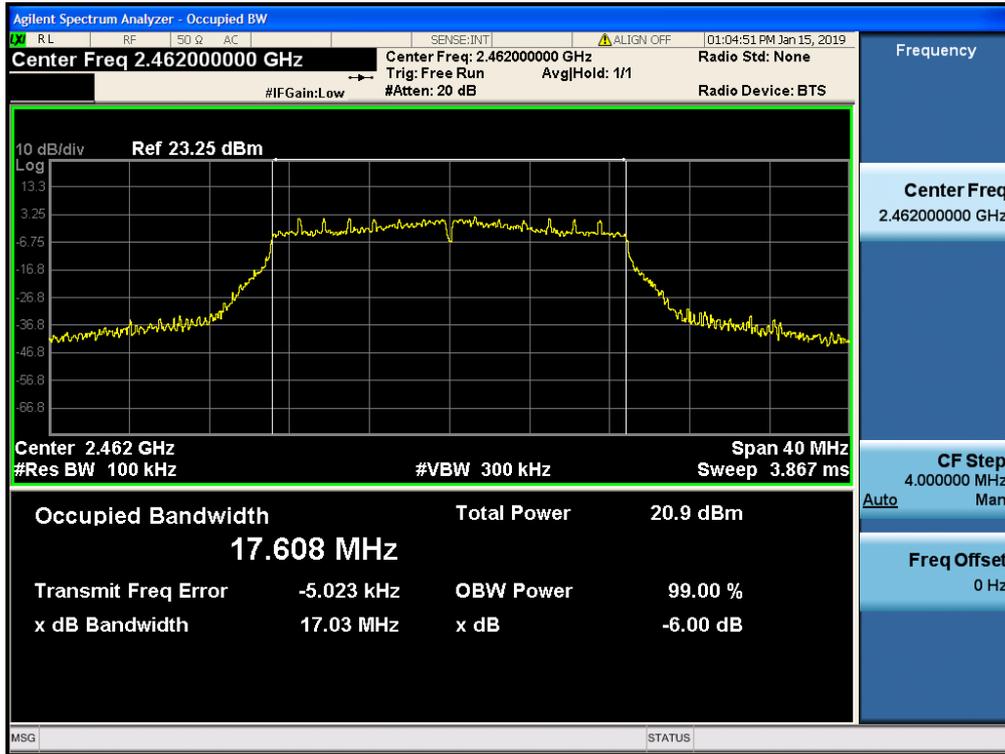

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.7 dB(Ant1) & 23.98 dB(Ant2) are offset for 2.4 GHz Band.

[ANT1]

802.11b Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency [MHz]	Channel No.				
2412	1	13	1	15.07	30
			2	15.33	30
			5.5	16.75	30
			11	18.45	30
2437	6	13	1	14.85	30
			2	14.68	30
			5.5	16.14	30
			11	17.92	30
2462	11	13	1	14.66	30
			2	14.88	30
			5.5	15.90	30
			11	17.75	30

802.11g Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency[M Hz]	Channel No.				
2412	1	9	6	17.88	30
			9	17.87	30
			12	17.56	30
			18	16.96	30
			24	17.10	30
			36	17.23	30
			48	17.24	30
			54	17.23	30
2437	6	16	6	23.21	30
			9	23.12	30
			12	22.93	30
			18	22.54	30
			24	22.58	30
			36	22.75	30
			48	22.71	30
			54	22.70	30
2462	11	12	6	19.83	30
			9	19.75	30
			12	19.51	30
			18	18.88	30
			24	19.08	30
			36	19.15	30
			48	18.97	30
			54	19.21	30

802.11n Mode		Power Level Setting	MCS Index	Measured Power[dBm]	Limit [dBm]
Frequency[M Hz]	Channel No.				
2412	1	8	0	16.86	30
			1	16.85	30
			2	16.85	30
			3	16.85	30
			4	16.89	30
			5	16.83	30
			6	16.83	30
			7	16.92	30
2437	6	16	0	23.10	30
			1	23.18	30
			2	23.08	30
			3	23.26	30
			4	23.03	30
			5	23.07	30
			6	23.11	30
			7	23.07	30
2462	11	11	0	18.99	30
			1	18.87	30
			2	18.78	30
			3	18.82	30
			4	18.81	30
			5	18.60	30
			6	18.64	30
			7	18.58	30

[ANT2]

802.11b Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency [MHz]	Channel No.				
2412	1	18	1	19.18	30
			2	19.41	30
			5.5	21.03	30
			11	22.72	30
2437	6	18	1	19.88	30
			2	20.13	30
			5.5	21.81	30
			11	23.41	30
2462	11	18	1	20.64	30
			2	20.92	30
			5.5	22.70	30
			11	24.29	30

802.11g Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency[M Hz]	Channel No.				
2412	1	12	6	20.43	30
			9	20.37	30
			12	20.20	30
			18	19.73	30
			24	19.89	30
			36	19.89	30
			48	20.01	30
			54	20.02	30
2437	6	16	6	23.98	30
			9	23.92	30
			12	23.68	30
			18	23.28	30
			24	23.58	30
			36	23.69	30
			48	23.68	30
			54	23.48	30
2462	11	13	6	22.34	30
			9	22.23	30
			12	22.06	30
			18	21.68	30
			24	21.83	30
			36	21.96	30
			48	22.00	30
			54	22.00	30

802.11n Mode		Power Level Setting	MCS Index	Measured Power[dBm]	Limit [dBm]
Frequency[M Hz]	Channel No.				
2412	1	11	0	19.68	30
			1	19.63	30
			2	19.60	30
			3	19.71	30
			4	19.64	30
			5	19.64	30
			6	19.74	30
			7	19.57	30
2437	6	16	0	23.80	30
			1	23.81	30
			2	23.80	30
			3	24.25	30
			4	24.01	30
			5	24.10	30
			6	24.10	30
			7	24.10	30
2462	11	12	0	21.44	30
			1	21.42	30
			2	21.46	30
			3	21.43	30
			4	21.44	30
			5	21.41	30
			6	21.43	30
			7	21.29	30

[MIMO]

802.11n Mode		Power Level Setting	Total Power [dBm]			Limit (dBm)
Frequency [MHz]	Channel No.		SISO (Ant 1)	SISO (Ant 2)	MIMO (Ant 1+2)	
2412	1	8	16.99	17.11	20.06	30.00
2437	6	16	23.30	24.24	26.81	30.00
2462	11	11	18.99	20.84	23.02	30.00

Note:

1. All datarate of operation were investigated and the worst case datarate results are reported.
-Worstcase : MCS9

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.7 dB(Ant1) & 23.98 dB(Ant2) are offset for 2.4 GHz Band.

[ANT1]

802.11b Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	13	1	12.57	0.051	12.62	30
			2	12.37	0.097	12.47	30
			5.5	12.05	0.243	12.30	30
			11	11.91	0.441	12.35	30
2437	6	13	1	12.15	0.051	12.20	30
			2	11.93	0.097	12.02	30
			5.5	11.60	0.243	11.85	30
			11	11.51	0.441	11.95	30
2462	11	13	1	11.79	0.051	11.84	30
			2	11.65	0.097	11.75	30
			5.5	11.34	0.243	11.58	30
			11	11.25	0.441	11.70	30

802.11g Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	9	6	9.73	0.301	10.03	30
			9	9.60	0.439	10.04	30
			12	9.43	0.551	9.99	30
			18	8.59	0.791	9.38	30
			24	8.30	1.016	9.32	30
			36	7.97	1.450	9.42	30
			48	7.70	1.757	9.46	30
			54	7.53	1.882	9.41	30
2437	6	16	6	15.16	0.301	15.46	30
			9	15.04	0.439	15.48	30
			12	14.92	0.551	15.47	30
			18	14.25	0.791	15.04	30
			24	13.91	1.016	14.93	30
			36	13.49	1.450	14.94	30
			48	13.27	1.757	15.03	30
			54	13.11	1.882	14.99	30
2462	11	12	6	11.64	0.301	11.94	30
			9	11.51	0.439	11.95	30
			12	11.39	0.551	11.94	30
			18	10.59	0.791	11.38	30
			24	10.39	1.016	11.41	30
			36	9.81	1.450	11.26	30
			48	9.52	1.757	11.28	30
			54	9.45	1.882	11.33	30

802.11n Mode		Power Level Setting	MCS Index	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	8	0	8.66	0.321	8.98	30
			1	8.70	0.583	9.28	30
			2	8.41	0.829	9.23	30
			3	8.20	0.854	9.06	30
			4	7.56	1.408	8.97	30
			5	7.20	1.729	8.93	30
			6	6.87	1.920	8.79	30
			7	6.76	1.988	8.75	30
2437	6	16	0	14.98	0.321	15.30	30
			1	14.74	0.583	15.32	30
			2	14.49	0.829	15.32	30
			3	13.99	0.854	14.84	30
			4	13.48	1.408	14.89	30
			5	13.18	1.729	14.91	30
			6	13.07	1.920	14.99	30
			7	12.95	1.988	14.94	30
2462	11	11	0	10.68	0.321	11.00	30
			1	10.44	0.583	11.02	30
			2	10.07	0.829	10.90	30
			3	9.44	0.854	10.29	30
			4	9.07	1.408	10.48	30
			5	8.63	1.729	10.36	30
			6	8.57	1.920	10.49	30
			7	8.35	1.988	10.34	30

[ANT2]

802.11b Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	18	1	16.70	0.051	16.75	30
			2	16.62	0.097	16.72	30
			5.5	16.48	0.243	16.72	30
			11	16.30	0.441	16.74	30
2437	6	18	1	17.43	0.051	17.48	30
			2	17.18	0.097	17.28	30
			5.5	17.09	0.243	17.33	30
			11	16.88	0.441	17.32	30
2462	11	18	1	18.33	0.051	18.39	30
			2	18.16	0.097	18.25	30
			5.5	18.14	0.243	18.38	30
			11	17.91	0.441	18.35	30

802.11g Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	12	6	12.42	0.301	12.72	30
			9	12.18	0.439	12.62	30
			12	12.16	0.551	12.71	30
			18	11.39	0.791	12.18	30
			24	11.17	1.016	12.18	30
			36	11.15	1.450	12.60	30
			48	10.50	1.757	12.25	30
			54	10.34	1.882	12.22	30
2437	6	16	6	15.98	0.301	16.29	30
			9	15.84	0.439	16.28	30
			12	15.73	0.551	16.28	30
			18	15.13	0.791	15.92	30
			24	14.91	1.016	15.93	30
			36	14.53	1.450	15.98	30
			48	14.27	1.757	16.02	30
			54	13.90	1.882	15.78	30
2462	11	13	6	14.31	0.301	14.62	30
			9	14.09	0.439	14.53	30
			12	13.97	0.551	14.52	30
			18	13.33	0.791	14.12	30
			24	13.03	1.016	14.04	30
			36	12.63	1.450	14.08	30
			48	12.38	1.757	14.13	30
			54	12.16	1.882	14.04	30

802.11n Mode		Power Level Setting	MCS Index	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	11	0	11.44	0.321	11.77	30
			1	11.17	0.583	11.75	30
			2	10.92	0.829	11.75	30
			3	10.37	0.854	11.23	30
			4	10.01	1.408	11.42	30
			5	9.59	1.729	11.32	30
			6	9.51	1.920	11.43	30
			7	9.34	1.988	11.32	30
2437	6	16	0	15.77	0.321	16.09	30
			1	15.46	0.583	16.04	30
			2	15.21	0.829	16.04	30
			3	14.94	0.854	15.79	30
			4	14.55	1.408	15.96	30
			5	14.17	1.729	15.89	30
			6	13.92	1.920	15.84	30
			7	13.93	1.988	15.91	30
2462	11	12	0	13.41	0.321	13.73	30
			1	13.10	0.583	13.68	30
			2	12.89	0.829	13.72	30
			3	12.15	0.854	13.00	30
			4	12.15	1.408	13.56	30
			5	11.51	1.729	13.24	30
			6	11.36	1.920	13.28	30
			7	11.22	1.988	13.21	30

[MIMO]

802.11n(HT20) Mode		Power Level Setting	Duty Cycle Factor (dB)	Measured Power (dBm)	Measured Power (dBm)	Total Power (dBm)	Limit (dBm)
Frequency (MHz)	Channel			Ant1	Ant2	Ant1+2	
2412	1	8	1.027	8.24	8.19	12.25	30.00
2437	6	16	1.027	14.56	15.36	19.02	30.00
2462	11	11	1.027	10.26	11.89	15.19	30.00

Note:

1. All datarate of operation were investigated and the worst case datarate results are reported.
-Worstcase : MCS9

9.4 POWER SPECTRAL DENSITY

[ANT1]


Mode	Frequency (MHz)	Channel No.	Test Result	
			PSD (dBm)	Limit (dBm)
802.11b	2412	1	-8.386	8
	2437	6	-10.279	8
	2462	11	-9.910	8
802.11g	2412	1	-14.099	8
	2437	6	-8.750	8
	2462	11	-12.127	8
802.11n (HT20)	2412	1	-14.426	8
	2437	6	-8.806	8
	2462	11	-11.338	8

Note :

1. Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.7 dB(Ant1) & 23.98 dB(Ant2) are offset for 2.4 GHz Band.

■ Test Plots


Power Spectral Density (802.11b-CH 1)

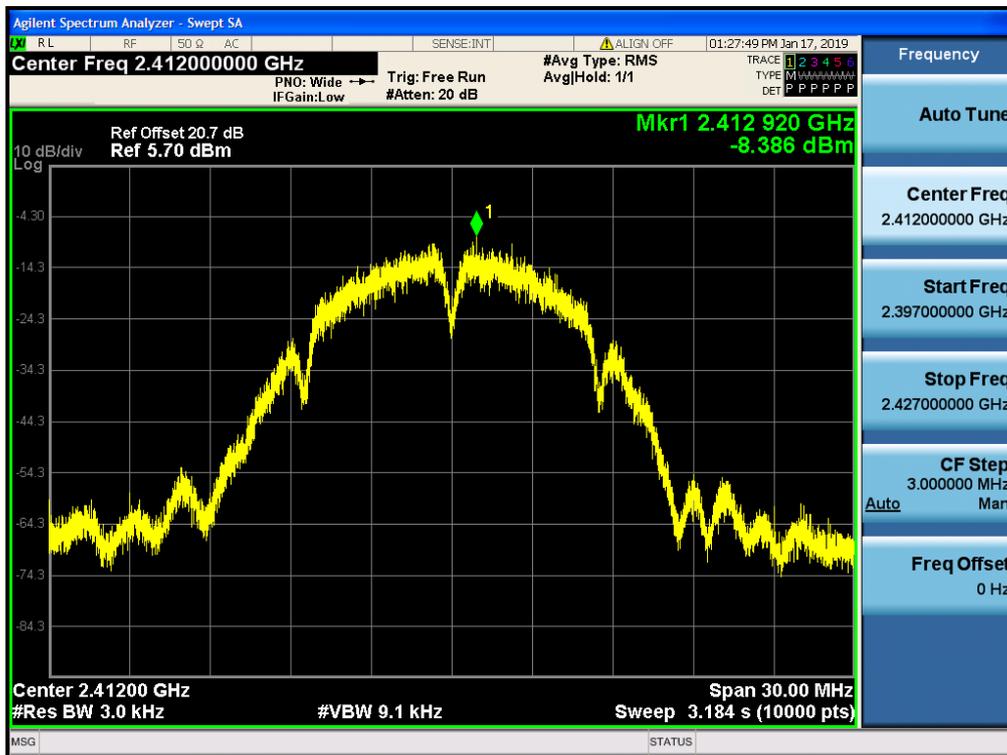

Power Spectral Density (802.11g-CH 6)



Power Spectral Density (802.11n_HT20 -CH 6)

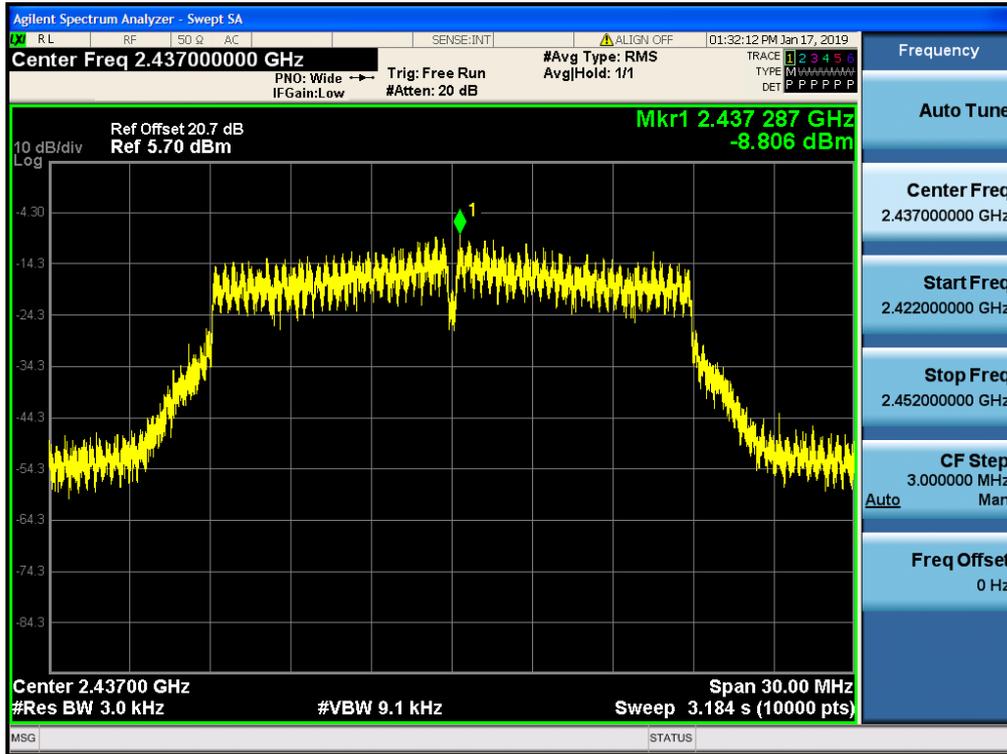

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.

[ANT2]


Mode	Frequency (MHz)	Channel No.	Test Result	
			PSD (dBm)	Limit (dBm)
802.11b	2412	1	-5.562	8
	2437	6	-4.494	8
	2462	11	-4.136	8
802.11g	2412	1	-12.000	8
	2437	6	-8.297	8
	2462	11	-8.382	8
802.11n (HT20)	2412	1	-11.781	8
	2437	6	-8.384	8
	2462	11	-11.157	8

Note :


1. Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.7 dB(Ant1) & 23.98 dB(Ant2) are offset for 2.4 GHz Band.

■ Test Plots


Power Spectral Density (802.11b-CH 11)

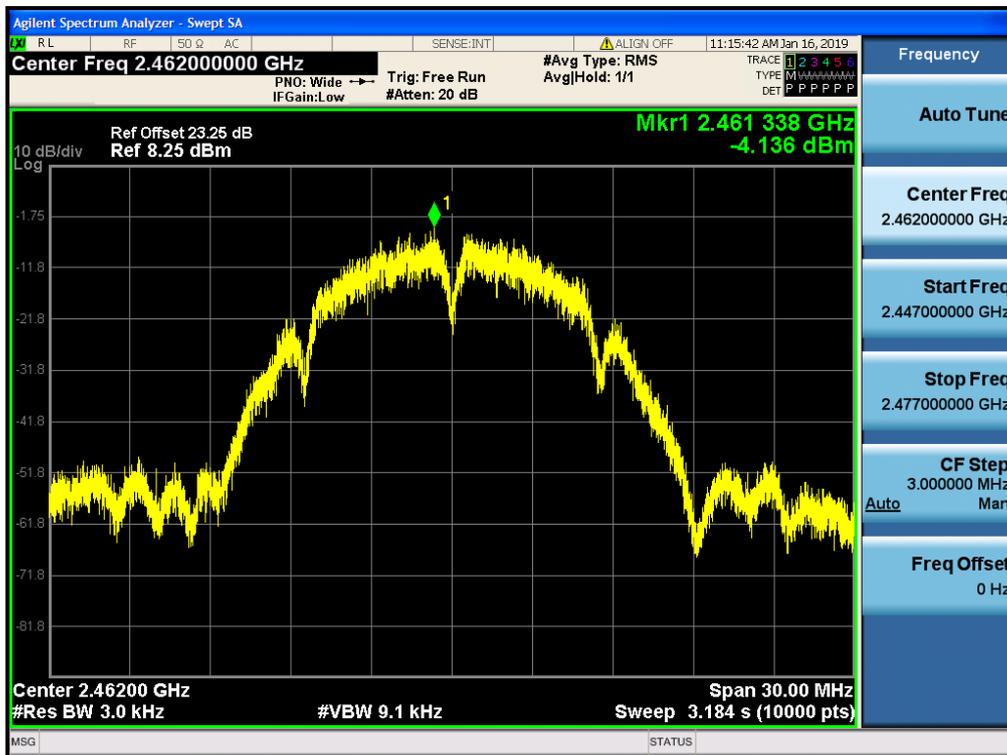

Power Spectral Density (802.11g-CH 6)

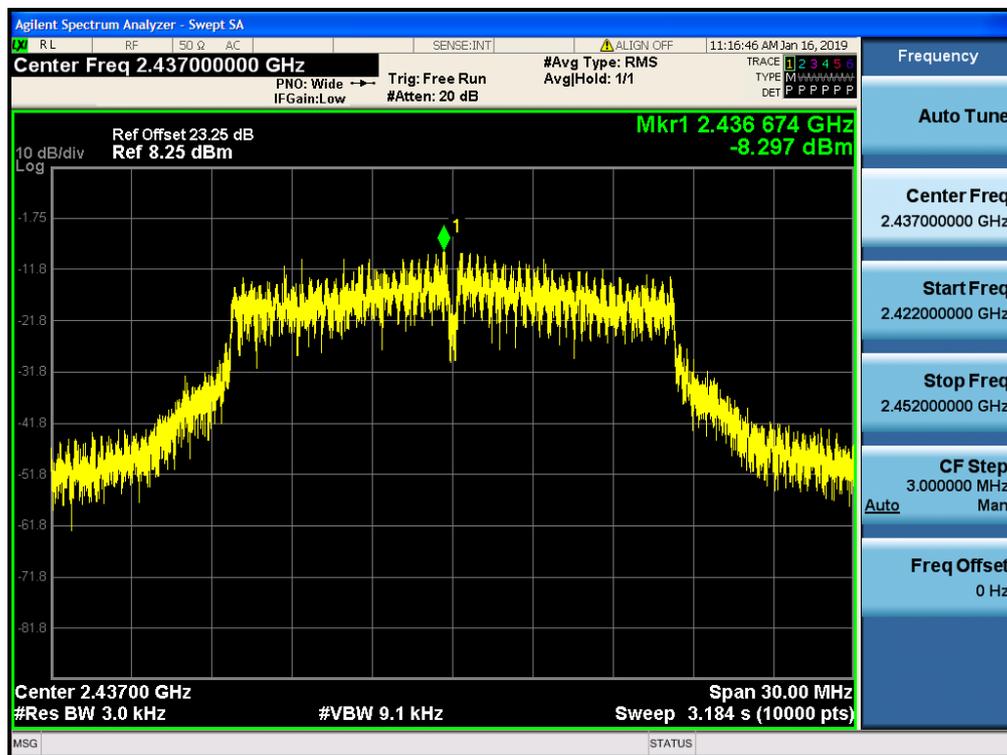

Power Spectral Density (802.11n_HT20 -CH 6)

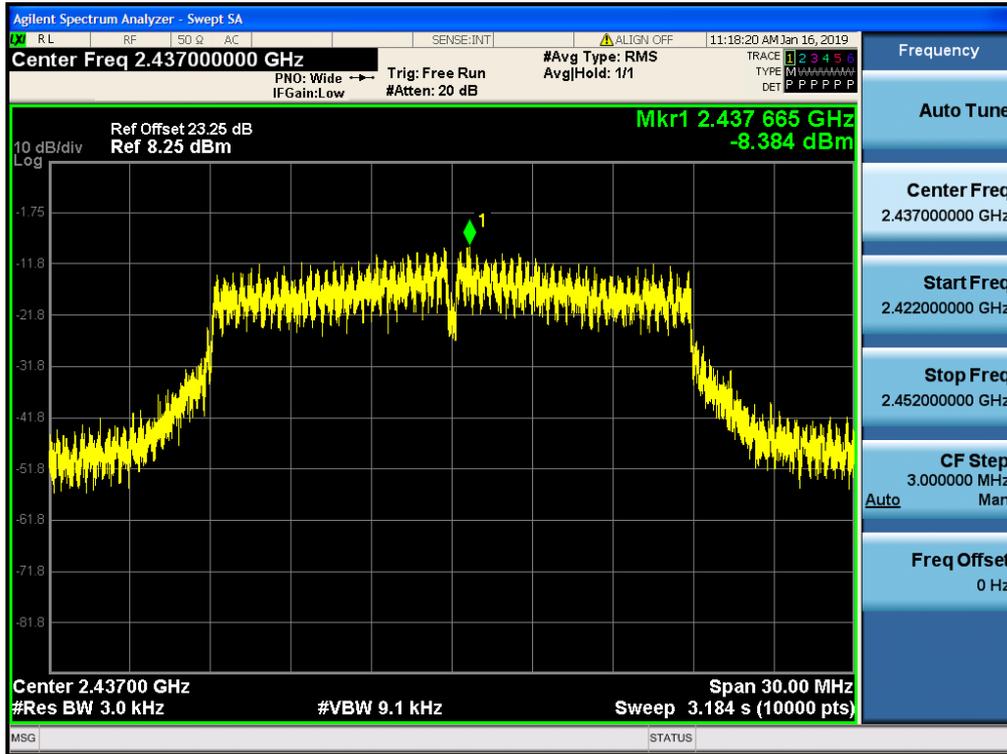

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.

[MIMO]

802.11n(HT20) Mode		Duty Cycle Factor (dB)	Measured PSD (dBm)	Measured PSD (dBm)	Total PSD (dBm)	Limit (dBm)
Frequency (MHz)	Channel		Ant1	Ant2	Ant1+2	
2412	1	1.027	-14.166	-15.573	-10.776	8.00
2437	6	1.027	-9.306	-8.431	-4.810	8.00
2462	11	1.027	-13.667	-11.795	-8.594	8.00

Note :

1. Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss + Exten Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.7 dB(Ant1) & 23.98 dB(Ant2) are offset for 2.4 GHz Band.

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS


Note:

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

■ Test Plots(BandEdge) [Ant1]


Band Edge (802.11b-CH1)

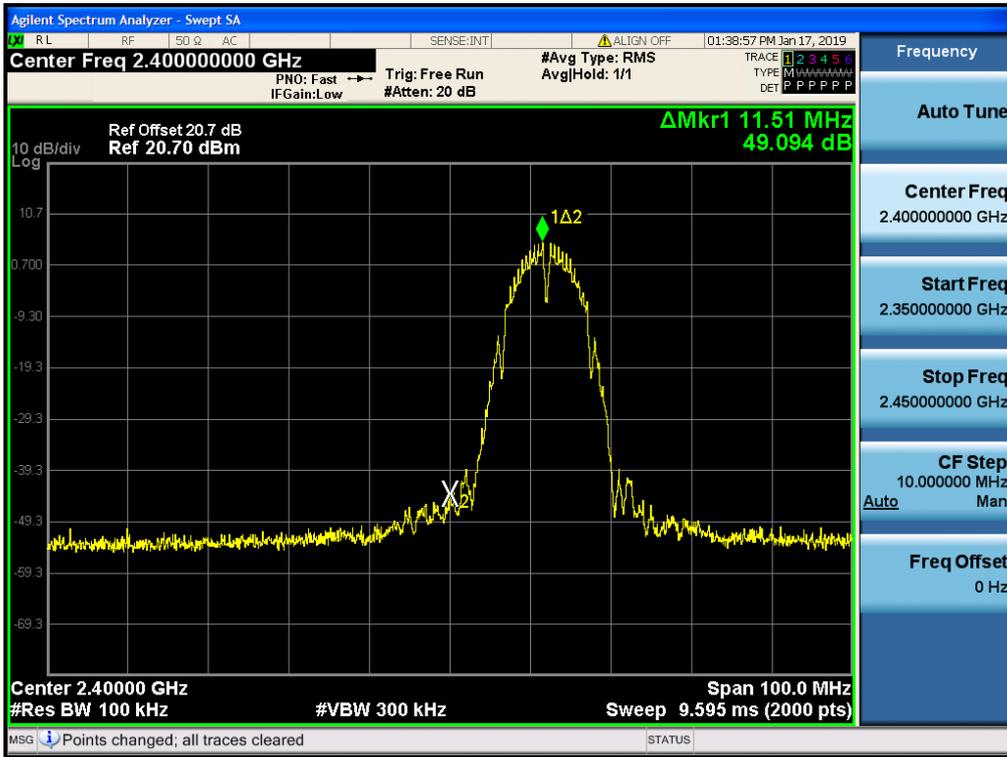


Band Edge (802.11b-CH11)

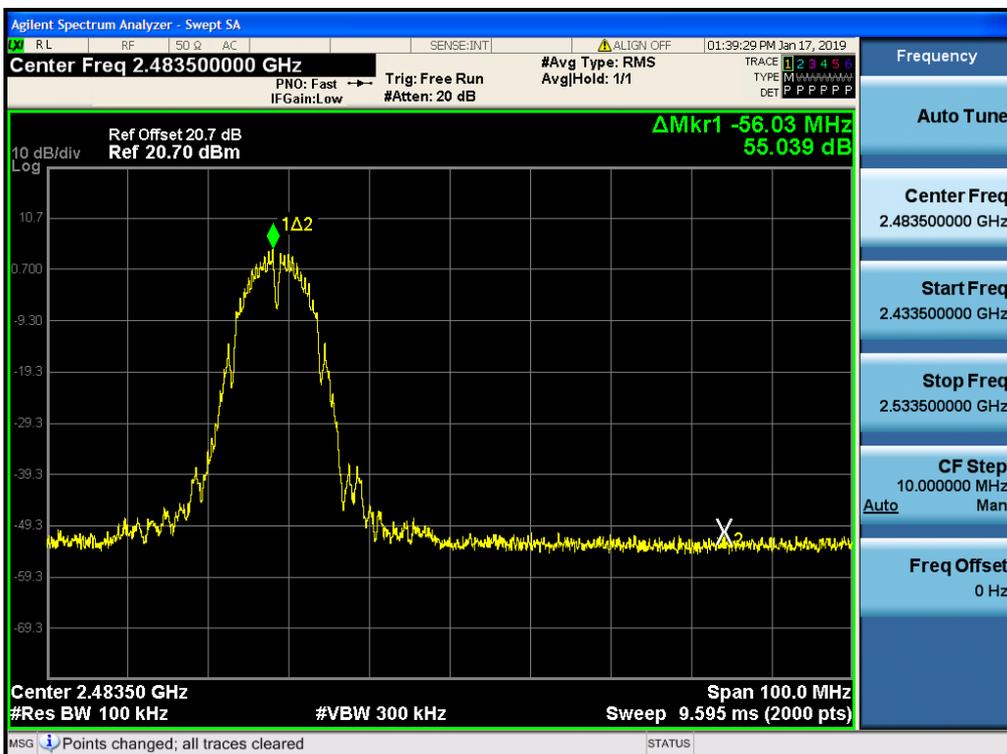


Band Edge (802.11g-CH1)

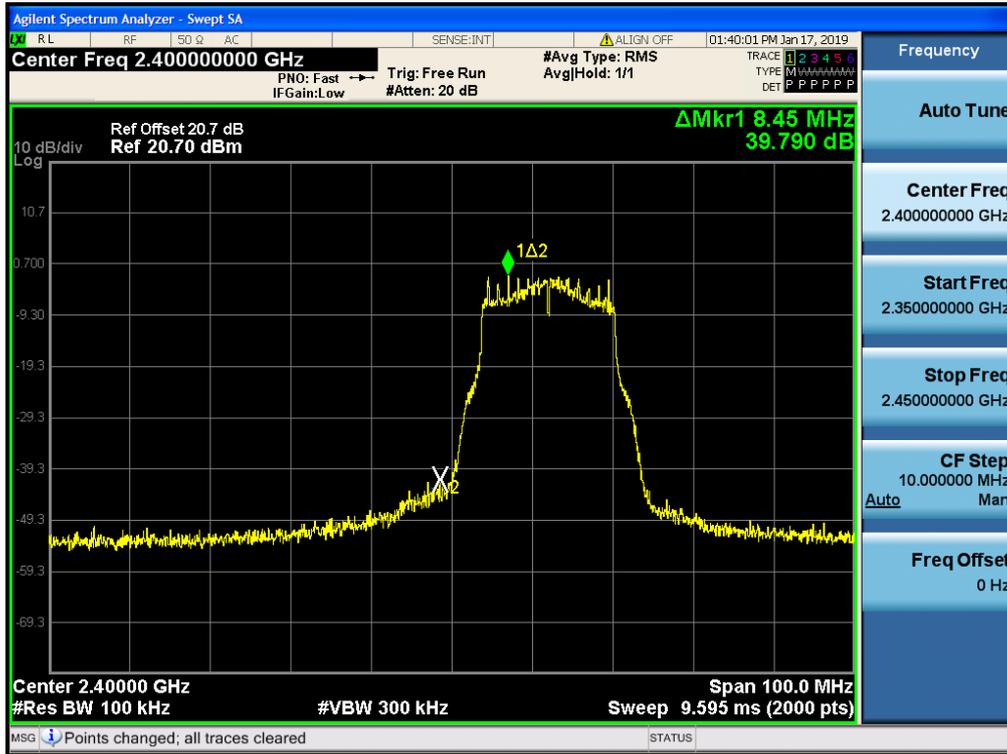


Band Edge (802.11g-CH11)

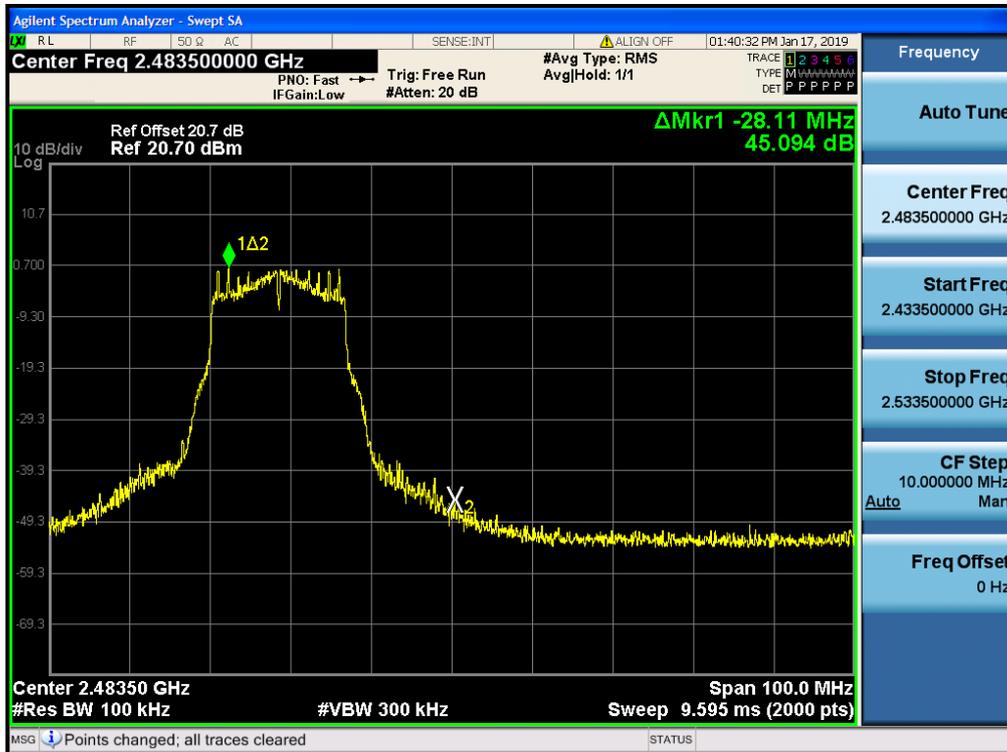

Band Edge (802.11n_HT20-CH1)

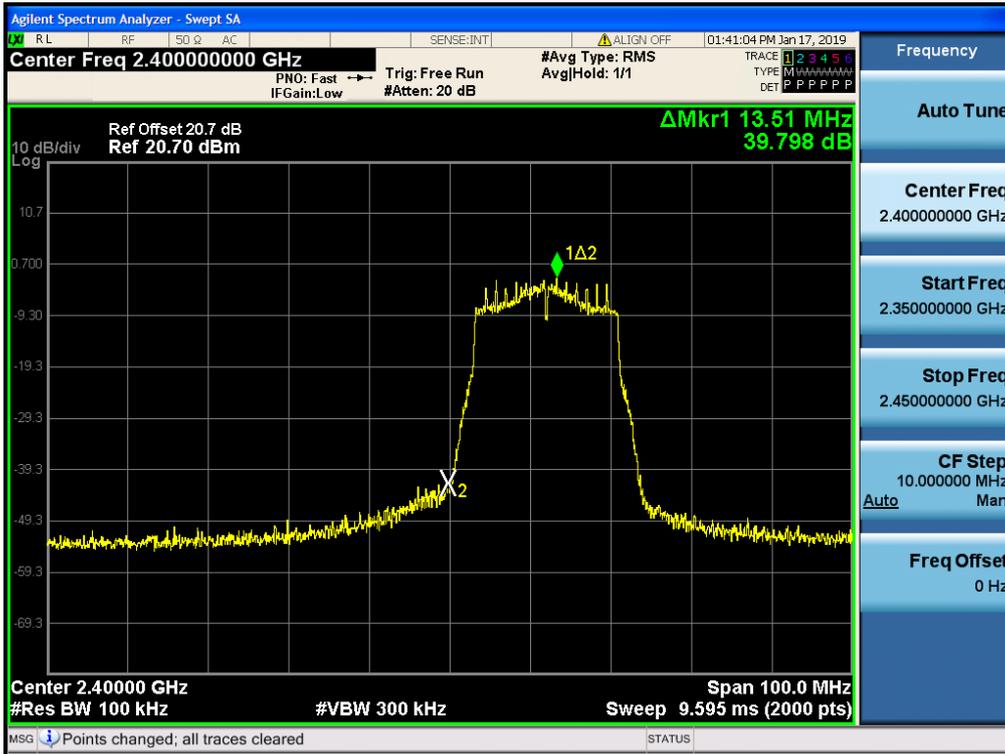


Band Edge (802.11n_HT20-CH11)

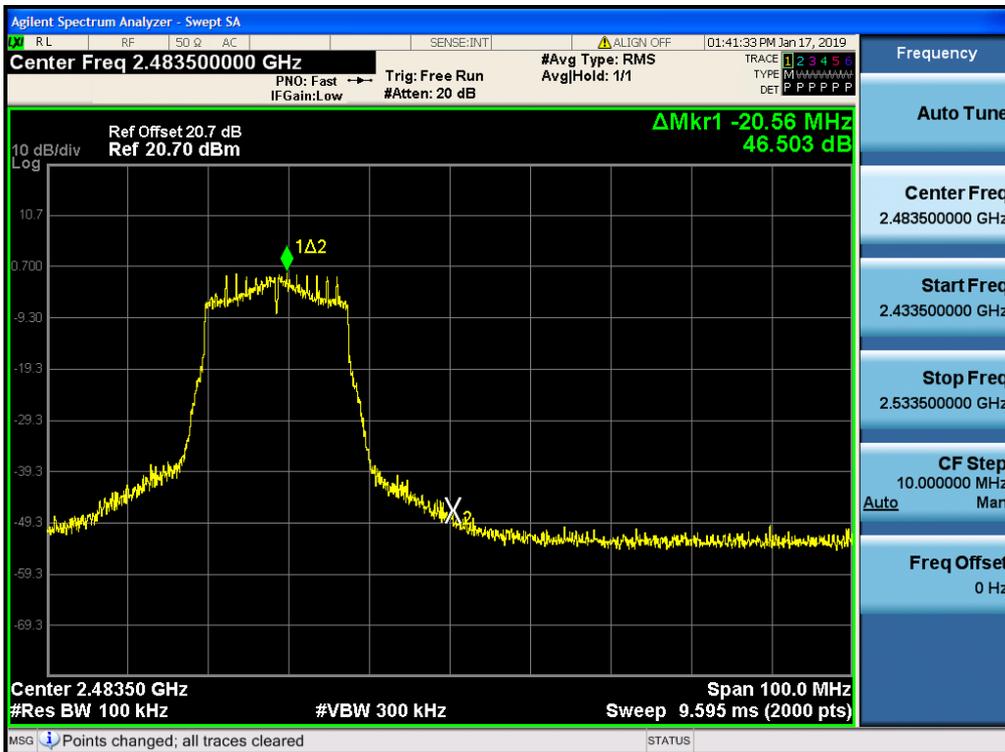

■ Test Plots(Conducted Spurious Emission) [Ant1]


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.1)

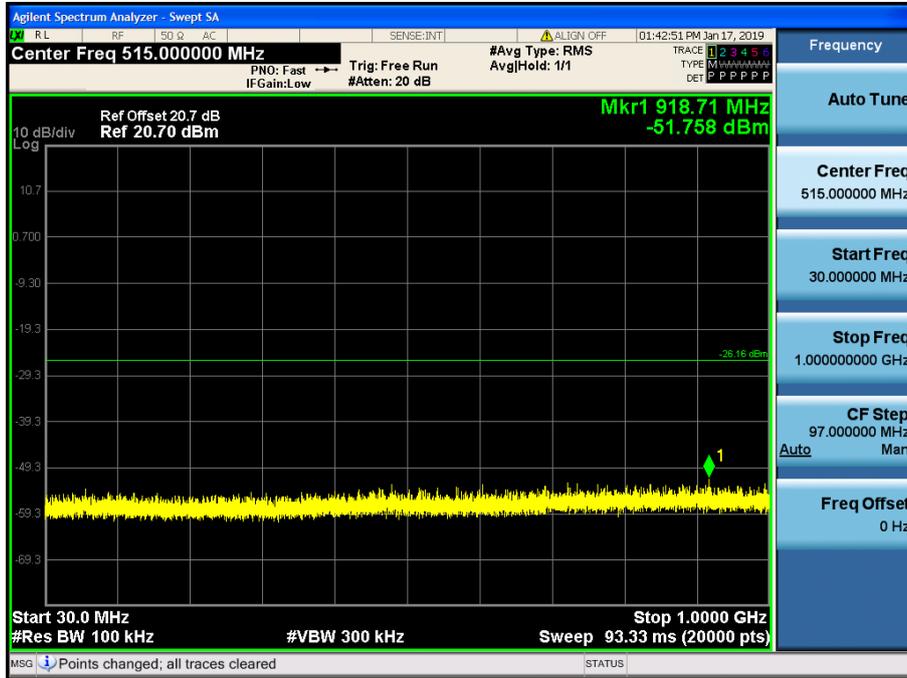


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.1)

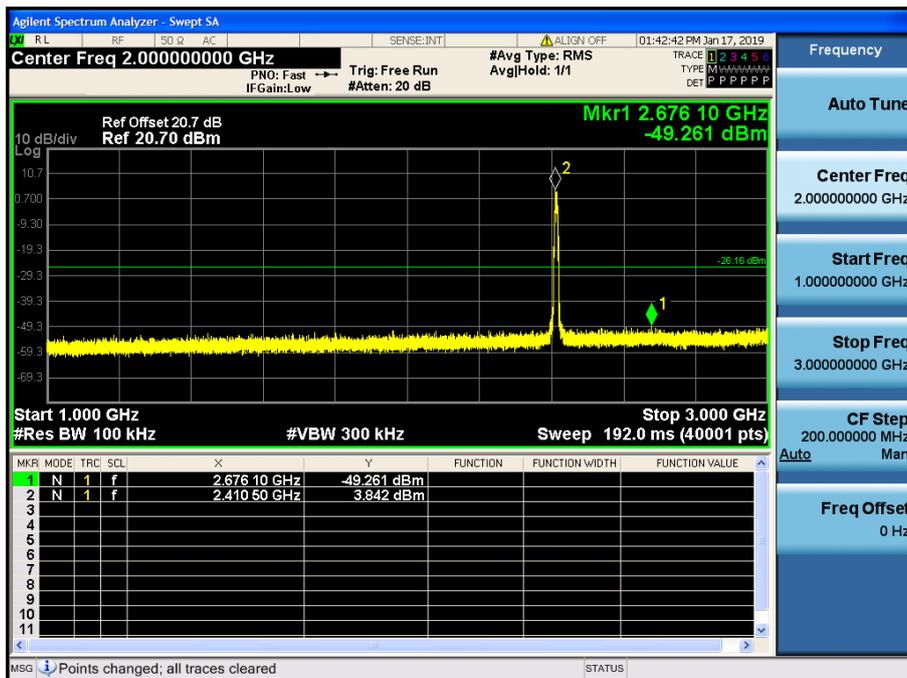


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.1)

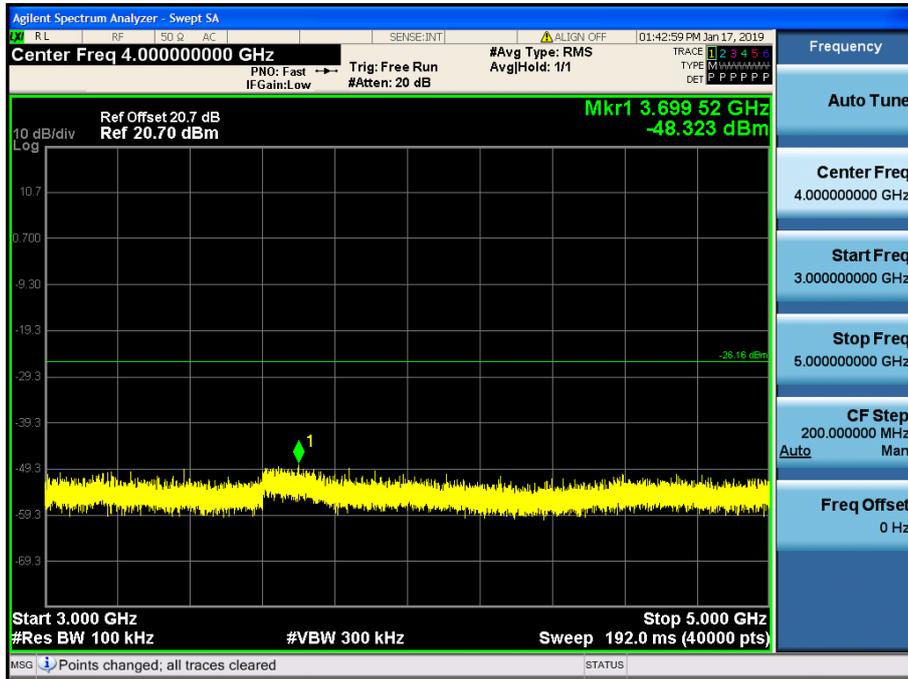


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.1)

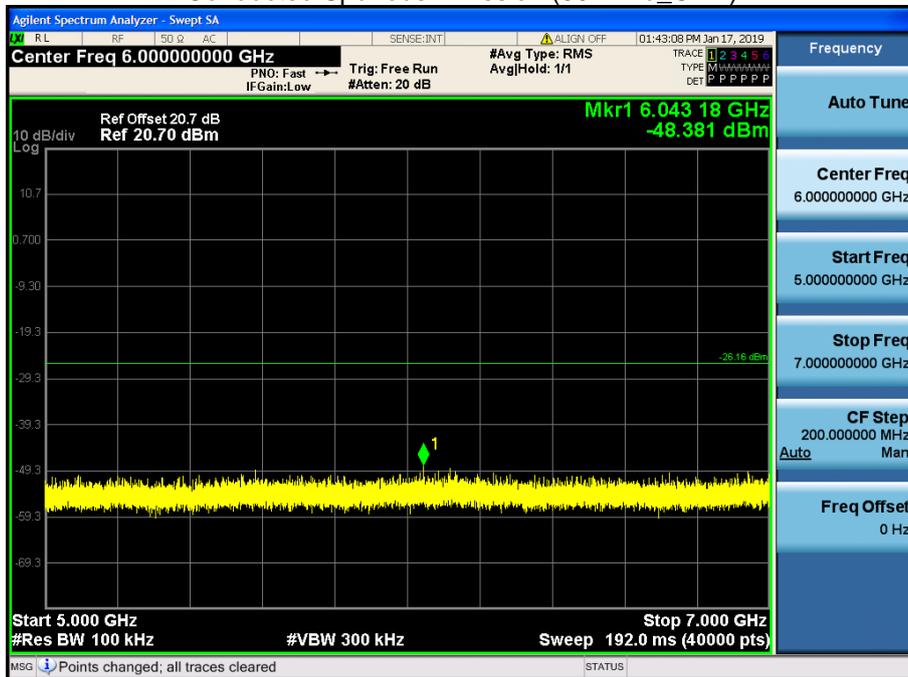


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.1)

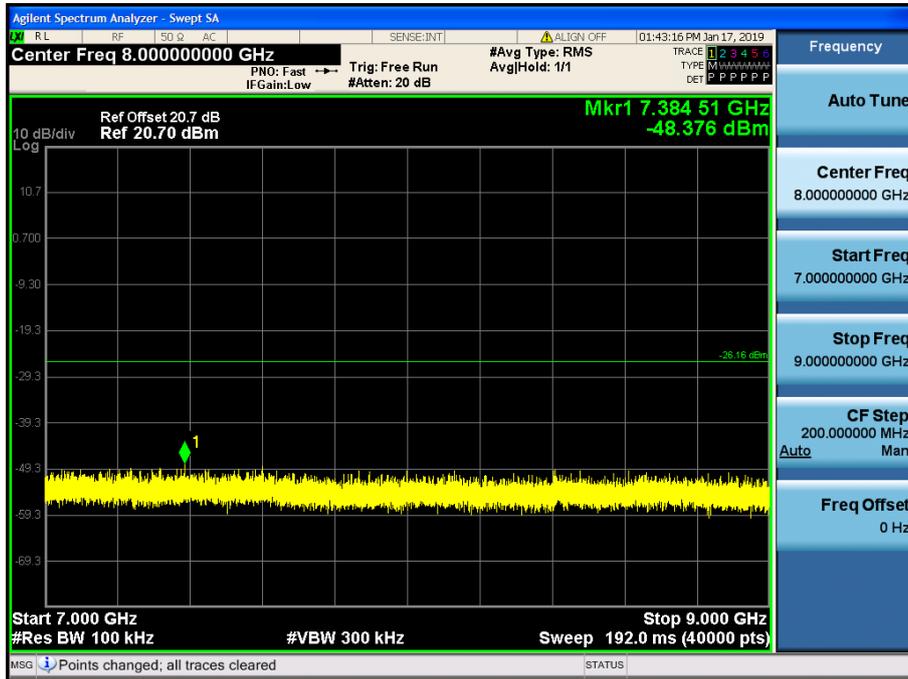


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.1)

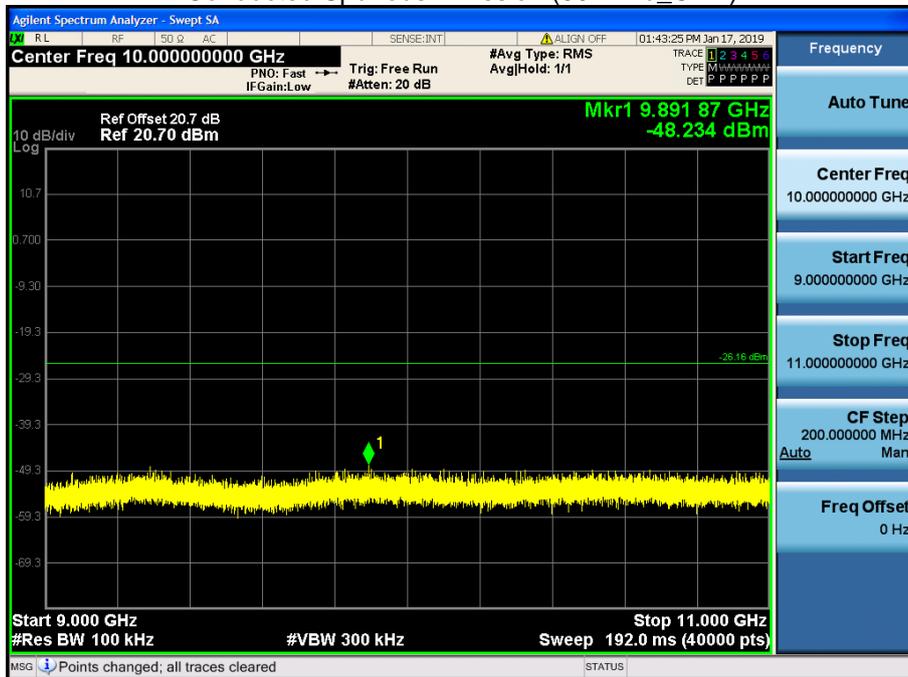


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.1)

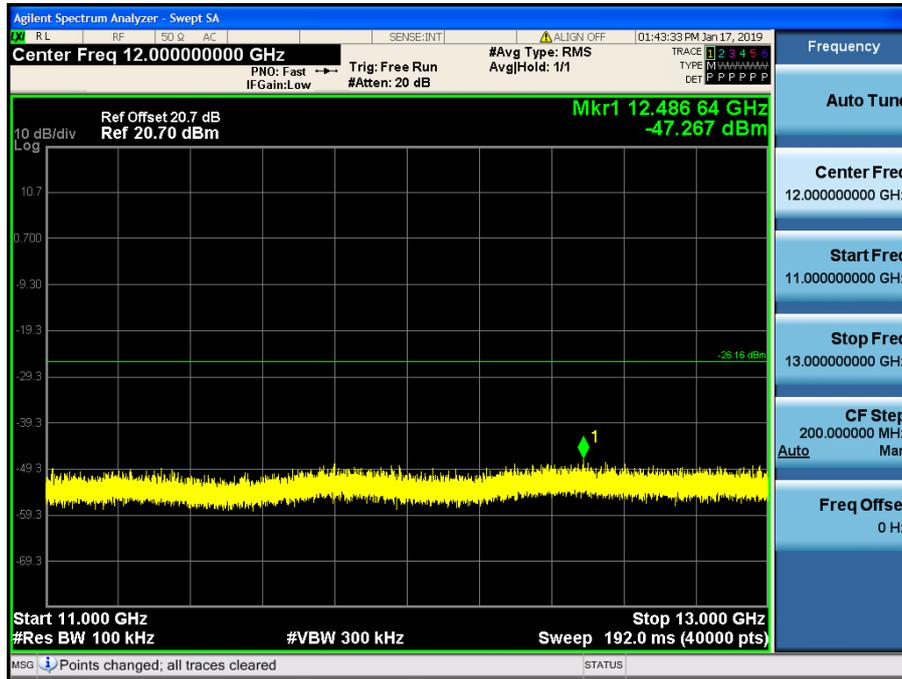


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.1)

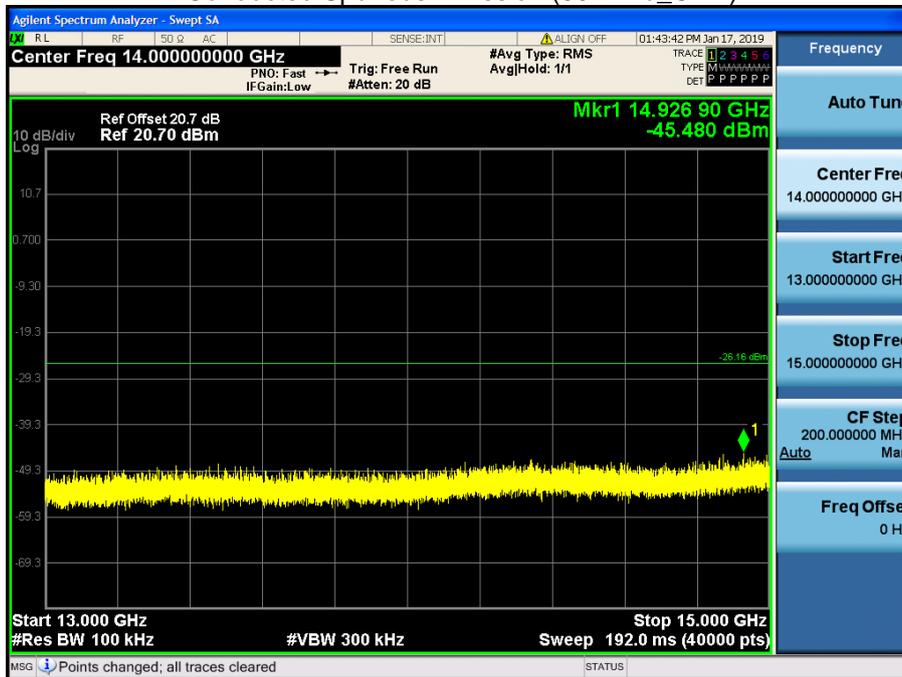


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.1)

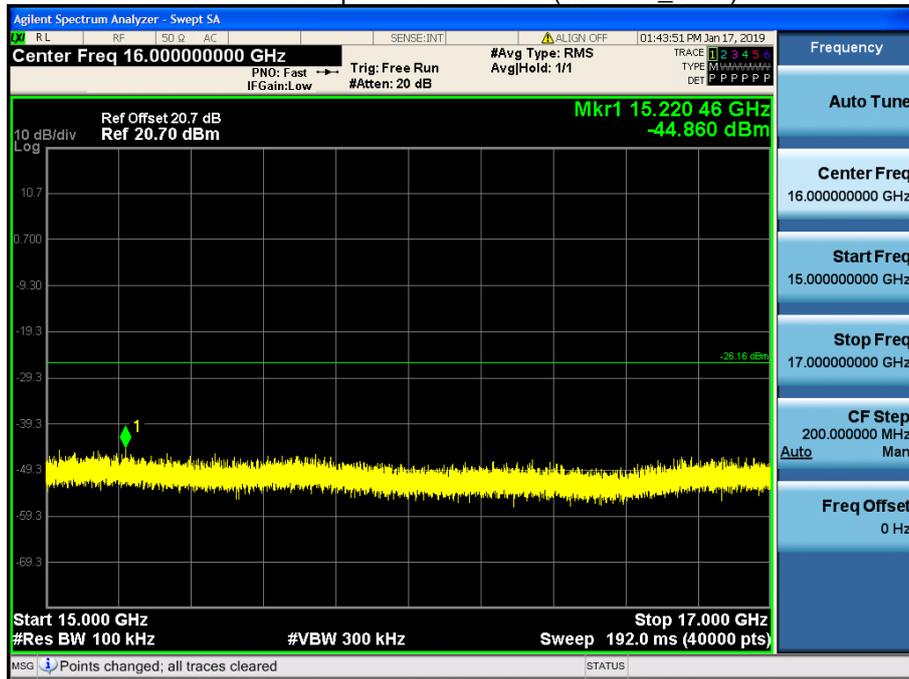


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.1)

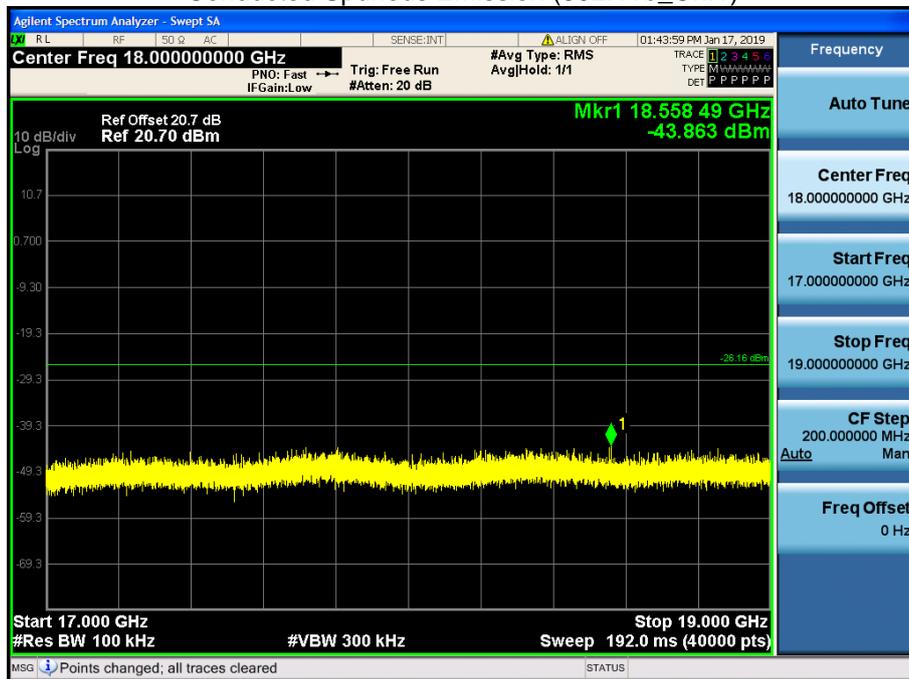


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.1)

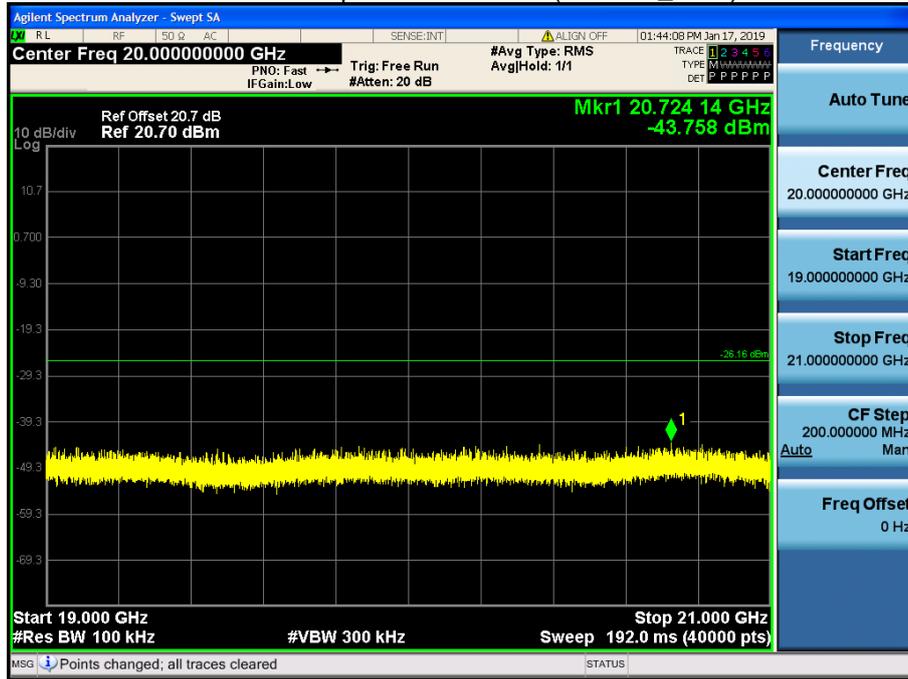


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.1)

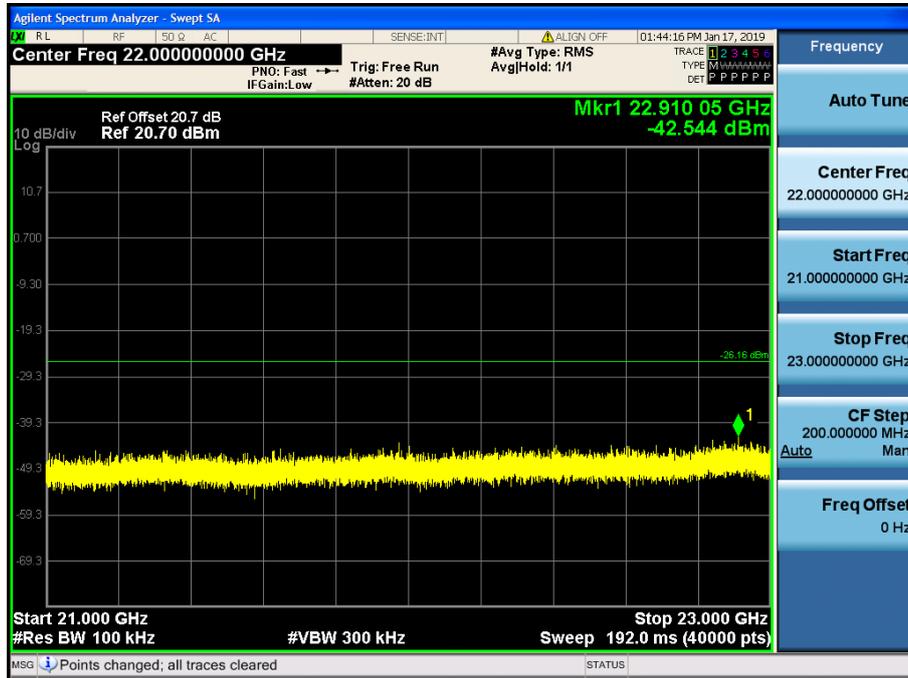


23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.1)

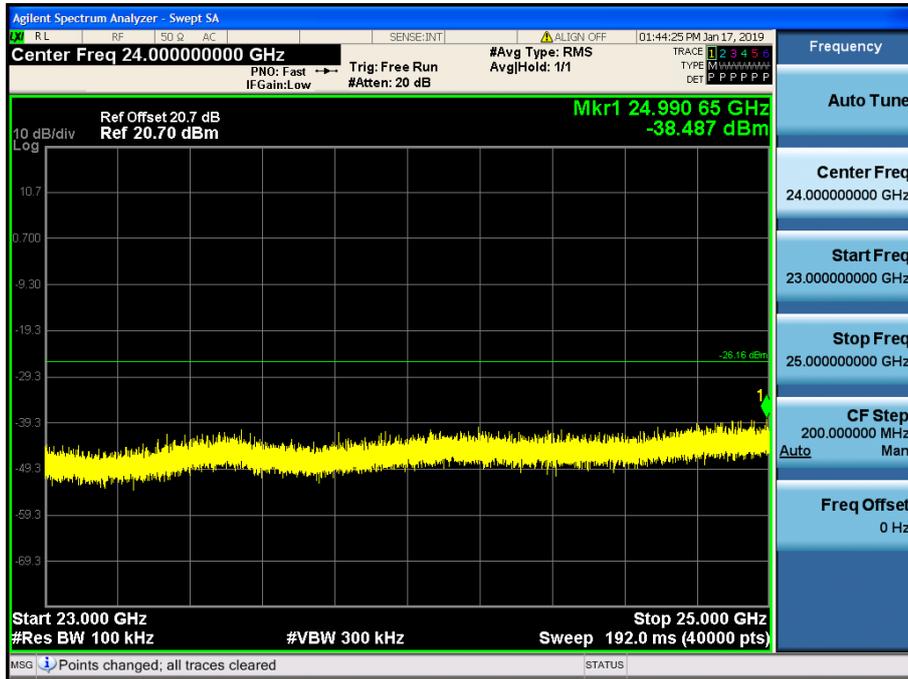

■ Test Plots(BandEdge) [Ant2]


Band Edge (802.11b-CH1)

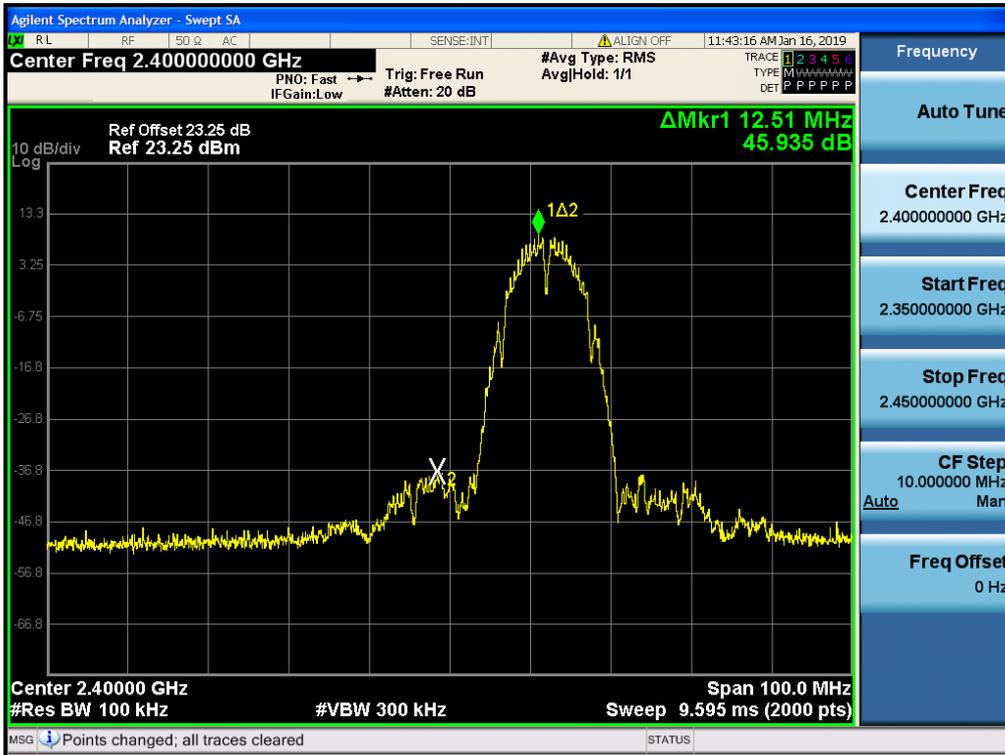


Band Edge (802.11b-CH11)




Band Edge (802.11g-CH1)

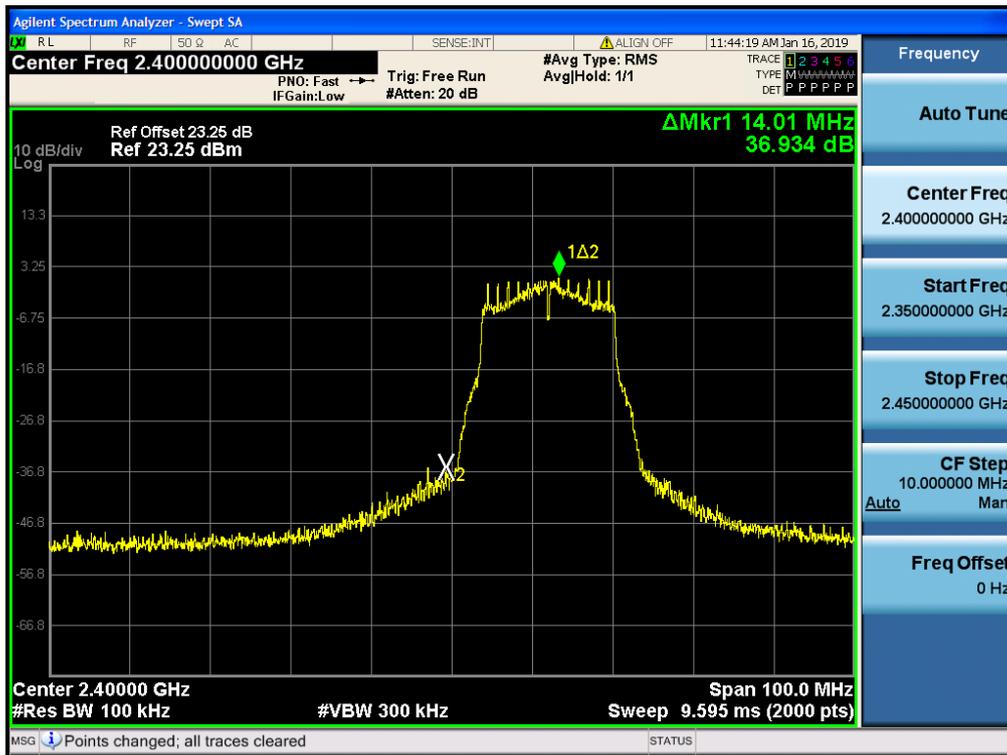


Band Edge (802.11g-CH11)

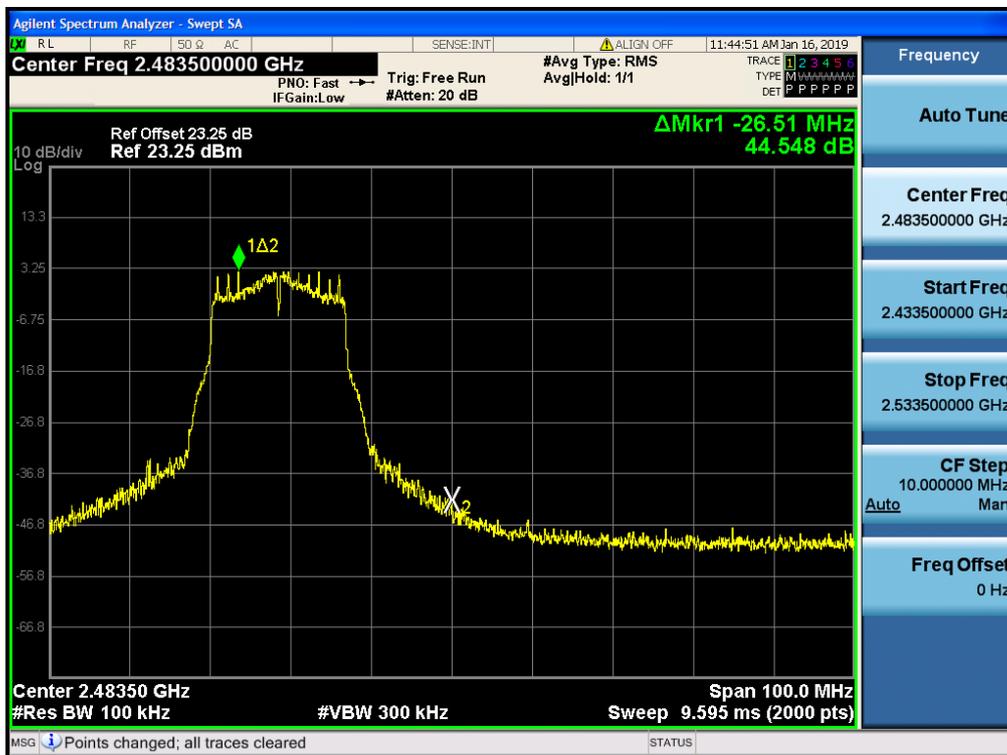

Band Edge (802.11n_HT20-CH1)

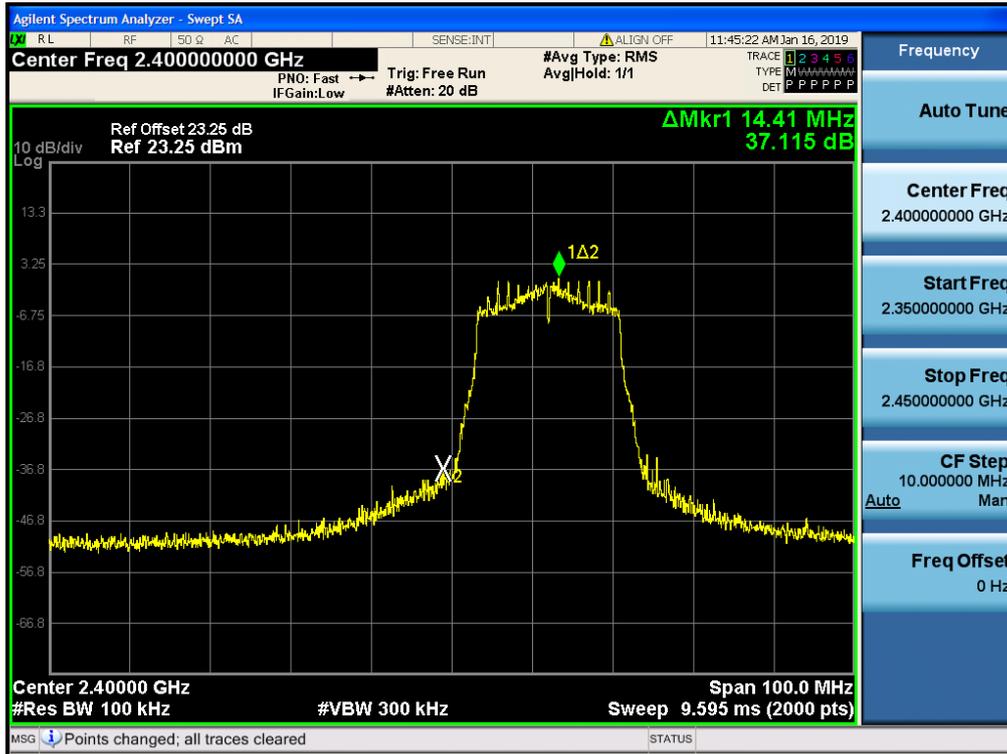


Band Edge (802.11n_HT20-CH11)

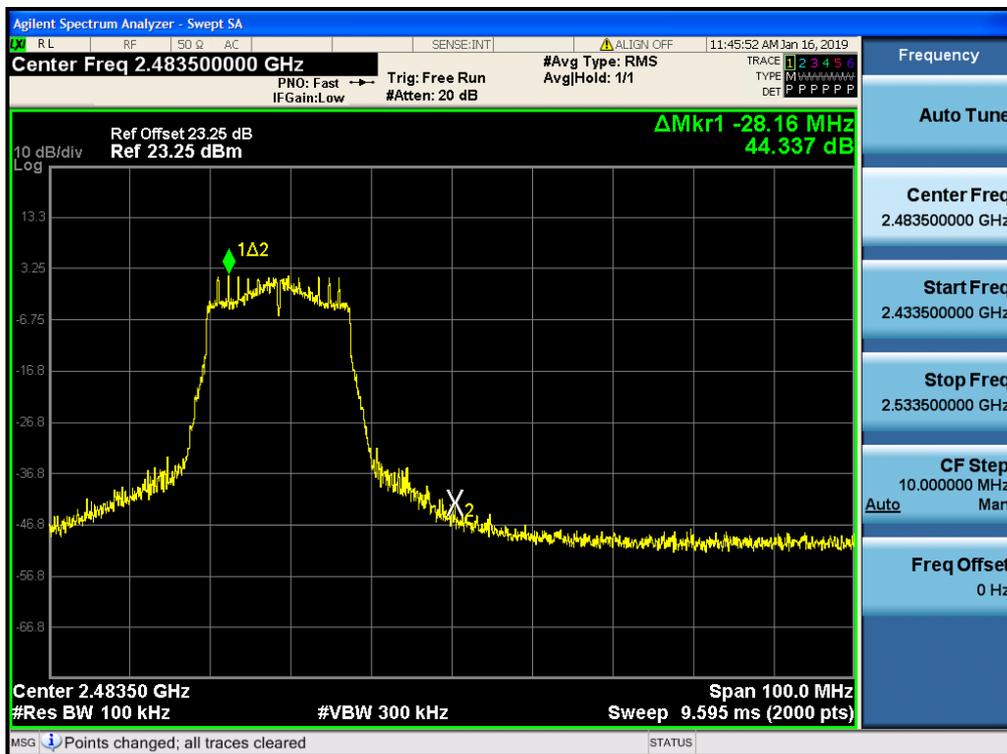

■ Test Plots(Conducted Spurious Emission) [Ant2]


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.11)

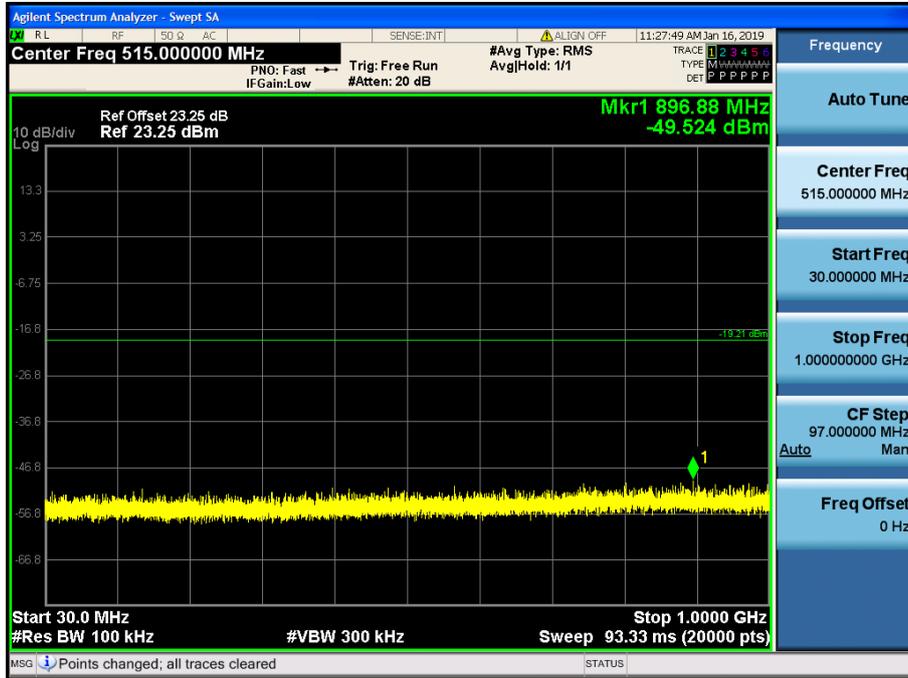


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.11)

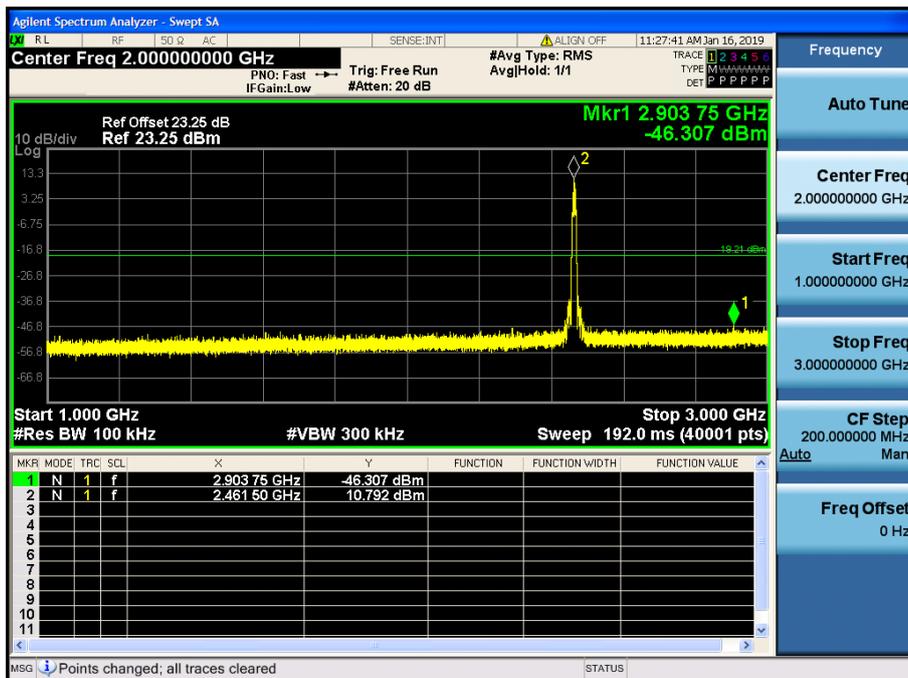


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.11)

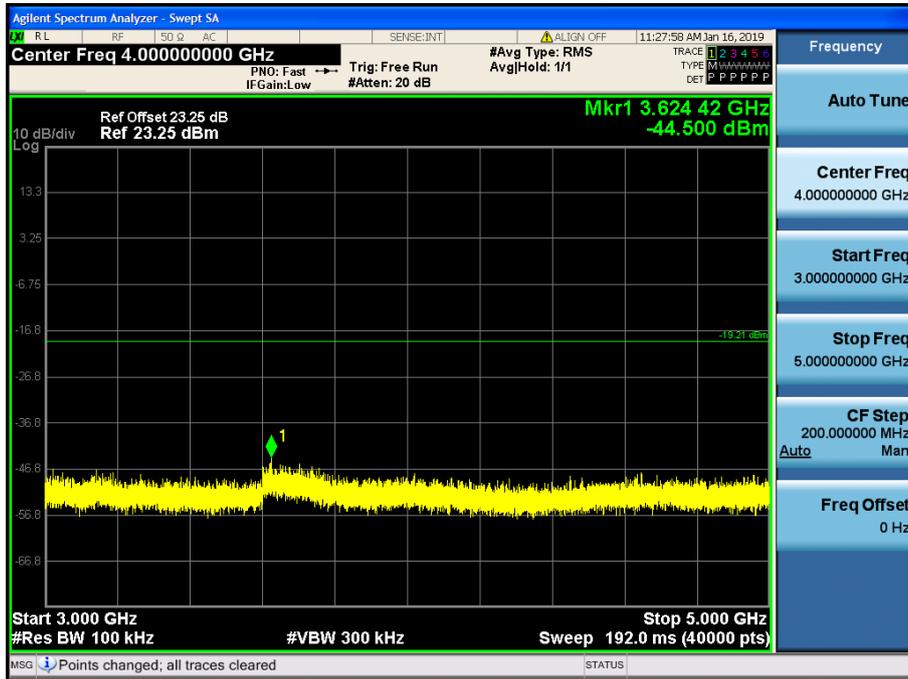


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.11)

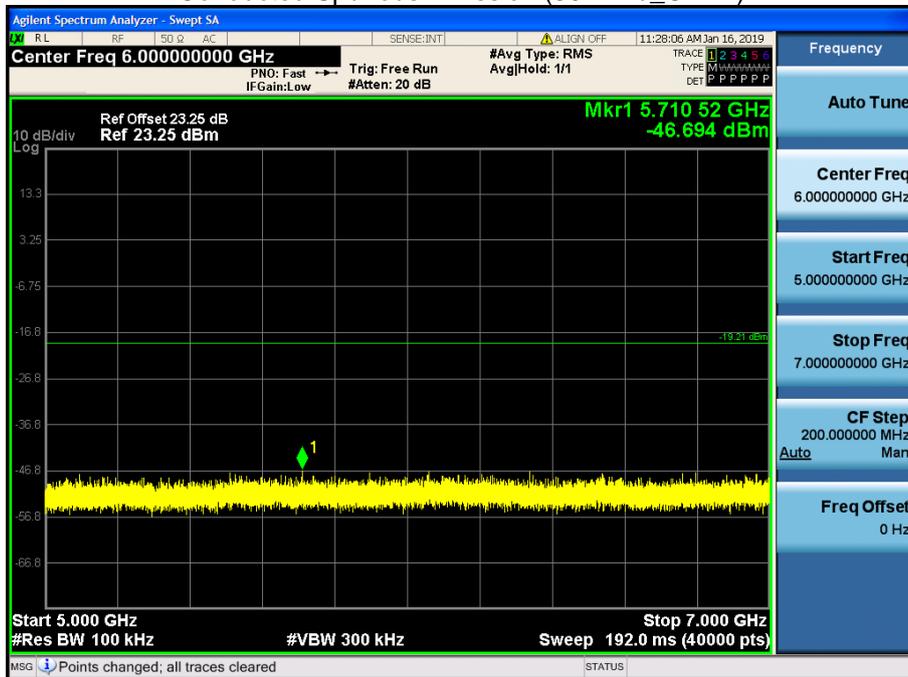


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.11)

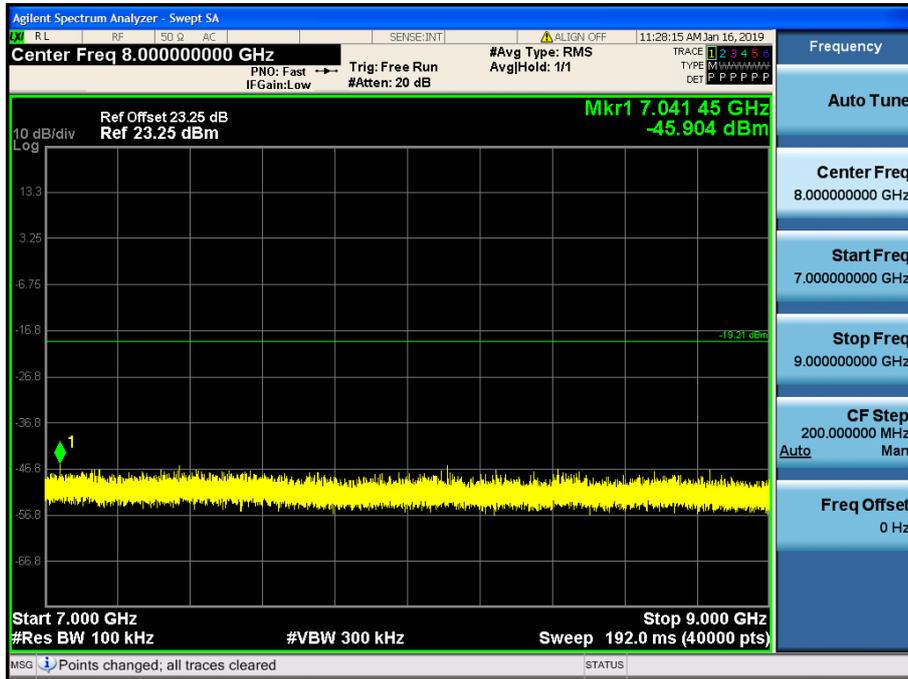


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.11)

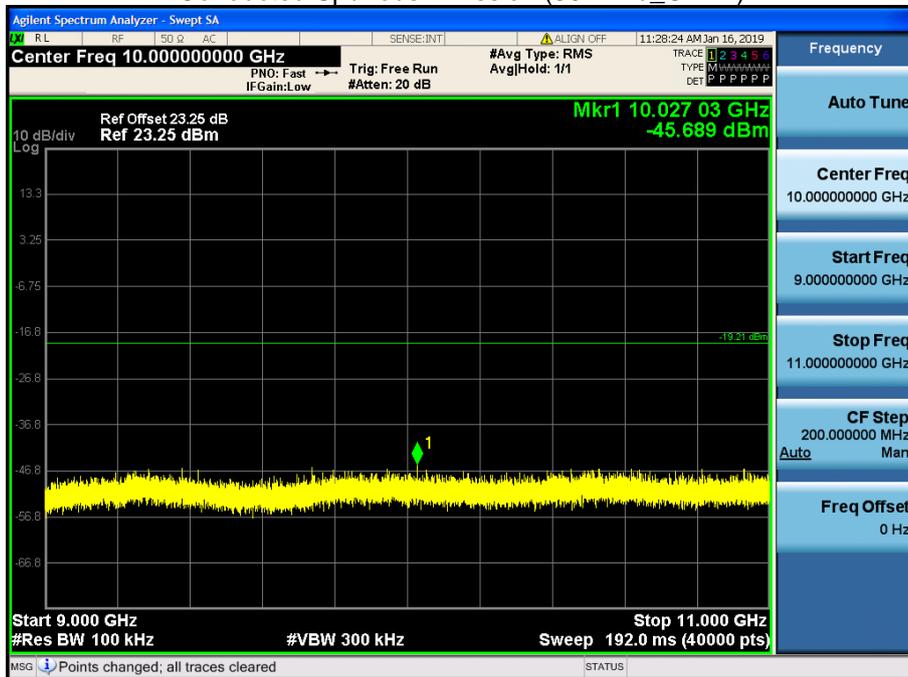


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.11)

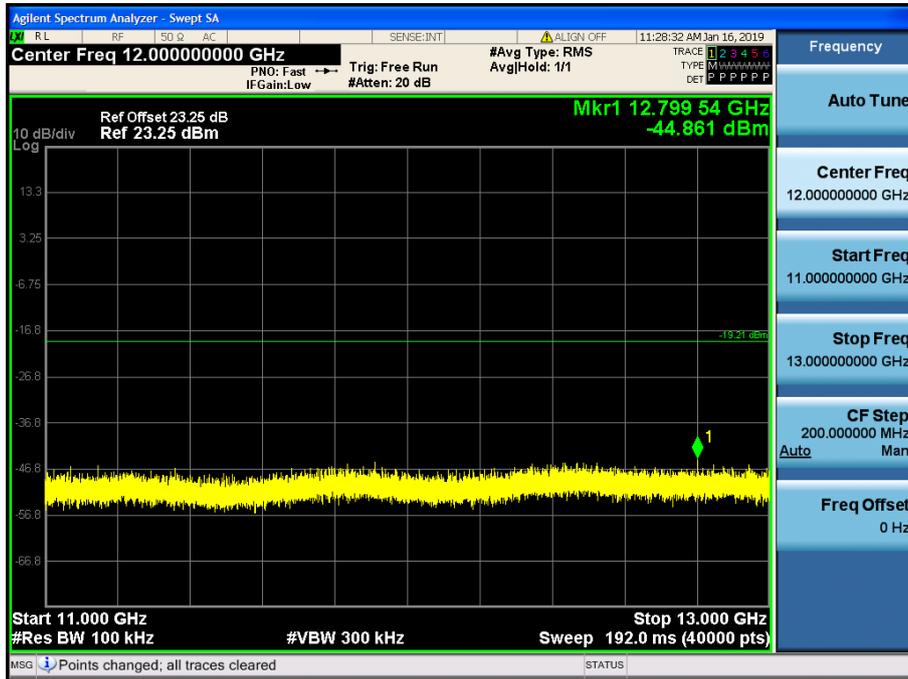


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.11)

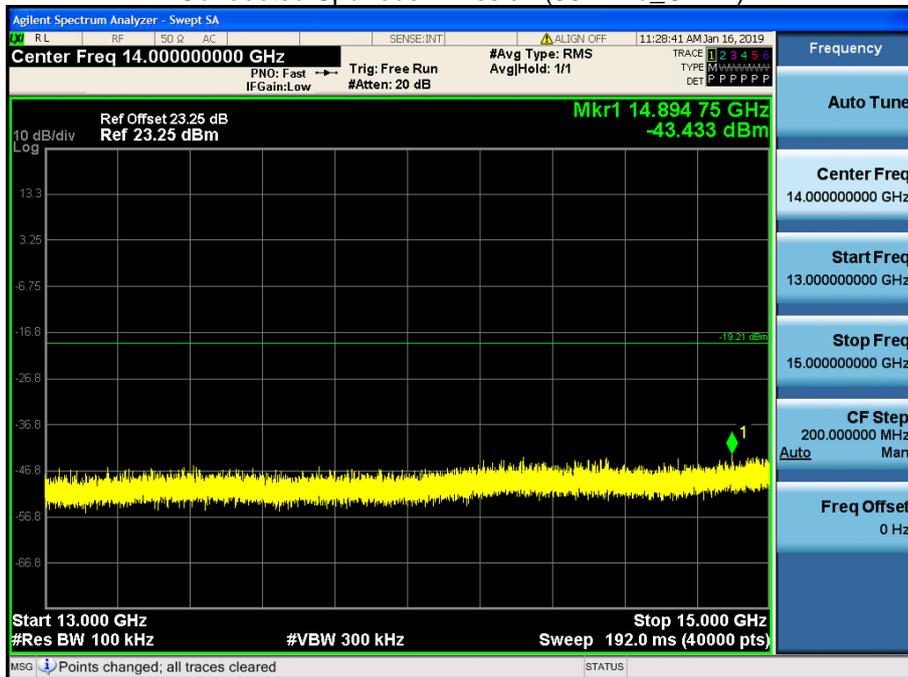


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.11)

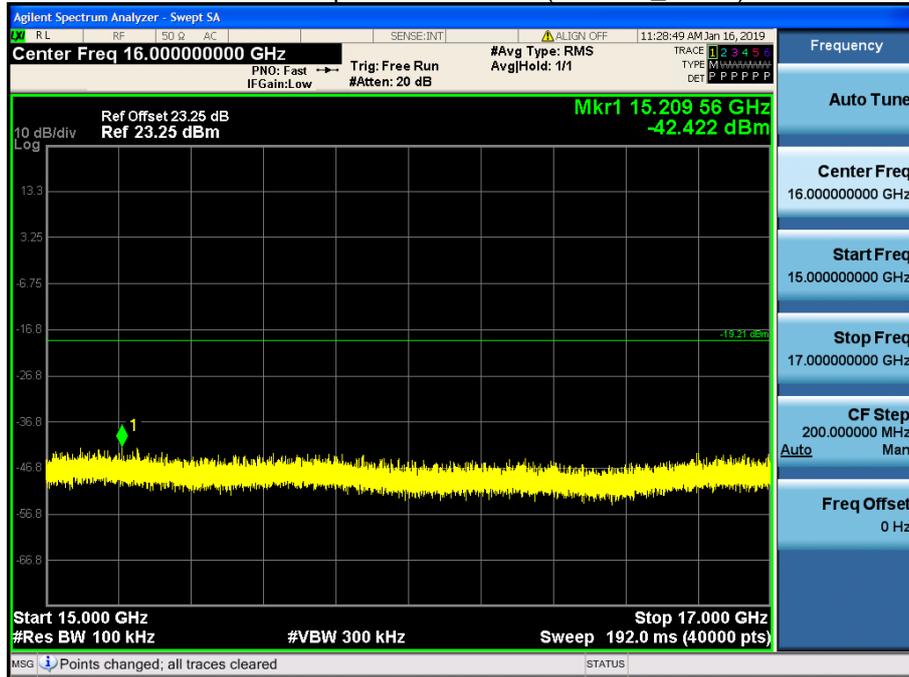


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.11)

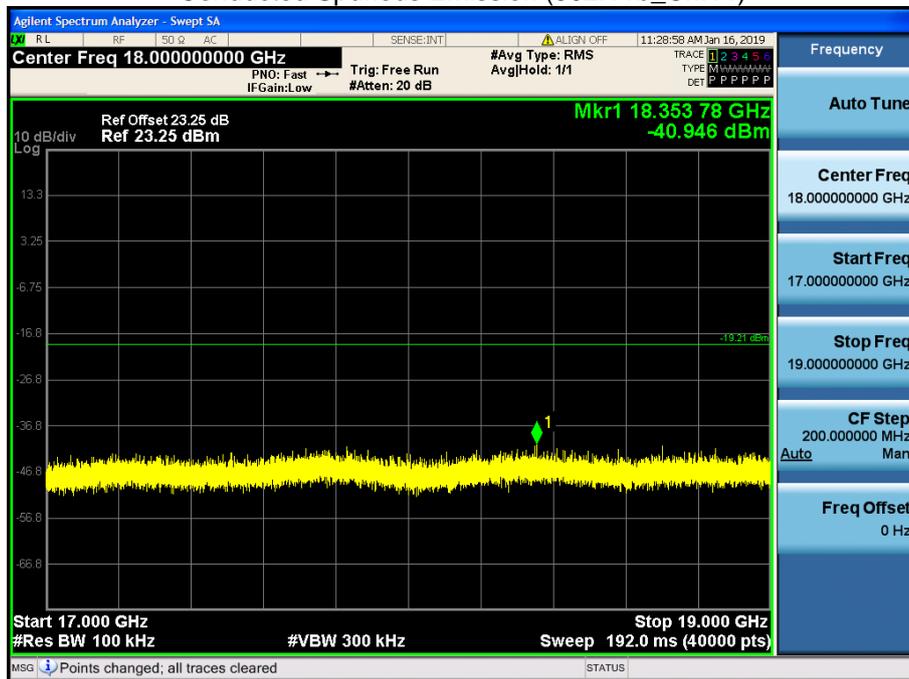


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.11)

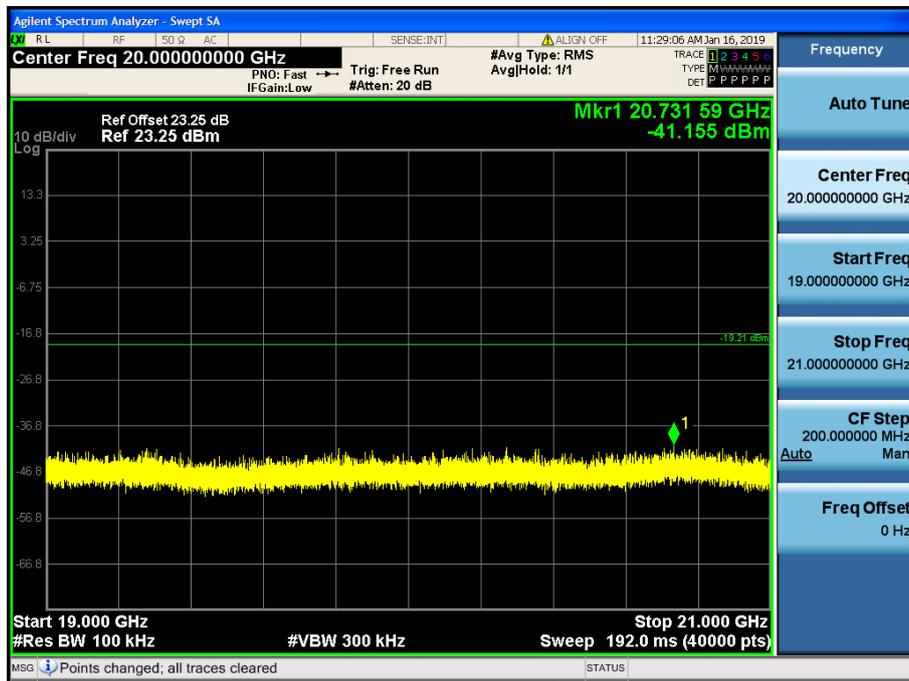

21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.11)

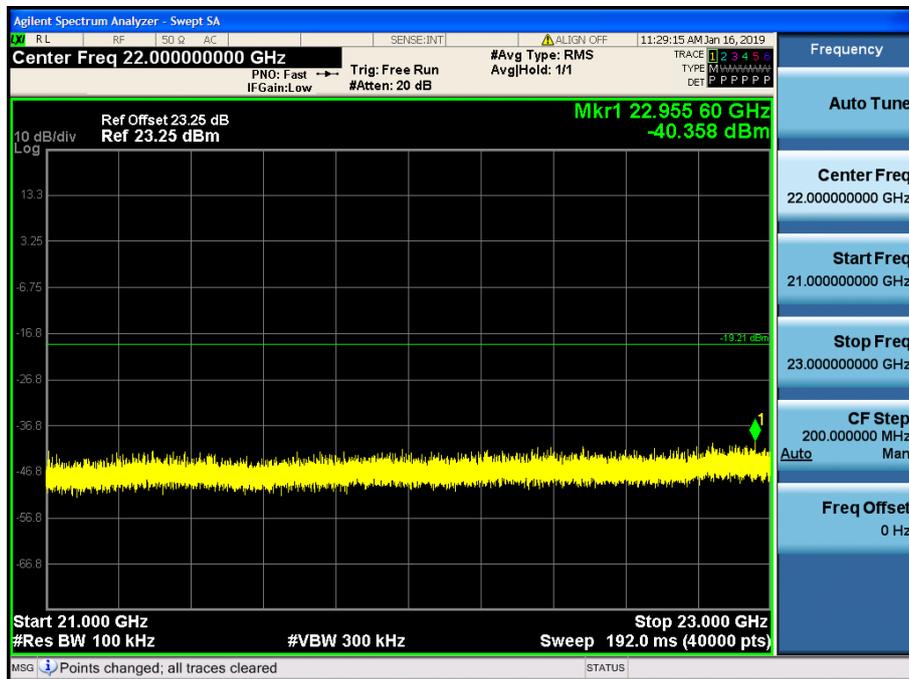

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.11)



9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \cdot \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. The test results for below 30 MHz is correlated to an open site.
The result on OATS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

[Ant1]

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	49.97	1.95	V	51.92	73.98	22.06	PK
4824	38.64	1.95	V	40.59	53.98	13.39	AV
7236	51.52	9.86	V	61.38	73.98	12.60	PK
7236	40.90	9.86	V	50.76	53.98	3.22	AV
4824	50.44	1.95	H	52.39	73.98	21.59	PK
4824	39.09	1.95	H	41.04	53.98	12.94	AV
7236	50.79	9.86	H	60.65	73.98	13.33	PK
7236	39.75	9.86	H	49.61	53.98	4.37	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.87	0.000	1.95	V	52.82	73.98	21.16	PK
4824	38.86	0.301	1.95	V	41.11	53.98	12.87	AV
7236	50.37	0.000	9.86	V	60.23	73.98	13.75	PK
7236	38.27	0.301	9.86	V	48.43	53.98	5.55	AV
4824	49.88	0.000	1.95	H	51.83	73.98	22.15	PK
4824	38.85	0.301	1.95	H	41.10	53.98	12.88	AV
7236	50.11	0.000	9.86	H	59.97	73.98	14.01	PK
7236	37.64	0.301	9.86	H	47.80	53.98	6.18	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.37	0.000	1.95	V	52.32	73.98	21.66	PK
4824	38.83	0.321	1.95	V	41.10	53.98	12.88	AV
7236	49.97	0.000	9.86	V	59.83	73.98	14.15	PK
7236	38.26	0.321	9.86	V	48.44	53.98	5.54	AV
4824	50.17	0.000	1.95	H	52.12	73.98	21.86	PK
4824	37.65	0.321	1.95	H	39.92	53.98	14.06	AV
7236	49.90	0.000	9.86	H	59.76	73.98	14.22	PK
7236	38.07	0.321	9.86	H	48.25	53.98	5.73	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	51.24	2.33	V	53.57	73.98	20.41	PK
4874	39.05	2.33	V	41.38	53.98	12.60	AV
7311	52.27	10.14	V	62.41	73.98	11.57	PK
7311	40.45	10.14	V	50.59	53.98	3.39	AV
4874	50.48	2.33	H	52.81	73.98	21.17	PK
4874	38.99	2.33	H	41.32	53.98	12.66	AV
7311	51.23	10.14	H	61.37	73.98	12.61	PK
7311	39.57	10.14	H	49.71	53.98	4.27	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.77	0.000	2.33	V	53.10	73.98	20.88	PK
4874	38.82	0.301	2.33	V	41.45	53.98	12.53	AV
7311	52.57	0.000	10.14	V	62.71	73.98	11.27	PK
7311	40.09	0.301	10.14	V	50.53	53.98	3.45	AV
4874	50.25	0.000	2.33	H	52.58	73.98	21.40	PK
4874	38.52	0.301	2.33	H	41.15	53.98	12.83	AV
7311	52.23	0.000	10.14	H	62.37	73.98	11.61	PK
7311	39.68	0.301	10.14	H	50.12	53.98	3.86	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.71	0.000	2.33	V	53.04	73.98	20.94	PK
4874	39.00	0.321	2.33	V	41.65	53.98	12.33	AV
7311	52.16	0.000	10.14	V	62.30	73.98	11.68	PK
7311	39.83	0.321	10.14	V	50.29	53.98	3.69	AV
4874	49.27	0.000	2.33	H	51.60	73.98	22.38	PK
4874	38.86	0.321	2.33	H	41.51	53.98	12.47	AV
7311	51.48	0.000	10.14	H	61.62	73.98	12.36	PK
7311	39.76	0.321	10.14	H	50.22	53.98	3.76	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	50.44	2.28	V	52.72	73.98	21.26	PK
4924	38.32	2.28	V	40.60	53.98	13.38	AV
7386	50.84	9.81	V	60.65	73.98	13.33	PK
7386	39.16	9.81	V	48.97	53.98	5.01	AV
4924	49.98	2.28	H	52.26	73.98	21.72	PK
4924	38.02	2.28	H	40.30	53.98	13.68	AV
7386	49.47	9.81	H	59.28	73.98	14.70	PK
7386	38.74	9.81	H	48.55	53.98	5.43	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	50.32	0.000	2.28	V	52.60	73.98	21.38	PK
4924	38.22	0.301	2.28	V	40.80	53.98	13.18	AV
7386	50.23	0.000	9.81	V	60.04	73.98	13.94	PK
7386	37.66	0.301	9.81	V	47.77	53.98	6.21	AV
4924	49.78	0.000	2.28	H	52.06	73.98	21.92	PK
4924	38.12	0.301	2.28	H	40.70	53.98	13.28	AV
7386	49.90	0.000	9.81	H	59.71	73.98	14.27	PK
7386	36.88	0.301	9.81	H	46.99	53.98	6.99	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	50.88	0.000	2.28	V	53.16	73.98	20.82	PK
4924	38.05	0.321	2.28	V	40.65	53.98	13.33	AV
7386	49.23	0.000	9.81	V	59.04	73.98	14.94	PK
7386	37.07	0.321	9.81	V	47.20	53.98	6.78	AV
4924	50.07	0.000	2.28	H	52.35	73.98	21.63	PK
4924	37.89	0.321	2.28	H	40.49	53.98	13.49	AV
7386	48.44	0.000	9.81	H	58.25	73.98	15.73	PK
7386	36.99	0.321	9.81	H	47.12	53.98	6.86	AV

[Ant2]

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.03	1.95	V	51.98	73.98	22.00	PK
4824	37.56	1.95	V	39.51	53.98	14.47	AV
7236	49.88	9.86	V	59.74	73.98	14.24	PK
7236	37.41	9.86	V	47.27	53.98	6.71	AV
4824	51.05	1.95	H	53.00	73.98	20.98	PK
4824	38.74	1.95	H	40.69	53.98	13.29	AV
7236	50.78	9.86	H	60.64	73.98	13.34	PK
7236	37.55	9.86	H	47.41	53.98	6.57	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.64	0.000	1.95	V	52.59	73.98	21.39	PK
4824	38.77	0.301	1.95	V	41.02	53.98	12.96	AV
7236	50.18	0.000	9.86	V	60.04	73.98	13.94	PK
7236	38.09	0.301	9.86	V	48.25	53.98	5.73	AV
4824	50.48	0.000	1.95	H	52.43	73.98	21.55	PK
4824	38.69	0.301	1.95	H	40.94	53.98	13.04	AV
7236	49.59	0.000	9.86	H	59.45	73.98	14.53	PK
7236	37.72	0.301	9.86	H	47.88	53.98	6.10	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	51.04	0.000	1.95	V	52.99	73.98	20.99	PK
4824	38.72	0.321	1.95	V	40.99	53.98	12.99	AV
7236	49.53	0.000	9.86	V	59.39	73.98	14.59	PK
7236	37.93	0.321	9.86	V	48.11	53.98	5.87	AV
4824	50.48	0.000	1.95	H	52.43	73.98	21.55	PK
4824	38.24	0.321	1.95	H	40.51	53.98	13.47	AV
7236	49.37	0.000	9.86	H	59.23	73.98	14.75	PK
7236	37.77	0.321	9.86	H	47.95	53.98	6.03	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.93	2.33	V	53.26	73.98	20.72	PK
4874	39.03	2.33	V	41.36	53.98	12.62	AV
7311	50.62	10.14	V	60.76	73.98	13.22	PK
7311	37.92	10.14	V	48.06	53.98	5.92	AV
4874	50.46	2.33	H	52.79	73.98	21.19	PK
4874	38.73	2.33	H	41.06	53.98	12.92	AV
7311	49.35	10.14	H	59.49	73.98	14.49	PK
7311	36.44	10.14	H	46.58	53.98	7.40	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.62	0.000	2.33	V	52.95	73.98	21.03	PK
4874	38.79	0.301	2.33	V	41.42	53.98	12.56	AV
7311	50.38	0.000	10.14	V	60.52	73.98	13.46	PK
7311	37.84	0.301	10.14	V	48.28	53.98	5.70	AV
4874	49.52	0.000	2.33	H	51.85	73.98	22.13	PK
4874	37.56	0.301	2.33	H	40.19	53.98	13.79	AV
7311	49.51	0.000	10.14	H	59.65	73.98	14.33	PK
7311	36.86	0.301	10.14	H	47.30	53.98	6.68	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	51.24	0.000	2.33	V	53.57	73.98	20.41	PK
4874	38.70	0.321	2.33	V	41.35	53.98	12.63	AV
7311	50.08	0.000	10.14	V	60.22	73.98	13.76	PK
7311	37.80	0.321	10.14	V	48.26	53.98	5.72	AV
4874	50.09	0.000	2.33	H	52.42	73.98	21.56	PK
4874	38.67	0.321	2.33	H	41.32	53.98	12.66	AV
7311	50.03	0.000	10.14	H	60.17	73.98	13.81	PK
7311	37.67	0.321	10.14	H	48.13	53.98	5.85	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	50.06	2.28	V	52.34	73.98	21.64	PK
4924	38.12	2.28	V	40.40	53.98	13.58	AV
7386	48.97	9.81	V	58.78	73.98	15.20	PK
7386	36.99	9.81	V	46.80	53.98	7.18	AV
4924	49.58	2.28	H	51.86	73.98	22.12	PK
4924	38.06	2.28	H	40.34	53.98	13.64	AV
7386	48.67	9.81	H	58.48	73.98	15.50	PK
7386	36.84	9.81	H	46.65	53.98	7.33	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.87	0.000	2.28	V	52.15	73.98	21.83	PK
4924	37.99	0.301	2.28	V	40.57	53.98	13.41	AV
7386	49.59	0.000	9.81	V	59.40	73.98	14.58	PK
7386	37.06	0.301	9.81	V	47.17	53.98	6.81	AV
4924	48.54	0.000	2.28	H	50.82	73.98	23.16	PK
4924	37.54	0.301	2.28	H	40.12	53.98	13.86	AV
7386	49.26	0.000	9.81	H	59.07	73.98	14.91	PK
7386	36.97	0.301	9.81	H	47.08	53.98	6.90	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	50.26	0.000	2.28	V	52.54	73.98	21.44	PK
4924	38.09	0.321	2.28	V	40.69	53.98	13.29	AV
7386	49.45	0.000	9.81	V	59.26	73.98	14.72	PK
7386	36.96	0.321	9.81	V	47.09	53.98	6.89	AV
4924	49.94	0.000	2.28	H	52.22	73.98	21.76	PK
4924	37.54	0.321	2.28	H	40.14	53.98	13.84	AV
7386	49.03	0.000	9.81	H	58.84	73.98	15.14	PK
7386	36.74	0.321	9.81	H	46.87	53.98	7.11	AV


■ Test Plots[Ant2]

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.6 3rd Harmonic)

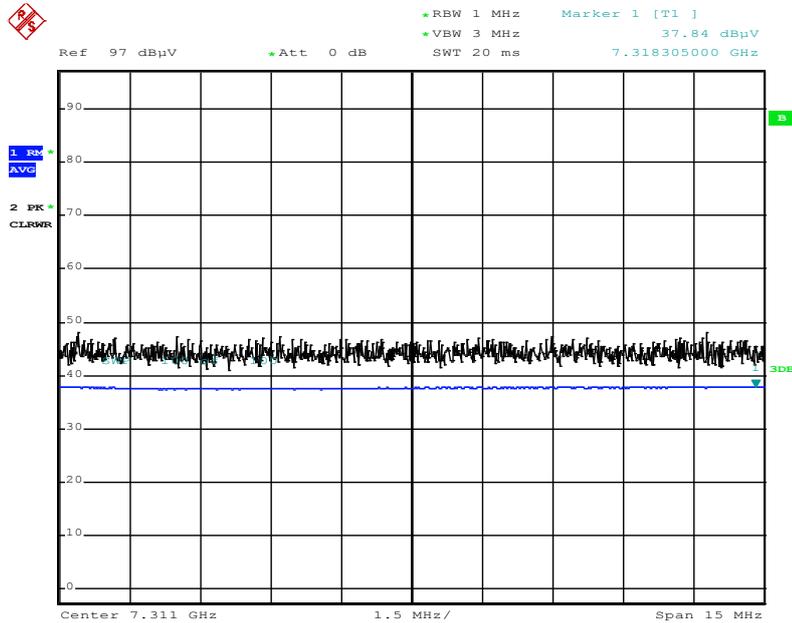

Date: 10.JAN.2019 20:29:51

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.6 3rd Harmonic)

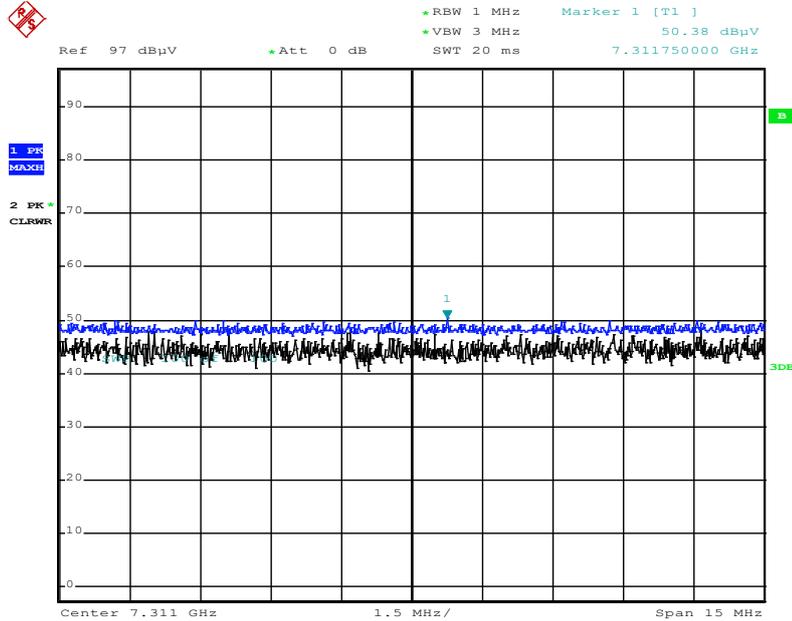

Date: 10.JAN.2019 20:30:29

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

[Ant1]

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	54.53	0.85	H	55.38	73.98	18.60	PK
2390.0	42.16	0.85	H	43.01	53.98	10.97	AV
2390.0	53.78	0.85	V	54.63	73.98	19.35	PK
2390.0	42.03	0.85	V	42.88	53.98	11.10	AV
2483.5	54.53	1.13	H	55.66	73.98	18.32	PK
2483.5	42.51	1.13	H	43.64	53.98	10.34	AV
2483.5	53.48	1.13	V	54.61	73.98	19.37	PK
2483.5	42.05	1.13	V	43.18	53.98	10.80	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2389.5	59.85	0.000	0.85	H	60.70	73.98	13.28	PK
*2389.5	49.43	0.301	0.85	H	50.58	53.98	3.40	AV
*2388.5	59.12	0.000	0.85	H	59.97	73.98	14.01	PK
*2388.5	49.12	0.301	0.85	H	50.27	53.98	3.71	AV
2388.0	59.52	0.000	0.85	H	60.37	73.98	13.61	PK
2388.0	45.56	0.301	0.85	H	46.71	53.98	7.27	AV
2390.0	55.17	0.000	0.85	V	56.02	73.98	17.96	PK
2390.0	43.66	0.301	0.85	V	44.81	53.98	9.17	AV

*Integration method

2389.5 : 2389.0 ~ 2390.0MHz, 2388.5 : 2388.0~2389.0MHz

2484.0 : 2483.5~2484.5MHz, 2485.0 : 2484.5~2485.5MHz

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2417 MHz
 Channel No.: 02 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2380.0	62.76	0.000	0.85	H	63.61	73.98	10.37	PK
2380.0	49.06	0.301	0.85	H	50.21	53.98	3.77	AV
2380.0	62.53	0.000	0.85	V	63.38	73.98	10.60	PK
2380.0	48.85	0.301	0.85	V	50.00	53.98	3.98	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2422 MHz
 Channel No.: 03 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2380.0	63.03	0.000	0.85	H	63.88	73.98	10.10	PK
2380.0	47.18	0.301	0.85	H	48.33	53.98	5.65	AV
2380.0	59.54	0.000	0.85	V	60.39	73.98	13.59	PK
2380.0	46.93	0.301	0.85	V	48.08	53.98	5.90	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2457 MHz
 Channel No. 10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	62.99	0.000	1.13	H	64.12	73.98	9.86	PK
2483.5	48.88	0.301	1.13	H	50.31	53.98	3.67	AV
2483.5	62.50	0.000	1.13	V	63.63	73.98	10.35	PK
2483.5	48.03	0.301	1.13	V	49.46	53.98	4.52	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462 MHz
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2484.0	59.57	0.000	1.13	H	60.70	73.98	13.28	PK
*2484.0	49.46	0.301	1.13	H	50.89	53.98	3.09	AV
*2485.0	59.15	0.000	1.13	H	60.28	73.98	13.70	PK
*2485.0	49.34	0.301	1.13	H	50.77	53.98	3.21	AV
2485.5	60.12	0.000	1.13	H	61.25	73.98	12.73	PK
2485.5	45.33	0.301	1.13	H	46.76	53.98	7.22	AV
2483.5	59.09	0.000	1.13	V	60.22	73.98	13.76	PK
2483.5	44.96	0.301	1.13	V	46.39	53.98	7.59	AV

***Integration method**

2389.5 : 2389.0 ~ 2390.0MHz, 2388.5 : 2388.0~2389.0MHz

2484.0 : 2483.5~2484.5MHz, 2485.0 : 2484.5~2485.5MHz

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2389.5	59.47	0.000	0.85	H	60.32	73.98	13.66	PK
*2389.5	49.30	0.321	0.85	H	50.47	53.98	3.51	AV
*2388.5	58.59	0.000	0.85	H	59.44	73.98	14.54	PK
*2388.5	49.03	0.321	0.85	H	50.20	53.98	3.78	AV
2388.0	58.93	0.000	0.85	H	59.78	73.98	14.20	PK
2388.0	45.26	0.321	0.85	H	46.43	53.98	7.55	AV
2390.0	55.79	0.000	0.85	V	56.64	73.98	17.34	PK
2390.0	43.46	0.321	0.85	V	44.63	53.98	9.35	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2417 MHz
 Channel No.: 02 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2389.5	59.21	0.000	0.85	H	60.06	73.98	13.92	PK
*2389.5	49.38	0.321	0.85	H	50.55	53.98	3.43	AV
*2388.5	58.97	0.000	0.85	H	59.82	73.98	14.16	PK
*2388.5	49.12	0.321	0.85	H	50.29	53.98	3.69	AV
2388.0	60.40	0.000	0.85	H	61.25	73.98	12.73	PK
2388.0	45.55	0.321	0.85	H	46.72	53.98	7.26	AV
2390.0	55.53	0.000	0.85	V	56.38	73.98	17.60	PK
2390.0	43.26	0.321	0.85	V	44.43	53.98	9.55	AV

***Integration method**

2389.5 : 2389.0 ~ 2390.0MHz, 2388.5 : 2388.0~2389.0MHz

2484.0 : 2483.5~2484.5MHz, 2485.0 : 2484.5~2485.5MHz

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2422 MHz
 Channel No.: 03 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	64.15	0.000	0.85	H	65.00	73.98	8.98	PK
2390.0	47.74	0.321	0.85	H	48.91	53.98	5.07	AV
2390.0	62.36	0.000	0.85	V	63.21	73.98	10.77	PK
2390.0	46.75	0.321	0.85	V	47.92	53.98	6.06	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2452 MHz
 Channel No.: 09 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	63.56	0.000	1.13	H	64.69	73.98	9.29	PK
2483.5	46.83	0.321	1.13	H	48.28	53.98	5.70	AV
2483.5	62.11	0.000	1.13	V	63.24	73.98	10.74	PK
2483.5	45.72	0.321	1.13	V	47.17	53.98	6.81	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2457 MHz
 Channel No.: 10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2484.0	59.74	0.000	1.13	H	60.87	73.98	13.11	PK
*2484.0	49.36	0.321	1.13	H	50.81	53.98	3.17	AV
*2485.0	58.85	0.000	1.13	H	59.98	73.98	14.00	PK
*2485.0	49.18	0.321	1.13	H	50.63	53.98	3.35	AV
2485.5	62.26	0.000	1.13	H	63.39	73.98	10.59	PK
2485.5	45.36	0.321	1.13	H	46.81	53.98	7.17	AV
2483.5	61.41	0.000	1.13	V	62.54	73.98	11.44	PK
2483.5	46.09	0.321	1.13	V	47.54	53.98	6.44	AV

***Integration method**

2389.5 : 2389.0 ~ 2390.0MHz, 2388.5 : 2388.0~2389.0MHz
 2484.0 : 2483.5~2484.5MHz, 2485.0 : 2484.5~2485.5MHz

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2462 MHz
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2484.0	59.40	0.000	1.13	H	60.53	73.98	13.45	PK
*2484.0	49.04	0.321	1.13	H	50.49	53.98	3.49	AV
*2485.0	58.98	0.000	1.13	H	60.11	73.98	13.87	PK
*2485.0	48.93	0.321	1.13	H	50.38	53.98	3.60	AV
2485.5	62.58	0.000	1.13	H	63.71	73.98	10.27	PK
2485.5	45.19	0.321	1.13	H	46.64	53.98	7.34	AV
2483.5	63.30	0.000	1.13	V	64.43	73.98	9.55	PK
2483.5	45.26	0.321	1.13	V	46.71	53.98	7.27	AV

***Integration method**

2389.5 : 2389.0 ~ 2390.0MHz, 2388.5 : 2388.0~2389.0MHz
 2484.0 : 2483.5~2484.5MHz, 2485.0 : 2484.5~2485.5MHz

[Ant2]

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	54.05	0.85	H	54.90	73.98	19.08	PK
2390.0	45.87	0.85	H	46.72	53.98	7.26	AV
2390.0	56.24	0.85	V	57.09	73.98	16.89	PK
2390.0	46.05	0.85	V	46.90	53.98	7.08	AV
2483.5	55.87	1.13	H	57.00	73.98	16.98	PK
2483.5	45.93	1.13	H	47.06	53.98	6.92	AV
2483.5	56.64	1.13	V	57.77	73.98	16.21	PK
2483.5	46.91	1.13	V	48.04	53.98	5.94	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2389.5	59.10	0.000	0.85	V	59.95	73.98	14.03	PK
*2389.5	49.57	0.301	0.85	V	50.72	53.98	3.26	AV
*2388.5	58.28	0.000	0.85	V	59.13	73.98	14.85	PK
*2388.5	49.25	0.301	0.85	V	50.40	53.98	3.58	AV
2388.0	59.16	0.000	0.85	V	60.01	73.98	13.97	PK
2388.0	45.74	0.301	0.85	V	46.89	53.98	7.09	AV
2390.0	62.56	0.000	0.85	H	63.41	73.98	10.57	PK
2390.0	45.83	0.301	0.85	H	46.98	53.98	7.00	AV

***Integration method**

2389.5 : 2389.0 ~ 2390.0MHz, 2388.5 : 2388.0~2389.0MHz

2484.0 : 2483.5~2484.5MHz, 2485.0 : 2484.5~2485.5MHz

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2417 MHz
 Channel No.: 02 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2380.0	61.58	0.000	0.85	H	62.43	73.98	11.55	PK
2380.0	47.52	0.301	0.85	H	48.67	53.98	5.31	AV
2380.0	62.73	0.000	0.85	V	63.58	73.98	10.40	PK
2380.0	48.42	0.301	0.85	V	49.57	53.98	4.41	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2457 MHz
 Channel No.: 10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	59.65	0.000	1.13	H	60.78	73.98	13.20	PK
2483.5	45.62	0.301	1.13	H	47.05	53.98	6.93	AV
2483.5	60.61	0.000	1.13	V	61.74	73.98	12.24	PK
2483.5	46.78	0.301	1.13	V	48.21	53.98	5.77	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462 MHz
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2484.0	59.62	0.000	1.13	V	60.75	73.98	13.23	PK
*2484.0	49.49	0.301	1.13	V	50.92	53.98	3.06	AV
*2485.0	58.76	0.000	1.13	V	59.89	73.98	14.09	PK
*2485.0	49.14	0.301	1.13	V	50.57	53.98	3.41	AV
2485.5	59.49	0.000	1.13	V	60.62	73.98	13.36	PK
2485.5	45.27	0.301	1.13	V	46.70	53.98	7.28	AV
2483.5	55.91	0.000	1.13	H	57.04	73.98	16.94	PK
2483.5	43.56	0.301	1.13	H	44.99	53.98	8.99	AV

***Integration method**

2389.5 : 2389.0 ~ 2390.0MHz, 2388.5 : 2388.0~2389.0MHz

2484.0 : 2483.5~2484.5MHz, 2485.0 : 2484.5~2485.5MHz

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2389.5	58.72	0.000	0.85	V	59.57	73.98	14.41	PK
*2389.5	49.41	0.321	0.85	V	50.58	53.98	3.40	AV
*2388.5	58.29	0.000	0.85	V	59.14	73.98	14.84	PK
*2388.5	49.21	0.321	0.85	V	50.38	53.98	3.60	AV
2388.0	61.54	0.000	0.85	V	62.39	73.98	11.59	PK
2388.0	45.46	0.321	0.85	V	46.63	53.98	7.35	AV
2390.0	59.62	0.000	0.85	H	60.47	73.98	13.51	PK
2390.0	43.52	0.321	0.85	H	44.69	53.98	9.29	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2417 MHz
 Channel No.: 02 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	61.60	0.000	0.85	H	62.45	73.98	11.53	PK
2390.0	48.92	0.321	0.85	H	50.09	53.98	3.89	AV
2390.0	63.84	0.000	0.85	V	64.69	73.98	9.29	PK
2390.0	49.23	0.321	0.85	V	50.40	53.98	3.58	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2457 MHz
 Channel No.: 10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	64.15	0.000	1.13	H	65.28	73.98	8.70	PK
2483.5	47.03	0.359	1.13	H	48.52	53.98	5.46	AV
2483.5	64.63	0.000	1.13	V	65.76	73.98	8.22	PK
2483.5	47.46	0.359	1.13	V	48.95	53.98	5.03	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2462 MHz
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2484.0	59.31	0.000	1.13	V	60.44	73.98	13.54	PK
*2484.0	49.25	0.359	1.13	V	50.74	53.98	3.24	AV
*2485.0	58.37	0.000	1.13	V	59.50	73.98	14.48	PK
*2485.0	49.11	0.359	1.13	V	50.60	53.98	3.38	AV
2485.5	57.21	0.000	1.13	V	58.34	73.98	15.64	PK
2485.5	45.13	0.359	1.13	V	46.62	53.98	7.36	AV
2483.5	56.23	0.000	1.13	H	57.36	73.98	16.62	PK
2483.5	44.87	0.359	1.13	H	46.36	53.98	7.62	AV


***Integration method**

2389.5 : 2389.0 ~ 2390.0MHz, 2388.5 : 2388.0~2389.0MHz

2484.0 : 2483.5~2484.5MHz, 2485.0 : 2484.5~2485.5MHz


■ Test Plots[Ant1]

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.11, Integration method 2484)

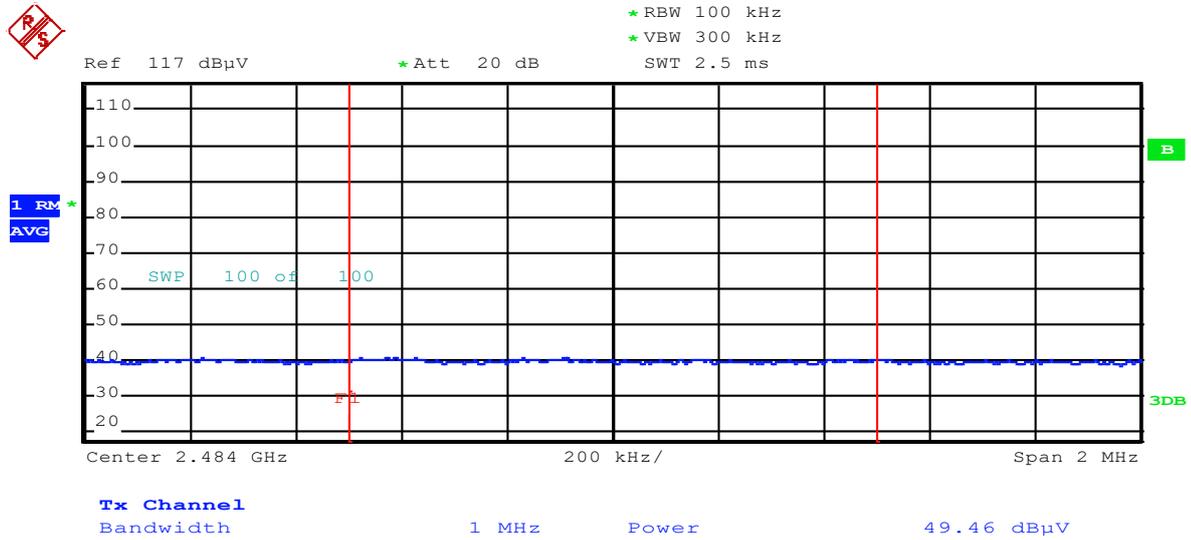

Date: 6.MAR.2003 01:03:34


Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.11, Integration method 2484)

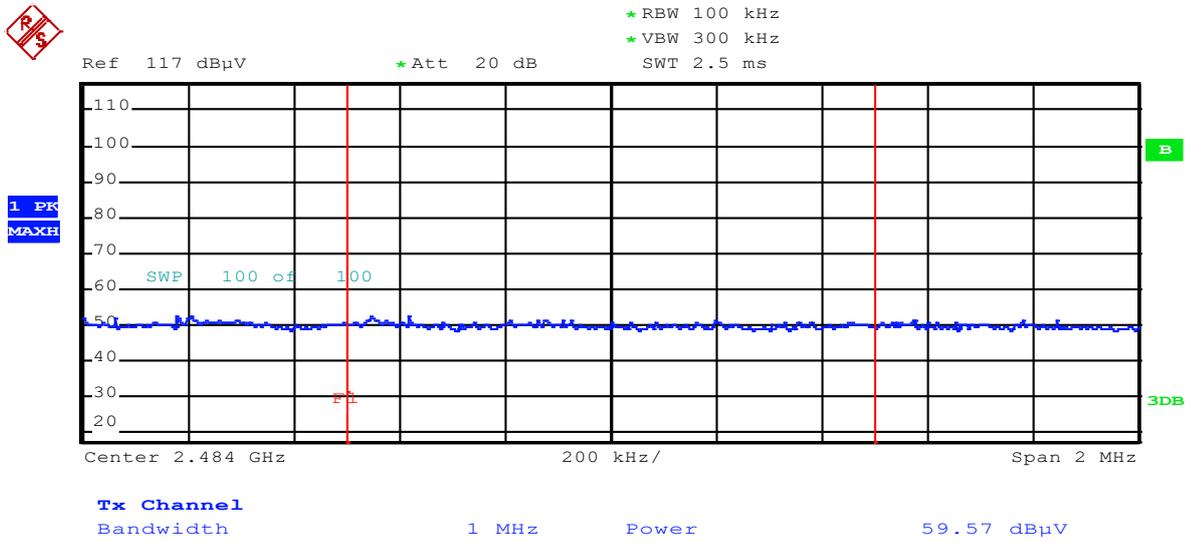

Date: 6.MAR.2003 01:04:47


■ Test Plots[Ant2]

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.11, Integration method 2484)

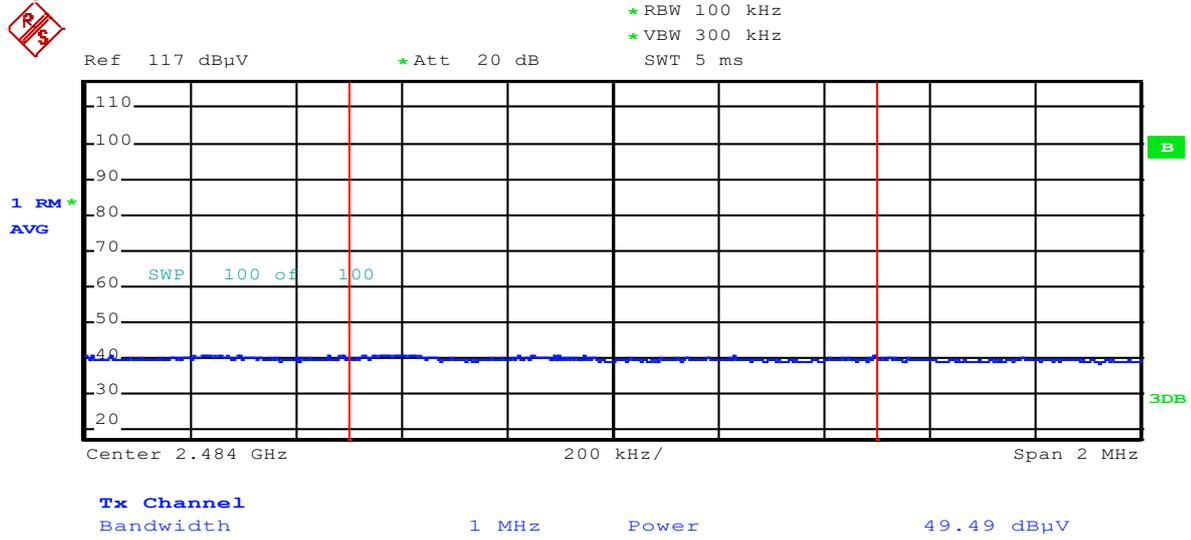

Date: 10.JAN.2019 15:49:30

Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.11, Integration method 2484)

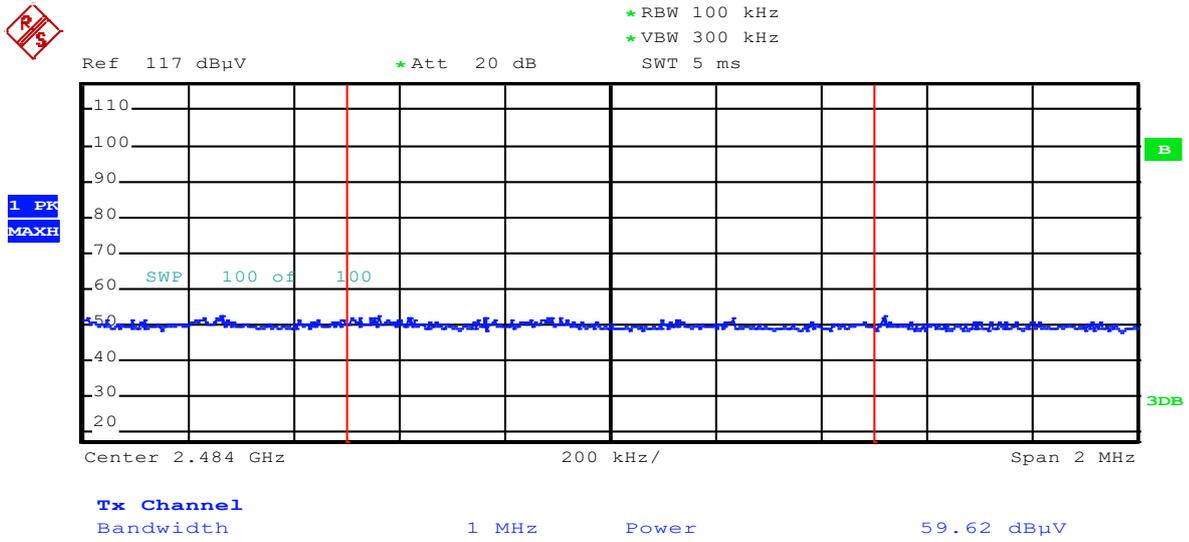

Date: 10.JAN.2019 15:51:13

Note:

Plot of worst case are only reported.

9.8 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/30/2018	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/20/2018	Annual	MY49431210
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/17/2018	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/09/2018	Annual	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	06/30/2017	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/24/2018	Annual	100843
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	01/03/2019	Annual	F6
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/09/2018	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Weinschel	2-3 / Attenuator (3 dB)	10/10/2018	Annual	BR0617
H+S	5910-N-50-010 / Attenuator(10 dB)	11/08/2018	Annual	NONE
CERNEX	CBLU1183540B-01 / Power Amplifier	12/21/2018	Annual	25540
CERNEX	CBL06185030 / Power Amplifier	03/28/2018	Annual	28550
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/27/2018	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1901-FI002-P
2	HCT-RF-1901-FI003-P
3	HCT-RF-1901-FI004-P
4	HCT-RF-1901-FI005-P