



On your side

HCT

TEST REPORT

FCC/ISED DTS Test for IAGL-NHT1
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2112-FI005-R1

DATE OF ISSUE
December 24, 2021

Tested by
Jin Gwan Lee

Technical Manager
Jong Seok Lee

Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

<h1 style="margin: 0;">TEST REPORT</h1> <p style="margin: 0;">FCC/ISED DTS Test for IAGL-NHT1</p>	<p>REPORT NO. HCT-RF-2112-FI005-R1</p> <p>DATE OF ISSUE December 24, 2021</p> <p>Additional Model -</p>
---	--

Applicant	LG Electronics Inc. 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Republic of Korea
------------------	---

Eut Type Model Name	Lotus Gamma2 IAGL-NHT1
FCC ID IC	BEJIAGL-NHT1 2703H-IAGLNHT1
Modulation type	CCK/DSSS/OFDM
FCC Classification	Digital Transmission System(DTS)
FCC Rule Part(s)	Part 15.247
ISED Rule Part(s)	RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 14, 2021	Initial Release
1	December 24, 2021	Revised IC number on page 2

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

KOLAS Statement:

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (KOLAS Accreditation No. KT197)

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION	8
4. FACILITIES AND ACCREDITATIONS	8
FACILITIES	8
EQUIPMENT	8
5. ANTENNA REQUIREMENTS	9
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY TEST OF RESULTS	29
9. TEST RESULT	31
9.1 DUTY CYCLE	31
9.2 6 dB BANDWIDTH & 99 % BANDWIDTH	34
9.3 OUTPUT POWER	40
9.4 POWER SPECTRAL DENSITY	46
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	49
9.6 RADIATED SPURIOUS EMISSIONS	60
9.7 RADIATED RESTRICTED BAND EDGES	64
9.8 RECEIVER SPURIOUS EMISSIONS	70
10. LIST OF TEST EQUIPMENT	71
11. ANNEX A_ TEST SETUP PHOTO	73

1. EUT DESCRIPTION

Model	IAGL-NHT1
Additional Model	-
EUT Type	Lotus Gamma2
Power Supply	DC 12.0 V
Frequency Range	802.11b, g, n(HT20): 2 412 MHz – 2 462 MHz
Max. RF Output Power	<p>Peak Power 802.11b : 24.54 dBm 802.11g : 26.26 dBm 802.11n(HT20) : 26.12 dBm</p> <p>Average Power 802.11b: 18.50 dBm 802.11g: 18.47 dBm 802.11n(HT20): 18.30 dBm</p>
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n
Number of Channels	11 Channels
Antenna Specification	Antenna type: dipole antenna Peak Gain : 0.11 dBi
Date(s) of Tests	November 02, 2021 ~ December 13, 2021
PMN (Product Marketing Number)	Lotus Gamma2
HVIN (Hardware Version Identification Number)	IAGL-NHT1
FVIN (Firmware Version Identification Number)	IP10
HMN (Host Marketing Name)	N/A
EUT serial numbers	Radiated : IAGL-NHT1002 Conducted : IAGL-NHT1001
Manufacturer	LG Electronics Inc. 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Republic of Korea

Factory	<p>1. LG INNOTEK YANTAI CO., LTD. No. 36, Taibei North Road, Development Zone, Yantai 264006 Shandong P.R. China</p> <p>2. LG Electronics Vietnam Hai Phong Co., Ltd. Lot CN2, Trang Due Industrial Park, Le Loi Commune, An Duong District, Hai Phong City, Vietnam</p> <p>3. LG Electronics Inc. 222, LG-ro, Jinwi-myeon Pyeongtaek-si, Gyeonggi-do 17709 Republic of Korea</p> <p>4. LG Electronics Miawa Sp. z o.o. ul. LG Electronics 706-500 Miawa Poland</p> <p>5. LG Electronics(Kunshan) Co., Ltd. No. 88, Qianjin East Road, Kunshan City 215300 Jiangsu P.R. China</p> <p>6. LG ELECTRONICS DO BRASIL LTDA LG - FILIAL MANAUS RUA JAVARI 1004 DISTRITO INDUSTRIAL MANAUS - AM, 69075-110, Brazil</p> <p>7. LG Electronics Nanjing Vehicle Component Co., Ltd. No.346, Yaoxinda Road, Nanjing Economic and Technological Development Zone, 210038, P.R. China</p> <p>8. Hitachi-LG Data Storage(Huizhou), Ltd. Huifeng Fourth Road 42, Zhongkai Hi-Tech Industry Development Zone, Huizhou, Guangdong, 516006 P.R. China</p> <p>9. HITACHI ELECTRONIC PRODUCTS (M) SDN. BHD No. 12, Jalan Kemajuan, Bangi Industrial Estate, 43650 Bandar Baru Bangi, Selangor Darul Ehsan, Malaysia</p>
---------	---

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated January 26, 2021 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

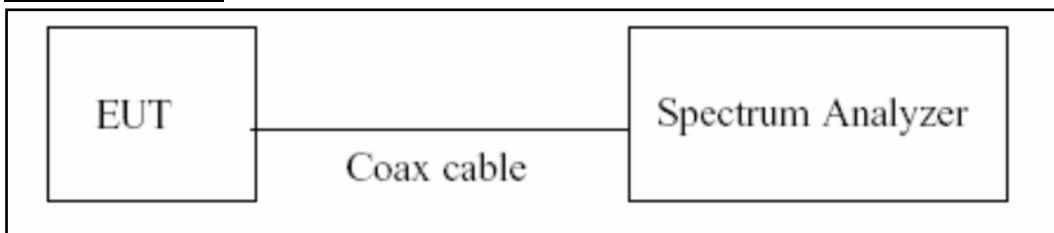

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth & 99 % Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = Max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1 % ~ 5 % of the occupied bandwidth

VBW $\cong 3 \times$ RBW

Detector = Peak

Trace mode = Max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Level + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Level + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10.2 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Span = 1.5 times the DTS channel bandwidth.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = peak
- 7) Trace Mode = Max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
If Measured Level exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Measured Level + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = Max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.09
100	20.14
200	20.18
300	20.23
400	20.29
500	20.29
600	20.30
700	20.31
800	20.32
900	20.34
1000	20.39
2000	20.54
2400	20.69
2412	20.88
2437	20.88
2462	20.88
2500	21.04
3000	21.12
4000	21.35
5000	21.64
5700	21.89
5800	21.89
6000	21.92
7000	22.05
8000	22.05
9000	22.13
10 000	22.23
11 000	22.32
12 000	22.41
13 000	22.42
14 000	22.45
15 000	22.55
16 000	22.63
17 000	22.84
18 000	22.97
19 000	22.89
20 000	22.56
21 000	22.69
22 000	22.68
23 000	22.69
24 000	22.70
25 000	22.80

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

7.6. Radiated Test

Limit

FCC

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength ($\mu\text{A}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

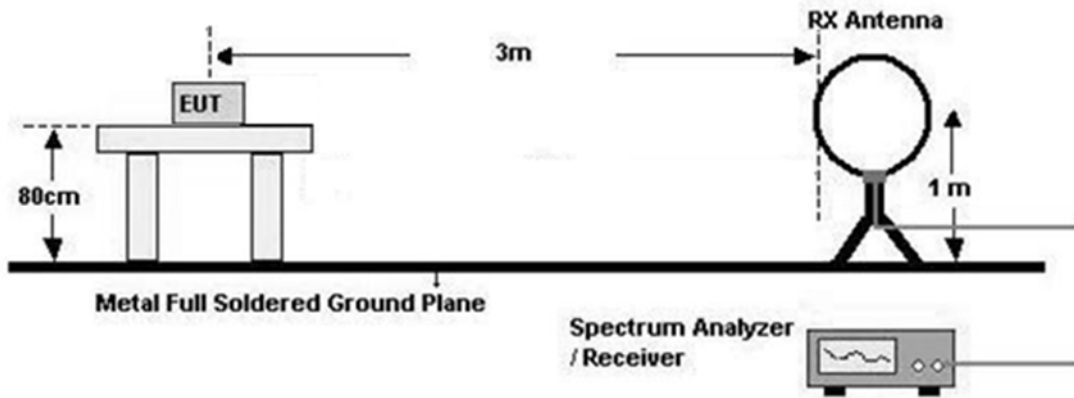

30 MHz - 1 GHz

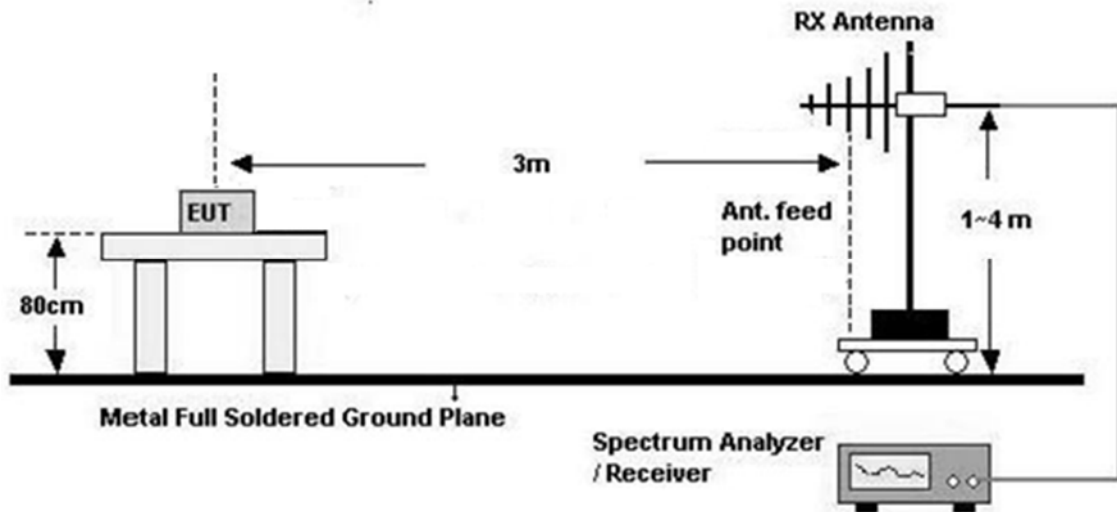

Above 1 GHz

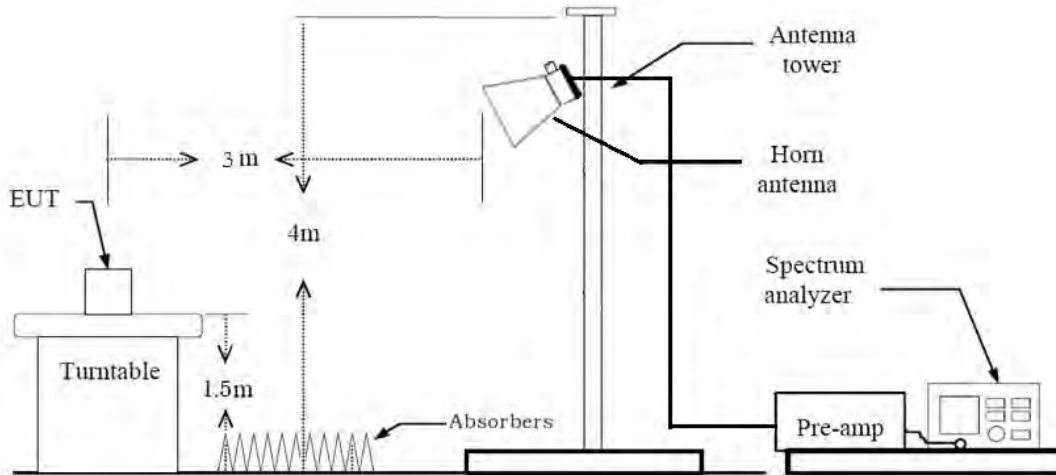

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- ※In general, (1) is used mainly
7. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98 %

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20 \log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98 %)

= Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98 %)

= Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98 %,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98 %)

= Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98 %)

= Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

+ Duty Cycle Factor

7.7. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

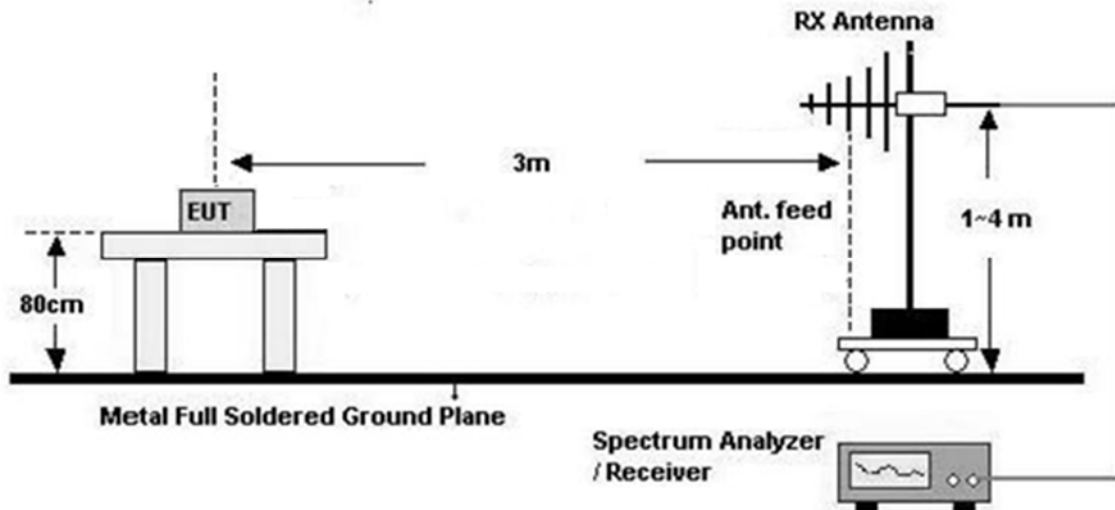

Test Procedure of Receiver Spurious Emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

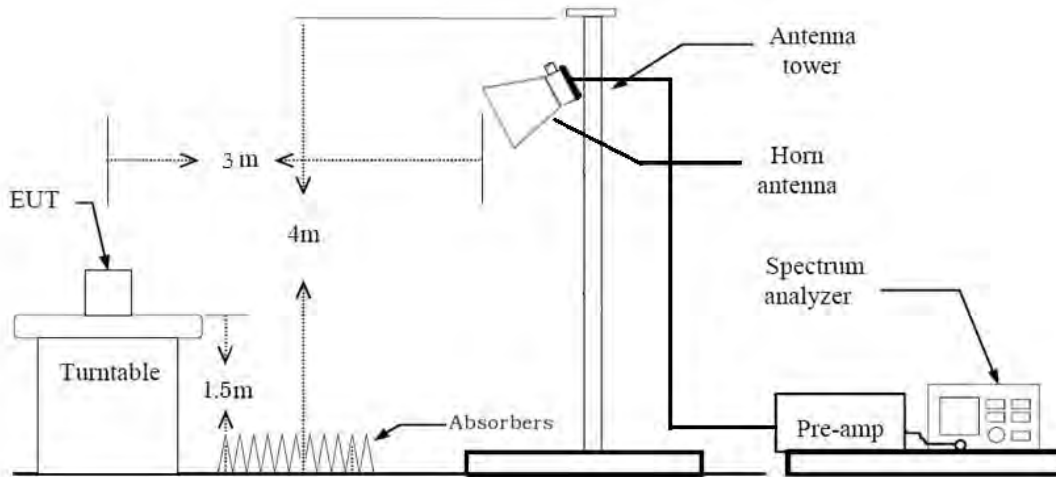

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW ≥ 3 x RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW \geq 3 x RBW

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : Y
3. All data rate of operation were investigated and the worst case data rate results are reported
 - 802.11b : 11 Mbps
 - 802.11g : 6 Mbps
 - 802.11n : MCS0
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. Because this EUT is used DC.

Conducted test

1. The EUT was configured with data rate of highest power.

8. SUMMARY TEST OF RESULTS

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		N/A (#Note1)
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99 % Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		N/A (#Note1)
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6		PASS

#Note1 : Not Tested

9. TEST RESULT

9.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.607	8.708	0.988	0.051
	2	4.307	4.398	0.979	0.091
	5.5	1.626	1.719	0.946	0.241
	11	0.860	0.956	0.900	0.460
802.11g	6	1.428	1.529	0.934	0.298
	9	0.960	1.061	0.905	0.433
	12	0.724	0.826	0.876	0.574
	18	0.492	0.594	0.829	0.815
	24	0.372	0.474	0.785	1.049
	36	0.256	0.358	0.716	1.450
	48	0.196	0.298	0.658	1.818
	54	0.180	0.282	0.640	1.939
802.11n (HT20)	6.5 (MCS0)	1.336	1.438	0.929	0.321
	13 (MCS1)	0.688	0.790	0.871	0.600
	19.5 (MCS2)	0.472	0.574	0.823	0.847
	26 (MCS3)	0.364	0.465	0.783	1.064
	39 (MCS4)	0.256	0.357	0.717	1.446
	52 (MCS5)	0.200	0.302	0.664	1.776
	58.5 (MCS6)	0.184	0.285	0.645	1.902
	65 (MCS7)	0.168	0.270	0.623	2.054

Note:


1. Duty Cycle Factor = 10log(1/Duty Cycle). where, Duty Cycle = T_{on} / T_{total}

☐ Test Plots


Duty cycle plot (802.11b(1 Mbps))



Duty cycle plot (802.11g(6 Mbps))

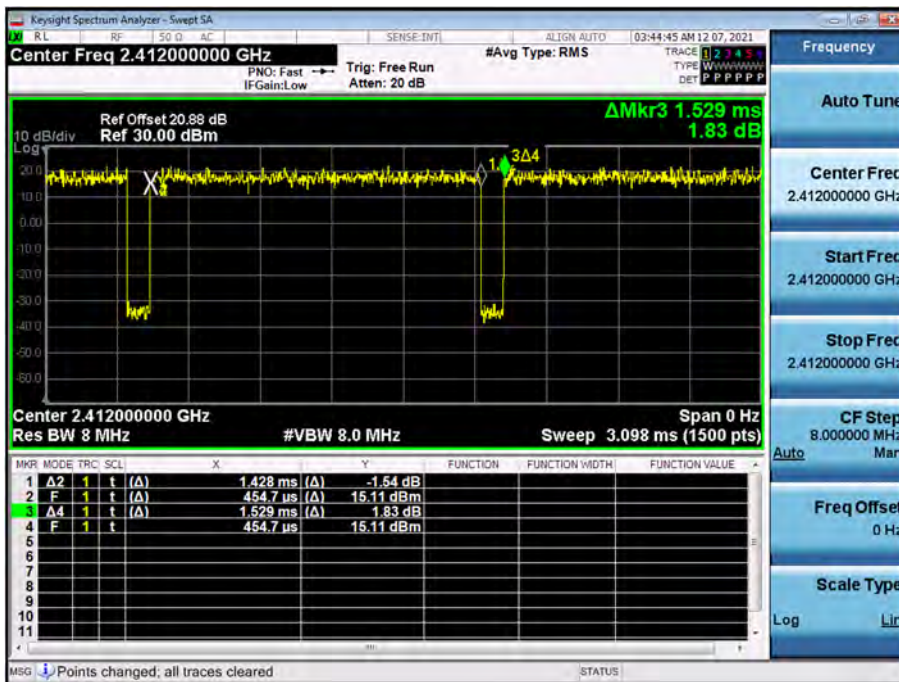

Duty cycle plot (802.11n(HT20)(MCS0))

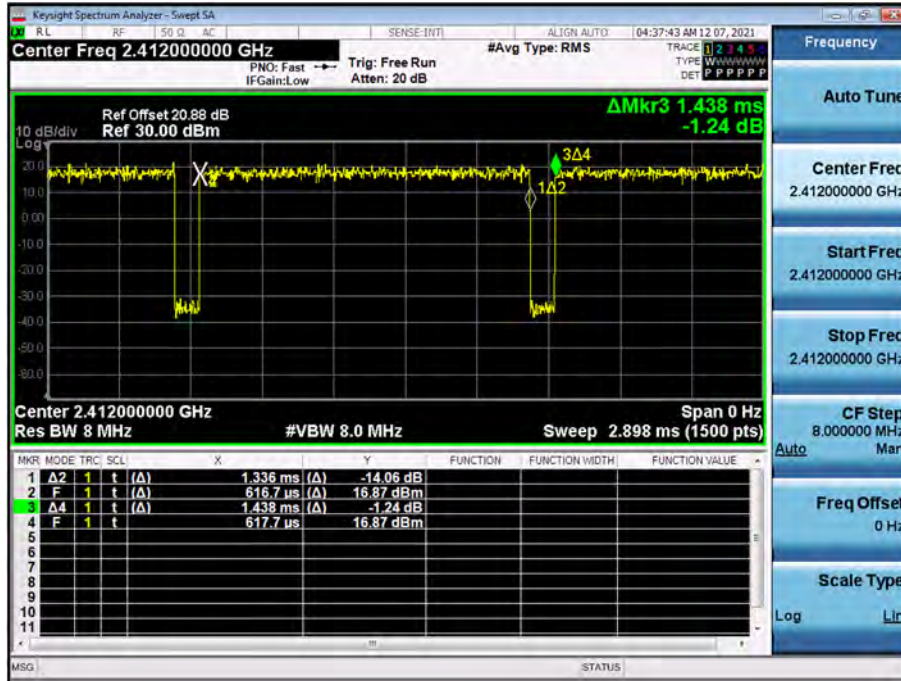

Note:

In order to simplify the report, attached plots were only the most lowest data rate.

9.2 6 dB BANDWIDTH & 99 % BANDWIDTH

FCC


802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	7.571	> 0.5
2437	6	7.130	> 0.5
2462	11	7.100	> 0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.05	> 0.5
2437	6	15.80	> 0.5
2462	11	16.28	> 0.5


802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.92	> 0.5
2437	6	16.24	> 0.5
2462	11	17.02	> 0.5

▣ Test Plots

6 dB Bandwidth plot (802.11b-CH 11)

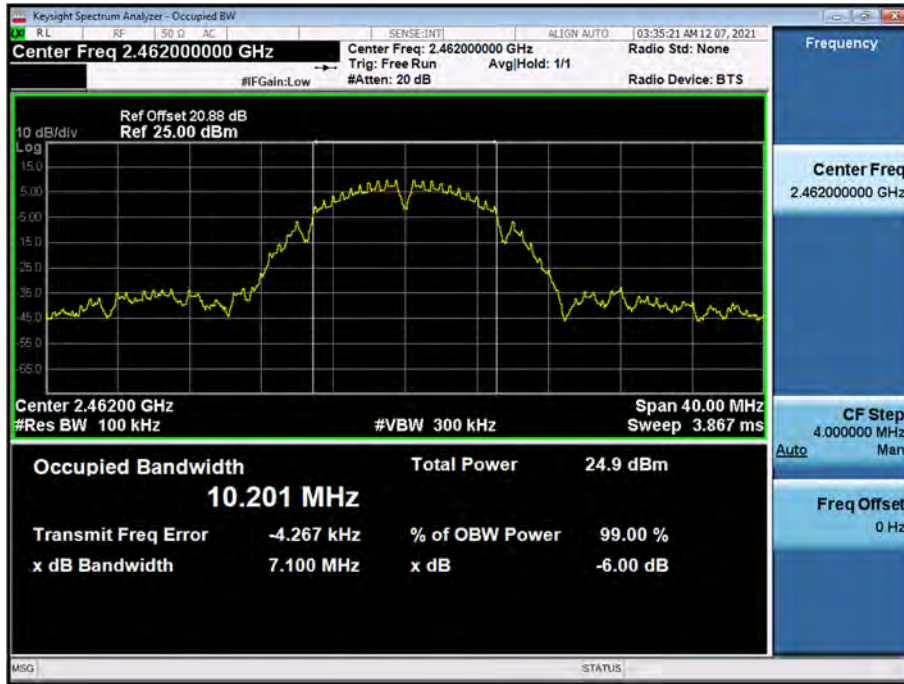

6 dB Bandwidth plot (802.11g-CH 6)

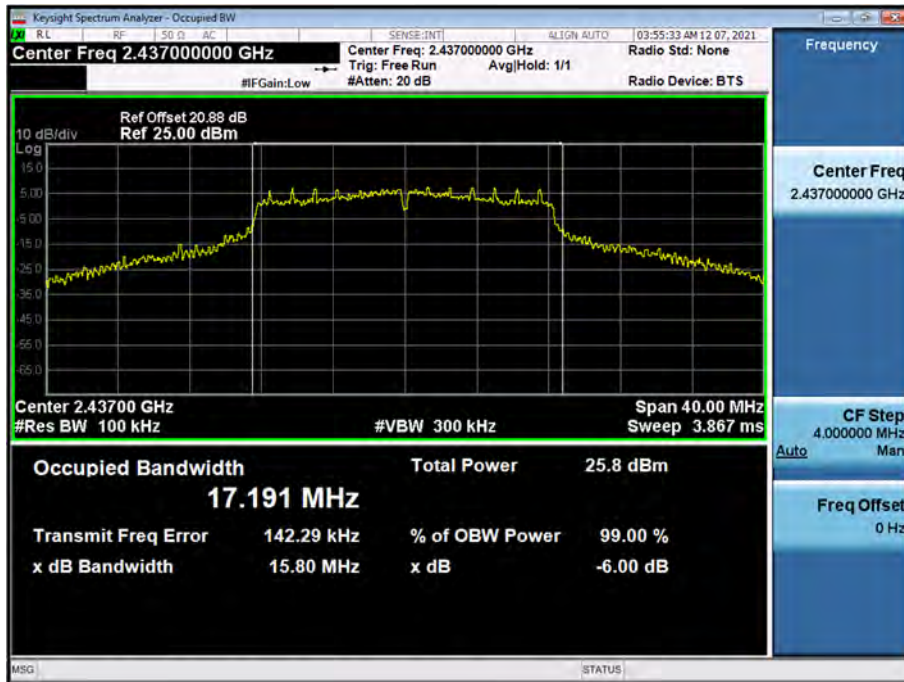

6 dB Bandwidth plot (802.11n_HT20-CH 6)



Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

99 % Bandwidth Measurements(ISED)


802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	10.985	N/A
2437	6	11.069	N/A
2462	11	10.490	N/A

802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.165	N/A
2437	6	18.795	N/A
2462	11	17.206	N/A

802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	18.193	N/A
2437	6	19.410	N/A
2462	11	18.192	N/A

▣ Test Plots

99 % Bandwidth plot (802.11b-CH 6)

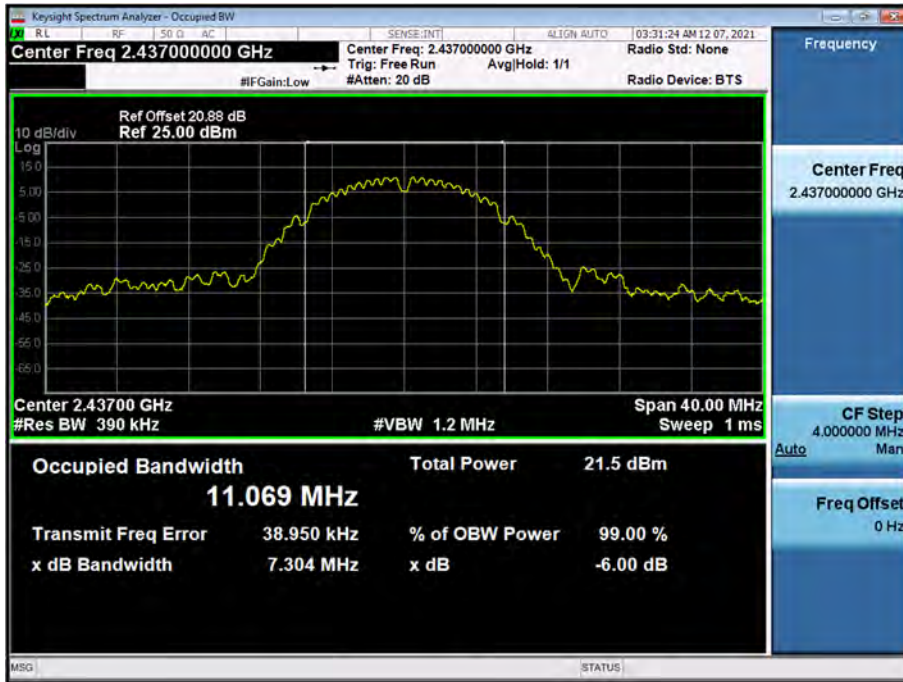

99 % Bandwidth plot (802.11g-CH 6)



99 % Bandwidth plot (802.11n_HT20-CH 6)



Note:

In order to simplify the report, attached plots were only the most wide 99 % Bandwidth channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss(20 dB) + Cable loss(1ea) + EUT Cable(For Conducted)
 2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
- So, 20.88 dB is offset for 2.4 GHz Band

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	20.86	30.00
		2	21.01	30.00
		5.5	22.83	30.00
		11	24.54	30.00
2437	6	1	20.58	30.00
		2	20.49	30.00
		5.5	22.31	30.00
		11	24.02	30.00
2462	11	1	19.69	30.00
		2	19.86	30.00
		5.5	21.54	30.00
		11	23.31	30.00

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	21.40	30.00
		9	21.32	30.00
		12	21.22	30.00
		18	20.52	30.00
		24	20.78	30.00
		36	20.85	30.00
		48	20.98	30.00
		54	20.96	30.00
2437	6	6	26.26	30.00
		9	26.15	30.00
		12	25.75	30.00
		18	25.38	30.00
		24	25.96	30.00
		36	25.85	30.00
		48	25.78	30.00
		54	25.90	30.00
2462	11	6	21.56	30.00
		9	21.48	30.00
		12	21.35	30.00
		18	20.95	30.00
		24	21.05	30.00
		36	21.16	30.00
		48	21.24	30.00
		54	21.24	30.00

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	22.24	30.00
		1	22.10	30.00
		2	22.15	30.00
		3	22.16	30.00
		4	22.15	30.00
		5	22.18	30.00
		6	22.19	30.00
		7	22.14	30.00
2437	6	0	26.12	30.00
		1	25.94	30.00
		2	25.88	30.00
		3	26.11	30.00
		4	26.06	30.00
		5	26.06	30.00
		6	26.08	30.00
		7	26.02	30.00
2462	11	0	20.53	30.00
		1	20.46	30.00
		2	20.42	30.00
		3	20.48	30.00
		4	20.48	30.00
		5	20.45	30.00
		6	20.50	30.00
		7	20.45	30.00

Average Power

1. Power Meter offset = Attenuator loss(20 dB) + Cable loss(1ea) + EUT Cable(For Conducted)
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.88 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	18.31	0.051	18.36	30.00
		2	18.18	0.091	18.27	30.00
		5.5	18.26	0.241	18.50	30.00
		11	18.00	0.460	18.46	30.00
2437	6	1	18.20	0.051	18.25	30.00
		2	17.79	0.091	17.89	30.00
		5.5	17.94	0.241	18.18	30.00
		11	17.57	0.460	18.03	30.00
2462	11	1	17.25	0.051	17.30	30.00
		2	17.12	0.091	17.21	30.00
		5.5	17.01	0.241	17.25	30.00
		11	16.90	0.460	17.36	30.00

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	13.24	0.298	13.53	30.00
		9	13.28	0.433	13.71	30.00
		12	13.08	0.574	13.65	30.00
		18	12.19	0.815	13.00	30.00
		24	11.98	1.049	13.03	30.00
		36	11.61	1.450	13.06	30.00
		48	11.45	1.818	13.27	30.00
		54	11.25	1.939	13.19	30.00
2437	6	6	18.17	0.298	18.47	30.00
		9	17.95	0.433	18.38	30.00
		12	17.80	0.574	18.37	30.00
		18	17.26	0.815	18.08	30.00
		24	17.36	1.049	18.41	30.00
		36	16.79	1.450	18.24	30.00
		48	16.53	1.818	18.35	30.00
		54	16.34	1.939	18.27	30.00
2462	11	6	13.42	0.298	13.72	30.00
		9	13.30	0.433	13.74	30.00
		12	13.22	0.574	13.80	30.00
		18	12.51	0.815	13.32	30.00
		24	12.22	1.049	13.27	30.00
		36	11.91	1.450	13.36	30.00
		48	11.66	1.818	13.48	30.00
		54	11.50	1.939	13.44	30.00

802.11n Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	13.96	0.321	14.29	30.00
		1	13.72	0.600	14.32	30.00
		2	13.44	0.847	14.29	30.00
		3	12.80	1.064	13.86	30.00
		4	12.55	1.446	13.99	30.00
		5	12.31	1.776	14.08	30.00
		6	12.13	1.902	14.03	30.00
		7	11.93	2.054	13.98	30.00
2437	6	0	17.96	0.321	18.28	30.00
		1	17.68	0.600	18.28	30.00
		2	17.38	0.847	18.23	30.00
		3	17.23	1.064	18.30	30.00
		4	16.81	1.446	18.25	30.00
		5	16.35	1.776	18.12	30.00
		6	16.29	1.902	18.19	30.00
		7	16.23	2.054	18.28	30.00
2462	11	0	12.27	0.321	12.59	30.00
		1	12.04	0.600	12.64	30.00
		2	11.82	0.847	12.67	30.00
		3	11.10	1.064	12.16	30.00
		4	10.75	1.446	12.20	30.00
		5	10.47	1.776	12.25	30.00
		6	10.35	1.902	12.25	30.00
		7	10.24	2.054	12.30	30.00

9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Test Result	
			PSD (dBm/3 kHz)	Limit (dBm/3 kHz)
802.11b	2412	1	-4.204	8
	2437	6	-3.870	
	2462	11	-5.058	
802.11g	2412	1	-9.295	
	2437	6	-4.318	
	2462	11	-9.169	
802.11n(HT20)	2412	1	-9.719	
	2437	6	-5.029	
	2462	11	-11.079	

Note :


1. Spectrum Measured Levels are not plot data.
 The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss(20 dB) + Cable loss(1ea)
3. 20.88 dB is offset for 2.4 GHz Band.

▣ Test Plots


Power Spectral Density (802.11b-CH 6)



Power Spectral Density (802.11g-CH 6)

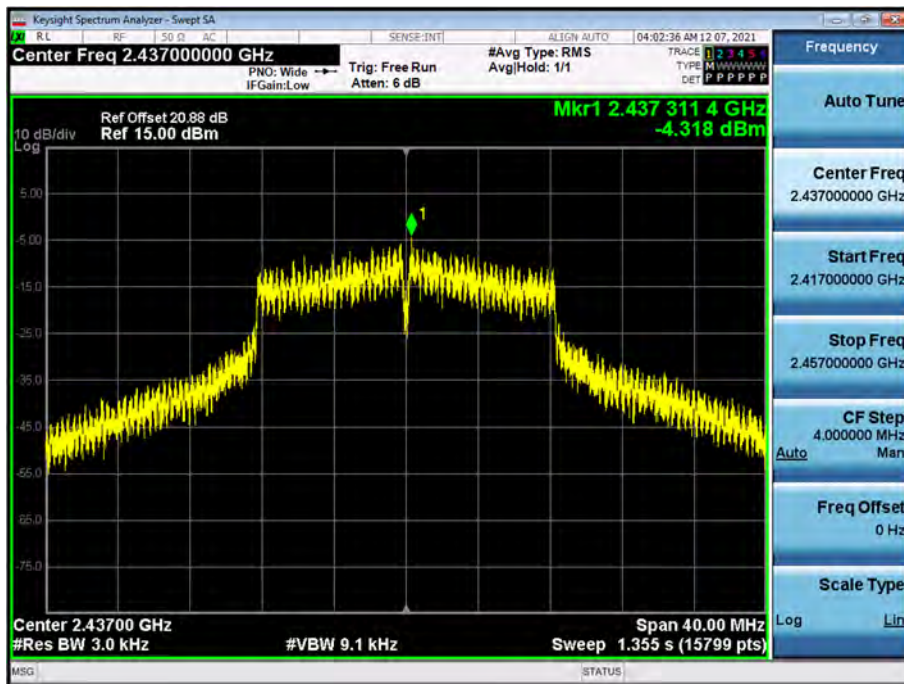

Power Spectral Density (802.11n_HT20 -CH 6)

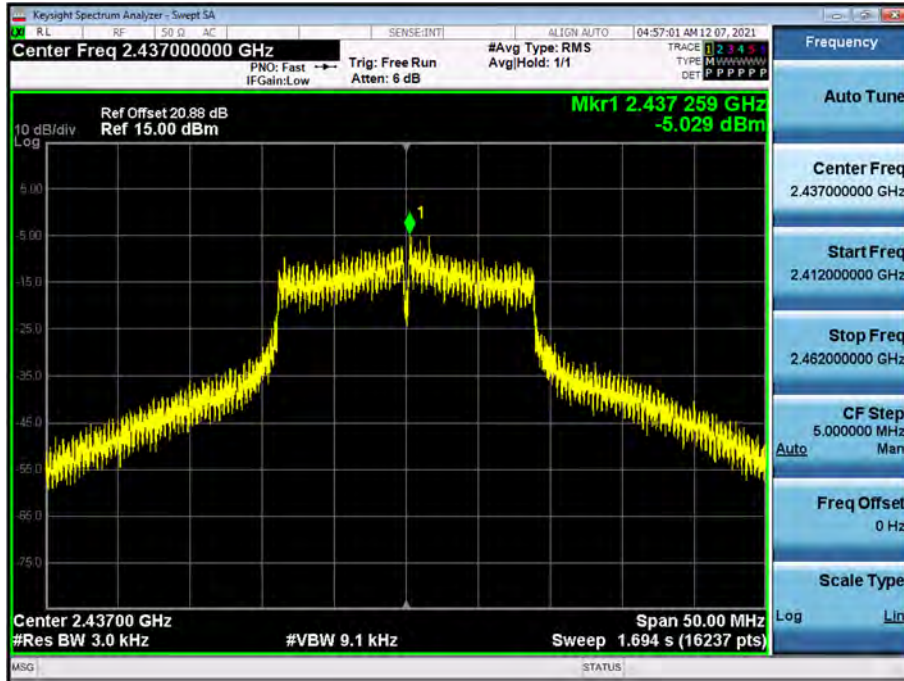

Note :

In order to simplify the report, attached plots were only the worst case PSD channel.

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

▣ Test Plots(BandEdge)

Band Edge (802.11b-CH1)



Band Edge (802.11b-CH11)




Band Edge (802.11g-CH1)




Band Edge (802.11g-CH11)



Band Edge (802.11n_HT20 -CH1)

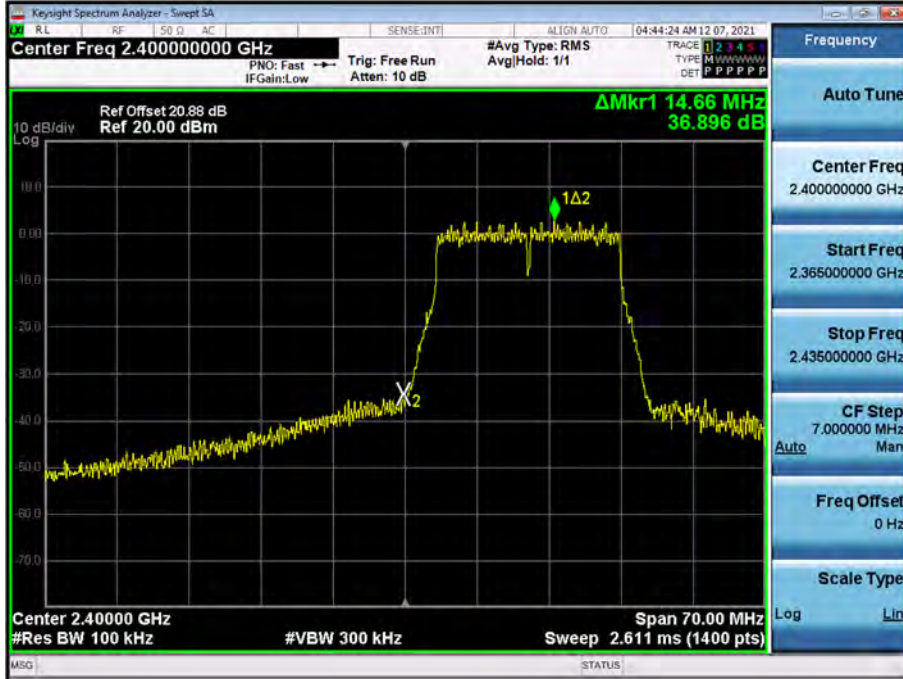


Band Edge (802.11n_HT20 -CH11)

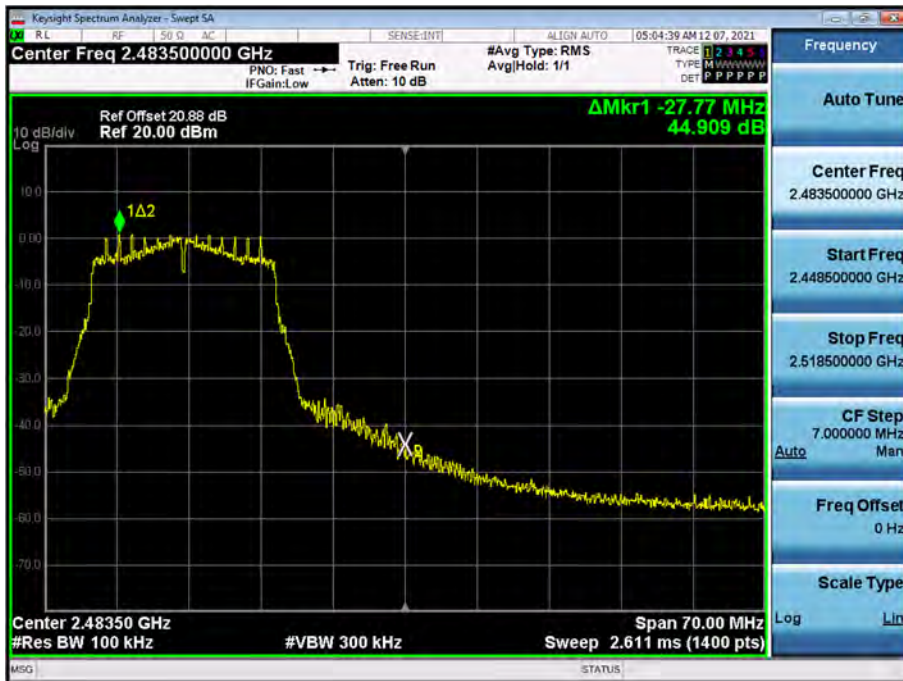

☐ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

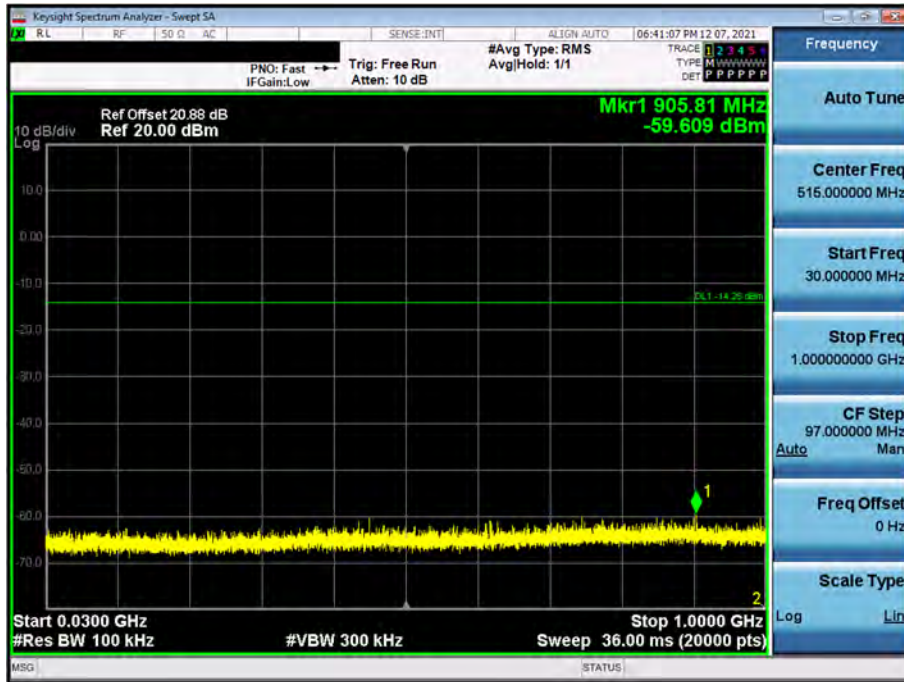


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

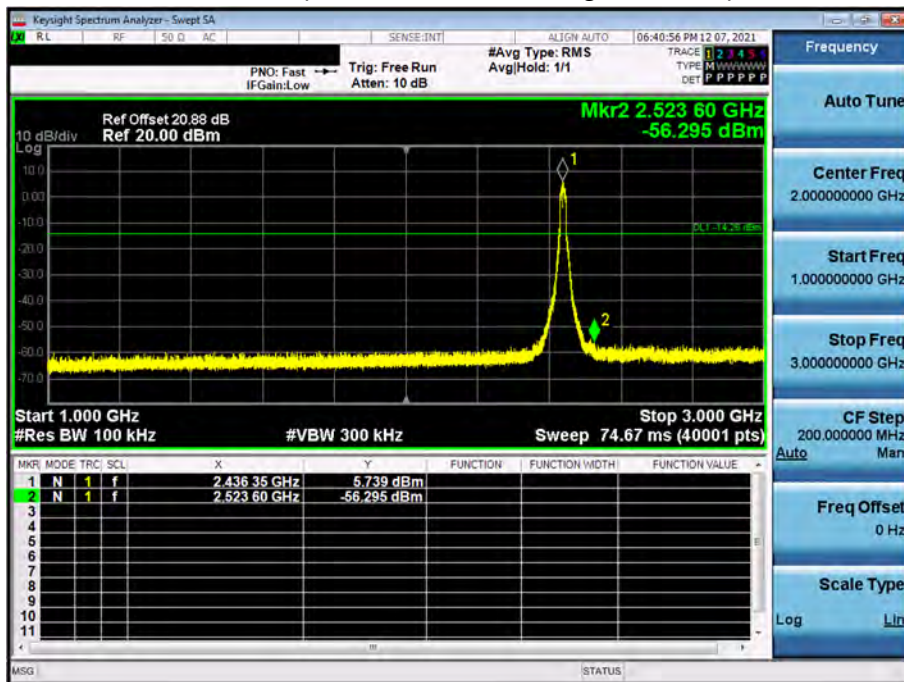


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

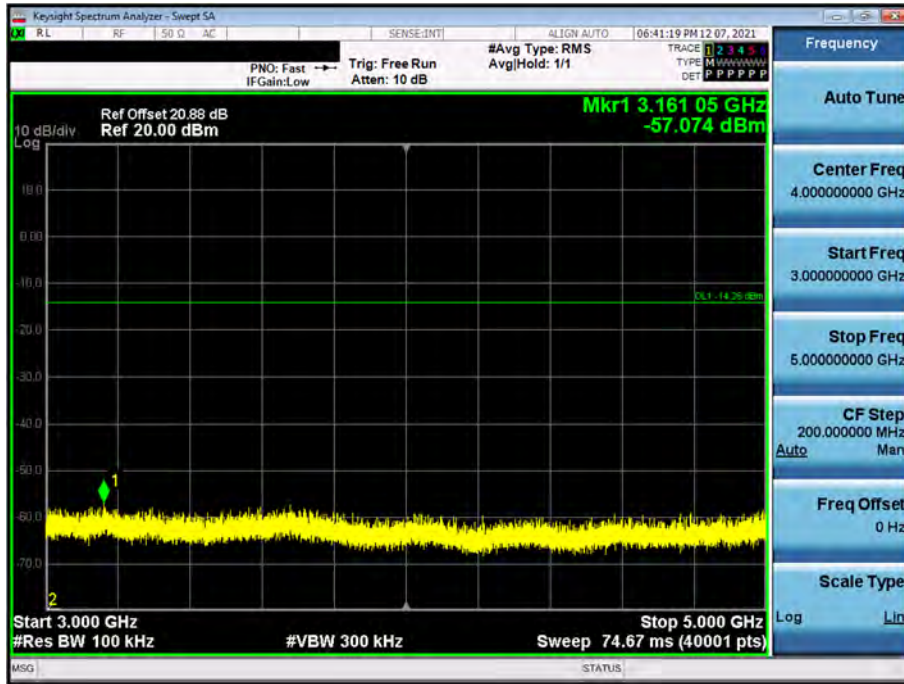


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

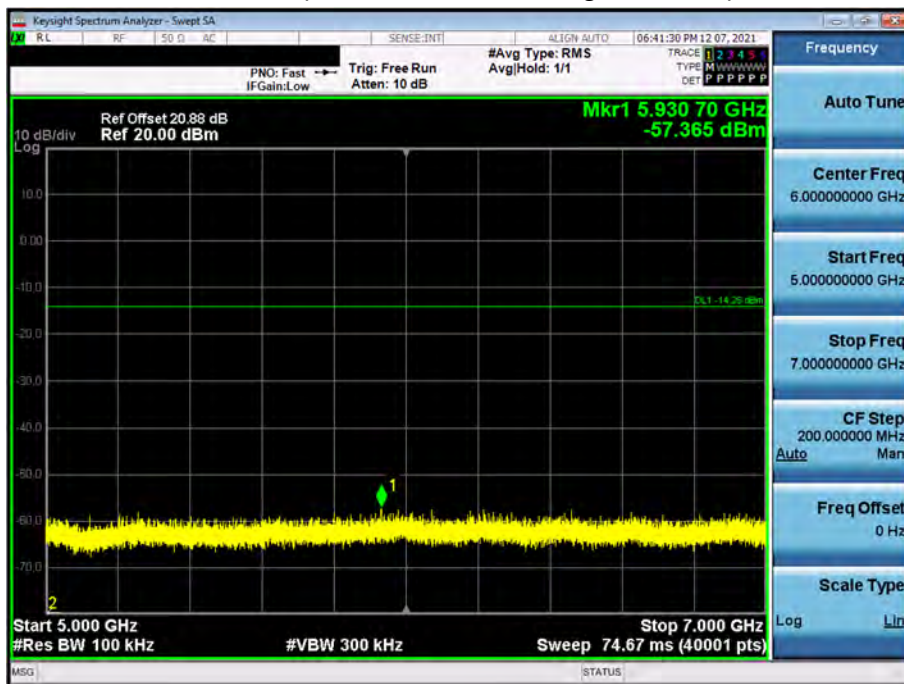


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

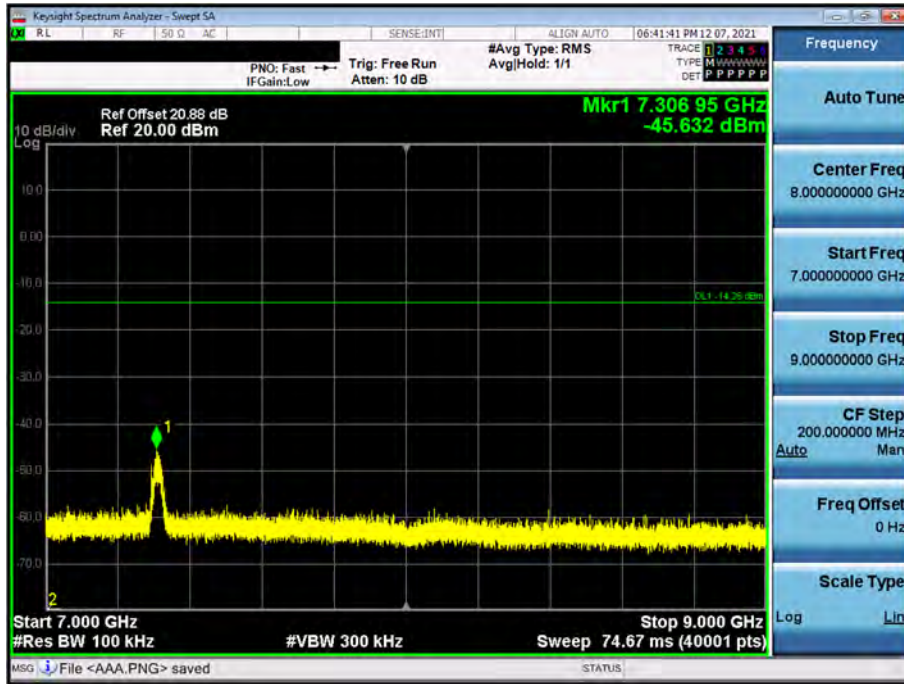


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

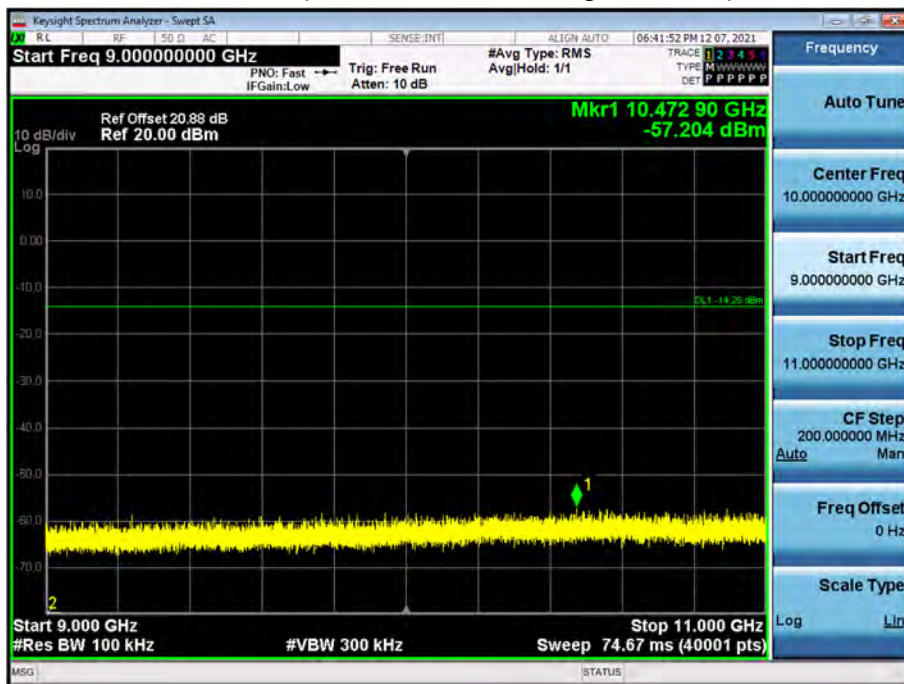


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

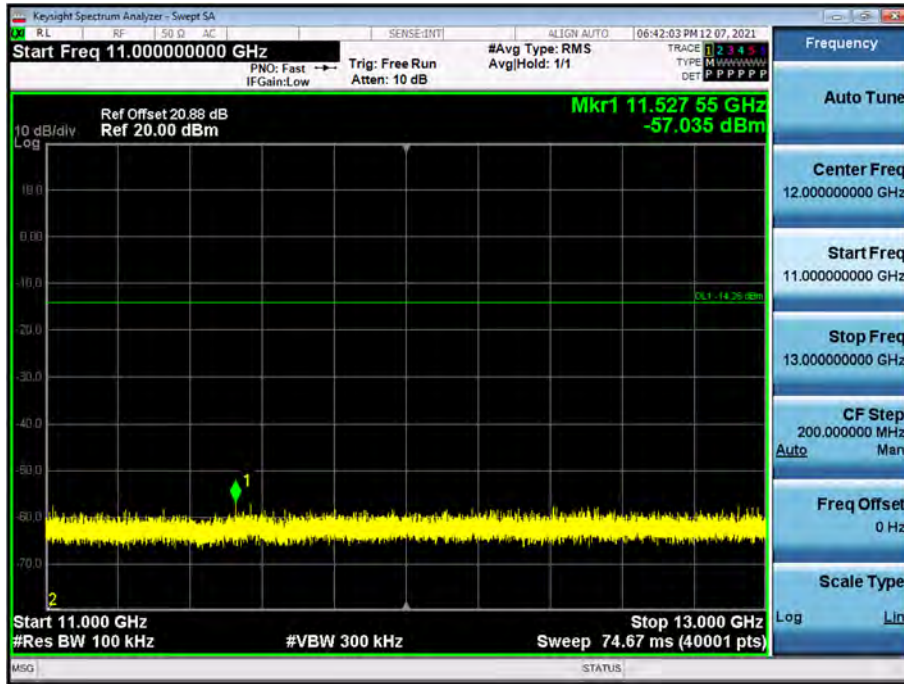


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

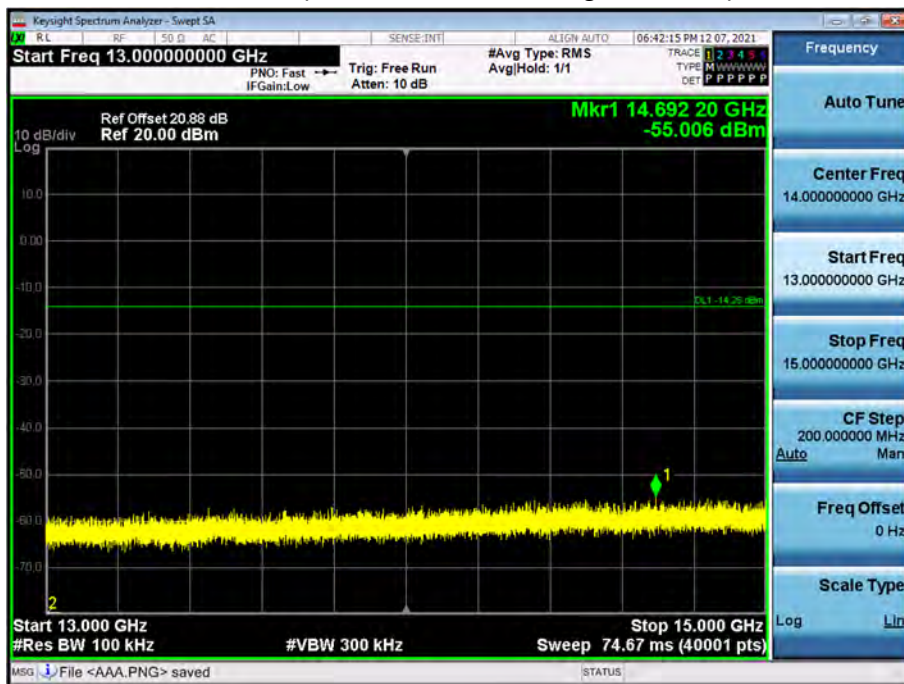


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

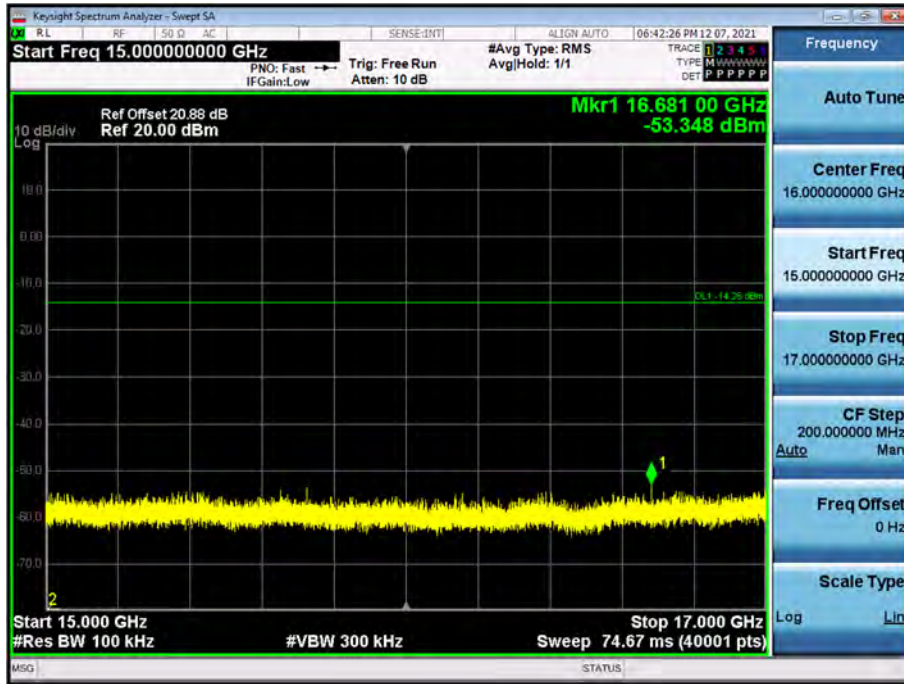


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

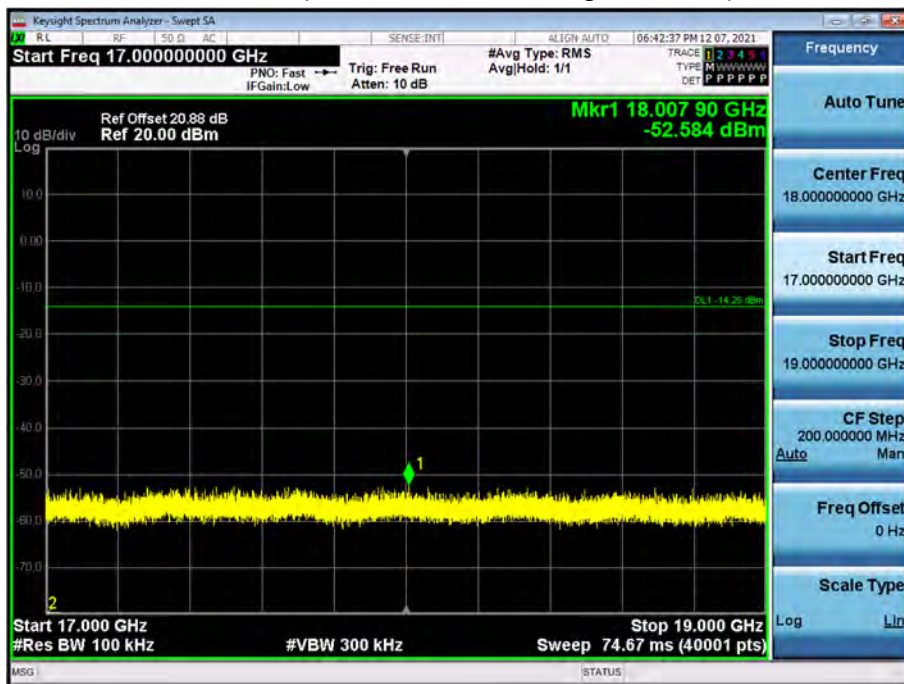


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

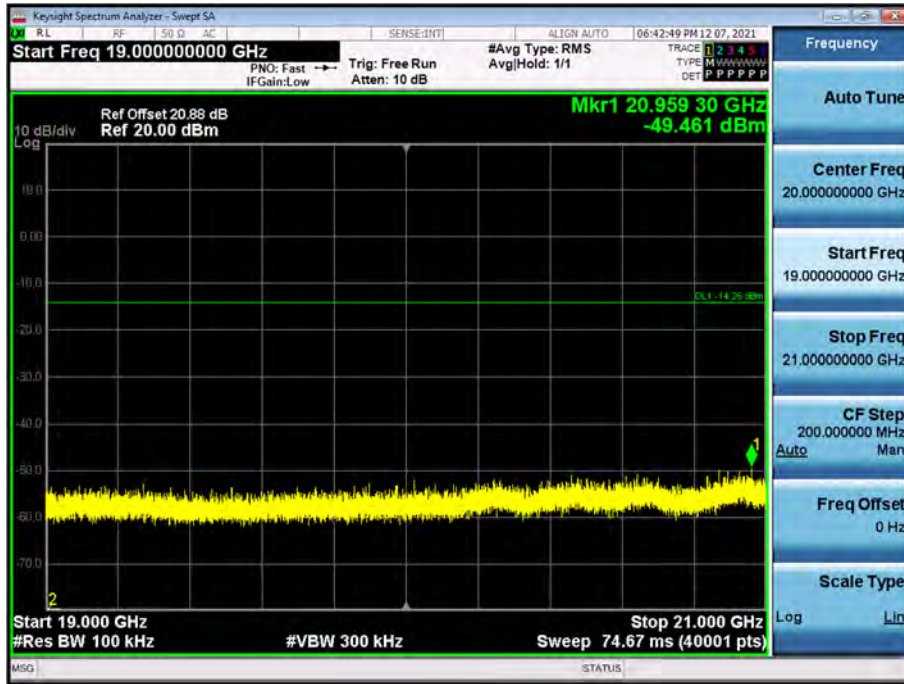


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

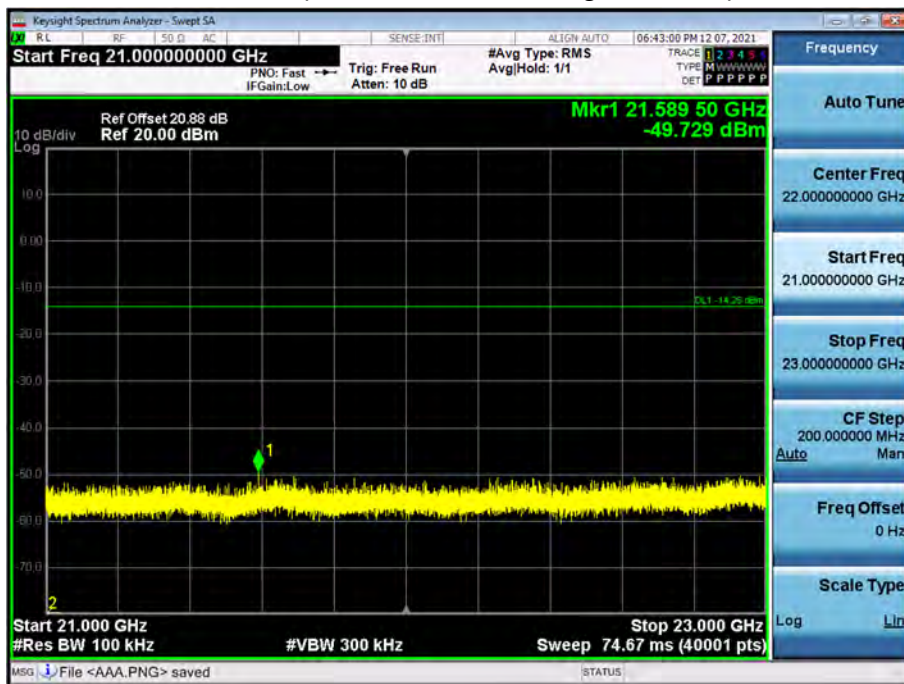

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11g_Ch.6_6 Mbps)

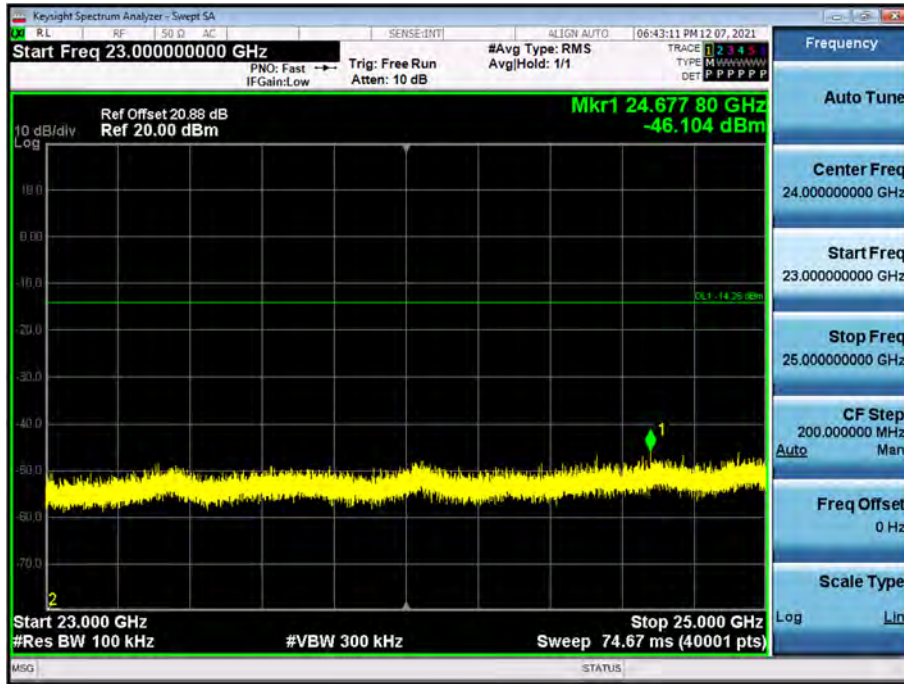

Note:

Limit : -14.26 dBm

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Note:

1. The Measured Level of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency	Measured Level	AF+CL+DF-AG	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
4824	46.06	3.48	V	49.54	73.98	24.44	PK
4824	38.30	3.48	V	41.78	53.98	12.20	AV
7236	47.84	8.67	V	56.51	73.98	17.47	PK
7236	41.51	8.67	V	50.18	53.98	3.80	AV
4824	45.63	3.48	H	49.11	73.98	24.87	PK
4824	37.62	3.48	H	41.10	53.98	12.88	AV
7236	47.02	8.67	H	55.69	73.98	18.29	PK
7236	40.61	8.67	H	49.28	53.98	4.70	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency	Measured Level	AF+CL+DF-AG	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
4874	44.81	3.19	V	48.00	73.98	25.98	PK
4874	37.65	3.19	V	40.84	53.98	13.14	AV
7311	45.93	9.41	V	55.34	73.98	18.64	PK
7311	38.21	9.41	V	47.62	53.98	6.36	AV
4874	45.25	3.19	H	48.44	73.98	25.54	PK
4874	37.55	3.19	H	40.74	53.98	13.24	AV
7311	46.25	9.41	H	55.66	73.98	18.32	PK
7311	38.83	9.41	H	48.24	53.98	5.74	AV

Operation Mode:	802.11b
Transfer MCS Index:	1 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency	Measured Level	AF+CL+DF-AG	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
4924	43.65	2.54	V	46.19	73.98	27.79	PK
4924	34.80	2.54	V	37.34	53.98	16.64	AV
7386	44.91	10.04	V	54.95	73.98	19.03	PK
7386	36.91	10.04	V	46.95	53.98	7.03	AV
4924	44.39	2.54	H	46.93	73.98	27.05	PK
4924	34.25	2.54	H	36.79	53.98	17.19	AV
7386	44.95	10.04	H	54.99	73.98	18.99	PK
7386	36.83	10.04	H	46.87	53.98	7.11	AV

Note:


All Modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

- Worstcase : 802.11b


▣ Test Plots (Worst case : Y-V)

Radiated Spurious Emissions plot – Average Result (802.11b, Ch.1 3rd Harmonic)

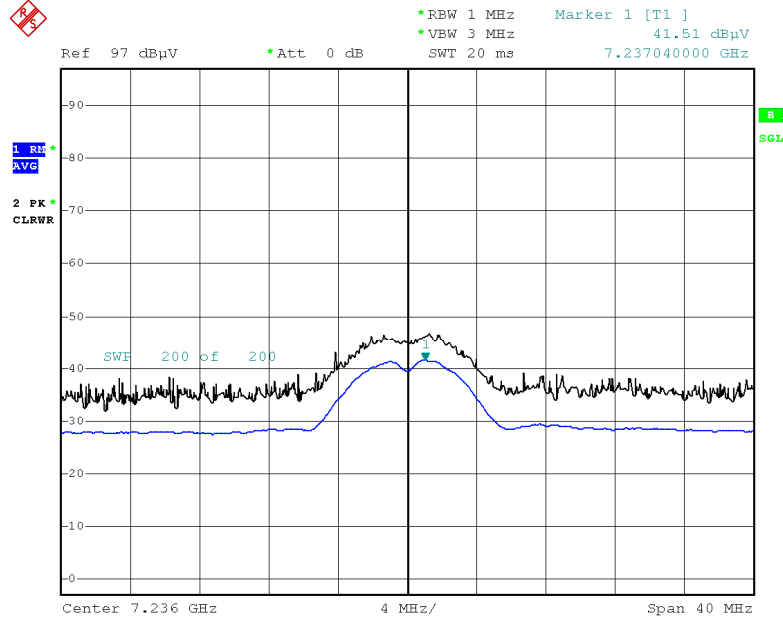

Date: 3.DEC.2021 10:37:17

Radiated Spurious Emissions plot – Peak Result (802.11b, Ch.1 3rd Harmonic)

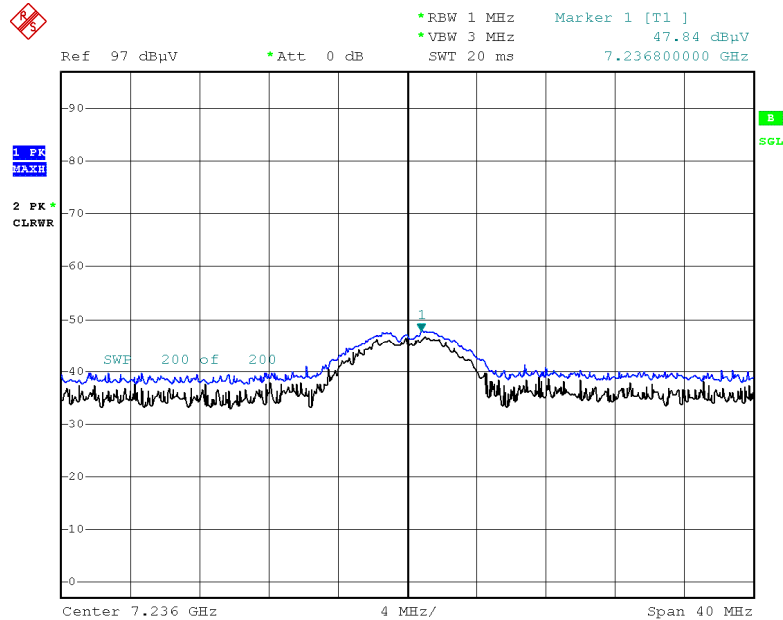

Date: 3.DEC.2021 10:37:32

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 10 Ch, 11 Ch

Frequency [MHz]	Measured Level [dB μ V]	AF+CL+DF [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2310-2390	22.977	33.78	H	56.76	73.98	17.22	PK
2310-2390	14.934	33.78	H	48.71	53.98	5.27	AV
2310-2390	23.415	33.78	V	57.19	73.98	16.79	PK
2310-2390	15.472	33.78	V	49.25	53.98	4.73	AV
2483.5-2500	22.452	34.10	H	56.55	73.98	17.43	PK
2483.5-2500	13.072	34.10	H	47.17	53.98	6.81	AV
2483.5-2500	23.052	34.10	V	57.15	73.98	16.83	PK
2483.5-2500	13.890	34.10	V	47.99	53.98	5.99	AV
2483.5-2500	22.459	34.10	H	56.56	73.98	17.42	PK
2483.5-2500	13.250	34.10	H	47.35	53.98	6.63	AV
2483.5-2500	22.934	34.10	V	57.03	73.98	16.95	PK
2483.5-2500	14.477	34.10	V	48.58	53.98	5.40	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2417 MHz, 2422 MHz
Channel No.	01 Ch, 02 Ch, 03 Ch

Frequency	Measured Level	Duty Cycle Factor	AF+CL+DF	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2310-2390	28.679	0.000	33.78	H	62.46	73.98	11.52	PK
2310-2390	12.423	0.297	33.78	H	46.50	53.98	7.48	AV
2310-2390	31.600	0.000	33.78	V	65.38	73.98	8.60	PK
2310-2390	15.587	0.297	33.78	V	49.66	53.98	4.32	AV
2310-2390	28.769	0.000	33.78	H	62.55	73.98	11.43	PK
2310-2390	12.698	0.297	33.78	H	46.77	53.98	7.21	AV
2310-2390	30.506	0.000	33.78	V	64.28	73.98	9.70	PK
2310-2390	15.859	0.297	33.78	V	49.93	53.98	4.05	AV
2310-2390	29.193	0.000	33.78	H	62.97	73.98	11.01	PK
2310-2390	12.886	0.297	33.78	H	46.96	53.98	7.02	AV
2310-2390	31.070	0.000	33.78	V	64.85	73.98	9.13	PK
2310-2390	15.927	0.297	33.78	V	50.00	53.98	3.98	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2447 MHz, 2452 MHz, 2457 MHz, 2462 MHz
Channel No.	08 Ch, 09 Ch, 10 Ch, 11 Ch

Frequency	Measured Level	Duty Cycle Factor	AF+CL+DF	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2483.5-2500	27.293	0.000	34.10	H	61.39	73.98	12.59	PK
2483.5-2500	13.401	0.297	34.10	H	47.80	53.98	6.18	AV
2483.5-2500	30.516	0.000	34.10	V	64.62	73.98	9.36	PK
2483.5-2500	16.425	0.297	34.10	V	50.82	53.98	3.16	AV
2483.5-2500	27.031	0.000	34.10	H	61.13	73.98	12.85	PK
2483.5-2500	13.292	0.297	34.10	H	47.69	53.98	6.29	AV
2483.5-2500	29.497	0.000	34.10	V	63.60	73.98	10.38	PK
2483.5-2500	16.138	0.297	34.10	V	50.53	53.98	3.45	AV
2483.5-2500	27.691	0.000	34.10	H	61.79	73.98	12.19	PK
2483.5-2500	12.399	0.297	34.10	H	46.80	53.98	7.18	AV
2483.5-2500	29.422	0.000	34.10	V	63.52	73.98	10.46	PK
2483.5-2500	15.740	0.297	34.10	V	50.14	53.98	3.84	AV
2483.5-2500	30.965	0.000	34.10	H	65.06	73.98	8.92	PK
2483.5-2500	13.596	0.297	34.10	H	47.99	53.98	5.99	AV
2483.5-2500	33.231	0.000	34.10	V	67.33	73.98	6.65	PK
2483.5-2500	16.460	0.297	34.10	V	50.86	53.98	3.12	AV

Operation Mode:	802.11n (HT20)
Transfer Rate:	MCS0
Operating Frequency	2412 MHz, 2417 MHz, 2422 MHz
Channel No.	01 Ch, 02 Ch, 03 Ch

Frequency	Measured Level	Duty Cycle Factor	AF+CL+DF	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2310-2390	30.943	0.000	33.78	H	64.72	73.98	9.26	PK
2310-2390	14.428	0.320	33.78	H	48.53	53.98	5.45	AV
2310-2390	33.473	0.000	33.78	V	67.25	73.98	6.73	PK
2310-2390	16.041	0.320	33.78	V	50.14	53.98	3.84	AV
2310-2390	27.993	0.000	33.78	H	61.77	73.98	12.21	PK
2310-2390	14.010	0.320	33.78	H	48.11	53.98	5.87	AV
2310-2390	29.572	0.000	33.78	V	63.35	73.98	10.63	PK
2310-2390	15.693	0.320	33.78	V	49.79	53.98	4.19	AV
2310-2390	28.487	0.000	33.78	H	62.27	73.98	11.71	PK
2310-2390	14.397	0.320	33.78	H	48.50	53.98	5.48	AV
2310-2390	30.892	0.000	33.78	V	64.67	73.98	9.31	PK
2310-2390	16.287	0.320	33.78	V	50.39	53.98	3.59	AV

Operation Mode:	802.11n (HT20)
Transfer Rate:	MCS0
Operating Frequency	2447 MHz, 2452 MHz, 2457 MHz, 2462 MHz
Channel No.	08 Ch, 09 Ch, 10 Ch, 11 Ch

Frequency	Measured Level	Duty Cycle Factor	AF+CL+DF	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2483.5-2500	28.019	0.000	34.10	H	62.12	73.98	11.86	PK
2483.5-2500	13.246	0.320	34.10	H	47.67	53.98	6.31	AV
2483.5-2500	30.288	0.000	34.10	V	64.39	73.98	9.59	PK
2483.5-2500	15.460	0.320	34.10	V	49.88	53.98	4.10	AV
2483.5-2500	28.027	0.000	34.10	H	62.13	73.98	11.85	PK
2483.5-2500	13.339	0.320	34.10	H	47.76	53.98	6.22	AV
2483.5-2500	30.637	0.000	34.10	V	64.74	73.98	9.24	PK
2483.5-2500	15.159	0.320	34.10	V	49.58	53.98	4.40	AV
2483.5-2500	28.027	0.000	34.10	H	62.13	73.98	11.85	PK
2483.5-2500	13.339	0.320	34.10	H	47.76	53.98	6.22	AV
2483.5-2500	30.637	0.000	34.10	V	64.74	73.98	9.24	PK
2483.5-2500	15.159	0.320	34.10	V	49.58	53.98	4.40	AV
2483.5-2500	30.750	0.000	34.10	H	64.85	73.98	9.13	PK
2483.5-2500	13.434	0.320	34.10	H	47.85	53.98	6.13	AV
2483.5-2500	32.193	0.000	34.10	V	66.29	73.98	7.69	PK
2483.5-2500	15.056	0.320	34.10	V	49.48	53.98	4.50	AV

▣ Test Plots

Radiated Restricted Band Edges plot – Average Result (802.11g Ch.11, Y-V)



Radiated Restricted Band Edges plot – Peak Result (802.11g Ch.11, Y-V)



Note:

Plot of worst case are only reported.

9.8 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB

No Critical peaks found

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
Test Receiver	ESCI	Rohde & Schwarz	100033	06/15/2022	Annual
Temperature Chamber	SU-642	ESPAC	0093008124	03/15/2022	Annual
Signal Analyzer	N9020A	Agilent	MY47380318	01/28/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49431210	01/11/2022	Annual
Power Meter	N1911A	Agilent	MY45100523	04/08/2022	Annual
Power Sensor	N1921A	Agilent	MY57820067	04/08/2022	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2022	Annual
Power Splitter	11667B	Hewlett Packard	05001	05/20/2022	Annual
DC Power Supply	E3632A	Hewlett Packard	KR75303960	06/10/2022	Annual
Attenuator	5910-N-50-010	H+S	00801	10/29/2022	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	FCC WLAN&BT&BLE Conducted Test Software v3.0	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100422	05/04/2022	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller (Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	2090	Emco	060520	N/A	N/A
Turn Table	Turn Table	Ets	N/A	N/A	N/A
Loop Antenna	Loop Antenna	Rohde & Schwarz	1513-333	03/19/2022	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	09/04/2022	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Horn Antenna (15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170541	11/16/2023	Biennial
Spectrum Analyzer	FSP (9 kHz ~ 30 GHz)	Rohde & Schwarz	836650/016	09/13/2022	Annual
Spectrum Analyzer	FSV40-N	Rohde & Schwarz	101068-SZ	09/15/2022	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/06/2022	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/08/2022	Annual
Attenuator 56-10	CBLU1183540B-01 56-10	CERNEX WEINSCHTEL	N/A	12/23/2021	Annual
Broadband Low Noise Amplifier Attenuator (3 dB)	CBL06185030 18B-03	CERNEX Api tech.	N/A	12/23/2021	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	N/A	12/23/2021	Annual
High Pass Filter	WHKX8-6090-7000-18000-40SS	Wainwright Instruments	N/A	12/23/2021	Annual
Thru	COAXIAL ATTENUATOR	T&M SYSTEM	N/A	12/23/2021	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000276	03/09/2022	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2112-FI005-P