



On your side

HCT

TEST REPORT

FCC/ISED UNII Test for IAGL-NHT1
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2112-FI006-R1

DATE OF ISSUE
December 24, 2021

Tested by
Jin Gwan Lee

Technical Manager
Jong Seok Lee

Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401



| | |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <h1 style="margin: 0;">TEST REPORT</h1> <p style="margin: 0;">FCC/ISED UNII Test for IAGL-NHT1</p> | <p>REPORT NO. HCT-RF-2112-FI006-R1</p> <p>DATE OF ISSUE December 24, 2021</p> <p>Additional Model -</p> |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|

Applicant **LG Electronics Inc.**
222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Republic of Korea

| | |
|--------------------------------|-----------------------------------------------------------------------------|
| Eut Type Model Name | Lotus Gamma2 IAGL-NHT1 |
| FCC ID IC | BEJIAGL-NHT1 2703H-IAGLNHT1 |
| Modulation type | OFDM |
| FCC Classification | Unlicensed National Information Infrastructure(NII) |
| FCC Rule Part(s) | Part 15.407 |
| ISED Rule Part(s) | RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 1 (March 2019) |

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue | Description |
|--------------|-------------------|-------------------------------------------------------------------|
| 0 | December 14, 2021 | Initial Release |
| 1 | December 24, 2021 | - Revised IC number on page 2 - Revised Antenna gain on page 5 |

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

KOLAS Statement:

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (KOLAS Accreditation No. KT197)

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

| | |
|--------------------------------------|-----|
| 1. GENERAL INFORMATION | 5 |
| EUT DESCRIPTION | 5 |
| ANTENNA CONFIGURATIONS | 7 |
| 2. MAXIMUM OUTPUT POWER | 8 |
| 3. TEST METHODOLOGY | 9 |
| EUT CONFIGURATION | 9 |
| EUT EXERCISE | 9 |
| GENERAL TEST PROCEDURES | 9 |
| DESCRIPTION OF TEST MODES | 10 |
| 4. INSTRUMENT CALIBRATION | 10 |
| 5. FACILITIES AND ACCREDITATIONS | 10 |
| 5.1 FACILITIES | 10 |
| 5.2 EQUIPMENT | 10 |
| 6. ANTENNA REQUIREMENTS | 11 |
| 7. MEASUREMENT UNCERTAINTY | 11 |
| 8. DESCRIPTION OF TESTS | 12 |
| 9. SUMMARY OF TEST RESULTS | 33 |
| 10. TEST RESULT | 35 |
| 10.1 DUTY CYCLE | 35 |
| 10.2 26dB BANDWIDTH & 99 % BANDWIDTH | 38 |
| 10.3 6DB BANDWIDTH | 48 |
| 10.4 OUTPUT POWER MEASUREMENT | 58 |
| 10.5 POWER SPECTRAL DENSITY | 70 |
| 10.6 FREQUENCY STABILITY. | 85 |
| 10.6.1 80MHz BW | 85 |
| 10.7 RADIATED SPURIOUS EMISSIONS | 101 |
| 10.8 RADIATED RESTRICTED BAND EDGE | 107 |
| 10.9 RECEIVER SPURIOUS EMISSIONS | 121 |
| 11. LIST OF TEST EQUIPMENT | 122 |
| 12. ANNEX A_ TEST SETUP PHOTO | 124 |

1. GENERAL INFORMATION

EUT DESCRIPTION

| | | |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| Model | IAGL-NHT1 | |
| Additional Model | - | |
| EUT Type | Lotus Gamma2 | |
| Power Supply | DC 12.0 V | |
| Modulation Type | OFDM : 802.11a, 802.11n, 802.11ac | |
| Frequency Range (MHz) | U-NII-1 | 20MHz BW : 5180 - 5240 40MHz BW : 5190 - 5230 80MHz BW : 5210 |
| | U-NII-3 | 20MHz BW : 5745 - 5825 40MHz BW : 5755 - 5795 80MHz BW : 5775 |
| Antenna Specification | Antenna type: dipole antenna Ant1 Peak Gain : 1.77 dBi(UNII 1)/ 1.99 dBi(UNII 3) Ant2 Peak Gain : 1.77 dBi(UNII 1)/ 1.99 dBi(UNII 3) | |
| Straddle channel | Supported | |
| TDWR Band | Not Supported | |
| Dynamic Frequency Selection | Slave without radar detection | |
| Date(s) of Tests | November 02, 2021 ~ December 13, 2021 | |
| PMN (Product Marketing Number) | Lotus Gamma2 | |
| HVIN (Hardware Version Identification Number) | IAGL-NHT1 | |
| FVIN (Firmware Version Identification Number) | IP10 | |
| HMN (Host Marketing Name) | N/A | |
| EUT serial numbers | Radiated : IAGL-NHT1002 Conducted : IAGL-NHT1001 | |
| Manufacturer | LG Electronics Inc. 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Republic of Korea | |

Factory

1. LG INNOTEK YANTAI CO., LTD.

No. 36, Taibei North Road, Development Zone, Yantai 264006 Shandong P.R. China

2. LG Electronics Vietnam Hai Phong Co., Ltd.

Lot CN2, Trang Due Industrial Park, Le Loi Commune, An Duong District, Hai Phong City, Vietnam

3. LG Electronics Inc.

222, LG-ro, Jinwi-myeon Pyeongtaek-si, Gyeonggi-do 17709 Republic of Korea

4. LG Electronics Mława Sp. z o.o.

ul. LG Electronics 706-500 Mława Poland

5. LG Electronics(Kunshan) Co., Ltd.

No. 88, Qianjin East Road, Kunshan City 215300 Jiangsu P.R. China

6. LG ELECTRONICS DO BRASIL LTDA

LG - FILIAL MANAUS

RUA JAVARI 1004 DISTRITO INDUSTRIAL MANAUS - AM, 69075-110, Brazil

7. LG Electronics Nanjing Vehicle Component Co., Ltd.

No.346, Yaoxinda Road, Nanjing Economic and Technological Development Zone, 210038, P.R. China

8. Hitachi-LG Data Storage(Huizhou), Ltd.

Huifeng Fourth Road 42, Zhongkai Hi-Tech Industry Development Zone, Huizhou, Guangdong, 516006 P.R. China

9. HITACHI ELECTRONIC PRODUCTS (M) SDN. BHD

No. 12, Jalan Kemajuan, Bangi Industrial Estate, 43650 Bandar Baru Bangi, Selangor Darul Ehsan, Malaysia

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

| Configurations | SISO | | SDM | CDD |
|-----------------|------|------|-------------|-------------|
| | Ant1 | Ant2 | Ant1 + Ant2 | Ant1 + Ant2 |
| 802.11a | X | X | X | O |
| 802.11n(HT20) | X | X | O | O |
| 802.11n(HT40) | X | X | O | O |
| 802.11ac(VHT20) | X | X | O | O |
| 802.11ac(VHT40) | X | X | O | O |
| 802.11ac(VHT80) | X | X | O | O |

Note:

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity
5. SISO test was performed for the MIMO test result.

2. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01

Directional gain = $10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi

| Band | Ant Gain (dBi) | | Directional Gain = $10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi |
|--------|----------------|------|-------------------------------------------------------------------------------------------------|
| | Ant1 | Ant2 | |
| UNII 1 | Ant1 | 1.77 | 4.78 |
| | Ant2 | 1.77 | |
| UNII 3 | Ant1 | 1.99 | 5.00 |
| | Ant2 | 1.99 | |

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

| Band | Mode | SISO | | | | MIMO | |
|-------|------------------|------------|-------|------------|-------|---------------------|-------|
| | | Ant1 Power | | Ant2 Power | | Ant 1 + Ant 2 Power | |
| | | (dBm) | (W) | (dBm) | (W) | (dBm) | (W) |
| UNII1 | 802.11a | 7.55 | 0.006 | 3.83 | 0.002 | 9.06 | 39.57 |
| | 802.11n (HT20) | 7.40 | 0.005 | 3.71 | 0.002 | 8.96 | 39.52 |
| | 802.11n (HT40) | 7.86 | 0.006 | 3.68 | 0.002 | 9.25 | 39.66 |
| | 802.11ac (VHT20) | 7.43 | 0.006 | 3.83 | 0.002 | 99.01 | 49.96 |
| | 802.11ac (VHT40) | 7.70 | 0.006 | 3.48 | 0.002 | 9.10 | 39.59 |
| | 802.11ac (VHT80) | 7.89 | 0.006 | 3.56 | 0.002 | 9.26 | 39.67 |
| UNII3 | 802.11a | 11.98 | 0.016 | 12.7 | 0.019 | 32.13 | 45.07 |
| | 802.11n (HT20) | 11.96 | 0.016 | 12.57 | 0.018 | 31.41 | 44.97 |
| | 802.11n (HT40) | 11.36 | 0.014 | 12.42 | 0.017 | 26.70 | 44.27 |
| | 802.11ac (VHT20) | 11.97 | 0.016 | 12.68 | 0.019 | 31.89 | 45.04 |
| | 802.11ac (VHT40) | 11.40 | 0.014 | 12.37 | 0.017 | 26.97 | 44.31 |
| | 802.11ac (VHT80) | 12.14 | 0.016 | 12.35 | 0.017 | 25.74 | 44.11 |

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407 / RSS-Gen (Issue 5) Section 8:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance

| Parameter | Expanded Uncertainty (\pm dB) |
|------------------------------------------|--------------------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.82 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (9 kHz ~ 30 MHz) | 3.40 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (30 MHz ~ 1 GHz) | 4.80 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (1 GHz ~ 18 GHz) | 5.70 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (18 GHz ~ 40 GHz) | 5.05 (Confidence level about 95 %, $k=2$) |

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

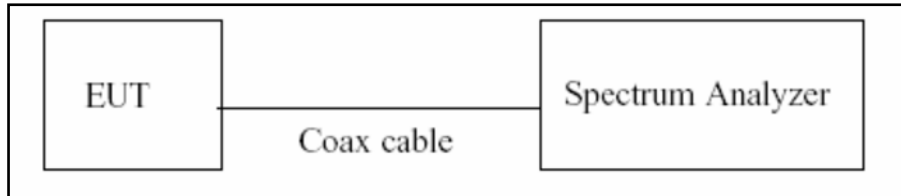

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 6 dB Bandwidth & 26 dB Bandwidth & 99 % Bandwidth

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

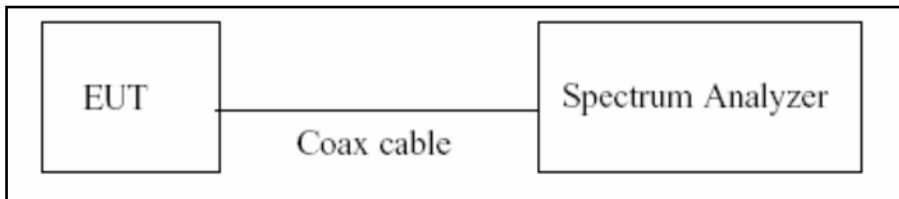

Test Procedure(26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW \geq 3 x RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW \cong 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.


8.3. Output Power Measurement

Limit


| Band | Limit |
|--------|-------------------------------------------------------------------------------|
| UNII 1 | - Master : Not exceed 1 W(=30 dBm) - Slave : Not exceed 250 mW(=23.98 dBm) |
| UNII 3 | Not exceed 1 W(=30 dBm) |

Test Configuration

Power Meter

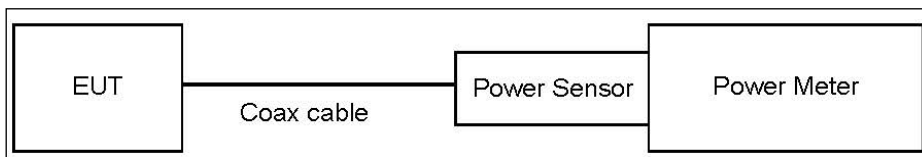

Spectrum Analyzer(Only Straddle Channel)

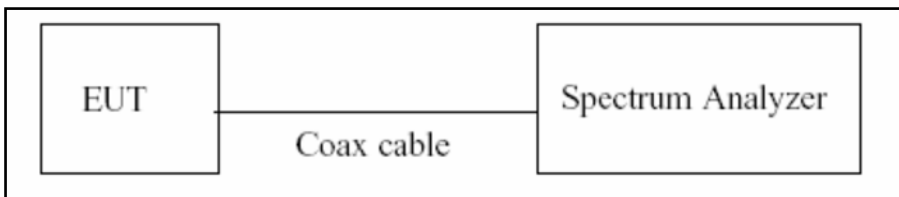

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure(Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep \geq 2 x span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

| Band | Loss(dB) |
|--------|----------|
| UNII 1 | 21.89 |
| UNII 3 | 21.89 |


(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Limit

| Band | Limit |
|--------|----------------|
| UNII 1 | 11 dBm/MHz |
| UNII 3 | 30 dBm/500 kHz |

Test Configuration

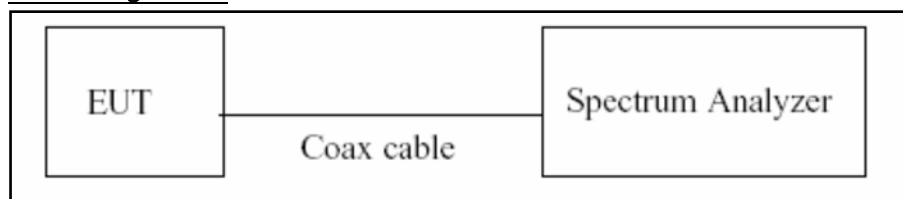

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW \geq 3 MHz
4. Number of points in sweep \geq 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

| Band | Loss(dB) |
|--------|----------|
| UNII 1 | 20.89 |
| UNII 3 | 20.89 |


(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

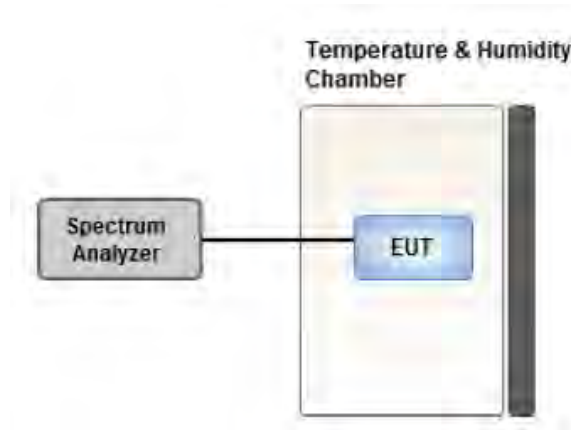

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.6. Radiated Test

Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

2. UNII 3: All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

3. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.

FCC

| Frequency (MHz) | Field Strength (μV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30 | 30 | 30 |

ISED


| Frequency (MHz) | Field Strength (μA/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490 | 6.37/F(kHz) | 300 |
| 0.490 – 1.705 | 63.7/F(kHz) | 30 |
| 1.705 – 30 | 0.08 | 30 |

FCC&ISED


| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Test Configuration


Below 30 MHz

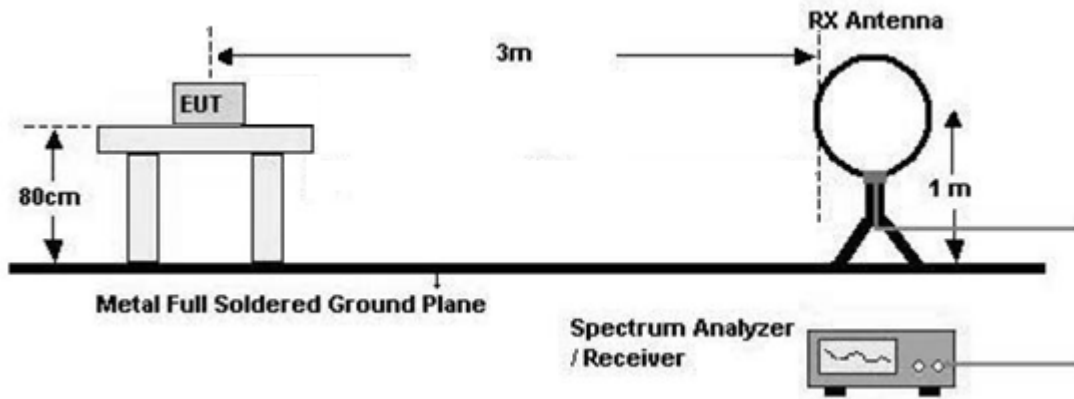

30 MHz - 1 GHz

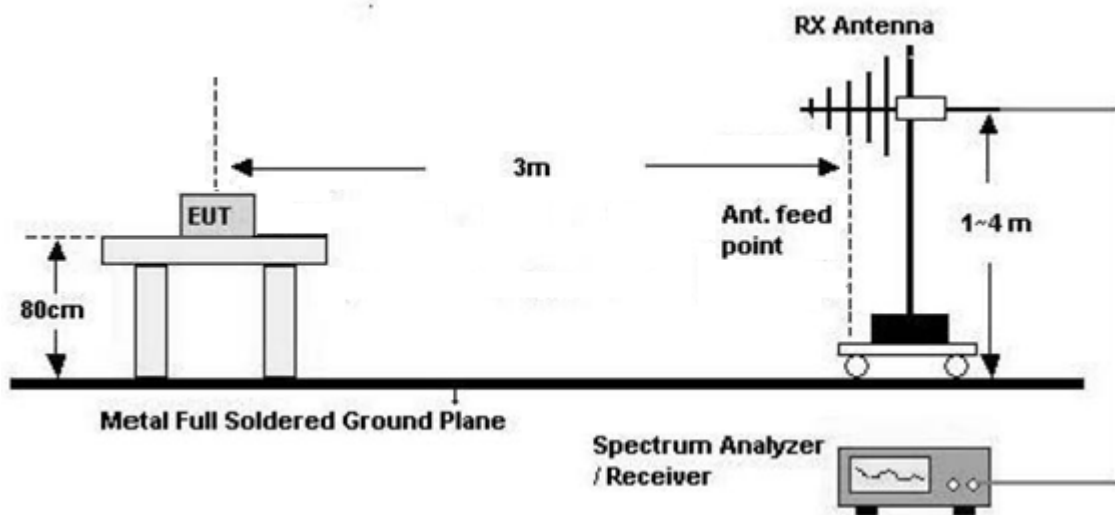

Above 1 GHz

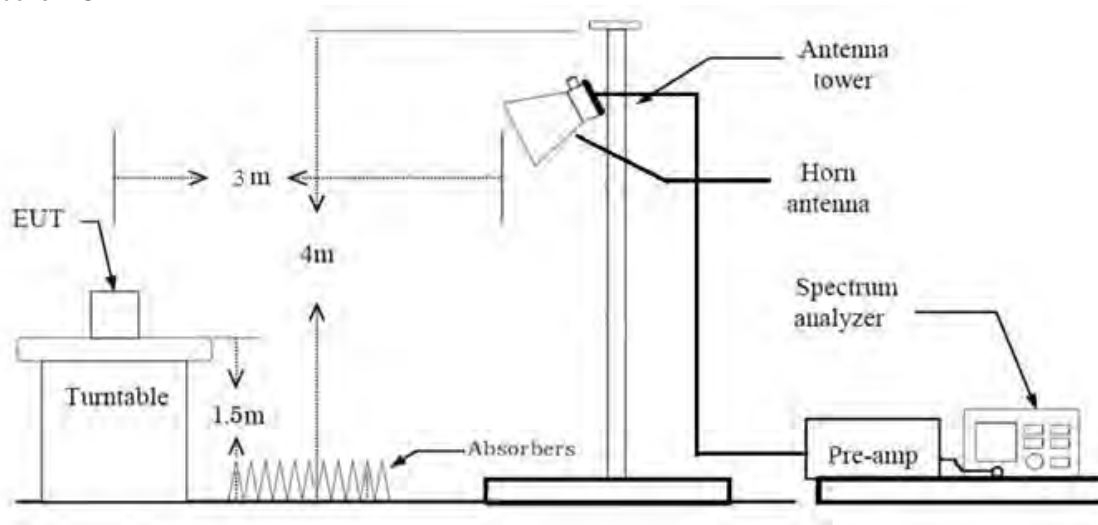

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = VBW \leq RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW \geq $1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = $VBW \geq 1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measured Frequency Range :

- 4 500 MHz ~ 5 150 MHz
- 5 250 MHz ~ 5 350 MHz
- (75 MHz or more below the 5 725 MHz) ~ 5 725 MHz
- 5 850 MHz ~ (75 MHz or more above the 5 850 MHz)

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Attenuator
+ Distance Factor(D.F)

The actual setting value of VBW

| Mode | Worst Data rate (Mbps) | Duty Cycle | Duty Cycle Factor (dB) | The actual setting value of VBW (Hz) |
|-----------------|------------------------|------------|------------------------|--------------------------------------|
| 802.11a | 6 | 0.934 | 0.298 | 1 000 |
| 802.11n(HT20) | MCS 0(6.5) | 0.930 | 0.315 | 1 000 |
| 802.11n(HT40) | MCS 0(13.5) | 0.869 | 0.610 | 3 000 |
| 802.11ac(VHT20) | MCS 0(6.5) | 0.930 | 0.313 | 1 000 |
| 802.11ac(VHT40) | MCS 0(13.5) | 0.868 | 0.614 | 3 000 |
| 802.11ac(VHT80) | MCS 0(29.3) | 0.767 | 1.154 | 10 000 |

8.7. Receiver Spurious Emissions

Limit


| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration

30 MHz - 1 GHz

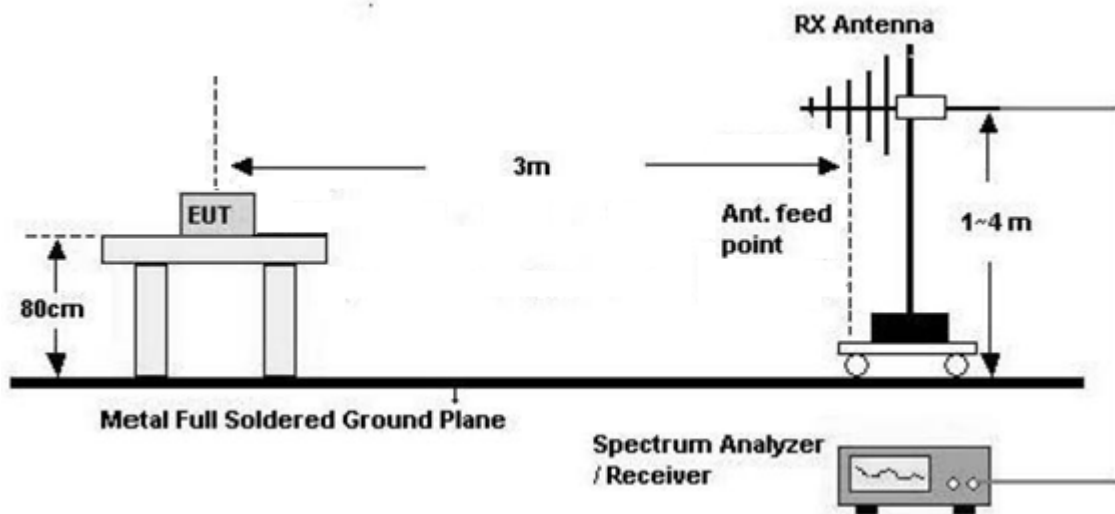

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):


- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

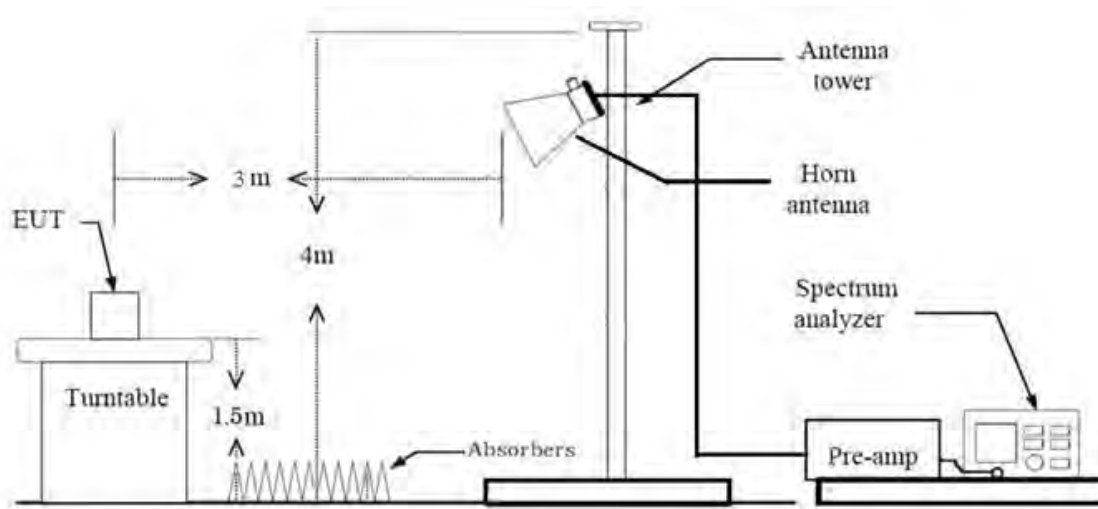

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

8.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
 - Mode : Ant1+Ant2(CDD,SDM)
 - Worstcase : Ant1+Ant2(CDD)
3. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : Z
4. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11a : 6Mbps
 - 802.11n : MCS0
 - 802.11ac : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. Because this EUT is used DC.

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.
2. MIMO were tested and the all case results are reported.
 - Mode : Ant1+Ant2(CDD)

9. SUMMARY OF TEST RESULTS

FCC

| Test Description | FCC Part Section(s) | Test Limit | Test Condition | Test Result |
|------------------------------------------------------------------------------|-------------------------------------|--------------------------------------------------------------------------------|----------------|-----------------|
| 26dB Bandwidth | § 15.407 (for Power Measurement) | N/A | Conducted | PASS |
| 6 dB Bandwidth | § 15.407(e) | >500 kHz (5725-5850 MHz) | | PASS |
| Maximum Conducted Output Power | § 15.407(a)(1),(3) | < 250 mW(5150-5250 MHz) <1 W(5725-5850 MHz) | | PASS |
| Peak Power Spectral Density | § 15.407(a)(1),(3) | <11 dBm/ MHz (5150-5250 MHz) <30 dBm/500 kHz(5725-5850 MHz) | | PASS |
| Frequency Stability | § 15.407(g) § 2.1055 | Maintained within the band | | PASS |
| AC Conducted Emissions 150 kHz-30 MHz | § 15.207 § 15.407(b)(8) | <FCC 15.207 limits | | N/A (#Note1) |
| Undesirable Emissions | § 15.407(b) (1)(2)(3)(4) | <-27 dBm/MHz EIRP (UNII1) cf. Section 8.7 (UNII 3) | Radiated | PASS |
| General Field Strength Limits(Restricted Bands and Radiated Emission Limits) | § 15.205, 15.407(b)(9), (10) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | | PASS |

#Note1 : Not Tested.

| ISED | | | | |
|------------------------------------------------------------------------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|
| Test Description | ISED Part Section(s) | Test Limit | Test Condition | Test Result |
| 99% Bandwidth | RSS-GEN, 6.7 | N/A | CONDUCTED | PASS |
| 6 dB Bandwidth | RSS-247, 6.2.4.1 | > 500 kHz (5725~5850 MHz) | | PASS |
| Maximum Conducted Output Power | RSS-247, 6.2.4.1 | <1 W (5725-5850 MHz) | | PASS |
| Maximum e.i.r.p | RSS-247, 6.2 | < 30 mW or $1.76+10 \log_{10}$ (BW) dBm (5150-5250 MHz) Whichever power is less | | PASS |
| Power Spectral Density | RSS-247, 6.2.4.1 | <30 dBm/500 kHz(Conducted) (5725-5850 MHz) | | PASS |
| Frequency Stability | RSS-GEN 8.11 | should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. | | PASS |
| AC Conducted Emissions 150 kHz-30 MHz | RSS-GEN, 8.8 | RSS-GEN section 8.8 table 4 | | N/A (#Note1) |
| Undesirable Emissions | RSS-247, 6.2.1.2 | 26 dBc at 5250~5350 MHz (5150~5350 MHz) | PASS | |
| | RSS-247, 6.2 | <-27 dBm/ MHz EIRP (5150-5350 MHz, 5470-5725 MHz) | PASS | |
| | RSS-247, 6.2.4.2 | cf. Section 9.8.1 (UNII 3) | | |
| General Field Strength Limits(Restricted Bands and Radiated Emission Limits) | RSS-Gen, 8.9 RSS-Gen, 8.10 | RSS-Gen section 8.9 table 5, 6 section 8.10 table 7 | RADIATED | PASS |
| Receiver Spurious Emissions | RSS-GEN, 5 RSS-GEN, 7.3 | RSS-GEN section 7.3 table 3 | | PASS |

#Note1 : Not Tested.

10. TEST RESULT

10.1 DUTY CYCLE


| Mode | Data Rate (Mbps) | T _{on} (ms) | T _{total} (ms) | Duty Cycle | Duty Cycle Factor(dB) |
|----------------|------------------|----------------------|-------------------------|------------|-----------------------|
| 802.11a | 6 | 1.428 | 1.529 | 0.934 | 0.298 |
| | 9 | 0.959 | 1.061 | 0.904 | 0.440 |
| | 12 | 0.724 | 0.825 | 0.878 | 0.566 |
| | 18 | 0.492 | 0.593 | 0.829 | 0.812 |
| | 24 | 0.372 | 0.473 | 0.786 | 1.046 |
| | 36 | 0.256 | 0.358 | 0.717 | 1.446 |
| | 48 | 0.196 | 0.297 | 0.658 | 1.818 |
| | 54 | 0.196 | 0.297 | 0.660 | 1.808 |
| Mode | MCS Index | T _{on} (ms) | T _{total} (ms) | Duty Cycle | Duty Cycle Factor(dB) |
| 802.11n (HT20) | 0 | 1.336 | 1.436 | 0.930 | 0.315 |
| | 1 | 0.688 | 0.789 | 0.872 | 0.594 |
| | 2 | 0.472 | 0.573 | 0.824 | 0.843 |
| | 3 | 0.364 | 0.465 | 0.782 | 1.066 |
| | 4 | 0.256 | 0.357 | 0.717 | 1.446 |
| | 5 | 0.200 | 0.301 | 0.664 | 1.778 |
| | 6 | 0.184 | 0.258 | 0.712 | 1.474 |
| | 7 | 0.168 | 0.269 | 0.625 | 2.043 |
| 802.11n (HT40) | 0 | 0.665 | 0.765 | 0.869 | 0.610 |
| | 1 | 0.353 | 0.453 | 0.778 | 1.090 |
| | 2 | 0.248 | 0.349 | 0.710 | 1.486 |
| | 3 | 0.196 | 0.297 | 0.660 | 1.806 |
| | 4 | 0.144 | 0.245 | 0.587 | 2.312 |
| | 5 | 0.116 | 0.217 | 0.535 | 2.713 |
| | 6 | 0.108 | 0.209 | 0.517 | 2.866 |
| | 7 | 0.100 | 0.201 | 0.498 | 3.030 |

| Mode | MCS Index | T _{on} (ms) | T _{total} (ms) | Duty Cycle | Duty Cycle Factor(dB) |
|---------------------|-----------|-------------------------|----------------------------|------------|--------------------------|
| 802.11ac (VHT20) | 0 | 1.344 | 1.444 | 0.930 | 0.313 |
| | 1 | 0.692 | 0.793 | 0.873 | 0.591 |
| | 2 | 0.475 | 0.576 | 0.824 | 0.838 |
| | 3 | 0.368 | 0.469 | 0.784 | 1.054 |
| | 4 | 0.260 | 0.362 | 0.720 | 1.425 |
| | 5 | 0.204 | 0.305 | 0.670 | 1.740 |
| | 6 | 0.188 | 0.289 | 0.650 | 1.871 |
| | 7 | 0.172 | 0.274 | 0.628 | 2.018 |
| | 8 | 0.152 | 0.253 | 0.601 | 2.213 |
| 802.11ac (VHT40) | 0 | 0.668 | 0.769 | 0.868 | 0.614 |
| | 1 | 0.356 | 0.457 | 0.780 | 1.079 |
| | 2 | 0.252 | 0.353 | 0.713 | 1.468 |
| | 3 | 0.200 | 0.301 | 0.665 | 1.771 |
| | 4 | 0.148 | 0.249 | 0.594 | 2.263 |
| | 5 | 0.120 | 0.221 | 0.543 | 2.649 |
| | 6 | 0.112 | 0.213 | 0.526 | 2.792 |
| | 7 | 0.104 | 0.205 | 0.507 | 2.947 |
| | 8 | 0.096 | 0.197 | 0.487 | 3.122 |
| | 9 | 0.088 | 0.189 | 0.466 | 3.314 |
| 802.11ac (VHT80) | 0 | 0.332 | 0.433 | 0.767 | 1.154 |
| | 1 | 0.188 | 0.289 | 0.652 | 1.856 |
| | 2 | 0.140 | 0.241 | 0.581 | 2.355 |
| | 3 | 0.116 | 0.217 | 0.534 | 2.726 |
| | 4 | 0.092 | 0.193 | 0.476 | 3.224 |
| | 5 | 0.080 | 0.181 | 0.444 | 3.524 |
| | 6 | 0.076 | 0.177 | 0.429 | 3.678 |
| | 7 | 0.072 | 0.173 | 0.416 | 3.809 |
| | 8 | 0.068 | 0.169 | 0.402 | 3.961 |
| | 9 | 0.064 | 0.165 | 0.386 | 4.135 |


Note:

In order to simplify the report, attached plots were only lowest datarate.


802.11a

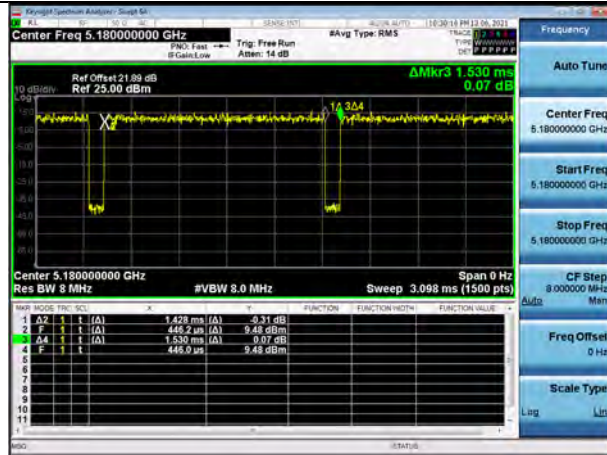


802.11n(HT20)

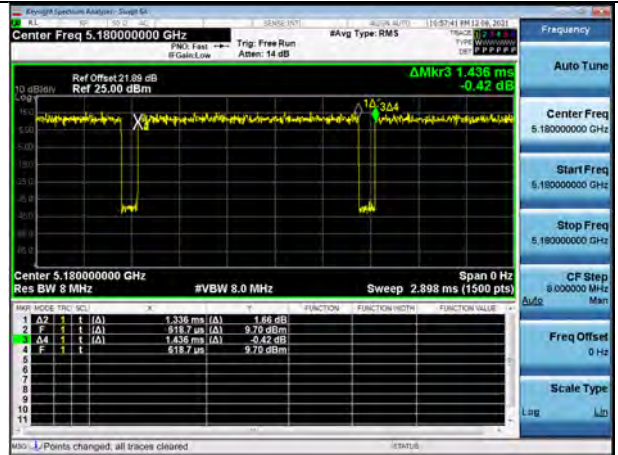


802.11n(HT40)

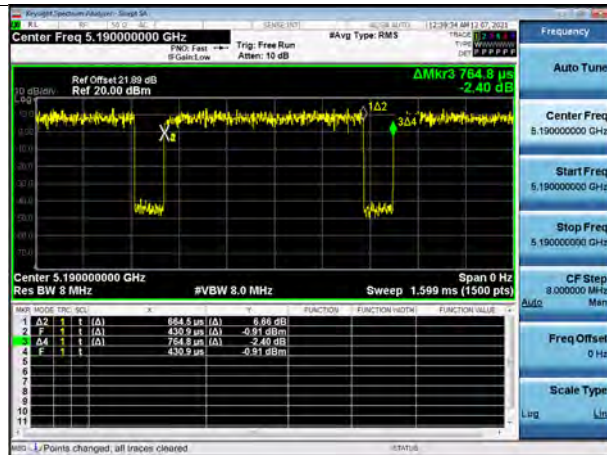


802.11ac(VHT20)

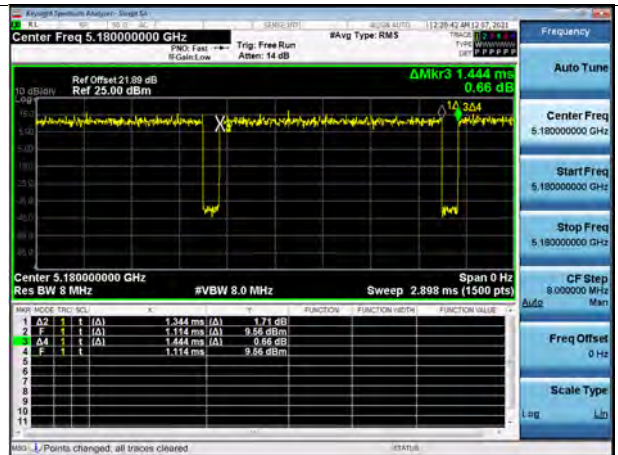

802.11ac(VHT40)

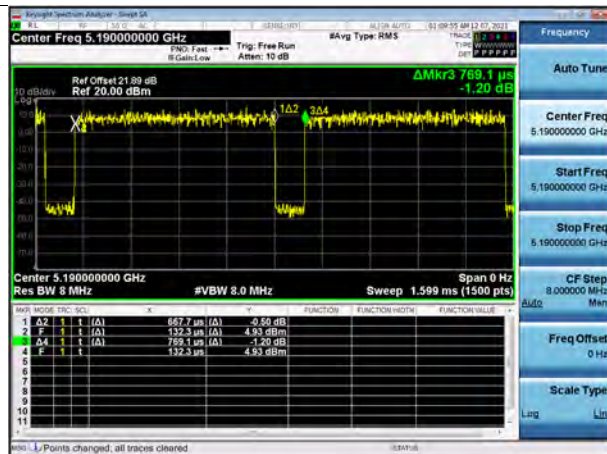

802.11ac(VHT80)

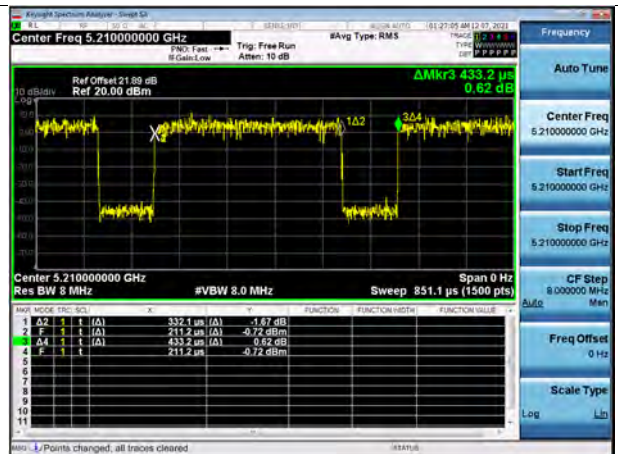

10.2 26dB BANDWIDTH & 99 % BANDWIDTH

[ANT1]

| 802.11a Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|-----------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5180 | 36 | 21.20 | 16.920 |
| 5200 | 40 | 21.08 | 16.891 |
| 5240 | 48 | 21.44 | 16.993 |
| 5745 | 149 | 21.44 | 16.913 |
| 5785 | 157 | 21.12 | 16.909 |
| 5825 | 165 | 21.55 | 16.940 |

| 802.11n(HT20) Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|--------------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5180 | 36 | 21.42 | 17.947 |
| 5200 | 40 | 21.67 | 18.002 |
| 5240 | 48 | 21.59 | 18.046 |
| 5745 | 149 | 21.80 | 18.005 |
| 5785 | 157 | 21.61 | 17.976 |
| 5825 | 165 | 21.83 | 18.017 |

| 802.11n(HT40) Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|--------------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5190 | 38 | 39.80 | 36.257 |
| 5230 | 46 | 39.96 | 36.186 |
| 5755 | 151 | 39.93 | 36.281 |
| 5795 | 159 | 39.93 | 36.333 |

| 802.11ac(VHT20) Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5180 | 36 | 21.44 | 17.931 |
| 5200 | 40 | 21.42 | 17.982 |
| 5240 | 48 | 21.88 | 17.977 |
| 5745 | 149 | 21.82 | 17.998 |
| 5785 | 157 | 21.93 | 18.012 |
| 5825 | 165 | 21.53 | 17.984 |

| 802.11ac(VHT40) Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5190 | 38 | 39.93 | 36.246 |
| 5230 | 46 | 39.78 | 36.157 |
| 5755 | 151 | 39.95 | 36.241 |
| 5795 | 159 | 39.85 | 36.334 |

| 802.11ac(VHT80) Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5210 | 42 | 81.34 | 75.636 |
| 5775 | 155 | 82.54 | 75.596 |

[ANT2]

| 802.11a Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|-----------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5180 | 36 | 21.44 | 16.815 |
| 5200 | 40 | 21.23 | 16.804 |
| 5240 | 48 | 21.34 | 16.815 |
| 5745 | 149 | 21.32 | 16.842 |
| 5785 | 157 | 21.29 | 16.797 |
| 5825 | 165 | 21.56 | 16.812 |

| 802.11n(HT20) Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|--------------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5180 | 36 | 21.22 | 17.834 |
| 5200 | 40 | 21.53 | 17.810 |
| 5240 | 48 | 21.29 | 17.843 |
| 5745 | 149 | 21.46 | 17.860 |
| 5785 | 157 | 21.42 | 17.845 |
| 5825 | 165 | 21.39 | 17.866 |

| 802.11n(HT40) Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|--------------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5190 | 38 | 39.28 | 36.127 |
| 5230 | 46 | 39.53 | 36.086 |
| 5755 | 151 | 39.71 | 36.200 |
| 5795 | 159 | 39.46 | 36.199 |

| 802.11ac(VHT20) Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5180 | 36 | 21.25 | 17.815 |
| 5200 | 40 | 21.34 | 17.827 |
| 5240 | 48 | 21.25 | 17.858 |
| 5745 | 149 | 21.43 | 17.831 |
| 5785 | 157 | 21.49 | 17.910 |
| 5825 | 165 | 21.32 | 17.875 |

| 802.11ac(VHT40) Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5190 | 38 | 39.46 | 36.148 |
| 5230 | 46 | 38.66 | 36.197 |
| 5755 | 151 | 39.25 | 36.202 |
| 5795 | 159 | 39.86 | 36.284 |

| 802.11ac(VHT80) Mode | | 26dB Bandwidth [MHz] | 99% bandwidth [MHz] |
|----------------------|-------------|----------------------|---------------------|
| Frequency [MHz] | Channel No. | | |
| 5210 | 42 | 81.22 | 75.439 |
| 5775 | 155 | 81.22 | 75.409 |

[ANT1]


Note:

In order to simplify the report, attached plots were only the most wide channel.

Test Plots(802.11a)

802.11a UNII 1 BAND 26dB Bandwidth (CH 48)

802.11a UNII 3 BAND 26dB Bandwidth (CH 165)

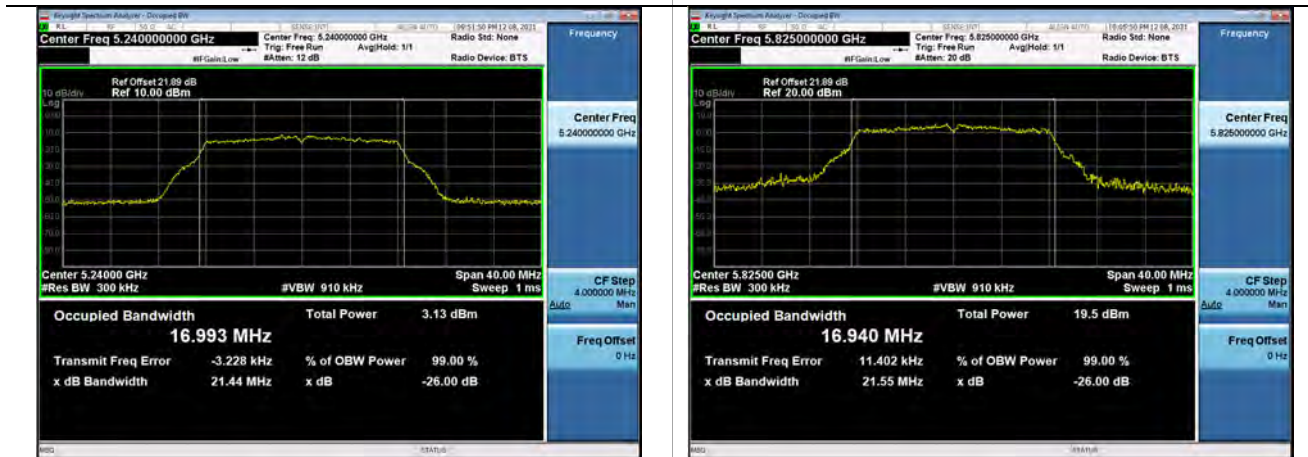

Test Plots(802.11n(HT20))

802.11n_HT20 UNII 1 BAND 26dB Bandwidth(CH 40)

802.11n_HT20 UNII 3 BAND 26dB Bandwidth(CH 165)



Test Plots(802.11n(HT40))

802.11n_HT40 UNII 1 BAND 26dB Bandwidth(CH 46)



802.11n_HT40 UNII 3 BAND 26dB Bandwidth (CH 159)



Test Plots(802.11ac(VHT20))

802.11ac_VHT20 UNII 1 BAND 26dB Bandwidth(CH 48)



802.11ac_VHT20 UNII 3 BAND 26dB Bandwidth(CH 157)



Test Plots(802.11ac(VHT40))

802.11ac_VHT40 UNII 1 BAND 26dB Bandwidth(CH 38)




802.11ac_VHT40 UNII 3 BAND 26dB Bandwidth (CH 151)



Test Plots(802.11ac(VHT80))

802.11ac_VHT80 UNII 1 BAND 26dB Bandwidth(CH 42)

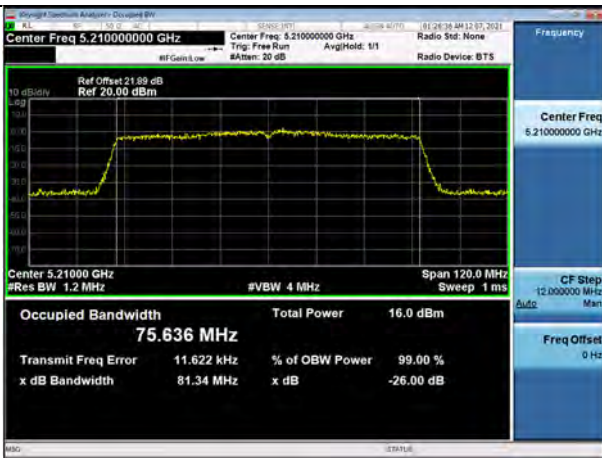

802.11ac_VHT80 UNII 3 BAND 26dB Bandwidth (CH 155)



[ANT2]

Test Plots(802.11a)

802.11a UNII 1 BAND 26dB Bandwidth (CH 36)



802.11a UNII 3 BAND 26dB Bandwidth (CH 165)



Test Plots(802.11n(HT20))

802.11n_HT20 UNII 1 BAND 26dB Bandwidth(CH 40)




802.11n_HT20 UNII 3 BAND 26dB Bandwidth(CH 149)



Test Plots(802.11n(HT40))

802.11n_HT40 UNII 1 BAND 26dB Bandwidth(CH 46)

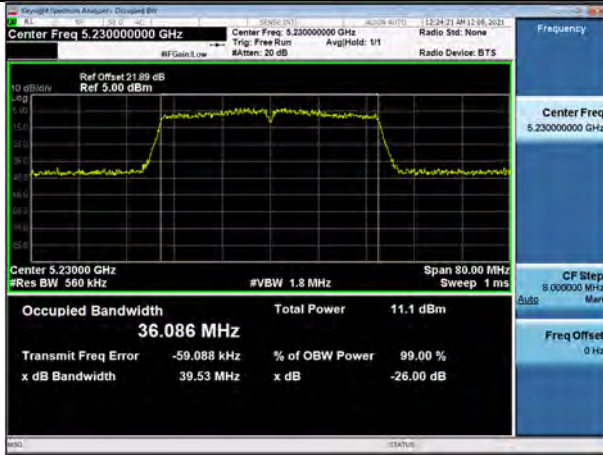

802.11n_HT40 UNII 3 BAND 26dB Bandwidth (CH 151)



Test Plots(802.11ac(VHT20))

802.11ac_VHT20 UNII 1 BAND 26dB Bandwidth(CH 40)



802.11ac_VHT20 UNII 3 BAND 26dB Bandwidth(CH 157)



Test Plots(802.11ac(VHT40))

802.11ac_VHT40 UNII 1 BAND 26dB Bandwidth(CH 38)



802.11ac_VHT40 UNII 3 BAND 26dB Bandwidth (CH 159)



Test Plots(802.11ac(VHT80))

802.11ac_VHT80 UNII 1 BAND 26dB Bandwidth(CH 42)



802.11ac_VHT80 UNII 3 BAND 26dB Bandwidth (CH 155)



10.3 6DB BANDWIDTH
[ANT1]

| 802.11a Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|-----------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5745 | 149 | 16.36 | > 0.5 | Pass |
| 5785 | 157 | 16.33 | > 0.5 | Pass |
| 5825 | 165 | 16.33 | > 0.5 | Pass |

| 802.11n(HT20) Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|--------------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5745 | 149 | 17.58 | > 0.5 | Pass |
| 5785 | 157 | 17.62 | > 0.5 | Pass |
| 5825 | 165 | 17.57 | > 0.5 | Pass |

| 802.11n(HT40) Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|--------------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5755 | 151 | 35.32 | > 0.5 | Pass |
| 5795 | 159 | 35.26 | > 0.5 | Pass |

| 802.11ac(VHT20) Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|----------------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5745 | 149 | 17.61 | > 0.5 | Pass |
| 5785 | 157 | 17.60 | > 0.5 | Pass |
| 5825 | 165 | 17.61 | > 0.5 | Pass |

| 802.11ac(VHT40) Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|----------------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5755 | 151 | 35.27 | > 0.5 | Pass |
| 5795 | 159 | 35.64 | > 0.5 | Pass |

| 802.11ac(VHT80) Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|----------------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5775 | 155 | 75.34 | > 0.5 | Pass |

[ANT2]

| 802.11a Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|-----------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5745 | 149 | 16.35 | > 0.5 | Pass |
| 5785 | 157 | 16.37 | > 0.5 | Pass |
| 5825 | 165 | 16.36 | > 0.5 | Pass |

| 802.11n(HT20) Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|--------------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5745 | 149 | 17.64 | > 0.5 | Pass |
| 5785 | 157 | 17.60 | > 0.5 | Pass |
| 5825 | 165 | 17.63 | > 0.5 | Pass |

| 802.11n(HT40) Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|--------------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5755 | 151 | 35.94 | > 0.5 | Pass |
| 5795 | 159 | 35.35 | > 0.5 | Pass |

| 802.11ac(VHT20) Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|----------------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5745 | 149 | 17.59 | > 0.5 | Pass |
| 5785 | 157 | 17.60 | > 0.5 | Pass |
| 5825 | 165 | 17.62 | > 0.5 | Pass |

| 802.11ac(VHT40) Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|----------------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5755 | 151 | 35.79 | > 0.5 | Pass |
| 5795 | 159 | 35.70 | > 0.5 | Pass |

| 802.11ac(VHT80) Mode | | Measured Bandwidth [MHz] | Limit [MHz] | Pass / Fail |
|----------------------|-------------|--------------------------|-------------|-------------|
| Frequency [MHz] | Channel No. | | | |
| 5775 | 155 | 75.51 | > 0.5 | Pass |

[ANT1]

▣ Test Plots


Note:

In order to simplify the report, attached plots were only the most narrow channel.

802.11a (CH.157)



802.11n(HT20) (CH.165)

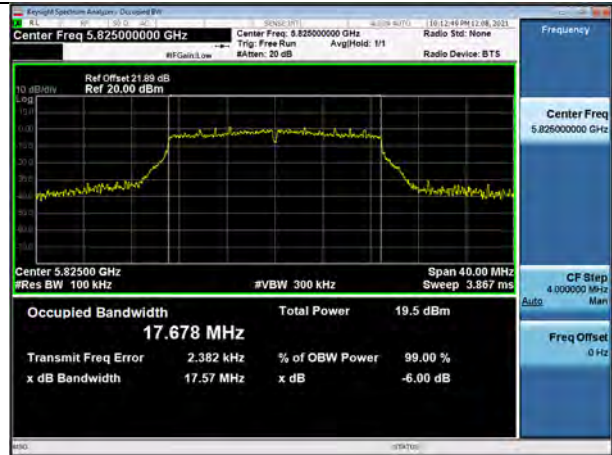

802.11n(HT40) (CH.159)



802.11ac(VHT20) (CH.157)



802.11ac(VHT40) (CH.151)



802.11ac(VHT80) (CH.155)




[ANT2]


☐ Test Plots

Note: In order to simplify the report, attached plots were only the most narrow channel.

802.11a (CH.149)

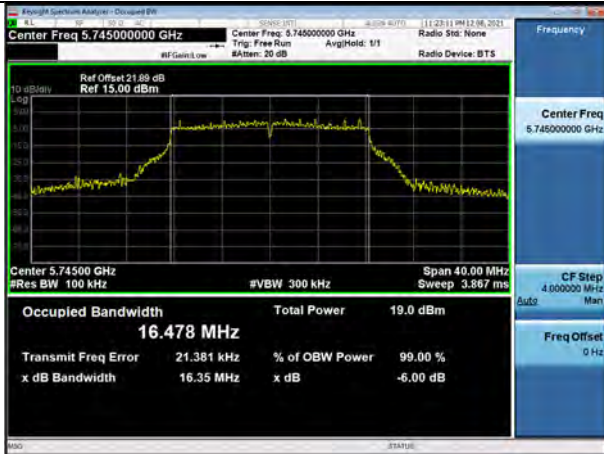


802.11n(HT20) (CH.157)

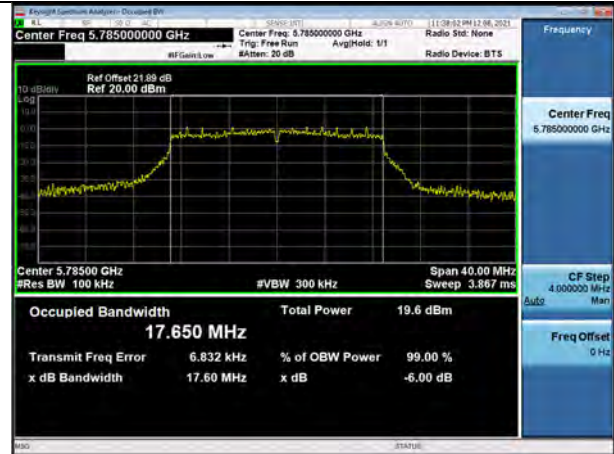


802.11n(HT40) (CH.159)



802.11ac(VHT20) (CH.157)

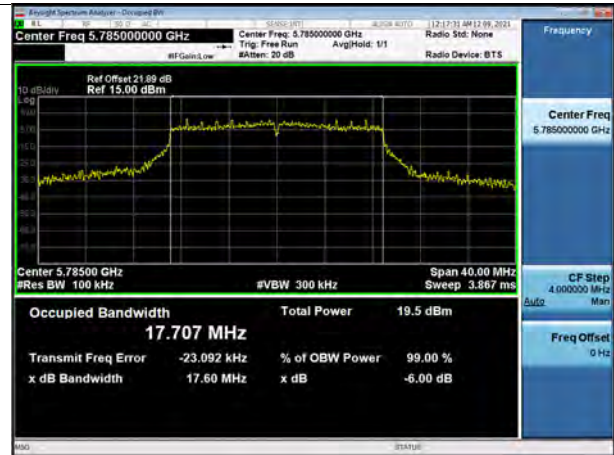

802.11ac(VHT40) (CH.159)

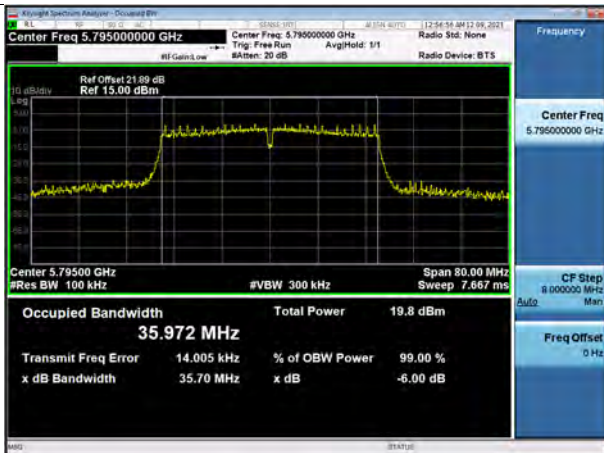

802.11ac(VHT80) (CH.155)



99 % Bandwidth measurement(ISED)
[ANT1]

| 802.11a Mode | | Measured Bandwidth [MHz] |
|-----------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5180 | 36 | 17.134 |
| 5200 | 40 | 17.138 |
| 5240 | 48 | 17.172 |
| 5745 | 149 | 17.190 |
| 5785 | 157 | 17.150 |
| 5825 | 165 | 17.255 |

| 802.11n(HT20) Mode | | Measured Bandwidth [MHz] |
|--------------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5180 | 36 | 18.160 |
| 5200 | 40 | 18.122 |
| 5240 | 48 | 18.361 |
| 5745 | 149 | 18.256 |
| 5785 | 157 | 18.244 |
| 5825 | 165 | 18.144 |

| 802.11n(HT40) Mode | | Measured Bandwidth [MHz] |
|--------------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5190 | 38 | 36.261 |
| 5230 | 46 | 36.306 |
| 5755 | 151 | 36.344 |
| 5795 | 159 | 36.286 |

| 802.11ac(VHT20) Mode | | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5180 | 36 | 18.193 |
| 5200 | 40 | 18.124 |
| 5240 | 48 | 18.168 |
| 5745 | 149 | 18.221 |
| 5785 | 157 | 18.215 |
| 5825 | 165 | 18.246 |

| 802.11ac(VHT40) Mode | | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5190 | 38 | 36.289 |
| 5230 | 46 | 36.252 |
| 5755 | 151 | 36.249 |
| 5795 | 159 | 36.309 |

| 802.11ac(VHT80) Mode | | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5210 | 42 | 75.833 |
| 5775 | 155 | 76.089 |

[ANT2]

| 802.11a Mode | | Measured Bandwidth [MHz] |
|-----------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5180 | 36 | 16.961 |
| 5200 | 40 | 16.896 |
| 5240 | 48 | 16.979 |
| 5745 | 149 | 16.987 |
| 5785 | 157 | 16.951 |
| 5825 | 165 | 16.960 |

| 802.11n(HT20) Mode | | Measured Bandwidth [MHz] |
|--------------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5180 | 36 | 17.961 |
| 5200 | 40 | 17.900 |
| 5240 | 48 | 17.931 |
| 5745 | 149 | 17.974 |
| 5785 | 157 | 17.971 |
| 5825 | 165 | 17.937 |

| 802.11n(HT40) Mode | | Measured Bandwidth [MHz] |
|--------------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5190 | 38 | 36.201 |
| 5230 | 46 | 36.159 |
| 5755 | 151 | 36.259 |
| 5795 | 159 | 36.292 |

| 802.11ac(VHT20) Mode | | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5180 | 36 | 17.965 |
| 5200 | 40 | 17.912 |
| 5240 | 48 | 17.941 |
| 5745 | 149 | 17.914 |
| 5785 | 157 | 18.089 |
| 5825 | 165 | 18.022 |

| 802.11ac(VHT40) Mode | | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5190 | 38 | 36.197 |
| 5230 | 46 | 36.259 |
| 5755 | 151 | 36.244 |
| 5795 | 159 | 36.295 |


| 802.11ac(VHT80) Mode | | Measured Bandwidth [MHz] |
|----------------------|-------------|--------------------------|
| Frequency [MHz] | Channel No. | |
| 5210 | 42 | 75.841 |
| 5775 | 155 | 75.676 |

[ANT1]


☑ Test Plots

Note: In order to simplify the report, attached plots were only the most wide channel.


802.11a (CH.165)

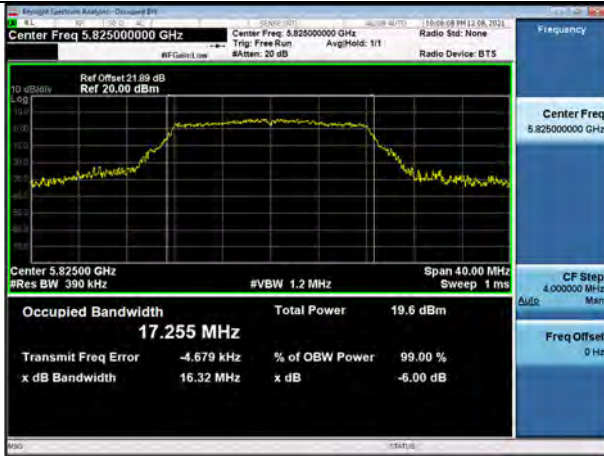

802.11n(HT20) (CH.48)

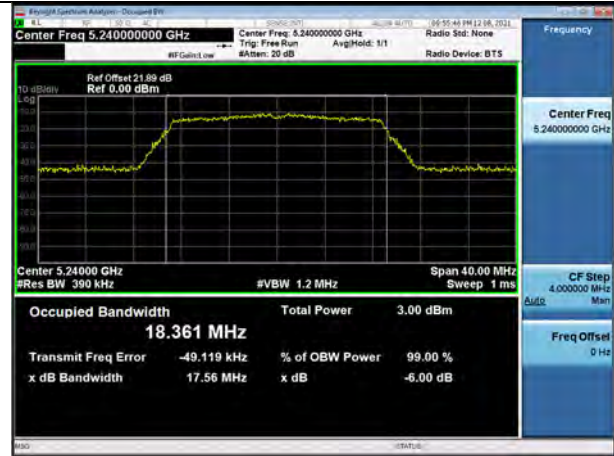

802.11n(HT40) (CH.151)

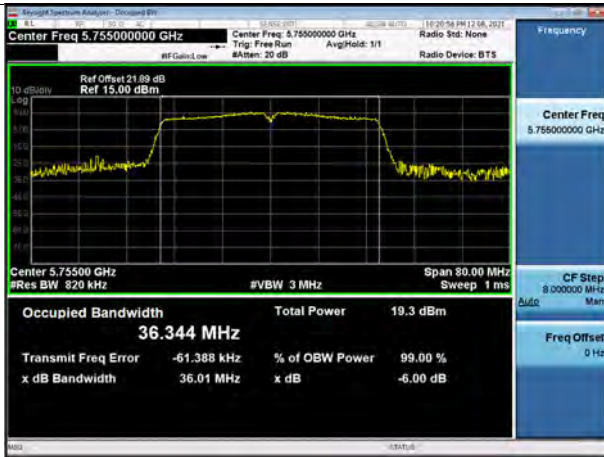

802.11ac(VHT20) (CH.165)



802.11ac(VHT40) (CH.159)



802.11ac(VHT80) (CH.155)




[ANT2]

Test Plots

Note: In order to simplify the report, attached plots were only the most wide channel.


802.11a (CH.149)

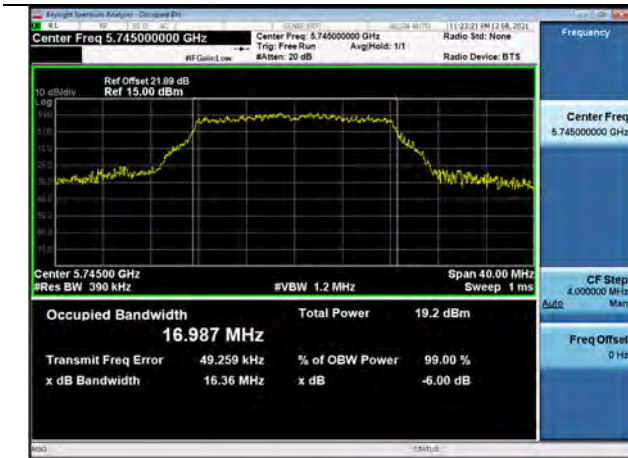


802.11n(HT20) (CH.149)




802.11n(HT40) (CH.159)

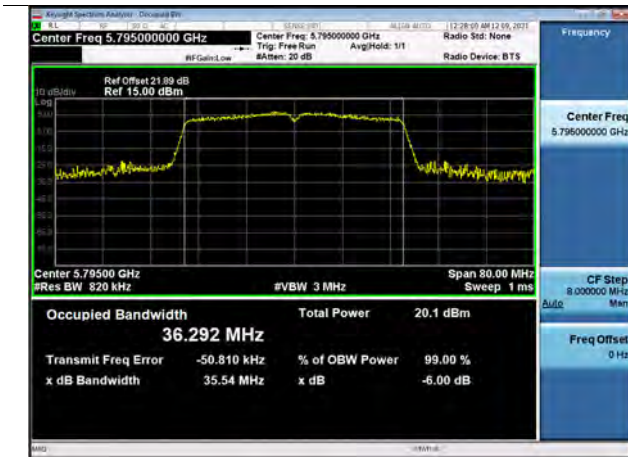


802.11ac(VHT20) (CH.157)

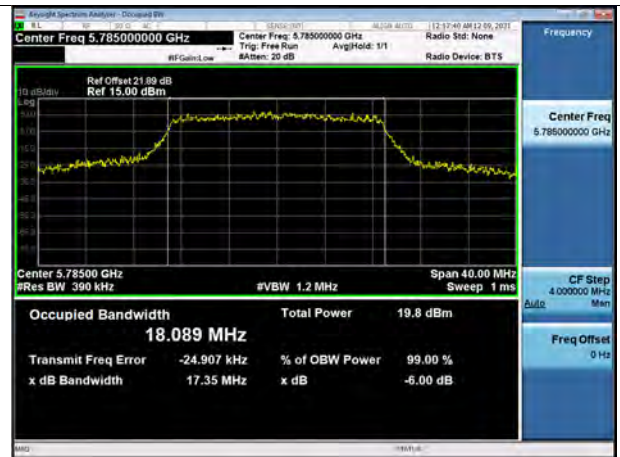

802.11ac(VHT40) (CH.159)

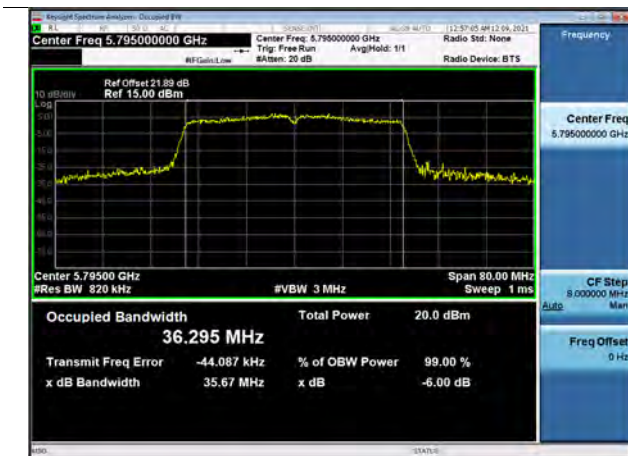

802.11ac(VHT80) (CH.42)

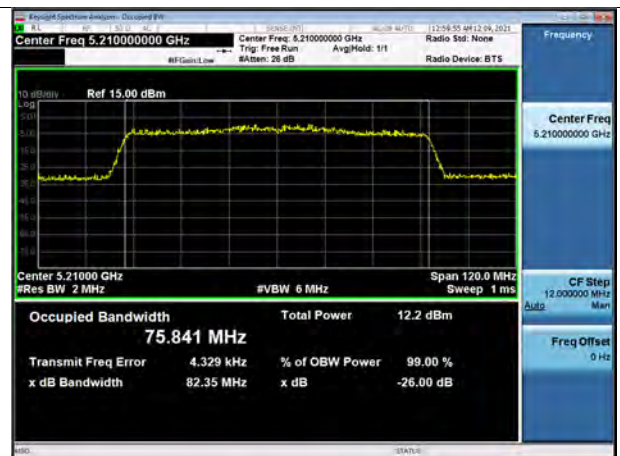

10.4 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.
Straddle channel data were added in section 10.7.3.

[Ant1]

FCC Limits

UNII-1 : Total Power < 23.98 dBm

UNII-3 : Total Power < 30.00 dBm

ISED Limits (802.11a, 802.11n_HT20, 802.11ac_VHT20)

UNII-1 : E.I.R.P < 14.04dBm

UNII-3 : Total Power < 30.00 dBm:

ISED Limits (802.11n_HT40, 802.11ac_VHT40, 802.11ac_VHT80)

UNII-1 : E.I.R.P < 14.77 dBm

UNII-3 : Total Power < 30.00 dBm

| 802.11a Mode | | | Worstcase Datarate (Mbps) | SISO Measured Power(dBm) | | | | | |
|--------------|--------------------|----------------|---------------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5180 | 36 | 6 | 7.25 | 0.298 | 7.55 | 1.77 | 9.32 | 6 |
| | 5200 | 40 | 6 | 7.21 | 0.298 | 7.51 | 1.77 | 9.28 | 6 |
| | 5240 | 48 | 6 | -3.39 | 0.298 | -3.09 | 1.77 | -1.32 | 0 |

| 802.11a Mode | | | Worstcase Datarate (Mbps) | SISO Measured Power(dBm) | | | | PLS |
|--------------|--------------------|----------------|---------------------------------|------------------------------------|---------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | | |
| UNII 3 | 5745 | 149 | 6 | 11.45 | 0.298 | 11.75 | 11 | |
| | 5785 | 157 | 6 | 11.41 | 0.298 | 11.71 | 11 | |
| | 5825 | 165 | 6 | 11.68 | 0.298 | 11.98 | 11 | |

| 802.11n Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | | |
|--------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5180 | 36 | MCS0 | 7.08 | 0.315 | 7.40 | 1.77 | 9.17 | 6 |
| | 5200 | 40 | MCS0 | 7.11 | 0.315 | 7.43 | 1.77 | 9.20 | 6 |
| | 5240 | 48 | MCS0 | -3.85 | 0.315 | -3.53 | 1.77 | -1.76 | 0 |

| 802.11n Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | PLS |
|--------------|--------------------|----------------|---------------------------|------------------------------------|---------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | | |
| UNII 3 | 5745 | 149 | MCS0 | 11.55 | 0.315 | 11.87 | 11 | |
| | 5785 | 157 | MCS0 | 11.36 | 0.315 | 11.68 | 11 | |
| | 5825 | 165 | MCS0 | 11.65 | 0.315 | 11.96 | 11 | |

| 802.11ac Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | | |
|---------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5180 | 36 | MCS0 | 7.12 | 0.313 | 7.43 | 1.77 | 9.20 | 6 |
| | 5200 | 40 | MCS0 | 7.07 | 0.313 | 7.38 | 1.77 | 9.15 | 6 |
| | 5240 | 48 | MCS0 | -3.44 | 0.313 | -3.13 | 1.77 | -1.36 | 0 |

| 802.11ac Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | PLS |
|---------------|--------------------|----------------|---------------------------|------------------------------------|---------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | | |
| UNII 3 | 5745 | 149 | MCS0 | 11.35 | 0.313 | 11.67 | 11 | |
| | 5785 | 157 | MCS0 | 11.36 | 0.313 | 11.68 | 11 | |
| | 5825 | 165 | MCS0 | 11.65 | 0.313 | 11.97 | 11 | |

| 802.11n(40 MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | | |
|----------------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5190 | 38 | MCS0 | 7.23 | 0.610 | 7.84 | 1.77 | 9.61 | 6 |
| | 5230 | 46 | MCS0 | 7.25 | 0.610 | 7.86 | 1.77 | 9.63 | 6 |

| 802.11n(40 MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | PLS |
|----------------------|--------------------|----------------|---------------------------|------------------------------------|---------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | | |
| UNII 3 | 5755 | 151 | MCS0 | 10.75 | 0.610 | 11.36 | 11 | |
| | 5795 | 159 | MCS0 | 10.62 | 0.610 | 11.23 | 11 | |

| 802.11ac(40 MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | | |
|-----------------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5190 | 38 | MCS0 | 7.09 | 0.614 | 7.70 | 1.77 | 9.47 | 6 |
| | 5230 | 46 | MCS0 | 6.36 | 0.614 | 6.97 | 1.77 | 8.74 | 5 |

| 802.11ac(40 MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | PLS |
|-----------------------|--------------------|----------------|---------------------------|------------------------------------|---------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | | |
| UNII 3 | 5755 | 151 | MCS0 | 10.79 | 0.614 | 11.40 | 11 | |
| | 5795 | 159 | MCS0 | 10.75 | 0.614 | 11.36 | 11 | |

| 802.11ac(80MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | | |
|----------------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5210 | 42 | MCS0 | 6.74 | 1.152 | 7.89 | 1.77 | 9.66 | 6 |

| 802.11ac(80MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | PLS |
|----------------------|--------------------|----------------|---------------------------|------------------------------------|---------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant1 Measured Power (dBm) | Duty Factor (dB) | Ant1 Power (dBm) | | |
| UNII 3 | 5775 | 155 | MCS0 | 10.99 | 1.154 | 12.14 | 12 | |

[Ant2]

FCC Limits

UNII-1 : Total Power < 23.98 dBm

UNII-3 : Total Power < 30.00 dBm

ISED Limits (802.11a, 802.11n_HT20, 802.11ac_VHT20)

UNII-1 : E.I.R.P < 14.01 dBm

UNII-3 : Total Power < 30.00 dBm:

ISED Limits (802.11n_HT40, 802.11ac_VHT40, 802.11ac_VHT80)

UNII-1 : E.I.R.P < 14.77 dBm

UNII-3 : Total Power < 30.00 dBm

| 802.11a Mode | | | Worstcase Datarate (Mbps) | SISO Measured Power(dBm) | | | | | |
|--------------|--------------------|----------------|---------------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5180 | 36 | 6 | 3.46 | 0.298 | 3.76 | 1.77 | 5.53 | 6 |
| | 5200 | 40 | 6 | 3.53 | 0.298 | 3.83 | 1.77 | 5.60 | 6 |
| | 5240 | 48 | 6 | -12.28 | 0.298 | -11.98 | 1.77 | -10.21 | 0 |

| 802.11a Mode | | | Worstcase Datarate (Mbps) | SISO Measured Power(dBm) | | | | PLS |
|--------------|--------------------|----------------|---------------------------------|------------------------------------|---------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | | |
| UNII 3 | 5745 | 149 | 6 | 12.04 | 0.298 | 12.34 | 11 | |
| | 5785 | 157 | 6 | 12.17 | 0.298 | 12.47 | 11 | |
| | 5825 | 165 | 6 | 12.41 | 0.298 | 12.70 | 11 | |

| 802.11n Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | | |
|--------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5180 | 36 | MCS0 | 3.39 | 0.315 | 3.71 | 1.77 | 5.48 | 6 |
| | 5200 | 40 | MCS0 | 3.37 | 0.315 | 3.69 | 1.77 | 5.46 | 6 |
| | 5240 | 48 | MCS0 | -12.03 | 0.315 | -11.71 | 1.77 | -9.94 | 0 |

| 802.11n Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | PLS |
|--------------|--------------------|----------------|---------------------------|------------------------------------|---------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | | |
| UNII 3 | 5745 | 149 | MCS0 | 12.01 | 0.315 | 12.33 | 11 | |
| | 5785 | 157 | MCS0 | 12.14 | 0.315 | 12.45 | 11 | |
| | 5825 | 165 | MCS0 | 12.25 | 0.315 | 12.57 | 11 | |

| 802.11ac Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | | |
|---------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5180 | 36 | MCS0 | 3.52 | 0.313 | 3.83 | 1.77 | 5.60 | 6 |
| | 5200 | 40 | MCS0 | 3.45 | 0.313 | 3.76 | 1.77 | 5.53 | 6 |
| | 5240 | 48 | MCS0 | -11.84 | 0.313 | -11.52 | 1.77 | -9.75 | 0 |

| 802.11ac Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | PLS |
|---------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | | |
| UNII 3 | 5745 | 149 | MCS0 | 12.01 | 0.313 | 12.33 | 11 | |
| | 5785 | 157 | MCS0 | 12.32 | 0.313 | 12.63 | 11 | |
| | 5825 | 165 | MCS0 | 12.37 | 0.313 | 12.68 | 11 | |

| 802.11n(40 MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | | |
|----------------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5190 | 38 | MCS0 | 3.07 | 0.610 | 3.68 | 1.77 | 5.45 | 6 |
| | 5230 | 46 | MCS0 | 2.96 | 0.610 | 3.57 | 1.77 | 5.34 | 6 |

| 802.11n(40 MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | PLS |
|----------------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | | |
| UNII 3 | 5755 | 151 | MCS0 | 11.66 | 0.610 | 12.27 | 11 | |
| | 5795 | 159 | MCS0 | 11.81 | 0.610 | 12.42 | 11 | |

| 802.11ac(40 MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | | |
|-----------------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5190 | 38 | MCS0 | 2.87 | 0.614 | 3.48 | 1.77 | 5.25 | 6 |
| | 5230 | 46 | MCS0 | 1.66 | 0.614 | 2.28 | 1.77 | 4.05 | 5 |

| 802.11ac(40 MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | PLS |
|-----------------------|--------------------|----------------|---------------------------|------------------------------------|---------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | | |
| UNII 3 | 5755 | 151 | MCS0 | 11.76 | 0.614 | 12.37 | 11 | |
| | 5795 | 159 | MCS0 | 11.66 | 0.614 | 12.28 | 11 | |

| 802.11ac(80MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | | |
|----------------------|--------------------|----------------|---------------------------|------------------------------------|------------------------|------------------------|------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | Peak Ant Gain (dBi) | E.I.R.P (dBm) | PLS |
| UNII 1 | 5210 | 42 | MCS0 | 2.41 | 1.152 | 3.56 | 1.77 | 5.33 | 6 |

| 802.11ac(80MHz) Mode | | | Worstcase MCS Index | SISO Measured Power(dBm) | | | | PLS |
|----------------------|--------------------|----------------|---------------------------|------------------------------------|---------------------|------------------------|----|-----|
| Band | Frequency [MHz] | Channel No. | | Ant2 Measured Power (dBm) | Duty Factor (dB) | Ant2 Power (dBm) | | |
| UNII 3 | 5775 | 155 | MCS0 | 11.20 | 1.154 | 12.35 | 12 | |

[MIMO]

FCC Limits

UNII-1 : Total Power < 23.98 dBm

UNII-3 : Total Power < 30.00 dBm

ISED Limits (802.11a, 802.11n_HT20, 802.11ac_VHT20)

UNII-1 : E.I.R.P < 14.01 dBm

UNII-3 : Total Power < 30.00 dBm:

ISED Limits (802.11n_HT40, 802.11ac_VHT40, 802.11ac_VHT80)

UNII-1 : E.I.R.P < 14.77 dBm

UNII-3 : Total Power < 30.00 dBm

| 802.11a Mode | | | Worstcase Datarate (Mbps) | MIMO Total Power (dBm) (CDD) | | | | PLS |
|--------------|--------------------|----------------|---------------------------------|------------------------------|-----------------------|----------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | mW | SUM Power (dBm) | Directional Ant Gain (dBi) | E.I.R.P (dBm) | |
| UNII 1 | 5180 | 36 | 6 | 7.53 | 9.06 | 4.78 | 13.84 | 6 |
| | 5200 | 40 | 6 | 7.51 | 9.06 | 4.78 | 13.84 | 6 |
| | 5240 | 48 | 6 | 0.52 | -2.57 | 4.78 | 2.22 | 0 |

| 802.11a Mode | | | Worstcase Datarate (Mbps) | MIMO Total Power (dBm) (CDD) | | PLS |
|--------------|--------------------|----------------|---------------------------------|---------------------------------|-----------------------|-----|
| Band | Frequency [MHz] | Channel No. | | mW | SUM Power (dBm) | |
| UNII 3 | 5745 | 149 | 6 | 29.96 | 15.06 | 11 |
| | 5785 | 157 | 6 | 30.31 | 15.11 | 11 |
| | 5825 | 165 | 6 | 32.13 | 15.37 | 11 |

| 802.11n Mode | | | Worstcase MCS Index | MIMO Total Power (dBm) (CDD) | | | | PLS |
|--------------|--------------------|----------------|---------------------------|------------------------------|-----------------------|----------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | mW | SUM Power (dBm) | Directional Ant Gain (dBi) | E.I.R.P (dBm) | |
| UNII 1 | 5180 | 36 | MCS0 | 7.29 | 8.94 | 4.78 | 13.72 | 6 |
| | 5200 | 40 | MCS0 | 7.31 | 8.96 | 4.78 | 13.74 | 6 |
| | 5240 | 48 | MCS0 | 0.47 | -2.92 | 4.78 | 1.86 | 0 |

| 802.11n Mode | | | Worstcase MCS Index | MIMO Total Power (dBm) (CDD) | | PLS |
|--------------|--------------------|----------------|---------------------------|---------------------------------|-----------------------|-----|
| Band | Frequency [MHz] | Channel No. | | mW | SUM Power (dBm) | |
| UNII 3 | 5745 | 149 | MCS0 | 30.21 | 15.12 | 11 |
| | 5785 | 157 | MCS0 | 30.04 | 15.09 | 11 |
| | 5825 | 165 | MCS0 | 31.41 | 15.29 | 11 |

| 802.11ac Mode | | | Worstcase | MIMO Total Power (dBm) (CDD) | | | | PLS |
|---------------|-----------------|-------------|-----------|------------------------------|-------|-----------------|----------------------------|-----|
| Band | Frequency [MHz] | Channel No. | | MCS Index | mW | SUM Power (dBm) | Directional Ant Gain (dBi) | |
| UNII 1 | 5180 | 36 | MCS0 | 7.40 | 9.01 | 4.78 | 13.79 | 6 |
| | 5200 | 40 | MCS0 | 7.31 | 8.95 | 4.78 | 13.73 | 6 |
| | 5240 | 48 | MCS0 | 0.52 | -2.54 | 4.78 | 2.24 | 0 |

| 802.11ac Mode | | | Worstcase | MIMO Total Power (dBm) (CDD) | | PLS |
|---------------|-----------------|-------------|-----------|------------------------------|-------|-----|
| Band | Frequency [MHz] | Channel No. | | MCS Index | mW | |
| UNII 3 | 5745 | 149 | MCS0 | 29.56 | 15.02 | 11 |
| | 5785 | 157 | MCS0 | 30.76 | 15.19 | 11 |
| | 5825 | 165 | MCS0 | 31.89 | 15.35 | 11 |

| 802.11n(40MHz) Mode | | | Worstcase | MIMO Total Power (dBm) (CDD) | | | | PLS |
|---------------------|-----------------|-------------|-----------|------------------------------|------|-----------------|----------------------------|-----|
| Band | Frequency [MHz] | Channel No. | | MCS Index | mW | SUM Power (dBm) | Directional Ant Gain (dBi) | |
| UNII 1 | 5190 | 38 | MCS0 | 7.31 | 9.25 | 4.78 | 14.03 | 6 |
| | 5230 | 46 | MCS0 | 7.29 | 9.23 | 4.78 | 14.02 | 6 |

| 802.11n(40MHz) Mode | | | Worstcase | MIMO Total Power (dBm) (CDD) | | PLS |
|---------------------|-----------------|-------------|-----------|------------------------------|-------|-----|
| Band | Frequency [MHz] | Channel No. | | MCS Index | mW | |
| UNII 3 | 5755 | 151 | MCS0 | 26.54 | 14.85 | 11 |
| | 5795 | 159 | MCS0 | 26.70 | 14.87 | 11 |

| 802.11ac(40MHz) Mode | | | Worstcase MCS Index | MIMO Total Power (dBm) (CDD) | | | | PLS |
|----------------------|--------------------|----------------|---------------------------|------------------------------|-----------------------|----------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | mW | SUM Power (dBm) | Directional Ant Gain (dBi) | E.I.R.P (dBm) | |
| UNII 1 | 5190 | 38 | MCS0 | 7.05 | 9.10 | 4.78 | 13.88 | 6 |
| | 5230 | 46 | MCS0 | 5.79 | 8.24 | 4.78 | 13.02 | 5 |

| 802.11ac(40MHz) Mode | | | Worstcase MCS Index | MIMO Total Power (dBm) (CDD) | | PLS |
|----------------------|--------------------|----------------|---------------------------|---------------------------------|-----------------------|-----|
| Band | Frequency [MHz] | Channel No. | | mW | SUM Power (dBm) | |
| UNII 3 | 5755 | 151 | MCS0 | 26.97 | 14.92 | 11 |
| | 5795 | 159 | MCS0 | 26.56 | 14.86 | 11 |

| 802.11ac(80MHz) Mode | | | Worstcase MCS Index | MIMO Total Power (dBm) (CDD) | | | | PLS |
|----------------------|--------------------|----------------|---------------------------|------------------------------|-----------------------|----------------------------------|------------------|-----|
| Band | Frequency [MHz] | Channel No. | | mW | SUM Power (dBm) | Directional Ant Gain (dBi) | E.I.R.P (dBm) | |
| UNII 1 | 5210 | 42 | MCS0 | 6.46 | 9.26 | 4.78 | 14.04 | 6 |

| 802.11ac(80MHz) Mode | | | Worstcase MCS Index | MIMO Total Power (dBm) (CDD) | | PLS |
|----------------------|--------------------|----------------|---------------------------|---------------------------------|-----------------------|-----|
| Band | Frequency [MHz] | Channel No. | | mW | SUM Power (dBm) | |
| UNII 3 | 5775 | 155 | MCS0 | 25.74 | 15.26 | 12 |

10.5 POWER SPECTRAL DENSITY

FCC & ISED

[Ant1]

| 802.11a Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|--------------------|----------------|--------------------------|------------------------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | | | |
| 5180 | 36 | -2.381 | 0.298 | -2.083 | 11 dBm/MHz |
| 5200 | 40 | -2.335 | 0.298 | -2.037 | |
| 5240 | 48 | -13.335 | 0.298 | -13.037 | |
| 5745 | 149 | -1.121 | 0.298 | -0.823 | 30 dBm/500kHz |
| 5785 | 157 | -1.354 | 0.298 | -1.056 | |
| 5825 | 165 | -1.139 | 0.298 | -0.841 | |

| 802.11n(20MHz) Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|---------------------|-------------|--------------------------|------------------------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | | | |
| 5180 | 36 | -2.654 | 0.315 | -2.339 | 11 dBm/MHz |
| 5200 | 40 | -2.635 | 0.315 | -2.320 | |
| 5240 | 48 | -14.128 | 0.315 | -13.813 | |
| 5745 | 149 | -1.451 | 0.315 | -1.136 | 30 dBm/500kHz |
| 5785 | 157 | -1.722 | 0.315 | -1.407 | |
| 5825 | 165 | -1.481 | 0.315 | -1.166 | |

| 802.11n(40MHz) Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|---------------------|----------------|--------------------------|------------------------------|--------------------|----------------|
| Frequency [MHz] | Channel No. | | | | |
| 5190 | 38 | -5.840 | 0.610 | -5.230 | 11 dBm/MHz |
| 5230 | 46 | -5.639 | 0.610 | -5.029 | |
| 5755 | 151 | -5.250 | 0.610 | -4.640 | 30 dBm /500kHz |
| 5795 | 159 | -5.549 | 0.610 | -4.939 | |

| 802.11ac(20MHz) Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|----------------------|----------------|--------------------------|------------------------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | | | |
| 5180 | 36 | -2.627 | 0.313 | -2.314 | 11 dBm/MHz |
| 5200 | 40 | -2.619 | 0.313 | -2.306 | |
| 5240 | 48 | -13.852 | 0.313 | -13.539 | |
| 5745 | 149 | -1.690 | 0.313 | -1.377 | 30 dBm/500kHz |
| 5785 | 157 | -1.816 | 0.313 | -1.503 | |
| 5825 | 165 | -1.620 | 0.313 | -1.307 | |

| 802.11ac(40MHz) Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|----------------------|----------------|--------------------------|------------------------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | | | |
| 5190 | 38 | -5.534 | 0.614 | -4.920 | 11 dBm/MHz |
| 5230 | 46 | -6.903 | 0.614 | -6.289 | |
| 5755 | 151 | -5.045 | 0.614 | -4.431 | 30 dBm/500kHz |
| 5795 | 159 | -5.253 | 0.614 | -4.639 | |

| 802.11ac(80MHz) Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|----------------------|----------------|--------------------------|------------------------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | | | |
| 5210 | 42 | -9.524 | 1.154 | -8.370 | 11 dBm/MHz |
| 5775 | 155 | -8.203 | 1.154 | -7.049 | 30 dBm/500kHz |

[Ant2]

| 802.11a Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|--------------------|----------------|--------------------------|------------------------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | | | |
| 5180 | 36 | -6.176 | 0.298 | -5.878 | 11 dBm/MHz |
| 5200 | 40 | -5.869 | 0.298 | -5.571 | |
| 5240 | 48 | -22.245 | 0.298 | -21.947 | |
| 5745 | 149 | -0.654 | 0.298 | -0.356 | 30 dBm/500kHz |
| 5785 | 157 | -0.851 | 0.298 | -0.553 | |
| 5825 | 165 | -0.347 | 0.298 | -0.049 | |

| 802.11n(20MHz) Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|---------------------|-------------|--------------------------|------------------------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | | | |
| 5180 | 36 | -6.570 | 0.315 | -6.255 | 11 dBm/MHz |
| 5200 | 40 | -6.579 | 0.315 | -6.264 | |
| 5240 | 48 | -22.609 | 0.315 | -22.294 | |
| 5745 | 149 | -1.219 | 0.315 | -0.904 | 30 dBm/500kHz |
| 5785 | 157 | -0.396 | 0.315 | -0.081 | |
| 5825 | 165 | -0.834 | 0.315 | -0.519 | |

| 802.11n(40MHz) Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|---------------------|----------------|--------------------------|------------------------------|--------------------|----------------|
| Frequency [MHz] | Channel No. | | | | |
| 5190 | 38 | -9.957 | 0.610 | -9.347 | 11 dBm/MHz |
| 5230 | 46 | -10.003 | 0.610 | -9.393 | |
| 5755 | 151 | -4.191 | 0.610 | -3.581 | 30 dBm /500kHz |
| 5795 | 159 | -4.143 | 0.610 | -3.533 | |

| 802.11ac(20MHz) Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|----------------------|----------------|--------------------------|------------------------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | | | |
| 5180 | 36 | -6.336 | 0.313 | -6.023 | 11 dBm/MHz |
| 5200 | 40 | -6.293 | 0.313 | -5.980 | |
| 5240 | 48 | -22.189 | 0.313 | -21.876 | |
| 5745 | 149 | -1.170 | 0.313 | -0.857 | 30 dBm/500kHz |
| 5785 | 157 | -0.964 | 0.313 | -0.651 | |
| 5825 | 165 | -0.740 | 0.313 | -0.427 | |

| 802.11ac(40MHz) Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|----------------------|----------------|--------------------------|------------------------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | | | |
| 5190 | 38 | -9.763 | 0.614 | -9.149 | 11 dBm/MHz |
| 5230 | 46 | -11.676 | 3.314 | -8.362 | |
| 5755 | 151 | -4.051 | 0.614 | -3.437 | 30 dBm/500kHz |
| 5795 | 159 | -4.204 | 0.614 | -3.590 | |

| 802.11ac(80MHz) Mode | | Measured PSD [dBm] | Duty Cycle Factor (dB) | Total PSD [dBm] | Limit |
|----------------------|----------------|--------------------------|------------------------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | | | |
| 5210 | 42 | -13.398 | 4.135 | -9.263 | 11 dBm/MHz |
| 5775 | 155 | -8.696 | 1.154 | -7.542 | 30 dBm/500kHz |

[MIMO (CDD)]

| 802.11a Mode | | Total PSD [dBm] | Limit |
|--------------------|-------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | |
| 5180 | 36 | -0.765 | 11 dBm/MHz |
| 5200 | 40 | -0.616 | |
| 5240 | 48 | -13.387 | |
| 5745 | 149 | 2.423 | 30 dBm/500kHz |
| 5785 | 157 | 2.209 | |
| 5825 | 165 | 2.574 | |

| 802.11n(20MHz) Mode | | Total PSD [dBm] | Limit |
|---------------------|-------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | |
| 5180 | 36 | -1.068 | 11 dBm/MHz |
| 5200 | 40 | -1.060 | |
| 5240 | 48 | -14.047 | |
| 5745 | 149 | 1.991 | 30 dBm/500kHz |
| 5785 | 157 | 2.292 | |
| 5825 | 165 | 2.174 | |

| 802.11n(40MHz) Mode | | Total PSD [dBm] | Limit |
|---------------------|-------------|--------------------|----------------|
| Frequency [MHz] | Channel No. | | |
| 5190 | 38 | -4.036 | 11 dBm/MHz |
| 5230 | 46 | -3.929 | |
| 5755 | 151 | -1.084 | 30 dBm /500kHz |
| 5795 | 159 | -1.197 | |


| 802.11ac(20MHz) Mode | | Total PSD [dBm] | Limit |
|----------------------|-------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | |
| 5180 | 36 | -0.961 | 11 dBm/MHz |
| 5200 | 40 | -0.940 | |
| 5240 | 48 | -13.733 | |
| 5745 | 149 | 1.898 | 30 dBm/500kHz |
| 5785 | 157 | 1.944 | |
| 5825 | 165 | 2.155 | |

| 802.11ac(40MHz) Mode | | Total PSD [dBm] | Limit |
|----------------------|-------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | |
| 5190 | 38 | -3.770 | 11 dBm/MHz |
| 5230 | 46 | -4.254 | |
| 5755 | 151 | -0.910 | 30 dBm/500kHz |
| 5795 | 159 | -1.089 | |


| 802.11ac(80MHz) Mode | | Total PSD [dBm] | Limit |
|----------------------|-------------|--------------------|---------------|
| Frequency [MHz] | Channel No. | | |
| 5210 | 42 | -5.795 | 11 dBm/MHz |
| 5775 | 155 | -4.282 | 30 dBm/500kHz |

[Ant1]

Test Plots(802.11a)

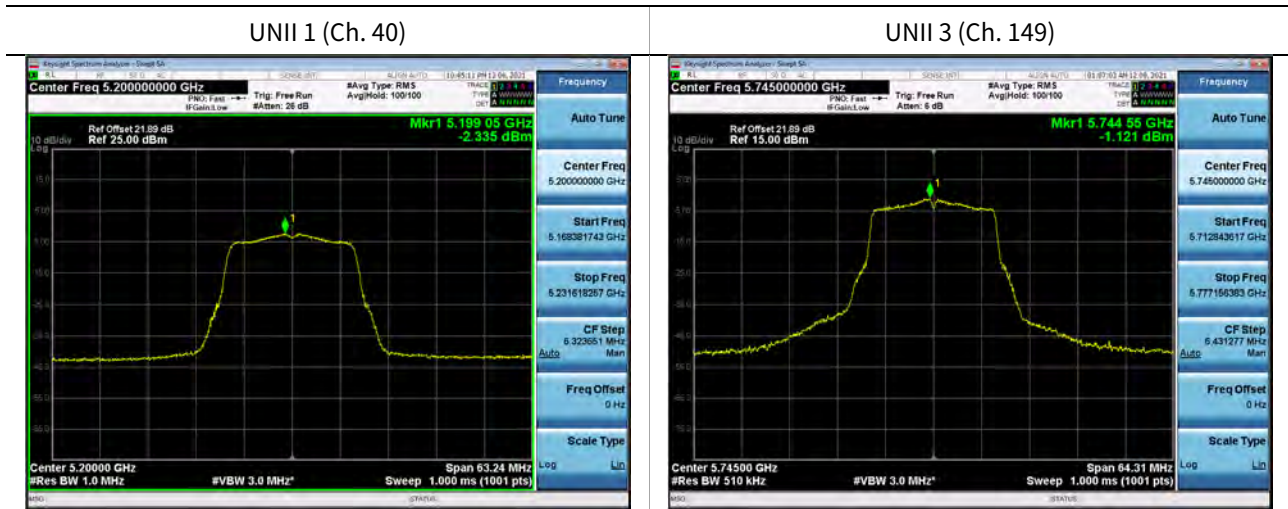


Test Plots(802.11n(HT20))

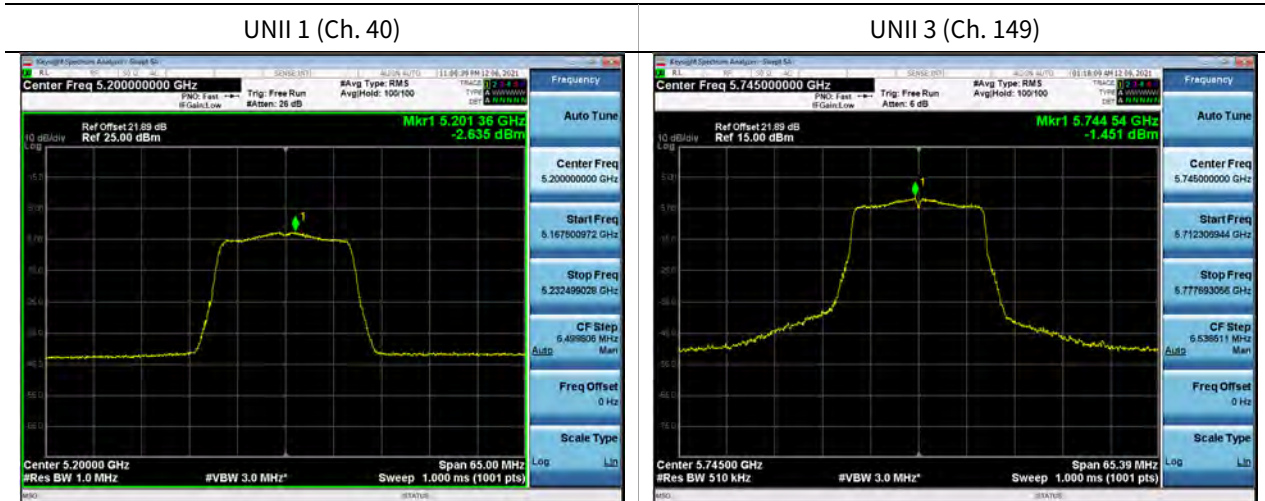


Test Plots(802.11n(HT40))

UNII 1 (Ch. 46)

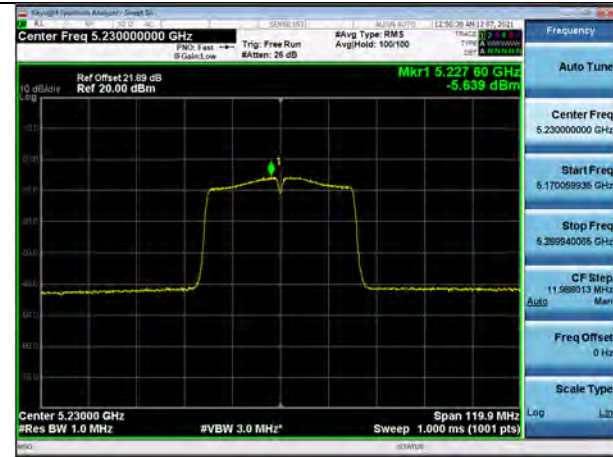


UNII 3 (Ch. 151)

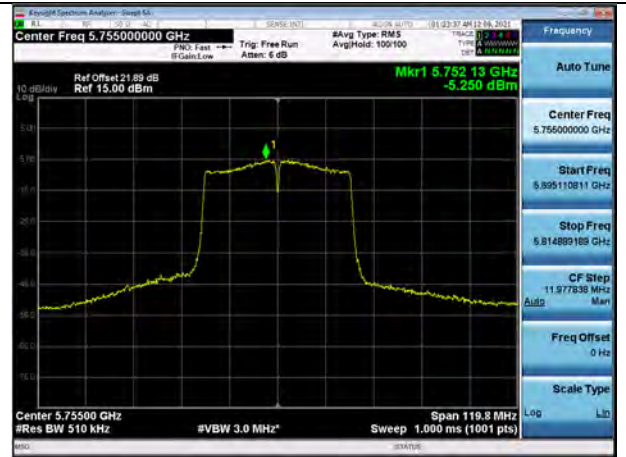


Test Plots(802.11ac(VHT20))


UNII 1 (Ch. 40)

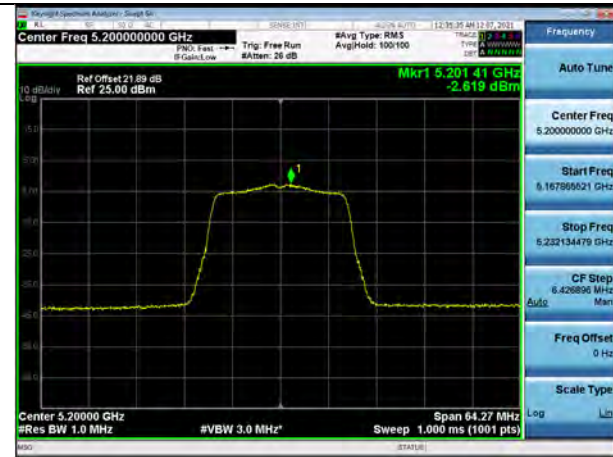


UNII 3 (Ch. 165)

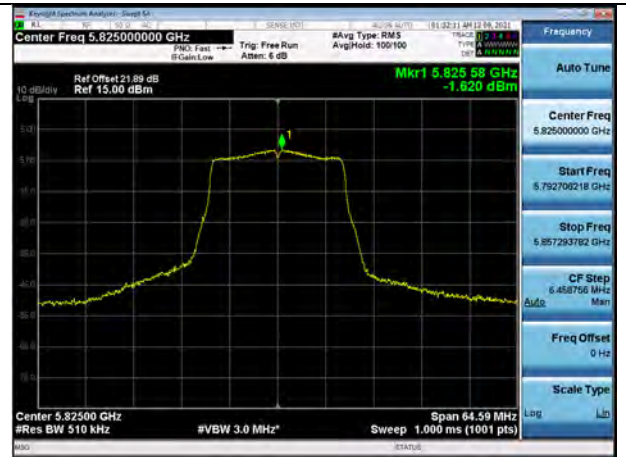

Test Plots(802.11ac(VHT40))

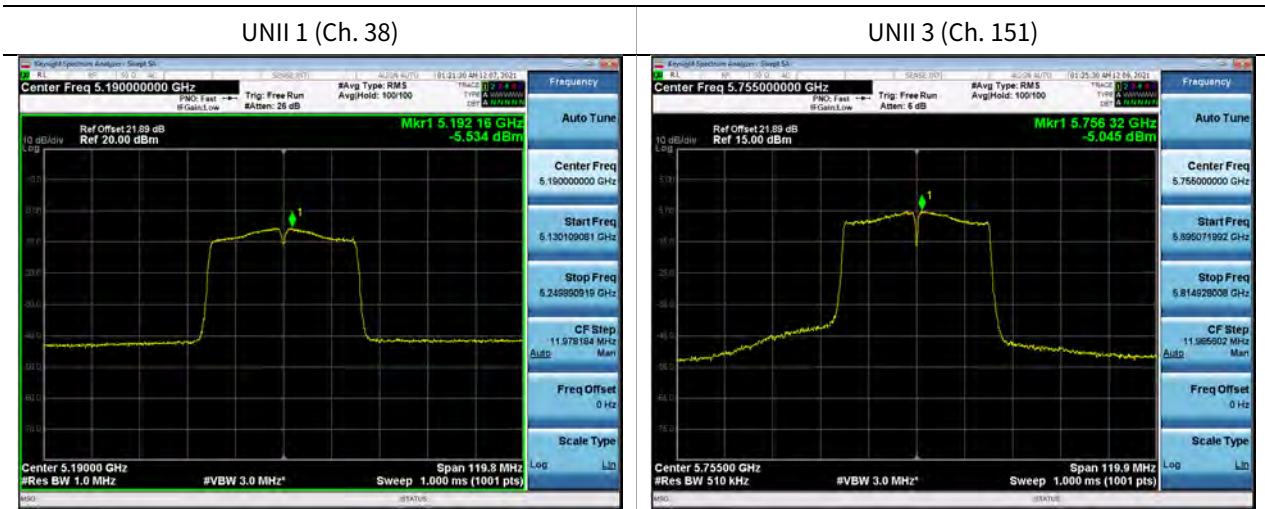


Test Plots(802.11ac(VHT80))

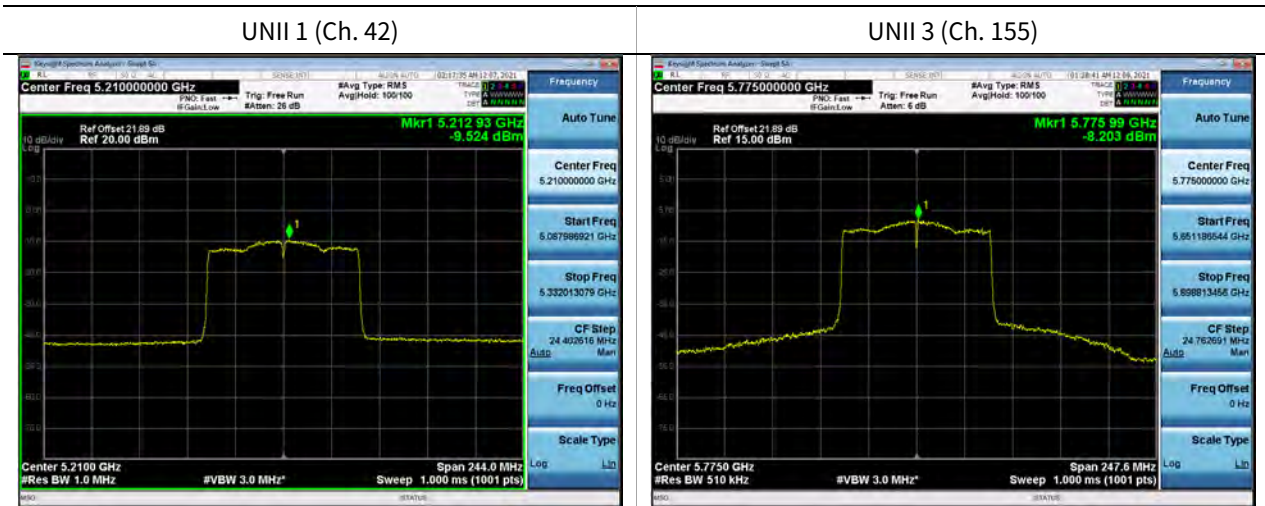


[Ant2]

Test Plots(802.11a)

UNII 1 (Ch. 40)

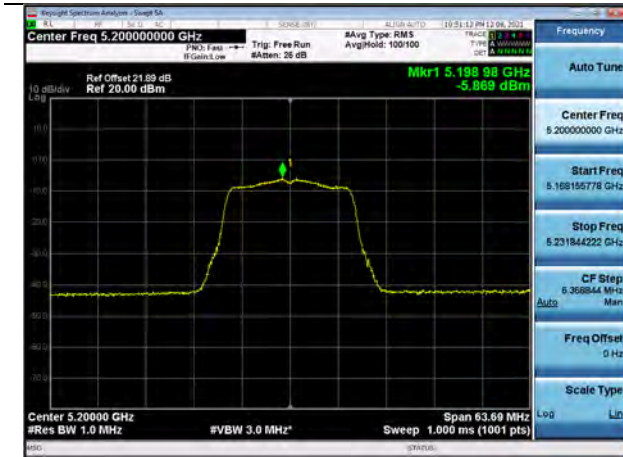


UNII 3 (Ch. 165)

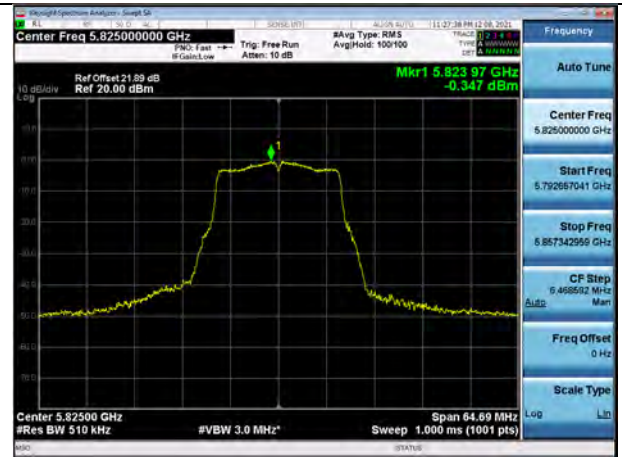


Test Plots(802.11n(HT20))

UNII 1 (Ch. 36)

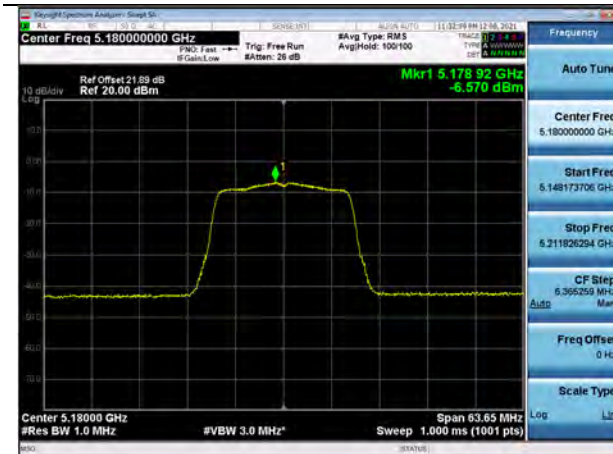


UNII 3 (Ch. 157)

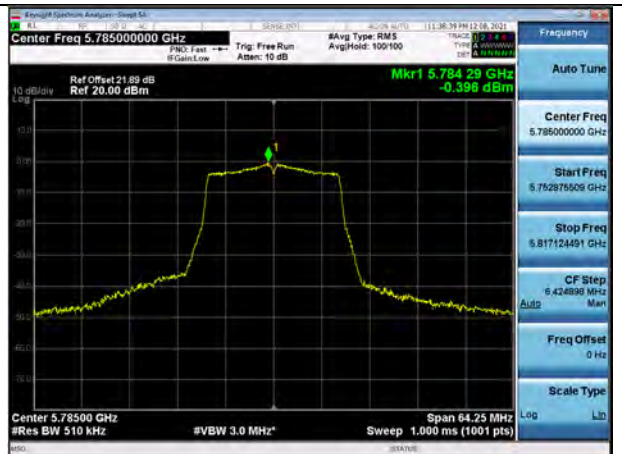


Test Plots(802.11n(HT40))

UNII 1 (Ch. 38)

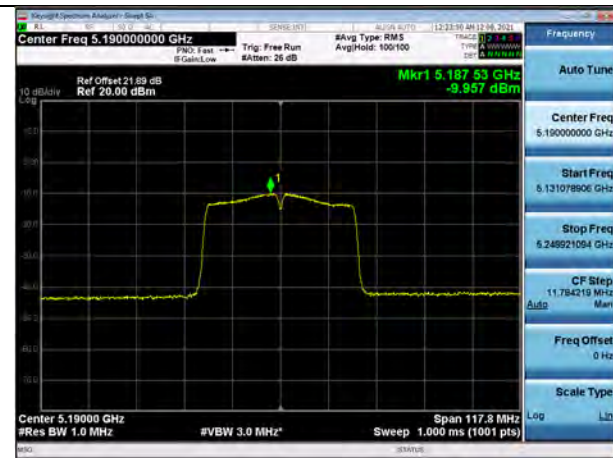


UNII 3 (Ch. 159)

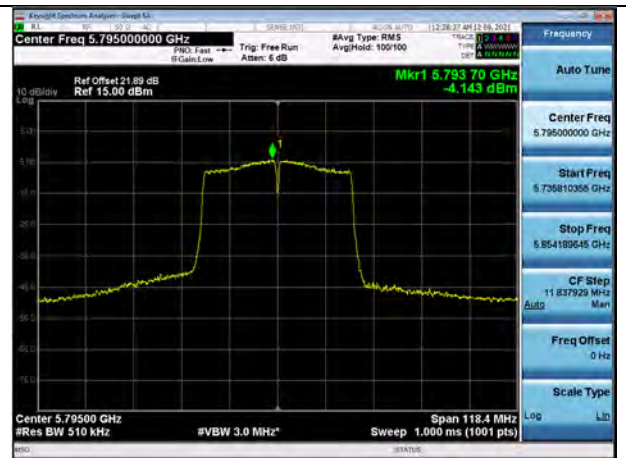


Test Plots(802.11ac(VHT20))


UNII 1 (Ch. 40)

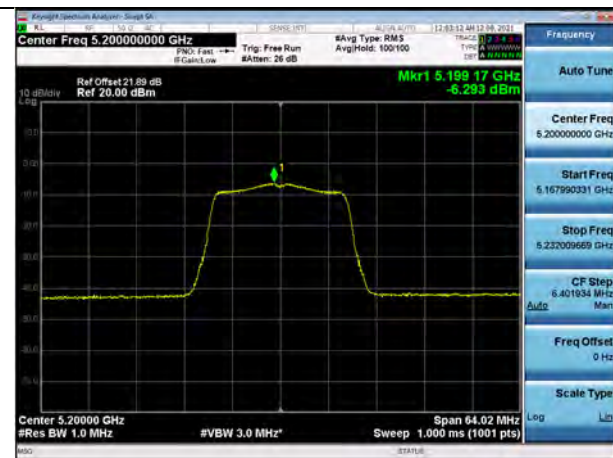


UNII 3 (Ch. 165)

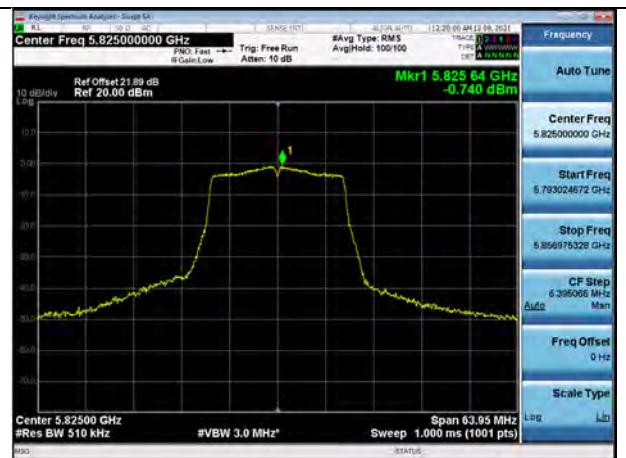

Test Plots(802.11ac(VHT40))

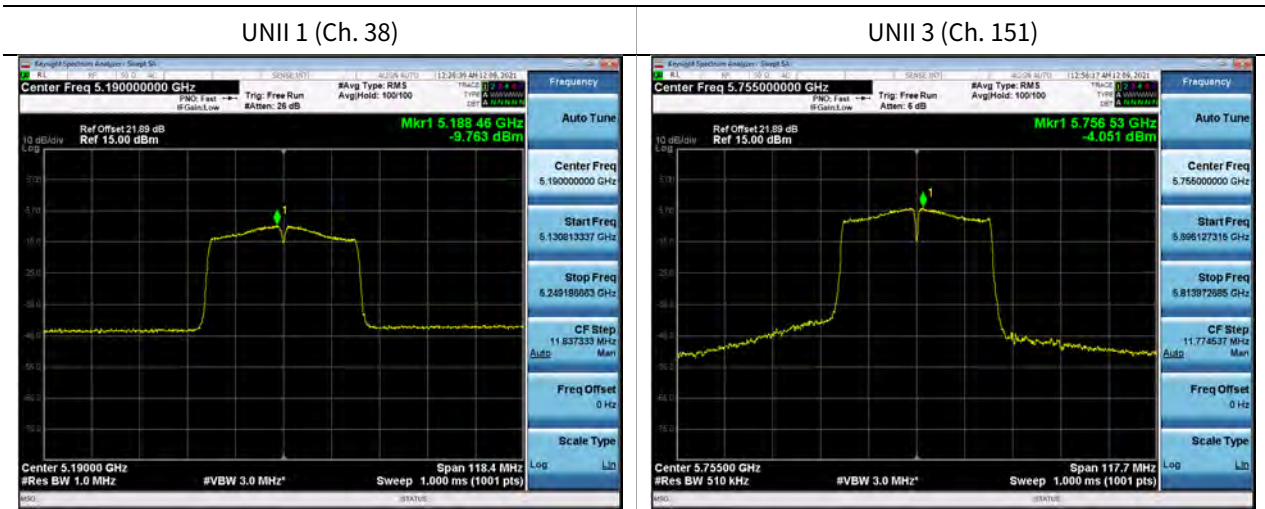

Test Plots(802.11ac(VHT80))

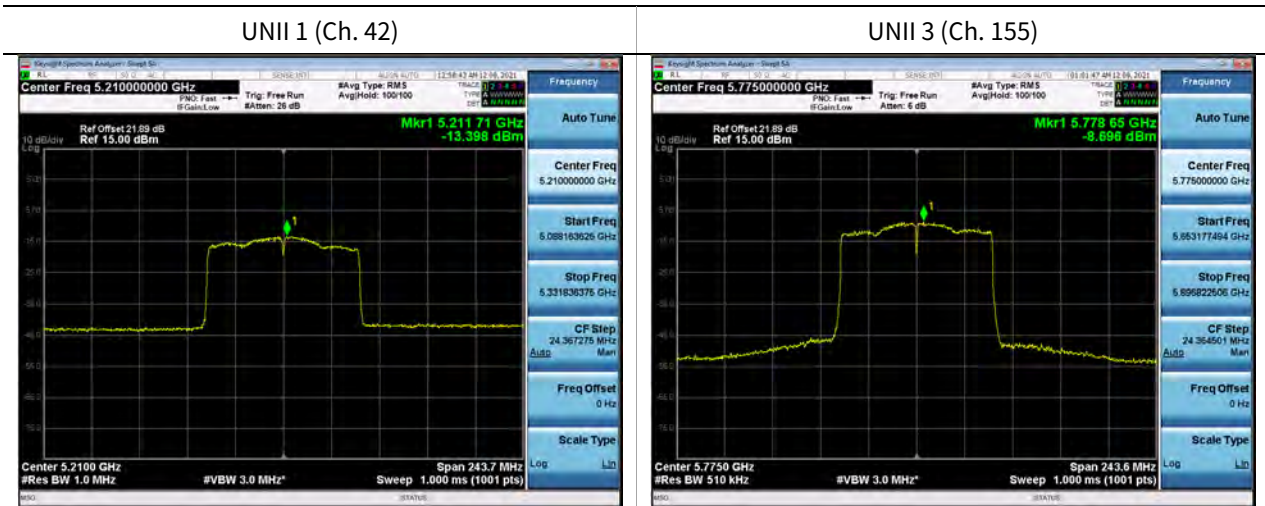

10.6 FREQUENCY STABILITY.

10.6.1 80MHz BW

[ANT1]

Startup after the EUT is energized

| | |
|----------------------|------------------|
| OPERATING BAND: | UNII Band 1 |
| OPERATING FREQUENCY: | 5,210,000,000 Hz |
| CHANNEL: | 42 |
| REFERENCE VOLTAGE: | 12 VDC |

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5210004.75 | 4.75 |
| 100% | | -30 | 5210003.62 | 3.62 |
| 100% | | -20 | 5210082.68 | 82.68 |
| 100% | | -10 | 5210045.02 | 45.02 |
| 100% | | 0 | 5210050.51 | 50.51 |
| 100% | | +10 | 5210098.38 | 98.38 |
| 100% | | +30 | 5210087.72 | 87.72 |
| 100% | | +40 | 5210055.12 | 55.12 |
| 100% | | +50 | 5210074.85 | 74.85 |
| Max | | 8 | +20 | 5210037.99 |
| Min | 16 | +20 | 5210046.25 | 46.25 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,775,000,000 Hz
 CHANNEL: 155
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5775077.34 | 77.34 |
| 100% | | -30 | 5775073.10 | 73.10 |
| 100% | | -20 | 5775062.16 | 62.16 |
| 100% | | -10 | 5775023.43 | 23.43 |
| 100% | | 0 | 5775020.89 | 20.89 |
| 100% | | +10 | 5775017.94 | 17.94 |
| 100% | | +30 | 5775054.52 | 54.52 |
| 100% | | +40 | 5775003.44 | 3.44 |
| 100% | | +50 | 5775042.10 | 42.10 |
| Max | | 8 | +20 | 5775022.51 |
| Min | 16 | +20 | 5775074.03 | 74.03 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5210063.98 | 63.98 |
| 100% | | -30 | 5210051.93 | 51.93 |
| 100% | | -20 | 5210078.72 | 78.72 |
| 100% | | -10 | 5210054.09 | 54.09 |
| 100% | | 0 | 5210019.67 | 19.67 |
| 100% | | +10 | 5210074.83 | 74.83 |
| 100% | | +30 | 5210065.28 | 65.28 |
| 100% | | +40 | 5210060.92 | 60.92 |
| 100% | | +50 | 5210009.88 | 9.88 |
| Max | | 8 | +20 | 5210062.04 |
| Min | 16 | +20 | 5210093.62 | 93.62 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,775,000,000 Hz
 CHANNEL: 155
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5775011.90 | 11.90 |
| 100% | | -30 | 5775067.75 | 67.75 |
| 100% | | -20 | 5775024.40 | 24.4 |
| 100% | | -10 | 5775008.38 | 8.38 |
| 100% | | 0 | 5775032.26 | 32.26 |
| 100% | | +10 | 5775056.66 | 56.66 |
| 100% | | +30 | 5775075.46 | 75.46 |
| 100% | | +40 | 5775024.62 | 24.62 |
| 100% | | +50 | 5775001.47 | 1.47 |
| Max | | 8 | +20 | 5775013.80 |
| Min | 16 | +20 | 5775040.38 | 40.38 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5210063.31 | 63.31 |
| 100% | | -30 | 5210024.02 | 24.02 |
| 100% | | -20 | 5210075.91 | 75.91 |
| 100% | | -10 | 5210066.87 | 66.87 |
| 100% | | 0 | 5210081.57 | 81.57 |
| 100% | | +10 | 5210061.07 | 61.07 |
| 100% | | +30 | 5210071.22 | 71.22 |
| 100% | | +40 | 5210028.51 | 28.51 |
| 100% | | +50 | 5210032.73 | 32.73 |
| Max | | 8 | +20 | 5210041.23 |
| Min | 16 | +20 | 5210059.14 | 59.14 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,775,000,000 Hz
 CHANNEL: 155
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5775021.94 | 21.94 |
| 100% | | -30 | 5775007.10 | 7.10 |
| 100% | | -20 | 5775011.29 | 11.29 |
| 100% | | -10 | 5775072.91 | 72.91 |
| 100% | | 0 | 5775044.54 | 44.54 |
| 100% | | +10 | 5775095.12 | 95.12 |
| 100% | | +30 | 5775072.91 | 72.91 |
| 100% | | +40 | 5775031.53 | 31.53 |
| 100% | | +50 | 5775073.82 | 73.82 |
| Max | | 8 | +20 | 5775039.45 |
| Min | 16 | +20 | 5775020.27 | 20.27 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5210048.35 | 48.35 |
| 100% | | -30 | 5210023.81 | 23.81 |
| 100% | | -20 | 5210083.74 | 83.74 |
| 100% | | -10 | 5210082.42 | 82.42 |
| 100% | | 0 | 5210051.10 | 51.10 |
| 100% | | +10 | 5210014.88 | 14.88 |
| 100% | | +30 | 5210066.49 | 66.49 |
| 100% | | +40 | 5210044.45 | 44.45 |
| 100% | | +50 | 5210067.33 | 67.33 |
| Max | | 8 | +20 | 5210081.21 |
| Min | 16 | +20 | 5210034.23 | 34.23 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,775,000,000 Hz
 CHANNEL: 155
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5775057.51 | 57.51 |
| 100% | | -30 | 5775053.59 | 53.59 |
| 100% | | -20 | 5775002.35 | 2.35 |
| 100% | | -10 | 5775076.05 | 76.05 |
| 100% | | 0 | 5775095.04 | 95.04 |
| 100% | | +10 | 5775061.26 | 61.26 |
| 100% | | +30 | 5775090.91 | 90.91 |
| 100% | | +40 | 5775097.12 | 97.12 |
| 100% | | +50 | 5775031.65 | 31.65 |
| Max | | 8 | +20 | 5775049.47 |
| Min | 16 | +20 | 5775078.15 | 78.15 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

[ANT2]
Startup after the EUT is energized

| | |
|----------------------|------------------|
| OPERATING BAND: | UNII Band 1 |
| OPERATING FREQUENCY: | 5,210,000,000 Hz |
| CHANNEL: | 42 |
| REFERENCE VOLTAGE: | 12 VDC |

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5210042.14 | 42.14 |
| 100% | | -30 | 5210068.64 | 68.64 |
| 100% | | -20 | 5210085.55 | 85.55 |
| 100% | | -10 | 5210019.69 | 19.69 |
| 100% | | 0 | 5210070.98 | 70.98 |
| 100% | | +10 | 5210046.84 | 46.84 |
| 100% | | +30 | 5210071.20 | 71.20 |
| 100% | | +40 | 5210086.04 | 86.04 |
| 100% | | +50 | 5210094.05 | 94.05 |
| Max | | 8 | +20 | 5210054.52 |
| Min | 16 | +20 | 5210091.29 | 91.29 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,775,000,000 Hz
 CHANNEL: 155
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5775038.85 | 38.85 |
| 100% | | -30 | 5775018.05 | 18.05 |
| 100% | | -20 | 5775028.60 | 28.6 |
| 100% | | -10 | 5775058.02 | 58.02 |
| 100% | | 0 | 5775069.84 | 69.84 |
| 100% | | +10 | 5775039.98 | 39.98 |
| 100% | | +30 | 5775055.74 | 55.74 |
| 100% | | +40 | 5775052.25 | 52.25 |
| 100% | | +50 | 5775022.66 | 22.66 |
| Max | | 8 | +20 | 5775004.29 |
| Min | 16 | +20 | 5775096.92 | 96.92 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5210023.72 | 23.72 |
| 100% | | -30 | 5210069.88 | 69.88 |
| 100% | | -20 | 5210015.45 | 15.45 |
| 100% | | -10 | 5210099.78 | 99.78 |
| 100% | | 0 | 5210053.05 | 53.05 |
| 100% | | +10 | 5210096.04 | 96.04 |
| 100% | | +30 | 5210065.12 | 65.12 |
| 100% | | +40 | 5210017.04 | 17.04 |
| 100% | | +50 | 5210055.23 | 55.23 |
| Max | | 8 | +20 | 5210048.51 |
| Min | 16 | +20 | 5210012.57 | 12.57 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,775,000,000 Hz
 CHANNEL: 155
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5775012.17 | 12.17 |
| 100% | | -30 | 5775036.94 | 36.94 |
| 100% | | -20 | 5775029.61 | 29.61 |
| 100% | | -10 | 5775002.36 | 2.36 |
| 100% | | 0 | 5775054.06 | 54.06 |
| 100% | | +10 | 5775099.02 | 99.02 |
| 100% | | +30 | 5775043.22 | 43.22 |
| 100% | | +40 | 5775024.99 | 24.99 |
| 100% | | +50 | 5775028.07 | 28.07 |
| Max | | 8 | +20 | 5775098.07 |
| Min | 16 | +20 | 5775011.48 | 11.48 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5210004.47 | 4.47 |
| 100% | | -30 | 5210059.05 | 59.05 |
| 100% | | -20 | 5210082.33 | 82.33 |
| 100% | | -10 | 5210059.70 | 59.70 |
| 100% | | 0 | 5210051.31 | 51.31 |
| 100% | | +10 | 5210057.78 | 57.78 |
| 100% | | +30 | 5210013.25 | 13.25 |
| 100% | | +40 | 5210095.58 | 95.58 |
| 100% | | +50 | 5210085.70 | 85.70 |
| Max | | 8 | +20 | 5210038.73 |
| Min | 16 | +20 | 5210078.99 | 78.99 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,775,000,000 Hz
 CHANNEL: 155
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5775033.59 | 33.59 |
| 100% | | -30 | 5775076.12 | 76.12 |
| 100% | | -20 | 5775003.83 | 3.83 |
| 100% | | -10 | 5775044.91 | 44.91 |
| 100% | | 0 | 5775086.48 | 86.48 |
| 100% | | +10 | 5775043.38 | 43.38 |
| 100% | | +30 | 5775094.67 | 94.67 |
| 100% | | +40 | 5775004.48 | 4.48 |
| 100% | | +50 | 5775014.55 | 14.55 |
| Max | | 8 | +20 | 5775075.40 |
| Min | 16 | +20 | 5775067.97 | 67.97 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5210019.36 | 19.36 |
| 100% | | -30 | 5210063.31 | 63.31 |
| 100% | | -20 | 5210061.68 | 61.68 |
| 100% | | -10 | 5210018.06 | 18.06 |
| 100% | | 0 | 5210007.82 | 7.82 |
| 100% | | +10 | 5210032.57 | 32.57 |
| 100% | | +30 | 5210077.78 | 77.78 |
| 100% | | +40 | 5210021.45 | 21.45 |
| 100% | | +50 | 5210086.18 | 86.18 |
| Max | | 8 | +20 | 5210099.91 |
| Min | 16 | +20 | 5210077.15 | 77.15 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,775,000,000 Hz
 CHANNEL: 155
 REFERENCE VOLTAGE: 12 VDC

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (kHz) | Frequency Error (kHz) |
|-------------|-------------|------------|-----------------|-----------------------|
| 100% | 12 | +20(Ref) | 5775072.79 | 72.79 |
| 100% | | -30 | 5775050.13 | 50.13 |
| 100% | | -20 | 5775013.99 | 13.99 |
| 100% | | -10 | 5775063.73 | 63.73 |
| 100% | | 0 | 5775025.70 | 25.7 |
| 100% | | +10 | 5775011.44 | 11.44 |
| 100% | | +30 | 5775026.37 | 26.37 |
| 100% | | +40 | 5775084.47 | 84.47 |
| 100% | | +50 | 5775034.80 | 34.80 |
| Max | | 8 | +20 | 5775009.58 |
| Min | 16 | +20 | 5775018.67 | 18.67 |

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10.7 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

| Frequency | Measured Level | Ant. factor | Cable loss | Ant. POL | Total | Limit | Margin |
|-------------------------|----------------|-------------|------------|----------|--------|--------|--------|
| MHz | dBuV/m | dBm/m | dBm | (H/V) | dBuV/m | dBuV/m | dB |
| No Critical peaks found | | | | | | | |

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

| Frequency | Measured Level | Ant. factor | Cable loss | Ant. POL | Total | Limit | Margin |
|-------------------------|----------------|-------------|------------|----------|--------|--------|--------|
| MHz | dBuV/m | dBm/m | dBm | (H/V) | dBuV/m | dBuV/m | dB |
| No Critical peaks found | | | | | | | |

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode

Frequency Range : Above 1 GHz

| | |
|---------------------|----------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 a |
| Transfer Rate: | 6 Mbps |
| Operating Frequency | 5180 MHz |
| Channel No. | 36 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement Type |
|-----------|----------------|-------------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 10360 | 47.97 | 4.78 | V | 52.75 | 68.20 | 15.45 | PK |
| 15540 | 48.21 | 4.74 | V | 52.95 | 73.98 | 21.03 | PK |
| 15540 | 33.15 | 4.74 | V | 37.89 | 53.98 | 16.09 | AV |
| 10360 | 47.75 | 4.78 | H | 52.53 | 68.20 | 15.67 | PK |
| 15540 | 50.40 | 4.74 | H | 55.14 | 73.98 | 18.84 | PK |
| 15540 | 33.77 | 4.74 | H | 38.51 | 53.98 | 15.47 | AV |

| | |
|---------------------|----------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 a |
| Transfer Rate: | 6 Mbps |
| Operating Frequency | 5200 MHz |
| Channel No. | 40 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement Type |
|-----------|----------------|-------------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 10400 | 48.57 | 4.37 | V | 52.94 | 68.20 | 15.26 | PK |
| 15600 | 49.66 | 4.20 | V | 53.86 | 73.98 | 20.12 | PK |
| 15600 | 33.95 | 4.20 | V | 38.15 | 53.98 | 15.83 | AV |
| 10400 | 48.42 | 4.37 | H | 52.79 | 68.20 | 15.41 | PK |
| 15600 | 50.87 | 4.20 | H | 55.07 | 73.98 | 18.91 | PK |
| 15600 | 34.06 | 4.20 | H | 38.26 | 53.98 | 15.72 | AV |

| | |
|---------------------|----------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 a |
| Transfer Rate: | 6 Mbps |
| Operating Frequency | 5240 MHz |
| Channel No. | 48 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement Type |
|-----------|----------------|-------------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 10480 | 48.11 | 5.17 | V | 53.28 | 68.20 | 14.92 | PK |
| 15720 | 46.55 | 3.76 | V | 50.31 | 73.98 | 23.67 | PK |
| 15720 | 32.92 | 3.76 | V | 36.68 | 53.98 | 17.30 | AV |
| 10480 | 47.93 | 5.17 | H | 53.10 | 68.20 | 15.10 | PK |
| 15720 | 48.66 | 3.76 | H | 52.42 | 73.98 | 21.56 | PK |
| 15720 | 33.48 | 3.76 | H | 37.24 | 53.98 | 16.74 | AV |

| | |
|---------------------|-----------------|
| Band : | <u>UNII 3</u> |
| Operation Mode: | <u>802.11 a</u> |
| Transfer Rate: | <u>6 Mbps</u> |
| Operating Frequency | <u>5745MHz</u> |
| Channel No. | <u>149 Ch</u> |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement Type |
|-----------|----------------|-------------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 11490 | 46.75 | 5.07 | V | 51.82 | 73.98 | 22.16 | PK |
| 11490 | 35.04 | 5.07 | V | 40.11 | 53.98 | 13.87 | AV |
| 17235 | 46.28 | 9.49 | V | 55.77 | 68.20 | 12.43 | PK |
| 11490 | 46.29 | 5.07 | H | 51.36 | 73.98 | 22.62 | PK |
| 11490 | 34.57 | 5.07 | H | 39.64 | 53.98 | 14.34 | AV |
| 17235 | 45.99 | 9.49 | H | 55.48 | 68.20 | 12.72 | PK |

| | |
|---------------------|-----------------|
| Band : | <u>UNII 3</u> |
| Operation Mode: | <u>802.11 a</u> |
| Transfer Rate: | <u>6 Mbps</u> |
| Operating Frequency | <u>5785 MHz</u> |
| Channel No. | <u>157 Ch</u> |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement Type |
|-----------|----------------|-------------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 11570 | 47.29 | 5.07 | V | 52.36 | 73.98 | 21.62 | PK |
| 11570 | 33.31 | 5.07 | V | 38.38 | 53.98 | 15.60 | AV |
| 17355 | 45.66 | 10.50 | V | 56.16 | 68.20 | 12.04 | PK |
| 11570 | 46.78 | 5.07 | H | 51.85 | 73.98 | 22.13 | PK |
| 11570 | 33.07 | 5.07 | H | 38.14 | 53.98 | 15.84 | AV |
| 17355 | 45.19 | 10.78 | H | 55.97 | 68.20 | 12.23 | PK |

| | |
|---------------------|-----------------|
| Band : | <u>UNII 3</u> |
| Operation Mode: | <u>802.11 a</u> |
| Transfer Rate: | <u>6 Mbps</u> |
| Operating Frequency | <u>5825 MHz</u> |
| Channel No. | <u>165 Ch</u> |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement Type |
|-----------|----------------|-------------|----------|----------|----------|--------|------------------|
| [MHz] | [dBuV] | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | |
| 11650 | 47.44 | 4.76 | V | 52.20 | 73.98 | 21.78 | PK |
| 11650 | 33.95 | 4.76 | V | 38.71 | 53.98 | 15.27 | AV |
| 17475 | 46.78 | 10.29 | V | 57.07 | 68.20 | 11.13 | PK |
| 11650 | 46.07 | 4.76 | H | 50.83 | 73.98 | 23.15 | PK |
| 11650 | 33.86 | 4.76 | H | 38.62 | 53.98 | 15.36 | AV |
| 17475 | 46.30 | 10.29 | H | 56.59 | 68.20 | 11.61 | PK |

Note:


All Modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

- Worstcase : UNII 1, 3 : 802.11a

Test Plots

Peak Reading (802.11a, Ch.165 3rd Harmonic, X-V)

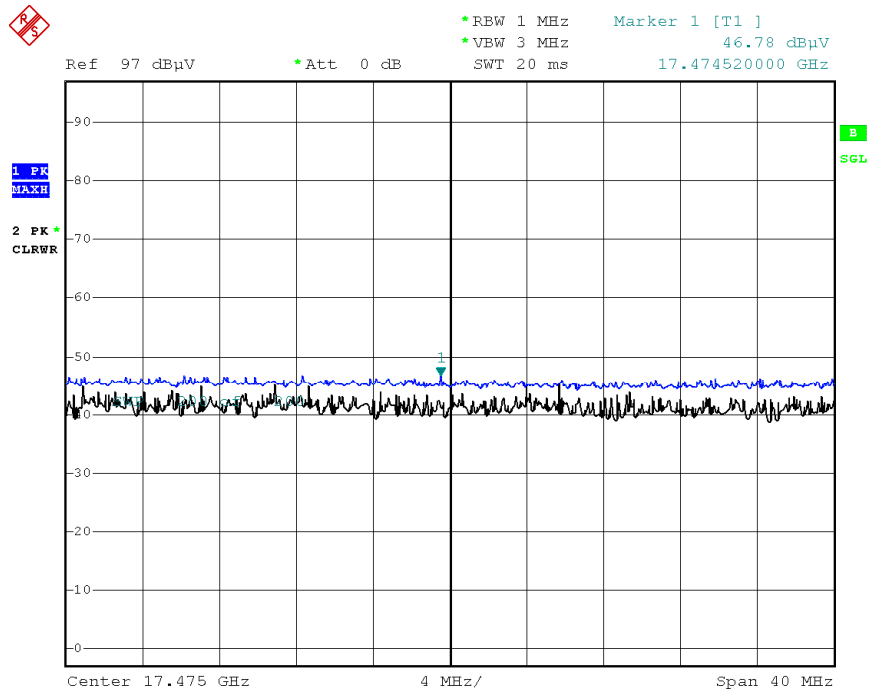

Date: 7.DEC.2021 19:02:47

Note:

Only the worst case plots for Radiated Spurious Emissions.

10.8 RADIATED RESTRICTED BAND EDGE

| | |
|---------------------|----------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 a |
| Transfer Rate: | 6 Mbps |
| Operating Frequency | 5180 MHz |
| Channel No. | 36 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|----------------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5400-5150 | 48.24 | 12.12 | H | 60.36 | 73.98 | 13.62 | PK |
| 5400-5150 | 34.76 | 12.12 | H | 46.88 | 53.98 | 7.10 | AV |
| 5400-5150 | 45.88 | 12.12 | V | 58.00 | 73.98 | 15.98 | PK |
| 5400-5150 | 33.04 | 12.12 | V | 45.16 | 53.98 | 8.82 | AV |

| | |
|---------------------|----------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 a |
| Transfer Rate: | 6 Mbps |
| Operating Frequency | 5320 MHz |
| Channel No. | 48 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|----------------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5250-5251 | 53.54 | 11.41 | H | 64.95 | 68.20 | 3.25 | PK |
| 5251-5252 | 49.21 | 11.41 | H | 60.62 | 68.20 | 7.58 | PK |
| 5252-5350 | 46.20 | 11.41 | H | 57.61 | 68.20 | 10.59 | PK |
| 5250-5251 | 53.07 | 11.41 | H | 64.48 | 68.20 | 3.72 | PK |
| 5251-5252 | 48.80 | 11.41 | H | 60.21 | 68.20 | 7.99 | PK |
| 5252-5350 | 46.44 | 11.41 | H | 57.85 | 68.20 | 10.35 | PK |

| | |
|---------------------|---------------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 n_HT20 |
| Transfer MCS Index: | 0 |
| Operating Frequency | 5180 MHz |
| Channel No. | 36 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|----------------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5400-5150 | 47.89 | 12.12 | H | 60.01 | 73.98 | 13.97 | PK |
| 5400-5150 | 34.82 | 12.12 | H | 46.94 | 53.98 | 7.04 | AV |
| 5400-5150 | 47.09 | 12.12 | V | 59.21 | 73.98 | 14.77 | PK |
| 5400-5150 | 34.24 | 12.12 | V | 46.36 | 53.98 | 7.62 | AV |

| | |
|---------------------|---------------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 n_HT20 |
| Transfer MCS Index: | 0 |
| Operating Frequency | 5320 MHz |
| Channel No. | 48 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|----------------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5250-5251 | 52.69 | 11.41 | H | 64.10 | 68.20 | 4.10 | PK |
| 5251-5252 | 47.93 | 11.41 | H | 59.34 | 68.20 | 8.86 | PK |
| 5252-5350 | 45.93 | 11.41 | H | 57.34 | 68.20 | 10.86 | PK |
| 5250-5251 | 53.70 | 11.41 | V | 65.11 | 68.20 | 3.09 | PK |
| 5251-5252 | 48.71 | 11.41 | V | 60.12 | 68.20 | 8.08 | PK |
| 5252-5350 | 46.70 | 11.41 | V | 58.11 | 68.20 | 10.09 | PK |

| | |
|---------------------|-----------------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 ac_VHT20 |
| Transfer MCS Index: | 0 |
| Operating Frequency | 5180 MHz |
| Channel No. | 36 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|----------------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5400-5150 | 47.15 | 12.12 | H | 59.27 | 73.98 | 14.71 | PK |
| 5400-5150 | 34.77 | 12.12 | H | 46.89 | 53.98 | 7.09 | AV |
| 5400-5150 | 46.38 | 12.12 | V | 58.50 | 73.98 | 15.48 | PK |
| 5400-5150 | 34.28 | 12.12 | V | 46.40 | 53.98 | 7.58 | AV |

| | |
|---------------------|-----------------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 ac_VHT20 |
| Transfer MCS Index: | 0 |
| Operating Frequency | 5320 MHz |
| Channel No. | 64 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|----------------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5250-5251 | 51.39 | 11.41 | H | 62.80 | 68.20 | 5.40 | PK |
| 5251-5252 | 47.97 | 11.41 | H | 59.38 | 68.20 | 8.82 | PK |
| 5252-5350 | 44.57 | 11.41 | H | 55.98 | 68.20 | 12.22 | PK |
| 5250-5251 | 52.95 | 11.41 | V | 64.36 | 68.20 | 3.84 | PK |
| 5251-5252 | 48.44 | 11.41 | V | 59.85 | 68.20 | 8.35 | PK |
| 5252-5350 | 45.11 | 11.41 | V | 56.52 | 68.20 | 11.68 | PK |

| | |
|---------------------|---------------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 n_HT40 |
| Transfer MCS Index: | 0 |
| Operating Frequency | 5190 MHz |
| Channel No. | 38 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|----------------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5400-5150 | 49.40 | 12.12 | H | 61.52 | 73.98 | 12.46 | PK |
| 5400-5150 | 37.93 | 12.12 | H | 50.05 | 53.98 | 3.93 | AV |
| 5400-5150 | 48.39 | 12.12 | V | 60.51 | 73.98 | 13.47 | PK |
| 5400-5150 | 37.07 | 12.12 | V | 49.19 | 53.98 | 4.79 | AV |

| | |
|---------------------|---------------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 n_HT40 |
| Transfer MCS Index: | 0 |
| Operating Frequency | 5320 MHz |
| Channel No. | 46 Ch |

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|----------------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5250-5251 | 53.38 | 11.41 | H | 64.79 | 68.20 | 3.41 | PK |
| 5251-5252 | 50.12 | 11.41 | H | 61.53 | 68.20 | 6.67 | PK |
| 5252-5350 | 50.50 | 11.41 | H | 61.91 | 68.20 | 6.29 | PK |
| 5250-5251 | 52.17 | 11.41 | V | 63.58 | 68.20 | 4.62 | PK |
| 5250-5251 | 49.24 | 11.41 | V | 60.65 | 68.20 | 7.55 | PK |
| 5251-5350 | 49.33 | 11.41 | V | 60.74 | 68.20 | 7.46 | PK |

Band : UNII 1
 Operation Mode: 802.11 ac_VHT40
 Transfer MCS Index: 0
 Operating Frequency 5190 MHz
 Channel No. 38 Ch

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|----------------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5400-5150 | 48.03 | 12.12 | H | 60.15 | 73.98 | 13.83 | PK |
| 5400-5150 | 35.87 | 12.12 | H | 47.99 | 53.98 | 5.99 | AV |
| 5400-5150 | 47.62 | 12.12 | V | 59.74 | 73.98 | 14.24 | PK |
| 5400-5150 | 35.04 | 12.12 | V | 47.16 | 53.98 | 6.82 | AV |

Band : UNII 1
 Operation Mode: 802.11 ac_VHT40
 Transfer MCS Index: 0
 Operating Frequency 5230 MHz
 Channel No. 46 Ch

| Frequency | Measured Level | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|----------------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5250-5251 | 52.82 | 11.41 | H | 64.23 | 68.20 | 3.97 | PK |
| 5251-5252 | 49.50 | 11.41 | H | 60.91 | 68.20 | 7.29 | PK |
| 5252-5350 | 49.13 | 11.41 | H | 60.54 | 68.20 | 7.66 | PK |
| 5250-5251 | 51.66 | 11.41 | V | 63.07 | 68.20 | 5.13 | PK |
| 5250-5251 | 48.39 | 11.41 | V | 59.80 | 68.20 | 8.40 | PK |
| 5251-5350 | 48.19 | 11.41 | V | 59.60 | 68.20 | 8.60 | PK |

| | |
|---------------------|-----------------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 ac_VHT80 |
| Transfer MCS Index: | 0 |
| Operating Frequency | 5210 MHz |
| Channel No. | 42 Ch |


| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|---------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5400-5150 | 46.75 | 12.12 | H | 58.87 | 73.98 | 15.11 | PK |
| 5400-5150 | 36.02 | 12.12 | H | 48.14 | 53.98 | 5.84 | AV |
| 5400-5150 | 45.99 | 12.12 | V | 58.11 | 73.98 | 15.87 | PK |
| 5400-5150 | 35.40 | 12.12 | V | 47.52 | 53.98 | 6.46 | AV |

| | |
|---------------------|-----------------|
| Band : | UNII 1 |
| Operation Mode: | 802.11 ac_VHT80 |
| Transfer MCS Index: | 0 |
| Operating Frequency | 5210 MHz |
| Channel No. | 42 Ch |

| Frequency | Reading | CL+AF+DF-AG | ANT. POL | Total | Limit | Margin | Measurement |
|-----------|---------|-------------|----------|----------|----------|--------|-------------|
| [MHz] | dBuV | [dB/m] | [H/V] | [dBuV/m] | [dBuV/m] | [dB] | Type |
| 5250-5251 | 53.48 | 11.41 | H | 64.89 | 68.20 | 3.31 | PK |
| 5251-5252 | 50.83 | 11.41 | H | 62.24 | 68.20 | 5.96 | PK |
| 5252-5350 | 51.42 | 11.41 | H | 62.83 | 68.20 | 5.37 | PK |
| 5250-5251 | 52.19 | 11.41 | V | 63.60 | 68.20 | 4.60 | PK |
| 5251-5252 | 49.24 | 11.41 | V | 60.65 | 68.20 | 7.55 | PK |
| 5252-5350 | 50.17 | 11.41 | V | 61.58 | 68.20 | 6.62 | PK |


Test Plots(UNII 1)(Y-V)

Peak Reading (802.11 n_HT20, Ch.48)_ 5250 MHz - 5251 MHz

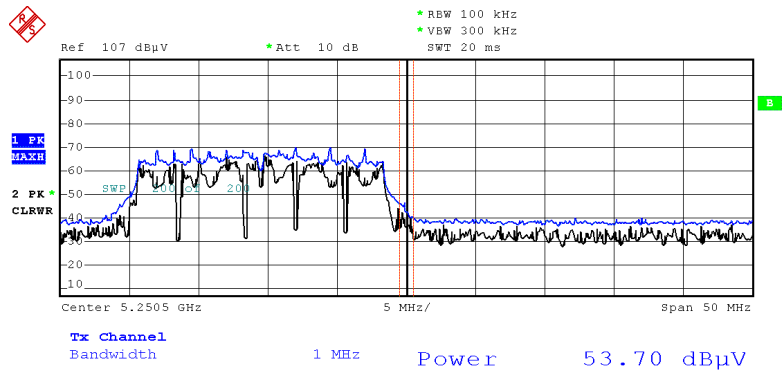


Date: 8.DEC.2021 10:30:26

Peak Reading (802.11 n_HT20, Ch.48)_ 5251 MHz - 5252 MHz

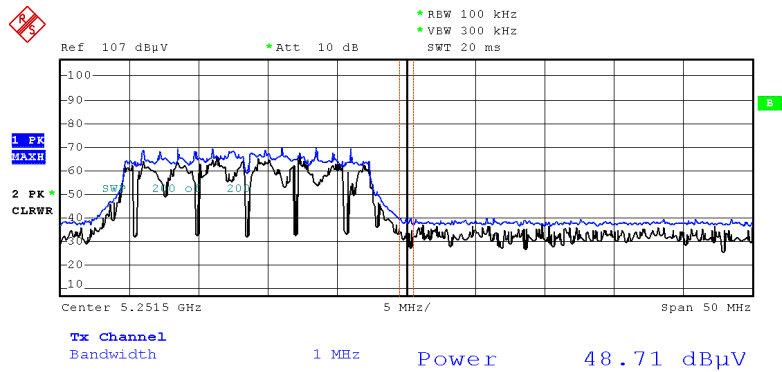

Date: 8.DEC.2021 10:31:26

Peak Reading (802.11 n_HT20, Ch.48)_ 5252 MHz - 5350 MHz

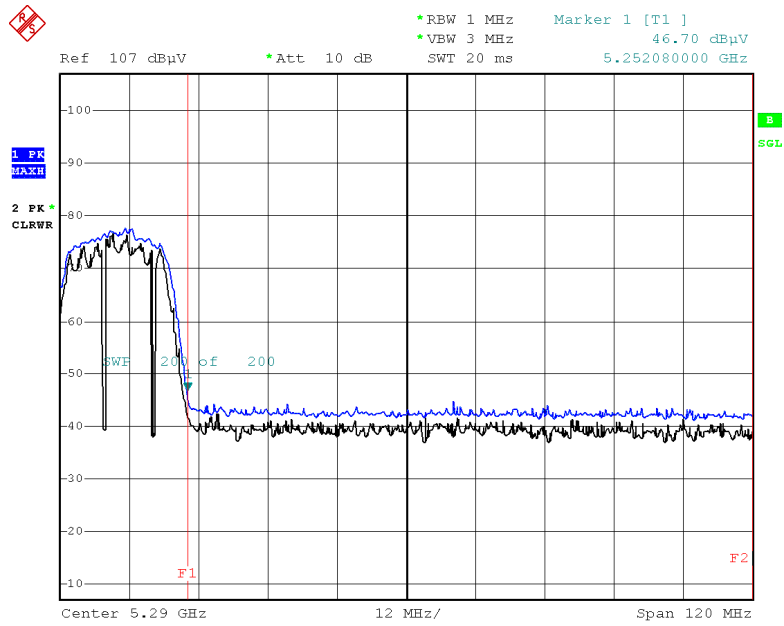


Date: 8.DEC.2021 10:29:14

Note:

Only the worst case plots for Radiated Restricted Band Edge.


Test Plots(UNII 3)

Peak Reading (802.11a)_Low

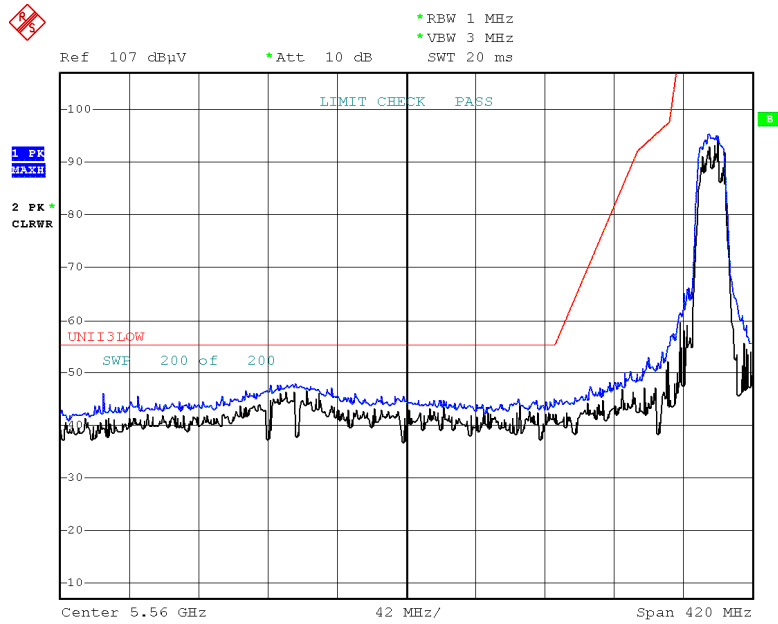


Date: 9.DEC.2021 16:49:35

Peak Reading (802.11a)_High

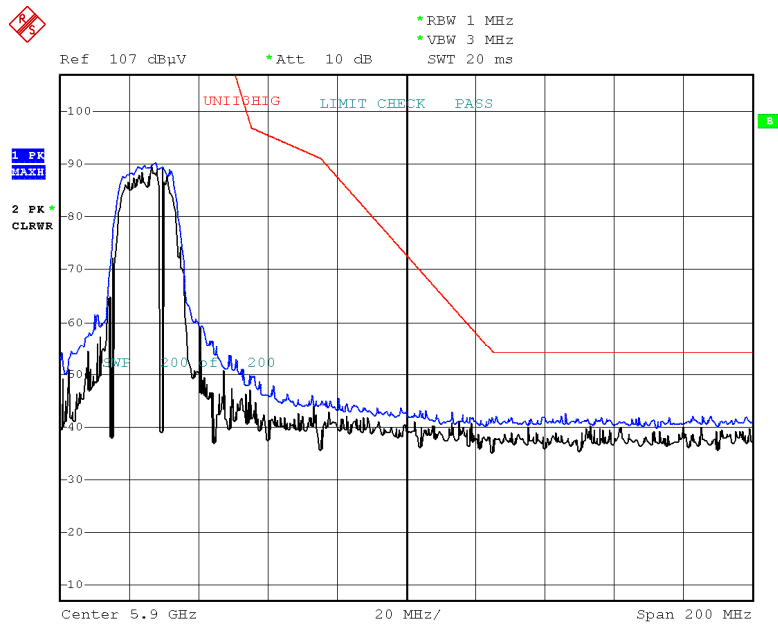


Date: 9.DEC.2021 16:37:55

Peak Reading (802.11n_HT20)_Low

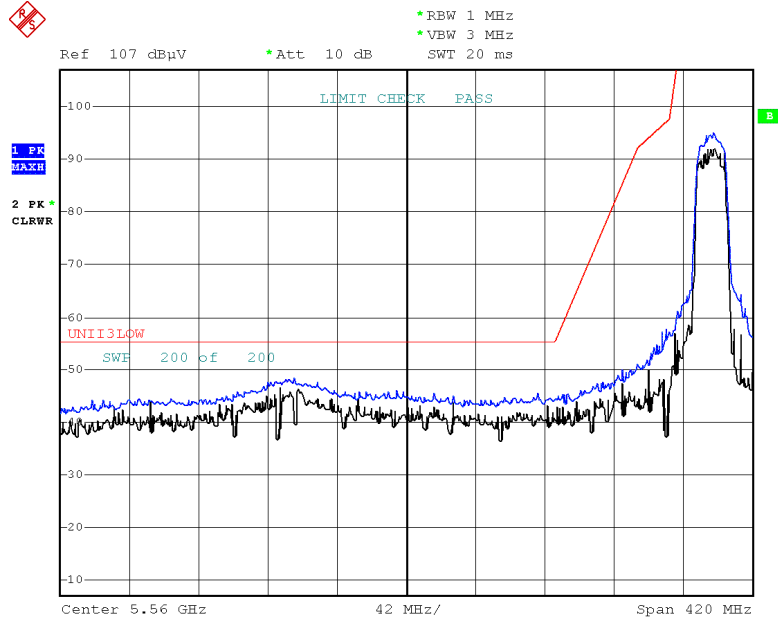


Date: 9.DEC.2021 16:50:48

Peak Reading (802.11n_HT20)_High

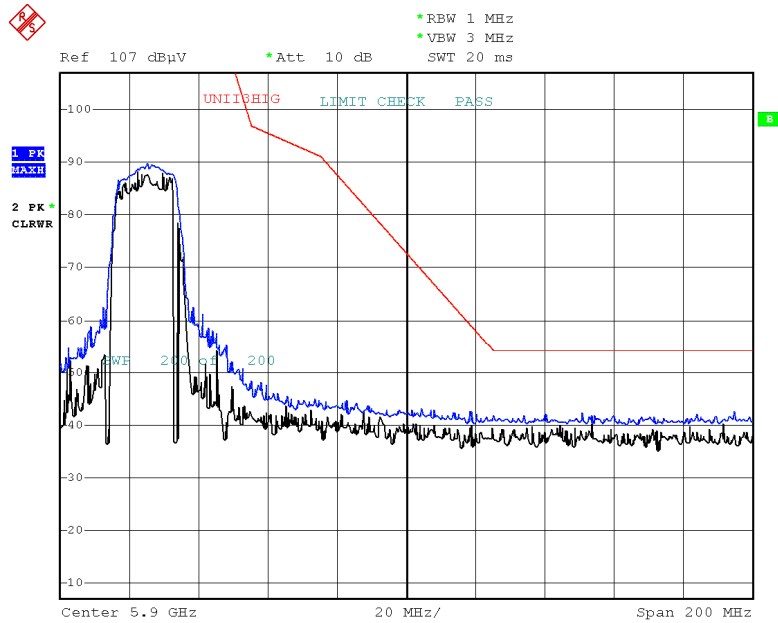


Date: 9.DEC.2021 16:39:20

Peak Reading (802.11ac_VHT20)_Low

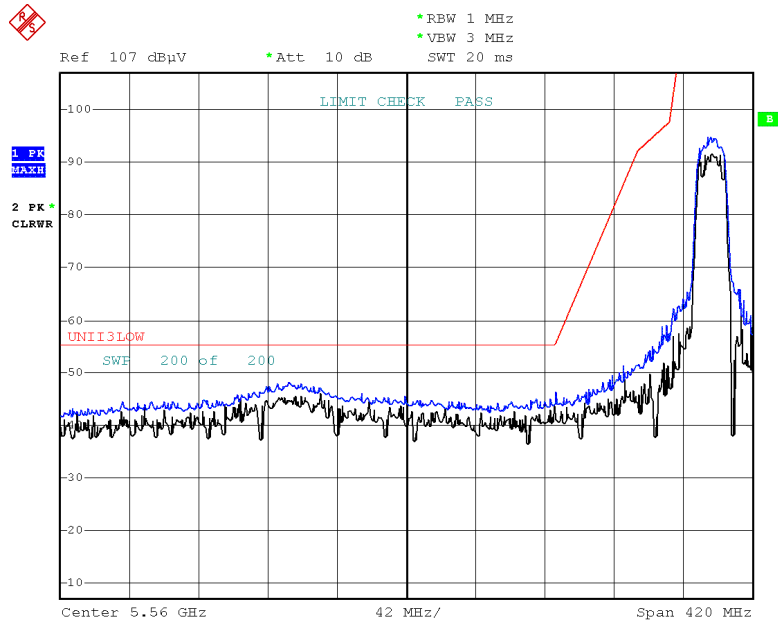


Date: 9.DEC.2021 16:51:40

Peak Reading (802.11ac_VHT20)_High

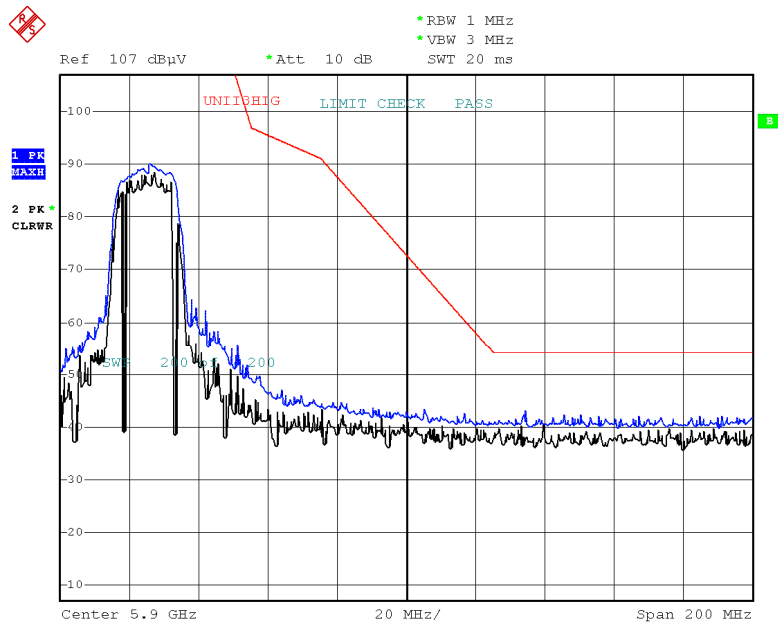


Date: 9.DEC.2021 16:40:07

Peak Reading (802.11n_HT40)_Low

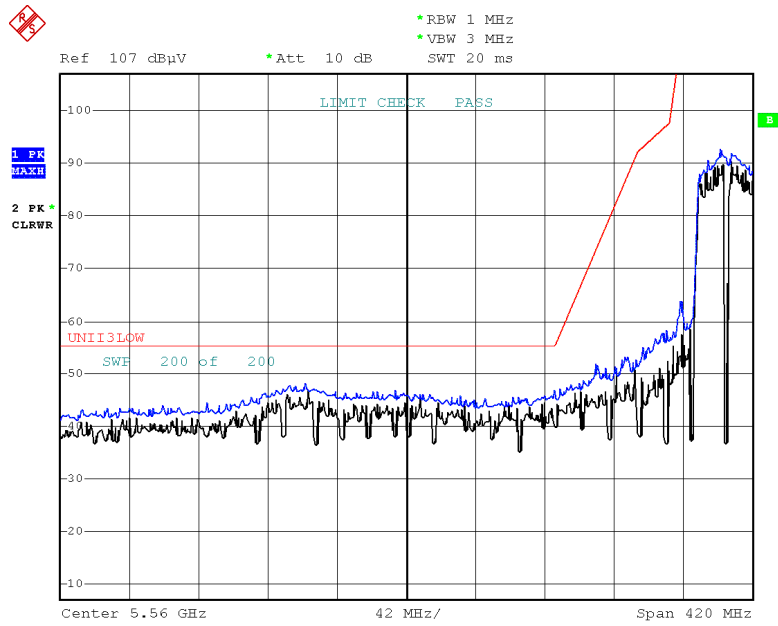


Date: 9.DEC.2021 16:52:27

Peak Reading (802.11n_HT40)_High

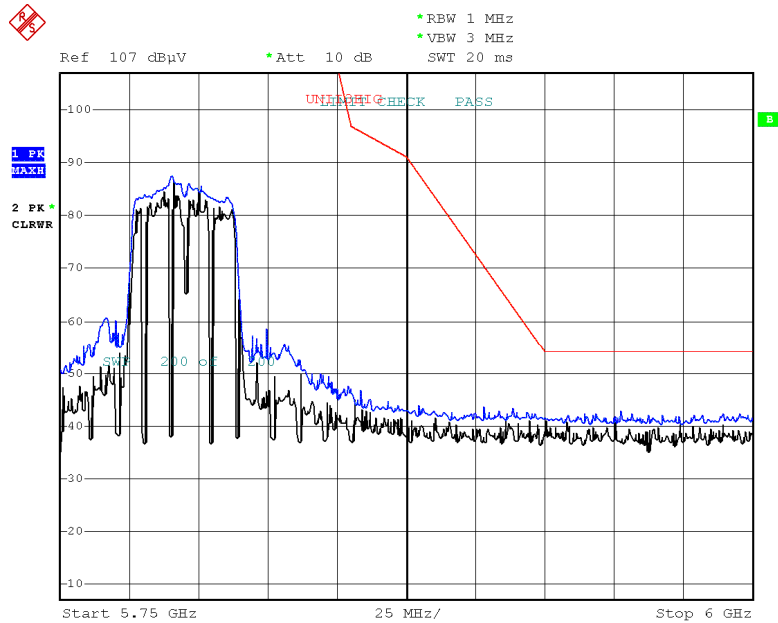


Date: 9.DEC.2021 16:41:33

Peak Reading (802.11ac_VHT40)_Low

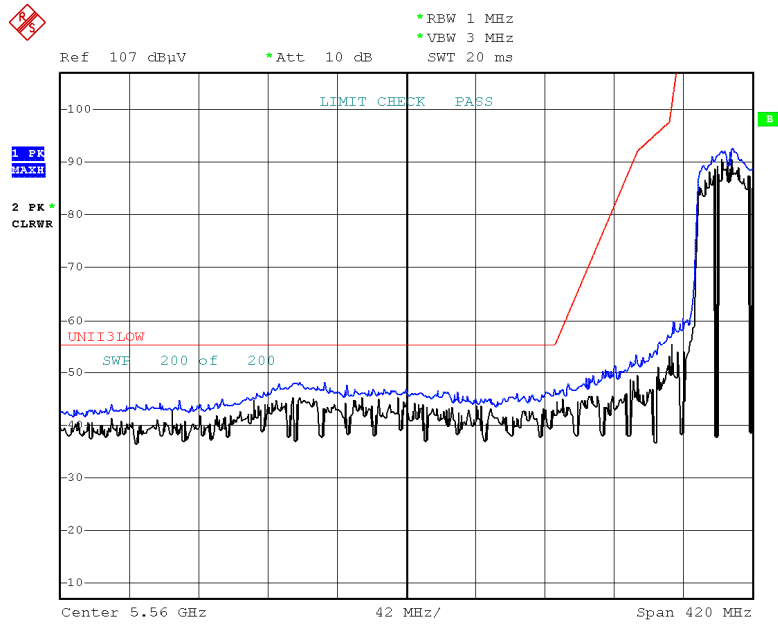


Date: 9.DEC.2021 16:54:11

Peak Reading (802.11ac_VHT40)_High

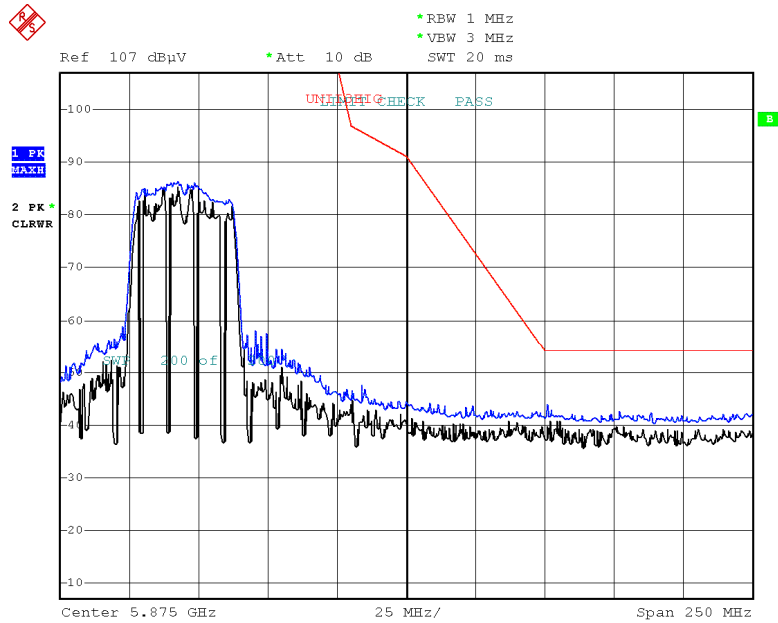

Date: 9.DEC.2021 16:42:41

Peak Reading (802.11ac_VHT80)

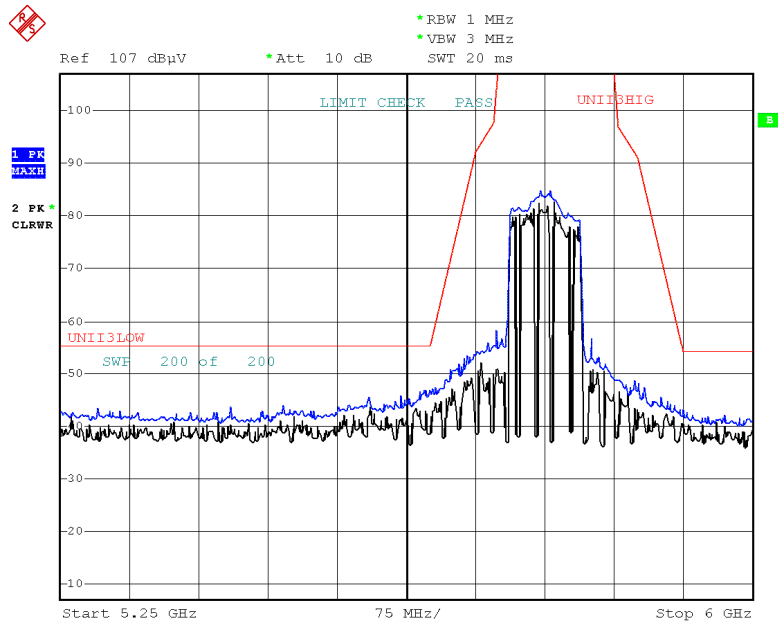

Date: 9.DEC.2021 16:44:10

Note :

1. Only the worst case plots for U-NII-3 Out of Band e.i.r.p Emission.
2. U-NII-3 Low & High Band Edge RedLine is Final Test Limit about factor value compensation.

10.9 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

| Frequency | Measured Level | Ant. factor | Cable loss | Ant. POL | Total | Limit | Margin |
|-------------------------|----------------|-------------|------------|----------|--------|--------|--------|
| MHz | dBuV/m | dBm/m | dBm | (H/V) | dBuV/m | dBuV/m | dB |
| No Critical peaks found | | | | | | | |

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

| Frequency | Measured Level | Ant. factor | Cable loss | Ant. POL | Total | Limit | Margin |
|-------------------------|----------------|-------------|------------|----------|--------|--------|--------|
| MHz | dBuV/m | dBm/m | dBm | (H/V) | dBuV/m | dBuV/m | dB |
| No Critical peaks found | | | | | | | |

11. LIST OF TEST EQUIPMENT

Conducted Test

| Equipment | Model | Manufacturer | Serial No. | Due to Calibration | Calibration Interval |
|----------------------------------------------|----------------------------------------------|-----------------|------------|--------------------|----------------------|
| LISN | ENV216 | Rohde & Schwarz | 102245 | 08/23/2022 | Annual |
| Test Receiver | ESCI | Rohde & Schwarz | 100033 | 06/15/2022 | Annual |
| Temperature Chamber | SU-642 | ESPAC | 0093008124 | 03/15/2022 | Annual |
| Signal Analyzer | N9020A | Agilent | MY47380318 | 01/28/2022 | Annual |
| Signal Analyzer | N9030A | Agilent | MY49431210 | 01/11/2022 | Annual |
| Power Meter | N1911A | Agilent | MY45100523 | 04/08/2022 | Annual |
| Power Sensor | N1921A | Agilent | MY57820067 | 04/08/2022 | Annual |
| Directional Coupler | 87300B | Agilent | 3116A03621 | 11/02/2022 | Annual |
| Power Splitter | 11667B | Hewlett Packard | 05001 | 05/20/2022 | Annual |
| DC Power Supply | E3632A | Hewlett Packard | KR75303960 | 06/10/2022 | Annual |
| Attenuator | 5910-N-50-010 | H+S | 00801 | 10/29/2022 | Annual |
| Software | EMC32 | Rohde & Schwarz | N/A | N/A | N/A |
| FCC WLAN&BT&BLE Conducted Test Software v3.0 | FCC WLAN&BT&BLE Conducted Test Software v3.0 | HCT CO., LTD. | N/A | N/A | N/A |
| Bluetooth Tester | CBT | Rohde & Schwarz | 100422 | 05/04/2022 | Annual |

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

| Equipment | Model | Manufacturer | Serial No. | Due to Calibration | Calibration Interval |
|-------------------------------------------------|------------------------------------|------------------------|-------------|--------------------|----------------------|
| Controller (Antenna mast) | CO3000 | Innco system | CO3000-4p | N/A | N/A |
| Antenna Position Tower | MA4640/800-XP-EP | Innco system | N/A | N/A | N/A |
| Controller | 2090 | Emco | 060520 | N/A | N/A |
| Turn Table | Turn Table | Ets | N/A | N/A | N/A |
| Loop Antenna | Loop Antenna | Rohde & Schwarz | 1513-333 | 03/19/2022 | Biennial |
| Hybrid Antenna | VULB 9168 | Schwarzbeck | 9168-0895 | 09/04/2022 | Biennial |
| Horn Antenna | BBHA 9120D | Schwarzbeck | 9120D-1191 | 11/18/2023 | Biennial |
| Horn Antenna (15 GHz ~ 40 GHz) | BBHA9170 | Schwarzbeck | BBHA9170541 | 11/16/2023 | Biennial |
| Spectrum Analyzer | FSP (9 kHz ~ 30 GHz) | Rohde & Schwarz | 836650/016 | 09/13/2022 | Annual |
| Spectrum Analyzer | FSV40-N | Rohde & Schwarz | 101068-SZ | 09/15/2022 | Annual |
| Band Reject Filter | WRCJV2400/2483.5-2370/2520-60/12SS | Wainwright Instruments | 2 | 01/06/2022 | Annual |
| Band Reject Filter | WRCJV5100/5850-40/50-8EEK | Wainwright Instruments | 1 | 02/08/2022 | Annual |
| Attenuator 56-10 | CBLU1183540B-01 56-10 | CERNEX WEINSCHTEL | N/A | 12/23/2021 | Annual |
| Broadband Low Noise Amplifier Attenuator (3 dB) | CBL06185030 18B-03 | CERNEX Api tech. | N/A | 12/23/2021 | Annual |
| High Pass Filter | WHKX10-2700-3000-18000-40SS | Wainwright Instruments | N/A | 12/23/2021 | Annual |
| High Pass Filter | WHKX8-6090-7000-18000-40SS | Wainwright Instruments | N/A | 12/23/2021 | Annual |
| Thru | COAXIAL ATTENUATOR | T&M SYSTEM | N/A | 12/23/2021 | Annual |
| Power Amplifier | CBL18265035 | CERNEX | 22966 | 12/02/2022 | Annual |
| Power Amplifier | CBL26405040 | CERNEX | 25956 | 03/23/2022 | Annual |
| Bluetooth Tester | TC-3000C | TESCOM | 3000C000276 | 03/09/2022 | Annual |

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description |
|-----|---------------------|
| 1 | HCT-RF-2112-FI006-P |