

TEST REPORT

of

FCC Part 22 Subpart H, Part 24 Subpart E

FCC ID: BEJIGCJ1PHE

Equipment Under Test : Car AVN
Model Name : IGCJ1PHE
Applicant : LG Electronics USA
Manufacturer : LG Electronics USA
Date of Receipt : 2018.09.21
Date of Test(s) : 2018.09.22 ~ 2019.04.22
Date of Issue : 2019.05.14

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Nancy Park

Date:

2019.05.14

Technical
Manager:



Jungmin Yang

Date:

2019.05.14

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

TABLE OF CONTENTS

| | Page |
|--|------|
| 1. General Information ----- | 3 |
| 2. RF Radiated Output Power & Spurious Radiated Emission ----- | 6 |
| 3. Conducted Output Power ----- | 18 |
| 4. Occupied Bandwidth ----- | 20 |
| 5. Peak-Average Ratio ----- | 28 |
| 6. Spurious Emissions At Antenna Terminal ----- | 36 |
| 7. Band Edge ----- | 46 |
| 8. Frequency Stability ----- | 51 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of Applicant

Applicant : LG Electronics USA
 Address : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States, 07632
 Contact Person : Han, Kyung-su
 Phone No. : +2 201 472 2623

1.3. Details of Manufacturer

Company : LG Electronics Inc.
 Address : 10, Magokjungang 10-ro, Gangseo-gu, Seoul, Korea, 07796

1.4. Description of EUT

| | |
|----------------------|---|
| Kind of Product | Car AVN |
| Model Name | IGCJ1PHE |
| Power Supply | DC 12 V |
| Rated Power | GSM 850: 33 dB m GSM 1 900: 30 dB m |
| Frequency Range | GSM 850: 824 MHz ~ 849 MHz GSM 1 900: 1 850 MHz ~ 1 910 MHz |
| Emission Designator | GSM 850: 245KGXW (GPRS) / 246KG7W (EDGE) GSM 1900: 247KGXW (GPRS) / 246KG7W (EDGE) |
| Modulation Technique | GMSK, 8PSK |
| Antenna Type | External antenna |
| Antenna gain | 824 MHz ~ 849 MHz: -0.69 dB i, 1 850 MHz ~ 1 910 MHz: 0.85 dB i |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

1.5. Test Equipment List

| Equipment | Manufacturer | Model | S/N | Cal. Date | Cal. Interval | Cal. Due. |
|---------------------|----------------------------|-----------------------------------|------------------------|---------------|---------------|---------------|
| Signal Generator | Agilent | E8257D | MY51501169 | Jul. 03, 2018 | Annual | Jul. 03, 2019 |
| Spectrum Analyzer | R&S | FSV30 | 103102 | Jun. 11, 2018 | Annual | Jun. 11, 2019 |
| Mobile Test Unit | R&S | CMW500 | 144035 | Feb. 19, 2019 | Annual | Feb. 19, 2020 |
| Power Meter | Anritsu | ML2495A | 1223004 | Jun. 12, 2018 | Annual | Jun. 12, 2019 |
| Power Sensor | Anritsu | MA2411B | 1207272 | Jun. 12, 2018 | Annual | Jun. 12, 2019 |
| Directional Coupler | KRYTAR | 152613 | 140972 | Jun. 14, 2018 | Annual | Jun. 14, 2019 |
| Temperature Chamber | ESPEC CORP. | PL-1J | 15000793 | Jun. 14, 2018 | Annual | Jun. 14, 2019 |
| High Pass Filter | Wainwright Instrument GmbH | WHKX10-900-1000-18000-40SS | 7 | Mar. 12, 2019 | Annual | Mar. 12, 2020 |
| High Pass Filter | Wainwright Instrument GmbH | WHKX2.2/12.75G-10SS | 8 | Mar. 12, 2019 | Annual | Mar. 12, 2020 |
| DC Power Supply | R&S | HMP2020 | 019258024 | Nov. 06, 2018 | Annual | Nov. 06, 2019 |
| Preamplifier | H.P. | 8447F | 2944A03909 | Aug. 07, 2018 | Annual | Aug. 07, 2019 |
| Preamplifier | Agilent | 8449B | 3008A01932 | Feb. 22, 2019 | Annual | Feb. 22, 2020 |
| Preamplifier | MITEQ Inc. | JS44-18004000-35-8P | 1546891 | May 13, 2018 | Annual | May 13, 2019 |
| Test Receiver | R&S | ESU26 | 100109 | Jan. 31, 2019 | Annual | Jan. 31, 2020 |
| Bilog Antenna | SCHWARZBECK MESSELEKTRONIK | VULB9163 | 01126 | Mar. 26, 2018 | Biennial | Mar. 26, 2020 |
| Horn Antenna | R&S | HF906 | 100326 | Feb. 14, 2018 | Biennial | Feb. 14, 2020 |
| Horn Antenna | SCHWARZBECK MESSELEKTRONIK | BBHA9170 | BBHA9170223 | Sep. 10, 2018 | Biennial | Sep. 10, 2020 |
| Antenna Master | Innco systems GmbH | MM4000 | N/A | N.C.R. | N/A | N.C.R. |
| Turn Table | Innco systems GmbH | DS 1200S | N/A | N.C.R. | N/A | N.C.R. |
| Controller | Innco systems GmbH | CONTROLLER CO3000-4P | CO3000/963/383 30516/L | N.C.R. | N/A | N.C.R. |
| Anechoic Chamber | SY Corporation | L x W x H (9.6 m x 6.4 m x 6.4 m) | N/A | N.C.R. | N/A | N.C.R. |

► Support Equipment

| Description | Manufacturer | Model | Serial Number |
|-------------|--------------|-------|---------------|
| N/A | - | - | - |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 2, 22, 24 | | |
|--|---------------------------------------|----------|
| Section | Test Item | Result |
| §2.1046 §22.913(a)(5) §24.232(c) | RF Radiated Output Power | Complied |
| §2.1053 §22.917(a) §24.238(a) | Spurious Radiated Emission | Complied |
| §2.1046 | Conducted Output Power | Complied |
| §2.1049 | Occupied Bandwidth | Complied |
| §22.913(d) §24.232(d) | Peak-Average Ratio | Complied |
| §2.1051 §22.917(a) §24.238(a) | Spurious Emission at Antenna Terminal | Complied |
| §22.917(a) §24.238(a) | Band Edge | Complied |
| §2.1055 §22.355 §24.235 | Frequency Stability | Complied |

1.7. Test Report Revision

| Revision | Report number | Date of Issue | Description |
|----------|------------------------|---------------|---|
| 0 | F690501/RF-RTL013756 | 2019.04.24 | Initial |
| 1 | F690501/RF-RTL013756-1 | 2019.05.14 | Added the information of clause 1.4 and the test method of C63.26 |

1.8. Sample Calculation for Offset

Where relevant, the following sample calculation is provided:

1.8.1. Conducted Test

Offset value (dB) = Directional Coupler (dB) + Cable loss (dB)

1.8.2. Radiation Test

E.R.P. & E.I.R.P. = [S.G level + Amp.] (dB m) - Cable loss (dB) + Ant. gain (dB d/dB i)

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)


2. RF Radiated Output Power & Spurious Radiated Emission

2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 MHz to 30 MHz emissions.

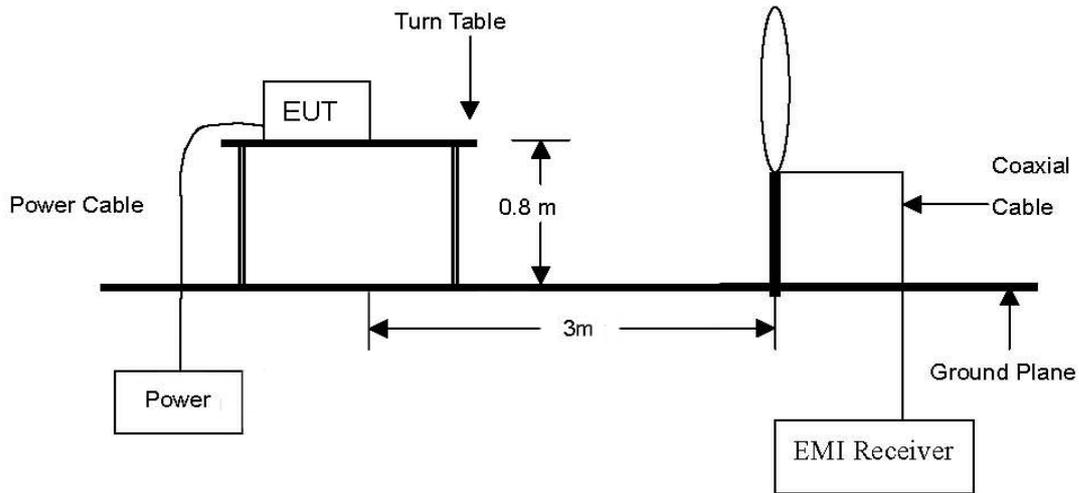


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

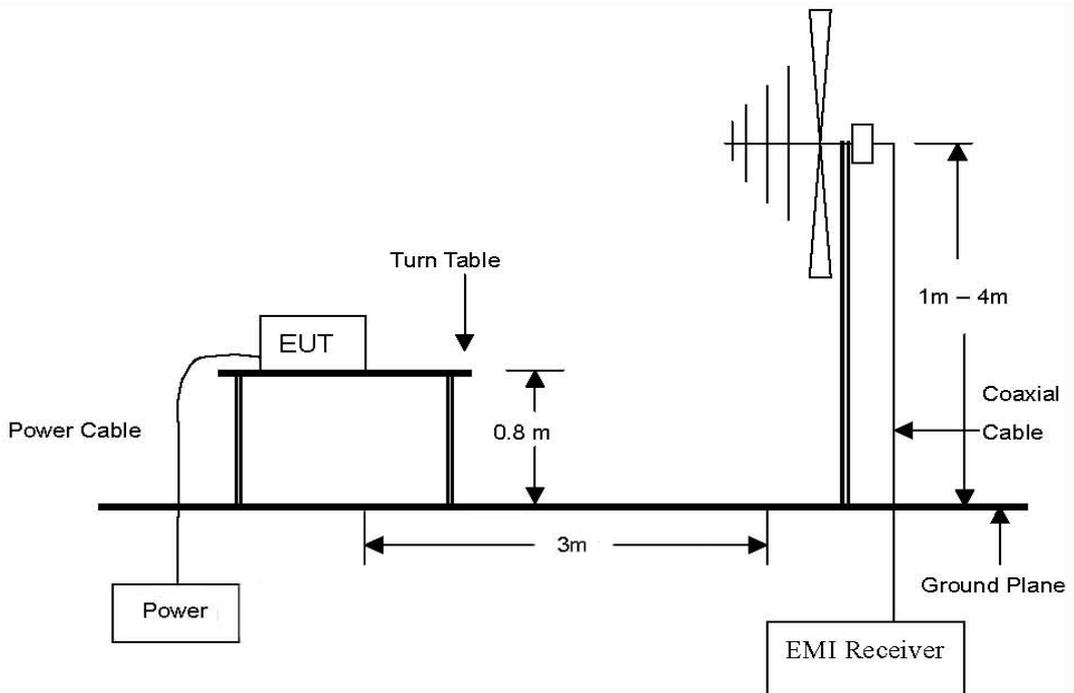


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 20 GHz Emissions.

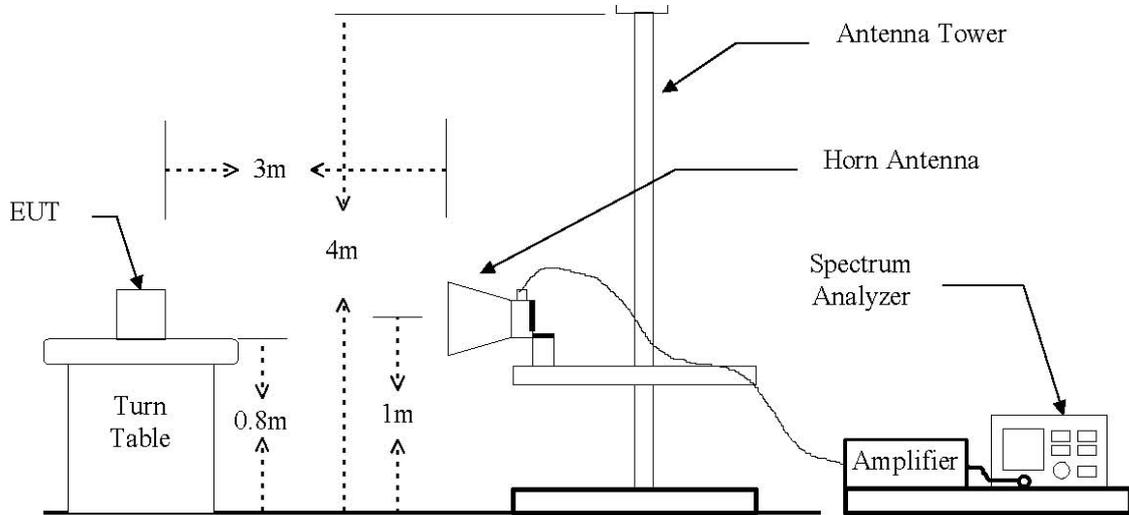

The diagram below shows the test setup for substituted method.

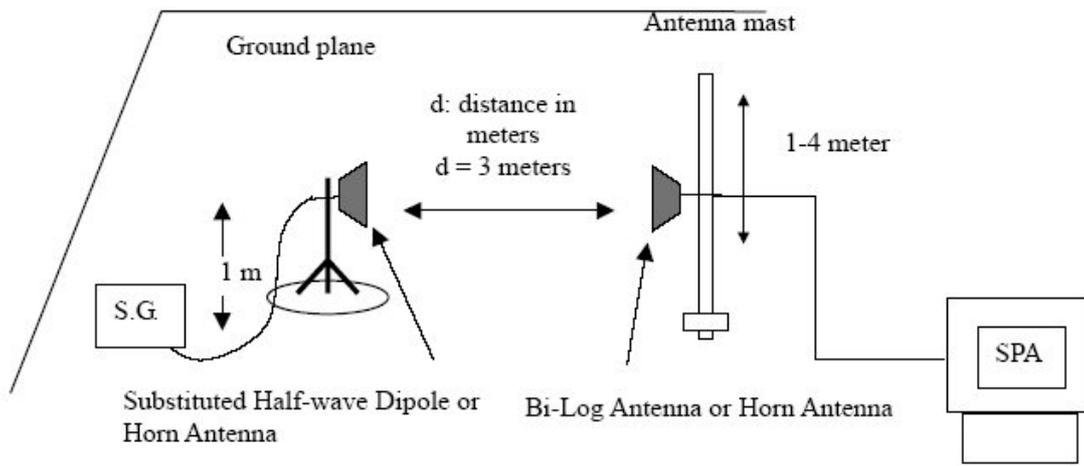

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.2. Limit

2.2.1. Limit of Radiated Output Power

- §22.913(a)(5), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.
- §24.232(c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means to limiting power to the minimum necessary for successful communications.

2.2.2. Limit of Spurious Radiated Emission

- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.
- §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

2.3. Test procedure: Based on ANSI/TIA 603E: 2016 and ANSI C63.26-2015

1. On a test site, the EUT shall be placed at 80 cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions occupied bandwidth, RBW = 1-5 % of the OBW (not to exceed 1 MHz), VBW $\geq 3 \times$ RBW, Detector = power averaging (rms), sweep time = auto, trace average at least 100 traces in power averaging (rms) mode, per the guidelines of KDB 971168 D01 Power Meas License Digital Systems v03r01.
5. Radiated spurious emissions measurement method was set as follows:
RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz, VBW $\geq 3 \times$ RBW, Detector = Peak, trace mode = max hold, per the guidelines of KDB 971168 D01 Power Meas License Digital Systems v03r01.
6. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
7. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
8. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
9. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
10. The maximum signal level detected by the measuring receiver shall be noted.
11. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
12. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.4. Test result for RF radiated output power

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

GSM 850 GPRS

| Frequency (MHz) | Ant. Pol. (H/V) | S.G level + Amp. (dB m) | Cable loss (dB) | Ant. gain (dB d) | E.R.P. | |
|-----------------|-----------------|-------------------------|-----------------|------------------|--------|--------|
| | | | | | (dB m) | (mW) |
| 824.2 | H | 33.40 | 3.24 | -4.85 | 25.31 | 339.63 |
| 824.2 | V | 31.42 | 3.24 | -4.85 | 23.33 | 215.28 |
| 836.6 | H | 33.15 | 3.45 | -5.14 | 24.56 | 285.76 |
| 836.6 | V | 33.23 | 3.45 | -5.14 | 24.64 | 291.07 |
| 848.8 | H | 33.50 | 3.52 | -4.05 | 25.93 | 391.74 |
| 848.8 | V | 32.83 | 3.52 | -4.05 | 25.26 | 335.74 |

GSM 850 EDGE

| Frequency (MHz) | Ant. Pol. (H/V) | S.G level + Amp. (dB m) | Cable loss (dB) | Ant. gain (dB d) | E.R.P. | |
|-----------------|-----------------|-------------------------|-----------------|------------------|--------|--------|
| | | | | | (dB m) | (mW) |
| 824.2 | H | 28.60 | 3.24 | -4.85 | 20.51 | 112.46 |
| 824.2 | V | 24.84 | 3.24 | -4.85 | 16.75 | 47.32 |
| 836.6 | H | 26.31 | 3.45 | -5.14 | 17.72 | 59.16 |
| 836.6 | V | 26.00 | 3.45 | -5.14 | 17.41 | 55.08 |
| 848.8 | H | 27.61 | 3.52 | -4.05 | 20.04 | 100.93 |
| 848.8 | V | 25.40 | 3.52 | -4.05 | 17.83 | 60.67 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

GSM 1900 GPRS

| Frequency (MHz) | Ant. Pol. (H/V) | S.G level + Amp. (dB m) | Cable loss (dB) | Ant. gain (dB i) | E.I.R.P. | |
|-----------------|-----------------|-------------------------|-----------------|------------------|----------|--------|
| | | | | | (dB m) | (mW) |
| 1 850.2 | H | 15.64 | 4.33 | 8.53 | 19.84 | 96.38 |
| 1 850.2 | V | 18.44 | 4.33 | 8.53 | 22.64 | 183.65 |
| 1 880.0 | H | 19.02 | 4.34 | 8.63 | 23.31 | 214.29 |
| 1 880.0 | V | 21.89 | 4.34 | 8.63 | 26.18 | 414.95 |
| 1 909.8 | H | 15.06 | 4.36 | 8.59 | 19.29 | 84.92 |
| 1 909.8 | V | 20.17 | 4.36 | 8.59 | 24.40 | 275.42 |

GSM 1900 EDGE

| Frequency (MHz) | Ant. Pol. (H/V) | S.G level + Amp. (dB m) | Cable loss (dB) | Ant. gain (dB i) | E.I.R.P. | |
|-----------------|-----------------|-------------------------|-----------------|------------------|----------|--------|
| | | | | | (dB m) | (mW) |
| 1 850.2 | H | 12.41 | 4.33 | 8.53 | 16.61 | 45.81 |
| 1 850.2 | V | 15.28 | 4.33 | 8.53 | 19.48 | 88.72 |
| 1 880.0 | H | 15.81 | 4.34 | 8.63 | 20.10 | 102.33 |
| 1 880.0 | V | 18.52 | 4.34 | 8.63 | 22.81 | 190.99 |
| 1 909.8 | H | 11.83 | 4.36 | 8.59 | 16.06 | 40.36 |
| 1 909.8 | V | 16.92 | 4.36 | 8.59 | 21.15 | 130.32 |

Remark;

1. E.R.P. & E.I.R.P. = [S.G level + Amp.] (dB m) - Cable loss (dB) + Ant. gain (dB d/dB i)

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.5. Spurious radiated emission

- Modulation Signal: GSM 850 GPRS

| Frequency (MHz) | Ant. Pol. (H/V) | S.G level + Amp. (dB m) | Cable loss (dB) | Ant. gain (dB d) | E.R.P. (dB m) | Limit (dB m) | Margin (dB) |
|----------------------------|-----------------|-------------------------|-----------------|------------------|---------------|--------------|-------------|
| Low Channel (824.2 MHz) | | | | | | | |
| 1 000.14 | H | -52.51 | 3.12 | 3.79 | -51.84 | -13 | 38.84 |
| 999.86 | V | -59.02 | 3.13 | 3.59 | -58.56 | -13 | 45.56 |
| 1 500.24 | H | -56.78 | 3.67 | 5.75 | -54.70 | -13 | 41.70 |
| 1 500.05 | V | -62.10 | 3.67 | 5.75 | -60.02 | -13 | 47.02 |
| 1 648.54 | H | -47.12 | 4.01 | 5.99 | -45.14 | -13 | 32.14 |
| 1 648.48 | V | -51.63 | 4.01 | 5.99 | -49.65 | -13 | 36.65 |
| 3 000.11 | H | -50.48 | 5.36 | 7.27 | -48.57 | -13 | 35.57 |
| 3 000.05 | V | -46.64 | 5.36 | 7.27 | -44.73 | -13 | 31.73 |
| 5 769.10 | H | -53.20 | 7.90 | 9.13 | -51.97 | -13 | 38.97 |
| 5 769.46 | V | -54.67 | 7.90 | 9.13 | -53.44 | -13 | 40.44 |
| Middle Channel (836.6 MHz) | | | | | | | |
| 1 000.11 | H | -52.44 | 3.12 | 3.79 | -51.77 | -13 | 38.77 |
| 1 000.07 | V | -59.30 | 3.12 | 3.79 | -58.63 | -13 | 45.63 |
| 1 499.87 | H | -55.61 | 3.67 | 5.75 | -53.53 | -13 | 40.53 |
| 1 499.98 | V | -60.99 | 3.67 | 5.75 | -58.91 | -13 | 45.91 |
| 1 673.14 | H | -49.22 | 4.06 | 6.18 | -47.10 | -13 | 34.10 |
| 1 673.35 | V | -50.03 | 4.06 | 6.18 | -47.91 | -13 | 34.91 |
| 3 000.15 | H | -49.85 | 5.36 | 7.27 | -47.94 | -13 | 34.94 |
| 3 000.11 | V | -48.26 | 5.36 | 7.27 | -46.35 | -13 | 33.35 |
| 5 856.68 | H | -49.78 | 7.79 | 9.18 | -48.39 | -13 | 35.39 |
| 5 856.38 | V | -47.76 | 7.79 | 9.18 | -46.37 | -13 | 33.37 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

| Frequency (MHz) | Ant. Pol. (H/V) | S.G level + Amp. (dB m) | Cable loss (dB) | Ant. gain (dB d) | E.R.P. (dB m) | Limit (dB m) | Margin (dB) |
|--------------------------|-----------------|-------------------------|-----------------|------------------|---------------|--------------|-------------|
| High Channel (848.8 MHz) | | | | | | | |
| 1 000.03 | H | -51.73 | 3.12 | 3.79 | -51.06 | -13 | 38.06 |
| 1 000.06 | V | -57.63 | 3.12 | 3.79 | -56.96 | -13 | 43.96 |
| 1 500.15 | H | -55.02 | 3.67 | 5.75 | -52.94 | -13 | 39.94 |
| 1 500.21 | V | -61.35 | 3.67 | 5.75 | -59.27 | -13 | 46.27 |
| 1 697.68 | H | -57.60 | 4.11 | 6.36 | -55.35 | -13 | 42.35 |
| 1 697.68 | V | -54.21 | 4.11 | 6.36 | -51.96 | -13 | 38.96 |
| 3 000.18 | H | -49.61 | 5.36 | 7.27 | -47.70 | -13 | 34.70 |
| 3 000.13 | V | -46.93 | 5.36 | 7.27 | -45.02 | -13 | 32.02 |
| 5 944.50 | H | -53.89 | 7.72 | 9.09 | -52.52 | -13 | 39.52 |
| 5 945.20 | V | -55.17 | 7.72 | 9.08 | -53.81 | -13 | 40.81 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

- Modulation Signal: GSM 850 EDGE

| Frequency (MHz) | Ant. Pol. (H/V) | S.G level + Amp. (dB m) | Cable loss (dB) | Ant. gain (dB d) | E.R.P. (dB m) | Limit (dB m) | Margin (dB) |
|----------------------------|-----------------|-------------------------|-----------------|------------------|---------------|--------------|-------------|
| Low Channel (824.2 MHz) | | | | | | | |
| 1 000.04 | H | -52.55 | 3.12 | 3.79 | -51.88 | -13 | 38.88 |
| 1 000.10 | V | -59.11 | 3.12 | 3.79 | -58.44 | -13 | 45.44 |
| 1 500.17 | H | -56.03 | 3.67 | 5.75 | -53.95 | -13 | 40.95 |
| 1 500.03 | V | -61.60 | 3.67 | 5.75 | -59.52 | -13 | 46.52 |
| 1 648.60 | H | -47.66 | 4.01 | 5.99 | -45.68 | -13 | 32.68 |
| 1 648.44 | V | -52.31 | 4.01 | 5.99 | -50.33 | -13 | 37.33 |
| 3 000.01 | H | -50.22 | 5.36 | 7.27 | -48.31 | -13 | 35.31 |
| 3 000.11 | V | -48.37 | 5.36 | 7.27 | -46.46 | -13 | 33.46 |
| 5 768.80 | H | -53.78 | 7.90 | 9.13 | -52.55 | -13 | 39.55 |
| 5 769.33 | V | -56.23 | 7.90 | 9.13 | -55.00 | -13 | 42.00 |
| Middle Channel (836.6 MHz) | | | | | | | |
| 1 000.17 | H | -51.66 | 3.12 | 3.79 | -50.99 | -13 | 37.99 |
| 1 000.11 | V | -58.33 | 3.12 | 3.79 | -57.66 | -13 | 44.66 |
| 1 500.07 | H | -55.10 | 3.67 | 5.75 | -53.02 | -13 | 40.02 |
| 1 499.87 | V | -60.86 | 3.67 | 5.75 | -58.78 | -13 | 45.78 |
| 1 673.40 | H | -49.39 | 4.06 | 6.18 | -47.27 | -13 | 34.27 |
| 1 673.11 | V | -50.59 | 4.06 | 6.18 | -48.47 | -13 | 35.47 |
| 2 999.96 | H | -50.51 | 5.36 | 7.27 | -48.60 | -13 | 35.60 |
| 3 000.03 | V | -48.25 | 5.36 | 7.27 | -46.34 | -13 | 33.34 |
| 5 856.21 | H | -49.80 | 7.79 | 9.18 | -48.41 | -13 | 35.41 |
| 5 855.75 | V | -50.24 | 7.79 | 9.18 | -48.85 | -13 | 35.85 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

| Frequency (MHz) | Ant. Pol. (H/V) | S.G level + Amp. (dB m) | Cable loss (dB) | Ant. gain (dB d) | E.R.P. (dB m) | Limit (dB m) | Margin (dB) |
|--------------------------|-----------------|-------------------------|-----------------|------------------|---------------|--------------|-------------|
| High Channel (848.8 MHz) | | | | | | | |
| 1 000.03 | H | -52.50 | 3.12 | 3.79 | -51.83 | -13 | 38.83 |
| 1 000.10 | V | -58.41 | 3.12 | 3.79 | -57.74 | -13 | 44.74 |
| 1 500.16 | H | -55.81 | 3.67 | 5.75 | -53.73 | -13 | 40.73 |
| 1 500.11 | V | -61.49 | 3.67 | 5.75 | -59.41 | -13 | 46.41 |
| 1 697.60 | H | -58.64 | 4.11 | 6.36 | -56.39 | -13 | 43.39 |
| 1 697.62 | V | -54.98 | 4.11 | 6.36 | -52.73 | -13 | 39.73 |
| 3 000.05 | H | -50.11 | 5.36 | 7.27 | -48.20 | -13 | 35.20 |
| 3 000.15 | V | -46.95 | 5.36 | 7.27 | -45.04 | -13 | 32.04 |
| 5 944.52 | H | -56.52 | 7.72 | 9.09 | -55.15 | -13 | 42.15 |
| 5 945.33 | V | -55.74 | 7.72 | 9.08 | -54.38 | -13 | 41.38 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

- Modulation Signal: GSM 1 900 GPRS

| Frequency (MHz) | Ant. Pol. (H/V) | S.G level + Amp. (dB m) | Cable loss (dB) | Ant. gain (dB i) | E.I.R.P. (dB m) | Limit (dB m) | Margin (dB) |
|------------------------------|-----------------|-------------------------|-----------------|------------------|-----------------|--------------|-------------|
| Low Channel (1 850.2 MHz) | | | | | | | |
| 5 550.72 | H | -52.15 | 7.53 | 10.63 | -49.05 | -13 | 36.05 |
| 5 550.76 | V | -50.95 | 7.53 | 10.63 | -47.85 | -13 | 34.85 |
| Middle Channel (1 880.0 MHz) | | | | | | | |
| 5 640.04 | H | -43.97 | 7.64 | 10.91 | -40.70 | -13 | 27.70 |
| 5 640.16 | V | -43.20 | 7.64 | 10.91 | -39.93 | -13 | 26.93 |
| High Channel (1 909.8 MHz) | | | | | | | |
| 5 729.20 | H | -50.48 | 7.86 | 11.27 | -47.07 | -13 | 34.07 |
| 5 729.28 | V | -43.28 | 7.86 | 11.27 | -39.87 | -13 | 26.87 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

- Modulation Signal: GSM 1 900 EDGE

| Frequency (MHz) | Ant. Pol. (H/V) | S.G level + Amp. (dB m) | Cable loss (dB) | Ant. gain (dB i) | E.I.R.P. (dB m) | Limit (dB m) | Margin (dB) |
|------------------------------|-----------------|-------------------------|-----------------|------------------|-----------------|--------------|-------------|
| Low Channel (1 850.2 MHz) | | | | | | | |
| 5 550.58 | H | -52.41 | 7.53 | 10.63 | -49.31 | -13 | 36.31 |
| 5 550.76 | V | -50.95 | 7.53 | 10.63 | -47.85 | -13 | 34.85 |
| Middle Channel (1 880.0 MHz) | | | | | | | |
| 5 640.02 | H | -45.37 | 7.64 | 10.91 | -42.10 | -13 | 29.10 |
| 5 639.78 | V | -43.72 | 7.64 | 10.90 | -40.46 | -13 | 27.46 |
| High Channel (1 909.8 MHz) | | | | | | | |
| 5 729.66 | H | -50.73 | 7.86 | 11.27 | -47.32 | -13 | 34.32 |
| 5 729.38 | V | -44.51 | 7.86 | 11.27 | -41.10 | -13 | 28.10 |

Remark;

1. E.R.P. & E.I.R.P. = S.G level (dB m) - Cable loss (dB) + Ant. gain (dB d/dB i)

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

3. Conducted Output Power


3.1. Limit

CFR 47, Section FCC §2.1046.

3.2. Test Procedure

Output power shall be measured at the RF output terminals for all configurations.

1. The RF output of the transmitter was connected to the input of the mobile test unit in order to establish communication with the EUT.
2. The EUT was set up for the max. output power with pseudo random data modulation by using mobile test unit parameters.
3. The measurement performed using a wideband RF power meter.
4. This EUT was tested under all configurations and the highest power was investigated and reported.

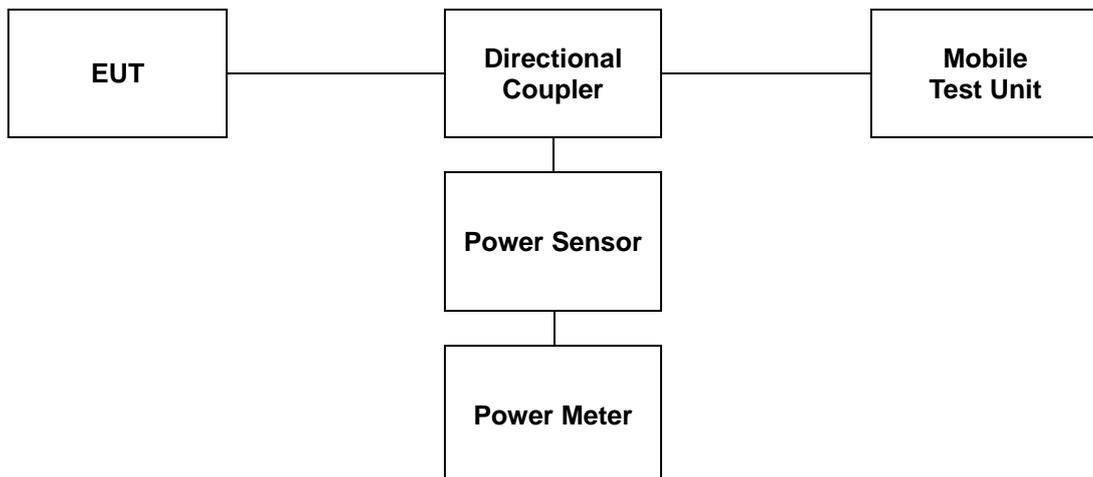

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

3.3. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

| Band | Channel | Frequency (MHz) | GPRS | | EDGE | |
|-------|---------|-----------------|-----------|-----------|-----------|-----------|
| | | | 1 Tx slot | 2 Tx slot | 1 Tx slot | 2 Tx slot |
| | | | (dB m) | (dB m) | (dB m) | (dB m) |
| 850 | 128 | 824.2 | 32.71 | 32.60 | 26.88 | 26.66 |
| | 190 | 836.6 | 32.51 | 32.39 | 26.90 | 26.68 |
| | 251 | 848.8 | 32.21 | 32.05 | 26.59 | 26.44 |
| 1 900 | 512 | 1 850.2 | 27.98 | 27.80 | 23.83 | 23.62 |
| | 661 | 1 880.0 | 28.22 | 28.03 | 24.01 | 23.85 |
| | 810 | 1 909.8 | 28.66 | 28.57 | 24.87 | 24.70 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

4. Occupied Bandwidth


4.1. Limit

CFR 47, Section FCC §2.1049.

4.2. Test Procedure

The test follows section 4.3 of KDB 971168 D01 Power Meas License Digital Systems v03r01.

- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation. products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b. The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d. Set the detection mode to peak, and the trace mode to max-hold.
- e. If the instrument does not have a 99 % OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5 % of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5 % of the total is reached and record that frequency as the upper OBW frequency. The 99 % power OBW can be determined by computing the difference these two frequencies.
- f. The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

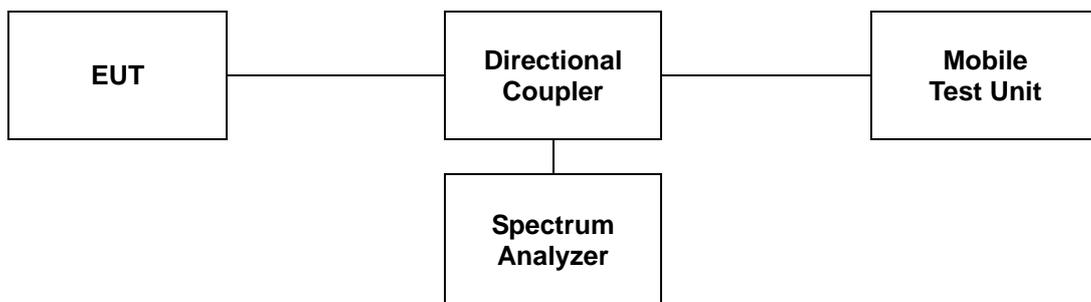

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

4.3 Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.


| Band | Mode | Frequency (MHz) | Occupied Bandwidth (MHz) |
|-------|------|-----------------|--------------------------|
| 850 | GPRS | 824.2 | 0.242 |
| | | 836.6 | 0.240 |
| | | 848.8 | 0.245 |
| | EDGE | 824.2 | 0.243 |
| | | 836.6 | 0.246 |
| | | 848.8 | 0.237 |
| 1 900 | GPRS | 1 850.2 | 0.243 |
| | | 1 880.0 | 0.246 |
| | | 1 909.8 | 0.247 |
| | EDGE | 1 850.2 | 0.246 |
| | | 1 880.0 | 0.246 |
| | | 1 909.8 | 0.242 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


- Test plots

GSM 850

Low Channel

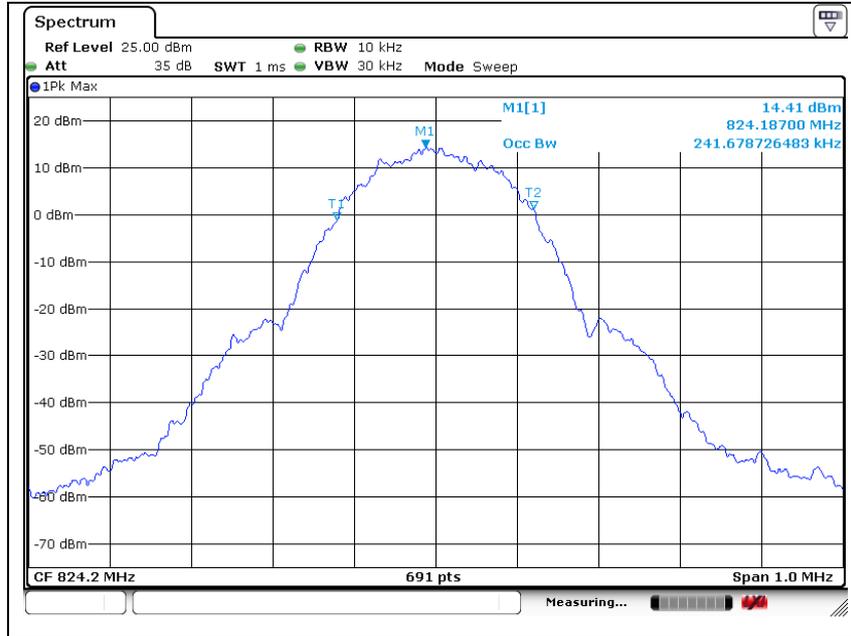


Middle Channel

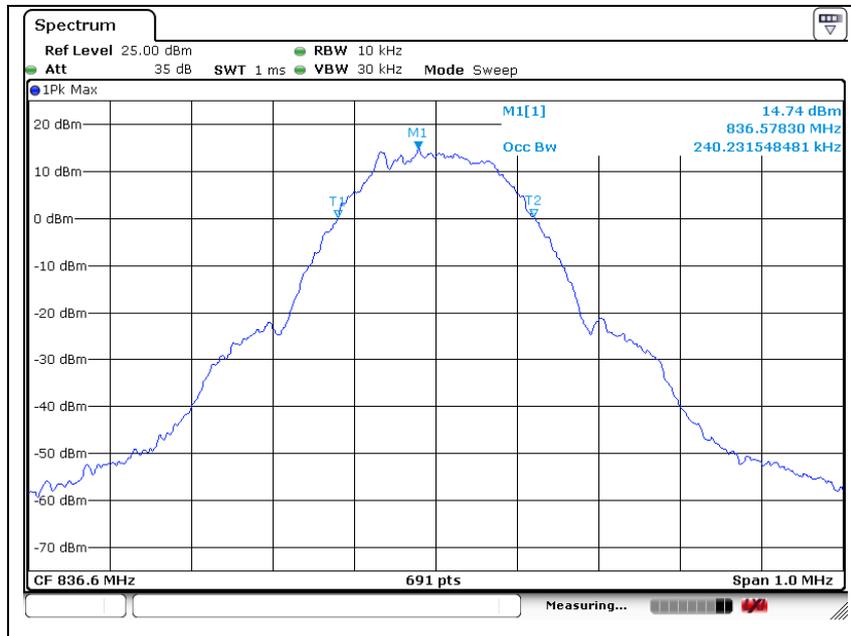


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

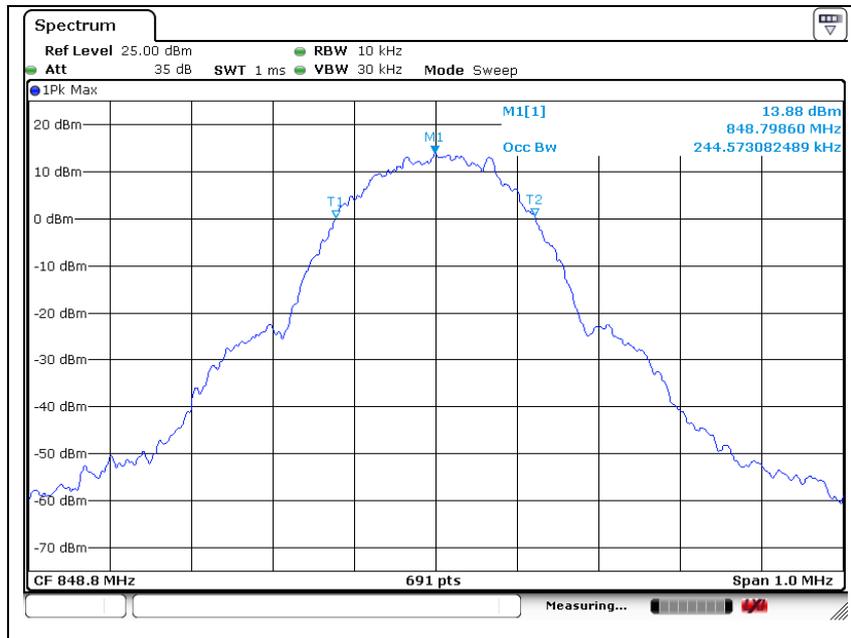


EDGE 850

Low Channel

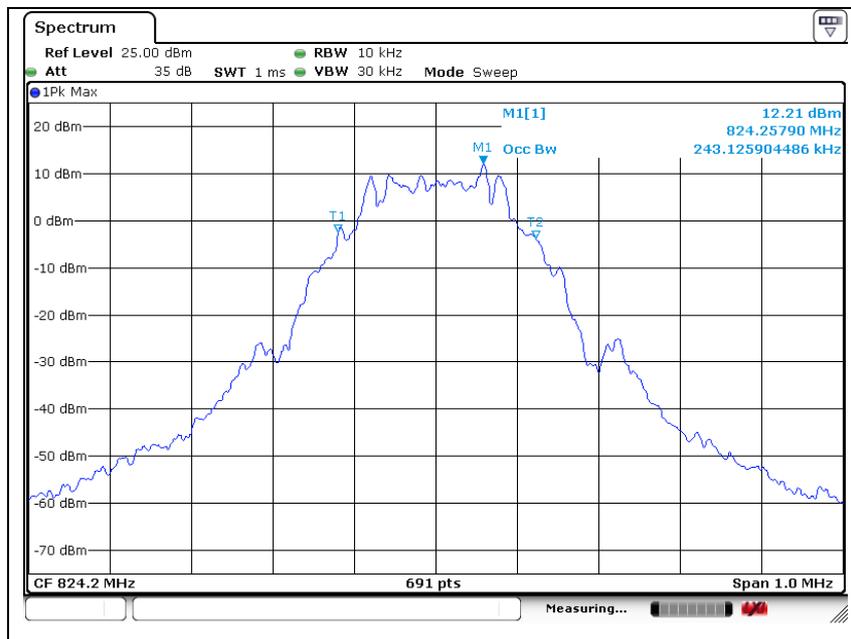

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

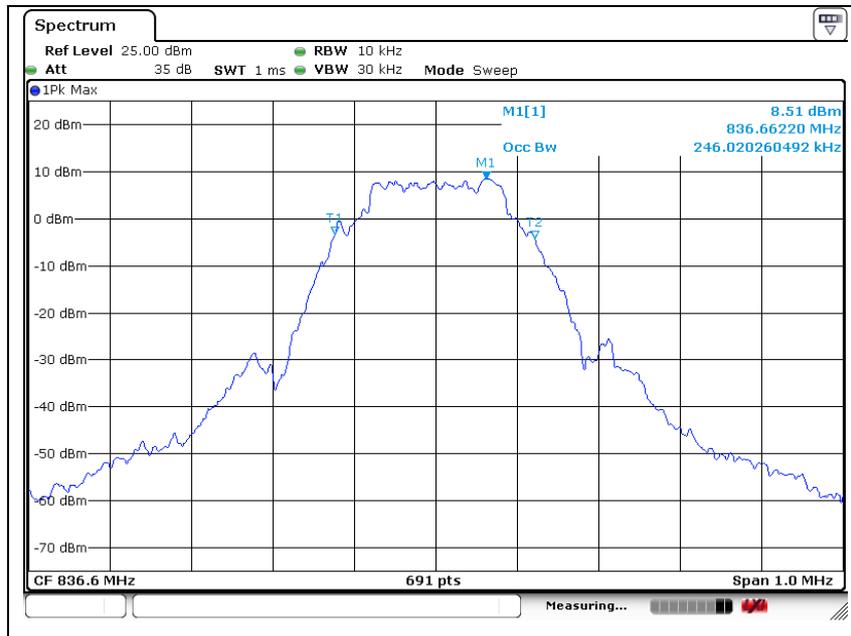


High Channel




The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

GSM 1 900

Low Channel

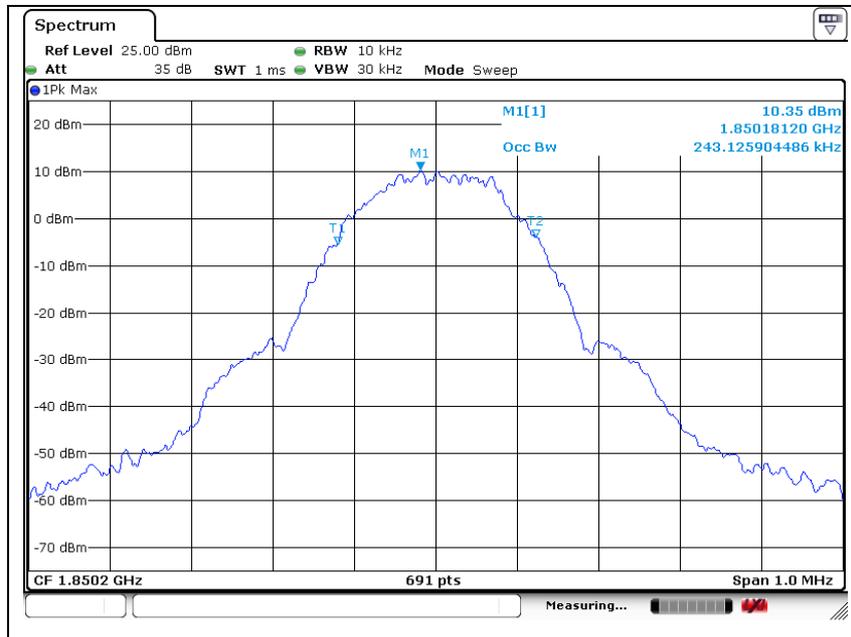


Middle Channel

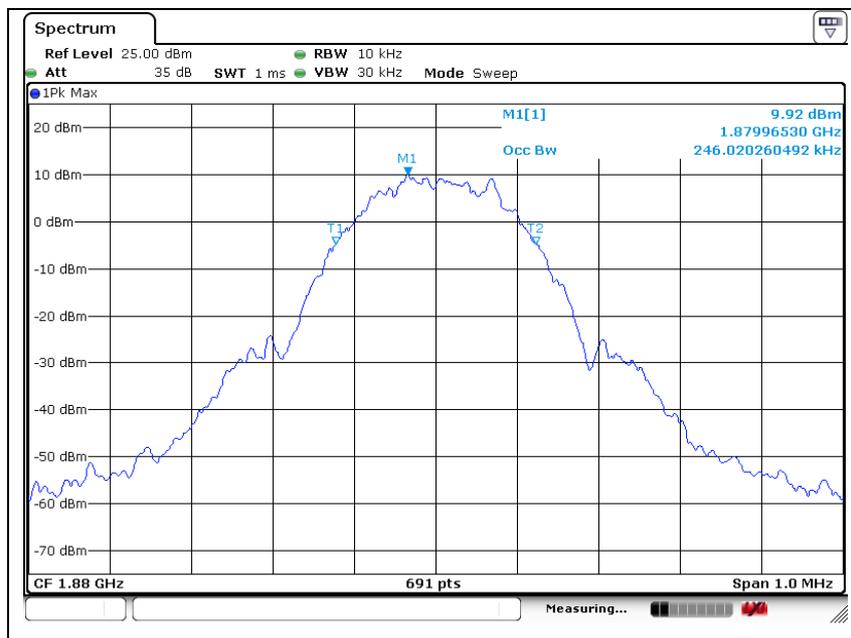


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

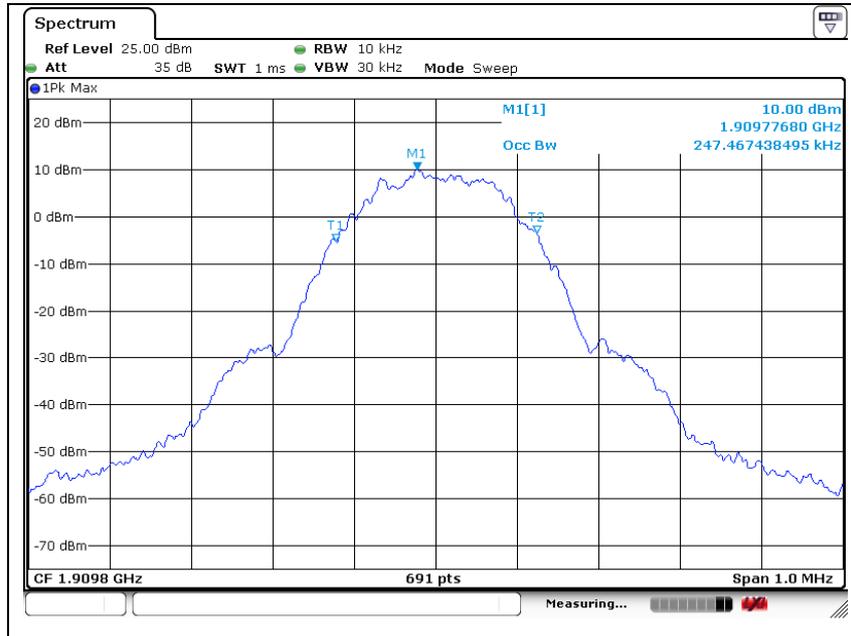


EDGE 1 900

Low Channel

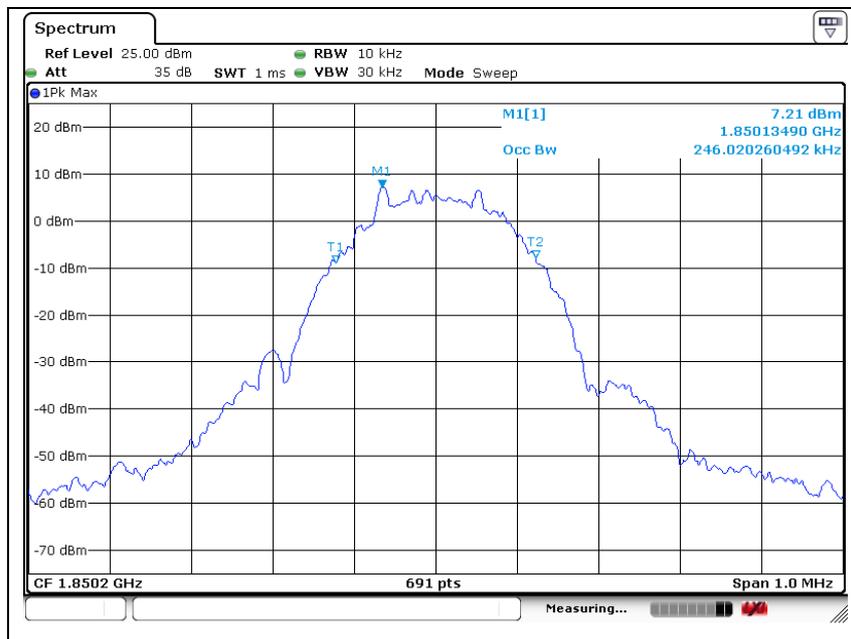


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

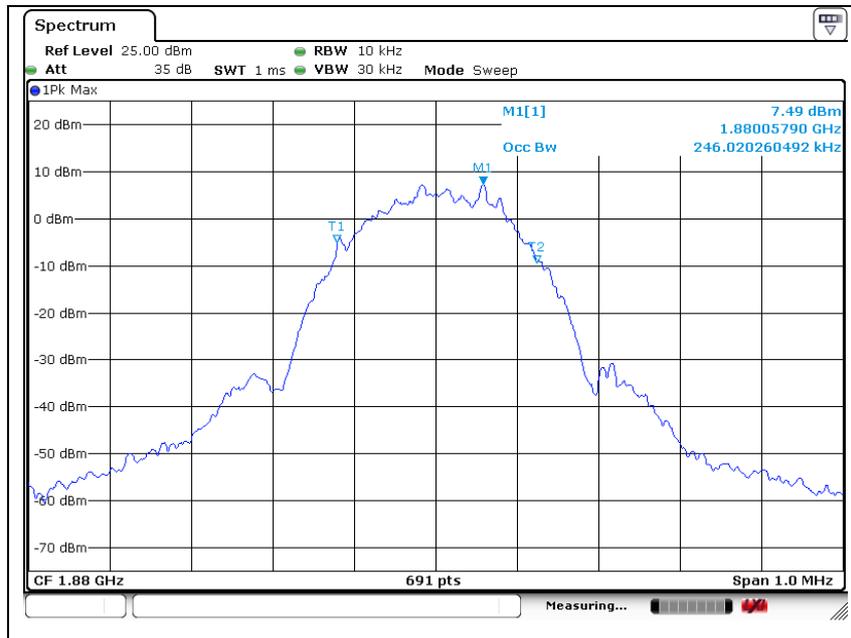

High Channel

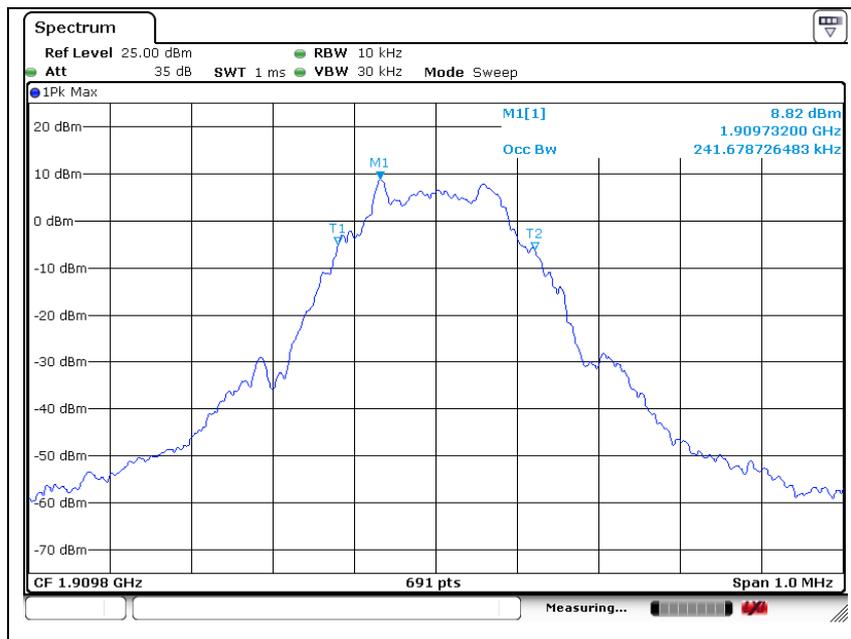

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

5. Peak-Average Ratio

5.1. Limit

- §22.913(d) Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.


- §24.232(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.2. Test Procedure

The test follows section 5.7.2 of KDB 971168 D01 Power Meas License Digital Systems v03r01.

See instrumentation-specific application literature for further guidance regarding use of the CCDF capability. The following guidelines are offered for performing a CCDF measurement.

- a. Set resolution/measurement bandwidth \geq OBW or specified reference bandwidth.
- b. Set the number of counts to a value that stabilizes the measured CCDF curve.
- c. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - 3) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
- d. Record the maximum PAPR level associated with a probability of 0.1 %.
- e. The peak power level is calculated from the sum of the PAPR value from step d) to the measured average power.

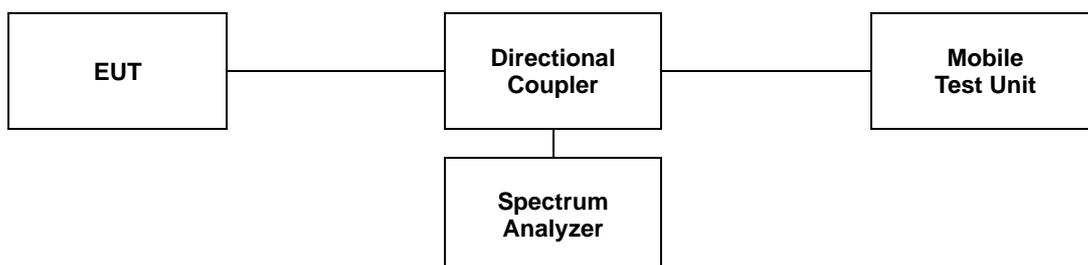

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

5.3 Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.


| Band | Mode | Frequency (MHz) | PAR (dB) |
|-------|------|-----------------|----------|
| 850 | GPRS | 824.2 | 8.03 |
| | | 836.6 | 8.32 |
| | | 848.8 | 8.17 |
| | EDGE | 824.2 | 8.17 |
| | | 836.6 | 8.23 |
| | | 848.8 | 7.74 |
| 1 900 | GPRS | 1 850.2 | 8.09 |
| | | 1 880.0 | 7.86 |
| | | 1 909.8 | 8.12 |
| | EDGE | 1 850.2 | 8.09 |
| | | 1 880.0 | 7.97 |
| | | 1 909.8 | 8.00 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


- Test plots

GSM 850

Low Channel

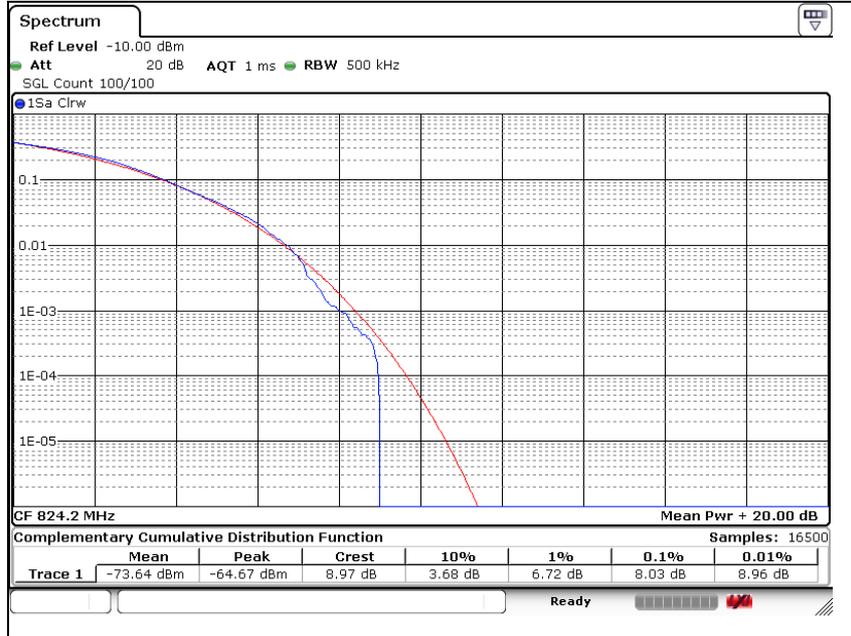


Middle Channel

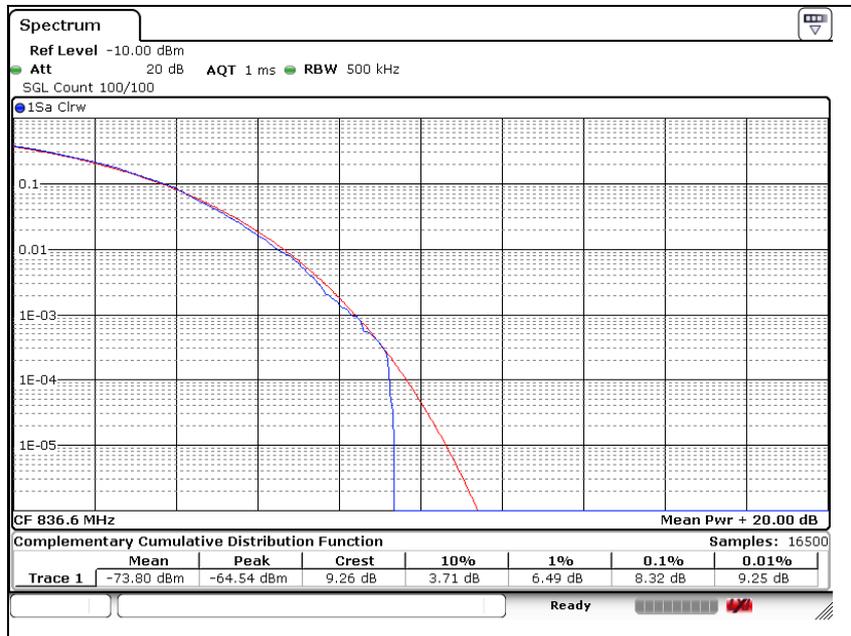


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

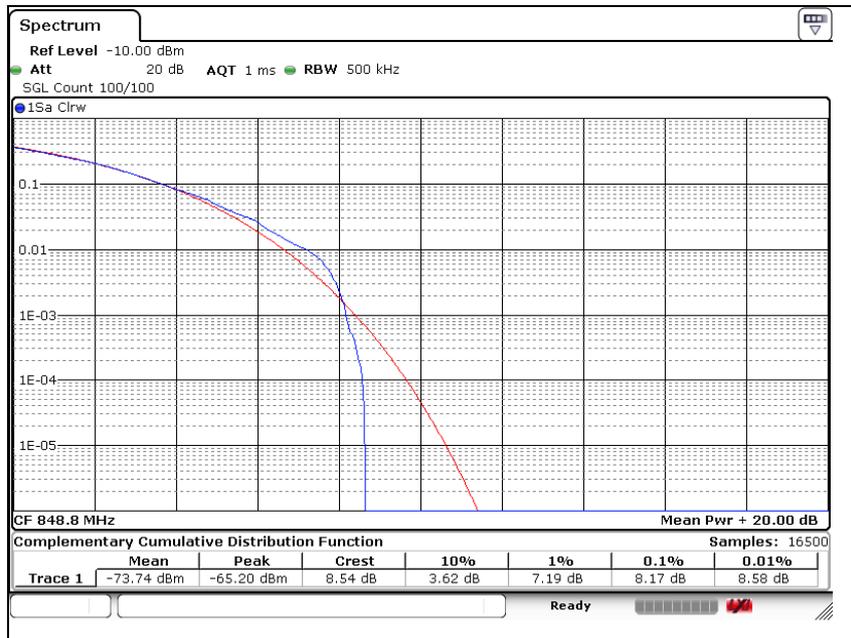


EDGE 850

Low Channel

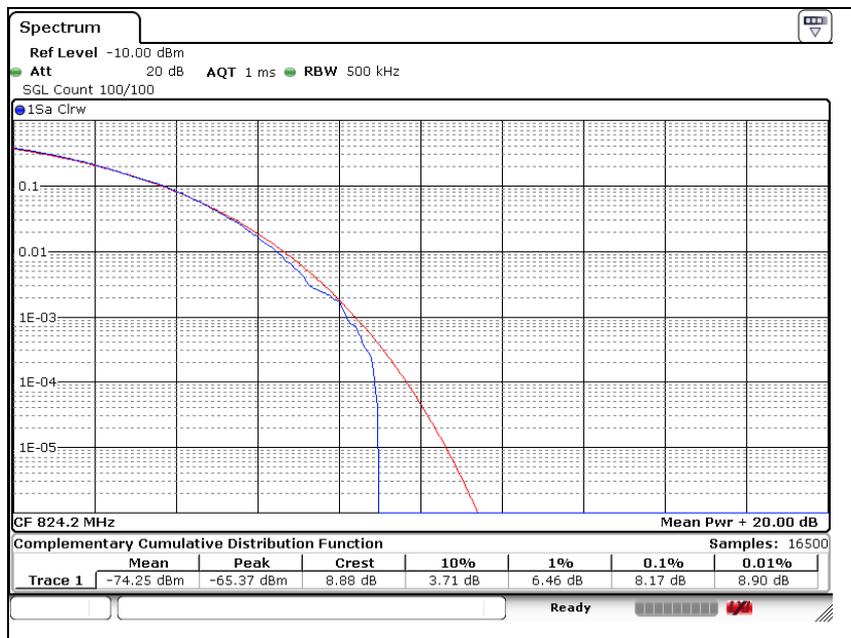


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

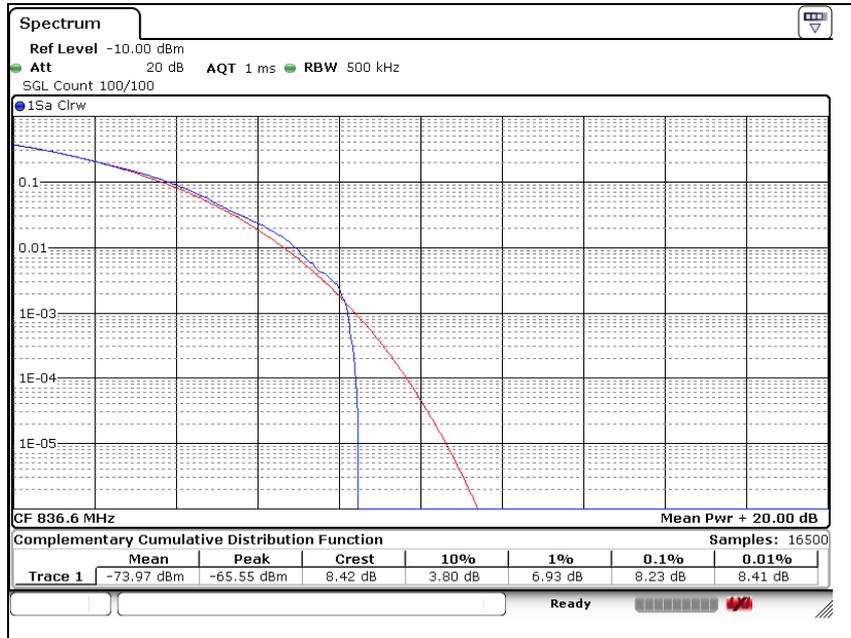


High Channel

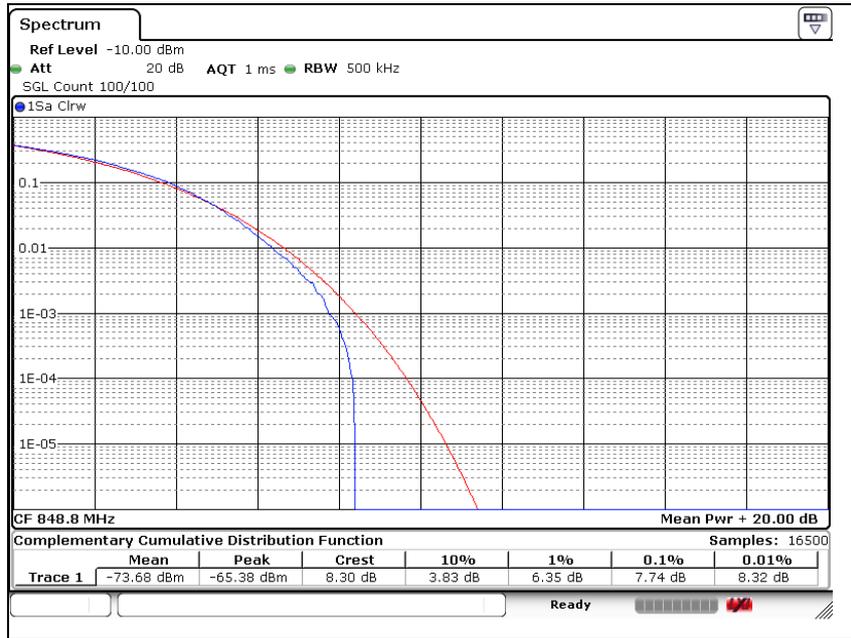


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

GSM 1 900

Low Channel

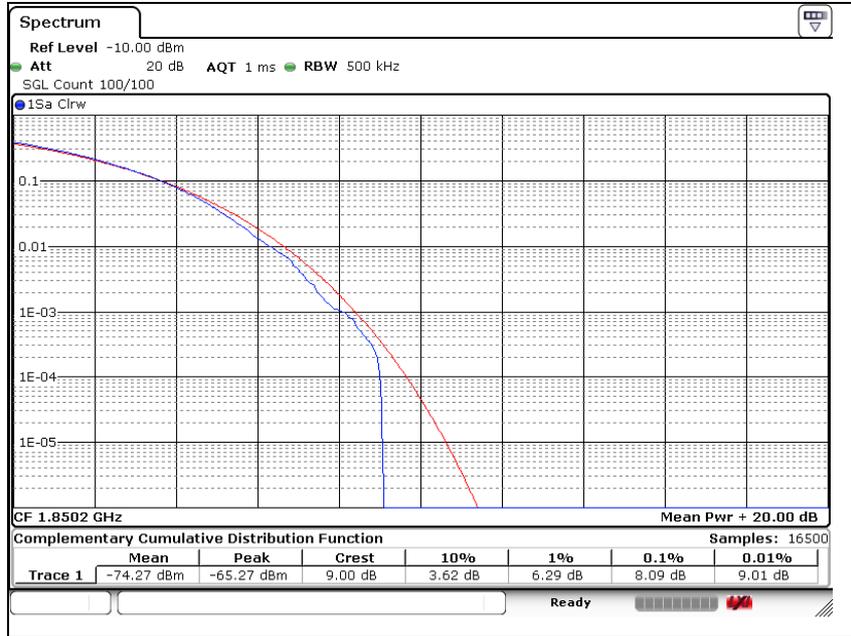


Middle Channel

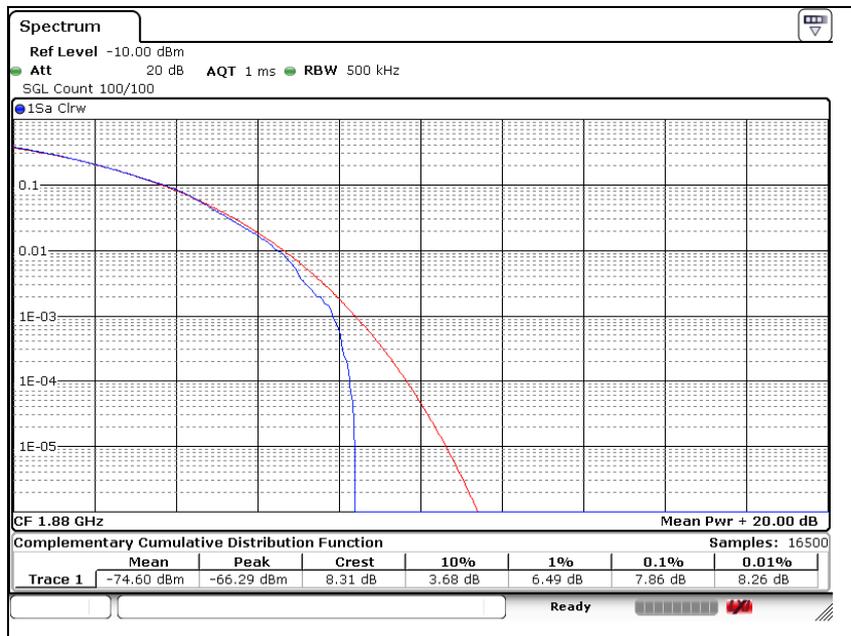


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

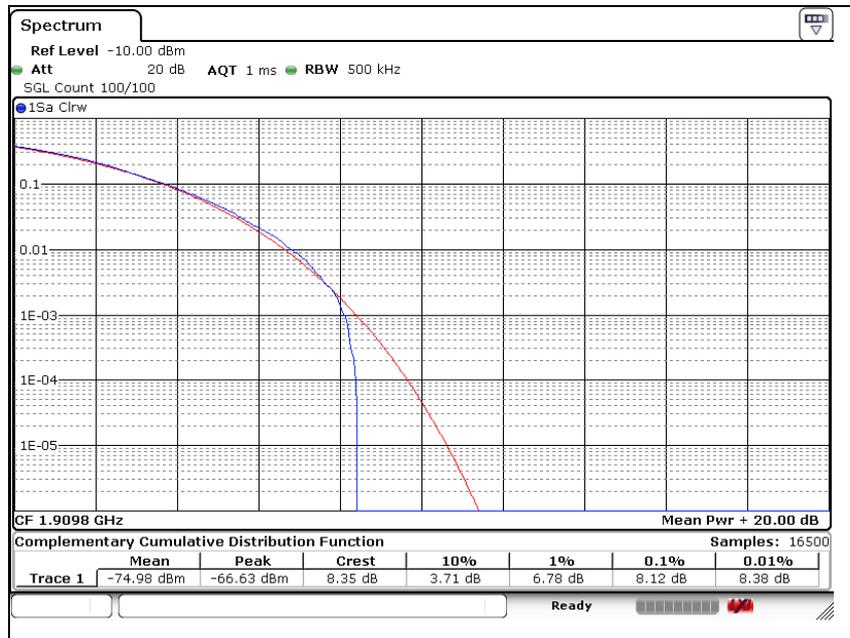


EDGE 1 900

Low Channel

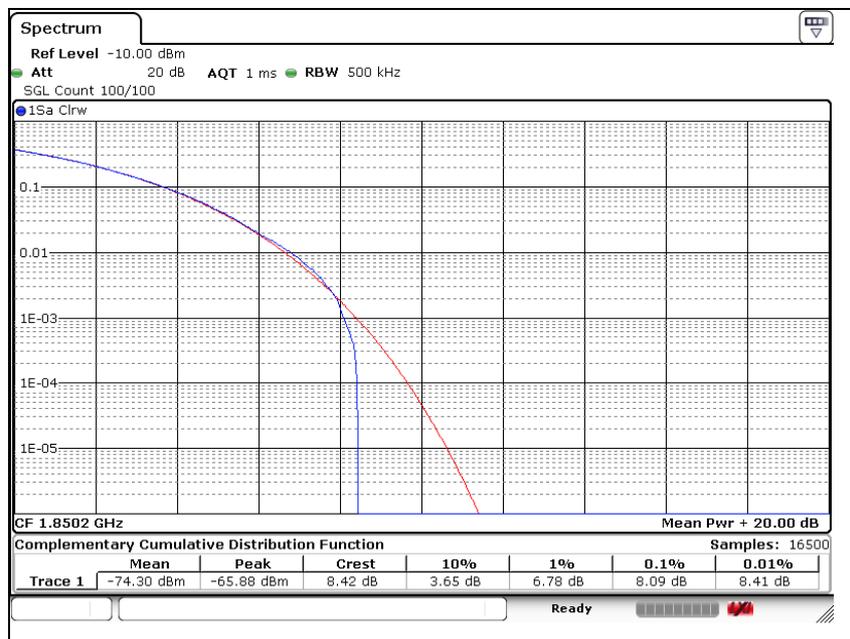


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

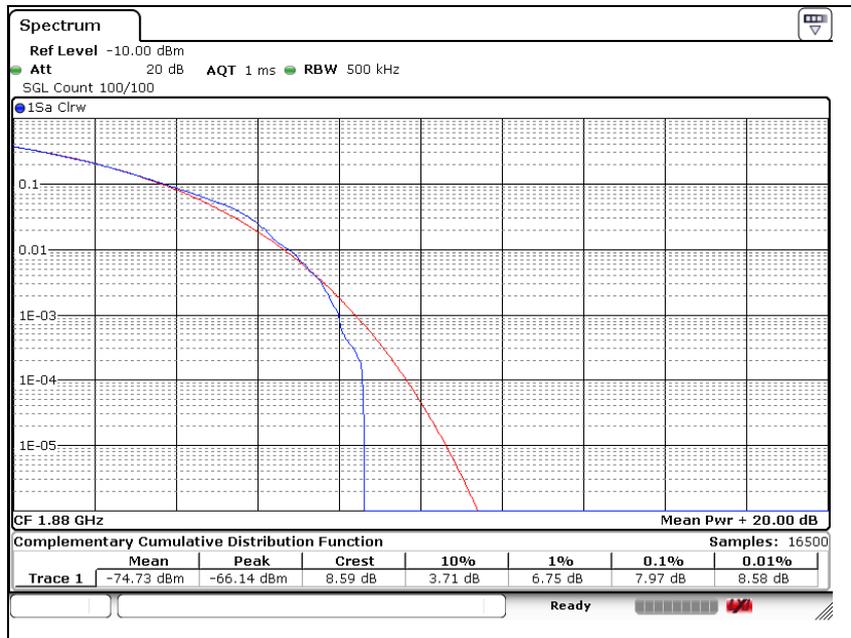

High Channel

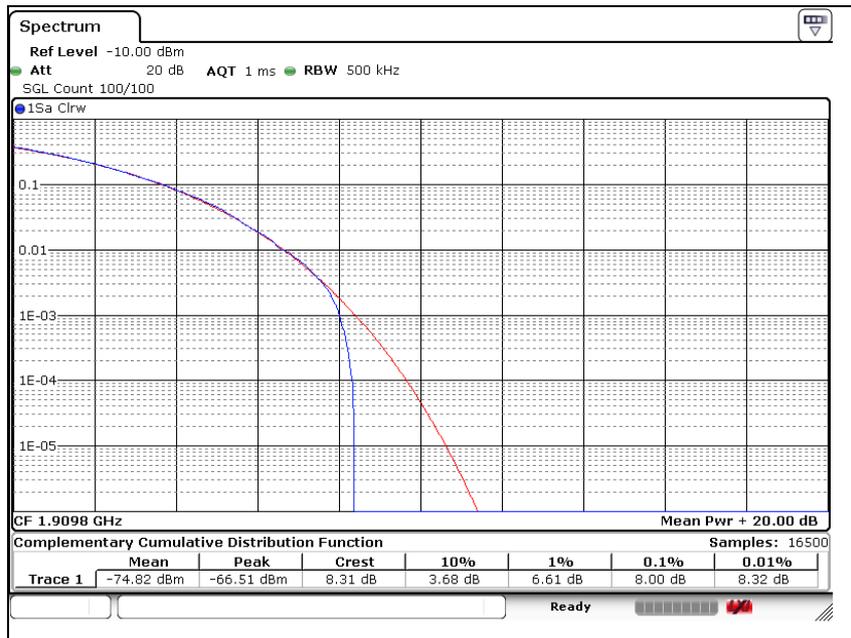

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

6. Spurious Emissions at Antenna Terminal

6.1. Limit


- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

- §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.2. Test Procedure

The test follows section 6 of KDB 971168 D01 Power Meas License Digital Systems v03r01.

1. Start frequency was set to 9 kHz and stop frequency was set to at least 10* the fundamental frequency.
2. Detector = Peak.
3. Trace mode = Max hold.
4. Sweep time = Auto couple.
5. The trace was allowed to stabilize.
6. Please see notes below for RBW and VBW settings.
7. For plots showing conducted spurious emissions from 9 kHz to 20 GHz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as correction factor.

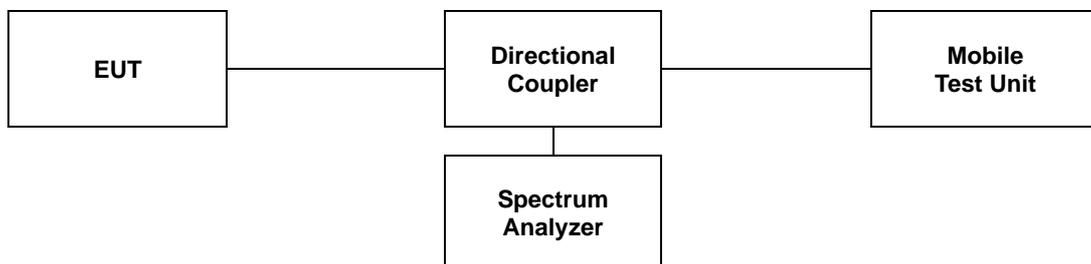

Note;

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two point, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


6.3. Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.


- Test plots

GSM 850

Low Channel

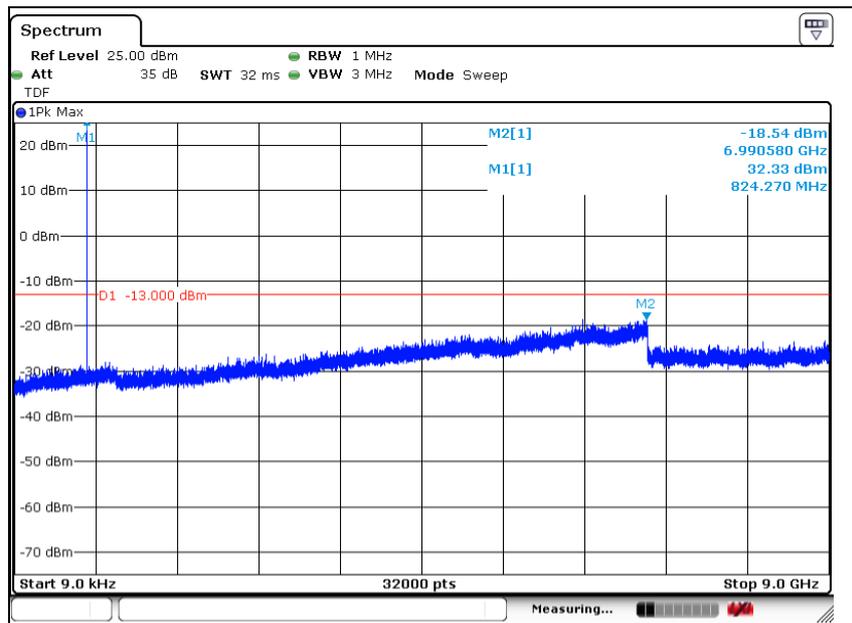


Middle Channel

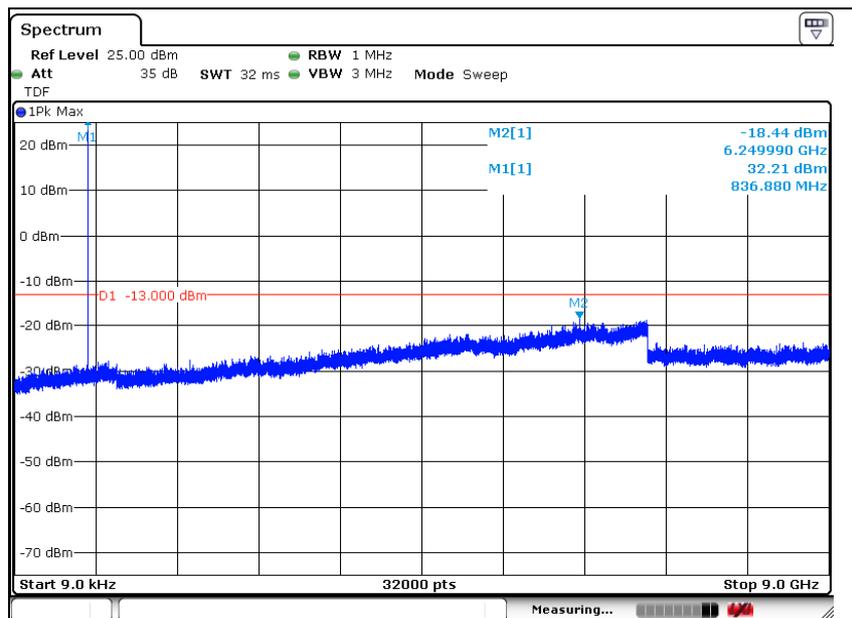


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

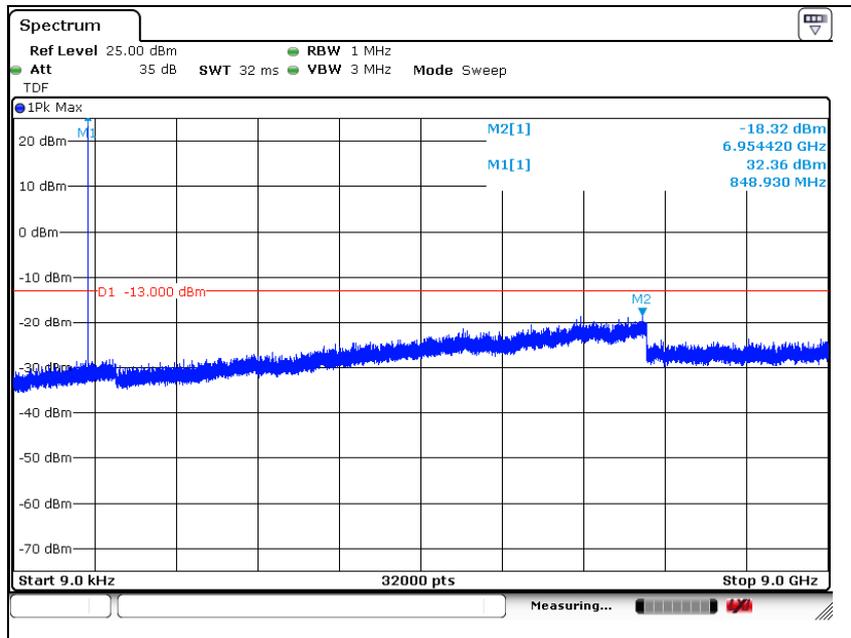


EDGE 850

Low Channel

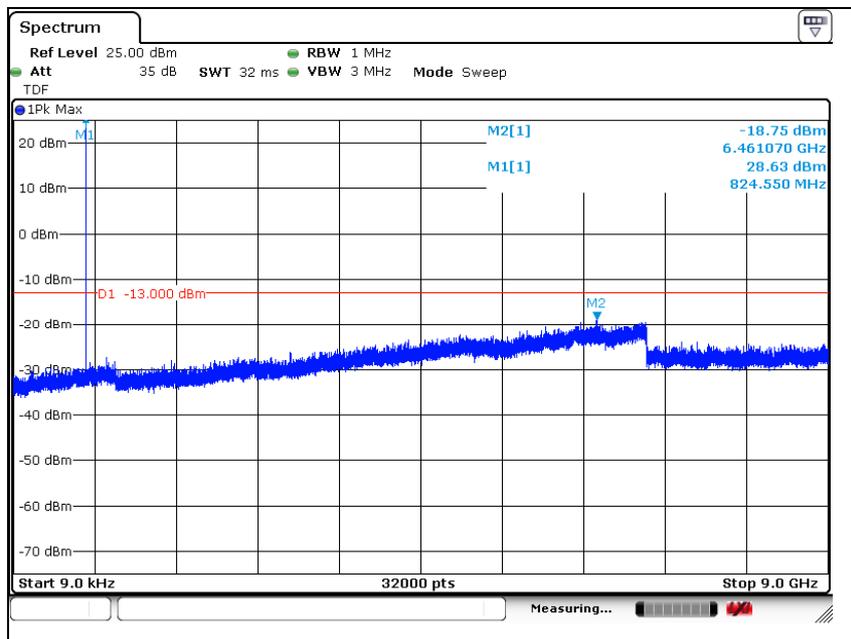


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

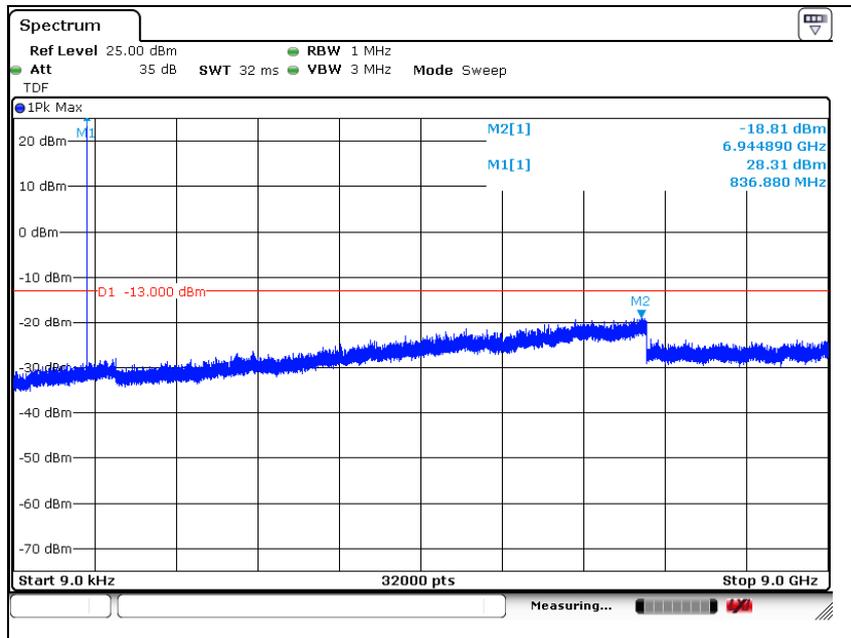


High Channel

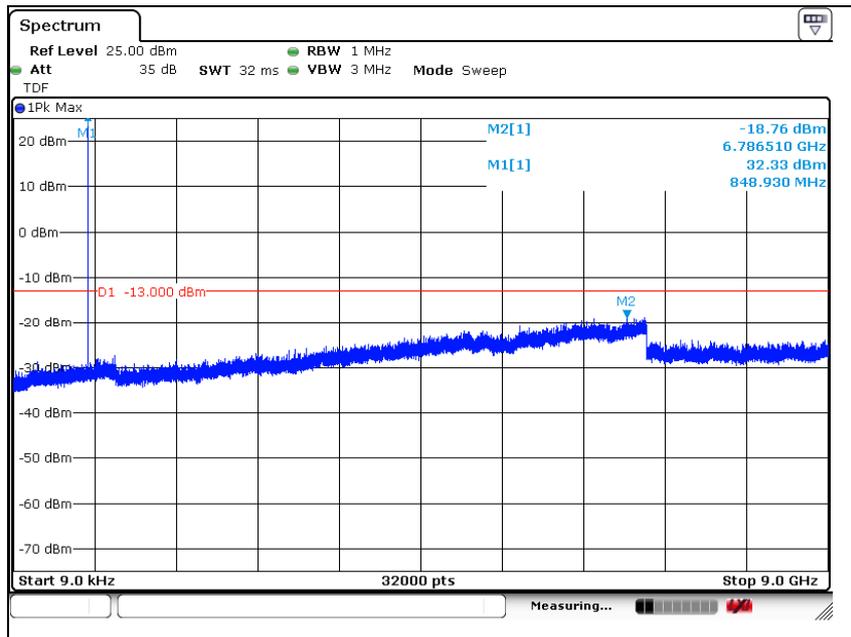

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


GSM 1 900

Low Channel

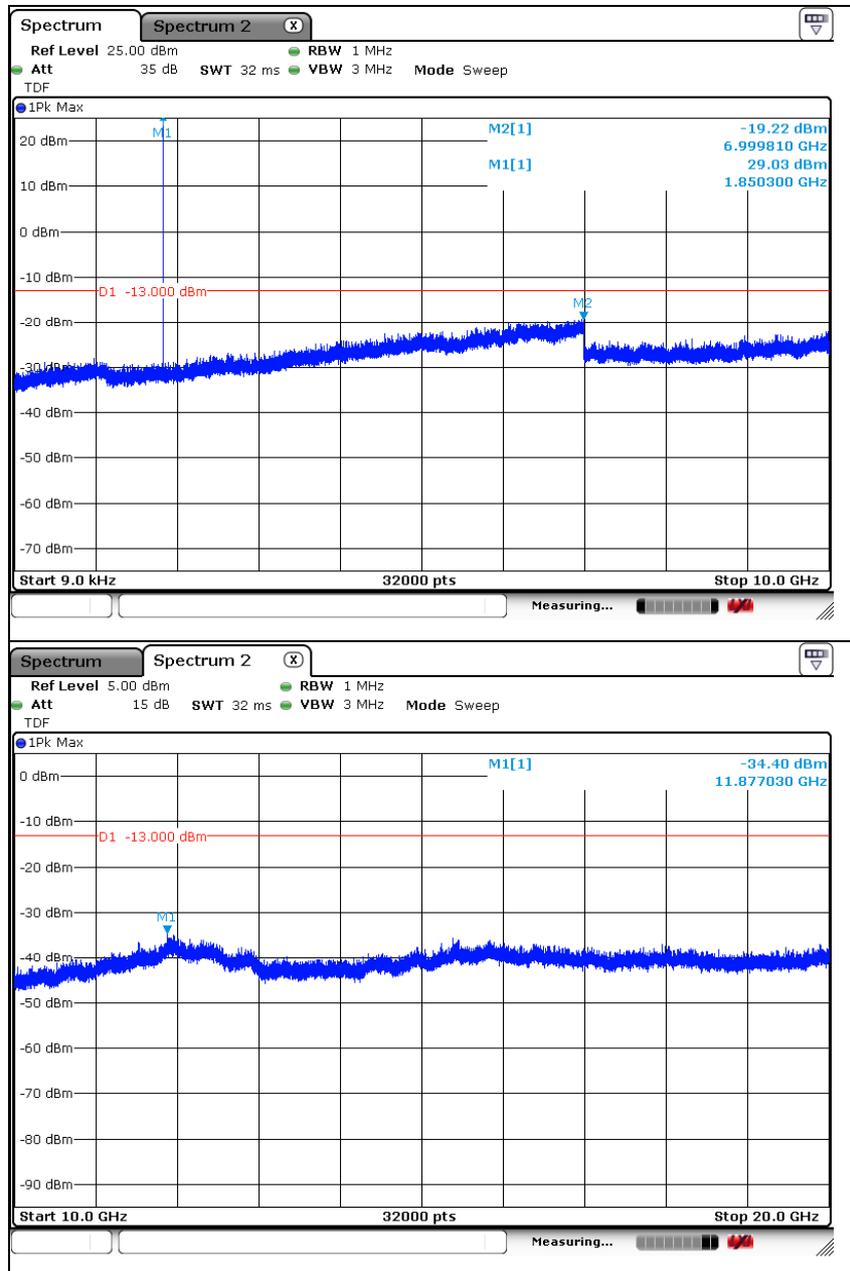


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

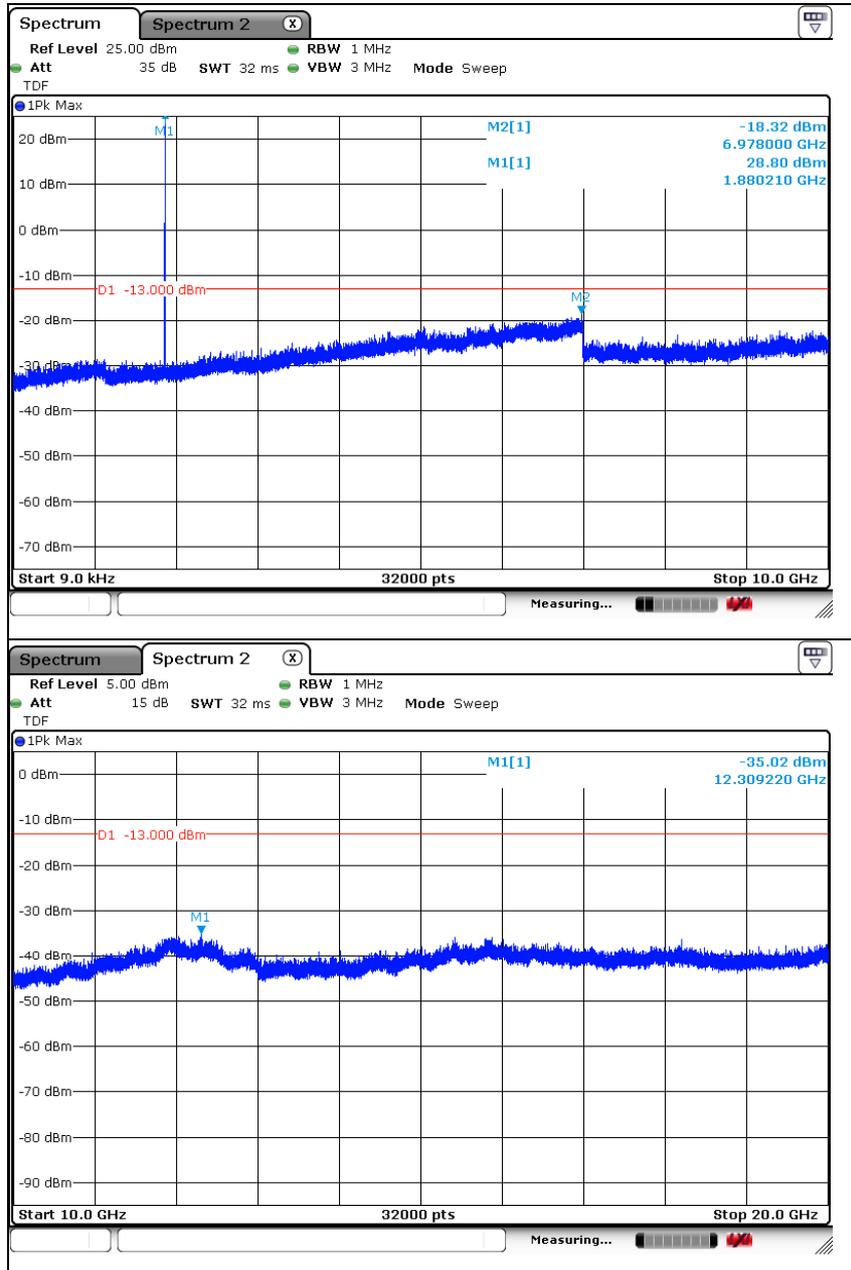

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


High Channel

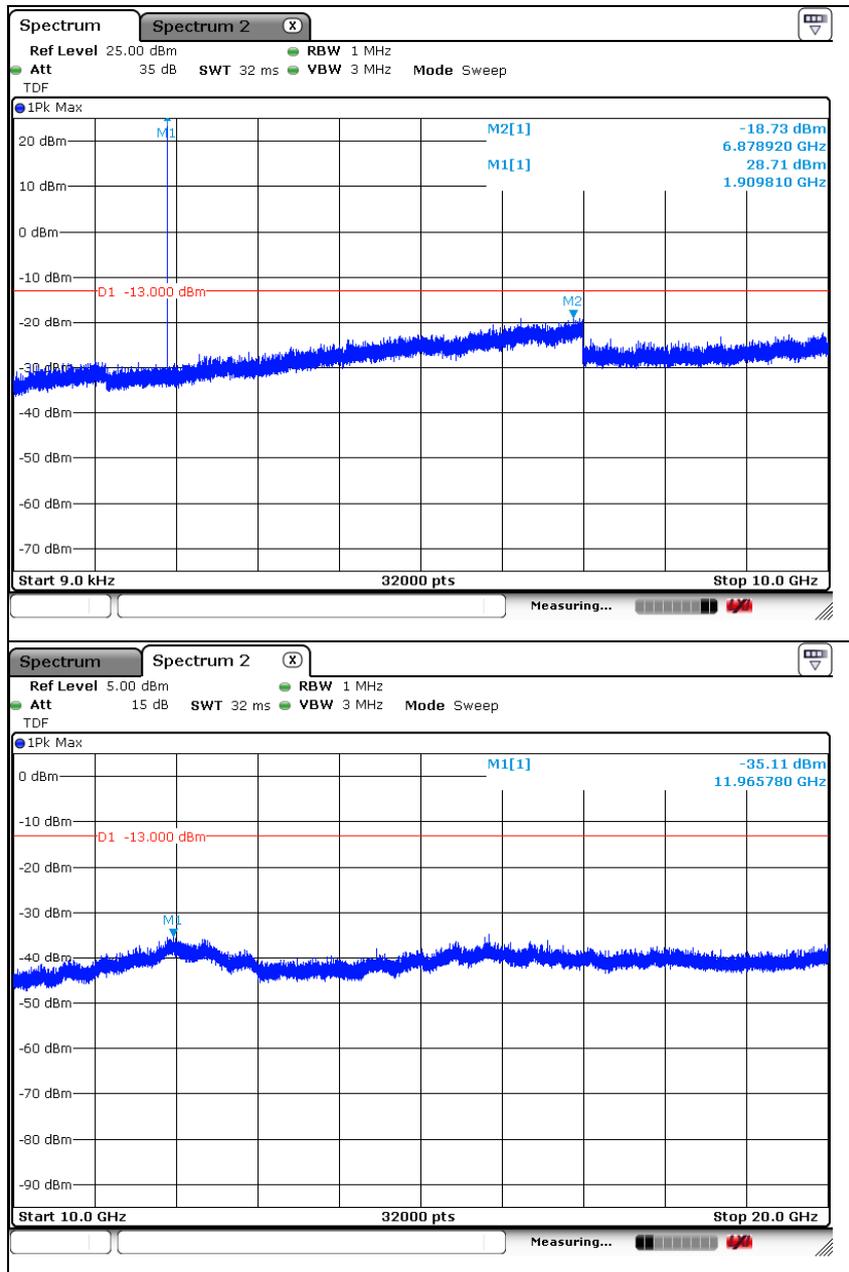

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


EDGE 1 900

Low Channel

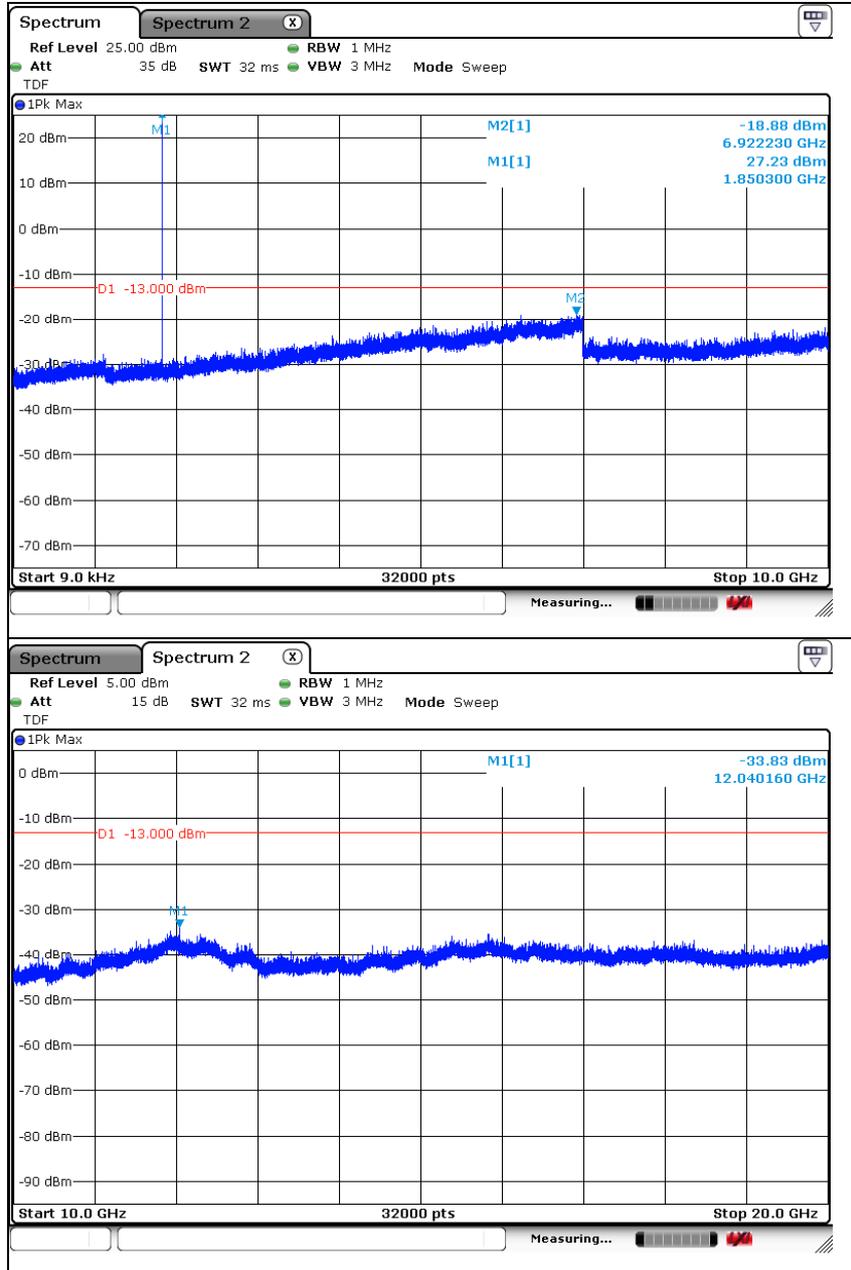


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

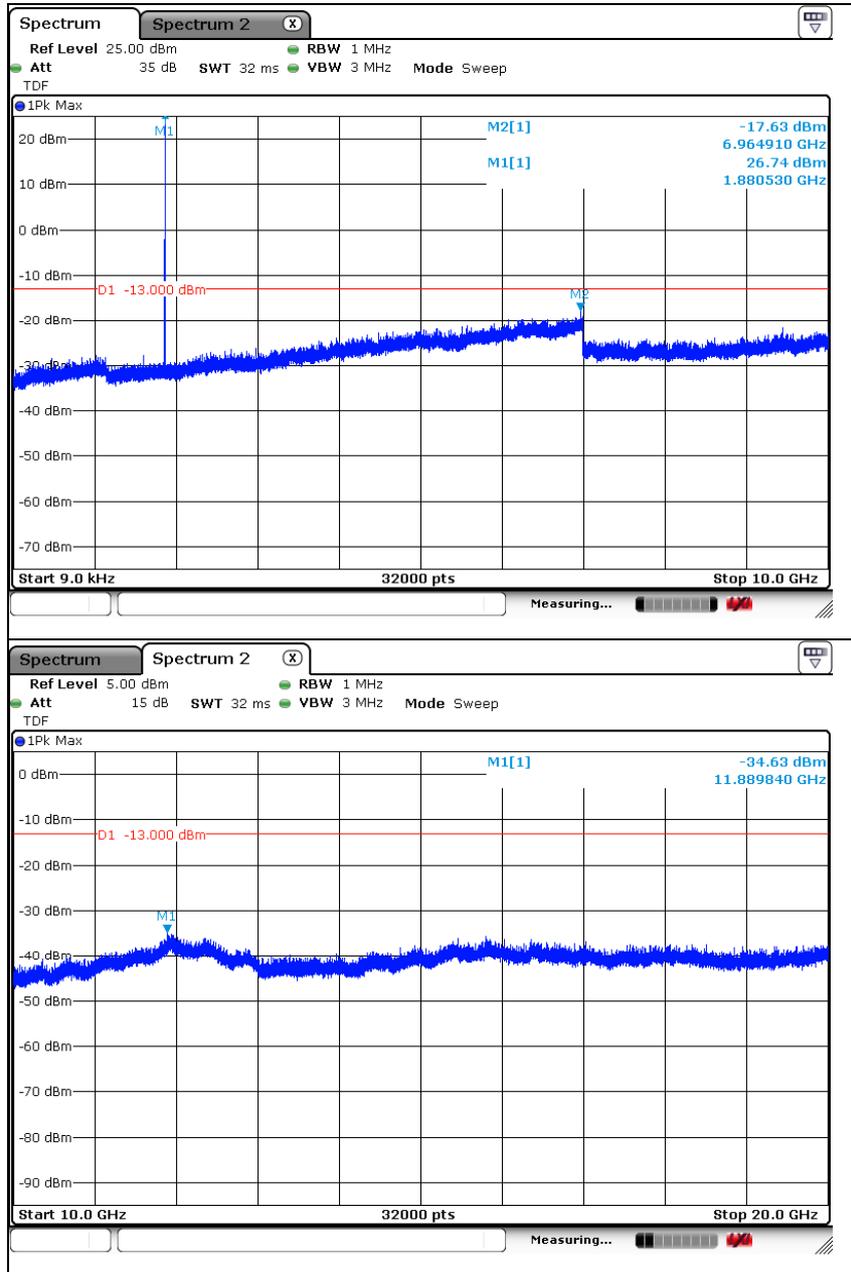

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

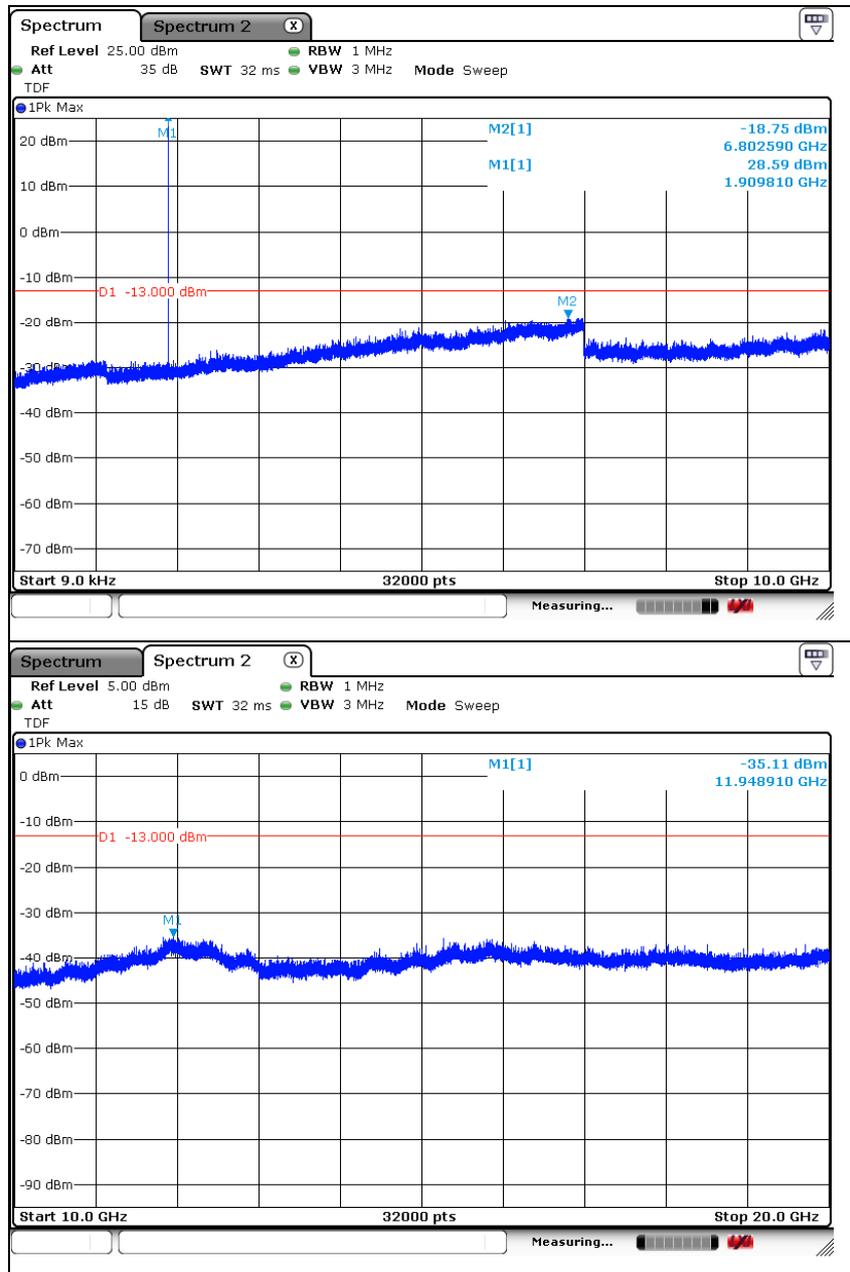

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

7. Band Edge

7.1. Limit


- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

- §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.2. Test Procedure

The test follows section 6.0 of KDB 971168 D01 Power Meas License Digital Systems v03r01.

- a. Span was set large enough so as to capture all out of band emissions near the band edge.
- b. RBW ≥ 1 % of OBW
- c. VBW ≥ 3 x RBW.
- d. Detector = RMS.
- e. Trace mode = Average.
- f. Sweep time = Auto.
- g. The trace was allowed to stabilize.
- h. All path loss of frequency range was investigated and compensated to spectrum analyzer as TDF function.

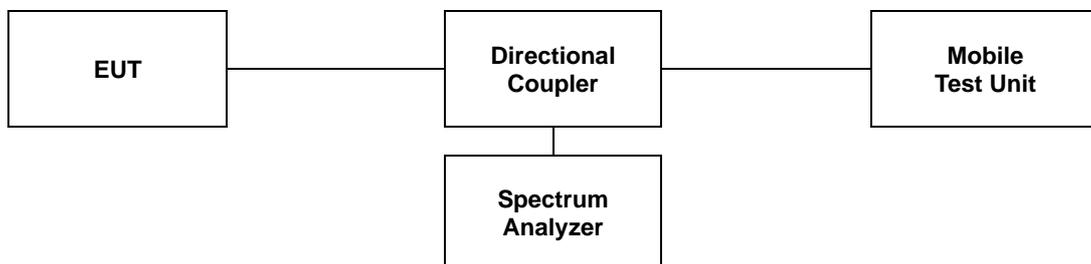

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


7.3. Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

- Test plots

GSM 850

Low Channel

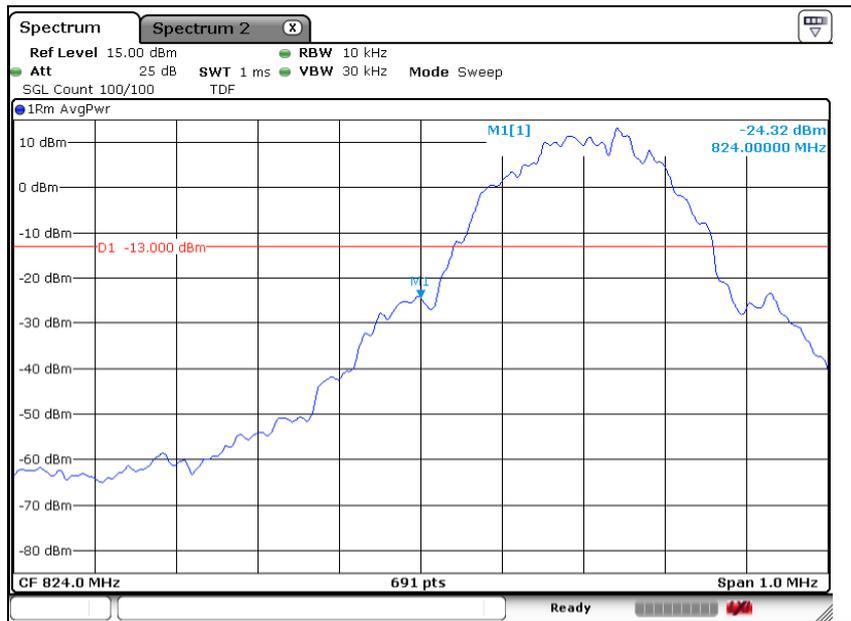


High Channel




The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

EDGE 850

Low Channel

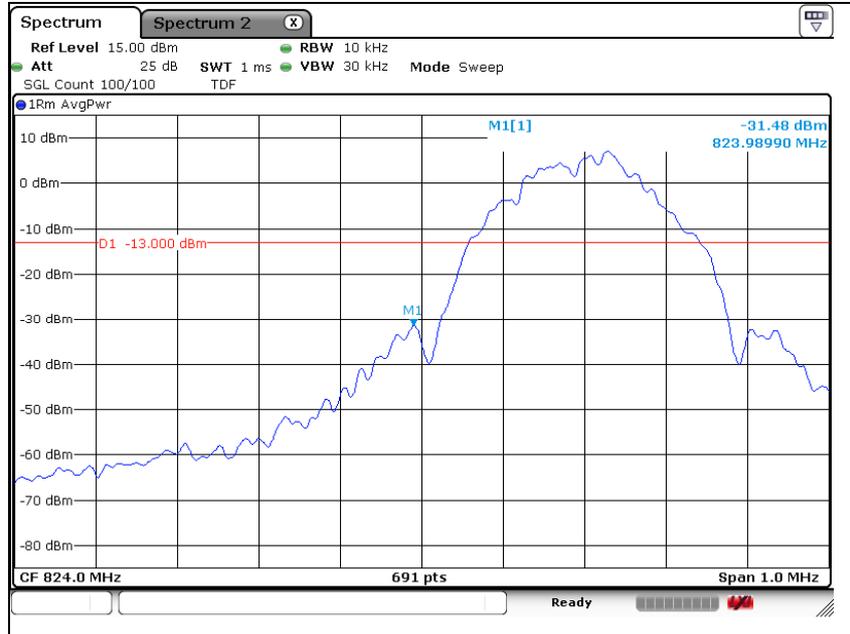


High Channel

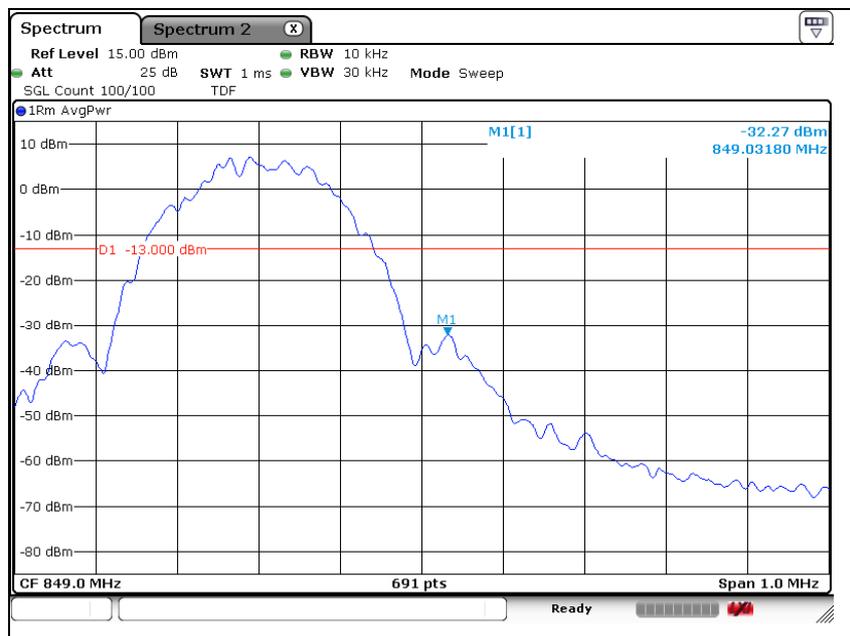


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

GSM 1 900

Low Channel

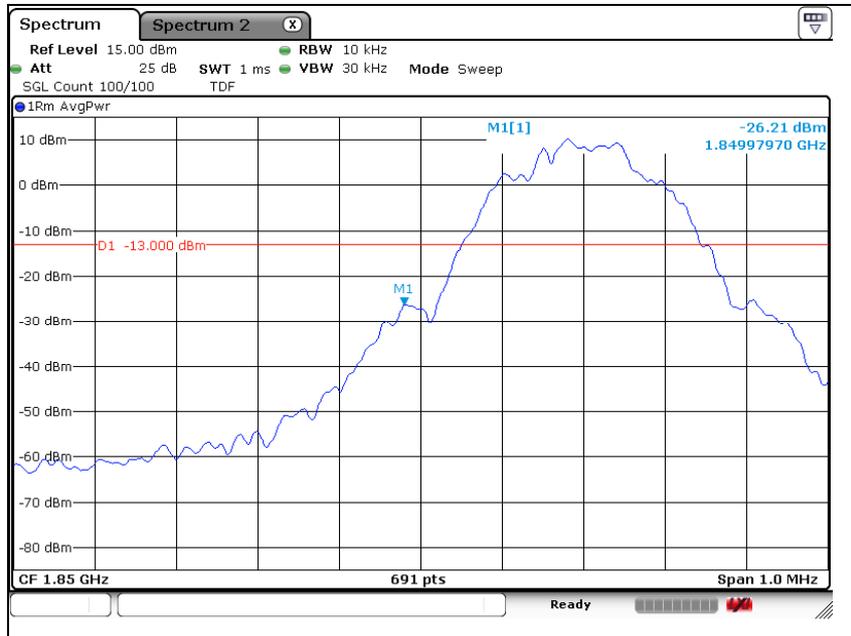


High Channel

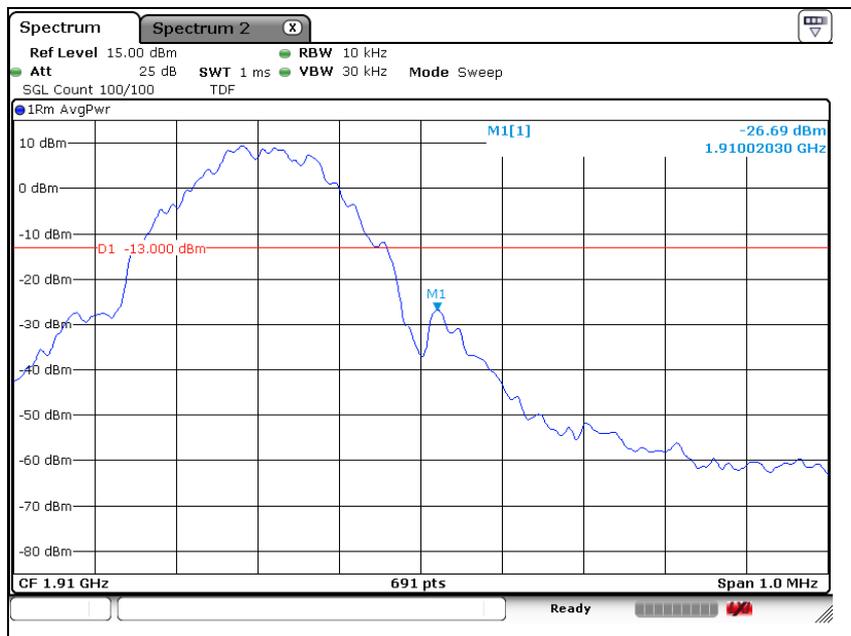


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

EDGE 1 900

Low Channel

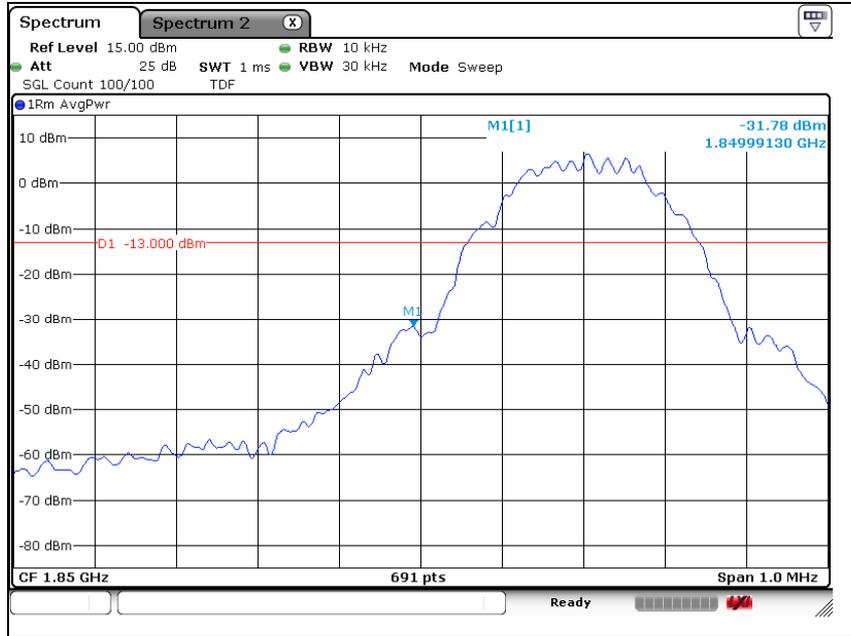

High Channel

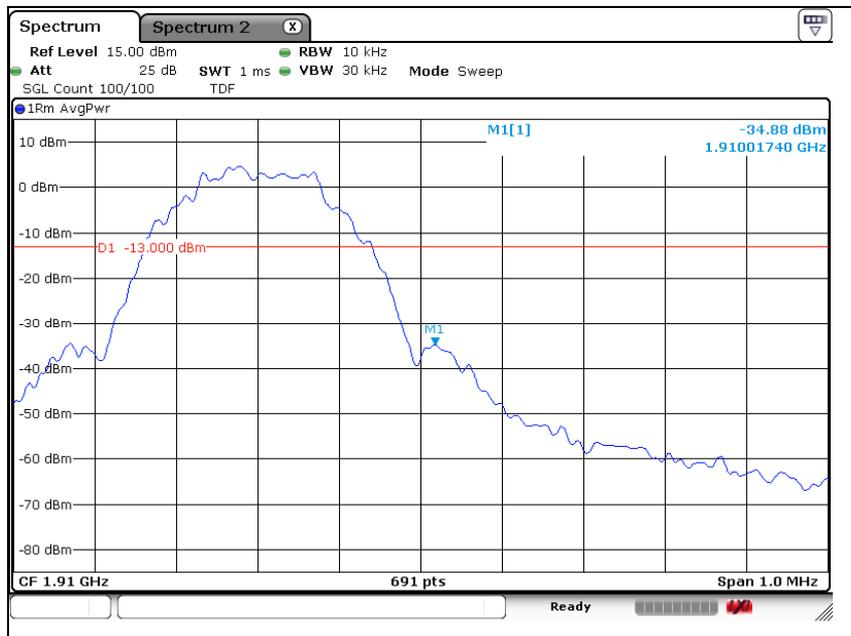

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

8. Frequency Stability

8.1. Limit

- § 2.1055 (a), § 2.1055 (d) & following:


- §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table of this section.

For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is +/- 2.5 ppm.

- §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

8.2. Test Procedure

1. Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Mobile Test Unit via feed-through attenuators.
2. The EUT was placed inside the temperature chamber.
3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from Mobile Test Unit.

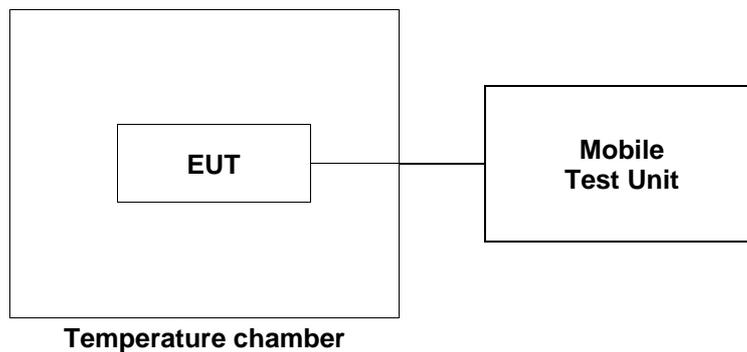

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

8.3. Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

GSM 850 mode at middle channel

| Reference Frequency: 836.6 MHz | | | |
|---|-----------------------------------|------------------------------------|----------|
| Frequency Stability versus Temperature | | | |
| Environment Temperature (°C) | Power Supplied (V _{dc}) | Frequency Measure with Time Elapse | |
| | | Frequency Error (Hz) | ppm |
| 50 | 12.0 | 2 | 0.002 4 |
| 40 | | 5 | 0.006 0 |
| 30 | | 2 | 0.002 4 |
| 23 | | 1 | 0.001 2 |
| 10 | | -3 | -0.003 6 |
| 0 | | 1 | 0.001 2 |
| -10 | | 3 | 0.003 6 |
| -20 | | -1 | -0.001 2 |
| -30 | | -2 | -0.002 4 |
| Frequency Stability versus Power Supply | | | |
| Environment Temperature (°C) | Power Supplied (V _{dc}) | Frequency Measure with Time Elapse | |
| | | Frequency Error (Hz) | ppm |
| 23 | 13.8 | 4 | 0.004 8 |
| | 10.2 | 2 | 0.002 4 |

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

GSM 1 900 mode at middle channel

| Reference Frequency: 1 880.0 MHz | | | |
|---|-----------------------------------|------------------------------------|----------|
| Frequency Stability versus Temperature | | | |
| Environment Temperature (°C) | Power Supplied (V _{dc}) | Frequency Measure with Time Elapse | |
| | | Frequency Error (Hz) | Ppm |
| 50 | 12.0 | 5 | 0.002 7 |
| 40 | | -3 | -0.001 6 |
| 30 | | 1 | 0.000 5 |
| 23 | | 4 | 0.002 1 |
| 10 | | 3 | 0.001 6 |
| 0 | | -2 | -0.001 1 |
| -10 | | 2 | 0.001 1 |
| -20 | | -4 | -0.002 1 |
| -30 | | -2 | -0.001 1 |
| Frequency Stability versus Power Supply | | | |
| Environment Temperature (°C) | Power Supplied (V _{dc}) | Frequency Measure with Time Elapse | |
| | | Frequency Error (Hz) | ppm |
| 23 | 13.8 | 3 | 0.001 6 |
| | 10.2 | -2 | -0.001 1 |

- End of the Test Report -

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.