

TEST REPORT

of

FCC Part 90 Subpart S

FCC ID: BEJIGCJ1PHE

Equipment Under Test : Car AVN
Model Name : IGCJ1PHE
Applicant : LG Electronics USA
Manufacturer : LG Electronics USA
Date of Receipt : 2018.09.21
Date of Test(s) : 2018.09.22 ~ 2019.05.13
Date of Issue : 2019.05.14

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Nancy Park

Date:

2019.05.14

Technical
Manager:



Jungmin Yang

Date:

2019.05.14

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

TABLE OF CONTENTS

	Page
1. General Information -----	3
2. RF Radiated Output Power & Spurious Radiated Emission -----	6
3. Conducted Output Power -----	18
4. Occupied Bandwidth -----	20
5. Spurious Emissions at Antenna Terminal -----	30
6. Band Edge -----	36
7. Frequency Stability -----	46

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of Applicant

Applicant : LG Electronics USA

Address : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States, 07632

Contact Person : Han, Kyung-su

Phone No. : +2 201 472 2623

1.3. Details of Manufacturer

Company : LG Electronics Inc.

Address : 10, Magokjungang 10-ro, Gangseo-gu, Seoul, Korea, 07796

1.4. Description of EUT

Kind of Product	Car AVN
Model Name	IGCJ1PHE
Power Supply	DC 12 V
Rated Power	LTE Band 26: 23 dB m
Frequency Range	LTE Band 26: 814 MHz ~ 824 MHz
Emission Designator	LTE Band 26 (1.4 MHz): 1M10G7D (QPSK) / 1M10D7D (16QAM) LTE Band 26 (3 MHz): 2M69G7D (QPSK) / 2M68D7D (16QAM) LTE Band 26 (5 MHz): 4M49G7D (QPSK) / 4M53D7D (16QAM) LTE Band 26 (10 MHz): 8M94G7D (QPSK) / 8M94D7D (16QAM) LTE Band 26 (15 MHz): 13M5G7D (QPSK) / 13M5D7D (16QAM)
Modulation Technique	QPSK, 16QAM
Antenna Type	External antenna
Antenna gain	-1.79 dB i

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	Agilent	E8257D	MY51501169	Jul. 03, 2018	Annual	Jul. 03, 2019
Spectrum Analyzer	R&S	FSV30	103102	Jun. 11, 2018	Annual	Jun. 11, 2019
Mobile Test Unit	R&S	CMW500	144035	Feb. 19, 2019	Annual	Feb. 19, 2020
Power Meter	Anritsu	ML2495A	1223004	Jun. 12, 2018	Annual	Jun. 12, 2019
Power Sensor	Anritsu	MA2411B	1207272	Jun. 12, 2018	Annual	Jun. 12, 2019
Directional Coupler	KRYTAR	152613	140972	Jun. 14, 2018	Annual	Jun. 14, 2019
Temperature Chamber	ESPEC CORP.	PL-1J	15000793	Jun. 14, 2018	Annual	Jun. 14, 2019
High Pass Filter	Wainwright Instrument GmbH	WHKX10-900-1000-18000-40SS	7	Mar. 12, 2019	Annual	Mar. 12, 2020
DC Power Supply	R&S	HMP2020	019258024	Nov. 06, 2018	Annual	Nov. 06, 2019
Preamplifier	H.P.	8447F	2944A03909	Aug. 07, 2018	Annual	Aug. 07, 2019
Preamplifier	Agilent	8449B	3008A01932	Feb. 22, 2019	Annual	Feb. 22, 2020
Preamplifier	MITEQ Inc.	JS44-18004000-35-8P	1546891	May 13, 2018	Annual	May 13, 2019
Test Receiver	R&S	ESU26	100109	Jan. 31, 2019	Annual	Jan. 31, 2020
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	01126	Mar. 26, 2018	Biennial	Mar. 26, 2020
Horn Antenna	R&S	HF906	100326	Feb. 14, 2018	Biennial	Feb. 14, 2020
Horn Antenna	SCHWARZBECK MESSELEKTRONIK	BBHA9170	BBHA9170223	Sep. 10, 2018	Biennial	Sep. 10, 2020
Antenna Master	Innco systems GmbH	MM4000	N/A	N.C.R.	N/A	N.C.R.
Turn Table	Innco systems GmbH	DS 1200S	N/A	N.C.R.	N/A	N.C.R.
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/38330516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.4 m)	N/A	N.C.R.	N/A	N.C.R.

► Support Equipment

Description	Manufacturer	Model	Serial Number
N/A	-	-	-

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 2 and 90		
Section	Test Item	Result
§2.1046 §90.635(b)	RF Radiated Output Power	Complied
§2.1053 §90.691(a)	Spurious Radiated Emission	Complied
§2.1046	Conducted Output Power	Complied
§2.1049	Occupied Bandwidth	Complied
§2.1051 §90.691(a)	Spurious Emission at Antenna Terminal	Complied
§90.691(a)	Band Edge	Complied
§2.1055 §90.213(a)	Frequency Stability	Complied

1.7. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501/RF-RTL013759	2019.04.24	Initial
1	F690501/RF-RTL013759-1	2019.05.14	Added the information of clause 1.4 and the test method of C63.26 and 15 MHz bandwidth test results and Retested band edge test of 5 MHz and 10 MHz

1.8. Sample Calculation for Offset

Where relevant, the following sample calculation is provided:

1.8.1. Conducted Test

Offset value (dB) = Directional Coupler (dB) + Cable loss (dB)

1.8.2. Radiation Test


E.R.P. = [S.G level + Amp.] (dB m) - Cable loss (dB) + Ant. gain (dB d)

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


2. RF Radiated Output Power & Spurious Radiated Emission

2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz emissions.

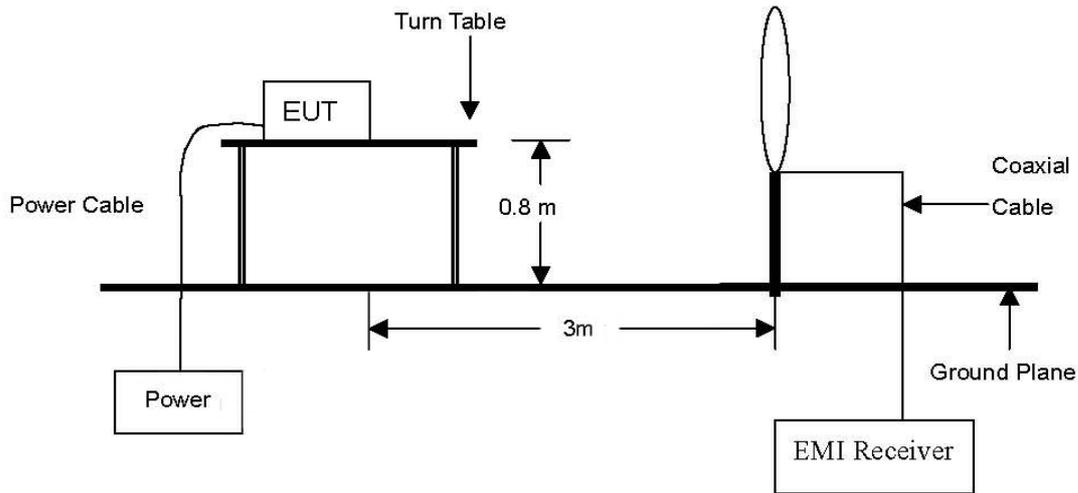


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz.

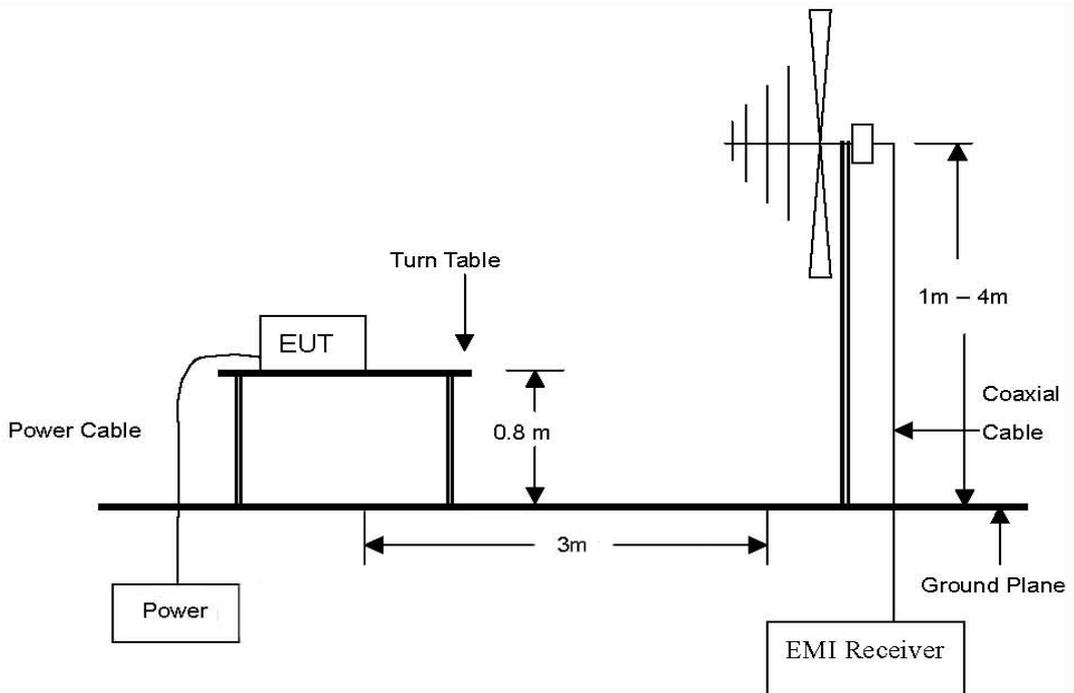


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 9 GHz.

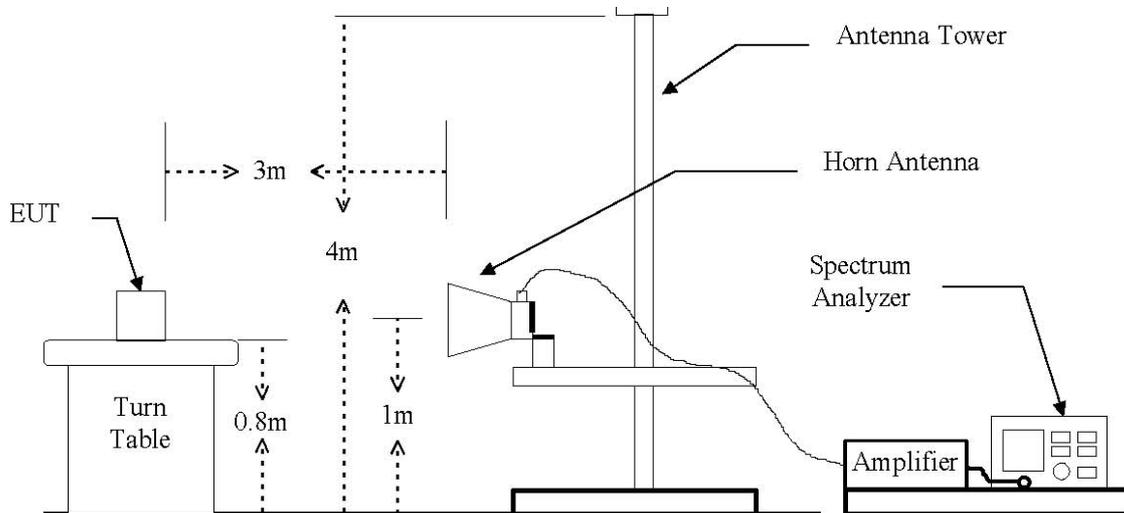

The diagram below shows the test setup for substituted method.

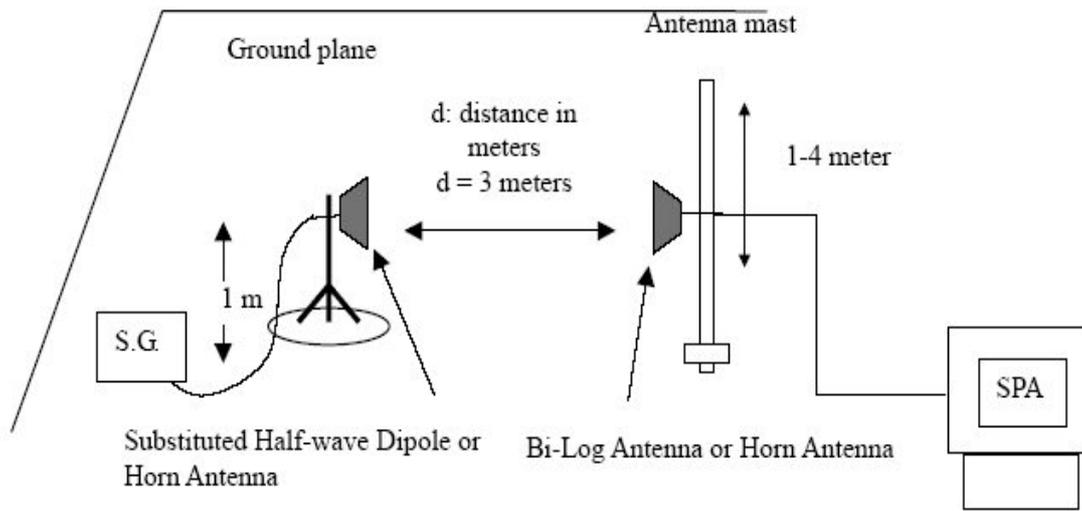

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.2. Limit

2.2.1. Limit of radiated output power

- §90.635(b), The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

2.2.2. Limit of spurious radiated emission

- §90.691(a), Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.3. Test procedure: Based on ANSI/TIA 603E: 2016 and ANSI C63.26-2015

1. On a test site, the EUT shall be placed at 80 cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions occupied bandwidth, RBW = 1-5 % of the OBW (not to exceed 1 MHz), VBW $\geq 3 \times$ RBW, Detector = power averaging (rms), sweep time = auto, trace average at least 100 traces in power averaging (rms) mode, per the guidelines of KDB 971168 D01 Power Meas License Digital Systems v03r01.
5. Radiated spurious emissions measurement method was set as follows:
RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz, VBW $\geq 3 \times$ RBW, Detector = Peak, trace mode = max hold, per the guidelines of KDB 971168 D01 Power Meas License Digital Systems v03r01.
6. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
7. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
8. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
9. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
10. The maximum signal level detected by the measuring receiver shall be noted.
11. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
12. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.4. Test result for RF radiated output power

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

LTE band 26 (1.4 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
814.70	H	25.26	3.23	-3.41	18.62	72.78
814.70	V	19.21	3.23	-3.41	12.57	18.07
823.30	H	25.50	3.22	-4.71	17.57	57.15
823.30	V	21.32	3.22	-4.71	13.39	21.83

* 1.4 BW 1RB size / 0 Offset for B26

LTE band 26 (1.4 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
814.70	H	24.30	3.23	-3.41	17.66	58.34
814.70	V	18.28	3.23	-3.41	11.64	14.59
823.30	H	24.52	3.22	-4.71	16.59	45.60
823.30	V	20.19	3.22	-4.71	12.26	16.83

* 1.4 BW 1RB size / 0 Offset for B26

LTE band 26 (3 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
815.50	H	25.39	3.21	-3.53	18.65	73.28
815.50	V	19.32	3.21	-3.53	12.58	18.11
822.50	H	25.27	3.19	-4.59	17.49	56.10
822.50	V	20.94	3.19	-4.59	13.16	20.70

* 3 BW 1RB size / 0 Offset for B26

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (3 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
815.50	H	24.22	3.21	-3.53	17.48	55.98
815.50	V	18.37	3.21	-3.53	11.63	14.55
822.50	H	24.33	3.19	-4.59	16.55	45.19
822.50	V	19.99	3.19	-4.59	12.21	16.63

* 3 BW 1RB size / 0 Offset for B26

LTE band 26 (5 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
816.50	H	25.41	3.19	-3.68	18.54	71.45
816.50	V	19.41	3.19	-3.68	12.54	17.95
821.50	H	25.40	3.16	-4.44	17.80	60.26
821.50	V	20.38	3.16	-4.44	12.78	18.97

* 5 BW 1RB size / 0 Offset for B26

LTE band 26 (5 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
816.50	H	24.64	3.19	-3.68	17.77	59.84
816.50	V	18.66	3.19	-3.68	11.79	15.10
821.50	H	24.71	3.16	-4.44	17.11	51.40
821.50	V	19.53	3.16	-4.44	11.93	15.60

* 5 BW 1RB size / 0 Offset for B26

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (10 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
819.00	H	25.41	3.14	-4.06	18.21	66.22
819.00	V	19.43	3.14	-4.06	12.23	16.71

* 10 BW 1RB size / 0 Offset for B26

LTE band 26 (10 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
819.00	H	24.72	3.14	-4.06	17.52	56.49
819.00	V	18.66	3.14	-4.06	11.46	14.00

* 10 BW 1RB size / 0 Offset for B26

LTE band 26 (15 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
821.50	H	26.48	3.16	-4.44	18.88	77.27
821.50	V	20.89	3.16	-4.44	13.29	21.33

* 15 BW 1RB size / 0 Offset for B26

LTE band 26 (15 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
821.50	H	25.43	3.16	-4.44	17.83	60.67
821.50	V	20.17	3.16	-4.44	12.57	18.07

* 15 BW 1RB size / 0 Offset for B26

Remark;

1. E.R.P. = [S.G level + Amp.] (dB m) - Cable loss (dB) + Ant. gain (dB d)
2. This device was tested under all bandwidths, RB configurations and modulations.
3. The data reported in the table above was measured in worst case.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.5. Spurious radiated emission

- Modulation Signal: LTE band 26 (1.4 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (814.7 MHz)							
1 000.22	H	-51.16	3.12	3.79	-50.49	-13	37.49
1 000.07	V	-57.39	3.12	3.79	-56.72	-13	43.72
1 500.09	H	-54.38	3.67	5.75	-52.30	-13	39.30
1 500.17	V	-59.29	3.67	5.75	-57.21	-13	44.21
3 000.08	H	-49.59	5.36	7.27	-47.68	-13	34.68
3 000.06	V	-46.51	5.36	7.27	-44.60	-13	31.60
High Channel (823.3 MHz)							
1 000.09	H	-51.39	3.12	3.79	-50.72	-13	37.72
1 000.16	V	-57.22	3.12	3.79	-56.55	-13	43.55
1 500.14	H	-54.67	3.67	5.75	-52.59	-13	39.59
1 500.05	V	-59.90	3.67	5.75	-57.82	-13	44.82
3 000.05	H	-48.59	5.36	7.27	-46.68	-13	33.68
3 000.10	V	-46.27	5.36	7.27	-44.36	-13	31.36

* 1.4 BW 1RB size / 0 Offset for B26

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

- Modulation Signal: LTE band 26 (3 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (815.5 MHz)							
1 000.03	H	-51.29	3.12	3.79	-50.62	-13	37.62
1 000.22	V	-57.32	3.12	3.79	-56.65	-13	43.65
1 500.12	H	-54.69	3.67	5.75	-52.61	-13	39.61
1 500.20	V	-59.60	3.67	5.75	-57.52	-13	44.52
3 000.05	H	-49.74	5.36	7.27	-47.83	-13	34.83
3 000.08	V	-46.27	5.36	7.27	-44.36	-13	31.36
High Channel (822.5 MHz)							
1 000.07	H	-51.65	3.12	3.79	-50.98	-13	37.98
1 000.05	V	-56.30	3.12	3.79	-55.63	-13	42.63
1 500.21	H	-54.08	3.67	5.75	-52.00	-13	39.00
1 500.03	V	-59.46	3.67	5.75	-57.38	-13	44.38
3 000.06	H	-48.17	5.36	7.27	-46.26	-13	33.26
3 000.12	V	-45.89	5.36	7.27	-43.98	-13	30.98

* 3 BW 1RB size / 0 Offset for B26

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

- Modulation Signal: LTE band 26 (5 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (816.5 MHz)							
1 000.09	H	-51.74	3.12	3.79	-51.07	-13	38.07
1 000.20	V	-57.56	3.12	3.79	-56.89	-13	43.89
1 500.15	H	-54.08	3.67	5.75	-52.00	-13	39.00
1 500.01	V	-59.33	3.67	5.75	-57.25	-13	44.25
3 000.07	H	-49.40	5.36	7.27	-47.49	-13	34.49
3 000.04	V	-45.93	5.36	7.27	-44.02	-13	31.02
High Channel (821.5 MHz)							
1 000.09	H	-51.48	3.12	3.79	-50.81	-13	37.81
1 000.11	V	-56.46	3.12	3.79	-55.79	-13	42.79
1 500.18	H	-52.22	3.67	5.75	-50.14	-13	37.14
1 500.09	V	-59.04	3.67	5.75	-56.96	-13	43.96
3 000.07	H	-47.98	5.36	7.27	-46.07	-13	33.07
3 000.04	V	-46.41	5.36	7.27	-44.50	-13	31.50

* 5 BW 1RB size / 0 Offset for B26

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

- Modulation Signal: LTE band 26 (10 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Middle Channel (819.0 MHz)							
1 000.05	H	-51.71	3.12	3.79	-51.04	-13	38.04
1 000.11	V	-57.32	3.12	3.79	-56.65	-13	43.65
1 500.07	H	-53.28	3.67	5.75	-51.20	-13	38.20
1 500.04	V	-59.21	3.67	5.75	-57.13	-13	44.13
3 000.07	H	-47.69	5.36	7.27	-45.78	-13	32.78
3 000.11	V	-46.72	5.36	7.27	-44.81	-13	31.81

* 10 BW 1RB size / 0 Offset for B26

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

- Modulation Signal: LTE band 26 (15 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Middle Channel (821.5 MHz)							
1 000.07	H	-51.62	3.12	3.79	-50.95	-13	37.95
1 000.08	V	-58.00	3.12	3.79	-57.33	-13	44.33
1 500.13	H	-52.08	3.67	5.75	-50.00	-13	37.00
1 500.03	V	-58.35	3.67	5.75	-56.27	-13	43.27
3 000.07	H	-47.93	5.36	7.27	-46.02	-13	33.02
3 000.11	V	-46.09	5.36	7.27	-44.18	-13	31.18

* 15 BW 1RB size / 0 Offset for B26

Remark;

1. E.R.P. = S.G level (dB m) - Cable loss (dB) + Ant. gain (dB d)
2. This device was tested under all bandwidths, RB configurations, and modulations.
3. The data reported in the table above was measured in worst case.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

3. Conducted Output Power


3.1. Limit

CFR 47, Section FCC §2.1046.

3.2. Test Procedure

Output power shall be measured at the RF output terminals for all configurations.

1. The RF output of the transmitter was connected to the input of the mobile test unit in order to establish communication with the EUT.
2. The EUT was set up for the max. output power with pseudo random data modulation by using mobile test unit parameters.
3. The measurement performed using a wideband RF power meter.
4. This EUT was tested under all configurations and the highest power was investigated and reported.

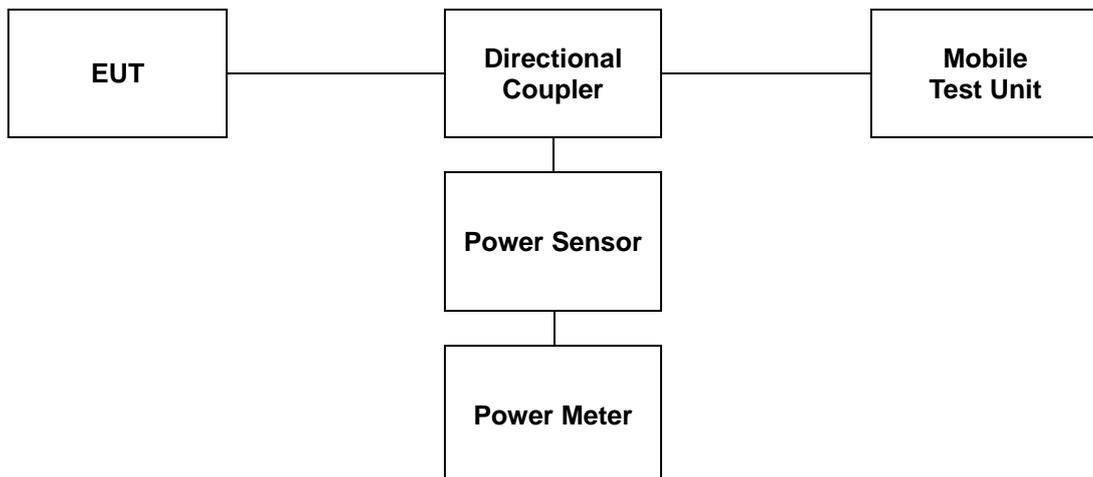

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

3.3. Test Result

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

Band	Bandwidth (MHz)	RB Size	RB Offset	QPSK		16QAM	
				26697	26783	26697	26783
				814.7	823.3	814.7	823.3
26	1.4	1	0	22.80	22.68	21.84	21.77
		1	3	22.83	22.73	21.82	21.82
		1	5	22.74	22.75	21.76	21.84
		3	0	22.80	22.71	21.93	21.84
		3	2	22.83	22.75	21.95	21.86
		3	3	22.85	22.80	22.02	21.88
		6	0	21.82	21.75	20.81	20.70
	Bandwidth (MHz)	RB Size	RB Offset	26705	26775	26705	26775
				815.5	822.5	815.5	822.5
	3	1	0	22.91	22.80	22.00	22.24
		1	8	22.89	22.75	22.05	22.23
		1	14	22.73	22.78	21.87	22.20
		8	0	21.89	21.85	20.89	21.01
		8	4	21.85	21.80	20.86	20.95
		8	7	21.83	21.74	20.83	20.91
		15	0	21.89	21.79	20.86	20.88
	Bandwidth (MHz)	RB Size	RB Offset	26715	25765	26715	25765
				816.5	821.5	816.5	821.5
	5	1	0	22.83	22.85	21.73	21.87
		1	12	22.88	22.89	21.70	21.89
		1	24	22.64	22.80	21.59	21.82
		12	0	21.87	21.92	20.88	20.86
		12	7	21.83	21.81	20.83	20.80
		12	13	21.84	21.79	20.81	20.73
		25	0	21.84	21.86	20.91	20.89
	Bandwidth (MHz)	RB Size	RB Offset	26740		26740	
				819.0		819.0	
	10	1	0	22.72		21.87	
		1	25	22.89		21.86	
		1	49	22.54		21.70	
25		0	21.91		20.90		
25		12	21.88		20.86		
25		25	21.85		20.81		
50		0	21.93		20.85		
Bandwidth (MHz)	RB Size	RB Offset	26765		26765		
			821.5		821.5		
15	1	0	22.69		21.78		
	1	37	22.88		21.81		
	1	74	22.56		21.65		
	36	0	21.88		20.82		
	36	20	21.86		20.80		
	36	39	21.88		20.85		
	75	0	21.90		20.79		

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

4. Occupied Bandwidth


4.1. Limit

CFR 47, Section FCC §2.1049

4.2. Test Procedure

The test follows section 4.2 of KDB 971168 D01 Power Meas License Digital Systems v03r01.

- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b. The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d. Set the detection mode to peak, and the trace mode to max-hold.
- e. If the instrument does not have a 99 % OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5 % of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5 % of the total is reached and record that frequency as the upper OBW frequency. The 99 % power OBW can be determined by computing the difference these two frequencies.
- f. The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

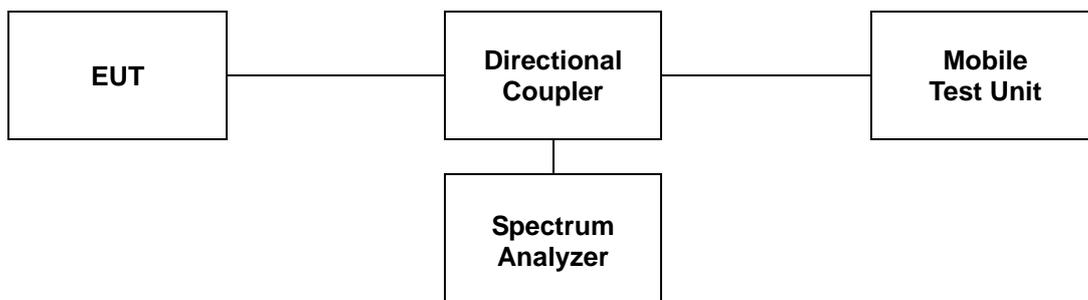

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

4.3 Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.


Band	Mode	Frequency (MHz)	Occupied Bandwidth (MHz)
26 (1.4 MHz)	QPSK	814.7	1.098
		823.3	1.098
26 (1.4 MHz)	16QAM	814.7	1.094
		823.3	1.098
26 (3 MHz)	QPSK	815.5	2.692
		822.5	2.683
26 (3 MHz)	16QAM	815.5	2.683
		822.5	2.683
26 (5 MHz)	QPSK	816.5	4.486
		821.5	4.486
26 (5 MHz)	16QAM	816.5	4.530
		821.5	4.501
26 (10 MHz)	QPSK	819.0	8.944
26 (10 MHz)	16QAM	819.0	8.944
26 (15 MHz)	QPSK	821.5	13.502
26 (15 MHz)	16QAM	821.5	13.502

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


- Test plots

LTE band 26 (1.4 MHz - QPSK)

Low Channel

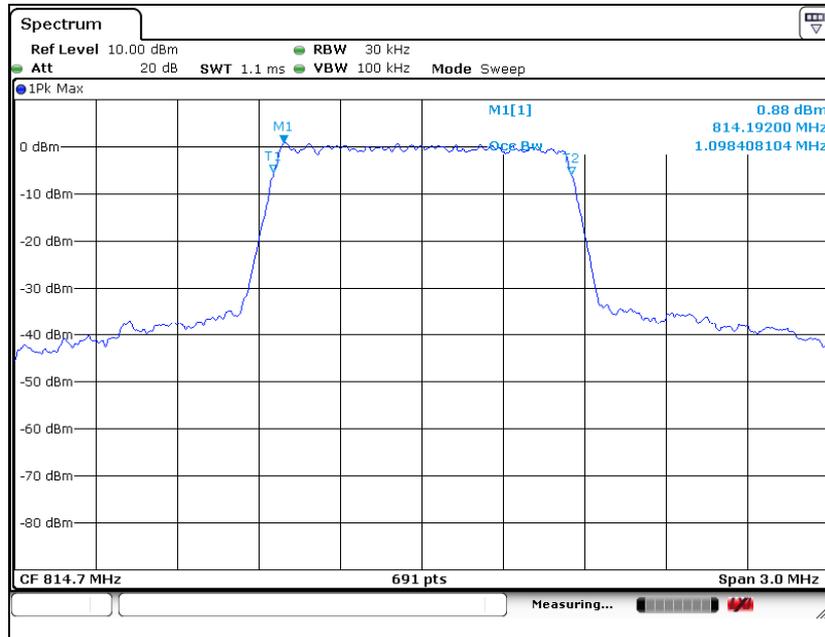


High Channel

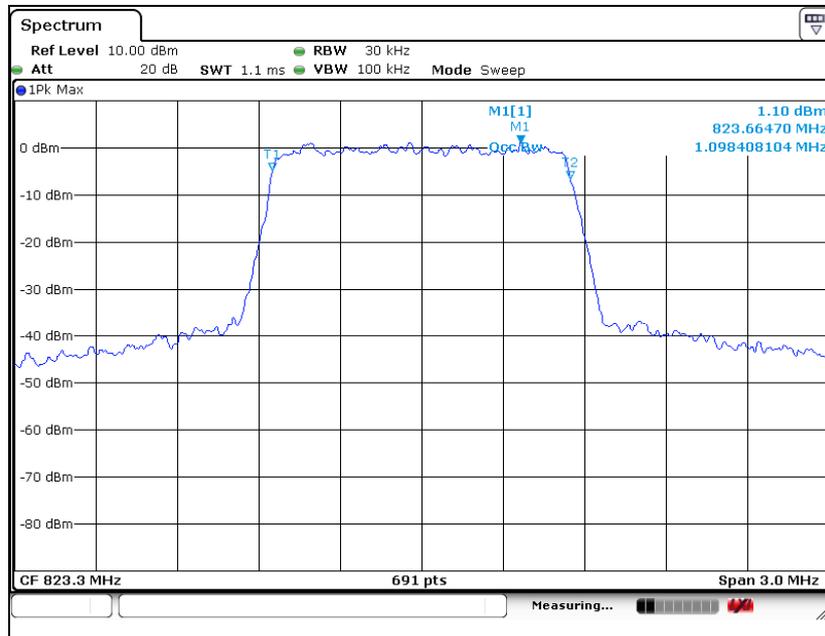


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (1.4 MHz - 16QAM)

Low Channel

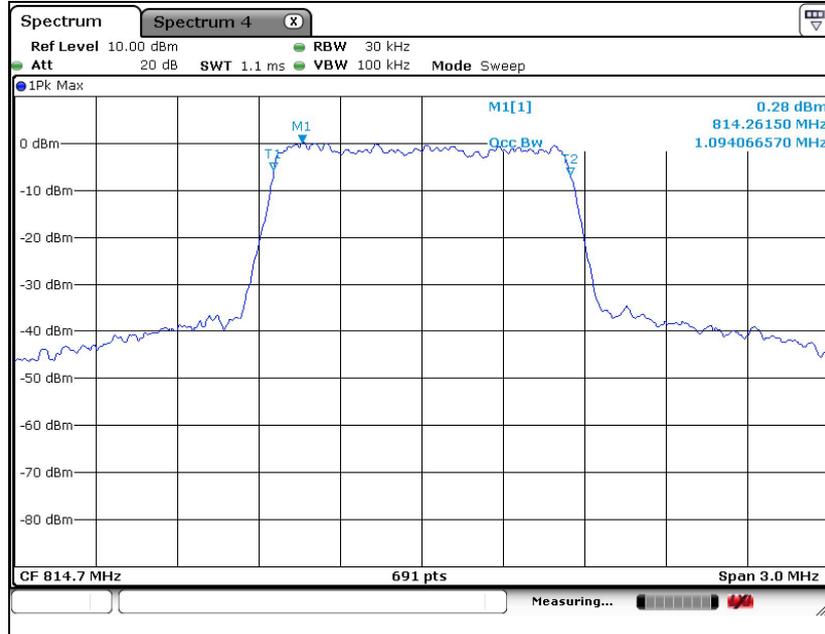


High Channel

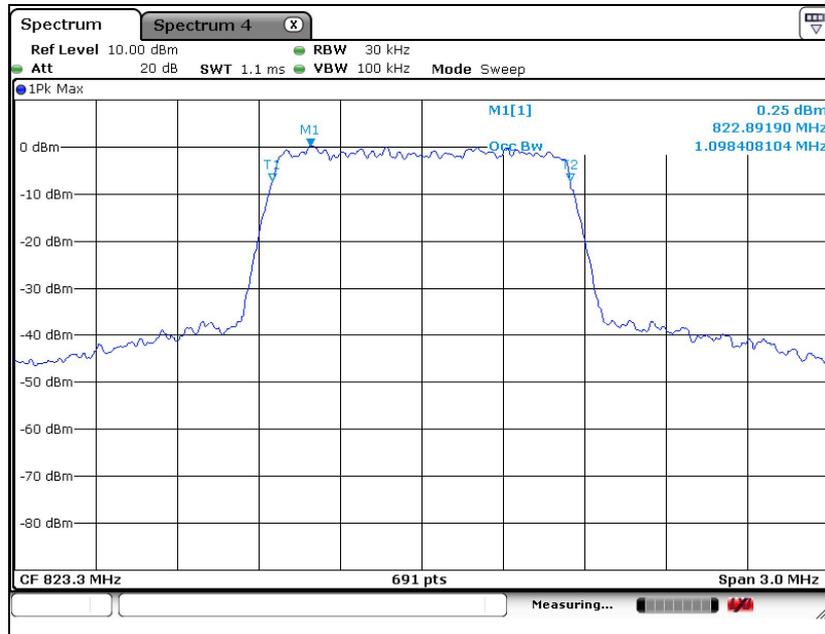


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (3 MHz - QPSK)

Low Channel

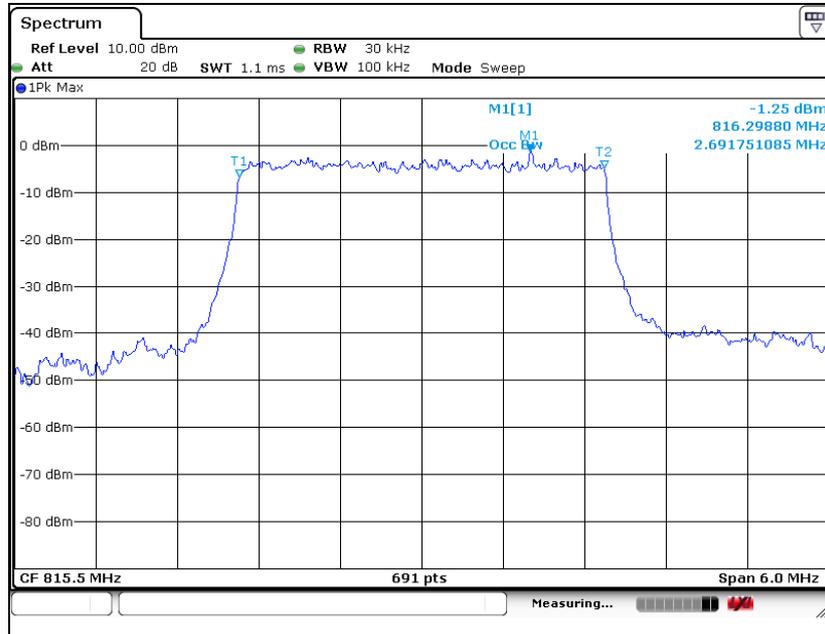


High Channel

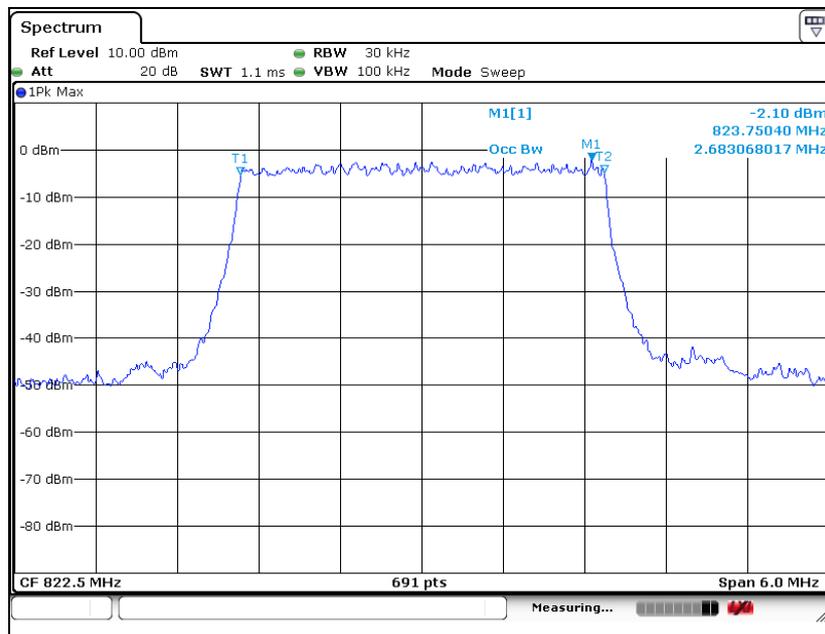


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (3 MHz - 16QAM)

Low Channel

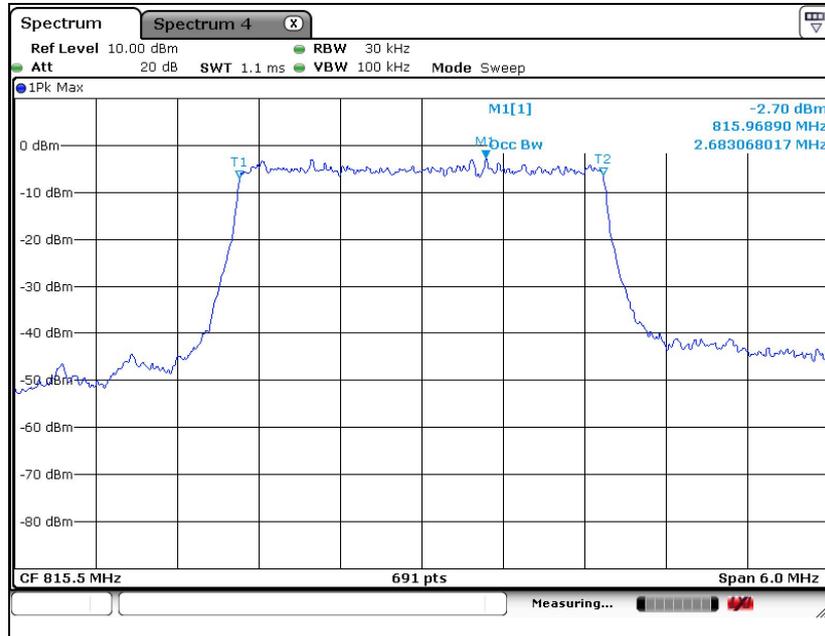


High Channel

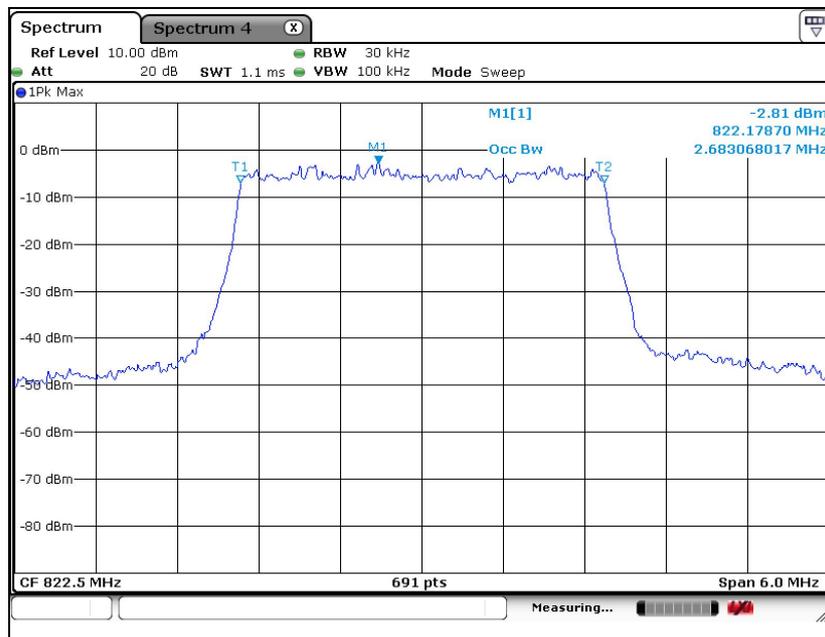


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (5 MHz - QPSK)

Low Channel

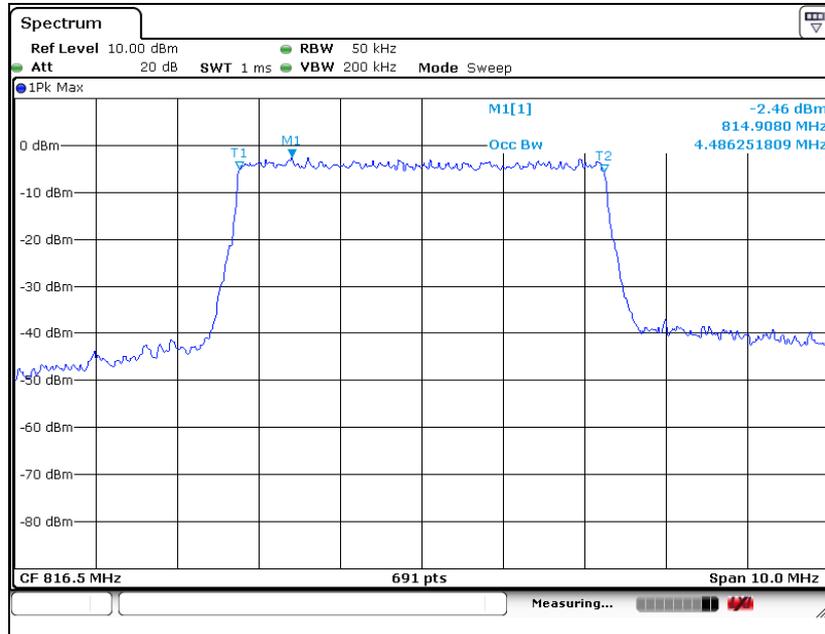


High Channel

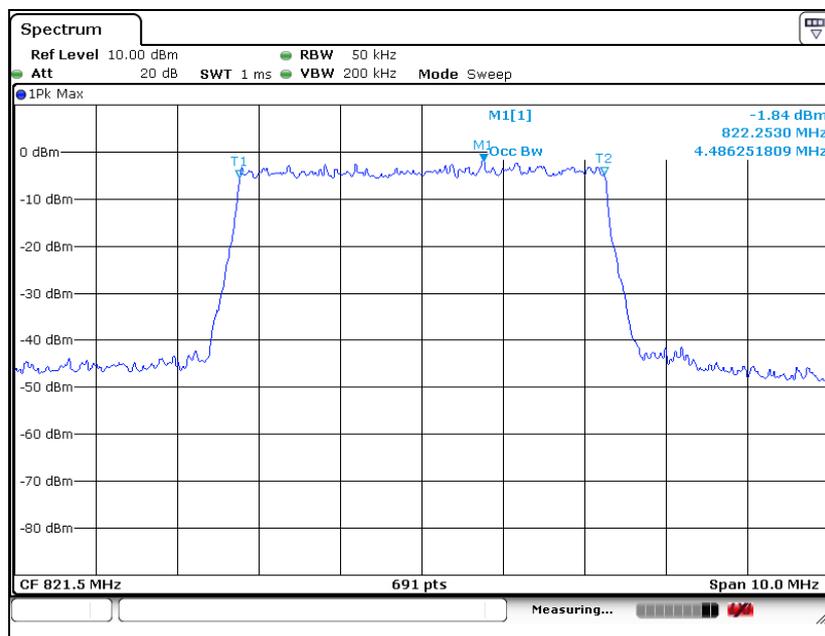


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (5 MHz - 16QAM)

Low Channel

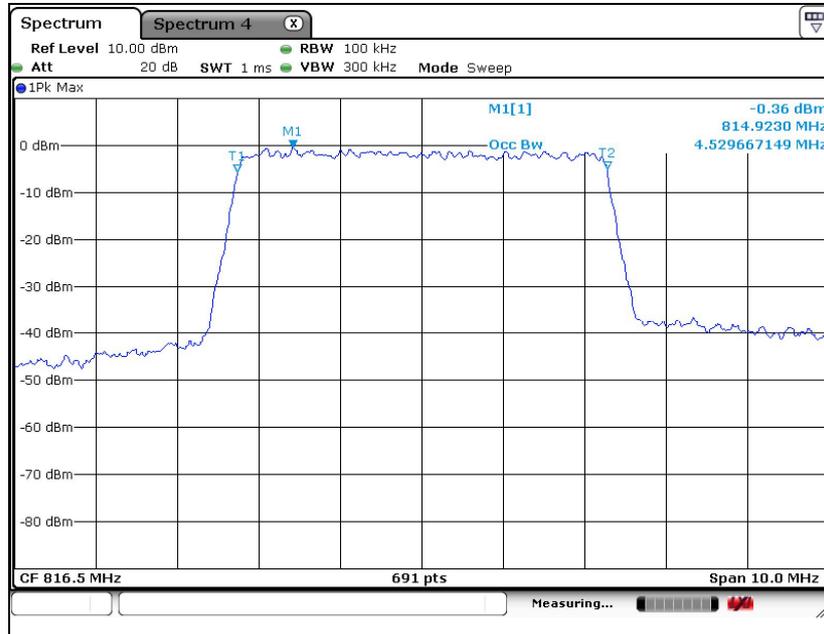


High Channel

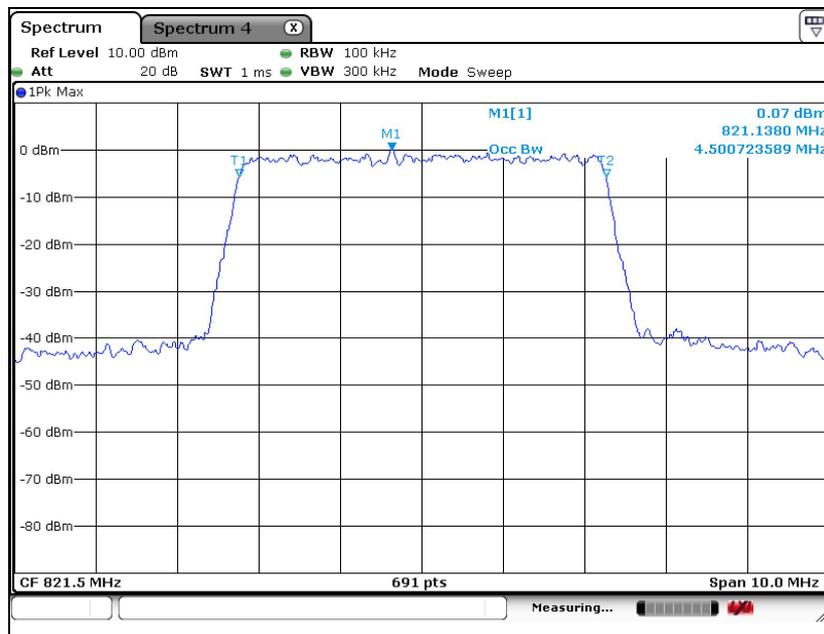

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (10 MHz - QPSK)

Middle Channel

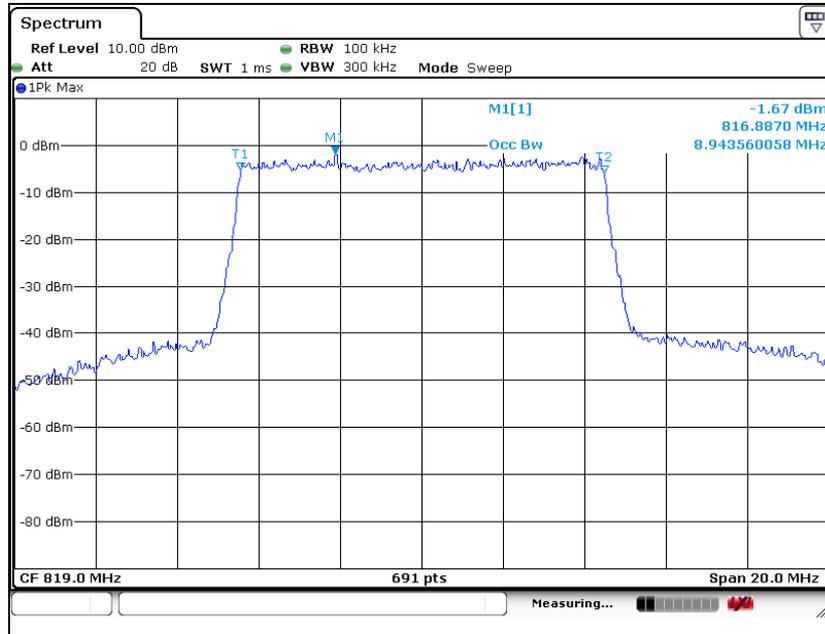

LTE band 26 (10 MHz - 16QAM)


Middle Channel

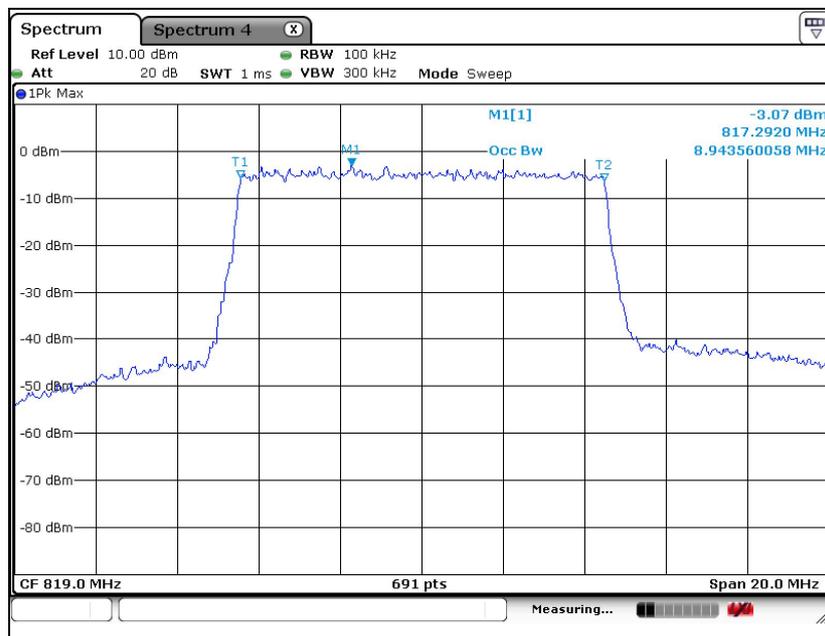

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (15 MHz - QPSK)

Middle Channel

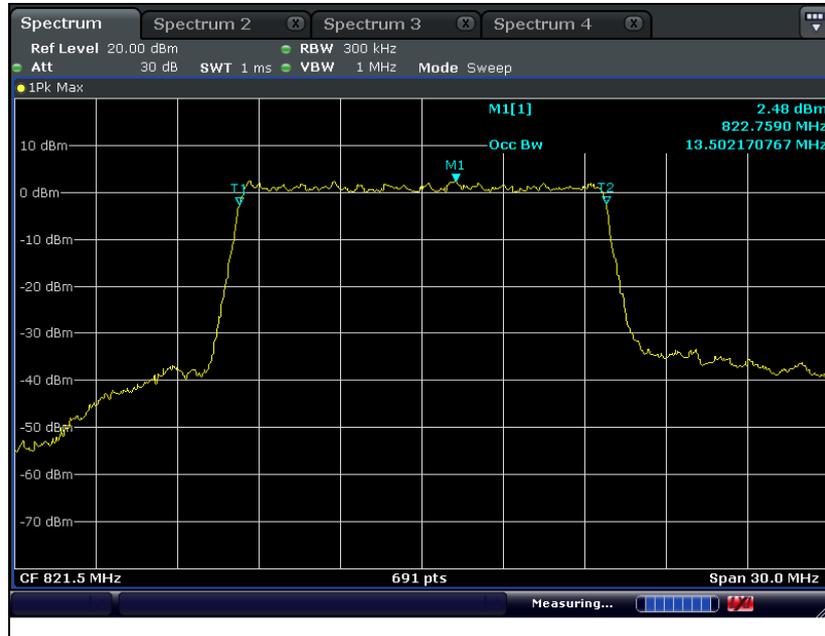

LTE band 26 (15 MHz - 16QAM)

Middle Channel

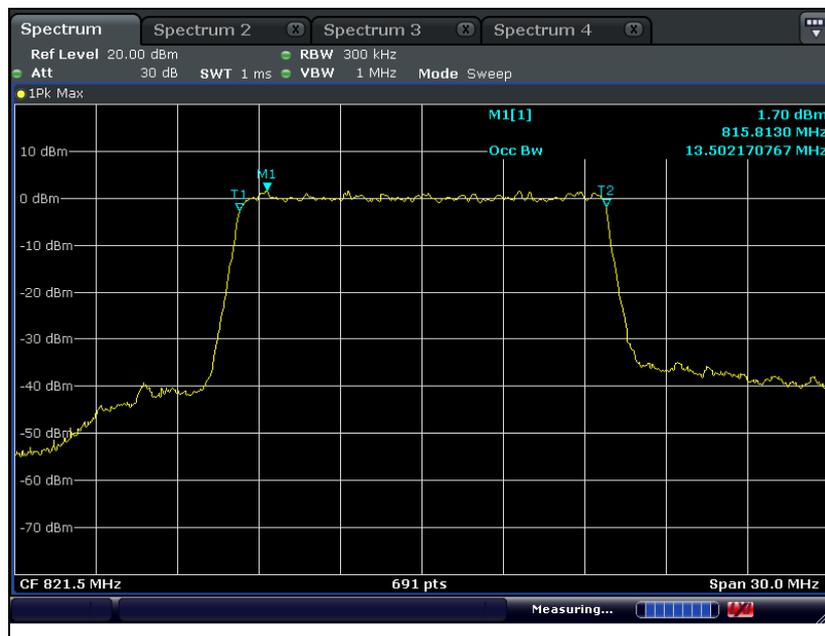

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

5. Spurious Emissions at Antenna Terminal

5.1. Limit

- §90.691(a), Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

5.2. Test Procedure

The test follows section 6 of KDB 971168 D01 Power Meas License Digital Systems v03r01.

1. Start frequency was set to 9 kHz and stop frequency was set to at least 10* the fundamental frequency.
2. Detector = Peak.
3. Trace mode = Max hold.
4. Sweep time = Auto couple.
5. The trace was allowed to stabilize.
6. Please see notes below for RBW and VBW settings.
7. For plots showing conducted spurious emissions from 9 kHz to 9 GHz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as correction factor.

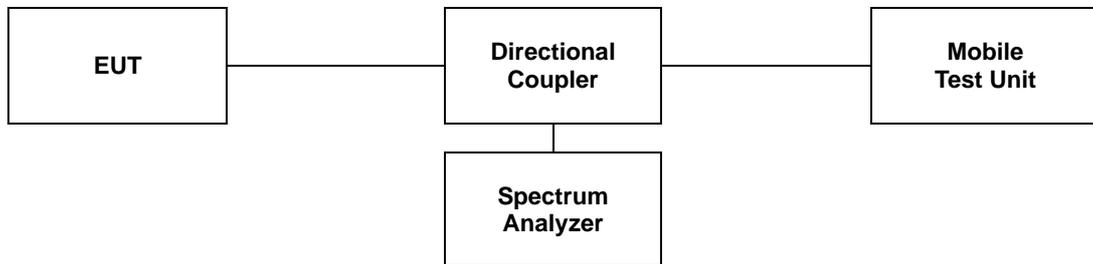

Note;

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two point, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)


5.3. Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.


- Test plots

LTE band 26 (1.4 MHz - QPSK)

Low Channel

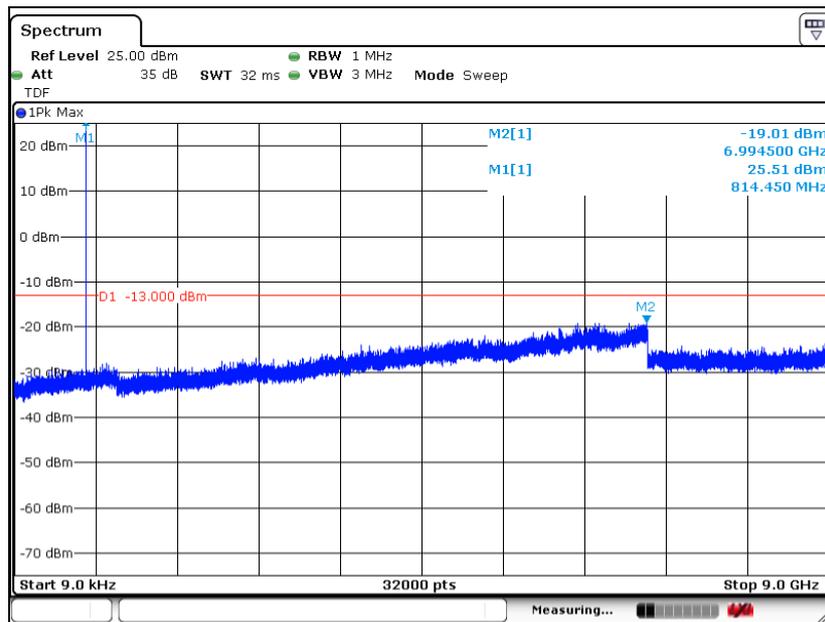


High Channel

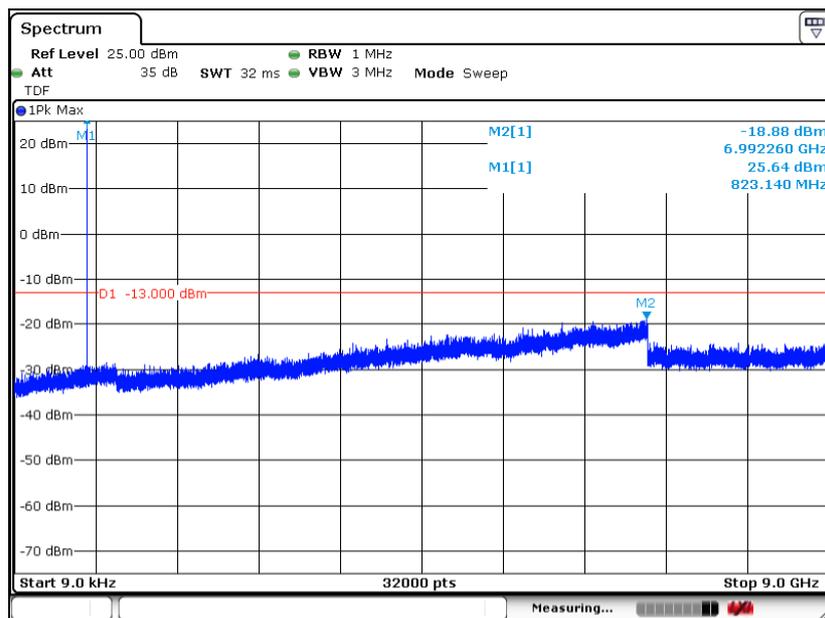


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (3 MHz - QPSK)

Low Channel

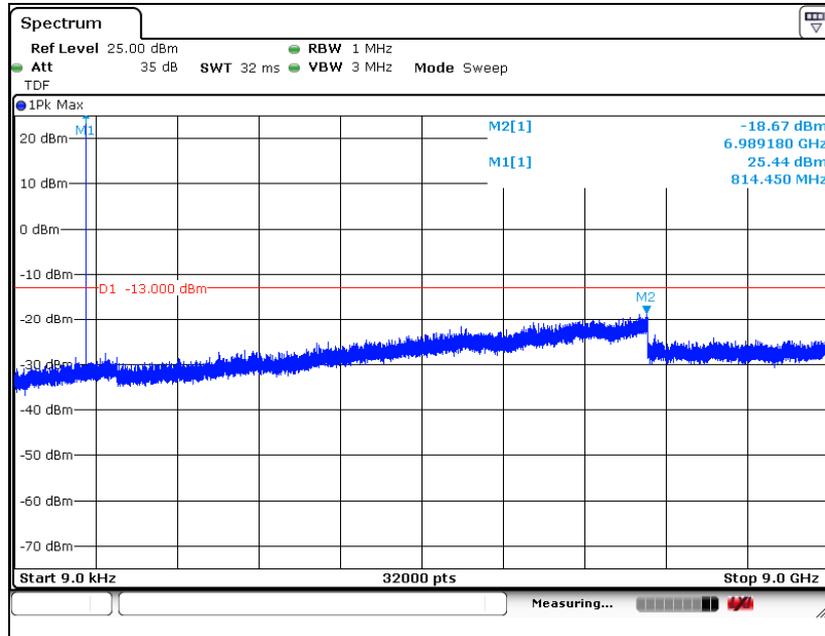


High Channel

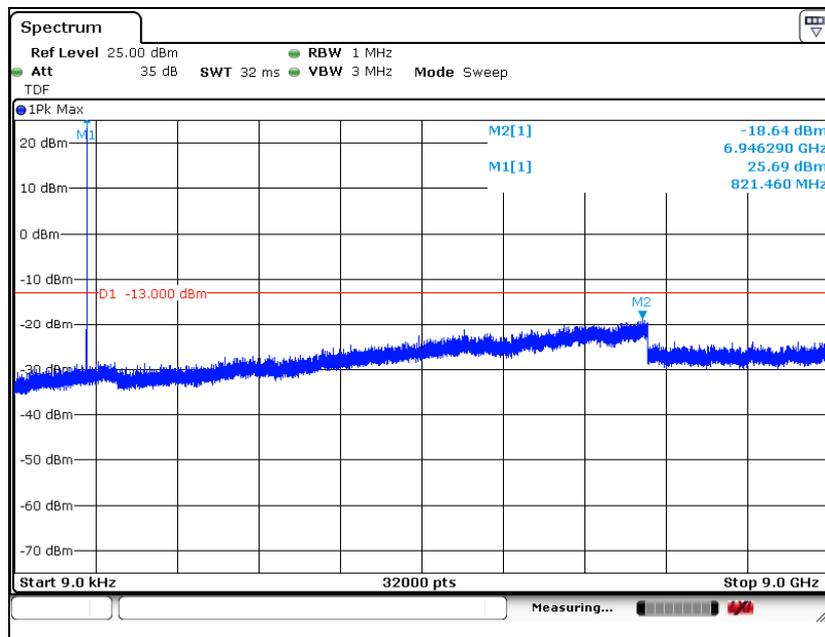


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (5 MHz - QPSK)

Low Channel

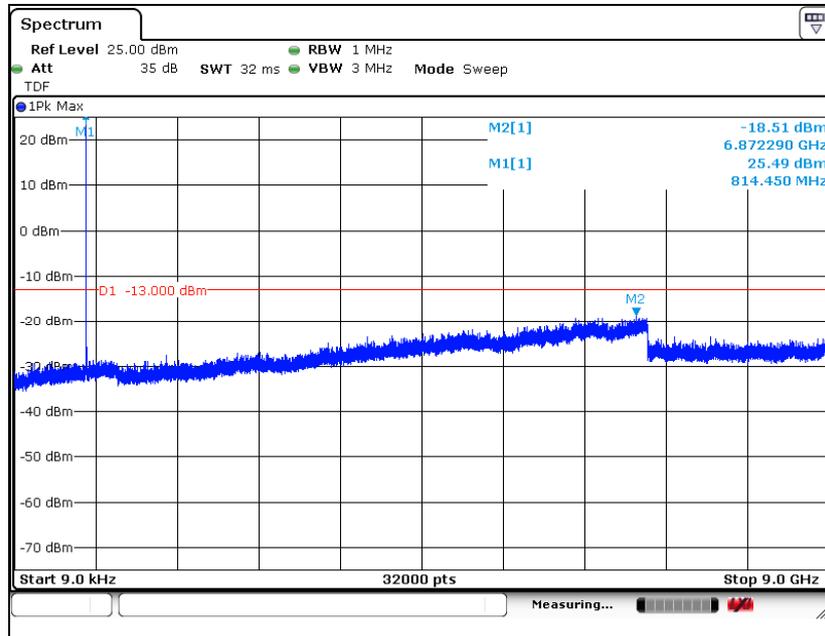


High Channel

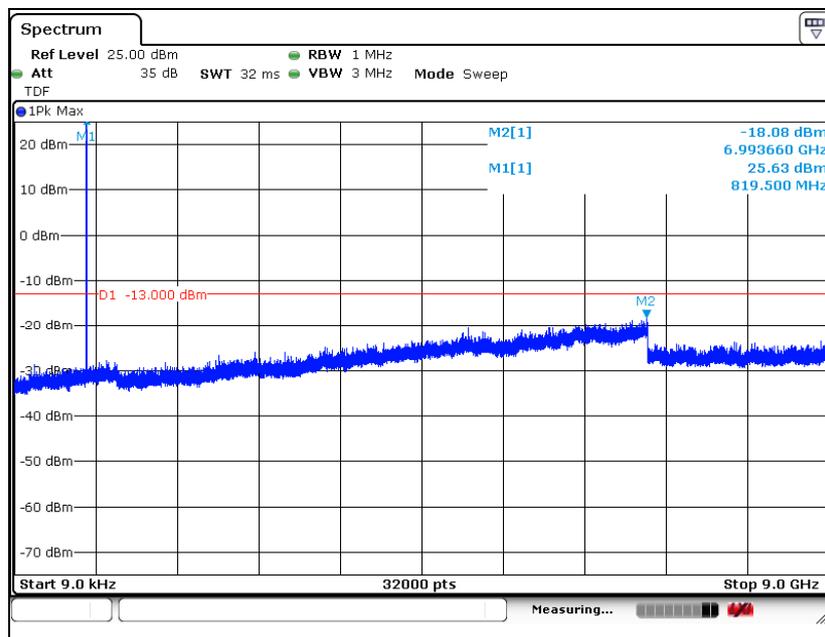

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (10 MHz - QPSK)

Middle Channel

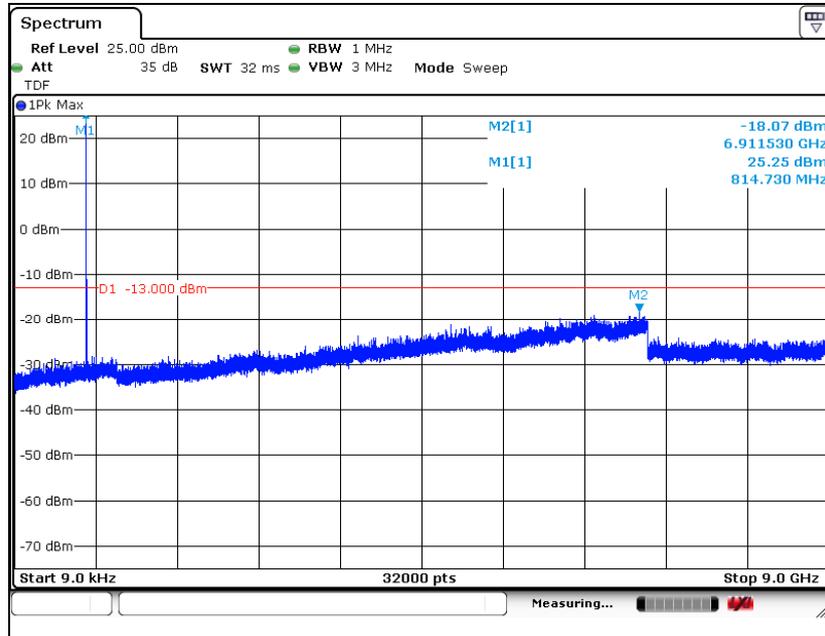

LTE band 26 (15 MHz - QPSK)

Middle Channel

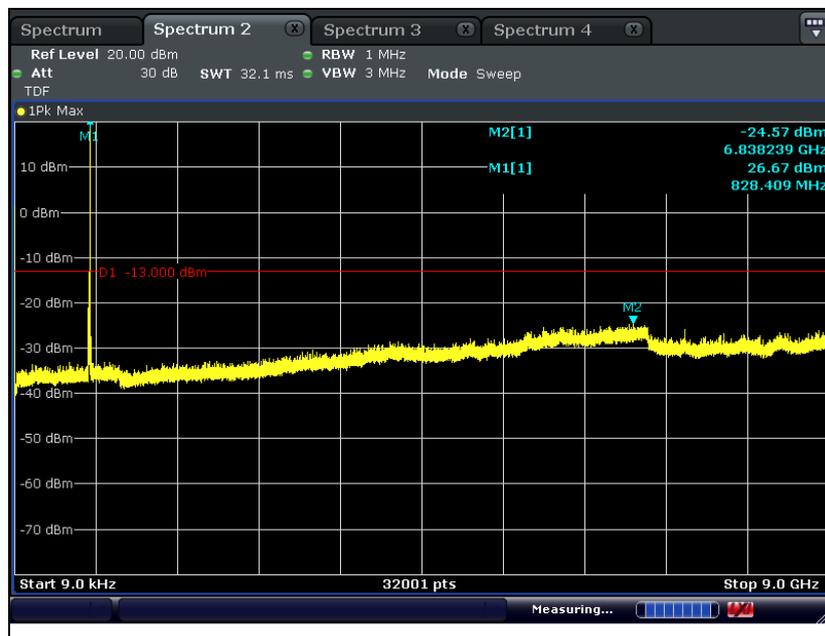

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

6. Band Edge

6.1. Limit

- §90.691(a), Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:


(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀ (f/6.1) decibels or 50 + 10 Log₁₀ (P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀ (P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

6.2. Test Procedure

The test follows section 6.0 of KDB 971168 D01 Power Meas License Digital Systems v03r01.

- a. Span was set large enough so as to capture all out of band emissions near the band edge.
- b. RBW ≥ 1 % of OBW
- c. VBW ≥ 3 x RBW.
- d. Detector = RMS.
- e. Trace mode = Average.
- f. Sweep time = Auto.
- g. The trace was allowed to stabilize.
- h. All path loss of frequency range was investigated and compensated to spectrum analyzer as TDF function.

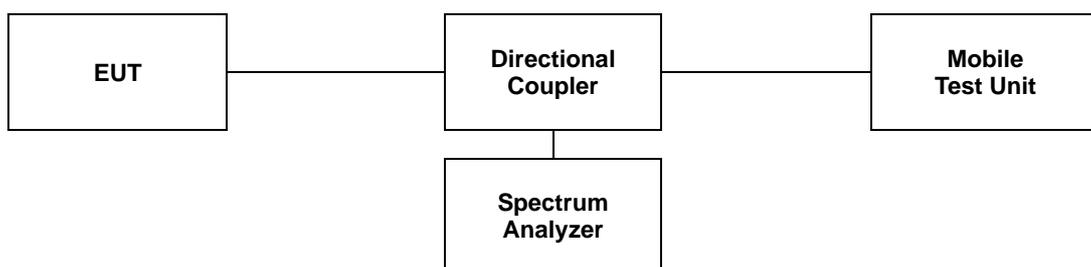

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


6.3. Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

- Test plots


LTE band 26 (1.4 MHz - QPSK_RB 6)

Low Channel

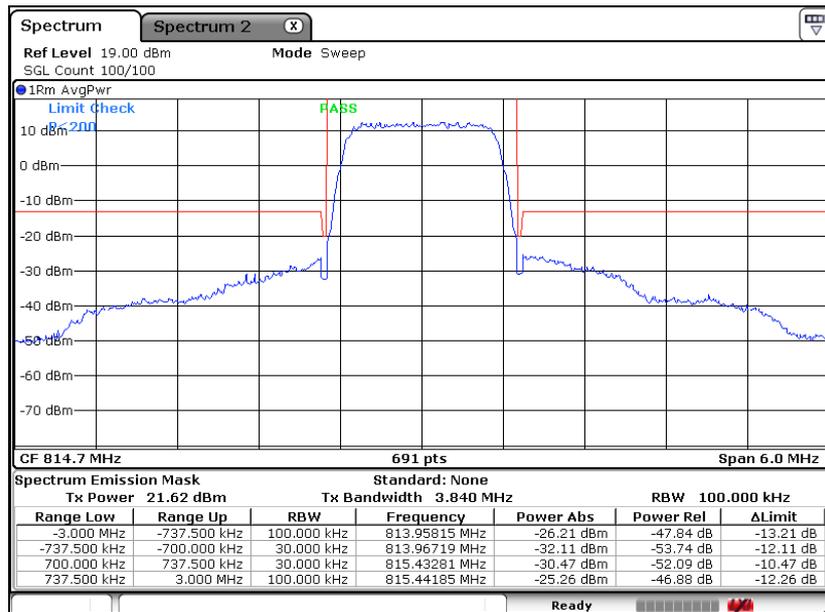

LTE band 26 (1.4 MHz - QPSK_RB 1)


Low Channel

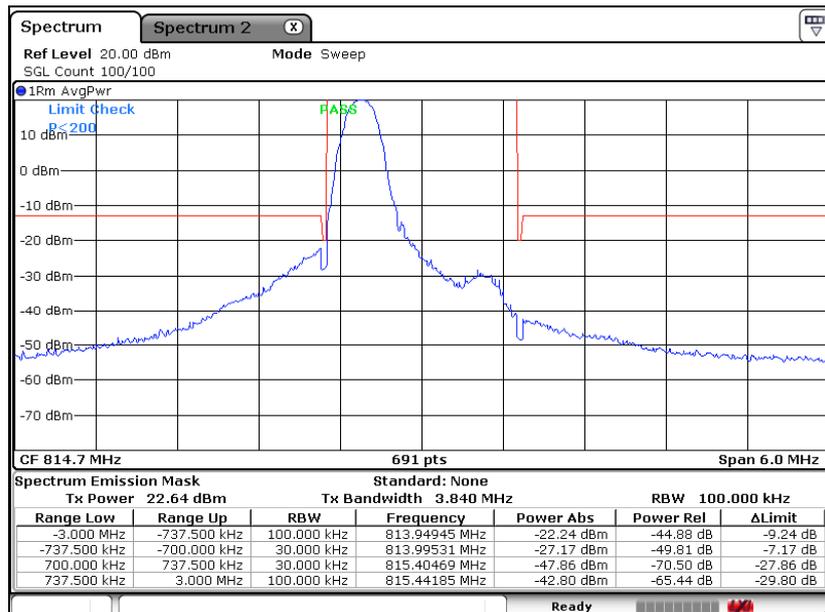

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (1.4 MHz - QPSK_RB 6)

High Channel

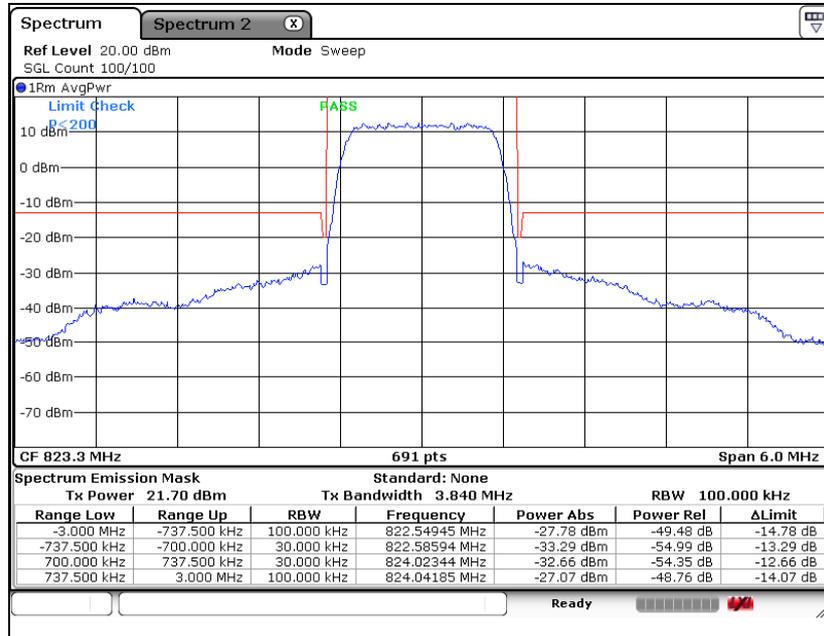

LTE band 26 (1.4 MHz - QPSK_RB 1)


High Channel

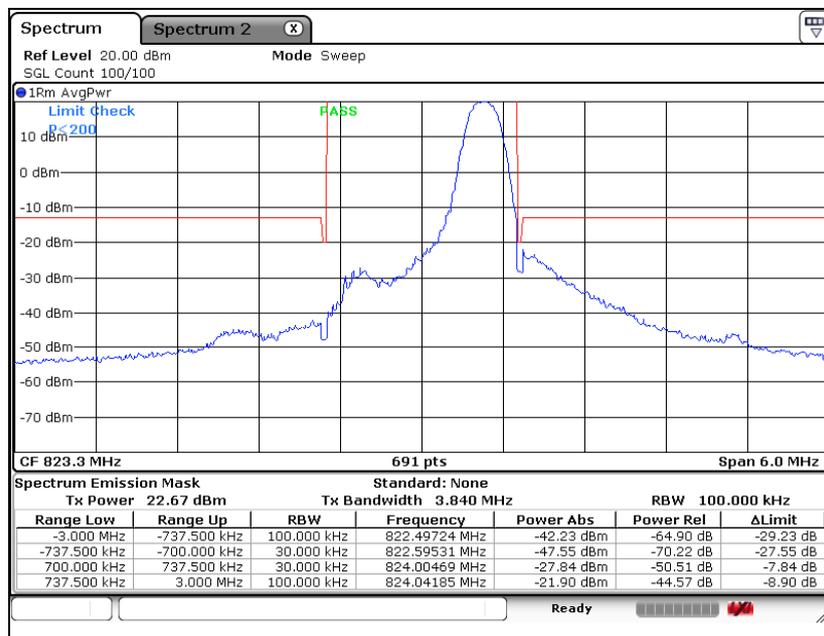

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (3 MHz - QPSK_RB 15)

Low Channel

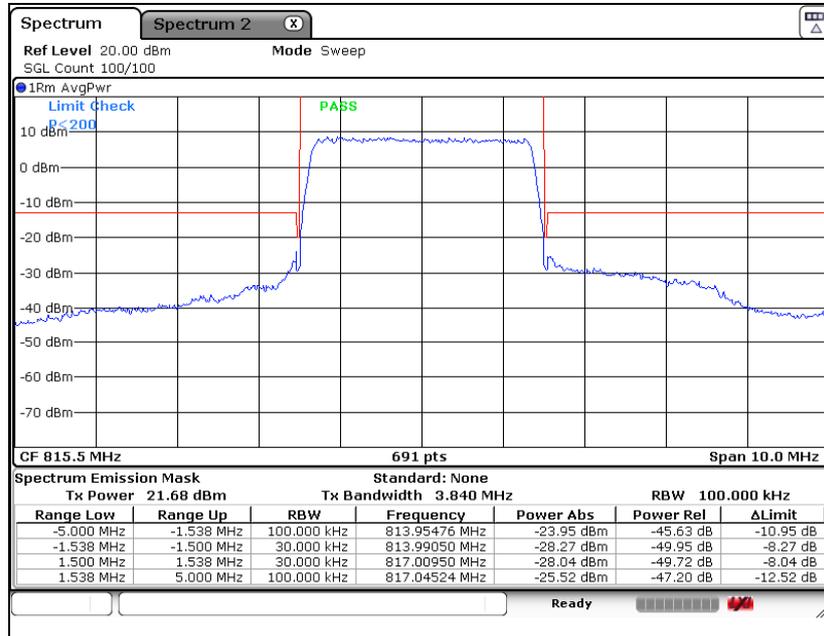

LTE band 26 (3 MHz - QPSK_RB 1)


Low Channel

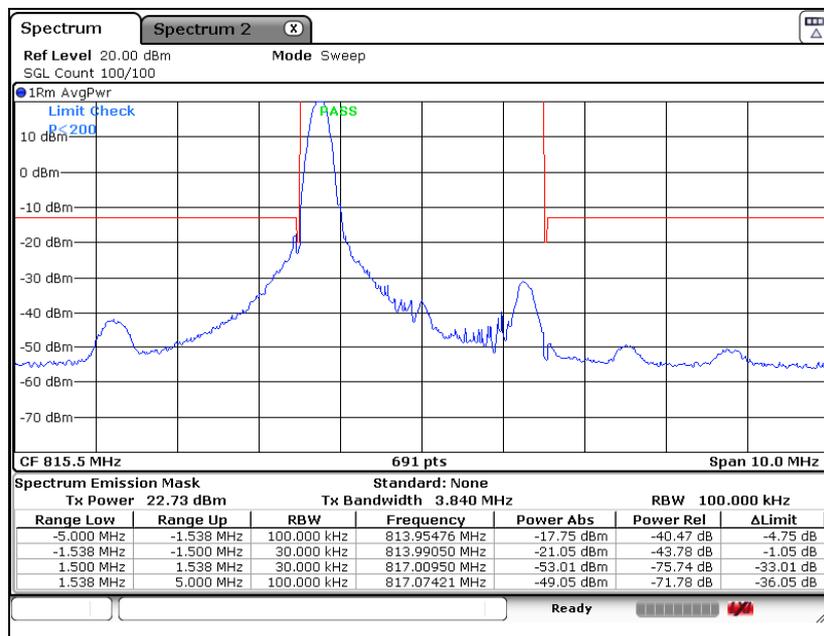

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (3 MHz - QPSK_RB 15)

High Channel

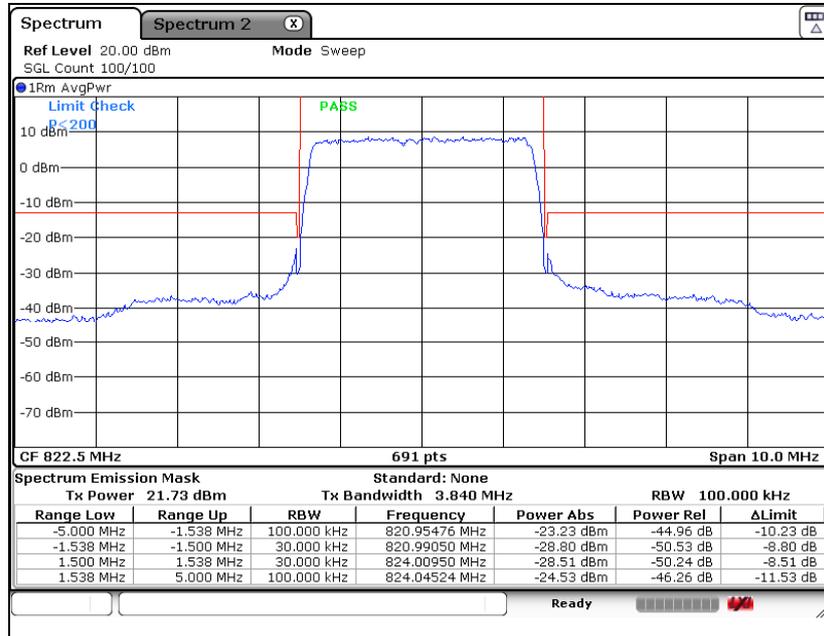

LTE band 26 (3 MHz - QPSK_RB 1)


High Channel

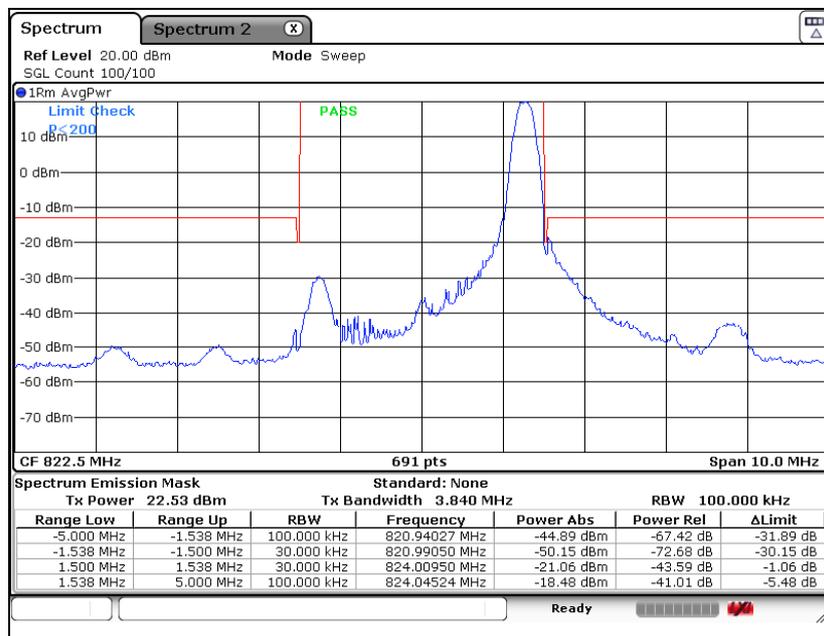

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (5 MHz - QPSK_RB 25)

Low Channel

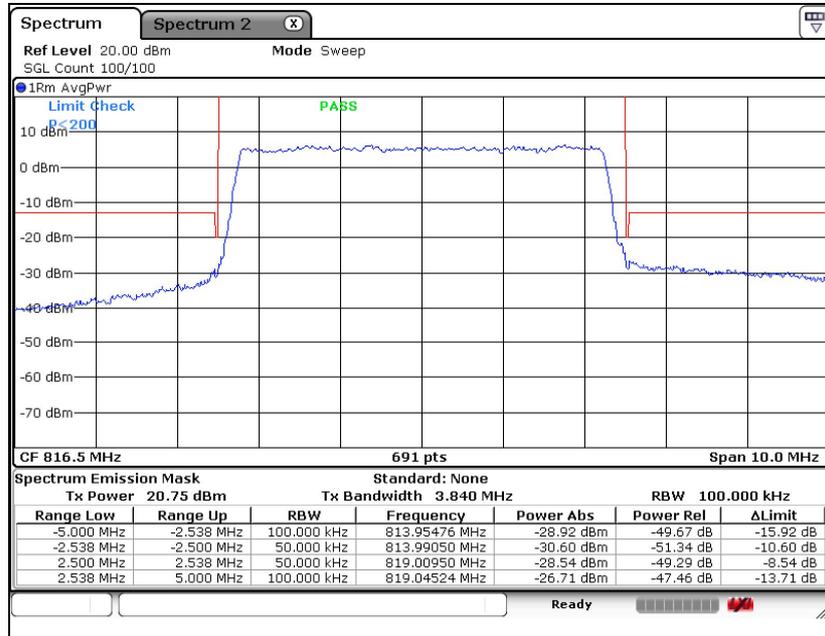

LTE band 26 (5 MHz - QPSK_RB 1)


Low Channel

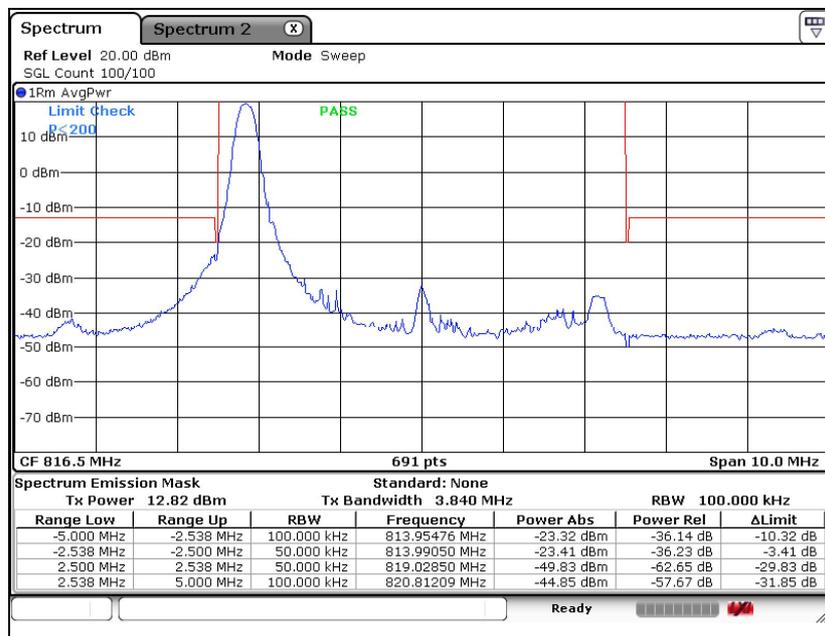

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (5 MHz - QPSK_RB 25)

High Channel

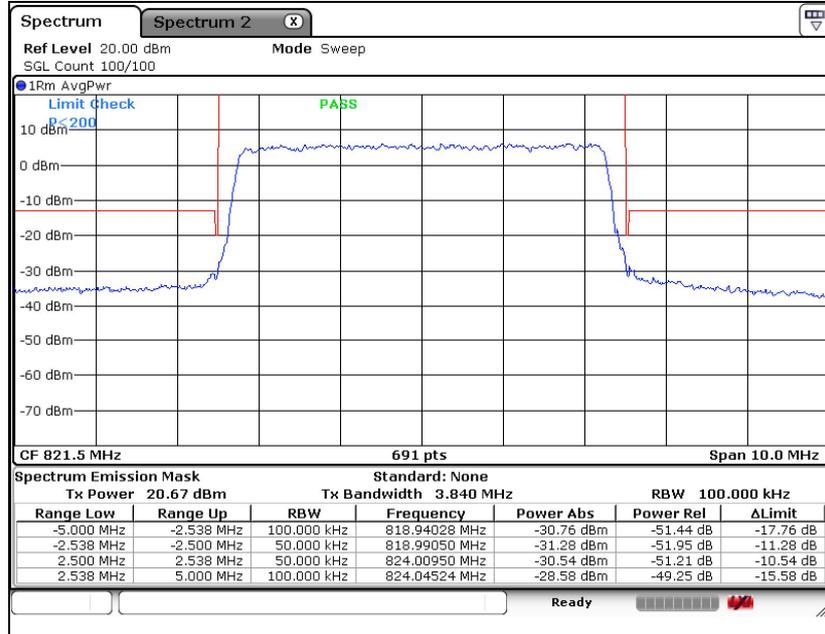

LTE band 26 (5 MHz - QPSK_RB 1)


High Channel

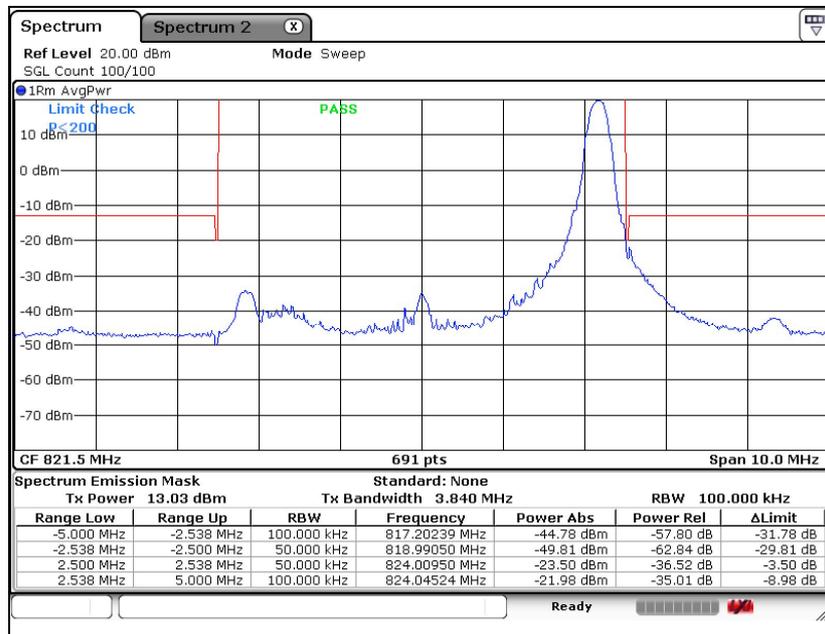

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (10 MHz - QPSK_RB 50)

Middle Channel

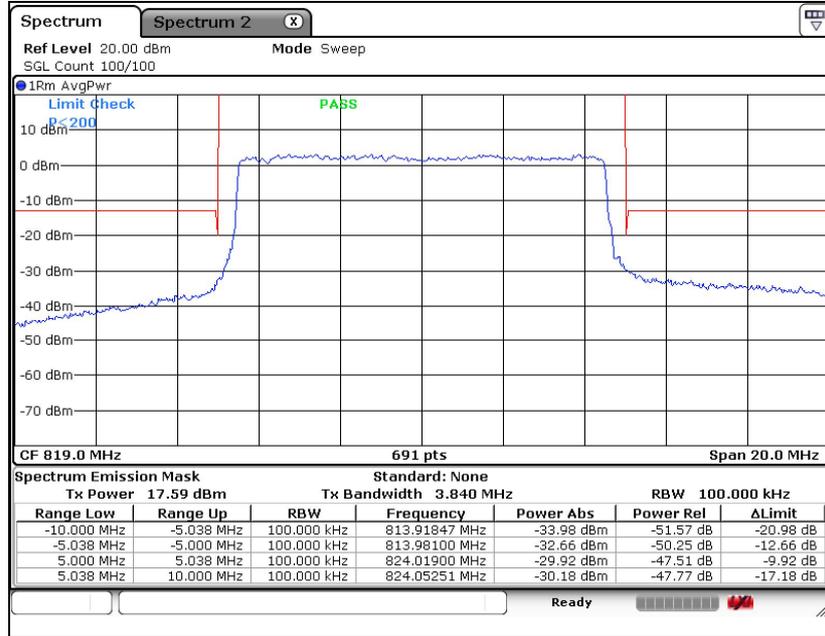

LTE band 26 (10 MHz - QPSK_RB 1 Low)


Middle Channel

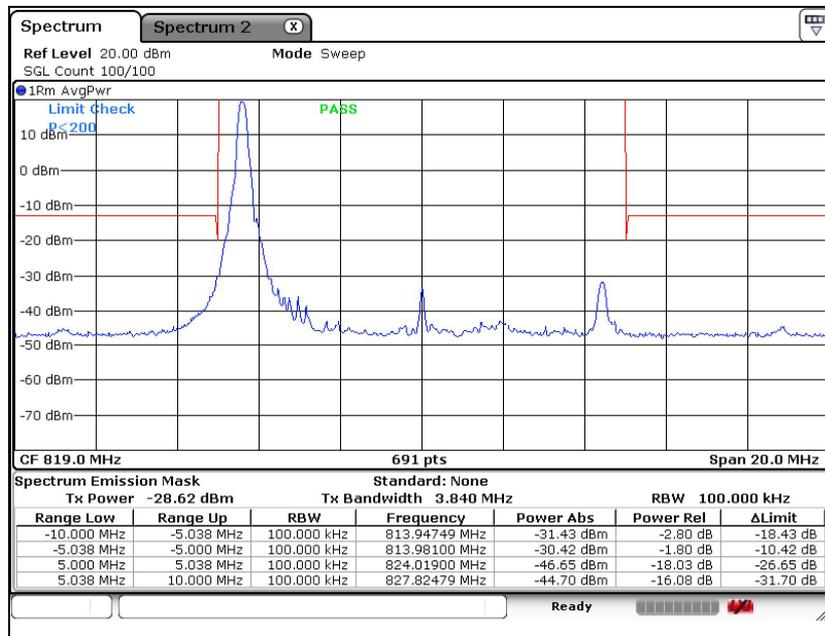

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (10 MHz - QPSK_RB 1 High)

Middle Channel

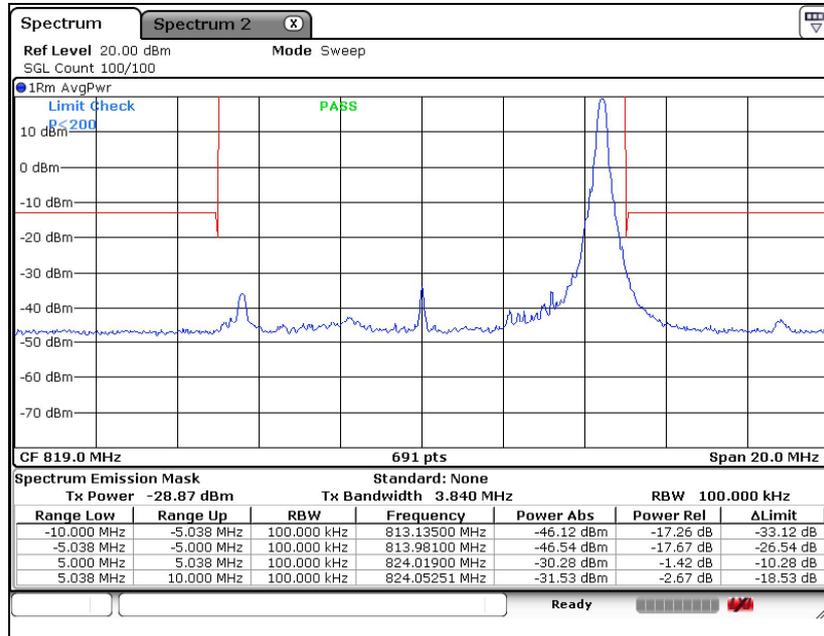

LTE band 26 (15 MHz - QPSK_RB 75)


Middle Channel

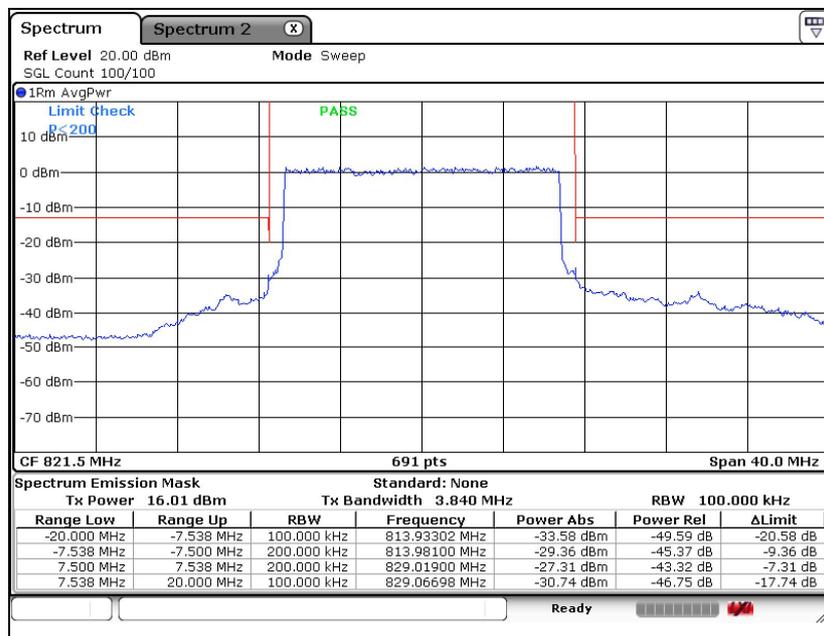

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (15 MHz - QPSK_RB 1 Low)

Middle Channel

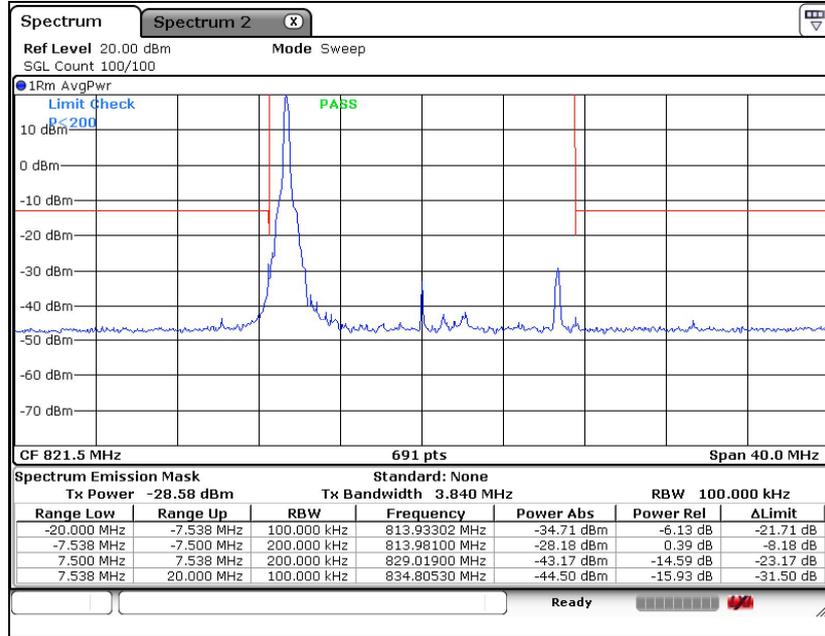

LTE band 26 (15 MHz - QPSK_RB 1 High)

Middle Channel

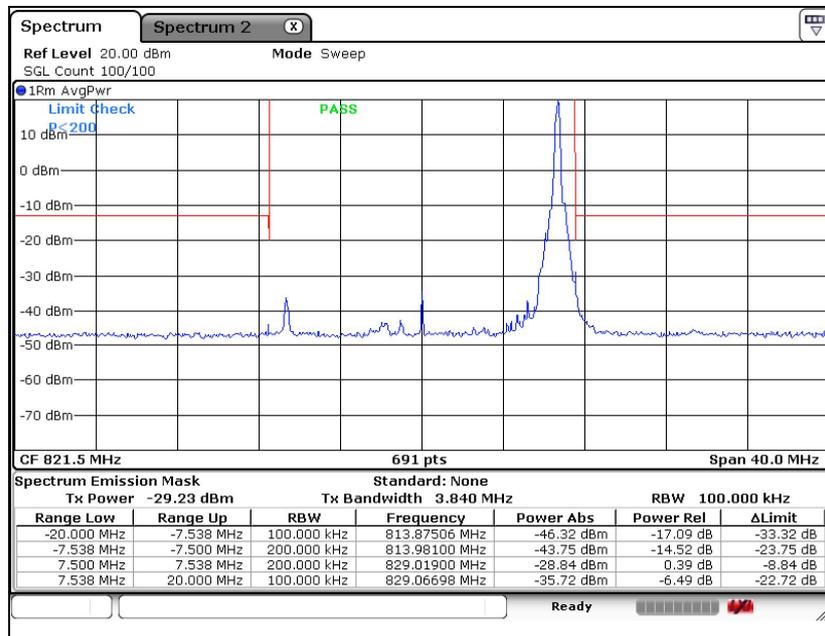

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

7. Frequency Stability

7.1. Limit


- § 2.1055 (a), § 2.1055 (d) & following:

- §90.213, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

For Mobile devices operating in the 809 to 824 MHz band at a power level 2 Watts or less, the limit specified in Table is +/- 2.5 ppm.

7.2. Test Procedure

1. Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Mobile Test Unit via feed-through attenuators.
2. The EUT was placed inside the temperature chamber.
3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from Mobile Test Unit.

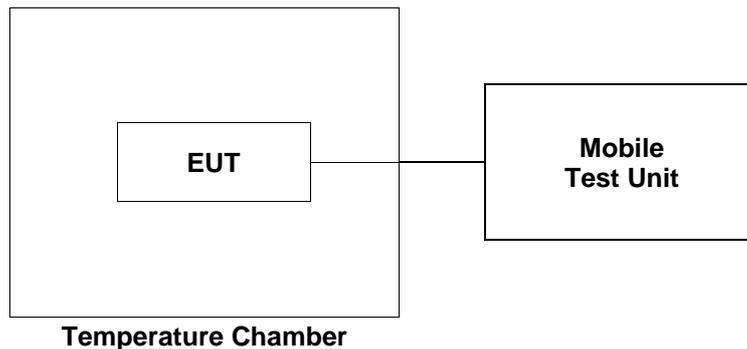

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

7.3. Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

Reference Frequency: 814.7 MHz			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (V _{dc})	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	12.0	2	0.002 5
40		-2	-0.002 5
30		-4	-0.004 9
23		3	0.003 7
10		1	0.001 2
0		-2	-0.002 5
-10		-2	-0.002 5
-20		1	0.001 2
-30		1	0.001 2
Frequency Stability versus Power Supply			
Environment Temperature (°C)	Power Supplied (V _{dc})	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
23	13.8	2	0.002 5
	10.2	-4	-0.004 9

- End of the Test Report -

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.