

TEST REPORT

FCC/ISED DTS Test for IL7SB
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2307-FI004-R1

DATE OF ISSUE
July 31, 2023

Tested by
Woong Jin Kim

Technical Manager
Jong Seok Lee

HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

<h1 style="margin: 0;">TEST REPORT</h1> <p style="margin: 0;">FCC/ISED DTS Test for IL7SB</p>	<p>REPORT NO. HCT-RF-2307-FI004-R1</p>
	<p>DATE OF ISSUE July 31, 2023</p>
	<p>Additional Model -</p>

Applicant

LG Electronics Inc.

222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do 17709, Republic of Korea

Eut Type Model Name	Silverbox RADIO ASM-RECEIVER IL7SB
FCC ID	BEJIL7SB3
IC	2703H-IL7SB3
Modulation type	CCK/DSSS/OFDM
FCC Classification	Digital Transmission System(DTS)
FCC Rule Part(s)	Part 15.247
ISED Rule Part(s)	RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 27, 2023	Initial Release
1	July 31, 2023	- Revised The typo (Page 28~30) - Added antenna gain Calculation. (Page.31)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY TEST OF RESULTS	34
9. TEST RESULT	36
9.1 DUTY CYCLE	36
9.2 6 dB BANDWIDTH & 99 % BANDWIDTH	39
9.3 OUTPUT POWER	45
9.4 POWER SPECTRAL DENSITY	51
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	54
9.6 RADIATED SPURIOUS EMISSIONS	66
9.7 RADIATED RESTRICTED BAND EDGES	77
9.8 RECEIVER SPURIOUS EMISSIONS	85
9.9 RADIATED OUTPUT POWER (E.I.R.P)	86
9.10 RADIATED POWER SPECTRAL DENSITY	89
10. LIST OF TEST EQUIPMENT	92
11. ANNEX A_ TEST SETUP PHOTO	94

1. EUT DESCRIPTION

Model	IL7SB		
Additional Model	-		
EUT Type	Silverbox RADIO ASM-RECEIVER		
Power Supply	DC 12.0 V		
Frequency Range	2 412 MHz – 2 462 MHz		
Max. RF Output Power	Peak Power	External Ant.	802.11b: 22.91 dBm 802.11g: 22.73 dBm 802.11n(HT20): 22.56 dBm
	Average Power	External Ant.	802.11b: 17.29 dBm 802.11g: 14.60 dBm 802.11n(HT20): 13.87 dBm
	Radiated Output Power (EIRP)	External Ant.	802.11b: 16.63 dBm 802.11g: 13.87 dBm 802.11n(HT20): 13.24 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n(HT20)		
Number of Channels	11 Channels		
Max Antenna Gain	External Antenna - Max Gain : 0.28 dBi		
Date(s) of Tests	June 9, 2023 ~ July 10, 2023		
EUT serial numbers	Conduction : 210F58427 Radiation : 210F58430		
PMN (Product Marketing Number)	Silverbox RADIO ASM-RECEIVER		
HVIN (Hardware Version Identification Number)	IL7SB3		
FVIN (Firmware Version Identification Number)	N/A		
HMN (Host Marketing Name)	N/A		

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of A NSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISSED, test facility was accepted dated January 26, 2021 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are used a unique coupling.
- (2) The E.U.T Complies with the requirement of § 15.203

According to RSS-GEN(Issue 5) Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

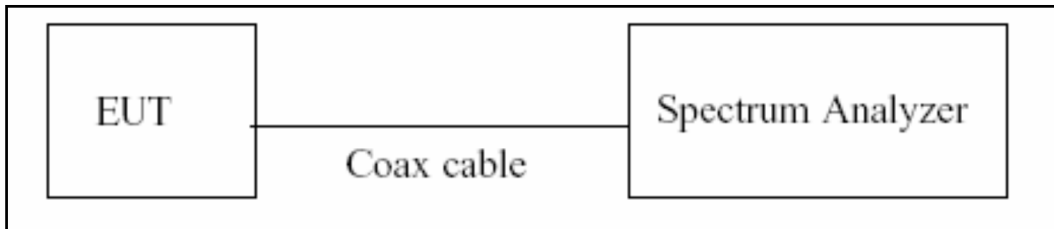

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. $(50/6.25 = 8)$

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth & 99 % Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW \cong 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10.2 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Span = 1.5 times the DTS channel bandwidth.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = peak
- 7) Trace Mode = max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.



Factors for frequency

Freq(MHz)	Factor(dB)
30	20.04
100	20.09
200	20.13
300	20.19
400	20.22
500	20.23
600	20.23
700	20.25
800	20.27
900	20.29
1000	20.31
2000	20.46
2400	20.52
2480	20.52
2500	20.52
3000	20.57
4000	20.67
5000	20.75
5150	20.77
5850	20.82
6000	20.82
7000	20.91
8000	20.98
9000	21.05
10000	21.12
11000	21.16
12000	21.24
13000	21.32
14000	21.30
15000	21.32
16000	21.37
17000	21.41
18000	21.47
19000	21.50
20000	21.56
21000	21.77
22000	21.74
23000	21.94
24000	21.77
25000	21.80
26000	21.80

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

7.6. Radiated Test

Limit

FCC

Frequency (MHz)	Field Strength (V/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength (A/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength (V/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

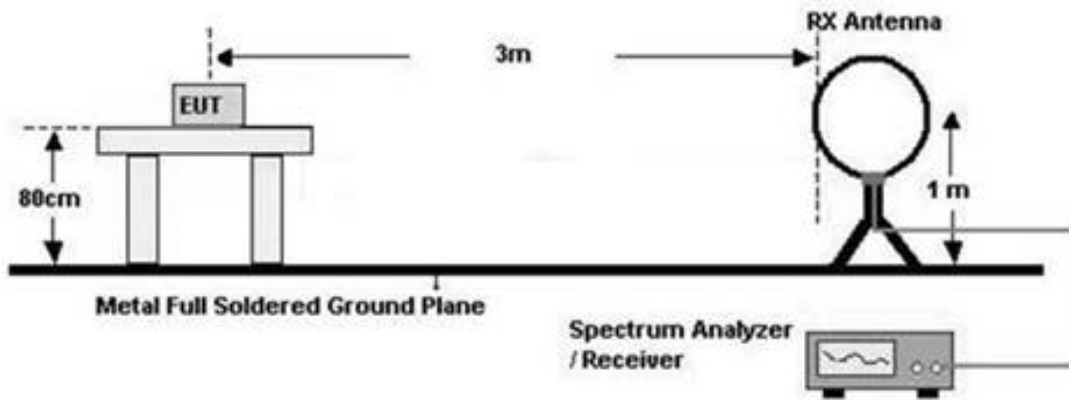

30 MHz - 1 GHz

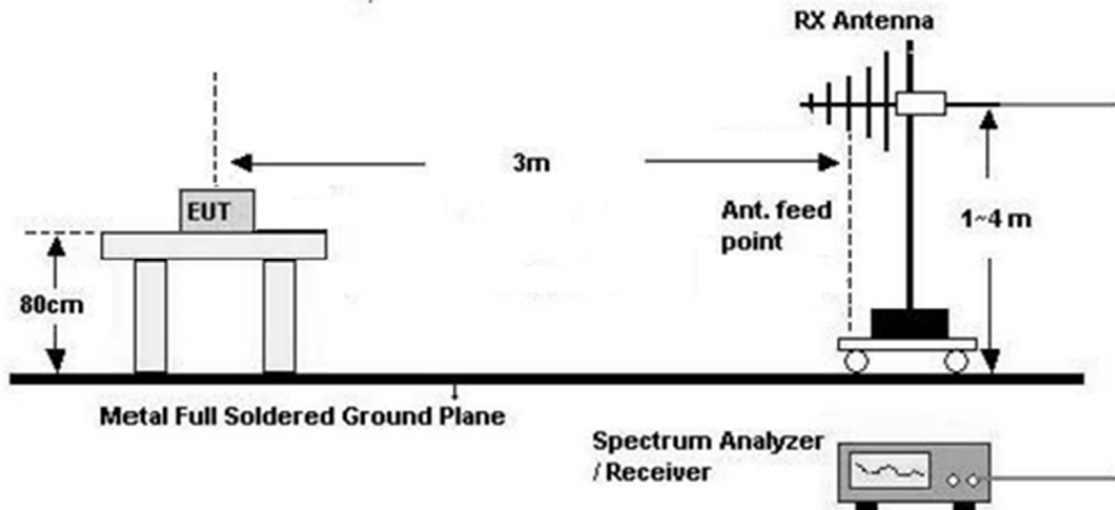

Above 1 GHz

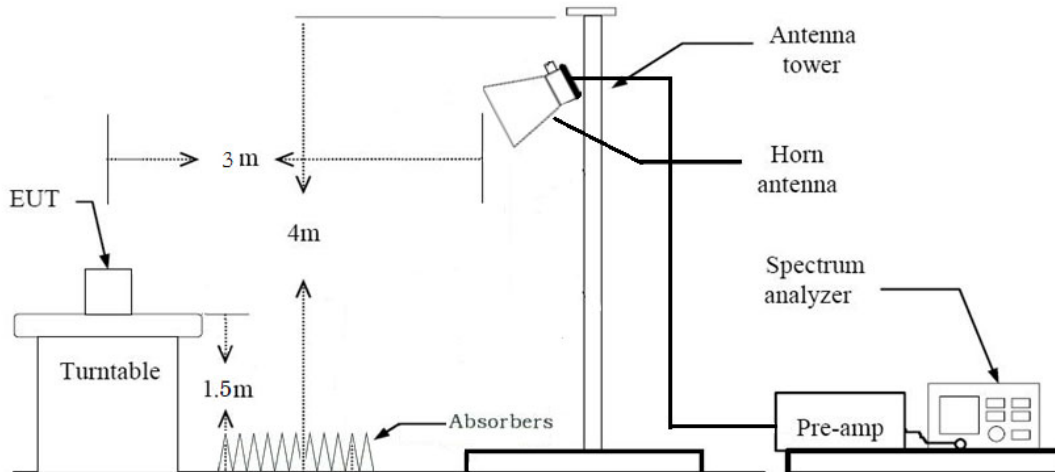

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz

※In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

9. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

10. Total(Measurement Type : Peak)

$$= \text{Measured Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
 + Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS

- Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
9. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
10. Total(Measurement Type : Peak)
- = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G)
- Total(Measurement Type : Average, Duty cycle $\geq 98\%$)
- = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G)
- Total(Measurement Type : Average, Duty cycle < 98%)
- = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
- + Duty Cycle Factor – Amp Gain(A.G)

7.7. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (V/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

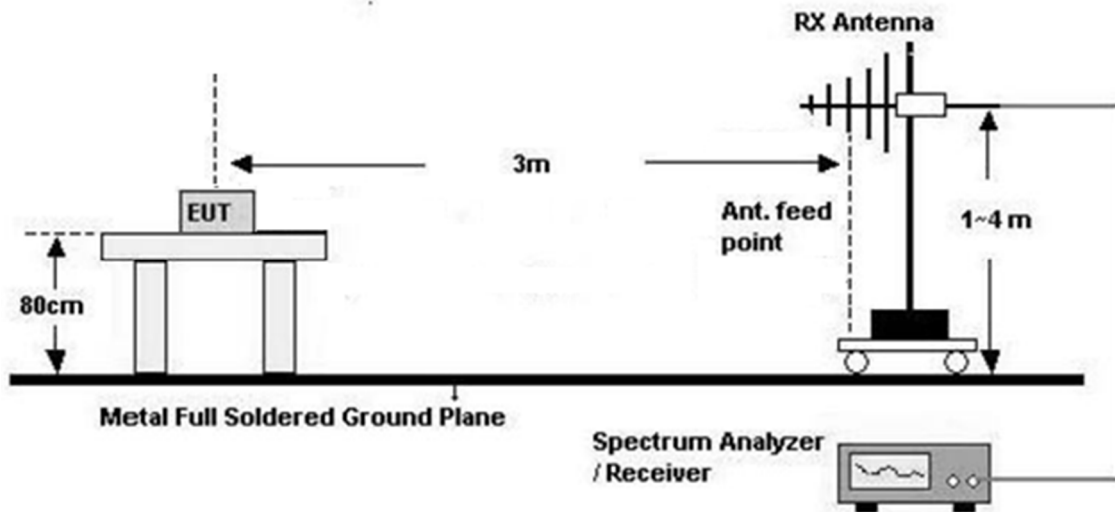

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

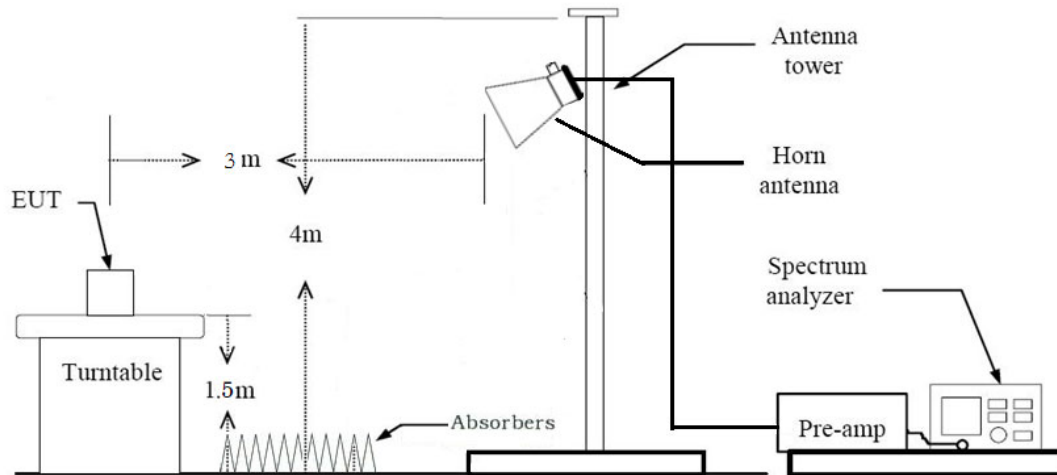


Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
8. Measurement Level only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

7.8. Radiated Output Power (E.I.R.P)

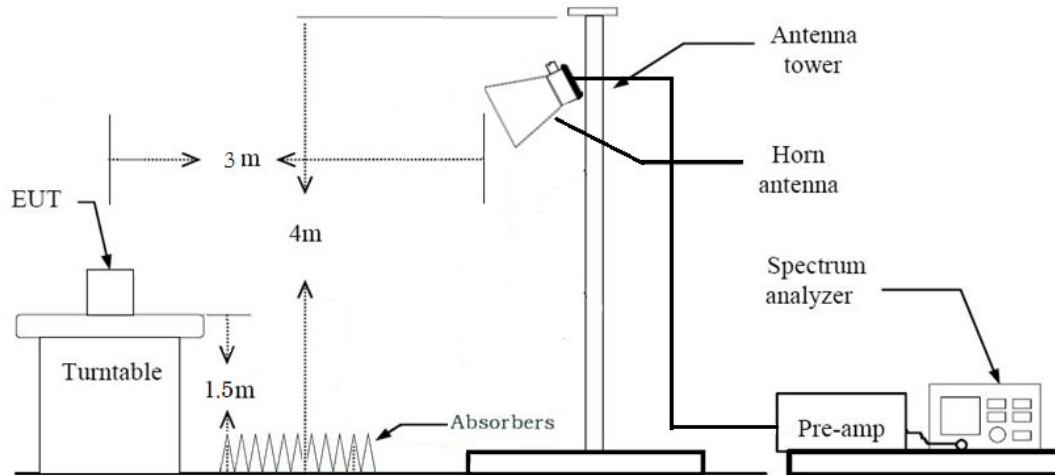

Test Procedure of Radiated Output Power (E.I.R.P)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
 - 1) Measure the duty cycle.
 - 2) Set span to encompass the entire emission bandwidth(EBW) of the signal.
 - 3) RBW = 1 MHz.
 - 4) VBW \geq 3 MHz.
 - 5) Number of points in sweep \geq 2 x span/RBW.
 - 6) Sweep time = auto.
 - 7) Detector = RMS.
 - 8) Do not use sweep triggering. Allow the sweep to "free run".
 - 9) Trace average at least 100 traces in power averaging(RMS) mode
 - 10) Integrated bandwidth = OBW
 - 11) Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.




Note:

Field Strength (dB μ V/m) = Measured Value(dB μ V/m) + Antenna Factor(A.F) + Cable Loss(C.L) – Amp
Gain(A.G)+DutyCycle Factor(D.F)

EIRP (dBm) = Field Strength (dB μ V/m) – 95.2

Max Antenna Gain = EIRP(dBm) – Conducted Output Power(dBm)

7.9. Radiated Power Spectral Density

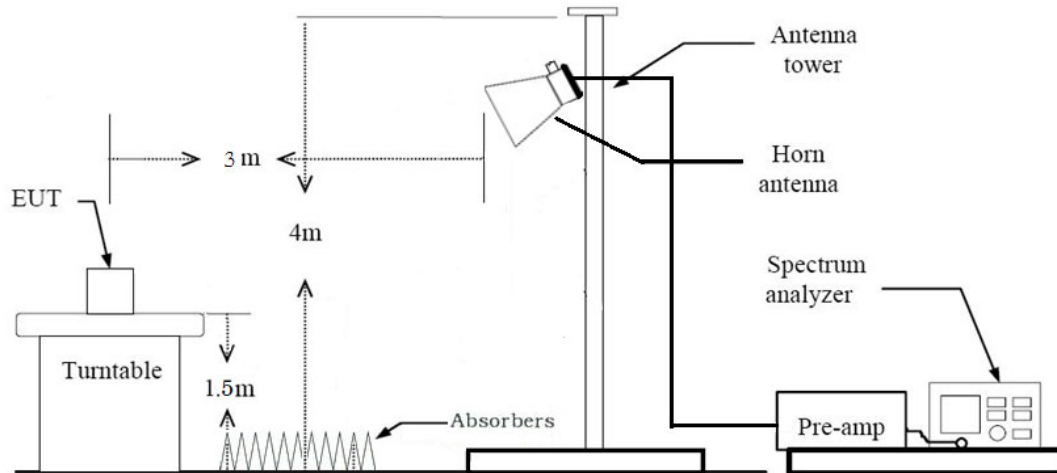

Test Procedure of Radiated Power Spectral Density

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
 - 1) Set analyzer center frequency to DTS channel center frequency.
 - 2) Set span to encompass the entire emission bandwidth(EBW) of the signal.
 - 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
 - 4) $VBW \geq 3 \times RBW$.
 - 5) Sweep = auto couple
 - 6) Detector = peak
 - 7) Trace Mode = max hold
 - 8) Allow trace to fully stabilize.
 - 9) Use the peak marker function to determine the maximum amplitude level within the RBW. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note:

Field Strength (dB μ V/m) = Measured Value(dB μ V/m) + Antenna Factor(A.F) + Cable Loss(C.L) – Amp Gain(A.G)+DutyCycle Factor(D.F)

PSD (dBm) = Field Strength (dB μ V/m) – 95.2

7.10. Antenna Gain Calculation

Test Procedure of Maximum Antenna Gain

1. Measured Radiated Output Power(EIRP) according to Section 7.8
2. Measured Conducted Output Power according to Section 7.3
3. Calculated Antenna gain according to below equation

[Antenna gain calculation]

Antenna Gain(dBi) = EIRP(dBm) – Conducted Output Power(dBm)

[Max Antenna Gain] External Antenna

Frequency	Peak Gain[dBi]
2412 MHz	0.27 dBi
2437 MHz	-0.35 dBi
2462 MHz	0.28 dBi

7.11. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
 - Mode : External Ant
3. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
4. Duty cycle factor applies only 802.11g/n (Duty cycle < 98%).
5. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n : MCS0
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

Radiated test(RSDB)

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X
3. . All of RSDB Scenario were investigated and the worst case configuration results are reported.

RSDB Scenario	2.4 GHz WiFi	5 GHz WiFi	Bluetooth
2.4 GHz WiFi + 5 GHz WiFi	<u>on</u>	<u>on</u>	
2.4 GHz WiFi + Bluetooth	<u>on</u>		<u>on</u>

4. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

Description	Bluetooth Emission	2.4 GHz Emission
Antenna	WIFI/BT	WIFI
Channel	78	1
Data Rate	1 Mbps	1Mbps
Mode	$\pi/4$ QPSK: 2-DH5	802.11b

Description	2.4 GHz Emission	5 GHz Emission
Antenna	WIFI	WIFI/BT
Channel	1	165
Data Rate	1Mbps	6 Mbps
Mode	802.11b	802.11a

Note : WLAN 5 GHz, Bluetooth RSDB Data refer to [UNII, BT] Test Report.

AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

Conducted test

1. The EUT was configured with data rate of highest power.



8. SUMMARY TEST OF RESULTS

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		N/A (#Note)
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS
Radiated Output Power (E.I.R.P)	-	-		-
Radiated Power Spectral Density	-	-		-

#Note: Not Tested.

ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		N/A (#Note)
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6		PASS
Radiated Output Power (E.I.R.P)	-	-		-
Radiated Power Spectral Density	-	-		-

#Note: Not Tested.

9. TEST RESULT

9.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.623	8.635	0.999	0.006
	2	4.408	4.420	0.997	0.012
	5.5	1.725	1.736	0.994	0.028
	11	0.959	0.971	0.988	0.052
802.11g	6	1.431	1.449	0.988	0.054
	9	0.961	0.978	0.983	0.077
	12	0.728	0.746	0.977	0.103
	18	0.491	0.509	0.966	0.151
	24	0.376	0.393	0.956	0.194
	36	0.256	0.273	0.937	0.282
	48	0.200	0.217	0.920	0.362
	54	0.180	0.197	0.911	0.406
802.11n (HT20)	6.5 (MCS0)	1.342	1.359	0.987	0.055
	13 (MCS1)	0.688	0.706	0.975	0.108
	19.5 (MCS2)	0.472	0.489	0.964	0.159
	26 (MCS3)	0.364	0.381	0.954	0.205
	39 (MCS4)	0.256	0.273	0.936	0.286
	52 (MCS5)	0.200	0.217	0.921	0.358
	58.5 (MCS6)	0.184	0.201	0.915	0.388
	65 (MCS7)	0.168	0.185	0.908	0.420


Note :

Duty Cycle Factor = 10log(1/Duty Cycle). where, Duty Cycle = T_{on} / T_{total}




Test Plots

Duty cycle plot (802.11b(1 Mbps))

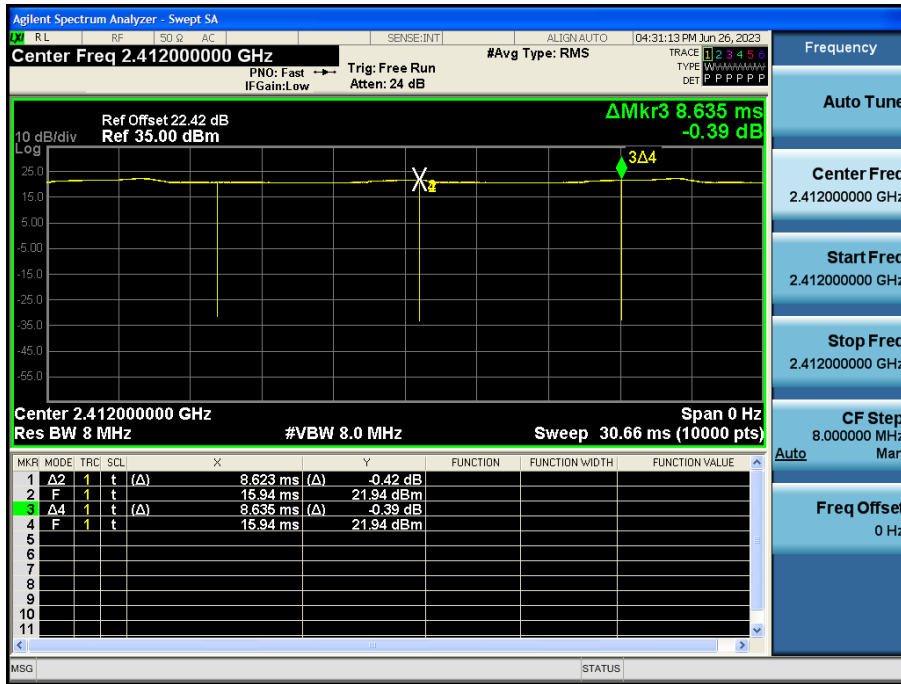


Duty cycle plot (802.11g(6 Mbps))

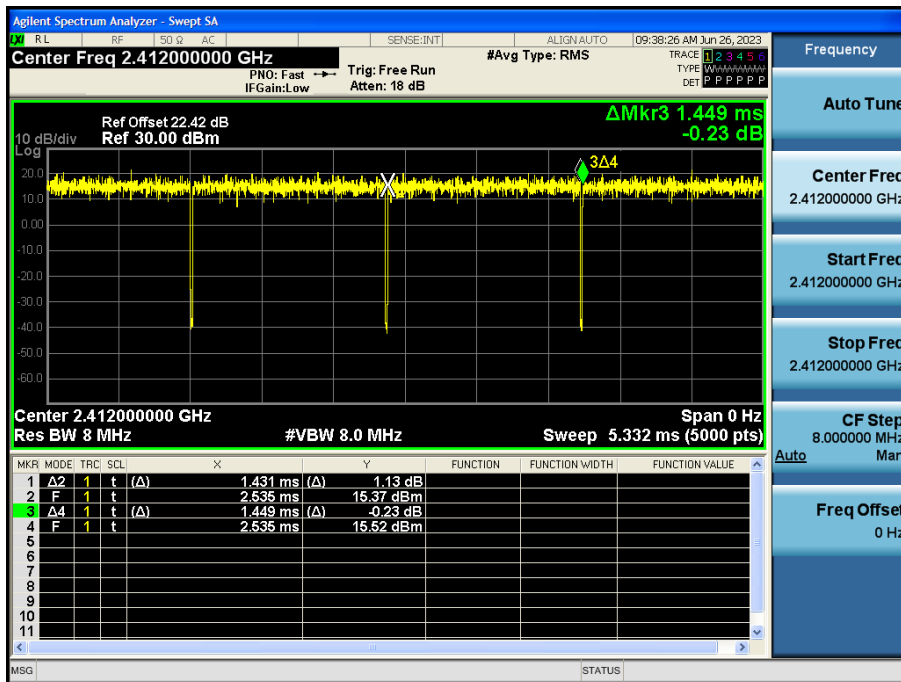



Duty cycle plot (802.11n(HT20)(MCS0))

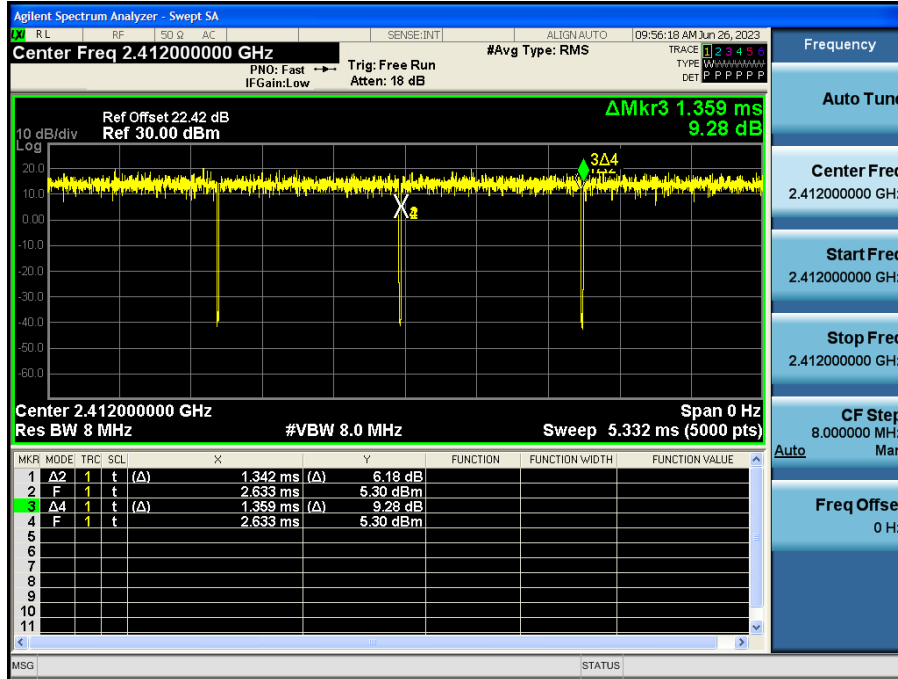

Note:

In order to simplify the report, attached plots were only the lowest data rate.

9.2 6 dB BANDWIDTH & 99 % BANDWIDTH

FCC


802.11b Mode		6 dB Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	10.10	> 0.5
2437	6	10.10	> 0.5
2462	11	10.10	> 0.5

802.11g Mode		6 dB Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.39	> 0.5
2417	2	16.40	> 0.5
2437	6	16.40	> 0.5
2457	10	16.41	> 0.5
2462	11	16.39	> 0.5


802.11n(HT20) Mode		6 dB Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.58	> 0.5
2417	2	17.58	> 0.5
2437	6	17.59	> 0.5
2457	10	17.57	> 0.5
2462	11	17.59	> 0.5

Test Plots


6 dB Bandwidth plot (802.11b-CH 1)

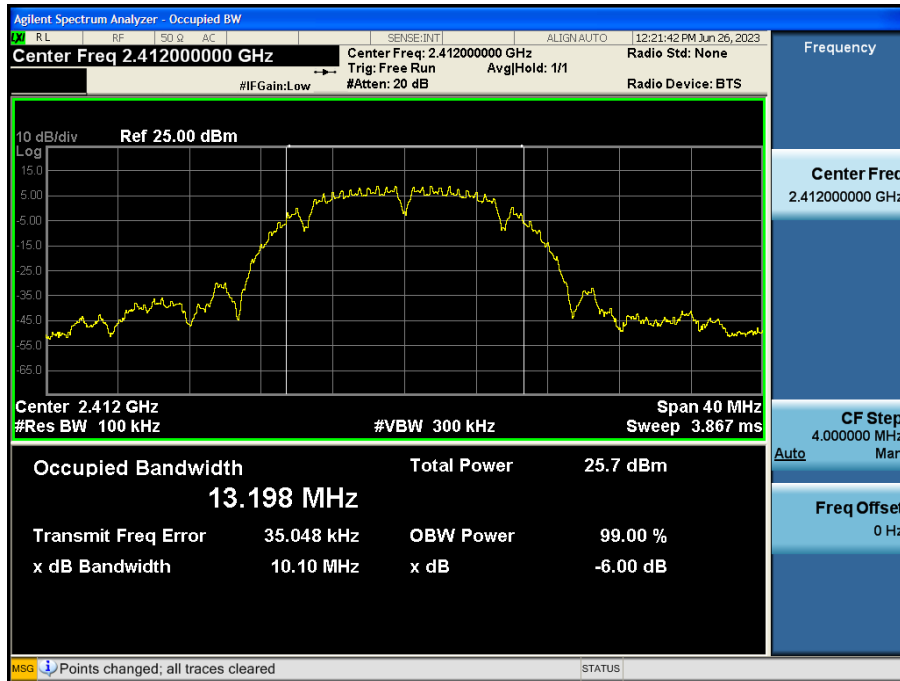

6 dB Bandwidth plot (802.11g-CH 1)

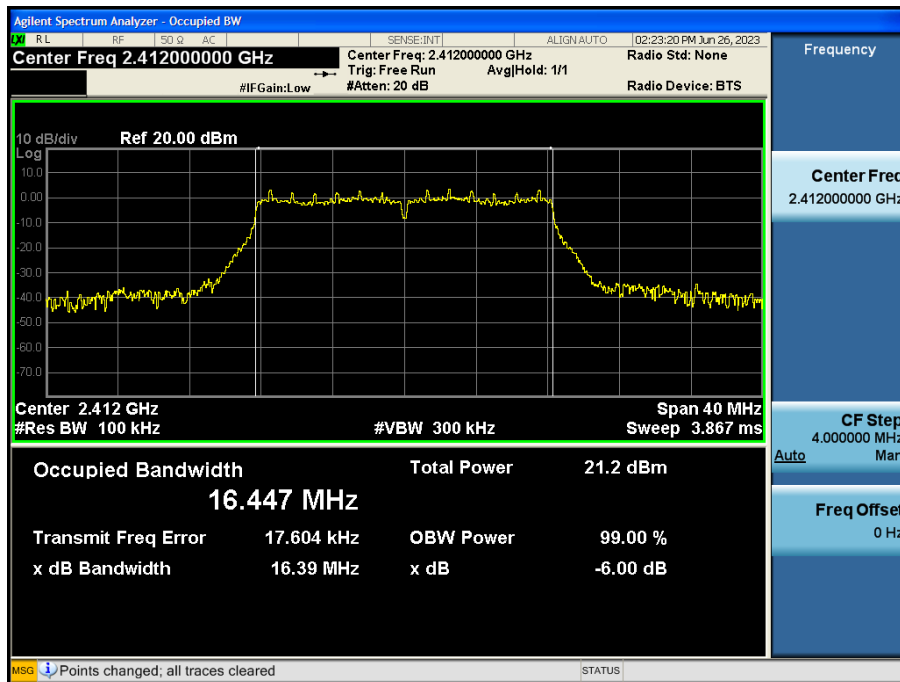

6 dB Bandwidth plot (802.11n_HT20-CH 10)

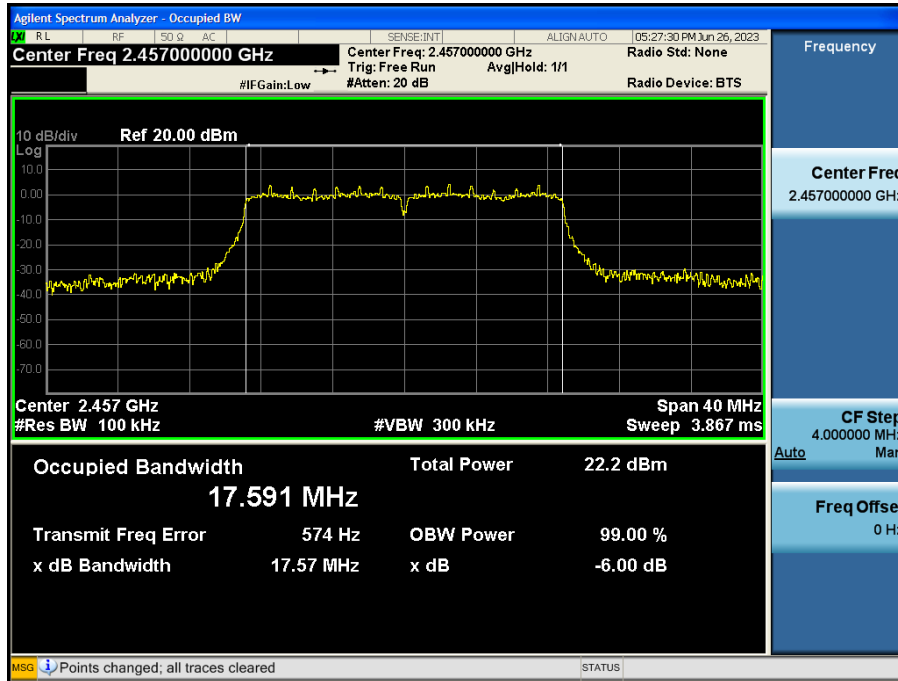

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.



99% Bandwidth Measurements(ISED)


802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.266	N/A
2437	6	13.317	N/A
2462	11	13.291	N/A

802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.954	N/A
2417	2	16.993	N/A
2437	6	17.086	N/A
2457	10	16.966	N/A
2462	11	16.974	N/A


802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.774	N/A
2417	2	17.781	N/A
2437	6	17.889	N/A
2457	10	17.831	N/A
2462	11	17.801	N/A

▣ Test Plots


99% Bandwidth plot (802.11b-CH 6)

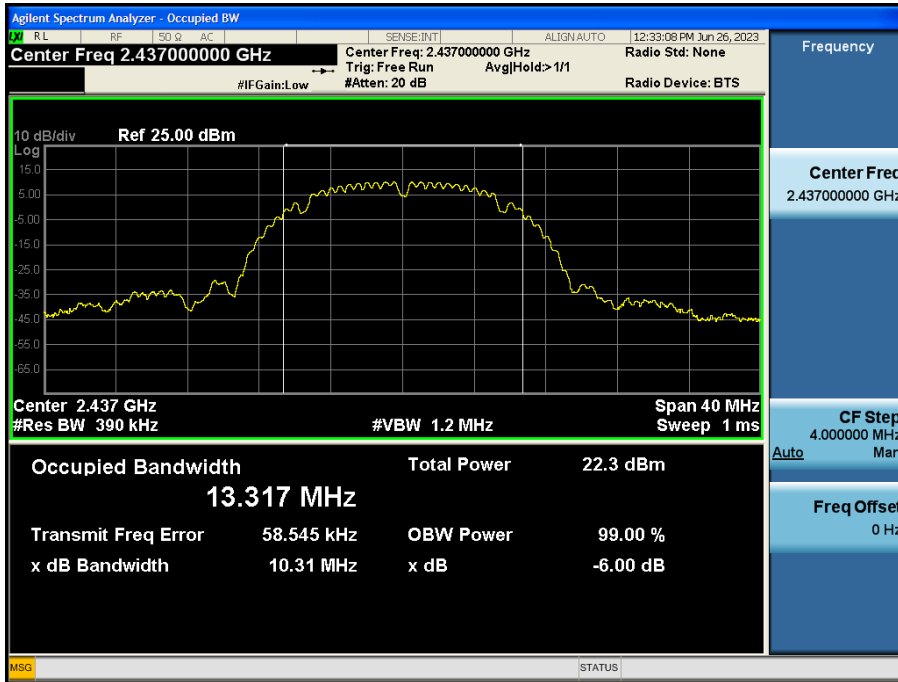

99% Bandwidth plot (802.11g-CH 6)

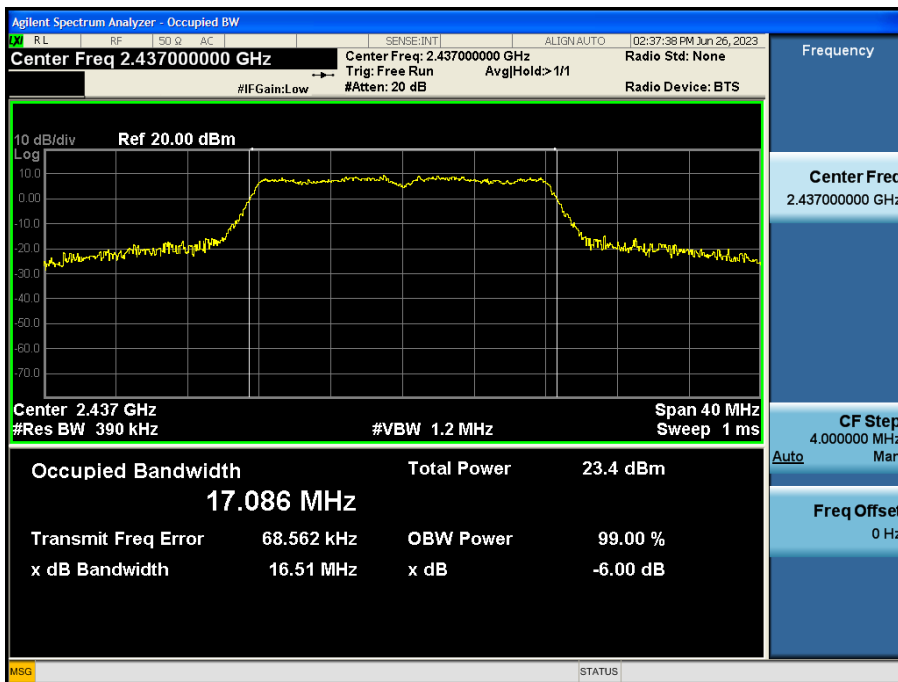

99% Bandwidth plot (802.11n_HT20-CH 6)

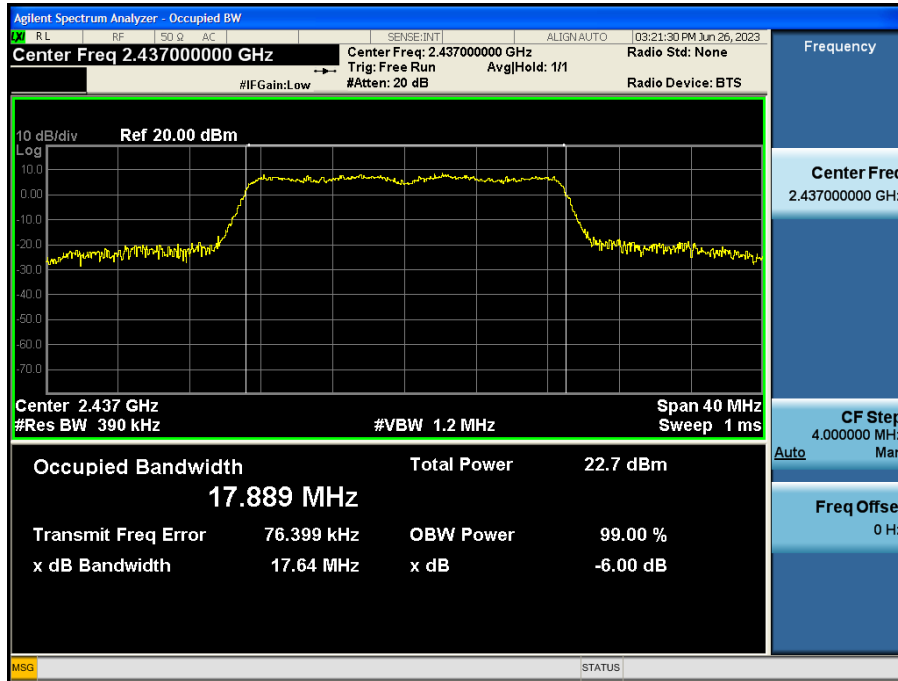

Note:

In order to simplify the report, attached plots were only the widest 99% Bandwidth channel.

9.3 OUTPUT POWER

Peak Power

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	18.90	30.00
		2	19.52	30.00
		5.5	21.72	30.00
		11	22.42	30.00
2437	6	1	19.72	30.00
		2	20.14	30.00
		5.5	22.18	30.00
		11	22.91	30.00
2462	11	1	18.91	30.00
		2	19.94	30.00
		5.5	20.51	30.00
		11	22.13	30.00



802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	19.81	30.00
		9	20.06	30.00
		12	19.87	30.00
		18	19.79	30.00
		24	20.37	30.00
		36	21.03	30.00
		48	20.47	30.00
		54	20.43	30.00
2417	2	6	20.90	30.00
		9	21.10	30.00
		12	21.00	30.00
		18	21.03	30.00
		24	21.61	30.00
		36	21.61	30.00
		48	21.62	30.00
		54	21.59	30.00
2437	6	6	22.19	30.00
		9	22.29	30.00
		12	22.14	30.00
		18	22.19	30.00
		24	22.60	30.00
		36	22.66	30.00
		48	22.63	30.00
		54	22.73	30.00
2457	10	6	20.51	30.00
		9	20.70	30.00
		12	20.55	30.00
		18	20.56	30.00
		24	21.38	30.00
		36	21.06	30.00
		48	21.64	30.00
		54	21.13	30.00
2462	11	6	19.74	30.00
		9	19.77	30.00
		12	19.61	30.00
		18	19.77	30.00
		24	20.82	30.00
		36	20.18	30.00
		48	20.07	30.00
		54	20.18	30.00



802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	19.13	30.00
		1	19.12	30.00
		2	19.26	30.00
		3	19.95	30.00
		4	19.74	30.00
		5	19.92	30.00
		6	19.78	30.00
		7	19.78	30.00
2417	2	0	20.12	30.00
		1	20.05	30.00
		2	20.80	30.00
		3	20.82	30.00
		4	21.06	30.00
		5	20.88	30.00
		6	20.82	30.00
		7	20.65	30.00
2437	6	0	21.41	30.00
		1	21.50	30.00
		2	21.58	30.00
		3	22.16	30.00
		4	22.56	30.00
		5	22.03	30.00
		6	22.01	30.00
		7	22.09	30.00
2457	10	0	20.89	30.00
		1	20.81	30.00
		2	20.98	30.00
		3	21.53	30.00
		4	21.34	30.00
		5	21.46	30.00
		6	21.42	30.00
		7	21.37	30.00
2462	11	0	18.97	30.00
		1	18.91	30.00
		2	18.97	30.00
		3	19.29	30.00
		4	19.37	30.00
		5	19.63	30.00
		6	19.47	30.00
		7	19.41	30.00



Average Power

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	16.73	0.006	16.74	30.00
		2	16.67	0.012	16.68	30.00
		5.5	16.72	0.028	16.75	30.00
		11	16.60	0.052	16.65	30.00
2437	6	1	17.06	0.006	17.06	30.00
		2	17.28	0.012	17.29	30.00
		5.5	17.13	0.028	17.16	30.00
		11	17.02	0.052	17.07	30.00
2462	11	1	16.43	0.006	16.44	30.00
		2	16.50	0.012	16.51	30.00
		5.5	16.24	0.028	16.27	30.00
		11	16.35	0.052	16.41	30.00



802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	12.19	0.054	12.24	30.00
		9	12.27	0.077	12.35	30.00
		12	12.18	0.103	12.28	30.00
		18	12.10	0.151	12.25	30.00
		24	12.07	0.194	12.27	30.00
		36	11.98	0.282	12.26	30.00
		48	12.02	0.362	12.38	30.00
		54	11.84	0.406	12.25	30.00
2417	2	6	13.09	0.054	13.14	30.00
		9	13.26	0.077	13.33	30.00
		12	13.29	0.103	13.39	30.00
		18	13.25	0.151	13.41	30.00
		24	13.25	0.194	13.44	30.00
		36	13.26	0.282	13.54	30.00
		48	13.23	0.362	13.60	30.00
		54	12.94	0.406	13.34	30.00
2437	6	6	14.40	0.054	14.45	30.00
		9	14.46	0.077	14.53	30.00
		12	14.45	0.103	14.55	30.00
		18	14.42	0.151	14.57	30.00
		24	14.34	0.194	14.54	30.00
		36	14.24	0.282	14.52	30.00
		48	14.24	0.362	14.60	30.00
		54	14.17	0.406	14.57	30.00
2457	10	6	12.69	0.054	12.75	30.00
		9	12.84	0.077	12.91	30.00
		12	12.82	0.103	12.92	30.00
		18	12.84	0.151	13.00	30.00
		24	12.81	0.194	13.00	30.00
		36	12.64	0.282	12.92	30.00
		48	12.54	0.362	12.90	30.00
		54	12.48	0.406	12.89	30.00
2462	11	6	11.97	0.054	12.03	30.00
		9	11.95	0.077	12.03	30.00
		12	11.97	0.103	12.07	30.00
		18	11.98	0.151	12.13	30.00
		24	11.96	0.194	12.15	30.00
		36	11.77	0.282	12.05	30.00
		48	11.63	0.362	12.00	30.00
		54	11.62	0.406	12.02	30.00

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	11.29	0.055	11.35	30.00
		1	11.29	0.108	11.40	30.00
		2	11.31	0.159	11.47	30.00
		3	11.34	0.205	11.55	30.00
		4	11.32	0.286	11.60	30.00
		5	11.24	0.358	11.60	30.00
		6	11.14	0.388	11.53	30.00
		7	11.11	0.420	11.53	30.00
2417	2	0	12.30	0.055	12.35	30.00
		1	12.24	0.108	12.35	30.00
		2	12.25	0.159	12.41	30.00
		3	12.33	0.205	12.54	30.00
		4	12.34	0.286	12.63	30.00
		5	12.24	0.358	12.60	30.00
		6	12.18	0.388	12.56	30.00
		7	12.08	0.420	12.50	30.00
2437	6	0	13.53	0.055	13.59	30.00
		1	13.63	0.108	13.74	30.00
		2	13.64	0.159	13.80	30.00
		3	13.60	0.205	13.80	30.00
		4	13.47	0.286	13.75	30.00
		5	13.38	0.358	13.74	30.00
		6	13.35	0.388	13.73	30.00
		7	13.45	0.420	13.87	30.00
2457	10	0	13.02	0.055	13.07	30.00
		1	12.96	0.108	13.07	30.00
		2	12.98	0.159	13.14	30.00
		3	12.95	0.205	13.16	30.00
		4	12.85	0.286	13.14	30.00
		5	12.80	0.358	13.16	30.00
		6	12.77	0.388	13.15	30.00
		7	12.75	0.420	13.17	30.00
2462	11	0	11.11	0.055	11.17	30.00
		1	11.09	0.108	11.20	30.00
		2	11.06	0.159	11.22	30.00
		3	10.98	0.205	11.18	30.00
		4	10.90	0.286	11.19	30.00
		5	10.82	0.358	11.18	30.00
		6	10.77	0.388	11.16	30.00
		7	10.76	0.420	11.18	30.00

9.4 POWER SPECTRAL DENSITY


Mode	Frequency (MHz)	Channel No.	Test Result	
			Max. PSD	Limit (dBm/3 kHz)
802.11b	2412	1	2.032	8
	2437	6	5.411	
	2462	11	-0.216	
802.11g	2412	1	-13.129	
	2417	2	-12.618	
	2437	6	-10.245	
	2457	10	-12.874	
	2462	11	-12.462	
802.11n(HT20)	2412	1	-13.781	
	2417	2	-12.480	
	2437	6	-11.070	
	2457	10	-11.470	
	2462	11	-14.797	

Note :


1. The measured PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

▣ Test Plots


Power Spectral Density (802.11b-CH 6)

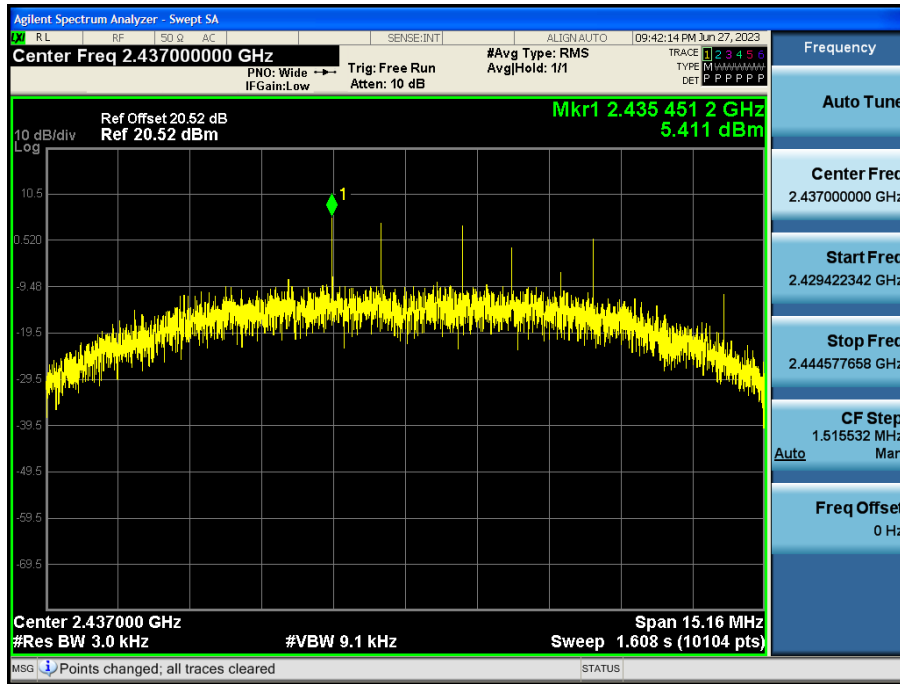

Power Spectral Density (802.11g-CH 6)

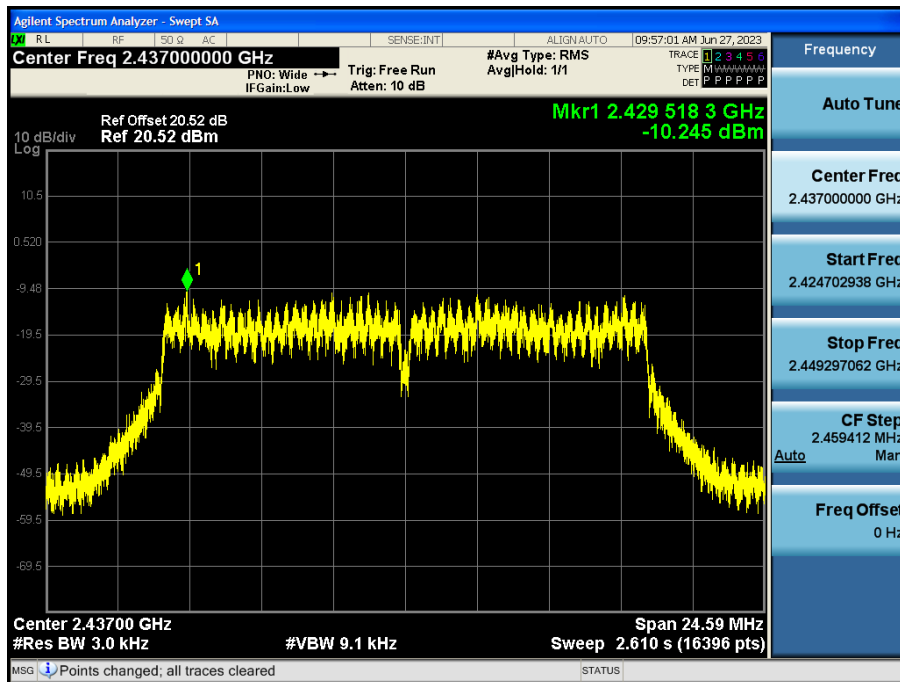

Power Spectral Density (802.11n_HT20 -CH 6)

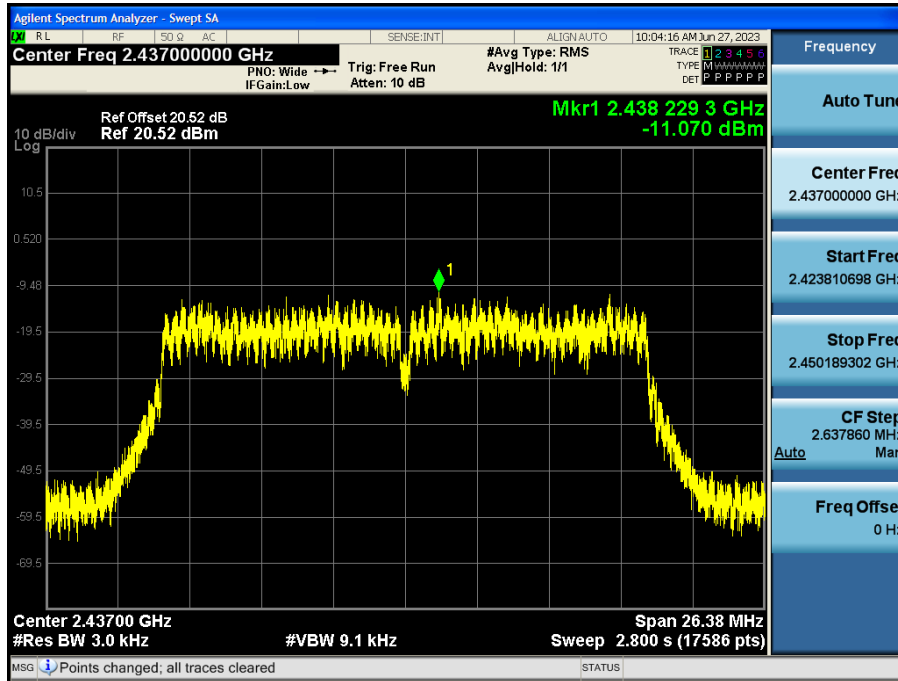

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Note :

In order to simplify the report, attached plots were only the worst case channel and data rate.

☐ Test Plots(BandEdge)

Band Edge (802.11b-CH1)




Band Edge (802.11b-CH11)







Band Edge (802.11g_Ch.1)

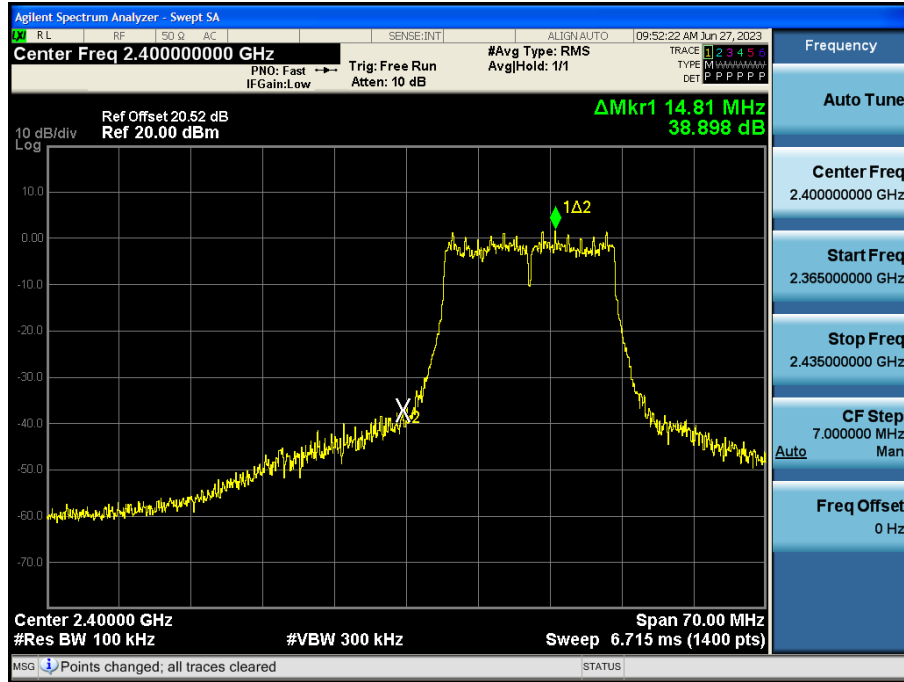


Band Edge (802.11g_Ch.2)

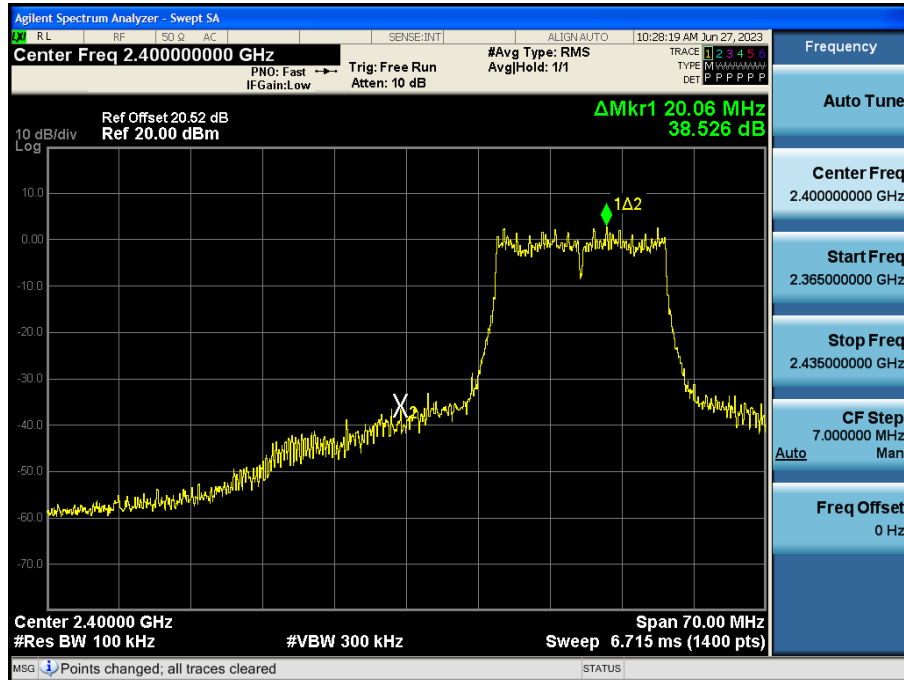


Band Edge (802.11g_Ch.10)

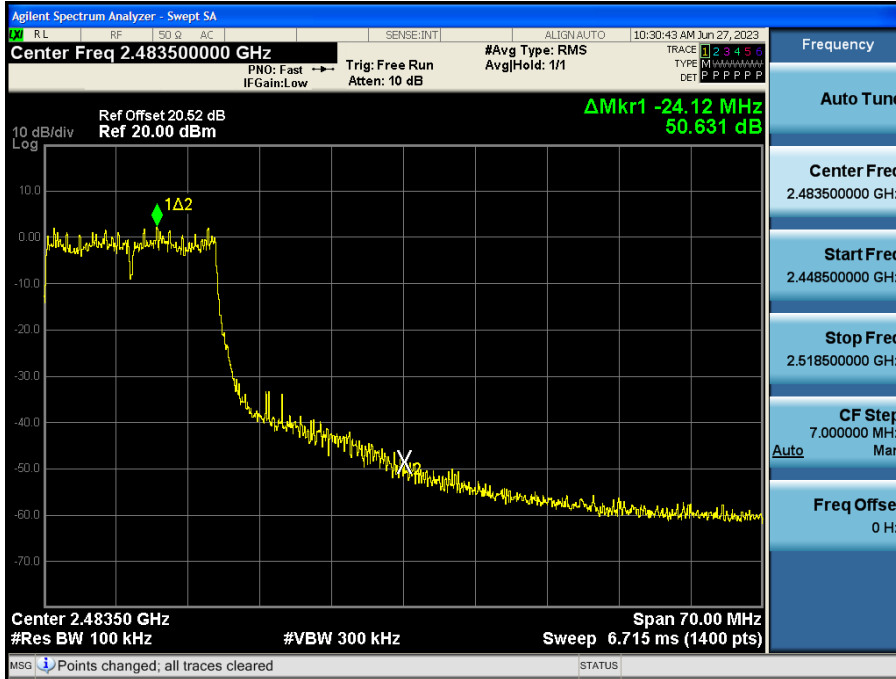


Band Edge (802.11g_Ch.11)

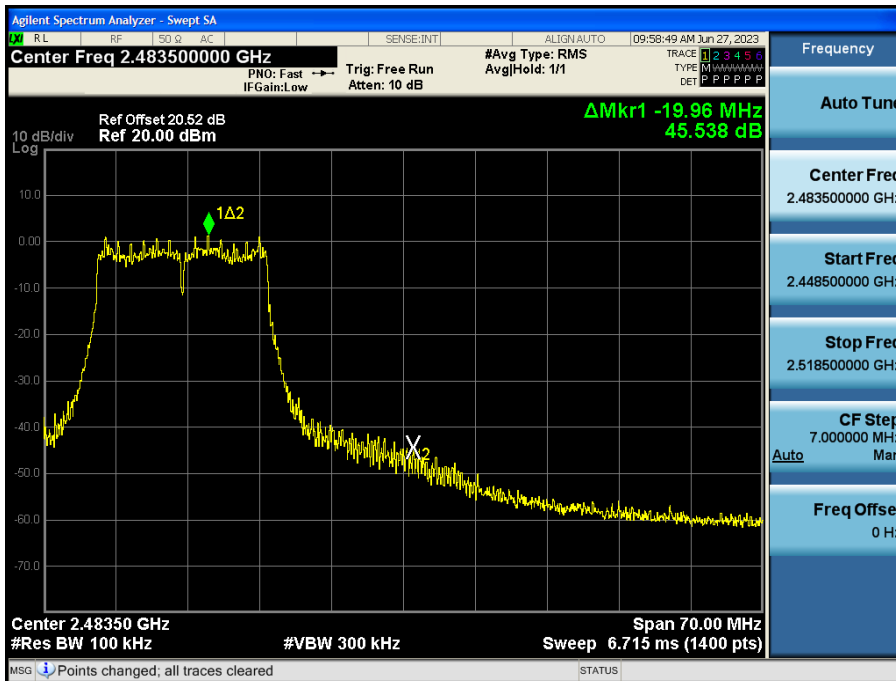

Band Edge (802.11n_HT20_Ch.1)

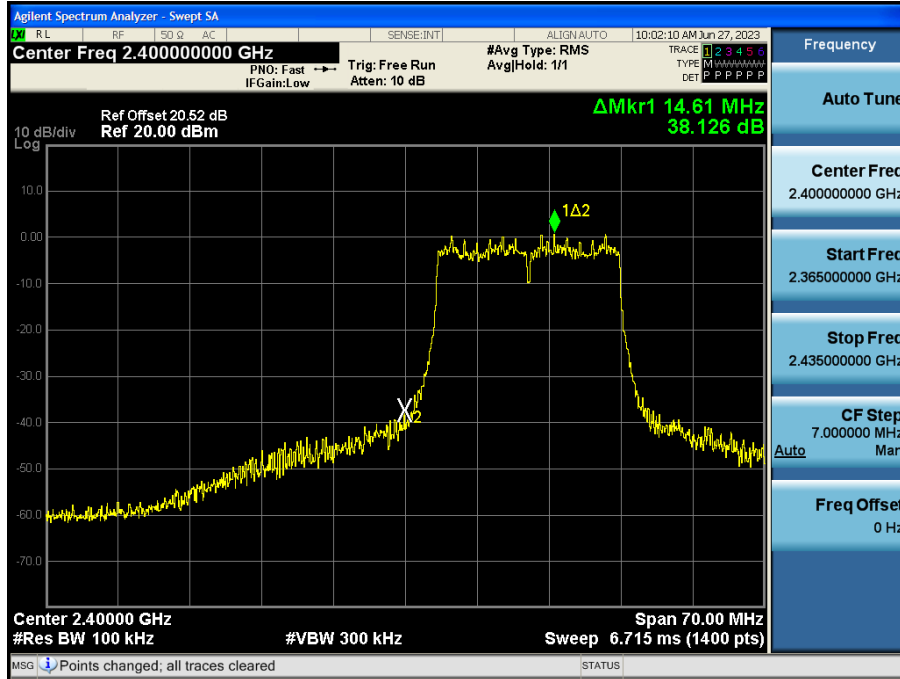


Band Edge (802.11n_HT20_Ch.2)

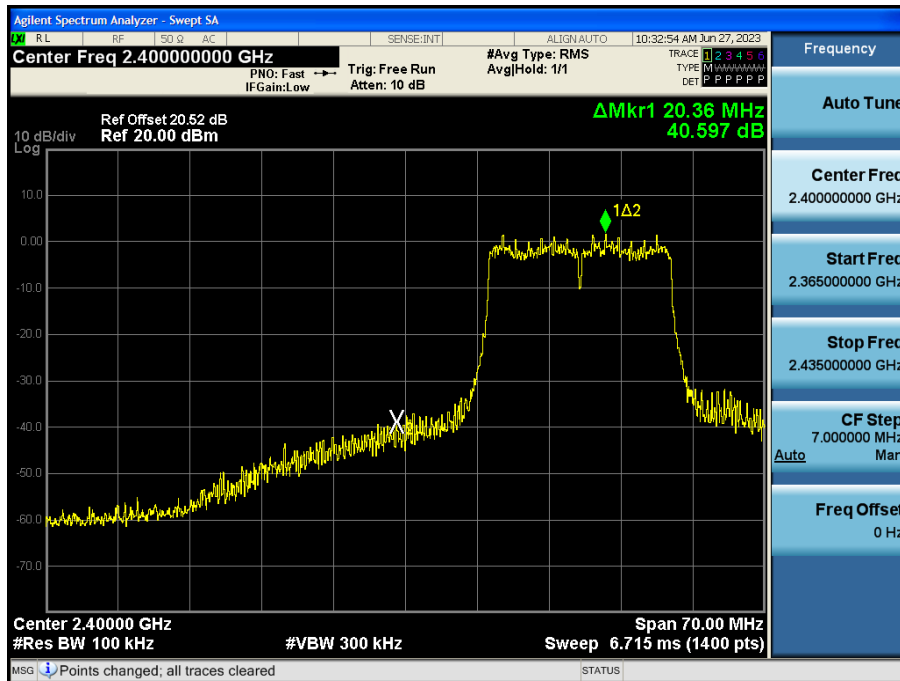




Band Edge (802.11n_HT20_Ch.10)

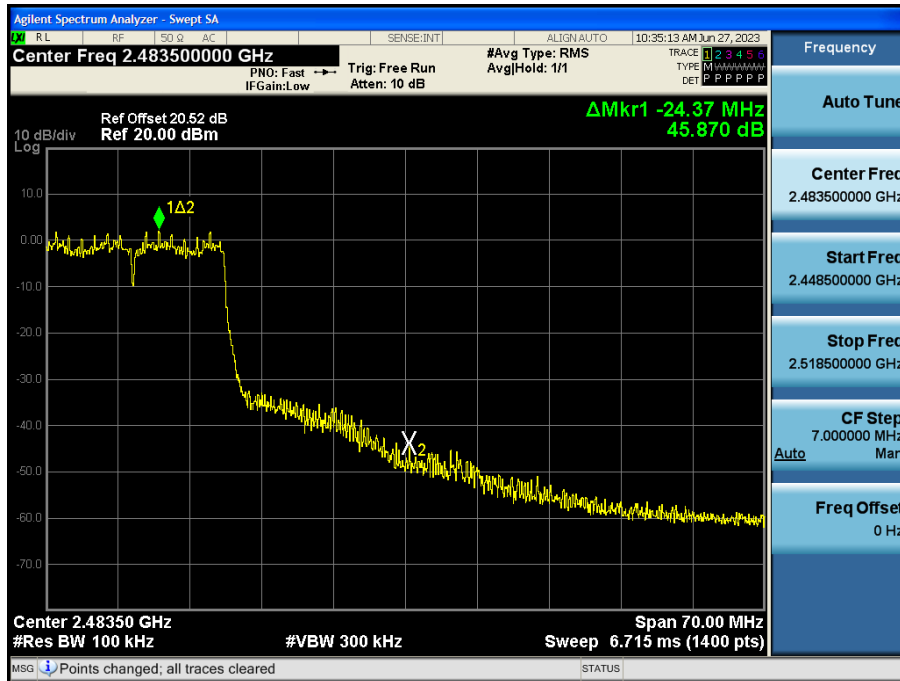

Band Edge (802.11n_HT20_Ch.11)

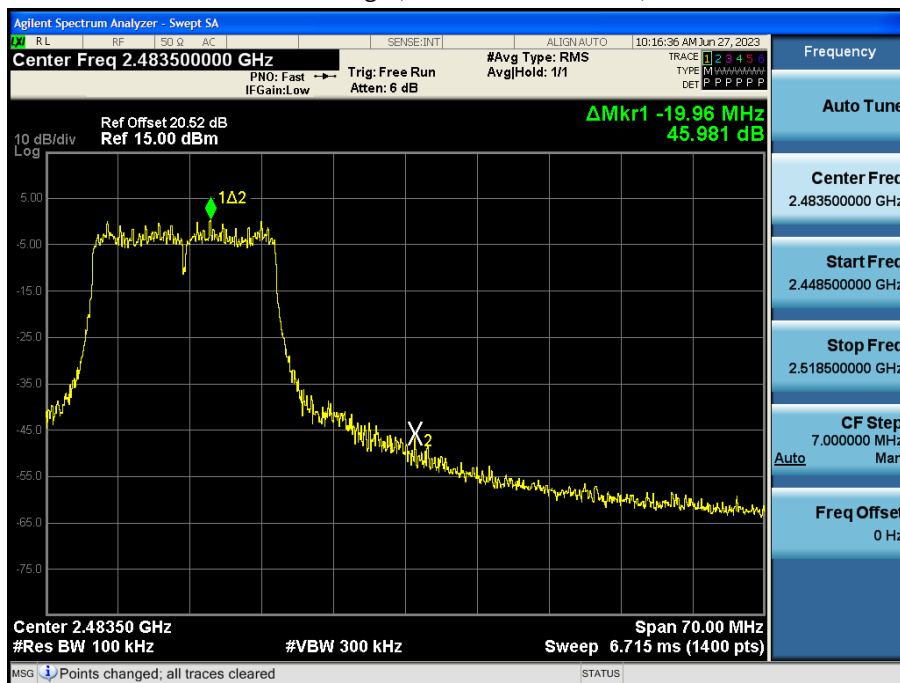


☐ Test Plots(Conducted Spurious Emission)


Worst case : 802.11b_Ch6_11 Mbps

Limit : -13.87 dBm

Conducted Spurious Emission (30 MHz ~ 1 GHz)

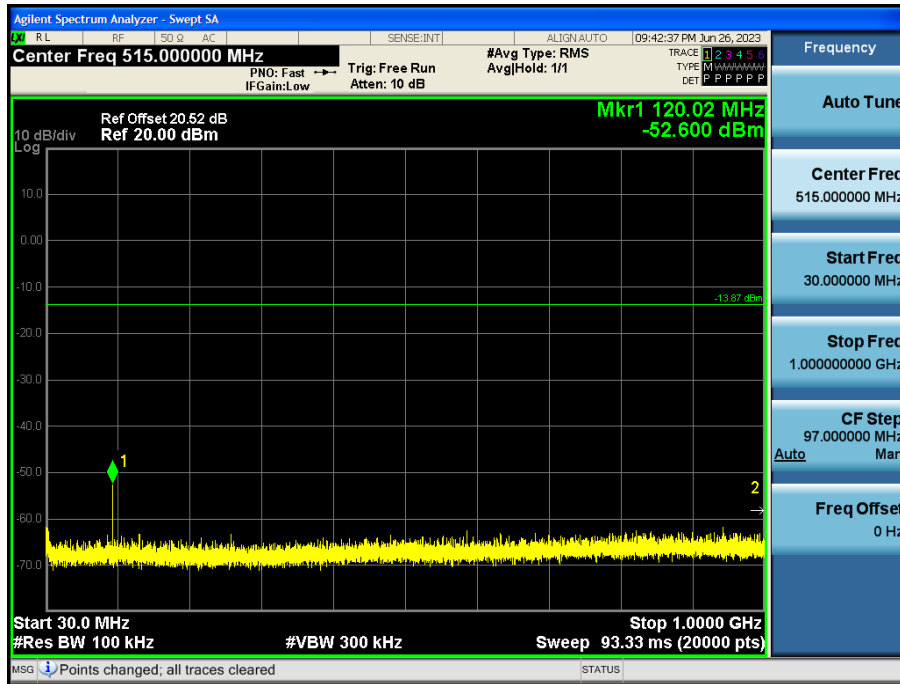


Conducted Spurious Emission (1 GHz ~ 3 GHz)

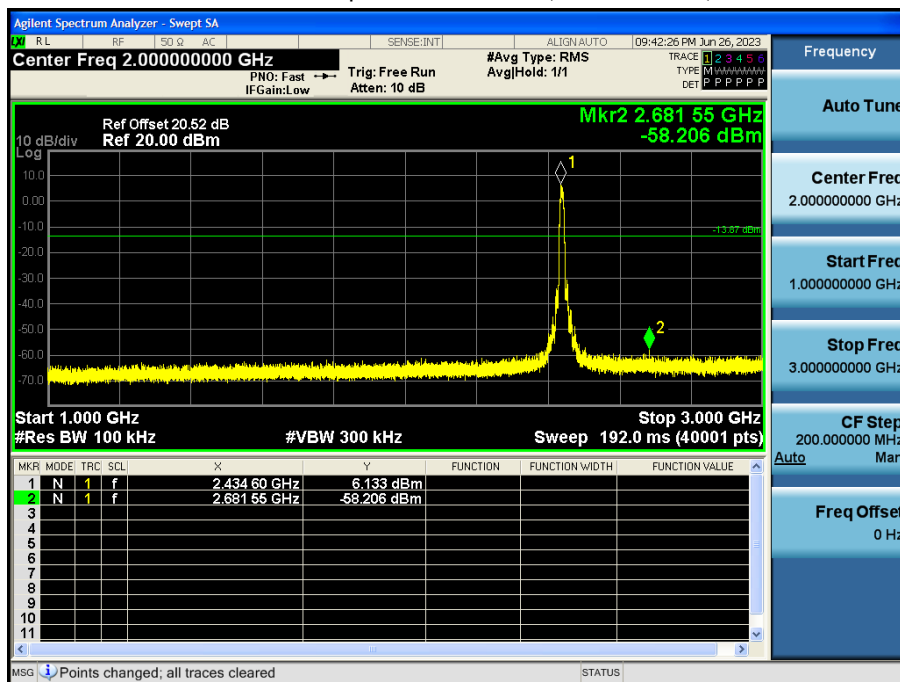




Conducted Spurious Emission (3 GHz ~ 5 GHz)

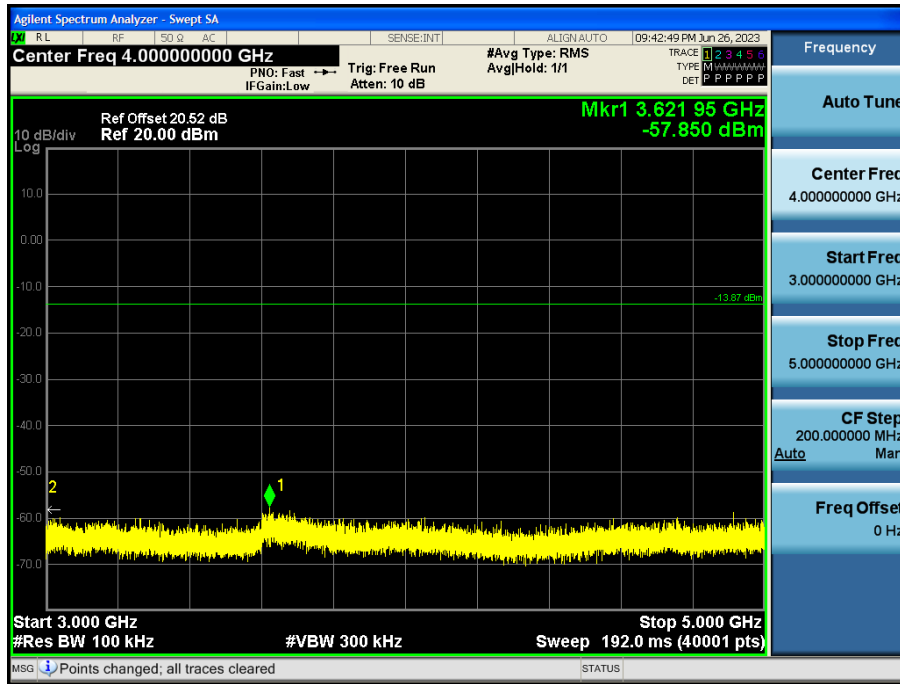


Conducted Spurious Emission (5 GHz ~ 7 GHz)

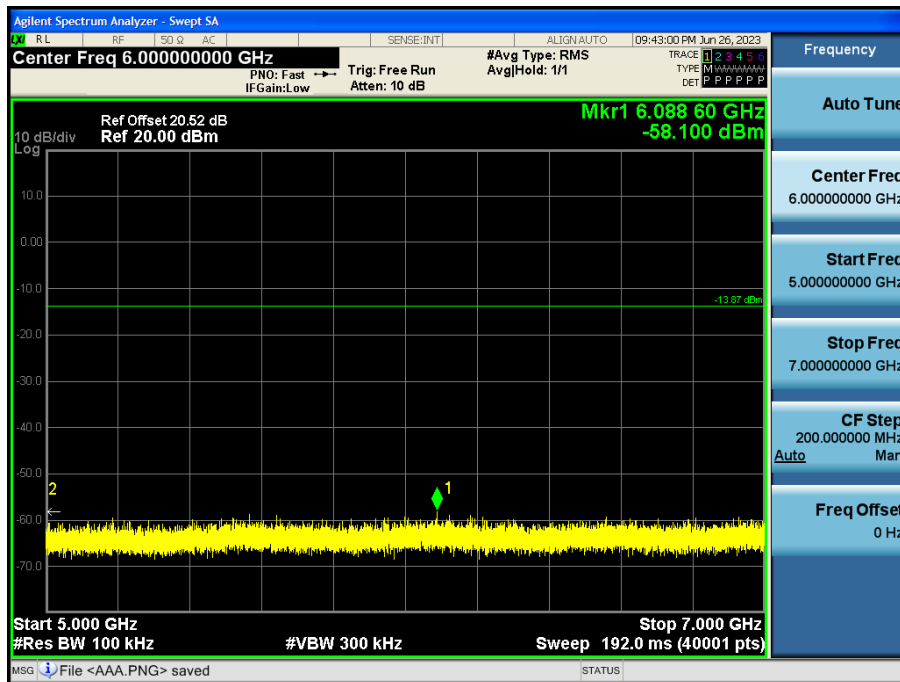





Conducted Spurious Emission (7 GHz ~ 9 GHz)

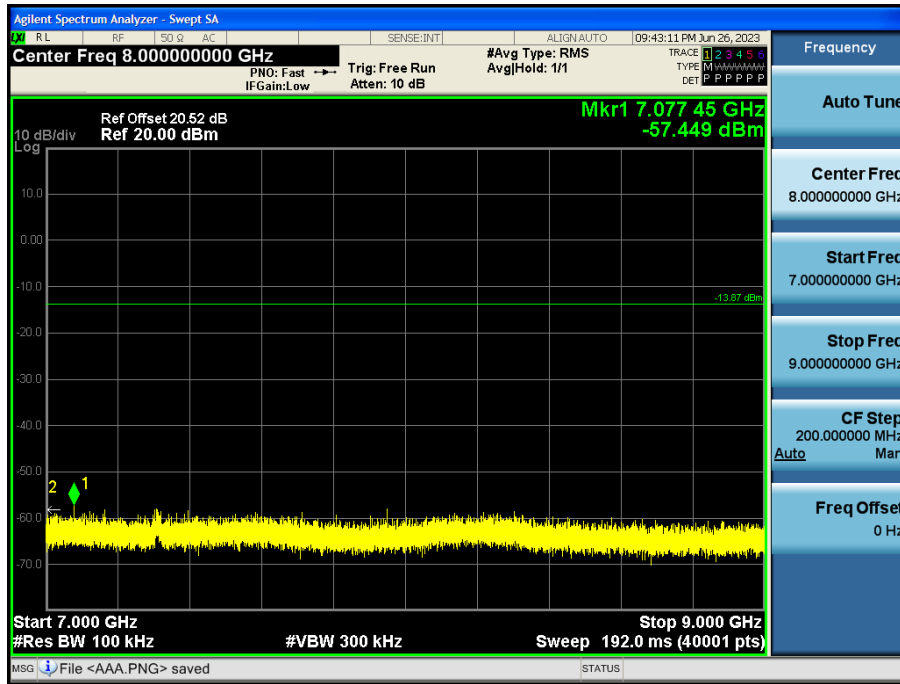


Conducted Spurious Emission (9 GHz ~ 11 GHz)

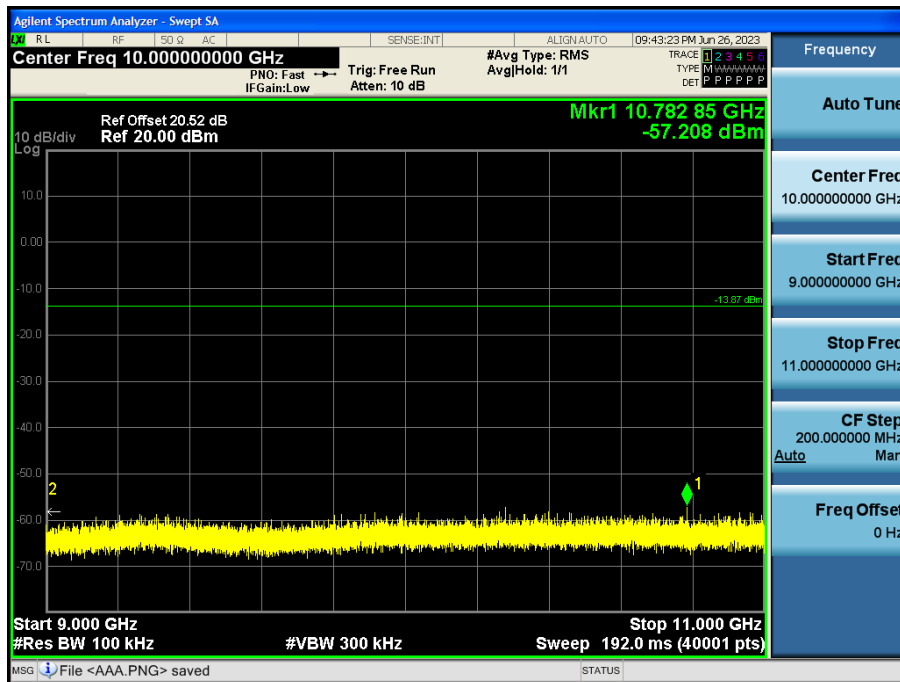

Conducted Spurious Emission (11 GHz ~ 13 GHz)

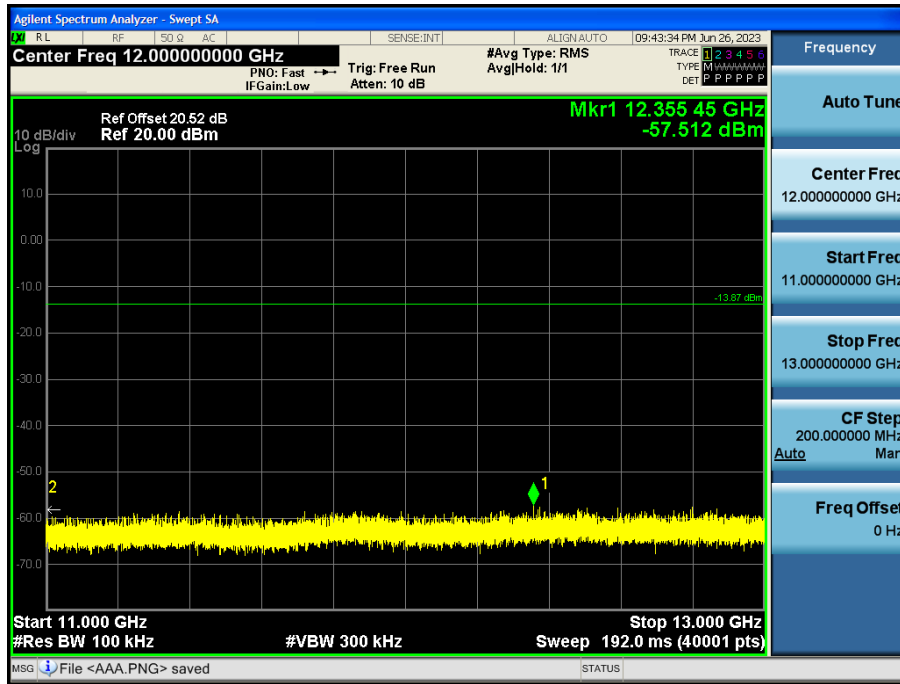


Conducted Spurious Emission (13 GHz ~ 15 GHz)

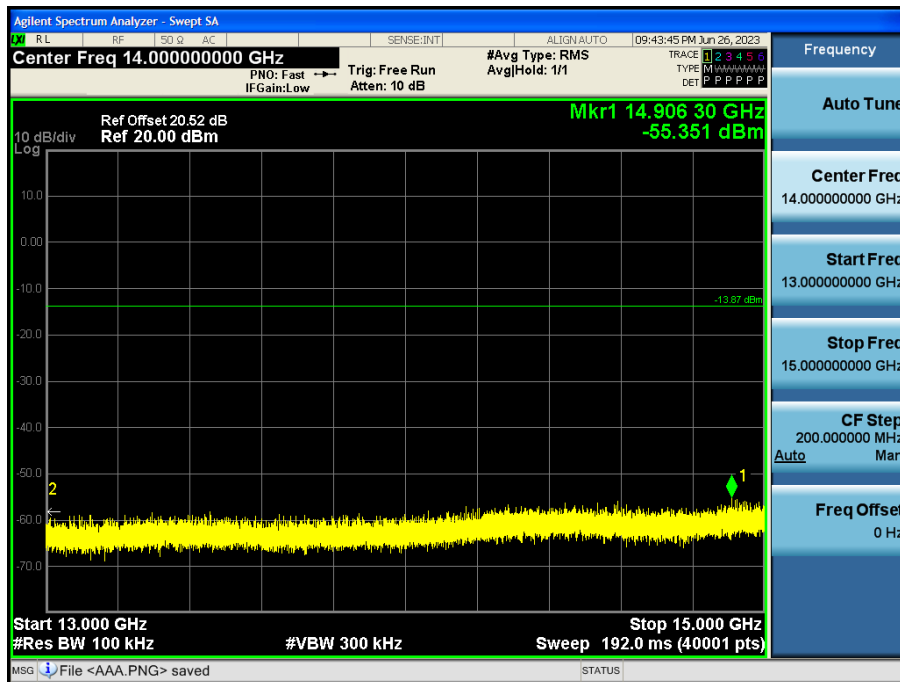




Conducted Spurious Emission (15 GHz ~ 17 GHz)

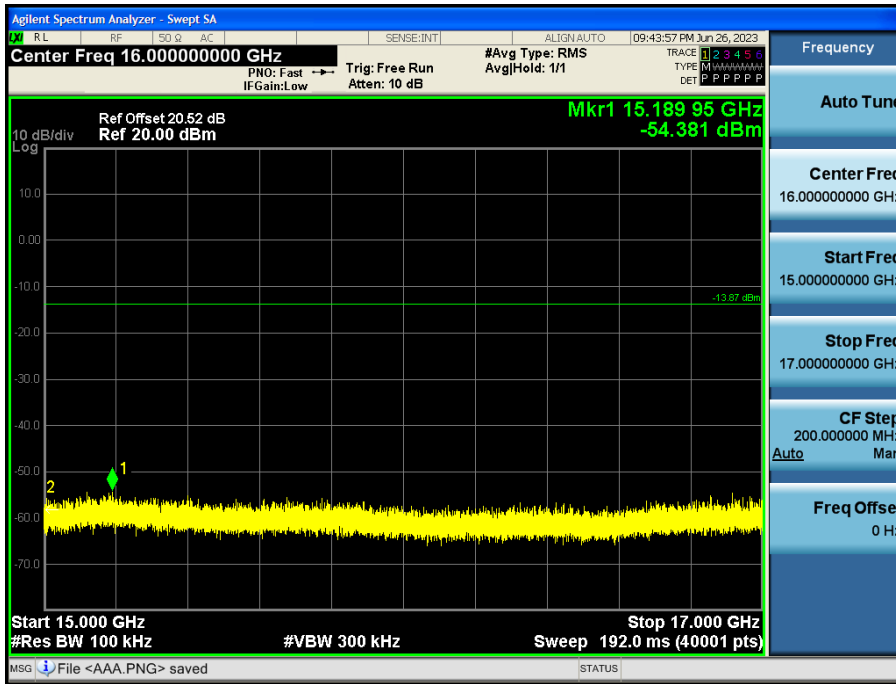


Conducted Spurious Emission (17 GHz ~ 19 GHz)

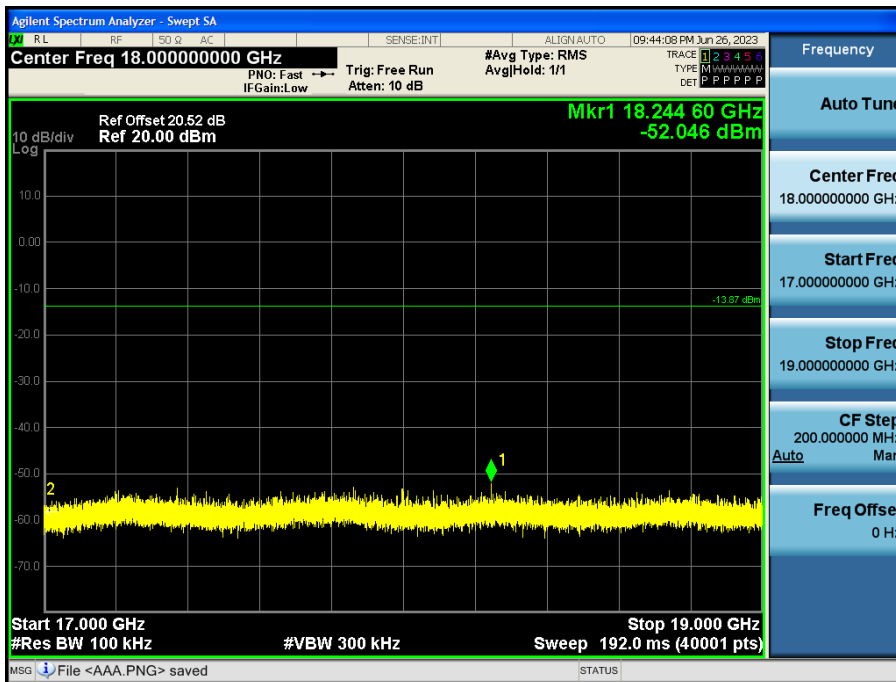




Conducted Spurious Emission (19 GHz ~ 21 GHz)

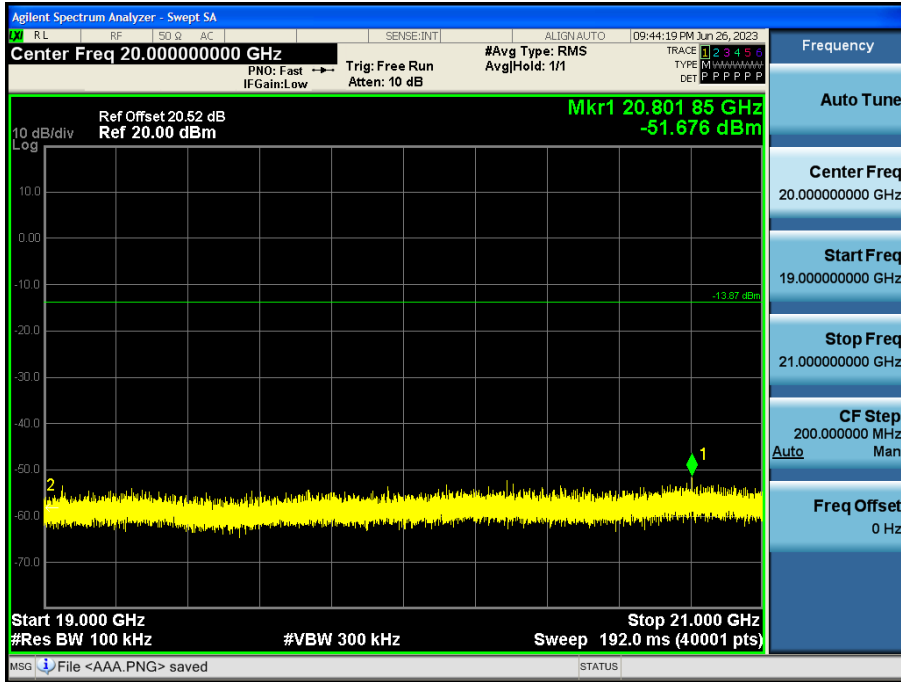


Conducted Spurious Emission (21 GHz ~ 23 GHz)

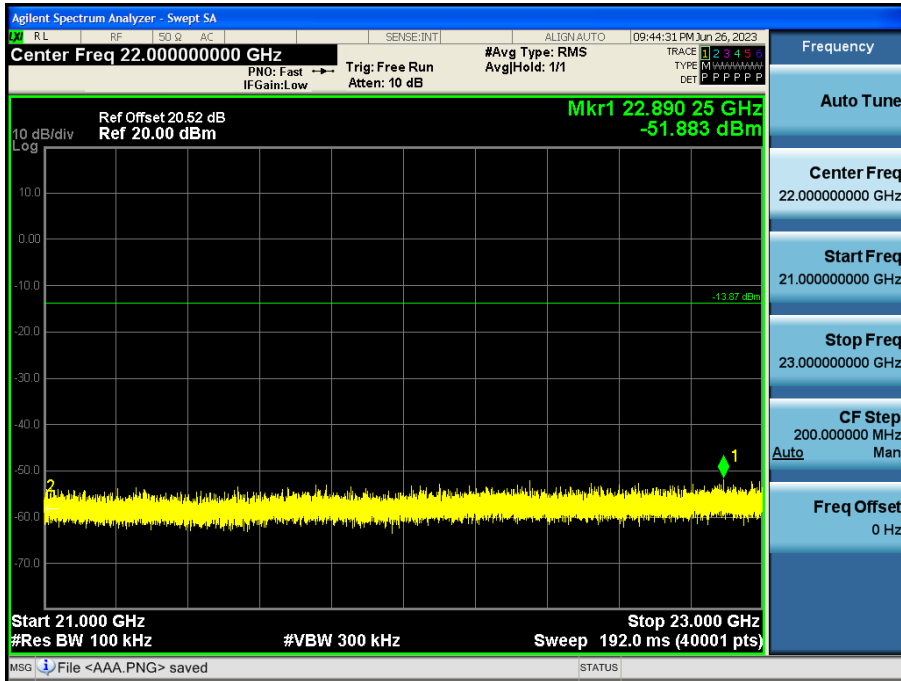



Conducted Spurious Emission (23 GHz ~ 25 GHz)

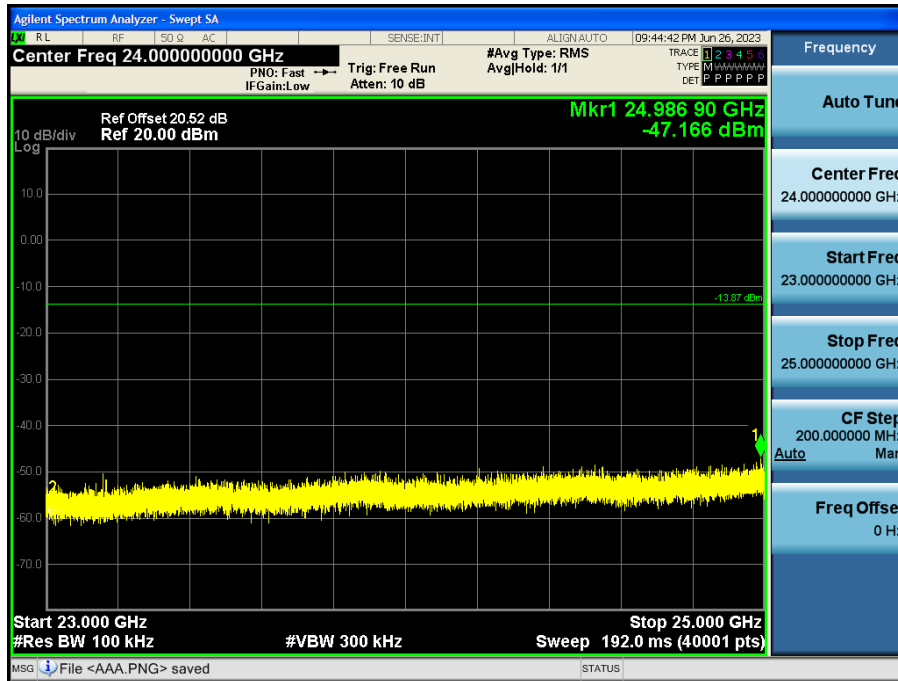

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]

No Critical peaks found

Note:

1. The Measured value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2 412 MHz
 Channel No. 01 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4824	44.00	4.02	V	48.02	73.98	25.96	PK
4824	35.82	4.02	V	39.84	53.98	14.14	AV
7236	40.71	11.57	V	52.28	73.98	21.70	PK
7236	31.59	11.57	V	43.16	53.98	10.82	AV
4824	43.89	4.02	H	47.91	73.98	26.07	PK
4824	35.62	4.02	H	39.64	53.98	14.34	AV
7236	40.51	11.57	H	52.08	73.98	21.90	PK
7236	31.32	11.57	H	42.89	53.98	11.09	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2 437 MHz
 Channel No. 06 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4874	43.61	4.25	V	47.86	73.98	26.12	PK
4874	34.60	4.25	V	38.85	53.98	15.13	AV
7311	40.93	12.01	V	52.94	73.98	21.04	PK
7311	31.11	12.01	V	43.12	53.98	10.86	AV
4874	43.48	4.25	H	47.73	73.98	26.25	PK
4874	34.26	4.25	H	38.51	53.98	15.47	AV
7311	40.71	12.01	H	52.72	73.98	21.26	PK
7311	30.89	12.01	H	42.90	53.98	11.08	AV



Operation Mode:	802.11b
Transfer MCS Index:	1 Mbps
Operating Frequency	2 462 MHz
Channel No.	11 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4924	42.47	4.41	V	46.88	73.98	27.10	PK
4924	32.53	4.41	V	36.94	53.98	17.04	AV
7386	40.33	11.96	V	52.29	73.98	21.69	PK
7386	30.12	11.96	V	42.08	53.98	11.90	AV
4924	42.29	4.41	H	46.70	73.98	27.28	PK
4924	32.33	4.41	H	36.74	53.98	17.24	AV
7386	40.19	11.96	H	52.15	73.98	21.83	PK
7386	29.89	11.96	H	41.85	53.98	12.13	AV



Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2 412 MHz
 Channel No. 01 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4824	41.86	0.000	4.02	V	45.88	73.98	28.10	PK
4824	29.67	0.054	4.02	V	33.74	53.98	20.24	AV
7236	39.79	0.000	11.57	V	51.36	73.98	22.62	PK
7236	26.88	0.054	11.57	V	38.50	53.98	15.48	AV
4824	41.62	0.000	4.02	H	45.64	73.98	28.34	PK
4824	29.48	0.054	4.02	H	33.55	53.98	20.43	AV
7236	39.65	0.000	11.57	H	51.22	73.98	22.76	PK
7236	26.69	0.054	11.57	H	38.31	53.98	15.67	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2 437 MHz
 Channel No. 06 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4874	41.45	0.000	4.25	V	45.70	73.98	28.28	PK
4874	29.49	0.054	4.25	V	33.79	53.98	20.19	AV
7311	41.26	0.000	12.01	V	53.27	73.98	20.71	PK
7311	27.90	0.054	12.01	V	39.96	53.98	14.02	AV
4874	41.28	0.000	4.25	H	45.53	73.98	28.45	PK
4874	29.29	0.054	4.25	H	33.59	53.98	20.39	AV
7311	41.05	0.000	12.01	H	53.06	73.98	20.92	PK
7311	27.71	0.054	12.01	H	39.77	53.98	14.21	AV



Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2.462 MHz
 Channel No.: 11 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4924	41.92	0.000	4.41	V	46.33	73.98	27.65	PK
4924	29.57	0.054	4.41	V	34.03	53.98	19.95	AV
7386	39.54	0.000	11.96	V	51.50	73.98	22.48	PK
7386	27.13	0.054	11.96	V	39.14	53.98	14.84	AV
4924	41.69	0.000	4.41	H	46.10	73.98	27.88	PK
4924	29.33	0.054	4.41	H	33.79	53.98	20.19	AV
7386	39.33	0.000	11.96	H	51.29	73.98	22.69	PK
7386	26.99	0.054	11.96	H	39.00	53.98	14.98	AV



Operation Mode: 802.11n_HT20
 MCS Index: 0
 Operating Frequency: 2 412 MHz
 Channel No. 01 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4824	41.71	0.000	4.02	V	45.73	73.98	28.25	PK
4824	29.62	0.055	4.02	V	33.70	53.98	20.29	AV
7236	39.66	0.000	11.57	V	51.23	73.98	22.75	PK
7236	26.69	0.055	11.57	V	38.32	53.98	15.67	AV
4824	41.55	0.000	4.02	H	45.57	73.98	28.41	PK
4824	29.48	0.055	4.02	H	33.56	53.98	20.43	AV
7236	39.55	0.000	11.57	H	51.12	73.98	22.86	PK
7236	26.48	0.055	11.57	H	38.11	53.98	15.88	AV

Operation Mode: 802.11n_HT20
 MCS Index: 0
 Operating Frequency: 2 437 MHz
 Channel No. 06 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4874	41.78	0.000	4.25	V	46.03	73.98	27.95	PK
4874	29.48	0.055	4.25	V	33.79	53.98	20.20	AV
7311	39.96	0.000	12.01	V	51.97	73.98	22.01	PK
7311	27.43	0.055	12.01	V	39.50	53.98	14.49	AV
4874	41.62	0.000	4.25	H	45.87	73.98	28.11	PK
4874	29.33	0.055	4.25	H	33.64	53.98	20.35	AV
7311	39.78	0.000	12.01	H	51.79	73.98	22.19	PK
7311	27.33	0.055	12.01	H	39.40	53.98	14.59	AV



Operation Mode:	802.11n_HT20
MCS Index:	0
Operating Frequency	2 462 MHz
Channel No.	11 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4924	41.80	0.000	4.41	V	46.21	73.98	27.77	PK
4924	29.56	0.055	4.41	V	34.03	53.98	19.96	AV
7386	39.50	0.000	11.96	V	51.46	73.98	22.52	PK
7386	26.73	0.055	11.96	V	38.75	53.98	15.24	AV
4924	41.75	0.000	4.41	H	46.16	73.98	27.82	PK
4924	29.41	0.055	4.41	H	33.88	53.98	20.11	AV
7386	39.48	0.000	11.96	H	51.44	73.98	22.54	PK
7386	26.69	0.055	11.96	H	38.71	53.98	15.28	AV

[RSDB]

DTS 802.11b 1 Mbps Ch.1 + BT 2-DH5 Ch.78

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4824	42.51	4.02	V	46.53	73.98	27.45	PK
4824	29.66	4.02	V	33.68	53.98	20.30	AV
7236	39.22	11.57	V	50.79	73.98	23.19	PK
7236	26.40	11.57	V	37.97	53.98	16.01	AV
4824	42.48	4.02	H	46.50	73.98	27.48	PK
4824	29.55	4.02	H	33.57	53.98	20.41	AV
7236	39.12	11.57	H	50.69	73.98	23.29	PK
7236	26.32	11.57	H	37.89	53.98	16.09	AV

Note : Bluetooth RSDB Data refer to [BT] Test Report.


DTS 802.11b 1 Mbps Ch.1 + UNII 802.11a 6 Mbps Ch.165

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
4824	43.13	4.02	V	47.15	73.98	26.83	PK
4824	33.61	4.02	V	37.63	53.98	16.35	AV
7236	40.36	11.57	V	51.93	73.98	22.05	PK
7236	30.49	11.57	V	42.06	53.98	11.92	AV
4824	42.85	4.02	H	46.87	73.98	27.11	PK
4824	33.02	4.02	H	37.04	53.98	16.94	AV
7236	40.21	11.57	H	51.78	73.98	22.20	PK
7236	30.33	11.57	H	41.90	53.98	12.08	AV


Note : WLAN 5 GHz Data refer to [UNII] Test Report.

▣ Test Plots (Worst case : X-V)

Radiated Spurious Emissions plot – Average Measured Value (802.11b, Ch.1 3rd Harmonic)

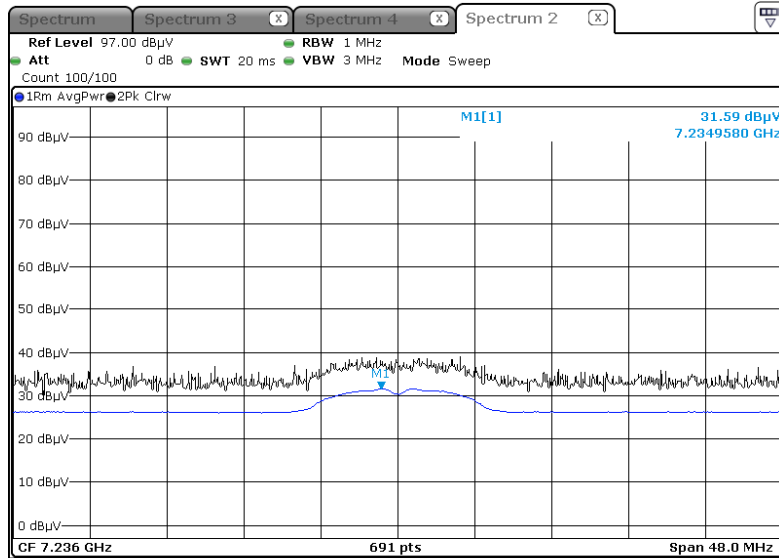

Radiated Spurious Emissions plot – Peak Measured Value (802.11b, Ch.1 3rd Harmonic)

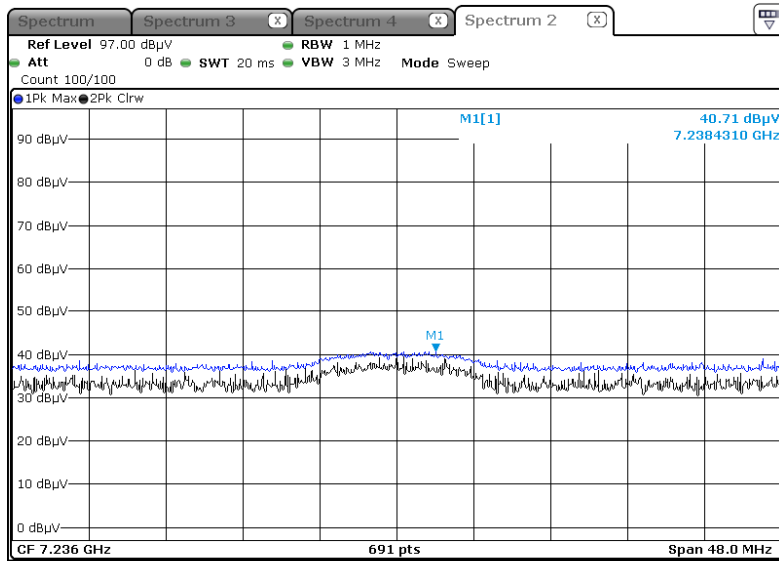


Note:

Plot of worst case are only reported.


[RSDB] DTS 802.11b 1 Mbps Ch.1 + BT 2-DH5 Ch.78

☐ Test Plots (Worst case : X-V)

Radiated Spurious Emissions plot – Average Measured Value

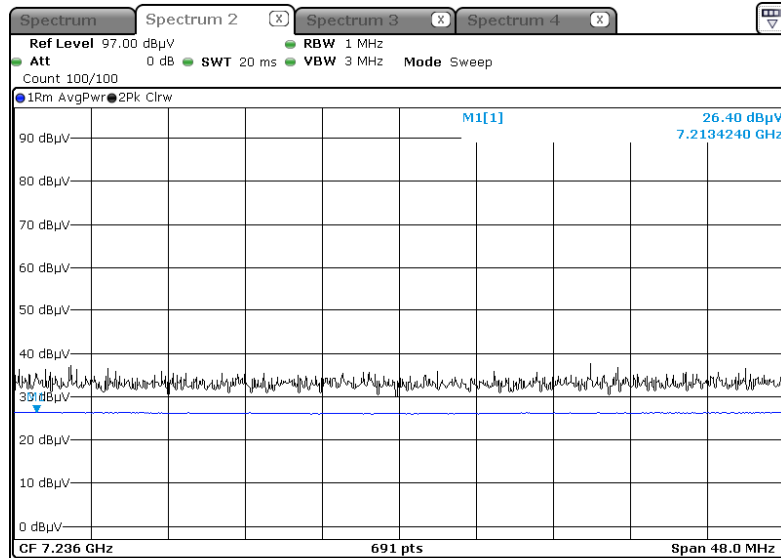

Radiated Spurious Emissions plot – Peak Measured Value

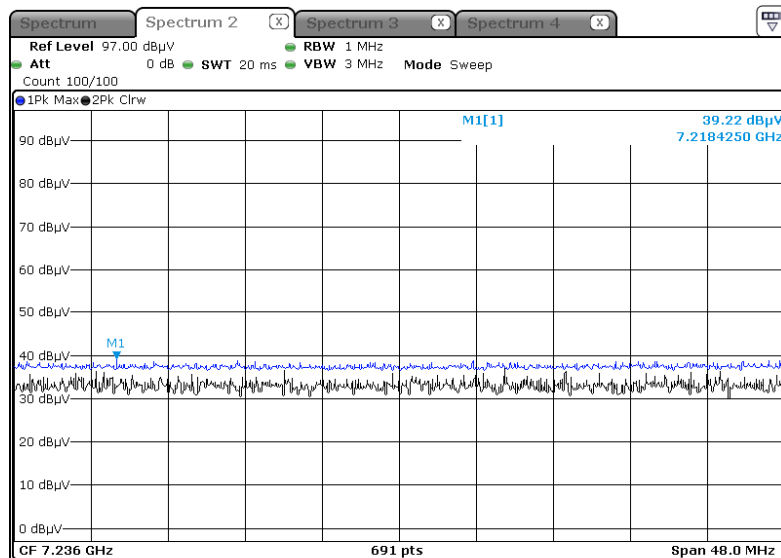


Note:

Plot of worst case are only reported.


[RSDB] DTS 802.11b 1 Mbps Ch.1 + UNII 802.11a 6 Mbps Ch.165

☐ Test Plots (Worst case : X-V)

Radiated Spurious Emissions plot – Average Measured Value

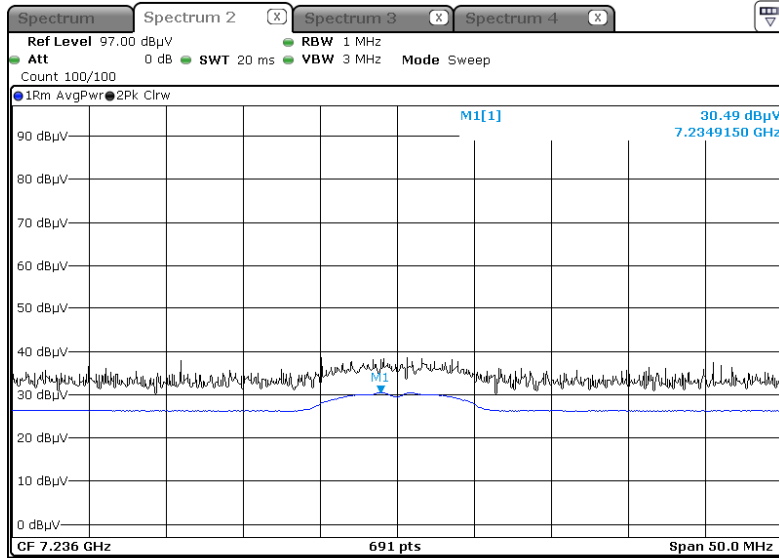

Radiated Spurious Emissions plot – Peak Measured Value

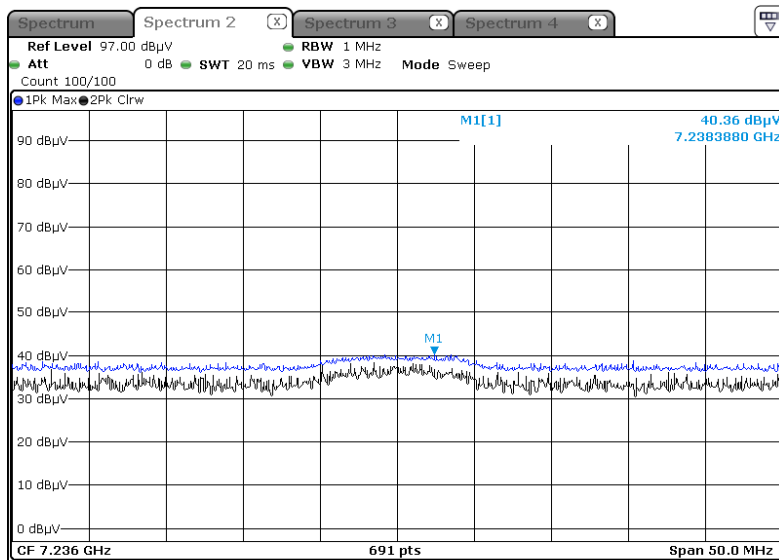

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2 412 MHz, 2 462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency	Measured Value	A.F+C.L-A.G+ ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	20.029	37.05	H	57.08	73.98	16.90	PK
2390.0	10.222	37.05	H	47.27	53.98	6.71	AV
2390.0	20.280	37.05	V	57.33	73.98	16.65	PK
2390.0	10.464	37.05	V	47.51	53.98	6.47	AV
2483.5	21.512	37.03	H	58.54	73.98	15.44	PK
2483.5	12.985	37.03	H	50.02	53.98	3.97	AV
2483.5	21.710	37.03	V	58.74	73.98	15.24	PK
2483.5	13.125	37.03	V	50.16	53.98	3.83	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz
 Channel No. 01 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+ ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2389.5	25.482	0.000	37.05	H	62.53	73.98	11.45	PK
# 2388.5	25.025	0.000	37.05	H	62.08	73.98	11.91	PK
2388.0	33.482	0.000	37.05	H	70.53	73.98	3.45	PK
2390.0	12.001	0.054	37.05	H	49.11	53.98	4.88	AV
# 2389.5	25.690	0.000	37.05	V	62.74	73.98	11.24	PK
# 2388.5	25.320	0.000	37.05	V	62.37	73.98	11.61	PK
2388.0	33.644	0.000	37.05	V	70.69	73.98	3.29	PK
2390.0	12.226	0.054	37.05	V	49.33	53.98	4.65	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)



Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2417 MHz
 Channel No.: 02 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+ ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2389.5	25.621	0.000	37.05	H	62.67	73.98	11.31	PK
# 2388.5	24.851	0.000	37.05	H	61.90	73.98	12.08	PK
2388.0	33.456	0.000	37.05	H	70.51	73.98	3.47	PK
2390.0	12.333	0.054	37.05	H	49.44	53.98	4.54	AV
# 2389.5	25.800	0.000	37.05	V	62.85	73.98	11.13	PK
# 2388.5	25.100	0.000	37.05	V	62.15	73.98	11.83	PK
2388.0	33.655	0.000	37.05	V	70.71	73.98	3.28	PK
2390.0	12.504	0.054	37.05	V	49.61	53.98	4.37	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2457 MHz
 Channel No.: 10 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+ ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2484	23.012	0.000	37.03	H	60.04	73.98	13.94	PK
# 2484	9.482	0.054	37.03	H	46.57	53.98	7.41	AV
2484.5	30.125	0.000	37.03	H	67.16	73.98	6.83	PK
2484.5	10.549	0.054	37.03	H	47.63	53.98	6.35	AV
# 2484	23.410	0.000	37.03	V	60.44	73.98	13.54	PK
# 2484	9.610	0.054	37.03	V	46.69	53.98	7.29	AV
2484.5	30.458	0.000	37.03	V	67.49	73.98	6.49	PK
2484.5	10.749	0.054	37.03	V	47.83	53.98	6.15	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)



Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462 MHz
 Channel No.: 11 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+ ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
# 2484	24.951	0.000	37.03	H	61.98	73.98	12.00	PK
# 2484	10.658	0.054	37.03	H	47.74	53.98	6.24	AV
2484.5	30.321	0.000	37.03	H	67.35	73.98	6.63	PK
2484.5	11.331	0.054	37.03	H	48.42	53.98	5.57	AV
# 2484	25.070	0.000	37.03	V	62.10	73.98	11.88	PK
# 2484	10.950	0.054	37.03	V	48.03	53.98	5.95	AV
2484.5	30.544	0.000	37.03	V	67.57	73.98	6.41	PK
2484.5	11.427	0.054	37.03	V	48.51	53.98	5.47	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11n (HT20)
 Transfer Rate: MCS0
 Operating Frequency: 2412 MHz
 Channel No.: 01 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+ ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
# 2389.5	24.001	0.000	37.05	H	61.05	73.98	12.93	PK
# 2388.5	23.331	0.000	37.05	H	60.38	73.98	13.60	PK
2388.0	29.852	0.000	37.05	H	66.90	73.98	7.08	PK
2390.0	10.958	0.055	37.05	H	48.06	53.98	5.92	AV
# 2389.5	24.250	0.000	37.05	V	61.30	73.98	12.68	PK
# 2388.5	23.580	0.000	37.05	V	60.63	73.98	13.35	PK
2388.0	30.020	0.000	37.05	V	67.07	73.98	6.91	PK
2390.0	11.132	0.055	37.05	V	48.24	53.98	5.74	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)



Operation Mode: 802.11n (HT20)
 Transfer Rate: MCS0
 Operating Frequency: 2417 MHz
 Channel No.: 02 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+ ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	32.782	0.000	37.05	H	69.83	73.98	4.15	PK
2390.0	10.696	0.055	37.05	H	47.80	53.98	6.18	AV
2390.0	32.949	0.000	37.05	V	70.00	73.98	3.98	PK
2390.0	10.917	0.055	37.05	V	48.02	53.98	5.96	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: MCS0
 Operating Frequency: 2457 MHz
 Channel No.: 10 Ch

Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+ ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2484	26.512	0.000	37.03	H	63.54	73.98	10.44	PK
# 2484	13.112	0.055	37.03	H	50.20	53.98	3.78	AV
# 2485	26.321	0.000	37.03	H	63.35	73.98	10.63	PK
# 2485	12.896	0.055	37.03	H	49.98	53.98	4.00	AV
2485.5	32.715	0.000	37.03	H	69.75	73.98	4.24	PK
2485.5	13.485	0.055	37.03	H	50.57	53.98	3.41	AV
# 2484	26.740	0.000	37.03	V	63.77	73.98	10.21	PK
# 2484	13.440	0.055	37.03	V	50.53	53.98	3.46	AV
# 2485	26.510	0.000	37.03	V	63.54	73.98	10.44	PK
# 2485	13.080	0.055	37.03	V	50.17	53.98	3.82	AV
2485.5	32.898	0.000	37.03	V	69.93	73.98	4.05	PK
2485.5	13.692	0.055	37.03	V	50.78	53.98	3.20	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)



Operation Mode:	802.11n (HT20)
Transfer Rate:	MCS0
Operating Frequency	2462 MHz
Channel No.	11 Ch


Frequency	Measured Value	Duty Cycle Factor	A.F+C.L-A.G+ ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
# 2484	22.001	0.000	37.03	H	59.03	73.98	14.95	PK
# 2484	12.512	0.055	37.03	H	49.60	53.98	4.38	AV
2484.5	29.896	0.000	37.03	H	66.93	73.98	7.05	PK
2484.5	11.025	0.055	37.03	H	48.11	53.98	5.87	AV
# 2484	22.220	0.000	37.03	V	59.25	73.98	14.73	PK
# 2484	12.830	0.055	37.03	V	49.92	53.98	4.07	AV
2484.5	30.077	0.000	37.03	V	67.11	73.98	6.87	PK
2484.5	11.356	0.055	37.03	V	48.44	53.98	5.54	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)

▣ Test Plots

Radiated Restricted Band Edges plot – Average Measured Value (802.11n (HT20), Ch.10, X-V)

Integration method Used_ 2 484 MHz

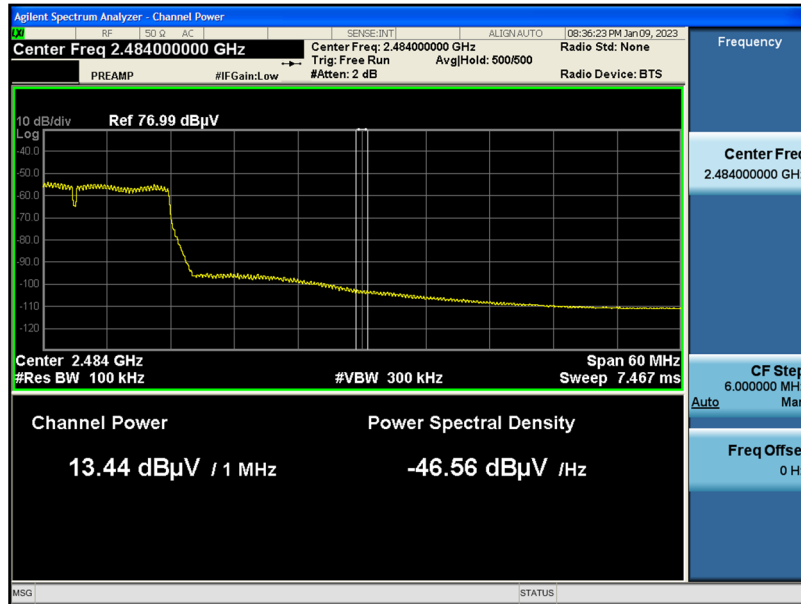


Radiated Restricted Band Edges plot – Peak Measured Value (802.11n (HT20), Ch.10, X-V)

Integration method Used_ 2 484 MHz




Radiated Restricted Band Edges plot – Average Measured Value (802.11n (HT20), Ch.10, X-V)

Integration method Used_ 2 485 MHz

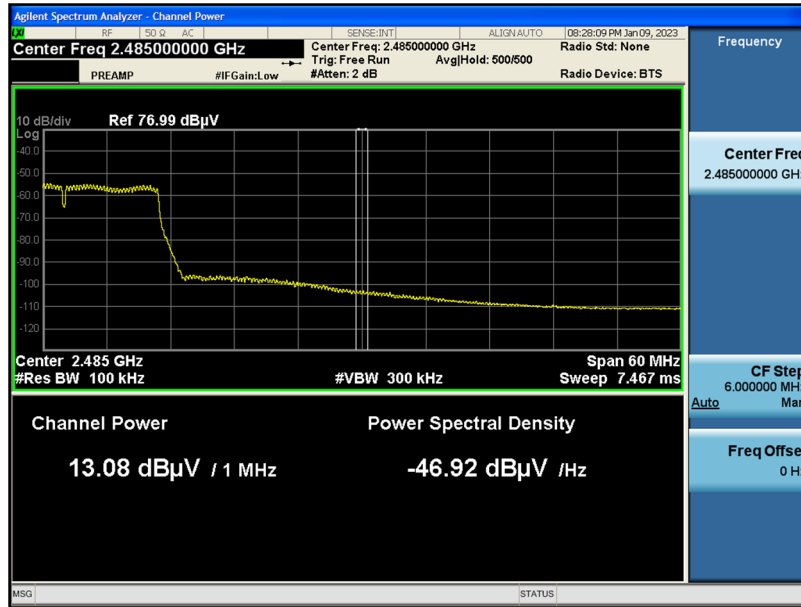


Radiated Restricted Band Edges plot – Peak Measured Value (802.11n (HT20), Ch.10, X-V)

Integration method Used_ 2 485 MHz

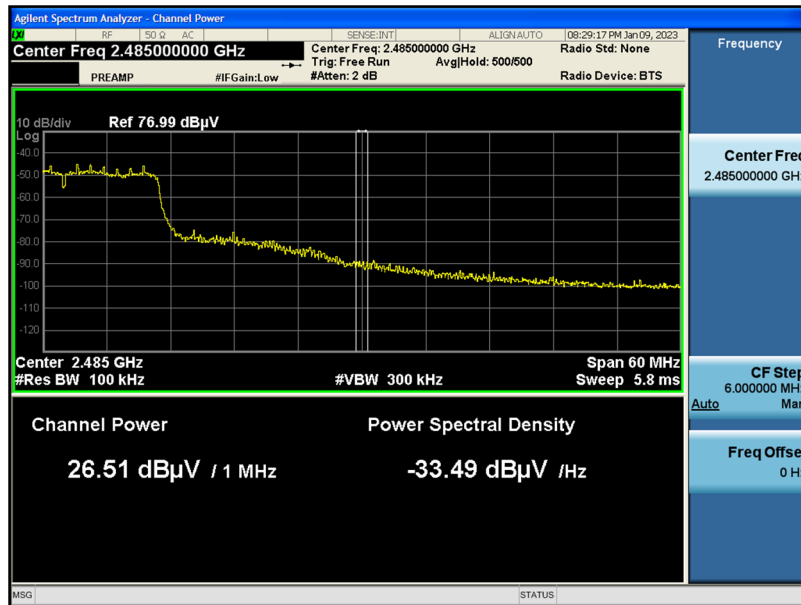

Radiated Restricted Band Edges plot – Average Measured Value (802.11n (HT20), Ch.10, X-V)

Standard method Used_ 2 485 MHz

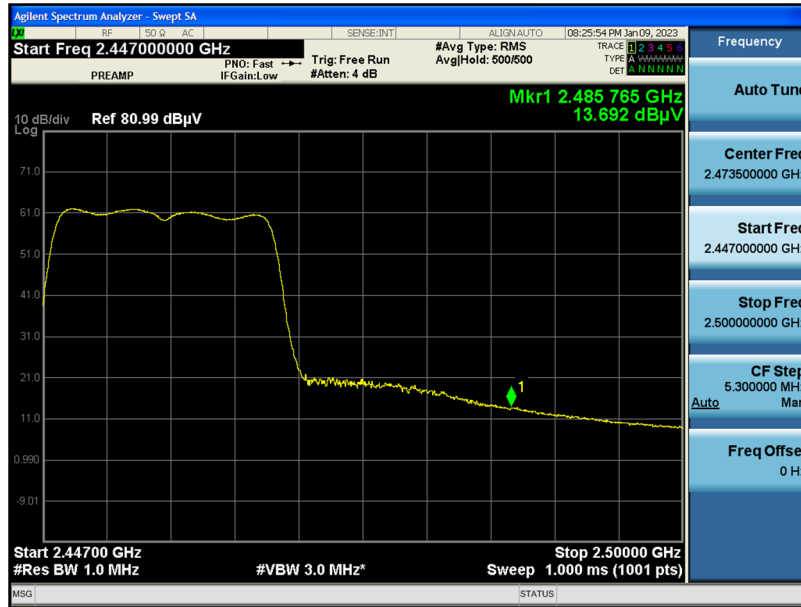

Radiated Restricted Band Edges plot – Peak Measured Value (802.11n (HT20), Ch.10, X-V)

Standard method Used_ 2 485 MHz



Note:

Plot of worst case are only reported.

9.8 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

- Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Measured Value	A.F+C.L-A.G+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

9.9 RADIATED OUTPUT POWER (E.I.R.P)

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2437 MHz, 2462 MHz
 Channel No. 01 Ch, 06Ch, 11Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Field Strength	EIRP
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dBm]
2412	117.10	-5.30	V	111.80	16.60
2437	116.96	-5.19	V	111.77	16.57
2462	116.49	-4.66	V	111.83	16.63

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2437 MHz, 2462 MHz
 Channel No. 01 Ch, 06Ch, 11Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Field Strength	EIRP
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dBm]
2412	112.82	-5.30	V	107.52	12.32
2437	114.26	-5.19	V	109.07	13.87
2462	111.96	-4.66	V	107.30	12.10


Operation Mode: 802.11n_HT20
 MCS Index: 0
 Operating Frequency: 2412 MHz, 2437 MHz, 2462 MHz
 Channel No. 01 Ch, 06Ch, 11Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Field Strength	EIRP
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dBm]
2412	112.12	-5.30	V	106.82	11.62
2437	113.63	-5.19	V	108.44	13.24
2462	111.31	-4.66	V	106.65	11.45




Test Plots (Worst case : Y-V)

Radiated Output Power plot – (802.11b, Ch.11)

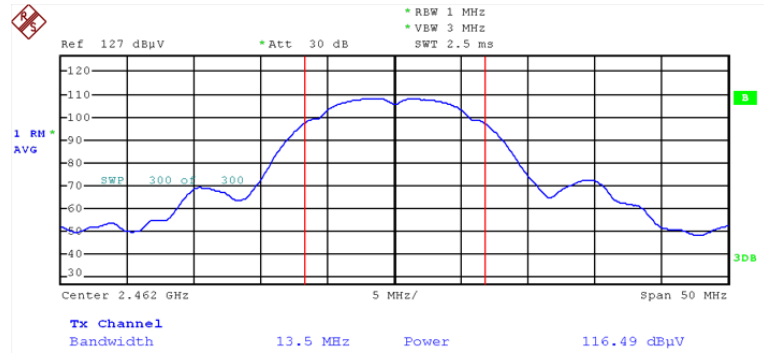


Radiated Output Power plot – (802.11g, Ch.6)

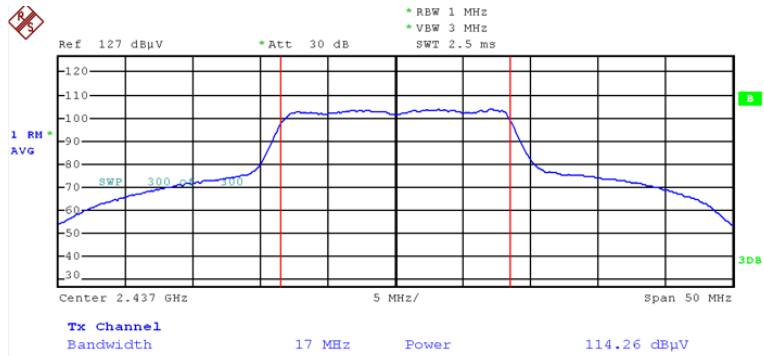



Radiated Output Power plot – (802.11n, Ch.6)

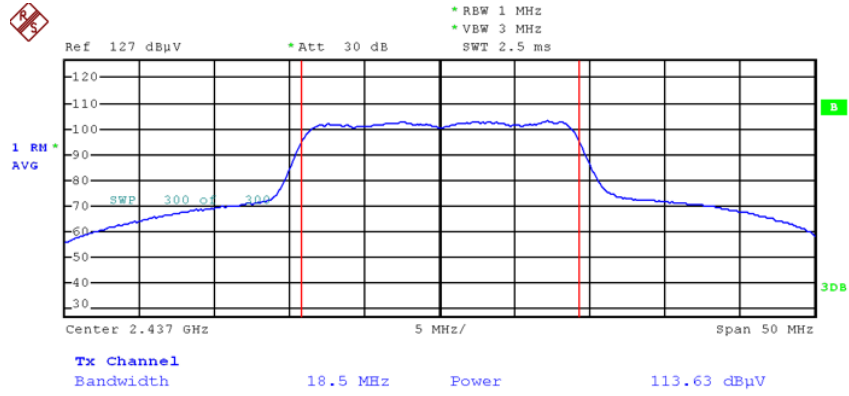

Note:

Plot of worst case are only reported.

9.10 RADIATED POWER SPECTRAL DENSITY

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2437 MHz, 2462 MHz
 Channel No. 01 Ch, 06Ch, 11Ch

Frequency	Measured Value	A.F+C.L-A.G	ANT. POL	Field Strength	PSD
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dBm]
2412	98.75	-5.30	V	93.45	-1.75
2437	98.48	-5.19	V	93.29	-1.91
2462	98.05	-4.66	V	93.39	-1.81

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2437 MHz, 2462 MHz
 Channel No. 01 Ch, 06Ch, 11Ch


Frequency	Measured Value	A.F+C.L-A.G	ANT. POL	Field Strength	PSD
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dBm]
2412	87.67	-5.30	V	82.37	-12.83
2437	90.00	-5.19	V	84.81	-10.39
2462	86.78	-4.66	V	82.12	-13.08

Operation Mode: 802.11n_HT20
 MCS Index: 0
 Operating Frequency: 2412 MHz, 2437 MHz, 2462 MHz
 Channel No. 01 Ch, 06Ch, 11Ch


Frequency	Measured Value	A.F+C.L-A.G	ANT. POL	Field Strength	PSD
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dBm]
2412	89.54	-5.30	V	84.24	-10.96
2437	89.36	-5.19	V	84.17	-11.03
2462	87.23	-4.66	V	82.57	-12.63


Test Plots (Worst case : Y-V)

Radiated Power Spectral Density (802.11b, Ch.1)

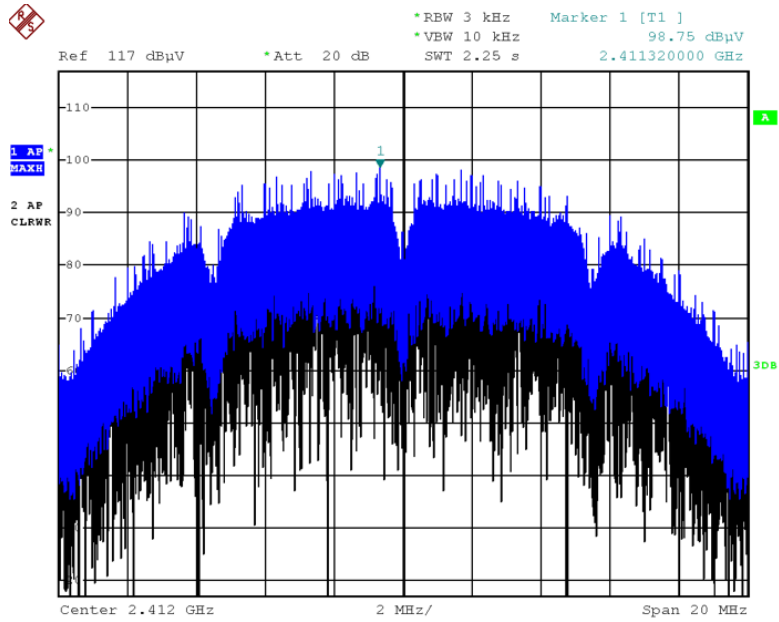

Radiated Power Spectral Density (802.11g, Ch.6)

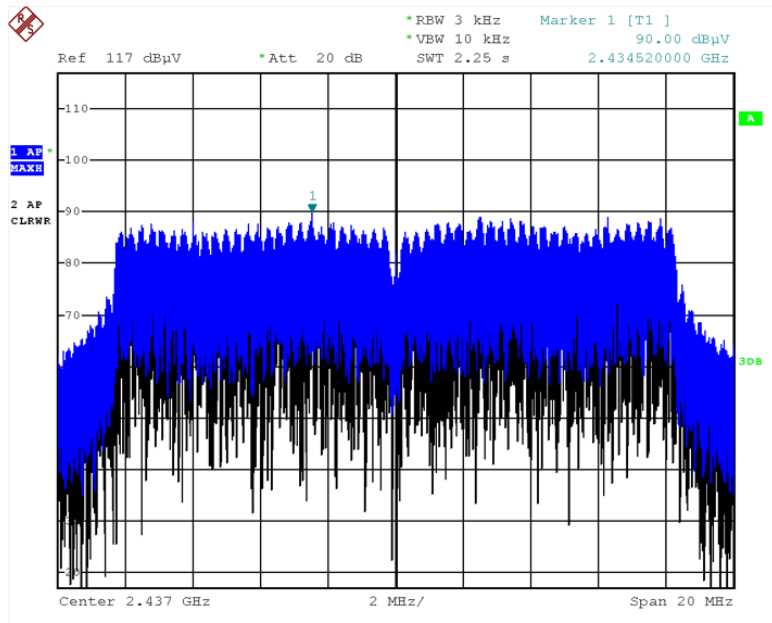

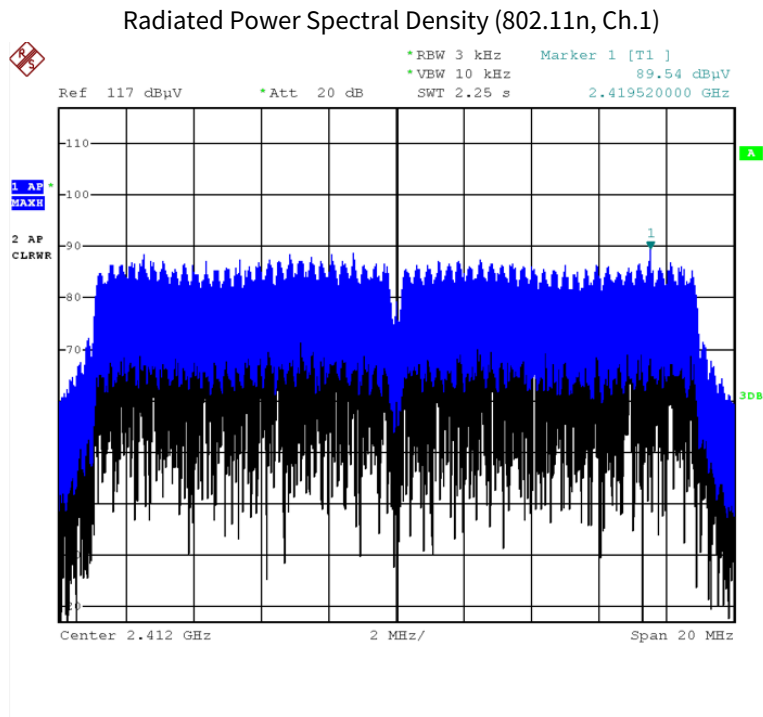

Note:

Plot of worst case are only reported.

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	05/26/2024	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/22/2024	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/02/2024	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	06/09/2024	Annual
Power Meter	N1911A	Agilent	MY45100523	03/06/2024	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/06/2024	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2023	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	Agilent	KR75303243	04/24/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	07560	06/12/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	08285	06/02/2024	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/16/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
EM1000 / Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	T&M system	TM19050002	N/A	N/A
Loop Antenna	1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/18/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-2296	05/18/2024	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/12/2024	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/12/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/12/2024	Annual
High Pass Filter(7 GHz ~ 18 GHz)	WHKX10-7150-8000-18000-50SS	Wainwright Instruments	1	03/02/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/28/2024	Annual
RF Switching System	FMSR-05B (HPF(3~18GHz) + LNA1(1~18GHz))	T&M system	S1L1	01/17/2024	Annual
RF Switching System	FMSR -05B (ATT(10dB) + LNA1(1~18GHz))	T&M system	S1L2	01/17/2024	Annual
RF Switching System	FMSR -05B (ATT(3dB) + LNA1(1~18GHz))	T&M system	S1L3	01/17/2024	Annual
RF Switching System	FMSR -05B (LNA1(1~18GHz))	T&M system	S1L4	01/17/2024	Annual
RF Switching System	FMSR -05B (HPF(7~18GHz) + LNA2(6~18GHz))	T&M system	S1L5	01/17/2024	Annual
RF Switching System	FMSR -05B (Thru(30MHz ~ 18GHz))	T&M system	S1L6	01/17/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).



11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2307-FI004-P