


[External Ant]

■ RESULT PLOTS (Worst Case: X-V)

Radiated Spurious Emissions plot –Peak Reading (802.11ac_VHT20, Ch.165 3rd Harmonic)

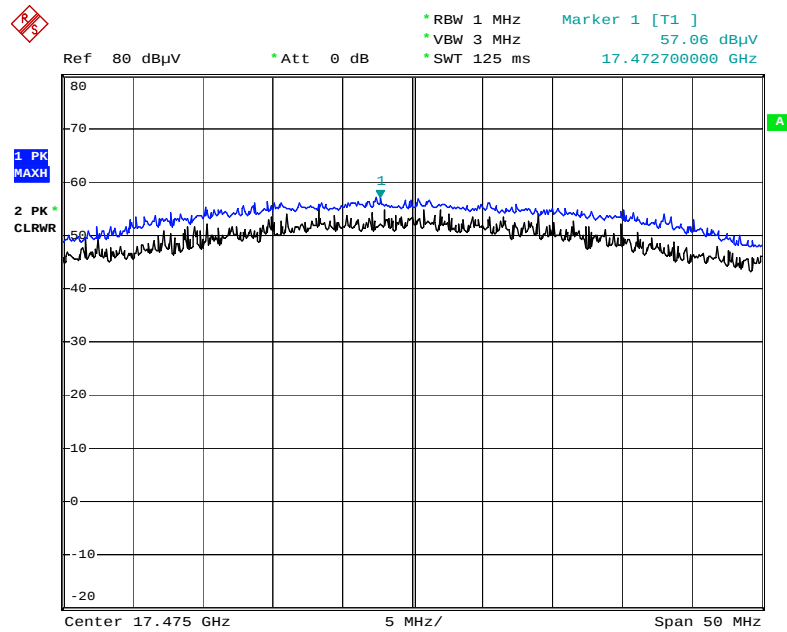

Date: 25.SEP.2018 09:05:04

Note : Only the worst case plots for Radiated Spurious Emissions.

10.7.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

[Internal Ant]

Band :	UNII 1
Operation Mode:	802.11 a
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	60.21	3.07	H	63.28	73.98	10.70	PK
5150	45.72	3.07	H	48.79	53.98	5.19	AV
5150	61.78	3.07	V	64.85	73.98	9.13	PK
5150	47.75	3.07	V	50.82	53.98	3.16	AV

Band :	UNII 1
Operation Mode:	802.11 n_HT20
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	59.88	3.07	H	62.95	73.98	11.03	PK
5150	46.28	3.07	H	49.35	53.98	4.63	AV
5150	61.12	3.07	V	64.19	73.98	9.79	PK
5150	47.52	3.07	V	50.59	53.98	3.39	AV

Band :	UNII 1
Operation Mode:	802.11 ac_VHT20
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	60.44	3.07	H	63.51	73.98	10.47	PK
5150	46.11	3.07	H	49.18	53.98	4.80	AV
5150	61.68	3.07	V	64.75	73.98	9.23	PK
5150	47.54	3.07	V	50.61	53.98	3.37	AV

Band :	UNII 1
Operation Mode:	802.11 n_HT40
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	60.58	3.07	H	63.65	73.98	10.33	PK
5150	44.18	3.07	H	47.25	53.98	6.73	AV
5150	62.64	3.07	V	65.71	73.98	8.27	PK
5150	47.13	3.07	V	50.2	53.98	3.78	AV

Band :	UNII 1
Operation Mode:	802.11 ac_VHT40
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	61.25	3.07	H	64.32	73.98	9.66	PK
5150	45.71	3.07	H	48.78	53.98	5.20	AV
5150	62.58	3.07	V	65.65	73.98	8.33	PK
5150	47.00	3.07	V	50.07	53.98	3.91	AV

Band :	UNII 1
Operation Mode:	802.11 ac_VHT80
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	59.08	3.07	H	62.15	73.98	11.83	PK
5150	46.12	3.07	H	49.19	53.98	4.79	AV
5150	60.07	3.07	V	63.14	73.98	10.84	PK
5150	47.08	3.07	V	50.15	53.98	3.83	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	63.11	2.59	H	65.70	73.98	8.28	PK
5350	47.98	2.59	H	50.57	53.98	3.41	AV
5350	64.24	2.59	V	66.83	73.98	7.15	PK
5350	48.26	2.59	V	50.85	53.98	3.13	AV

Band :	UNII 2A
Operation Mode:	802.11 n_HT20
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	64.37	2.59	H	66.96	73.98	7.02	PK
5350	46.19	2.59	H	48.78	53.98	5.20	AV
5350	65.44	2.59	V	68.03	73.98	5.95	PK
5350	47.84	2.59	V	50.43	53.98	3.55	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT20
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	65.91	2.59	H	68.50	73.98	5.48	PK
5350	45.29	2.59	H	47.88	53.98	6.10	AV
5350	66.10	2.59	V	68.69	73.98	5.29	PK
5350	46.91	2.59	V	49.5	53.98	4.48	AV

Band :	UNII 2A
Operation Mode:	802.11 n_HT40
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	65.91	2.59	H	68.50	73.98	5.48	PK
5350	46.81	2.59	H	49.4	53.98	4.58	AV
5350	67.94	2.59	V	70.53	73.98	3.45	PK
5350	47.92	2.59	V	50.51	53.98	3.47	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT40
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	66.23	2.59	H	68.82	73.98	5.16	PK
5350	47.92	2.59	H	50.51	53.98	3.47	AV
5350	67.03	2.59	V	69.62	73.98	4.36	PK
5350	48.22	2.59	V	50.81	53.98	3.17	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT80
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	61.02	2.59	H	63.61	73.98	10.37	PK
5350	45.28	2.59	H	47.87	53.98	6.11	AV
5350	62.06	2.59	V	64.65	73.98	9.33	PK
5350	47.34	2.59	V	49.93	53.98	4.05	AV

Band :	UNII 2C
Operation Mode:	802.11 a
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	58.05	3.13	H	61.18	73.98	12.80	PK
5460	44.41	3.13	H	47.54	53.98	6.44	AV
5470	60.72	3.40	H	64.12	68.20	4.08	PK
5460	58.43	3.13	V	61.56	73.98	12.42	PK
5460	45.19	3.13	V	48.32	53.98	5.66	AV
5470	61.24	3.40	V	64.64	68.20	3.56	PK

Band :	UNII 2C
Operation Mode:	802.11 n_HT20
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	57.15	3.13	H	60.28	73.98	13.70	PK
5460	44.21	3.13	H	47.34	53.98	6.64	AV
5470	59.77	3.40	H	63.17	68.20	5.03	PK
5460	58.92	3.13	V	62.05	73.98	11.93	PK
5460	45.25	3.13	V	48.38	53.98	5.60	AV
5470	61.20	3.40	V	64.6	68.20	3.60	PK

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT20
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	57.62	3.13	H	60.75	73.98	13.23	PK
5460	44.28	3.13	H	47.41	53.98	6.57	AV
5470	60.91	3.40	H	64.31	68.20	3.89	PK
5460	58.81	3.13	V	61.94	73.98	12.04	PK
5460	45.15	3.13	V	48.28	53.98	5.70	AV
5470	61.43	3.40	V	64.83	68.20	3.37	PK

Band :	UNII 2C
Operation Mode:	802.11 n_HT40
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.81	3.13	H	57.94	73.98	16.04	PK
5460	42.18	3.13	H	45.31	53.98	8.67	AV
5470	60.72	3.40	H	64.12	68.20	4.08	PK
5460	56.97	3.13	V	60.1	73.98	13.88	PK
5460	43.65	3.13	V	46.78	53.98	7.20	AV
5470	63.45	3.40	V	66.85	73.98	7.13	PK
5470	45.86	3.40	V	49.26	53.98	4.72	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT40
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	55.05	3.13	H	58.18	73.98	15.80	PK
5460	42.31	3.13	H	45.44	53.98	8.54	AV
5470	58.12	3.40	H	61.52	68.20	6.68	PK
5460	55.96	3.13	V	59.09	73.98	14.89	PK
5460	43.73	3.13	V	46.86	53.98	7.12	AV
5470	64.36	3.40	V	67.76	73.98	6.22	PK
5470	46.34	3.40	V	49.74	53.98	4.24	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT80
Operating Frequency	5530 MHz
Channel No.	106 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.58	3.13	H	57.71	73.98	16.27	PK
5460	43.12	3.13	H	46.25	53.98	7.73	AV
5470	55.16	3.40	H	58.56	68.20	9.64	PK
5460	56.93	3.13	V	60.06	73.98	13.92	PK
5460	44.57	3.13	V	47.7	53.98	6.28	AV
5470	59.14	3.40	V	62.54	68.20	5.66	PK

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT + Distance Factor
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

[External Ant]

Band :	UNII 1
Operation Mode:	802.11 a
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	59.86	3.07	H	62.93	73.98	11.05	PK
5150	45.20	3.07	H	48.27	53.98	5.71	AV
5150	60.61	3.07	V	63.68	73.98	10.30	PK
5150	45.34	3.07	V	48.41	53.98	5.57	AV

Band :	UNII 1
Operation Mode:	802.11 n_HT20
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	59.81	3.07	H	62.88	73.98	11.10	PK
5150	43.65	3.07	H	46.72	53.98	7.26	AV
5150	62.08	3.07	V	65.15	73.98	8.83	PK
5150	45.44	3.07	V	48.51	53.98	5.47	AV

Band :	UNII 1
Operation Mode:	802.11 ac_VHT20
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	60.42	3.07	H	63.49	73.98	10.49	PK
5150	43.68	3.07	H	46.75	53.98	7.23	AV
5150	60.91	3.07	V	63.98	73.98	10.00	PK
5150	44.72	3.07	V	47.79	53.98	6.19	AV

Band :	UNII 1
Operation Mode:	802.11 n_HT40
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	62.41	3.07	H	65.48	73.98	8.50	PK
5150	45.72	3.07	H	48.79	53.98	5.19	AV
5150	63.92	3.07	V	66.99	73.98	6.99	PK
5150	47.48	3.07	V	50.55	53.98	3.43	AV

Band :	UNII 1
Operation Mode:	802.11 ac_VHT40
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	63.49	3.07	H	66.56	73.98	7.42	PK
5150	45.93	3.07	H	49	53.98	4.98	AV
5150	65.95	3.07	V	69.02	73.98	4.96	PK
5150	47.28	3.07	V	50.35	53.98	3.63	AV

Band :	UNII 1
Operation Mode:	802.11 ac_VHT80
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	53.33	3.07	H	56.40	73.98	17.58	PK
5150	42.97	3.07	H	46.04	53.98	7.94	AV
5150	61.35	3.07	V	64.42	73.98	9.56	PK
5150	46.97	3.07	V	50.04	53.98	3.94	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	53.08	2.59	H	55.67	73.98	18.31	PK
5350	39.00	2.59	H	41.59	53.98	12.39	AV
5350	59.62	2.59	V	62.21	73.98	11.77	PK
5350	43.63	2.59	V	46.22	53.98	7.76	AV

Band :	UNII 2A
Operation Mode:	802.11 n_HT20
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	53.01	2.59	H	55.60	73.98	18.38	PK
5350	38.60	2.59	H	41.19	53.98	12.79	AV
5350	60.32	2.59	V	62.91	73.98	11.07	PK
5350	43.94	2.59	V	46.53	53.98	7.45	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT20
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	54.42	2.59	H	57.01	73.98	16.97	PK
5350	38.67	2.59	H	41.26	53.98	12.72	AV
5350	64.43	2.59	V	67.02	73.98	6.96	PK
5350	43.81	2.59	V	46.4	53.98	7.58	AV

Band :	UNII 2A
Operation Mode:	802.11 n_HT40
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	59.09	2.59	H	61.68	73.98	12.30	PK
5350	43.21	2.59	H	45.8	53.98	8.18	AV
5350	65.51	2.59	V	68.1	73.98	5.88	PK
5350	44.44	2.59	V	47.03	53.98	6.95	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT40
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	65.20	2.59	H	67.79	73.98	6.19	PK
5350	45.25	2.59	H	47.84	53.98	6.14	AV
5350	66.91	2.59	V	69.5	73.98	4.48	PK
5350	46.70	2.59	V	49.29	53.98	4.69	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT80
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	54.42	2.59	H	57.01	73.98	16.97	PK
5350	40.70	2.59	H	43.29	53.98	10.69	AV
5350	64.56	2.59	V	67.15	73.98	6.83	PK
5350	48.37	2.59	V	50.96	53.98	3.02	AV

Band :	UNII 2C
Operation Mode:	802.11 a
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.22	3.13	H	57.35	73.98	16.63	PK
5460	40.58	3.13	H	43.71	53.98	10.27	AV
5460	56.31	3.13	V	59.44	73.98	14.54	PK
5460	42.70	3.13	V	45.83	53.98	8.15	AV

Band :	UNII 2C
Operation Mode:	802.11 n_HT20
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	55.43	3.13	H	58.56	73.98	15.42	PK
5460	40.58	3.13	H	43.71	53.98	10.27	AV
5460	56.34	3.13	V	59.47	73.98	14.51	PK
5460	42.71	3.13	V	45.84	53.98	8.14	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT20
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.28	3.13	H	57.41	73.98	16.57	PK
5460	41.25	3.13	H	44.38	53.98	9.60	AV
5460	55.92	3.13	V	59.05	73.98	14.93	PK
5460	42.90	3.13	V	46.03	53.98	7.95	AV

Band :	UNII 2C
Operation Mode:	802.11 n_HT40
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.82	3.13	H	57.95	73.98	16.03	PK
5460	41.55	3.13	H	44.68	53.98	9.30	AV
5470	53.92	3.40	H	57.32	68.20	10.88	PK
5460	56.02	3.13	V	59.15	73.98	14.83	PK
5460	42.82	3.13	V	45.95	53.98	8.03	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT40
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	53.85	3.13	H	56.98	73.98	17.00	PK
5460	41.28	3.13	H	44.41	53.98	9.57	AV
5470	55.13	3.40	H	58.53	68.20	9.67	PK
5460	55.02	3.13	V	58.15	73.98	15.83	PK
5460	42.45	3.13	V	45.58	53.98	8.40	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT80
Operating Frequency	5530 MHz
Channel No.	106 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	56.81	3.13	H	59.94	73.98	14.04	PK
5460	42.51	3.13	H	45.64	53.98	8.34	AV
5470	52.06	3.40	H	55.46	68.20	12.74	PK
5460	56.98	3.13	V	60.11	73.98	13.87	PK
5460	45.08	3.13	V	48.21	53.98	5.77	AV


Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT + Distance Factor
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

[Internal Ant]


■ RESULT PLOTS (Worst Case: Z-V)

Radiated Restricted Band Edges plot – Peak Reading (802.11a, Ch.64)

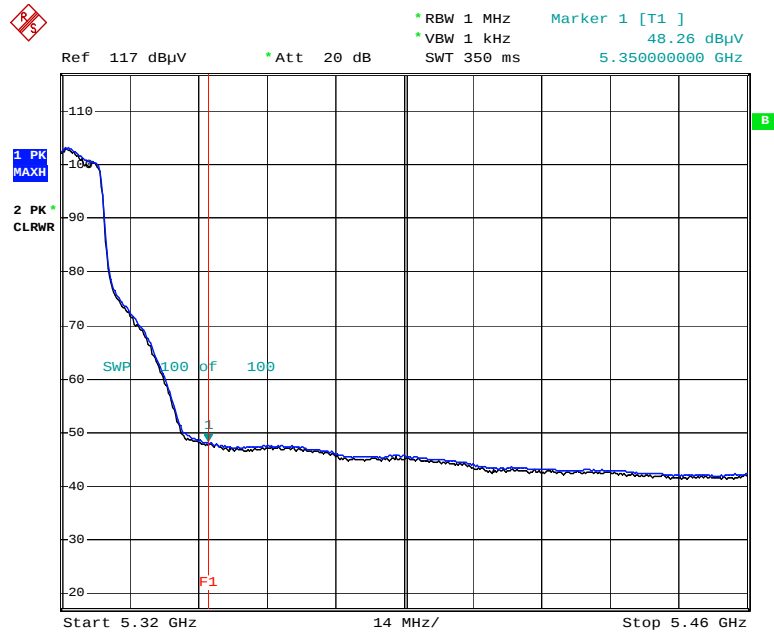

Date: 29.SEP.2018 06:55:19

Radiated Restricted Band Edges plot – Peak Reading (802.11a, Ch.64)

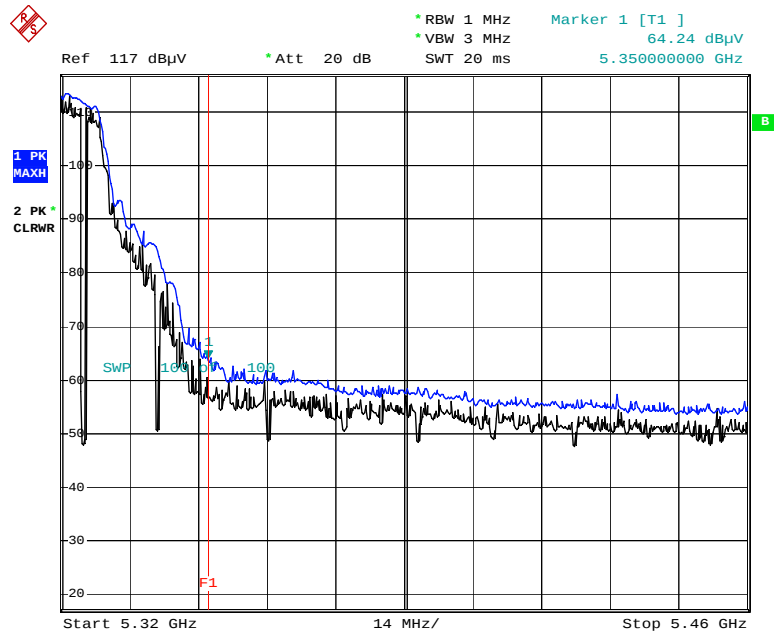

Date: 29.SEP.2018 06:56:14

[Internal Ant]


■ RESULT PLOTS (UNII 3)

Radiated Restricted Band Edges plot – Peak Reading (802.11a, Ch.165)




Date: 1.OCT.2018 07:39:12

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT20, Ch.165)

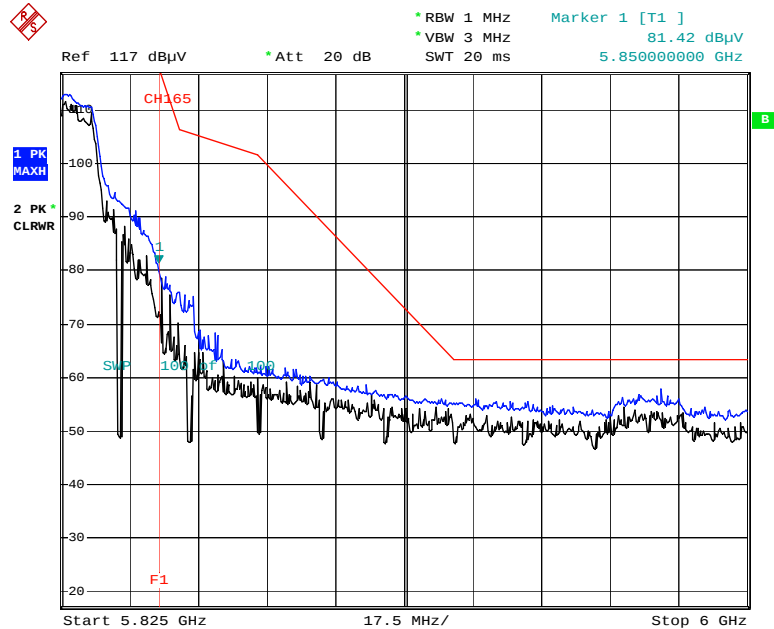


Date: 1.OCT.2018 07:37:46


Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT20, Ch.165)

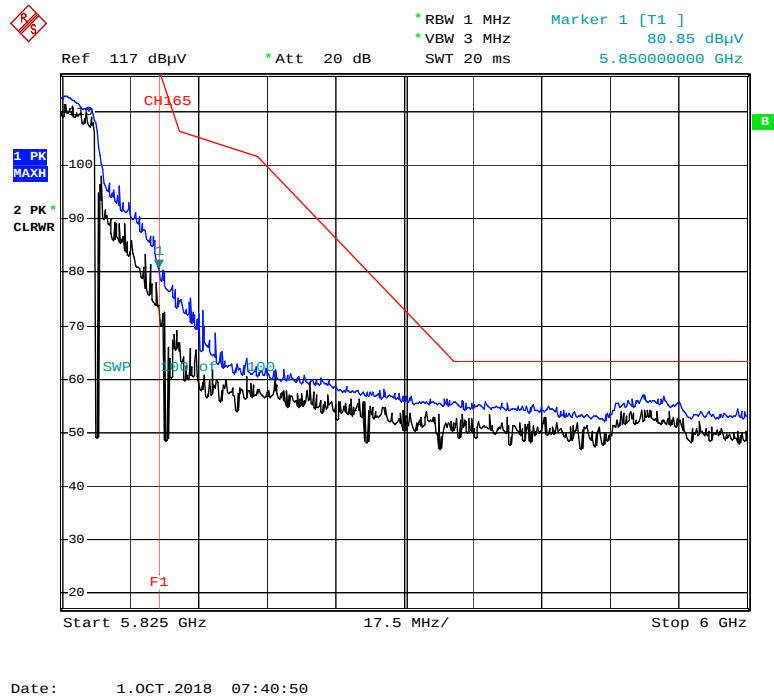

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT40, Ch.159)

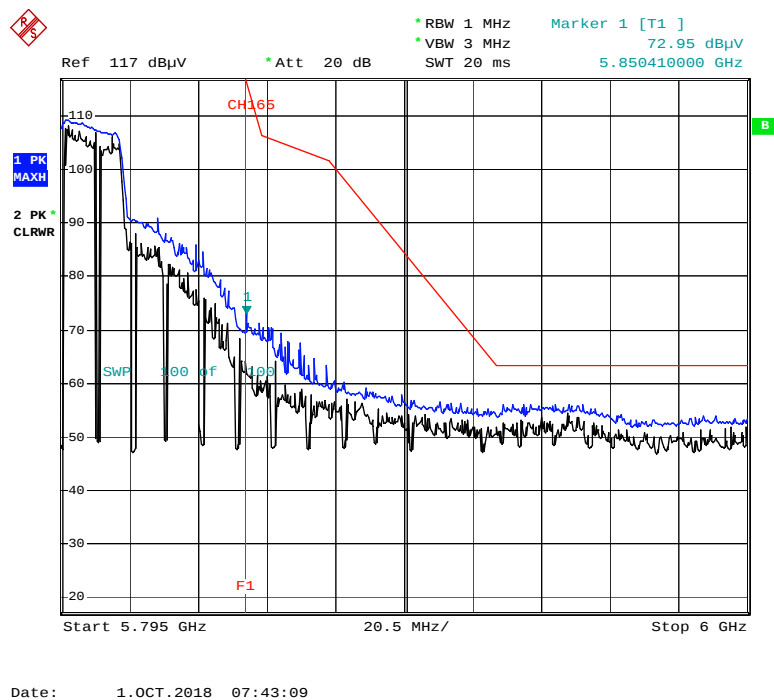


Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT40, Ch.159)

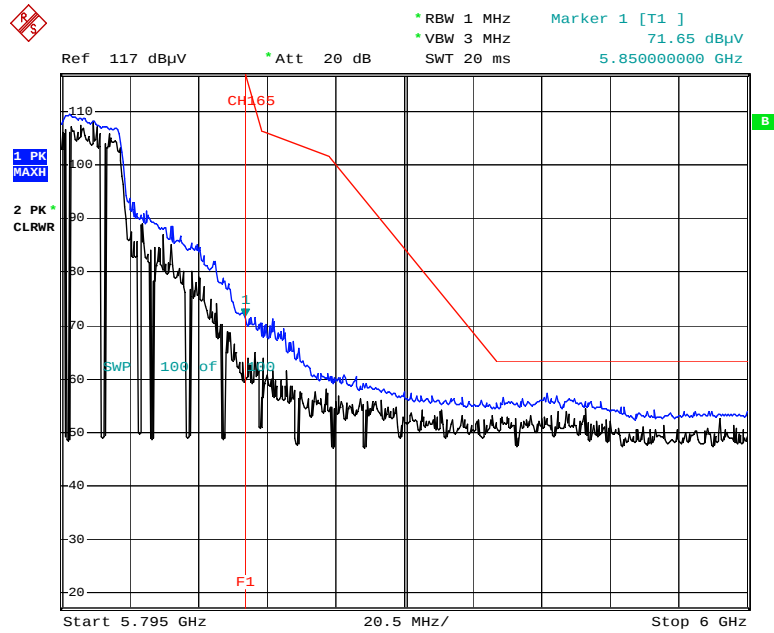

Date: 1.OCT.2018 07:48:45

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT80, Ch.155)

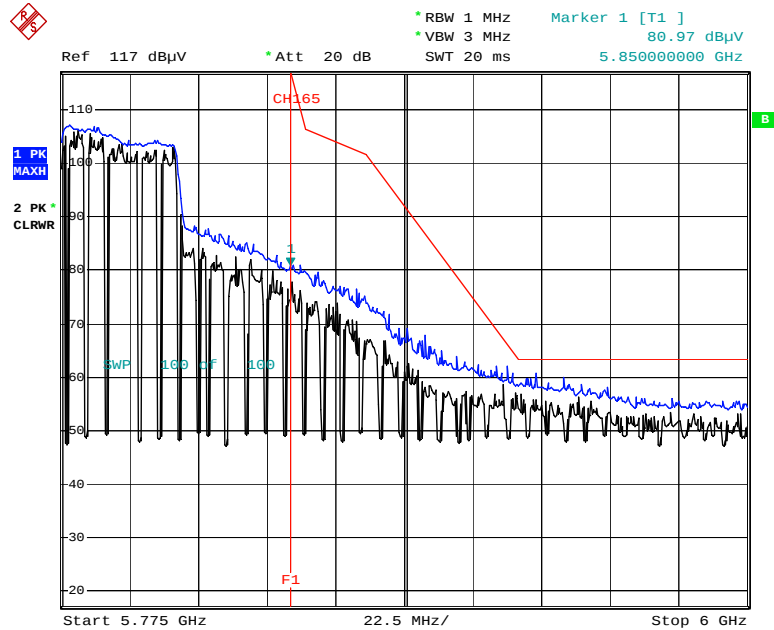


Date: 1.OCT.2018 07:51:35

[External Ant]


■ RESULT PLOTS (Worst Case: X-V)

Radiated Restricted Band Edges plot – Average Reading (802.11ac_VHT80, Ch.58)

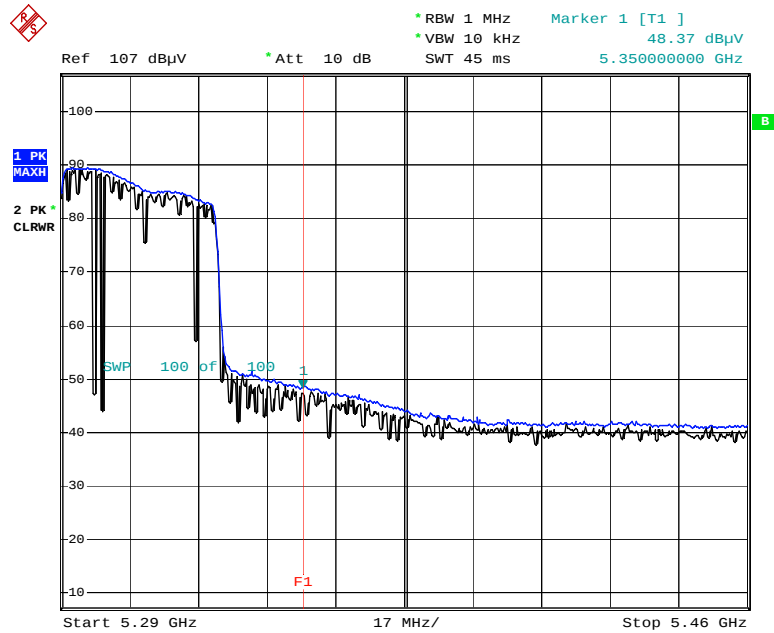


Date: 24.SEP.2018 02:20:39

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT80, Ch.58)

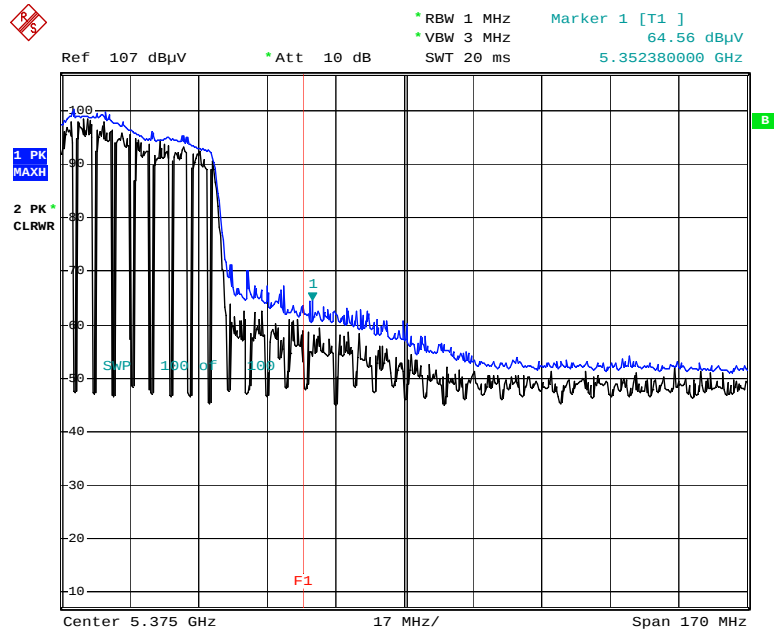


Date: 24.SEP.2018 02:21:37

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT20, Ch.165)

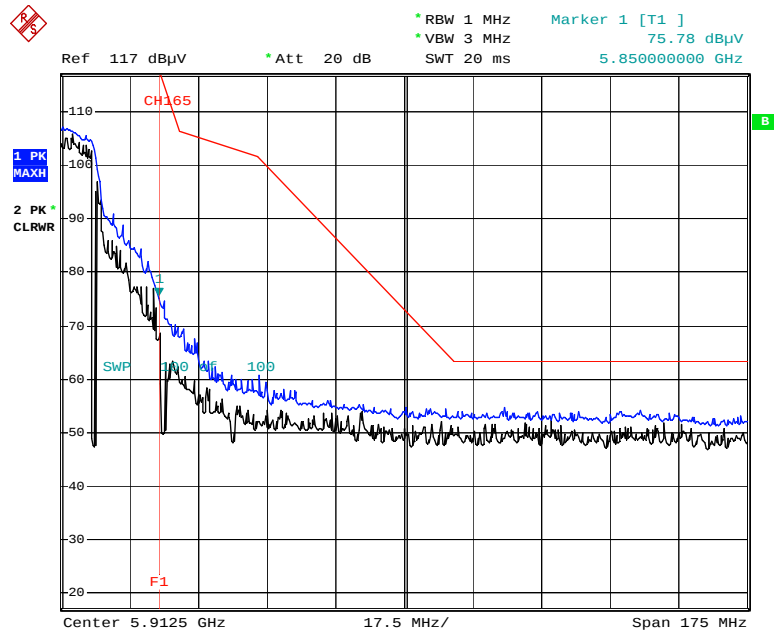


Date: 24.SEP.2018 07:35:00

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT40, Ch.159)

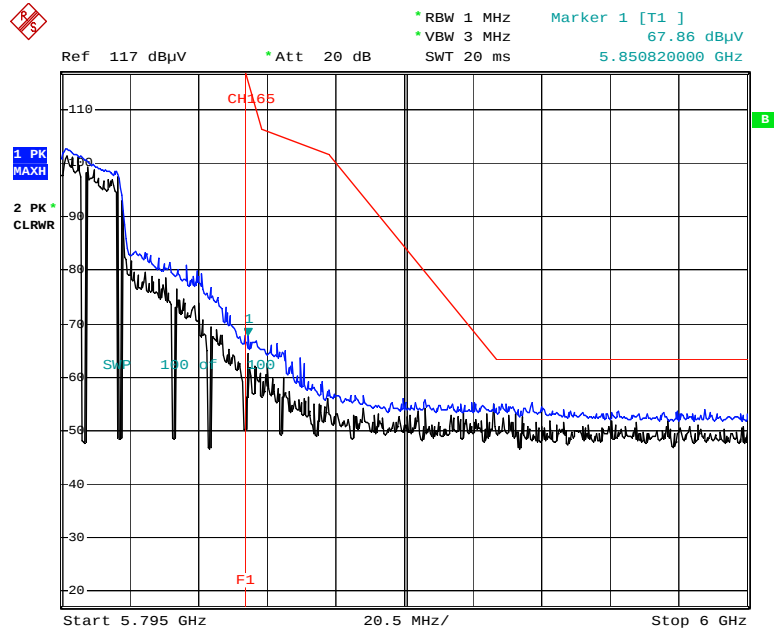


Date: 24.SEP.2018 07:41:21

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT40, Ch.159)

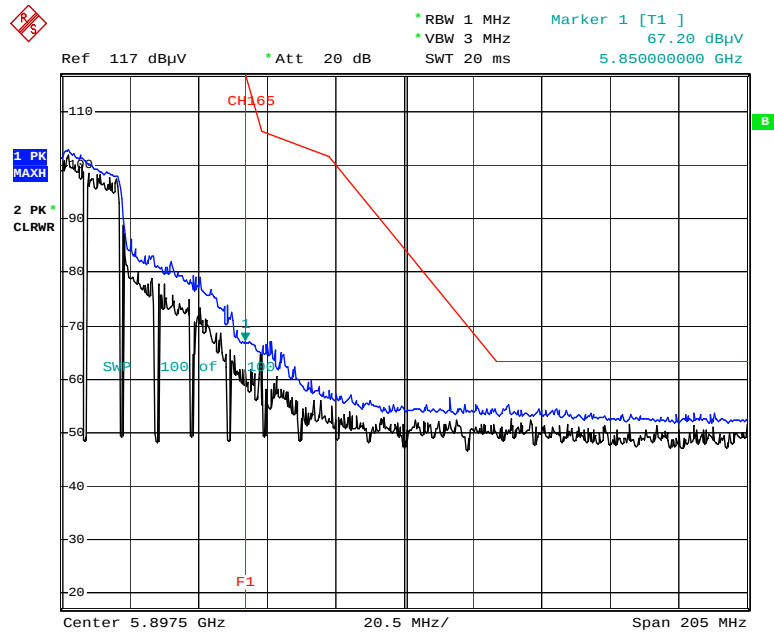

Date: 24.SEP.2018 07:43:15

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT80, Ch.155)

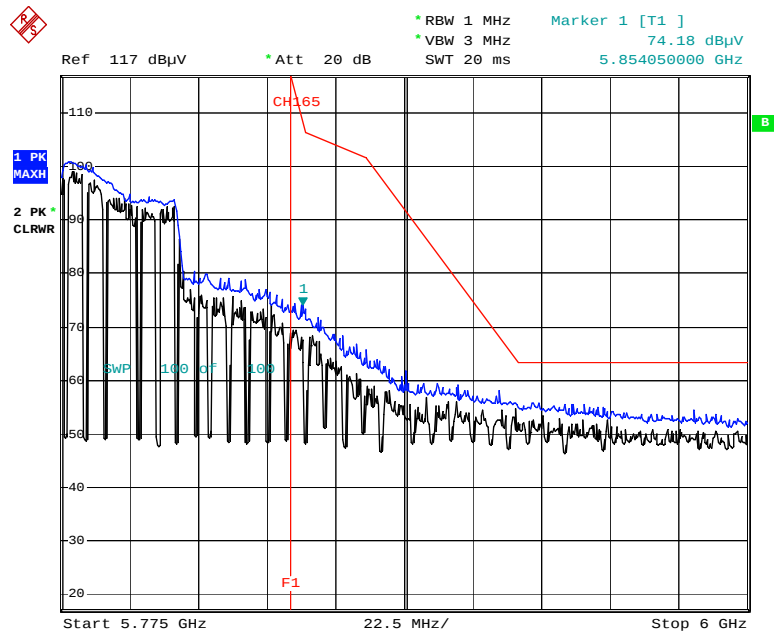

Date: 24.SEP.2018 07:48:09

10.7.3 RECEIVER SPURIOUS EMISSIONS

IC Rule(s) RSS-Gen
 Test Requirements: Blow the table
 Operating conditions: Under normal test conditions
 Method of testing: Radiated

S/A. Settings: F < 1 GHz: RBW: 120 kHz, VBW: 300 kHz (Quasi Peak)
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)
 Mode of operation: Receive

Frequency (MHz)	Field Strength (microvolts/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

Operation Mode: Receive:

30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

10.8 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

Note : We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

11. LIST OF TEST EQUIPMENT

11.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/20/2017	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/30/2018	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/22/2017	Annual	MY49431210
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2017	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/17/2018	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

11.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/09/2018	Biennial	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	11/21/2017	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/19/2018	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/28/2018	Annual	101068-SZ
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	07/16/2018	Annual	4
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	07/10/2018	Annual	5
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2018	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/07/2018	Annual	2
WEINSCHTEL	56-10 / Attenuator(10 dB)	10/13/2017	Annual	72316
CERNEX	CBLU1183540 / Broadband Low Noise Amplifier	01/03/2018	Annual	24613
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	01/03/2018	Annual	24615
CERNEX	CBL18265035 / Power Amplifier	01/10/2018	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/27/2018	Annual	3000C000276

Note:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Model : FSV40-N
 - Use date of equipment : September 29, 2018 ~ October 05, 2018

12. APPENDIX A_EUT AND TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1810-FI004-P
2	HCT-RF-1810-FI005-P
3	HCT-RF-1810-FI006-P
4	HCT-RF-1810-FI007-P