

# SAR TEST REPORT

## Specific Absorption Rate

Date of Issue : July 10, 2008

Test Report No : MCCL-3-08-083

Equipment Under Test (EUT) : **PCS GSM/ EDGE Phone with Bluetooth**

Model Name(s) : **KP270**

Manufacturer : **LG Electronics, Inc.**

Applicant : **LG Electronics, Inc.**

Application Type : **Certification**

FCC Rule Part(s) : **§ 2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]**

FCC Classification : **Licensed Transmitter Held to Ear (PCE)**

Test Result : **PASS**

### SUMMARY

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in European standard EN50360 : 2001 and had been tested in accordance with the measurement procedures specified in European standard EN50361:2001, IEEE 1528 – Dec. 2003, FCC/OET bulletin 65 SUP,plement C(2001) , Public notice 02-1438(2002), ANSI IEEE standard C95.1(2005) and C95.3(2002)

※ The test results in this test report apply only to sample(s) tested.



Issued under the authority of  
E. S. Park / Technical Manager  
MCCL



Reviewed by  
S. K. Yoon /Vice Technical Manager  
MCCL



Prepared by  
C. H. Jeong / Test Engineer  
MCCL

---

**TABLE OF CONTENTS**

|                                                                                                             |           |
|-------------------------------------------------------------------------------------------------------------|-----------|
| <b>1. TEST RESULT SUMMARY .....</b>                                                                         | <b>3</b>  |
| <b>2. DESCRIPTION OF THE DEVICE UNDER TEST.....</b>                                                         | <b>4</b>  |
| 2.1 Antenna Description.....                                                                                | 4         |
| 2.2 Device Description.....                                                                                 | 4         |
| <b>3. INTRODUCTION.....</b>                                                                                 | <b>5</b>  |
| <b>4. SAR MEASUREMENT SYSTEM .....</b>                                                                      | <b>6</b>  |
| 4.1 SAR Measurement Setup.....                                                                              | 6         |
| 4.2 DASY4 E-Field Probe System.....                                                                         | 7         |
| 4.3 Phantom.....                                                                                            | 9         |
| 4.4 Simulating Mixture Characterization.....                                                                | 10        |
| 4.5 Device Holder for Transmitters.....                                                                     | 11        |
| 4.6 Validation Dipole .....                                                                                 | 11        |
| <b>5. SAR MEASUREMENT PROCEDURE.....</b>                                                                    | <b>12</b> |
| <b>6. DEFINITION OF REFERENCE POINT.....</b>                                                                | <b>13</b> |
| 6.1 EAR Reference Point.....                                                                                | 13        |
| 6.2 Handset Reference Points.....                                                                           | 14        |
| <b>7. TEST CONFIGURATION POSITIONS.....</b>                                                                 | <b>15</b> |
| 7.1 Positioning for Cheek/Touch.....                                                                        | 15        |
| 7.2 Positioning for Ear / 15° Tilt.....                                                                     | 16        |
| 7.3 Body Holster /Belt Clip Configuration.....                                                              | 17        |
| <b>8. MEASUREMENT UNCERTAINTY.....</b>                                                                      | <b>18</b> |
| <b>9. EN50360 RF EXPOSURE LIMITS.....</b>                                                                   | <b>19</b> |
| <b>10. SYSTEM VERIFICATION.....</b>                                                                         | <b>20</b> |
| <b>11. SAR Evaluation Considerations for Handsets with Multiple Transmitters<br/>    and Antennas .....</b> | <b>22</b> |
| <b>12. MEASUREMENT RESULTS .....</b>                                                                        | <b>23</b> |
| <b>13. TEST EQUIPMENT.....</b>                                                                              | <b>25</b> |
| <b>14. REFERENCES.....</b>                                                                                  | <b>26</b> |
| <b>APPENDIX A: Validation Test Data.....</b>                                                                | <b>27</b> |
| <b>APPENDIX B: SAR Test Data.....</b>                                                                       | <b>29</b> |
| <b>APPENDIX C: Calibration Certificates.....</b>                                                            | <b>42</b> |

## 1. TEST RESULT SUMMARY

Model Name(s) : KP270  
 Date of Test : July 09, 2008  
 Date of Issue : July 10, 2008  
 Address of Test Site : 60-39, Kasan-Dong, Kumchon-Gu, Seoul 153-801, Korea.  
 Responsible Test Engineer : Eui-Soon Park  
 Test Engineer : Chan-ho Jeong  
 EUT Type : PCS GSM/ EDGE Phone with Bluetooth  
 Tx Frequency : 1850.20 ~ 1909.80 MHz (PCS1900)  
  
 Rx Frequency : 1930.20 ~ 1989.80 MHz (PCS1900)  
  
 Transmit Output Power : GSM1900: 29.5 dBm

### Maximum Results Found During SAR Evaluation

#### 1. Head Configuration

| ANSI / IEEE C95.1(2005) - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |          |                       |       |          | 1.6 W/kg<br>averaged over 1 gram |                  |                 |            |
|----------------------------------------------------------------------------------------------------|-----|----------|-----------------------|-------|----------|----------------------------------|------------------|-----------------|------------|
| Frequency                                                                                          |     | Mod.     | Conducted Power (dBm) |       | Battery  | Device Test Position             | Antenna Position | Slider Position | SAR (W/kg) |
| MHz                                                                                                | Ch. |          | Start                 | End   |          |                                  |                  |                 |            |
| 1880.00                                                                                            | 661 | PCS 1900 | 29.25                 | 29.20 | Standard | Right Touch                      | Fixed            | Down            | 0.264      |

#### 2. Body Worn Configuration

| ANSI / IEEE C95.1(2005) - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |           |                       |       |          | 1.6 W/kg<br>averaged over 1 gram |                  |                 |            |
|----------------------------------------------------------------------------------------------------|-----|-----------|-----------------------|-------|----------|----------------------------------|------------------|-----------------|------------|
| Frequency                                                                                          |     | Mod.      | Conducted Power (dBm) |       | Battery  | Device Test Position             | Antenna Position | Slider Position | SAR (W/kg) |
| MHz                                                                                                | Ch. |           | Start                 | End   |          |                                  |                  |                 |            |
| 1880.00                                                                                            | 661 | GPRS 1900 | 29.20                 | 29.17 | Standard | 2.0 [ Rear ]                     | Fixed            | Up              | 0.337      |

#### 3. Measurement Uncertainty

|                               |                                  |
|-------------------------------|----------------------------------|
| Combine Standard Uncertainty  | 9.6 (k=1)                        |
| Extended Standard Uncertainty | 19.2 (k=2, 95% CONFIDENCE LEVEL) |

## 2. DESCRIPTION OF THE DEVICE UNDER TEST

The FCC rules for evaluating portable devices for RF exposure compliance are contained in 47 CFR §2.1093. For purposes of RF exposure evaluation, a portable device is defined as a transmitting device designed to be used with any part of its radiating structure in direct contact with the user's body or within 1.5 centimeters of the body of a user or bystanders under normal operating conditions. This category of devices would include hand-held cellular and PCS telephones that incorporate the radiating antenna into the hand-piece and wireless transmitters that are carried next to the body. Portable devices are evaluated with respect to SAR limits for RF exposure. The applicable SAR limit for portable transmitters used by consumers is 1.6 watts/kg, which is averaged over any one gram of tissue defined as a tissue volume in the shape of a cube.

### 2.1 Antenna Description

|                 |                          |
|-----------------|--------------------------|
| Type :          | Fixed                    |
| Location :      | The inside of the device |
| Configuration : | Intenna Type Antenna     |

### 2.2 Device Description

|                                |                                    |
|--------------------------------|------------------------------------|
| Manufacturer :                 | LG Electronics, Inc.               |
| FCC ID :                       | BEJKP270                           |
| Trade Name :                   | LG                                 |
| Model Name :                   | KP270                              |
| Serial No :                    | #1                                 |
| EUT Type :                     | PCS GSM/ EDGE Phone with Bluetooth |
| Mode(s) of Operation :         | PCS 1900                           |
| Transmit Output Power :        | PCS 1900 : Level 0 (29.5 dBm)      |
| Mode(s) of Operation :         | GSM / GPRS                         |
| Modulation Mode(s) :           | GSM                                |
| Duty Cycle :                   | 8.3 / 2.075 (GSM / GPRS)           |
| Transmitting Frequency Range : | 1850.20 ~ 1909.80 MHz (GSM1900)    |
| Battery Type :                 | Standard                           |

### 3. INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable device.[1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) For localized specific absorption rate (SAR) in IEEE/ANSI C95.1-2005 Standard for safety Levels with Respect to Human Exposure to Radio Frequency Electronic Fields, 3 kHz to 300 GHz. (c) 1992 by the institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.[2] The measurement procedure described in IEEE/ANSI C95.3-2005 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave[3] is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (ICNIRP) in Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields,” ICNIRP Report No. 86 (c) ICNIRP, 1986, Bethesda, MD20814.[6] SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). it is also defined as the rate of rf energy absorption per unit mass at a point in an absorbing body. (see Fig. 2.1.)

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dV} \right)$$

Figure 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

Where:

- σ = conductivity of the tissue-simulant material (S/m)
- ρ = mass density of the tissue-simulant material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

## 4. SAR MEASUREMENT SYSTEM

An SAR measurement system usually consists of a small diameter isotropic electric field probe, a multiple axis probe positioning system, a test device holder, one or more phantom models, the field probe instrumentation, a computer and other electronic equipment for controlling the probe and making the measurements. Other supporting equipment, such as a network analyzer, power meters and RF signal generators, are also required to measure the dielectric parameters of the simulated tissue media and to verify the measurement accuracy of the SAR system.

### 4.1 SAR Measurement Setup

#### Robotic System

Measurement are performed using the DASY4 dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG(SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Stäubli), robot controller, Pentium IV computer, near-field probe, probe alignment sensor, and the SAM twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 4.1)

#### System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The pc consists of the Intel Pentium IV 2.4 GHz computer with Windows 2000 system and SAR measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

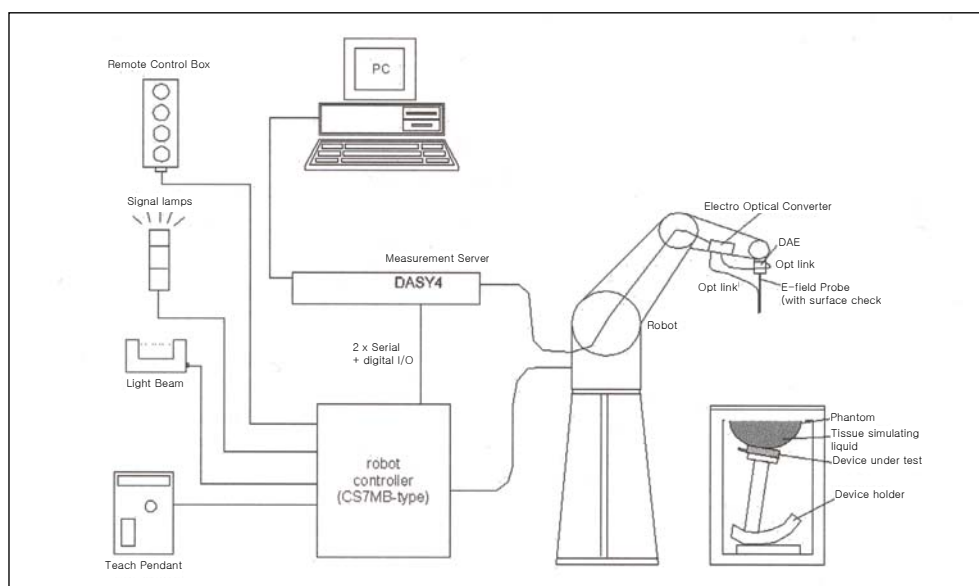


Figure 4.1 SAR Measurement System Setup

### **System Electronics**


The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical Downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [7].

### **4.2 DASY4 E-Field Probe System**

The SAR measurements were conducted with the dosimetric probe ET3DV6, designed in the classical triangular configuration [7] (see Fig. 4.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box in the robot arm and provides an automatic detection transmitter, the other half to a synchronized receiver. As the probe approach the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches coupling is zero. The distance of the coupling maximum to the surface is probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

### **Probe Specifications**

|                        |                                                                                                                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction:</b>   | Symmetrical design with triangular core<br>Built-in optical fiber for surface detection system<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| <b>Calibration:</b>    | Basic Broad Band Calibration: in air: 10-3000 MHz<br>Conversion Factors (CF) for HSL 900 and HSL 1800<br>Additional CF for other liquids and frequencies upon request                                              |
| <b>Frequency:</b>      | 10 MHz to 3 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)                                                                                                                                                         |
| <b>Directivity:</b>    | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.4$ dB in HSL (rotation normal to probe axis)                                                                                                            |
| <b>Dynamic Range:</b>  | 5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                                                                                 |
| <b>Optical Surface</b> | $\pm 0.2$ mm repeatability in air and clear liquids over                                                                                                                                                           |
| <b>Detection:</b>      | diffuse reflecting surfaces                                                                                                                                                                                        |
| <b>Dimensions:</b>     | Overall length: 330 mm (Tip: 16 mm)<br>Tip diameter: 6.8 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.7 mm                                                                                     |
| <b>Application:</b>    | General dosimetric measurements up to 2.5GHz<br>Compliance tests of mobile phones<br>Fast automatic scanning in arbitrary phantoms                                                                                 |



*Figure 4.2 Isotropic  
E-Field Probe*

## Probe Calibration Process

### Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in [8] with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in [9] and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

### Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz (see Fig. 4.3), and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

### Temperature Assessment \*

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe. (see Fig. 4.4)

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

$\Delta t$  = exposure time (30 seconds),

$C$  = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T/\Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

$\sigma$  = simulated tissue conductivity,

$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)




Figure 4.3 E-Field and Temperature measurements at 900MHz [7]

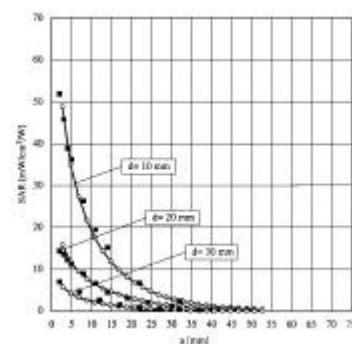


Figure 4.4 E-Field and Temperature measurements at 1.9GHz [7]

### 4.3 Phantom

The SAM Twin Phantom V4.0 is constructed of the fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 4.5)



Figure 4.5 SAM Twin Phantom

#### **Phantom Specification**

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction:</b>    | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. |
| <b>Shell Thickness:</b> | $2 \pm 0.2$ mm; Center ear point: $6 \pm 0.2$ mm                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Filling:</b>         | Volume Approx. 25 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Dimensions:</b>      | Height: adjustable feet; Length: 1000 mm; Width: 500 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

#### 4.4 Brain & Muscle Simulating Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose(HEC) gelling agent and saline solution (see Table 4.1). Preservation with a bacteriacide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been specified in P1528 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations. The mixture characterizations used for the brain and muscle tissue simulation liquids are according to the data by C. Gabriel and G. Hartagrove [13]. (see Table 4.2)

| INGREDIENTS<br>(% by weight) | 835MHz |        | 1900MHz |        |
|------------------------------|--------|--------|---------|--------|
|                              | Brain  | Muscle | Brain   | Muscle |
| De-ionized water             | 41.75  | 52.50  | 54.90   | 40.40  |
| DGBE                         | 0.000  | 0.000  | 44.92   | 0.000  |
| SUGAR                        | 56.00  | 45.00  | 0.000   | 58.00  |
| SALT                         | 1.450  | 1.400  | 0.180   | 0.500  |
| BACTERIACIDE                 | 0.100  | 0.100  | 0.000   | 0.100  |
| HEC                          | 1.000  | 1.000  | 0.000   | 1.000  |
| Dielectric Constant Target   | 41.50  | 55.20  | 40.00   | 53.30  |
| Conductivity (S/m) Target    | 0.900  | 0.970  | 1.400   | 1.520  |

*Table. 4.1 Composition of the Tissue Equivalent Matter*

#### 4.5 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device (see Fig. 4.6) enables the rotation of the accurately, and repeatably be positioned according to the IEC, IEEE, CENELEC, FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

\*Note : A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [12]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure. 4.6 Device Holder

#### 4.6 Validation Dipole

The reference dipole should have a return loss better than  $-20$  dB (measured in the setup) at the resonant frequency to reduce the uncertainty in the power measurement.

##### Validation Dipole Specifications

|                          |                                                                                                                                                                                                                  |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction:</b>     | Symmetrical dipole with $1/4$ balun. Enables measurement of feedpoint impedance with NWA. Matched for use near flat phantoms filled with head simulating solutions. Includes distance holder and tripod adaptor. |
| <b>Calibration:</b>      | Calibrated SAR value for specified position and input power<br>at the flat phantom in simulating solution                                                                                                        |
| <b>Frequency:</b>        | 835 MHz, 1900 MHz                                                                                                                                                                                                |
| <b>Return Loss:</b>      | $> 20$ dB at specified validation position                                                                                                                                                                       |
| <b>Power Capability:</b> | $> 100$ W ( $f < 1$ GHz); $> 40$ W ( $f > 1$ GHz)                                                                                                                                                                |
| <b>Dimensions:</b>       | D835V2: dipole length: 161 mm;<br>overall height: 330 mm<br>D1900V2: dipole length: 68 mm;<br>overall height: 300 mm                                                                                             |



Figure 4.7 Validation Dipole

## 5. SAR MEASUREMENT PROCEDURE

The evaluation was performed using the following procedure:

- 1) The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.
- 2) The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm x 15mm.
- 3) Based on the area scan data, the area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 34mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
  - a. The data at the surface was extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm [15]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
  - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions) [15][16]. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
- 4) The SAR reference value, at the same location as procedure #1, was re-measured. If the value changed by more than 5%, the evaluation is repeated.

## 6. DEFINITION OF REFERENCE POINT

### 6.1 EAR Reference Point

Figure 6.1 shows the front, back and side views of the SAM Twin Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.2. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Fig. 6.3). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

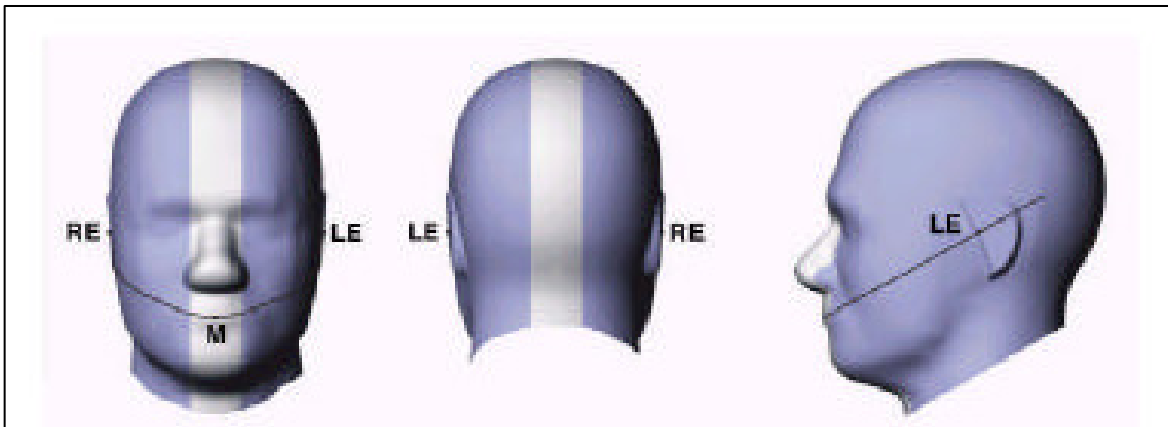


Figure 6.1 Front, back and side view of SAM Twin Phantom

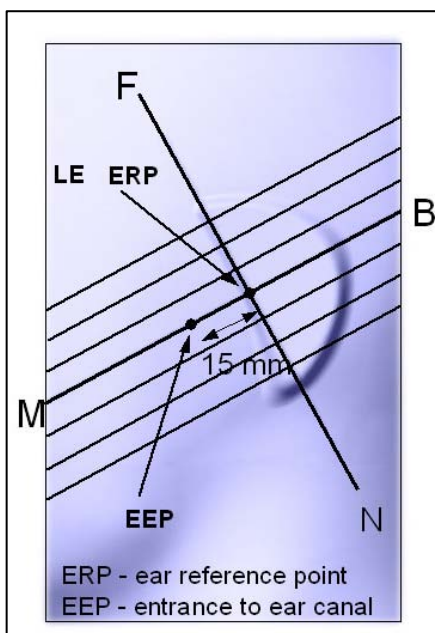


Figure 6.2 Close-Up, side view of ERP

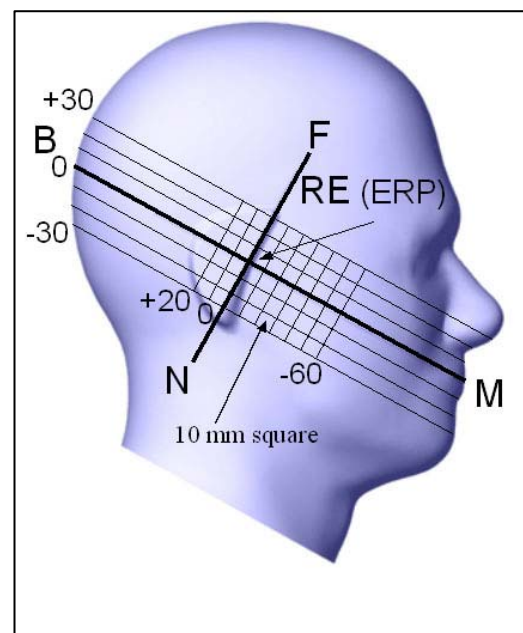


Figure 6.3 Side view of the phantom showing relevant markings

## 6.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Fig. 6.4). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

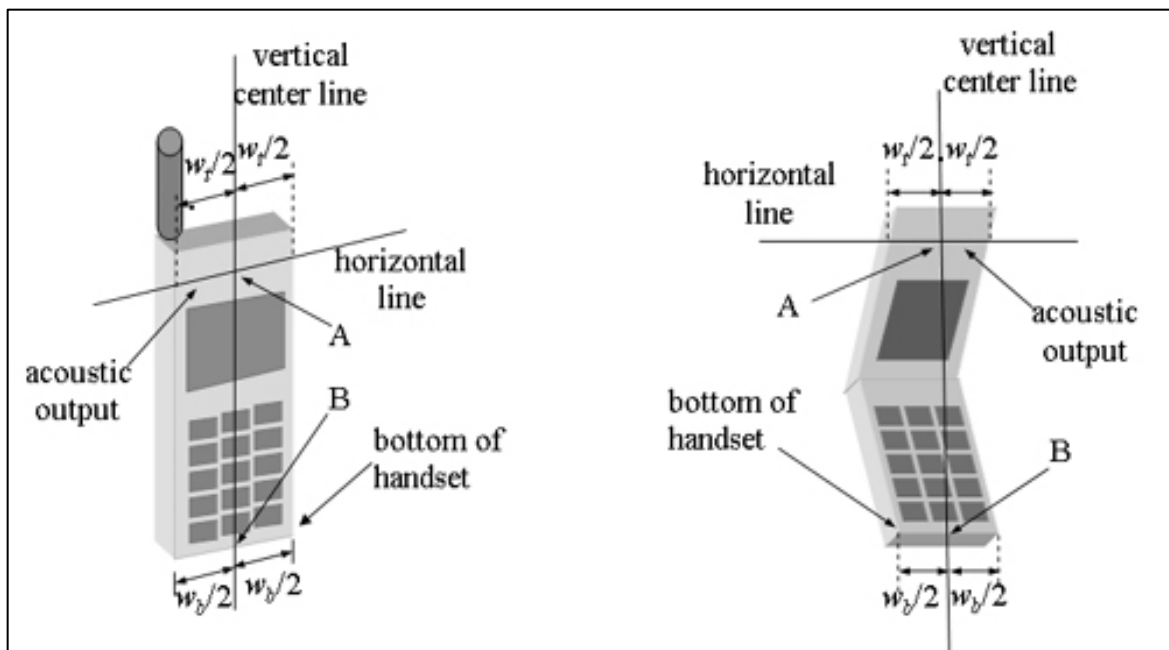


Figure 6.4 Handset Vertical Center & Horizontal Line Reference Points

## 7. TEST CONFIGURATION POSITIONS

### 7.1 Positioning for Cheek/Touch

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover. (If the phone can also be used with the cover closed, both configurations must be tested.)
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A on Fig. 6.4), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Fig. 6.4). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Fig. 6.4), especially for clamshell handsets, handsets with lip pieces, and other irregularly-shaped handsets.
- 3) Position the handset close to the surface of the phantom touch that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Fig. 7.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the pinna (cheek). (see Fig. 7.1) The physical angles of rotation should be noted.

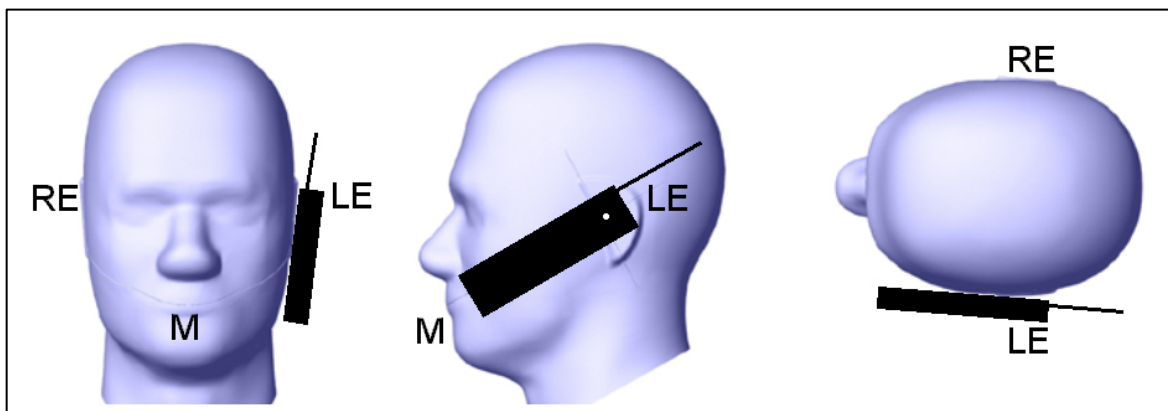


Figure 7.1 Front, Side and Top View of Cheek/Touch Position

## 7.2 Positioning for Ear / 15° Tilt

With the test device aligned in the "Cheek/Touch Position":

- 1) While maintaining the orientation of the phone retract the phone parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
- 2) Rotate the phone around the horizontal line by 15 degree.
- 3) While maintaining the orientation of the phone, move the phone parallel to the reference plane until any part of the phone touches the head. (In this position, point A will be located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the phone shall be reduced. The tilted position is obtained if any part of the phone is in contact of the ear as well as a second part of the phone is contact with the head. (see Fig. 7.2)

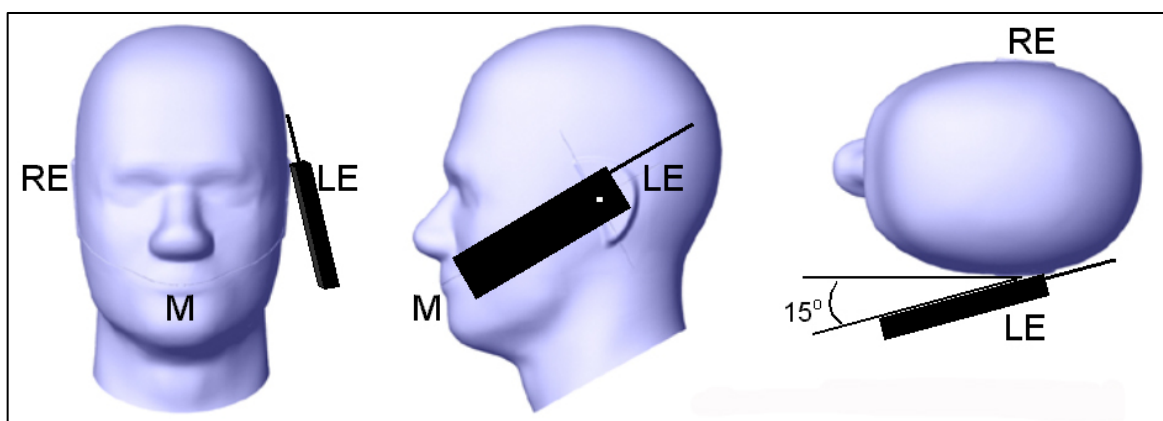


Figure 7.2 Front, Side and Top View of Ear/15 Tilt Position

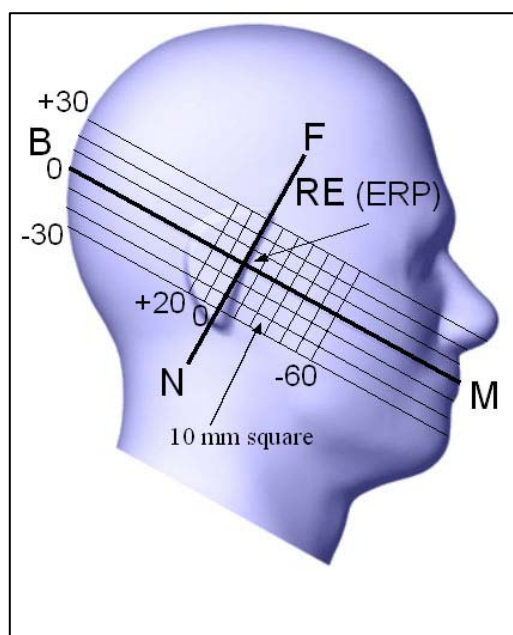


Figure 7.3 Side view of the phantom showing relevant markings

### 7.3 Body Holster /Belt Clip Configurations

Body-worn operation configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. (see Fig. 7.4) A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.


Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all case SAR measurements are performed to investigate the worst case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

In order for users to be aware of the body-worn operation requirements for meeting RF exposure compliance, operation instructing instructions and cautions statements are included in the user's manual.

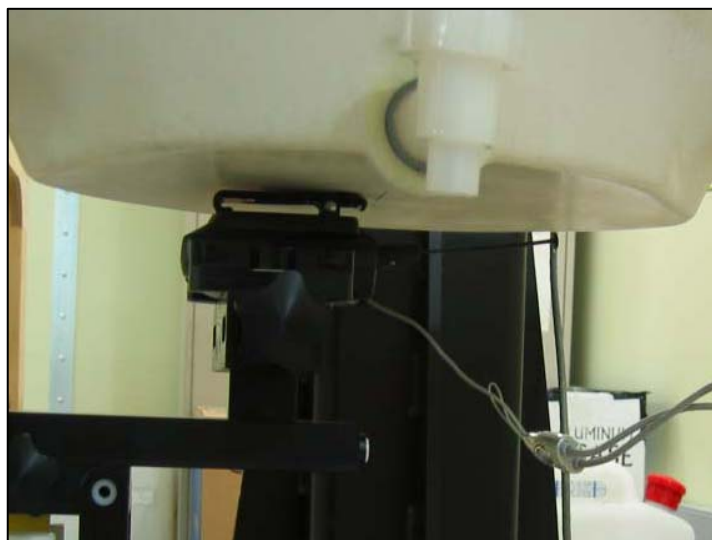

*Figure 7.4 Body Holster Configuration*

## 8. MEASUREMENT UNCERTAINTY

|                           | Description                       | Type | Prob. Dist. | Divider    | C <sub>i</sub> | Std. Unc. | V <sub>eff</sub> |
|---------------------------|-----------------------------------|------|-------------|------------|----------------|-----------|------------------|
| Measure,<br>Equipment     | Probe Calibration                 | B    | Normal      | 1          | 1              | ± 4.8%    | 8                |
|                           | Axial Isotropy                    | B    | Rectan.     | $\sqrt{3}$ | 0.7            | ± 1.9%    | 8                |
|                           | Hemispherical Isotropy            | B    | Rectan.     | $\sqrt{3}$ | 0.7            | ± 3.9%    | 8                |
|                           | Boundary Effect                   | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 0.6%    | 8                |
|                           | Linearity                         | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 2.7%    | 8                |
|                           | Detection Limits                  | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 0.0%    | 8                |
|                           | Readout Electronics               | B    | Normal      | 1          | 1              | ± 1.0%    | 8                |
|                           | Response Time                     | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 0.0%    | 8                |
|                           | Integration Time                  | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 1.0%    | 8                |
|                           | RF Ambient Conditions             | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 1.7%    | 8                |
|                           | Scanning System                   | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 0.2%    | 8                |
|                           | Phantom Shell                     | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 2.3%    | 8                |
|                           | Probe Positioning                 | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 1.7%    | 8                |
| Mechanical<br>Constraints | Device Positioning                | A    | Normal      | 1          | 1              | ± 2.8%    | 71               |
|                           | Power Drift                       | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 2.9%    | 8                |
| Physical<br>Parameter     | Liquid Conductivity (Target)      | B    | Rectan.     | $\sqrt{3}$ | 0.7            | ± 2.0%    | 8                |
|                           | Liquid Conductivity (Measurement) | B    | Rectan.     | $\sqrt{3}$ | 0.7            | ± 1.7%    | 8                |
|                           | Liquid Permittivity (Target)      | B    | Rectan.     | $\sqrt{3}$ | 0.6            | ± 1.7%    | 8                |
|                           | Liquid Permittivity (Measurement) | B    | Rectan.     | $\sqrt{3}$ | 0.6            | ± 1.5%    | 8                |
| Mechanical<br>Constraints | Extrapolation and Integration     | B    | Rectan.     | $\sqrt{3}$ | 1              | ± 0.6%    | 8                |
| <b>Combined</b>           | <b>± 9.6 %</b>                    |      |             |            |                |           |                  |
| <b>Expanded</b>           | <b>± 19.2 % (k =2)</b>            |      |             |            |                |           |                  |

Table 6.1 Worst-Case uncertainty budget for DASY4 assessed according to CENELEC EN 50361. The budget is valid for the frequency range 300MHz-3GHz and represents a worst-case analysis.

## 9. ANSI/IEEE C95.1 –2005 RF EXPOSURE LIMITS

### Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

|                                                                    | UNCONTROLLED ENVIRONMENT<br>General Population<br>(W/kg) or (mW/g) | CONTROLLED ENVIRONMENT<br>General Population<br>(W/kg) or (mW/g) |
|--------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------|
| <b>SPATIAL PEAK SAR<sup>1</sup></b><br>Brain                       | 1.60                                                               | 8.00                                                             |
| <b>SPATIAL PEAK SAR<sup>2</sup></b><br>Whole Body                  | 0.08                                                               | 0.40                                                             |
| <b>SPATIAL PEAK SAR<sup>3</sup></b><br>Hands, Feet, Ankles, Wrists | 4.00                                                               | 20.00                                                            |

Table 9.1 Safety Limits for Partial Body Exposure [2]

NOTE:

- 1 The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2 The Spatial Average value of the SAR averaged over the whole body.
- 3 The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube)

## 10. SYSTEM VERIFICATION

### Tissue Verification

| MEASURED TISSUE PARAMETERS      |                                       |            |                                        |            |
|---------------------------------|---------------------------------------|------------|----------------------------------------|------------|
| Liquid Temp (°C)                | 21.8                                  |            |                                        |            |
| Liquid Depth (mm)               | 150 ± 1                               |            |                                        |            |
| Tissue                          | 1900MHz Brain                         |            | 1900MHz Muscle                         |            |
| Date                            |                                       | 07/09/2008 |                                        | 07/09/2008 |
| Parameters                      | Target                                | Measured   | Target                                 | Measured   |
| Dielectric Constant: $\epsilon$ | 40.0                                  | 39.8       | 53.3                                   | 53.8       |
| Conductivity: $\sigma$          | 1.40                                  | 1.40       | 1.52                                   | 1.50       |
| Deviation (%)                   | $\epsilon$ : -0.50<br>$\sigma$ : 0.00 |            | $\epsilon$ : +0.93<br>$\sigma$ : -1.31 |            |

Table 10.1 Simulated Tissue Verification [5]

### Test System Validation

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at 1900MHz by using the system validation kit(s). (Graphic Plots Attached)

| SYSTEM DIPOLE VALIDATION TARGET & MEASURED |                       |            |                  |                                   |                                   |               |
|--------------------------------------------|-----------------------|------------|------------------|-----------------------------------|-----------------------------------|---------------|
| Tissue                                     | System Validation Kit | Date       | Liquid Temp (°C) | Targeted SAR <sub>1g</sub> (mW/g) | Measured SAR <sub>1g</sub> (mW/g) | Deviation (%) |
| 1900MHz Brain                              | D1900V2, S/N: 5d057   | 07/09/2008 | 21.8             | 39.5                              | 40.8                              | +3.29         |

Table 10.2 System Validation [5]

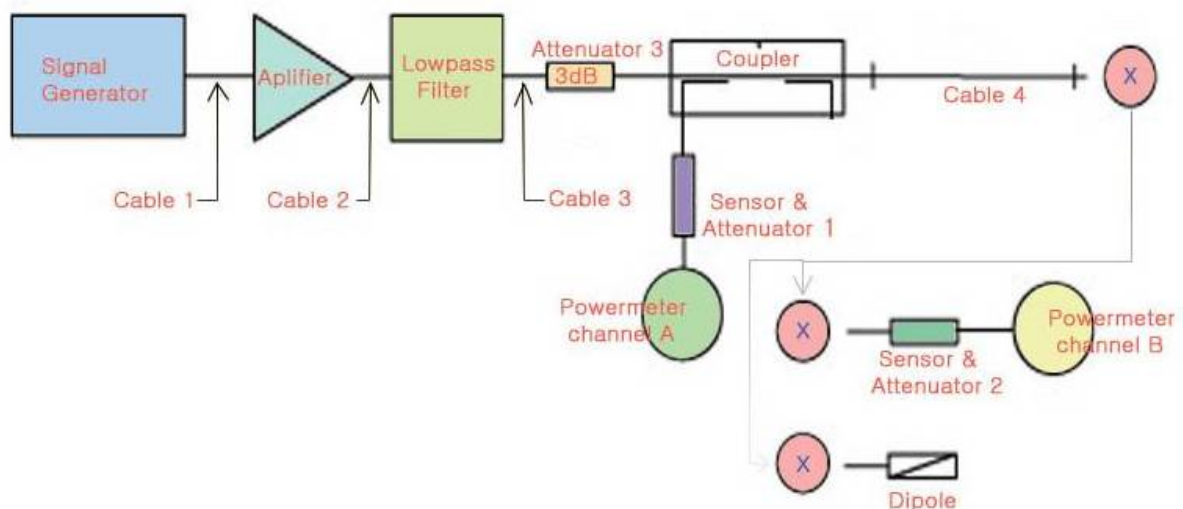


Figure 10.1 Dipole Validation Test Setup

1900 MHz Liquid Depth

## 11. SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas

### 11.1 SAR Evaluation Considerations

These procedures were followed according to FCC "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", February 2008. The procedures are applicable to phones with built-in unlicensed transmitters, such as 802.11 a/b/g and Bluetooth devices.

For an unlicensed transmitter that does not transmit simultaneously with other transmitters and its output is  $< 60/f_{(\text{GHz})}$  mW, SAR evaluation is not required. When simultaneous transmission applies, power thresholds ( $P_{\text{Ref}}$ ) derived from multiples of  $\frac{1}{2} \cdot 60/f_{(\text{GHz})}$  are used to reduce stand-alone SAR requirements for unlicensed devices incorporated in cell phones. Values of  $P_{\text{Ref}}$  for applicable frequencies are shown in Table 11.1.

|      | 2.45 | 5.15–5.35 | 5.47–5.85 | GHz |
|------|------|-----------|-----------|-----|
| Pref | 12   | 6         | 5         | mW  |

*Table 11.1 Device output power should be rounded to the nearest mW to compare with values specified in this table.*

When the output of an unlicensed transmitter is  $\leq P_{\text{Ref}}$  and its antenna(s) is  $> 2.5$  cm from other antennas, stand-alone SAR evaluation is not required for that unlicensed transmitter. When the output of an unlicensed transmitter is  $\leq 2 \cdot P_{\text{Ref}}$  and its antenna(s) is  $> 5.0$  cm from other antennas, stand-alone SAR evaluation is also not required for that unlicensed transmitter.

#### FCC ID: BEJKP270

BT Max. RF output power: 4.43 dB (2.77 mW)

Because the conducted output power level of the BT transmitter is less than  $P_{\text{Ref}}$ , and the BT antenna is more than 5 cm from the GSM antenna, neither simultaneous SAR nor stand-alone BT SAR are required for the EUT.

## 12. MEASUREMENT RESULTS (Continued)

### Ambient Conditions Target

|                                 |                |
|---------------------------------|----------------|
| Ambient Temperature (°C):       | $22 \pm 1$     |
| Relative Humidity (%):          | $55 \pm 5$     |
| Liquid Tissue Temperature (°C): | $21.5 \pm 0.5$ |
| Liquid Tissue Depth (mm):       | $150 \pm 1$    |
| Mixture Type:                   | 1900MHz Head   |
| Dielectric Constant:            | 40.0           |
| Conductivity:                   | 1.40           |

### Measurement Results

|                                                                                                    |                                           |
|----------------------------------------------------------------------------------------------------|-------------------------------------------|
| ANSI / IEEE C95.1- 2005 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population | Brain<br>1.6 W/kg<br>averaged over 1 gram |
|----------------------------------------------------------------------------------------------------|-------------------------------------------|

| MEASUREMENT RESULTS (Head SAR ) |     |          |                       |       |          |                      |                  |                 |            |
|---------------------------------|-----|----------|-----------------------|-------|----------|----------------------|------------------|-----------------|------------|
| Frequency                       |     | Mod.     | Conducted Power (dBm) |       | Battery  | Device Test Position | Antenna Position | Slider Position | SAR (W/kg) |
| MHz                             | Ch. |          | Start                 | End   |          |                      |                  |                 |            |
| 1880.00                         | 661 | PCS 1900 | 29.25                 | 29.20 | Standard | Right Touch          | Fixed            | Down            | 0.264      |
| 1880.00                         | 661 | PCS 1900 | 29.24                 | 29.21 | Standard | Right Touch          | Fixed            | Up              | 0.253      |
| 1880.00                         | 661 | PCS 1900 | 29.25                 | 29.21 | Standard | Right Tilt           | Fixed            | Down            | 0.136      |
| 1880.00                         | 661 | PCS 1900 | 29.25                 | 29.22 | Standard | Right Tilt           | Fixed            | Up              | 0.089      |
| 1880.00                         | 661 | PCS 1900 | 29.22                 | 29.23 | Standard | Left Touch           | Fixed            | Down            | 0.215      |
| 1880.00                         | 661 | PCS 1900 | 29.23                 | 29.22 | Standard | Left Touch           | Fixed            | Up              | 0.189      |
| 1880.00                         | 661 | PCS 1900 | 29.22                 | 29.22 | Standard | Left Tilt            | Fixed            | Down            | 0.135      |
| 1880.00                         | 661 | PCS 1900 | 29.24                 | 29.20 | Standard | Left Tilt            | Fixed            | Up              | 0.082      |
| 1880.00                         | 661 | PCS 1900 | 29.25                 | 29.20 | Standard | Right Touch (Z-Scan) | Fixed            | Down            | 0.264      |

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings. Standard batteries are the only options.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



Eui - Soon Park  
E. S. Park / Technical Manager  
MCCL

## 12. MEASUREMENT RESULTS (Continued)

### Ambient Conditions Target

|                                 |                       |
|---------------------------------|-----------------------|
| Ambient Temperature (°C):       | <u>22 ± 1</u>         |
| Relative Humidity (%):          | <u>55 ± 5</u>         |
| Liquid Tissue Temperature (°C): | <u>21.5 ± 0.5</u>     |
| Liquid Tissue Depth (mm):       | <u>150 ± 1</u>        |
| Mixture Type:                   | <u>1900MHz Muscle</u> |
| Dielectric Constant:            | <u>53.3</u>           |
| Conductivity:                   | <u>1.52</u>           |

### Measurement Results

| ANSI / IEEE C95.1- 2005 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |           |                       |       |          |                          | Muscle<br>1.6 W/kg<br>averaged over 1 gram |                 |            |
|----------------------------------------------------------------------------------------------------|-----|-----------|-----------------------|-------|----------|--------------------------|--------------------------------------------|-----------------|------------|
| MEASUREMENT RESULTS (Body SAR )                                                                    |     |           |                       |       |          |                          |                                            |                 |            |
| Frequency                                                                                          |     | Mod.      | Conducted Power (dBm) |       | Battery  | Device Test Position     | Antenna Position                           | Slider Position | SAR (W/kg) |
| MHz                                                                                                | Ch. |           | Start                 | End   |          |                          |                                            |                 |            |
| 1880.00                                                                                            | 661 | GPRS 1900 | 29.21                 | 29.21 | Standard | 2.0 [ Front ]            | Fixed                                      | Down            | 0.124      |
| 1880.00                                                                                            | 661 | GPRS 1900 | 29.19                 | 29.20 | Standard | 2.0 [ Front ]            | Fixed                                      | Up              | 0.201      |
| 1880.00                                                                                            | 661 | GPRS 1900 | 29.19                 | 29.20 | Standard | 2.0 [ Rear ]             | Fixed                                      | Down            | 0.325      |
| 1880.00                                                                                            | 661 | GPRS 1900 | 29.20                 | 29.17 | Standard | 2.0 [ Rear ]             | Fixed                                      | Up              | 0.337      |
| 1880.00                                                                                            | 661 | GPRS 1900 | 29.20                 | 29.17 | Standard | 2.0 [ Rear ]<br>(Z-Scan) | Fixed                                      | Down            | 0.337      |

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings. Standard batteries are the only options.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



Eui - Soon Park  
E. S. Park / Technical Manager  
MCCL

### 13. TEST EQUIPMENT

#### Equipment List and Calibration

| Name of Equipment            | Manufacturer | Model Type | Serial Number | Cal. Due date |
|------------------------------|--------------|------------|---------------|---------------|
| Robot                        | Stäubli      | RX90BL     | 507PA1        | N/A           |
| SAM Twin Phantom             | SPEAG        | V4.0       | TP-1066       | N/A           |
| SAM Twin Phantom             | SPEAG        | V4.0       | TP-1244       | N/A           |
| DAE                          | SPEAG        | DAE4       | 534           | 09/24/08      |
| E-Field Probe                | SPEAG        | ET3DV6     | 1715          | 09/26/08      |
| Validation Dipole 835MHz     | SPEAG        | D835V2     | 468           | 04/23/09      |
| Validation Dipole 1900MHz    | SPEAG        | D1900V2    | 5d057         | 04/22/09      |
| S-Parameter Network Analyzer | Agilent      | 8753ES     | MY4002948     | 06/23/09      |
| Dielectric Probe Kit         | Agilent      | 85070D     | US01440173    | N/A           |
| Signal Generator             | Agilent      | E4421B     | MY41000199    | 03/07/09      |
| High Power RF Amplifier      | EM Power     | BBS3Q7ECK  | 1014          | 03/07/09      |
| Dual Direction Coupler       | Agilent      | 778D-012   | 19309         | 06/23/09      |
| EPM-Series Power Meter       | Agilent      | E4419B     | GB39290525    | 04/25/09      |
| Power Sensor                 | Agilent      | 8481A      | MY41092711    | 05/23/09      |
| Power Sensor                 | Agilent      | 8481A      | MY41092717    | 04/22/09      |
| Attenuator                   | Agilent      | 8491A      | 59049         | 03/07/09      |
| Attenuator                   | Agilent      | 8491A      | 59151         | 03/07/09      |
| Low Pass Filter 1.5 GHz      | Dymstec      | LA-15N     | –             | N/A           |
| Low Pass Filter 3.0 GHz      | Dymstec      | LA-30N     | –             | N/A           |
| Thermometer/Hygrometer       | SATO         | SK-L200TH  | 8440586       | 06/25/09      |
| Wireless Communication Test  | Agilent      | E5515C     | GB44051999    | 03/10/09      |

*Table 12.1 Test Equipment List and Calibration*

**NOTE:**

The E-field probe was calibrated by SPEAG, by waveguide technique procedure. Dipole Validation measurement is performed by LG Electronics. before each test. The brain simulating material is calibrated by LG Electronics using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

## 14. REFERENCES

- [1] Product standard to demonstrate the compliance of mobile phone with the basic restriction related to human exposure electromagnetic(300MHz – 3GHz), CENELEC EN 50360, July 2001.
- [2] Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phone(300MHz – 3GHz), CENELEC EN 50361, July 2001.
- [3] Council Recommendations 1999/519/EC on the limitations of exposure of the general public to electromagnetic fields (300MHz – 3GHz) annex II
- [4] International Commission on Non-Ionising Radiation Protection (1998), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic field (up to 300 GHz). Health Physical 74, 494-522.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528 - 2003, Draft Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

## APPENDIX A: Validation Test Data



*Figure 1 1900 MHz Dipole Validation Test Setup*

# LG Electronics Inc.

**DUT: Dipole 1900MHz; Type: D1900V2; Serial: 5d057**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: Head 1900 MHz; ( $\sigma = 1.4$  mho/m;  $\epsilon_r = 39.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section


Test Date: 07/09/2008; Ambient Temp: 22.9°C; Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(5.14, 5.14, 5.14); Calibrated: 2007-09-26  
Sensor-Surface: 4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn534; Calibrated: 2007-09-24  
Phantom: SAM 1800; Type: SAM 4.0; Serial: TP-1244  
Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

## 1900 MHz Dipole Validation

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 12.0mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 94.4V/m; Power Drift = -0.032dB  
Peak SAR (extrapolated) = 17.5W/kg  
**SAR(1 g) = 10.2mW/g; SAR(10 g) = 5.39mW/g**  
Maximum value of SAR (measured) = 11.5mW/g

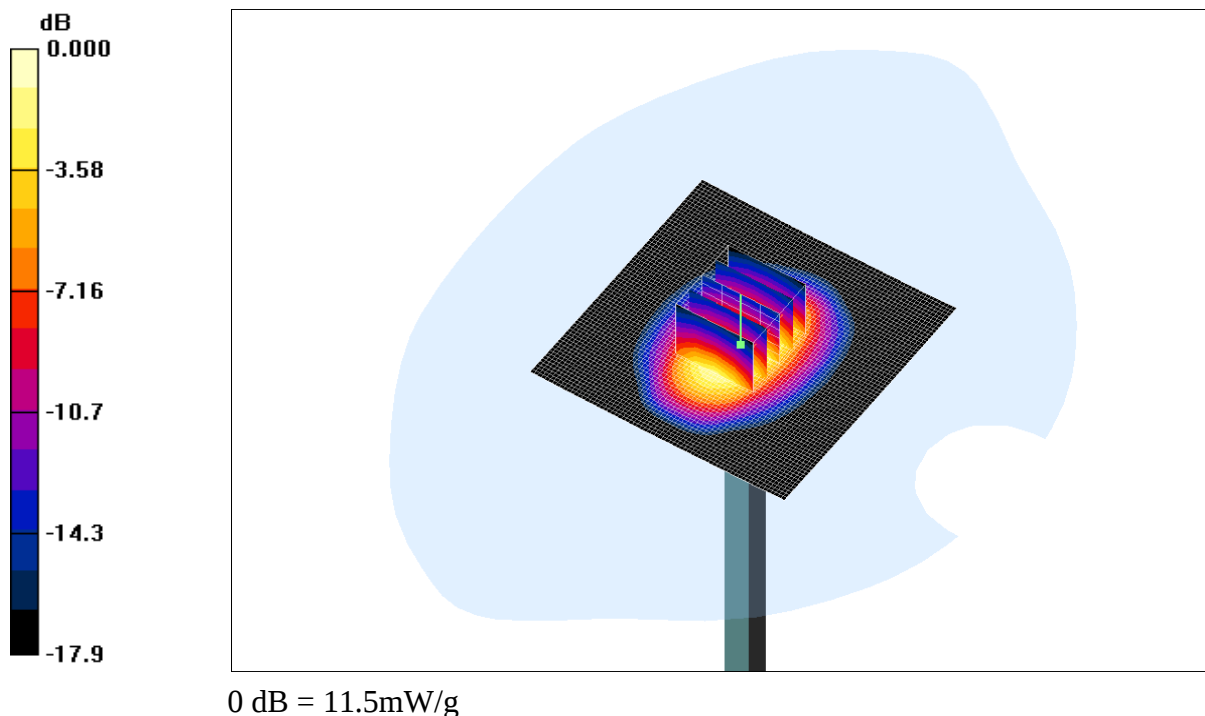

**APPENDIX B: SAR Test Data**

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: PCS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:8.3

Medium: Head 1880.00 MHz;( $\sigma = 1.38 \text{ mho/m}$ ;  $\epsilon_r = 39.9$ ;  $\rho = 1000 \text{ kg/m}^3$ )

Phantom section: Right Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(5.14, 5.14, 5.14); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Right Head Touch, Ch.661, Slider Down, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.300mW/g



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.72V/m; Power Drift = 0.174dB

Peak SAR (extrapolated) = 0.370W/kg

**SAR(1 g) = 0.264mW/g; SAR(10 g) = 0.164mW/g**

Maximum value of SAR (measured) = 0.279mW/g

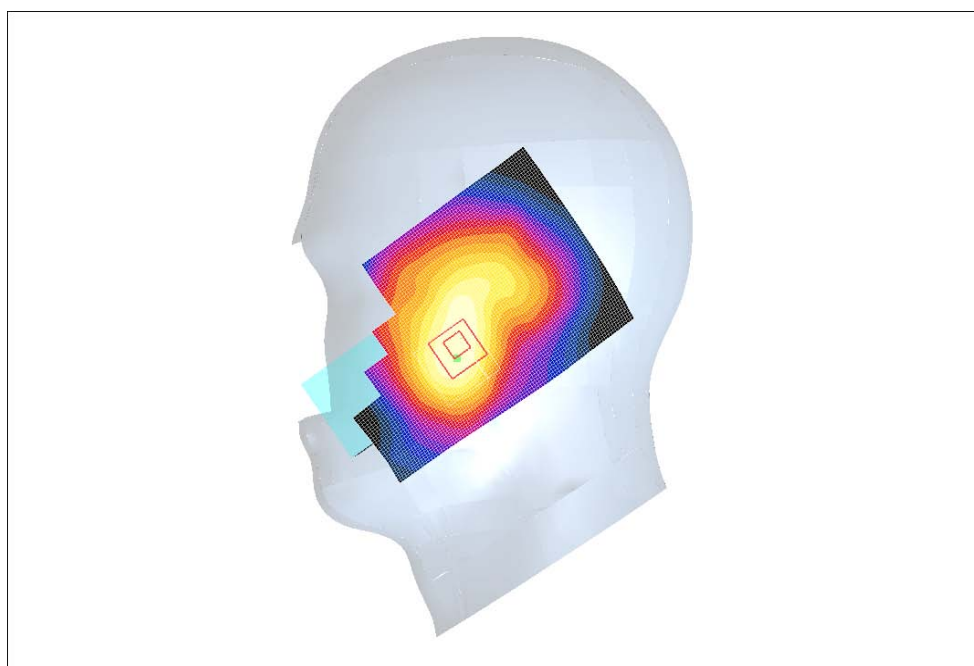

0 dB = 0.279mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: PCS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:8.3

Medium: Head 1880.00 MHz;(σ = 1.38 mho/m; ε<sub>r</sub> = 39.9; ρ = 1000 kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(5.14, 5.14, 5.14); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Right Head Touch, Ch.661, Slider Up, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.279mW/g



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.23V/m; Power Drift = 0.136dB

Peak SAR (extrapolated) = 0.348W/kg

**SAR(1 g) = 0.253mW/g; SAR(10 g) = 0.164mW/g**

Maximum value of SAR (measured) = 0.277mW/g

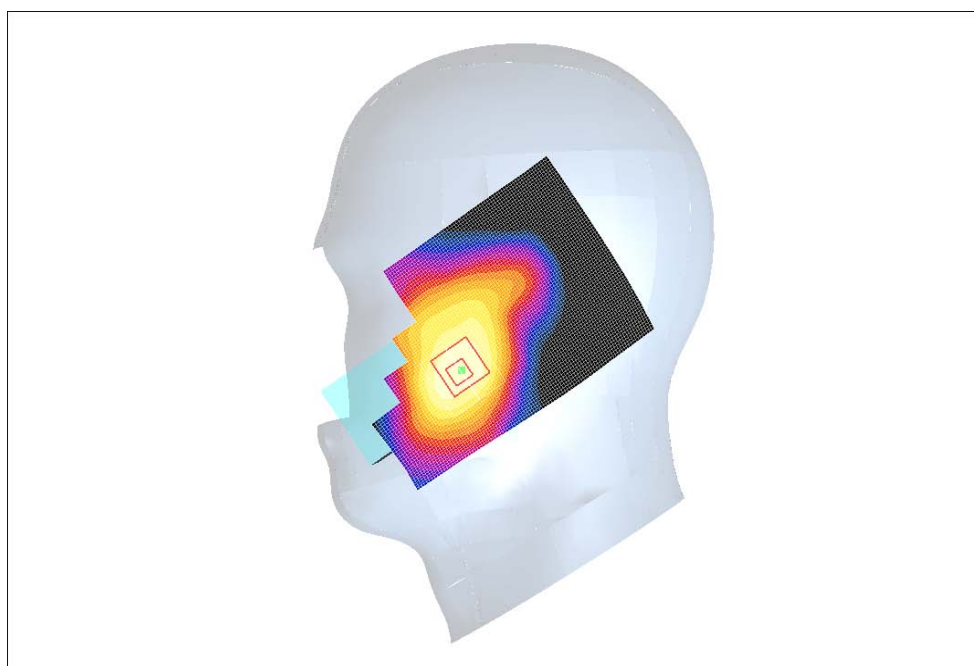

0 dB = 0.277mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: PCS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:8.3

Medium: Head 1880.00 MHz;(σ = 1.38 mho/m; ε<sub>r</sub> = 39.9; ρ = 1000 kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(5.14, 5.14, 5.14); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Right Head Tilt, Ch.661, Slider Down, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.151mW/g



**.43Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.20V/m; Power Drift = -0.058dB

Peak SAR (extrapolated) = 0.197W/kg

**SAR(1 g) = 0.136mW/g; SAR(10 g) = 0.086mW/g**

Maximum value of SAR (measured) = 0.146mW/g

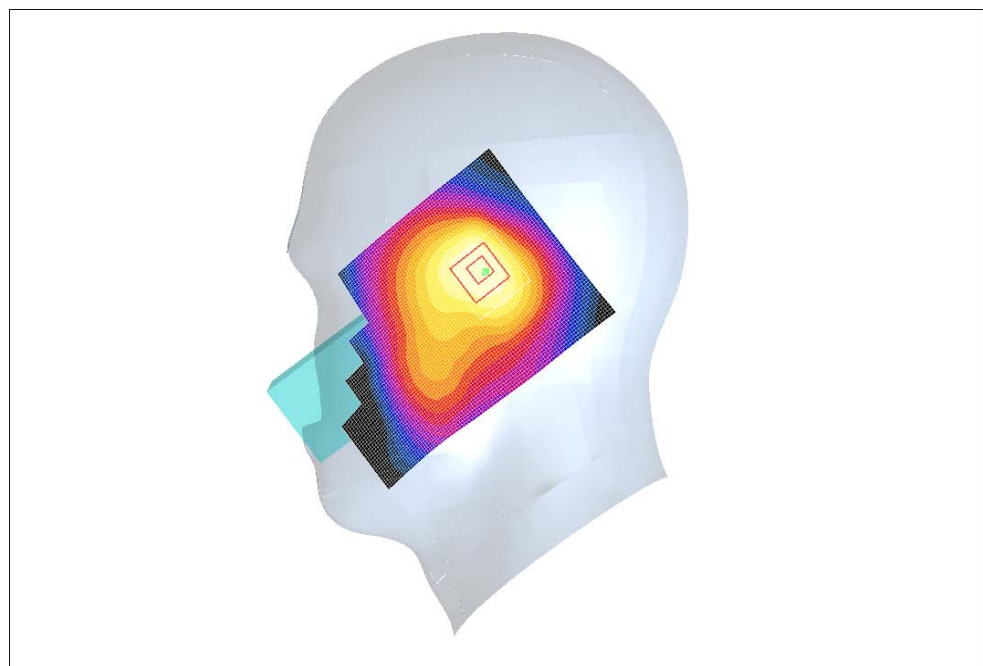

0 dB = 0.146mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: PCS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:8.3

Medium: Head 1880.00 MHz;( $\sigma = 1.38 \text{ mho/m}$ ;  $\epsilon_r = 39.9$ ;  $\rho = 1000 \text{ kg/m}^3$ )

Phantom section: Right Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(5.14, 5.14, 5.14); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Right Head Tilt, Ch.661, Slider Up, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.101mW/g



**.43Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.08V/m; Power Drift = -0.119dB

Peak SAR (extrapolated) = 0.132W/kg

**SAR(1 g) = 0.089mW/g; SAR(10 g) = 0.054mW/g**

Maximum value of SAR (measured) = 0.097mW/g

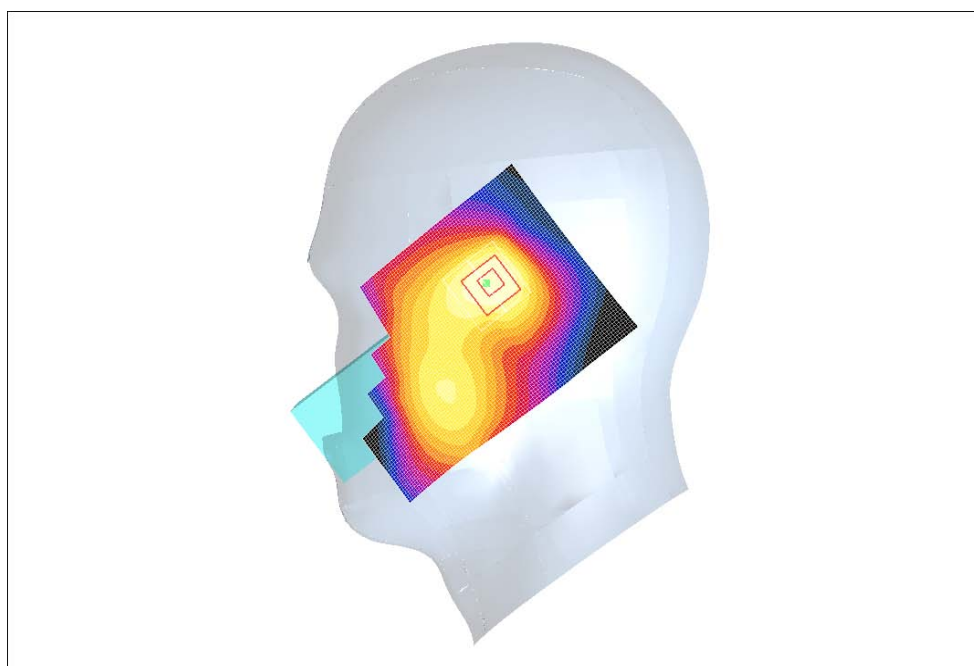

0 dB = 0.097mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: PCS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:8.3

Medium: Head 1880.00 MHz;( $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(5.14, 5.14, 5.14); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Left Head Touch, Ch.661, Slider Down, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.241mW/g



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.92V/m; Power Drift = -0.188dB

Peak SAR (extrapolated) = 0.281W/kg

**SAR(1 g) = 0.215mW/g; SAR(10 g) = 0.148mW/g**

Maximum value of SAR (measured) = 0.230mW/g

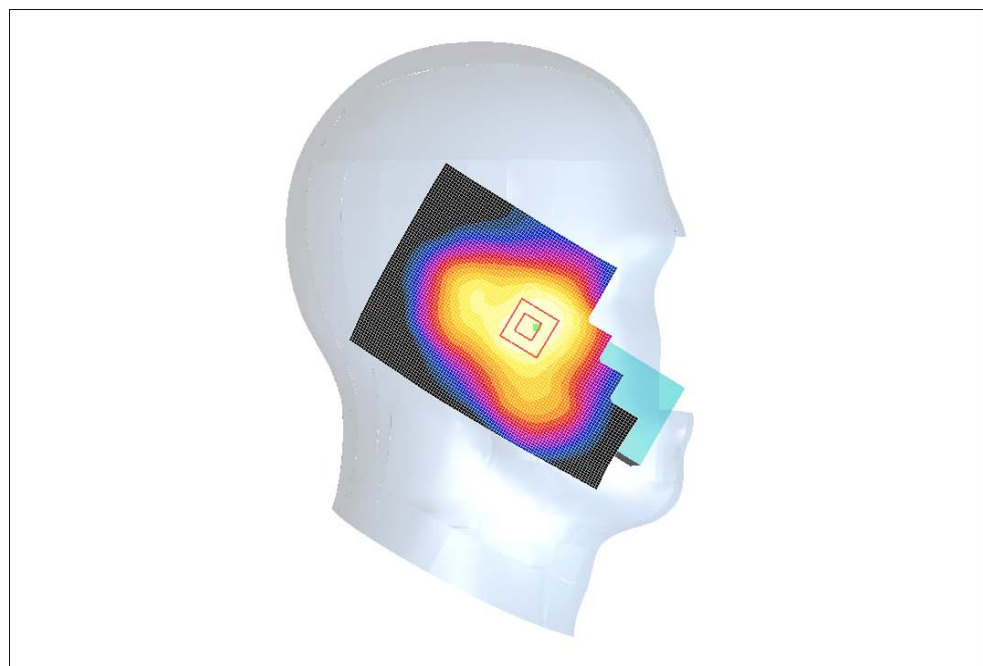

0 dB = 0.230mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: PCS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:8.3

Medium: Head 1880.00 MHz;(σ = 1.38 mho/m; ε<sub>r</sub> = 39.9; ρ = 1000 kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(5.14, 5.14, 5.14); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Left Head Touch, Ch.661, Slider Up, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.194mW/g



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.96V/m; Power Drift = -0.046dB

Peak SAR (extrapolated) = 0.275W/kg

**SAR(1 g) = 0.189mW/g; SAR(10 g) = 0.120mW/g**

Maximum value of SAR (measured) = 0.210mW/g

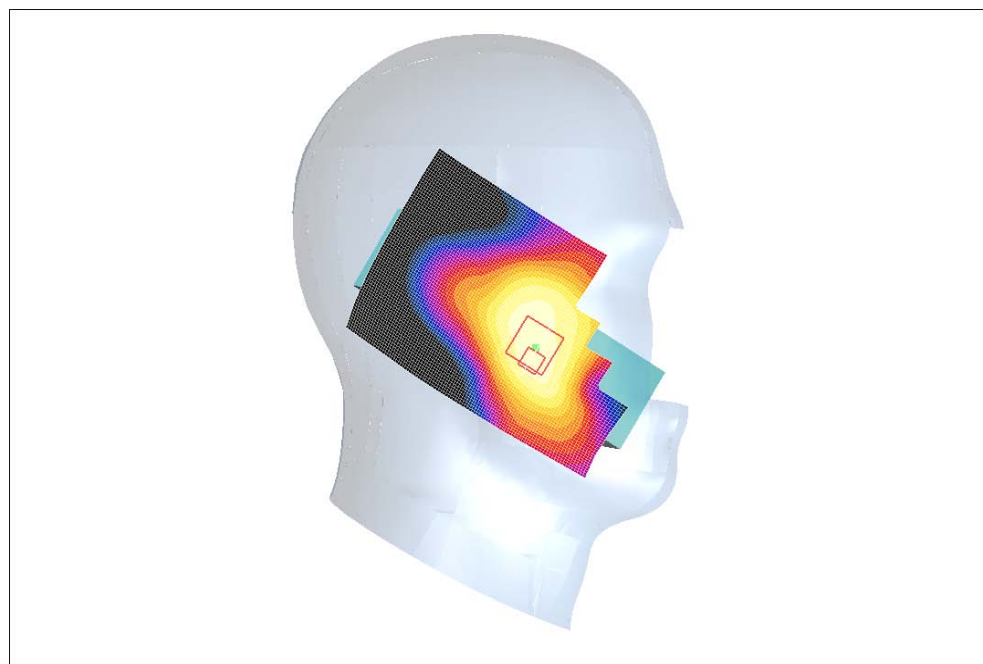

0 dB = 0.210mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: PCS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:8.3

Medium: Head 1880.00 MHz;(σ = 1.38 mho/m; ε<sub>r</sub> = 39.9; ρ = 1000 kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(5.14, 5.14, 5.14); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Left Head Tilt, Ch.661, Slider Down, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.155mW/g



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.62V/m; Power Drift = -0.087dB

Peak SAR (extrapolated) = 0.193W/kg

**SAR(1 g) = 0.135mW/g; SAR(10 g) = 0.085mW/g**

Maximum value of SAR (measured) = 0.148mW/g

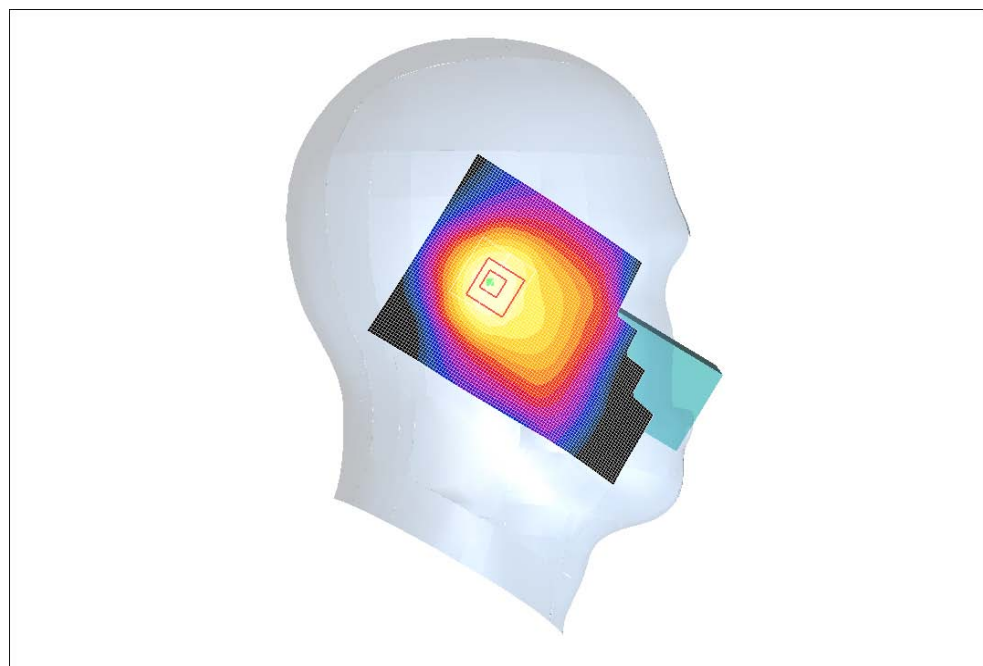

0 dB = 0.148mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: PCS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:8.3

Medium: Head 1880.00 MHz;(σ = 1.38 mho/m; ε<sub>r</sub> = 39.9; ρ = 1000 kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(5.14, 5.14, 5.14); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Left Head Tilt, Ch.661, Slider Up, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.092mW/g



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.99V/m; Power Drift = 0.079dB

Peak SAR (extrapolated) = 0.119W/kg

**SAR(1 g) = 0.082mW/g; SAR(10 g) = 0.051mW/g**

Maximum value of SAR (measured) = 0.087mW/g

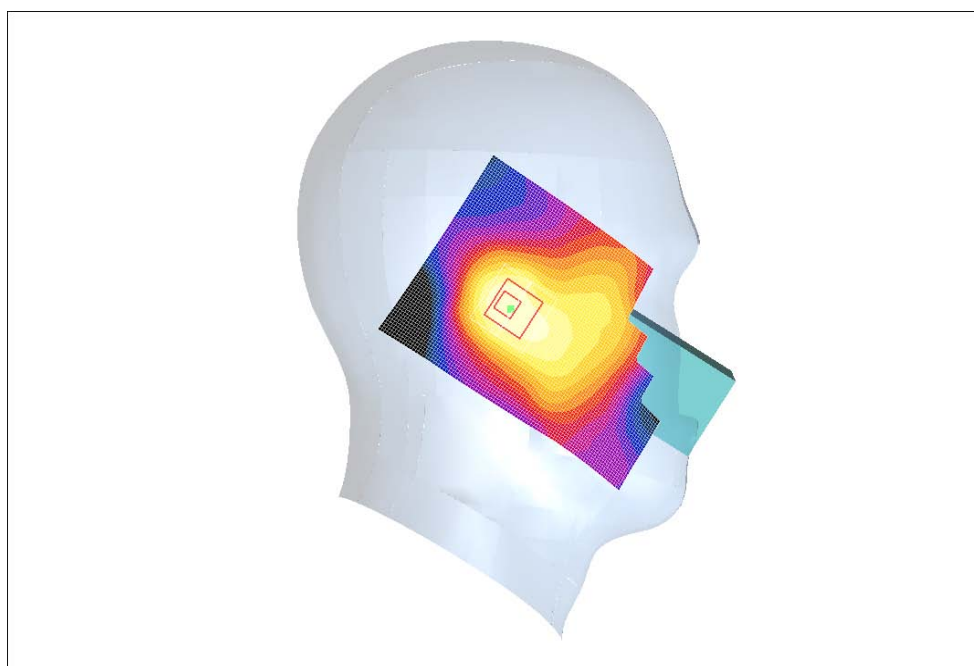

0 dB = 0.087mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: GPRS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:2.075

Medium: Body 1880.00 MHz;(σ = 1.49 mho/m; ε<sub>r</sub> = 53.8; ρ = 1000 kg/m<sup>3</sup>)

Phantom section: Flat Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(4.72, 4.72, 4.72); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Flat Touch, Ch.661, Front, Slider Down, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.136mW/g



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.18V/m; Power Drift = 0.138dB

Peak SAR (extrapolated) = 0.177W/kg

**SAR(1 g) = 0.124mW/g; SAR(10 g) = 0.083mW/g**

Maximum value of SAR (measured) = 0.134mW/g

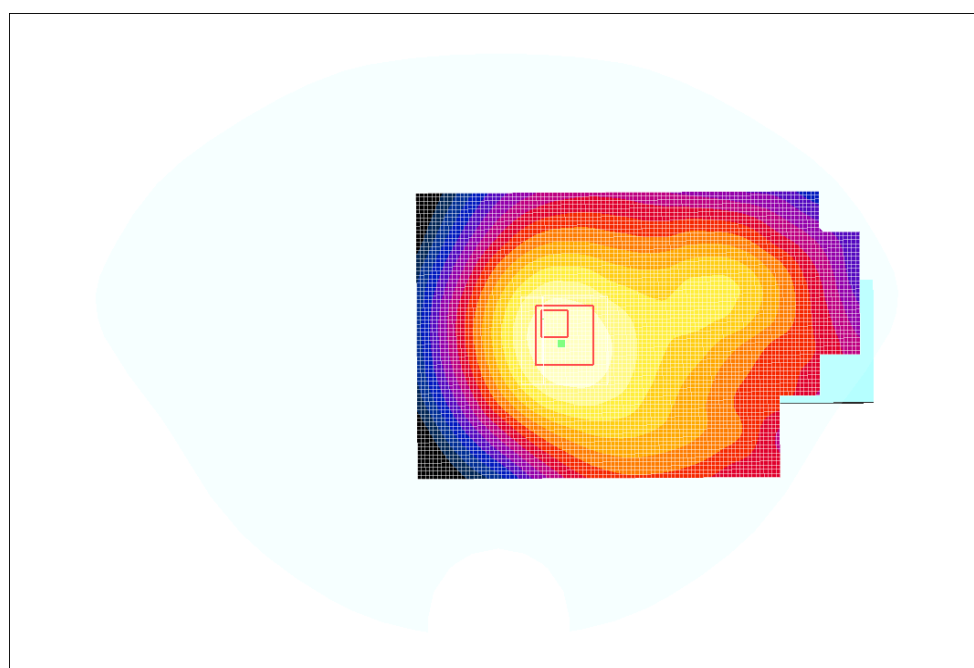

0 dB = 0.134mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: GPRS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:2.075

Medium: Body 1880.00 MHz;(σ = 1.49 mho/m; ε<sub>r</sub> = 53.8; ρ = 1000 kg/m<sup>3</sup>)

Phantom section: Flat Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(4.72, 4.72, 4.72); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Flat Touch, Ch.661, Front, Slider Up, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.233mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2V/m; Power Drift = -0.185dB

Peak SAR (extrapolated) = 0.294W/kg

**SAR(1 g) = 0.201mW/g; SAR(10 g) = 0.127mW/g**

Maximum value of SAR (measured) = 0.220mW/g

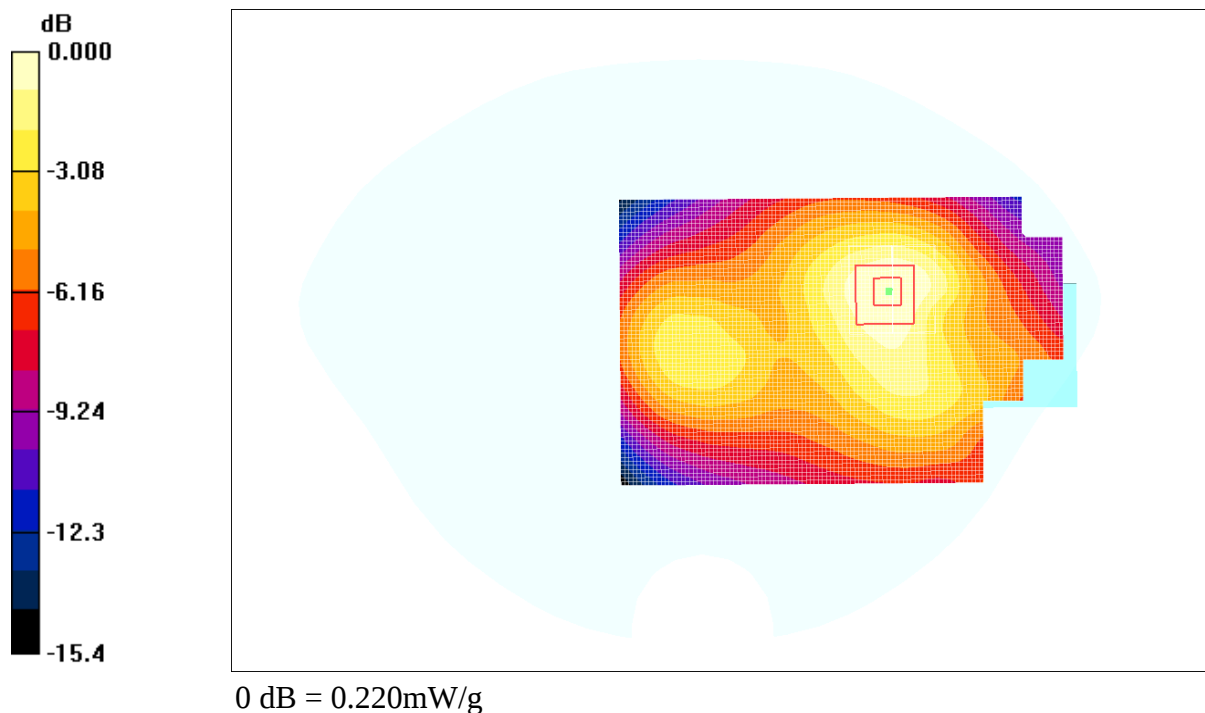

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: GPRS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:2.075

Medium: Body 1880.00 MHz;(σ = 1.49 mho/m; ε<sub>r</sub> = 53.8; ρ = 1000 kg/m<sup>3</sup>)

Phantom section: Flat Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(4.72, 4.72, 4.72); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Flat Touch, Ch.661, Rear, Slider Down, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.402mW/g



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.08V/m; Power Drift = 0.177dB

Peak SAR (extrapolated) = 0.518W/kg

**SAR(1 g) = 0.325mW/g; SAR(10 g) = 0.185mW/g**

Maximum value of SAR (measured) = 0.361mW/g

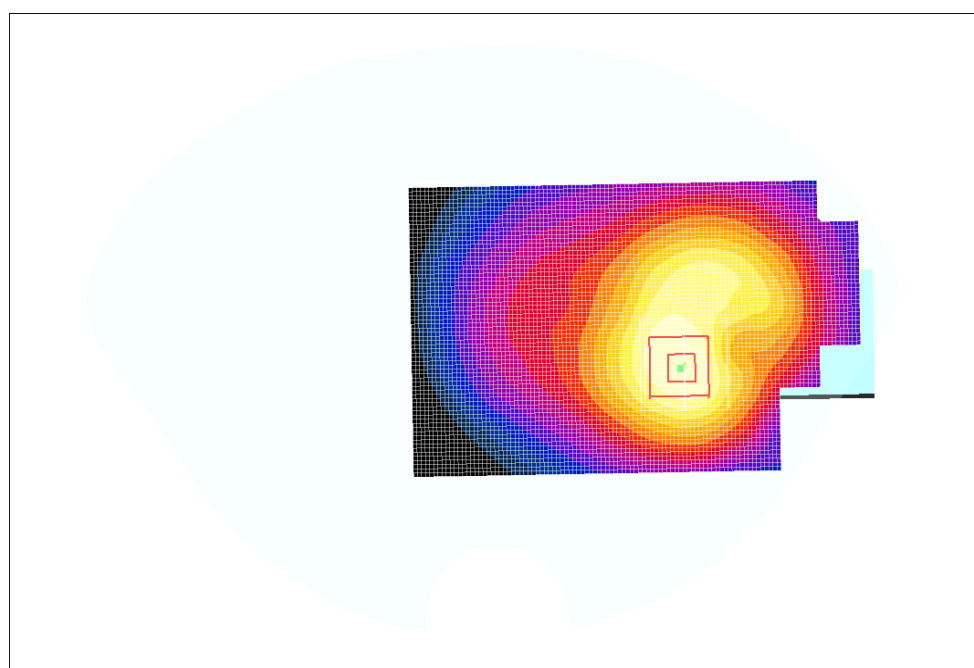

0 dB = 0.361mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: GPRS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:2.075

Medium: Body 1880.00 MHz;(σ = 1.49 mho/m; ε<sub>r</sub> = 53.8; ρ = 1000 kg/m<sup>3</sup>)

Phantom section: Flat Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(4.72, 4.72, 4.72); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Flat Touch, Ch.661, Rear, Slider Up, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.388mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.11V/m; Power Drift = -0.299dB

Peak SAR (extrapolated) = 0.499W/kg

**SAR(1 g) = 0.337mW/g; SAR(10 g) = 0.214mW/g**

Maximum value of SAR (measured) = 0.369mW/g

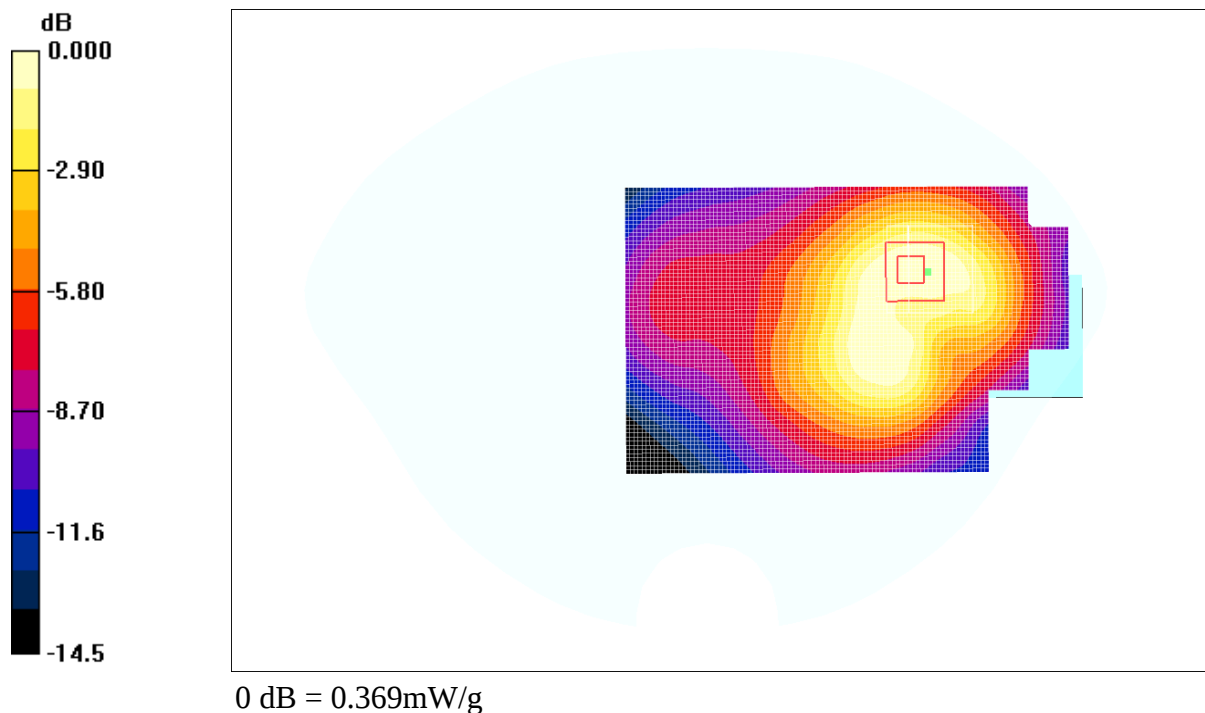

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: PCS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:8.3

Medium: Head 1880.00 MHz;( $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(5.14, 5.14, 5.14); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Right Head Touch, Ch.661, Slider Down, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.300mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.72V/m; Power Drift = 0.174dB

Peak SAR (extrapolated) = 0.370W/kg

**SAR(1 g) = 0.264mW/g; SAR(10 g) = 0.164mW/g**

Maximum value of SAR (measured) = 0.279mW/g

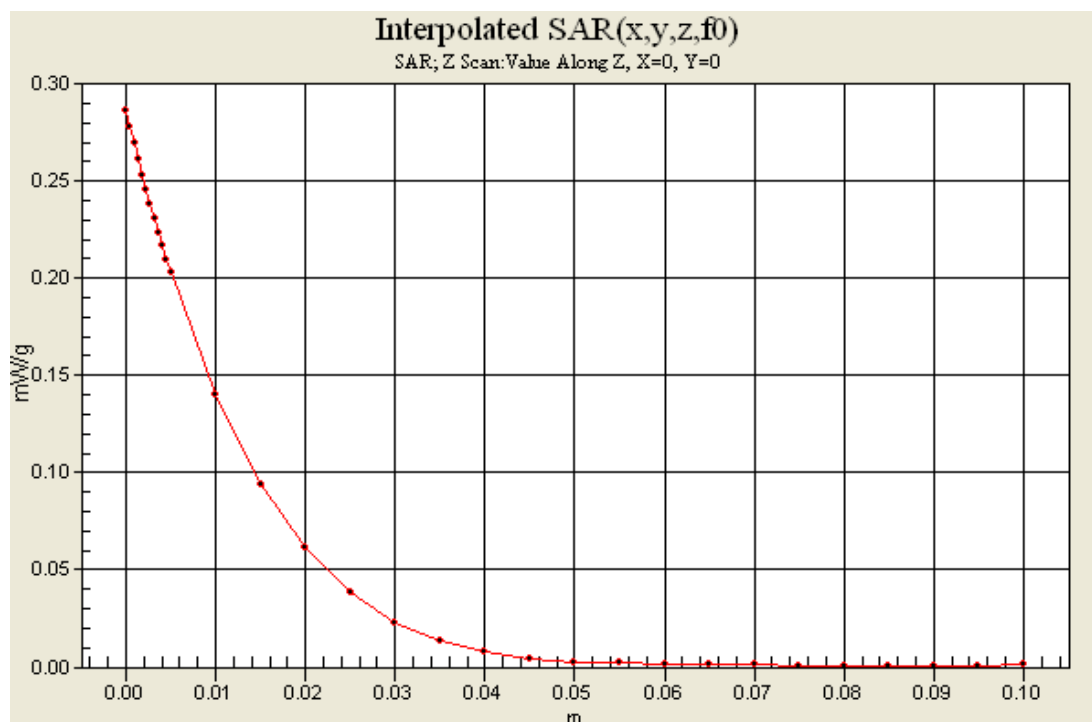

0 dB = 0.279mW/g

# LG Electronics Inc.

**DUT: KP270 ;Type: PCS GSM/ EDGE Phone with Bluetooth; Serial:#1**

Communication System: GPRS 1900; Frequency: 1880.00 MHz;Duty Cycle: 1:2.075

Medium: Body 1880.00 MHz;(σ = 1.49 mho/m; ε<sub>r</sub> = 53.8; ρ = 1000 kg/m<sup>3</sup>)

Phantom section: Flat Section

Test Date: 07/09/2008;Ambient Temp: 22. 9°C;Tissue Temp: 21.8°C

Probe: ET3DV6 - SN1715; ConvF(4.72, 4.72, 4.72); Calibrated: 2007-09-26

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn534; Calibrated: 2007-09-24

Phantom: SAM 1800; Type: SAM 4.0; Serial:TP-1244

Measurement SW: DASY4, V4.7 Build 55; Post processing SW: SEMCAD, V1.8 Build 171

**Flat Touch, Ch.661, Rear, Slider Up, Fixed Ant., Standard Battery**

**Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.388mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.11V/m; Power Drift = -0.299dB

Peak SAR (extrapolated) = 0.499W/kg

**SAR(1 g) = 0.337mW/g; SAR(10 g) = 0.214mW/g**

Maximum value of SAR (measured) = 0.369mW/g

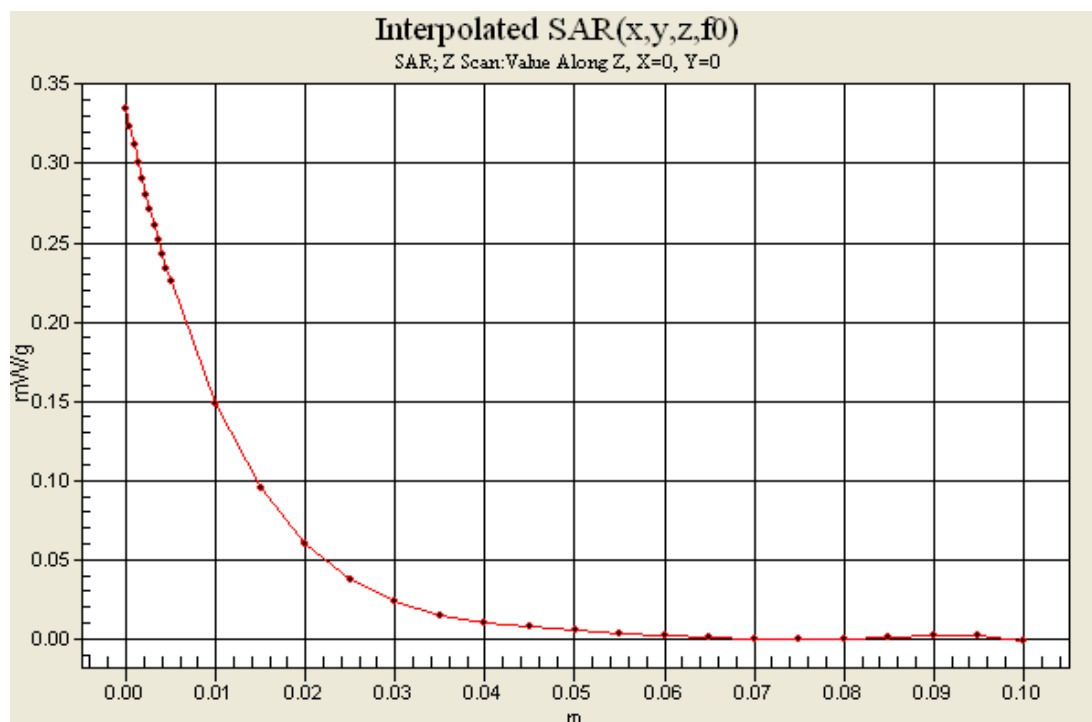

0 dB = 0.369mW/g

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **LG (Dymstec)**

Certificate No: **ET3-1715\_Sep07**

## CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1715**

Calibration procedure(s) **QA CAL-01.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 26, 2007**

Condition of the calibrated item **In Tolerance**


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID #            | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-------------------------------------------|-----------------------|
| Power meter E4419B         | GB41293874      | 29-Mar-07 (METAS, No. 217-00670)          | Mar-08                |
| Power sensor E4412A        | MY41495277      | 29-Mar-07 (METAS, No. 217-00670)          | Mar-08                |
| Power sensor E4412A        | MY41498087      | 29-Mar-07 (METAS, No. 217-00670)          | Mar-08                |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 8-Aug-07 (METAS, No. 217-00719)           | Aug-08                |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 29-Mar-07 (METAS, No. 217-00671)          | Mar-08                |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 8-Aug-07 (METAS, No. 217-00720)           | Aug-08                |
| Reference Probe ES3DV2     | SN: 3013        | 4-Jan-07 (SPEAG, No. ES3-3013_Jan07)      | Jan-08                |
| DAE4                       | SN: 654         | 20-Apr-07 (SPEAG, No. DAE4-654_Apr07)     | Apr-08                |

| Secondary Standards       | ID #         | Check Date (in house)                    | Scheduled Check        |
|---------------------------|--------------|------------------------------------------|------------------------|
| RF generator HP 8648C     | US3642U01700 | 4-Aug-99 (SPEAG, in house check Nov-05)  | In house check: Nov-07 |
| Network Analyzer HP 8753E | US37390585   | 18-Oct-01 (SPEAG, in house check Oct-06) | In house check: Oct-07 |

|                | Name          | Function          | Signature                                                                             |
|----------------|---------------|-------------------|---------------------------------------------------------------------------------------|
| Calibrated by: | Katja Pokovic | Technical Manager |  |
| Approved by:   | Niels Kuster  | Quality Manager   |  |

Issued: September 26, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ET3-1715\_Sep07

Page 1 of 9

**Calibration Laboratory of**  
**Schmid & Partner**  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

|                       |                                                                                                                                                |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                                       |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                                      |
| ConF                  | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                     |
| DCP                   | diode compression point                                                                                                                        |
| Polarization $\phi$   | $\phi$ rotation around probe axis                                                                                                              |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Certificate No: ET3-1715\_Sep07

Page 2 of 9

ET3DV6 SN:1715

September 26, 2007

# Probe ET3DV6

## SN:1715

|                  |                    |
|------------------|--------------------|
| Manufactured:    | August 7, 2002     |
| Last calibrated: | November 21, 2006  |
| Recalibrated:    | September 26, 2007 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: ET3-1715\_Sep07

Page 3 of 9

ET3DV6 SN:1715

September 26, 2007

## DASY - Parameters of Probe: ET3DV6 SN:1715

### Sensitivity in Free Space<sup>A</sup>

|       |              |                                     |       |       |
|-------|--------------|-------------------------------------|-------|-------|
| NormX | 1.77 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP X | 92 mV |
| NormY | 1.53 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Y | 95 mV |
| NormZ | 1.79 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Z | 96 mV |

### Diode Compression<sup>B</sup>

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

### Boundary Effect

**TSL**                      **900 MHz**                      **Typical SAR gradient: 5 % per mm**

|                                           |                              |               |               |
|-------------------------------------------|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance |                              | <b>3.7 mm</b> | <b>4.7 mm</b> |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 5.8           | 2.9           |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.1           | 0.1           |

**TSL**                      **1810 MHz**                      **Typical SAR gradient: 10 % per mm**

|                                           |                              |               |               |
|-------------------------------------------|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance |                              | <b>3.7 mm</b> | <b>4.7 mm</b> |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 11.9          | 8.5           |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.2           | 0.1           |

### Sensor Offset

|                            |                            |
|----------------------------|----------------------------|
| Probe Tip to Sensor Center | <b>2.7 mm</b>              |
| Optical Surface Detection  | <b>low, but repeatable</b> |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

ET3DV6 SN:1715

September 26, 2007

**Frequency Response of E-Field**  
(TEM-Cell:ifi110 EXX, Waveguide: R22)



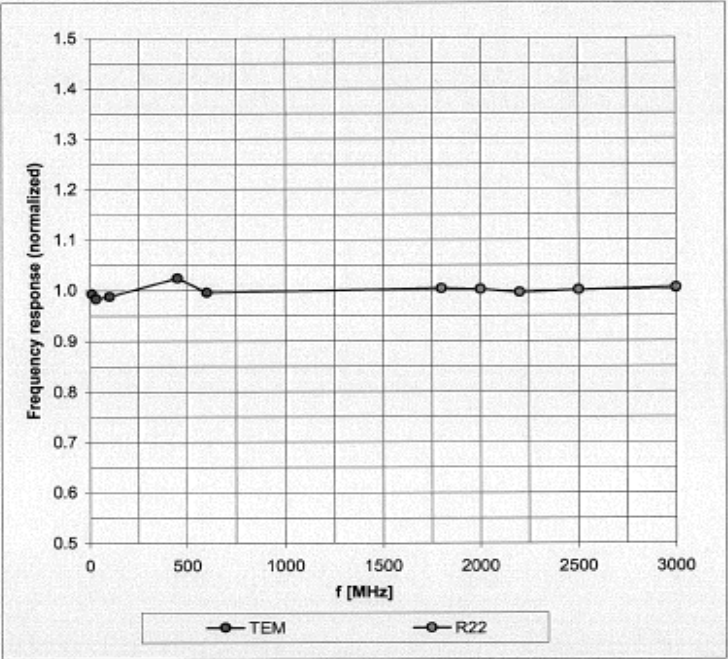


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

ET3DV6 SN:1715

September 26, 2007

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

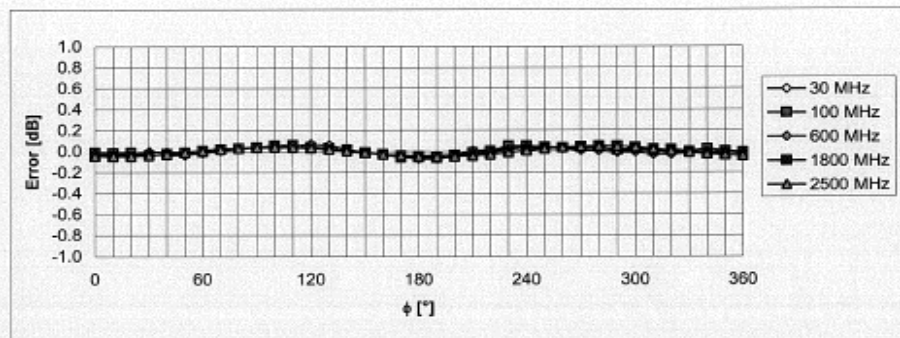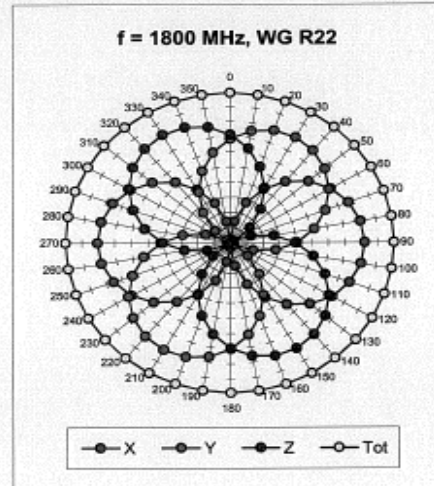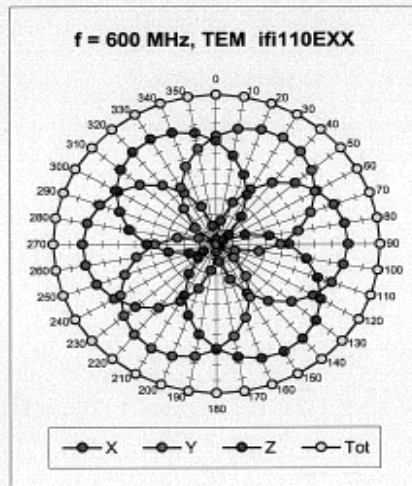

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )


Certificate No: ET3-1715\_Sep07

Page 6 of 9

ET3DV6 SN:1715

September 26, 2007

Dynamic Range f(SAR<sub>head</sub>)  
(Waveguide R22, f = 1800 MHz)


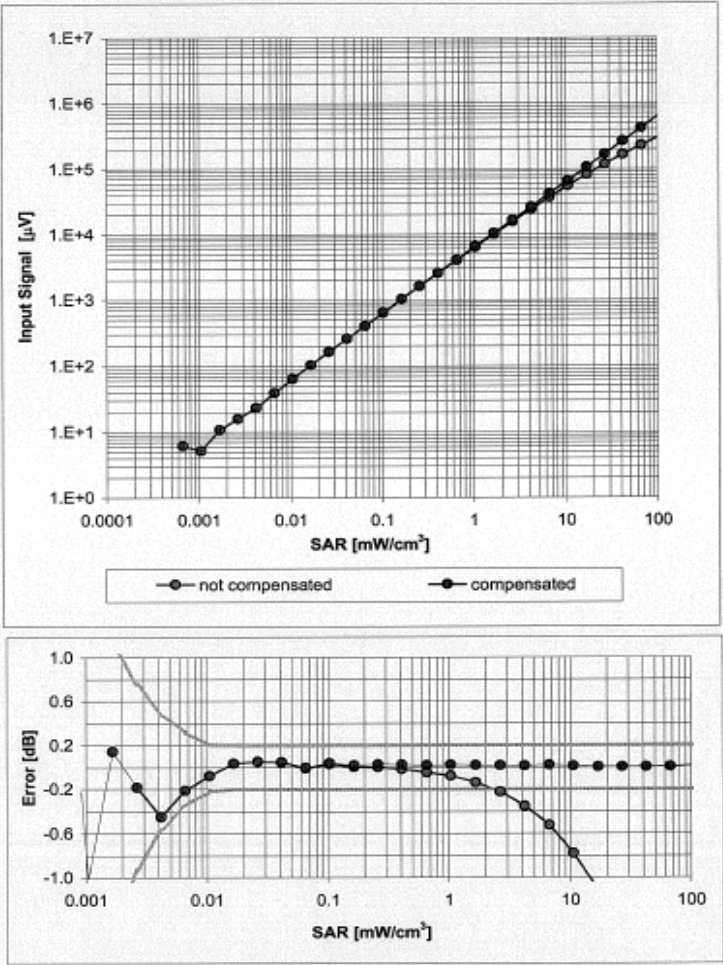


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

ET3DV6 SN:1715

September 26, 2007

### Conversion Factor Assessment

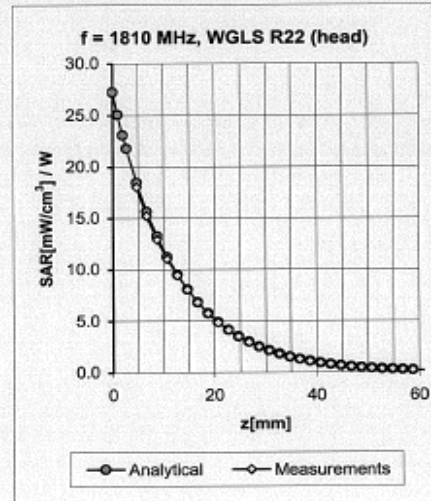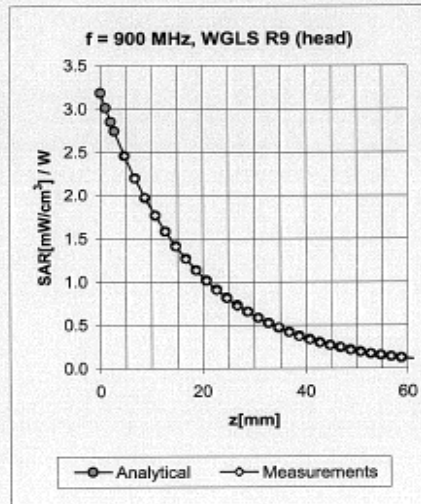

| f [MHz] | Validity [MHz] <sup>c</sup> | TSL  | Permittivity | Conductivity | Alpha | Depth | ConvF Uncertainty  |
|---------|-----------------------------|------|--------------|--------------|-------|-------|--------------------|
| 900     | ± 50 / ± 100                | Head | 41.5 ± 5%    | 0.97 ± 5%    | 0.22  | 3.30  | 6.40 ± 11.0% (k=2) |
| 1810    | ± 50 / ± 100                | Head | 40.0 ± 5%    | 1.40 ± 5%    | 0.48  | 2.67  | 5.14 ± 11.0% (k=2) |
| 1950    | ± 50 / ± 100                | Head | 40.0 ± 5%    | 1.40 ± 5%    | 0.67  | 2.24  | 4.89 ± 11.0% (k=2) |
| 2450    | ± 50 / ± 100                | Head | 39.2 ± 5%    | 1.80 ± 5%    | 0.51  | 2.94  | 4.52 ± 11.8% (k=2) |
| 900     | ± 50 / ± 100                | Body | 55.0 ± 5%    | 1.05 ± 5%    | 0.34  | 2.66  | 6.16 ± 11.0% (k=2) |
| 1810    | ± 50 / ± 100                | Body | 53.3 ± 5%    | 1.52 ± 5%    | 0.51  | 3.21  | 4.72 ± 11.0% (k=2) |
| 1950    | ± 50 / ± 100                | Body | 53.3 ± 5%    | 1.52 ± 5%    | 0.81  | 2.04  | 4.41 ± 11.0% (k=2) |
| 2450    | ± 50 / ± 100                | Body | 52.7 ± 5%    | 1.95 ± 5%    | 0.53  | 2.96  | 3.84 ± 11.8% (k=2) |

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Certificate No: ET3-1715\_Sep07


Page 8 of 9

ET3DV6 SN:1715

September 26, 2007

**Deviation from Isotropy in HSL**

Error ( $\phi$ ,  $\theta$ ),  $f = 900 \text{ MHz}$

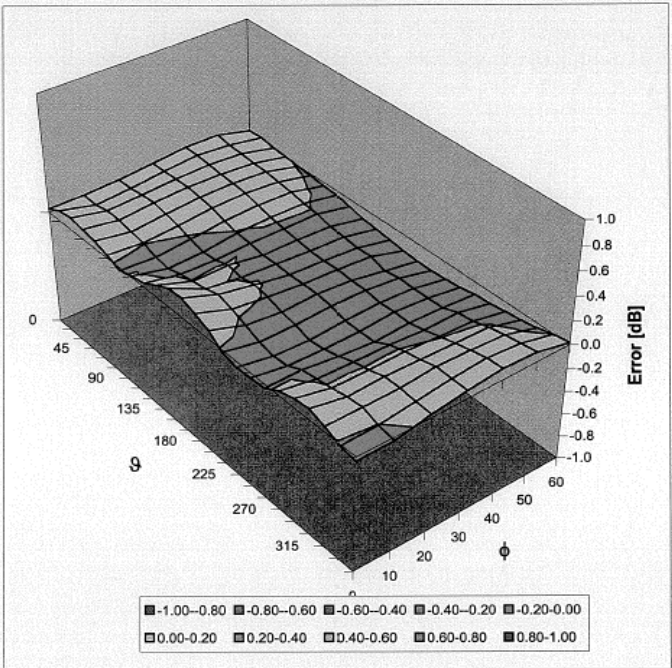

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **LG (Dymstec)**

Certificate No: **D1900V2-5d057\_Apr08**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d057**

Calibration procedure(s) **QA CAL-05.v7  
Calibration procedure for dipole validation kits**

Calibration date: **April 22, 2008**


Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ °C) and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|-----------------------------|--------------------|-------------------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 04-Oct-07 (No. 217-00736)                 | Oct-08                 |
| Power sensor HP 8481A       | US37292783         | 04-Oct-07 (No. 217-00736)                 | Oct-08                 |
| Reference 20 dB Attenuator  | SN: 5086 (20g)     | 07-Aug-07 (No. 217-00718)                 | Aug-08                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 08-Aug-07 (No. 217-00721)                 | Aug-08                 |
| Reference Probe ES3DV2      | SN: 3025           | 01-Mar-08 (No. ES3-3025_Mar08)            | Mar-09                 |
| DAE4                        | SN: 601            | 14-Mar-08 (No. DAE4-601_Mar08)            | Mar-09                 |
| Secondary Standards         | ID #               | Check Date (in house)                     | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-07)         | In house check: Oct-08 |
| RF generator R&S SMT-06     | 100005             | 4-Aug-99 (in house check Oct-07)          | In house check: Oct-09 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-07)         | In house check: Oct-08 |

|                |               |                       |                                                                                       |
|----------------|---------------|-----------------------|---------------------------------------------------------------------------------------|
|                | Name          | Function              | Signature                                                                             |
| Calibrated by: | Marcel Fehr   | Laboratory Technician |  |
| Approved by:   | Katja Pokovic | Technical Manager     |  |

Issued: April 23, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D1900V2-5d057\_Apr08

Page 1 of 6

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                           |             |
|-------------------------------------|---------------------------|-------------|
| <b>DASY Version</b>                 | DASY4                     | V4.7        |
| <b>Extrapolation</b>                | Advanced Extrapolation    |             |
| <b>Phantom</b>                      | Modular Flat Phantom V5.0 |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                     | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm         |             |
| <b>Frequency</b>                    | 1900 MHz $\pm$ 1 MHz      |             |

### Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>      | 22.0 °C             | 40.0           | 1.40 mho/m           |
| <b>Measured Head TSL parameters</b>     | (22.0 $\pm$ 0.2) °C | 40.1 $\pm$ 6 % | 1.47 mho/m $\pm$ 6 % |
| <b>Head TSL temperature during test</b> | (21.2 $\pm$ 0.2) °C | ----           | ----                 |

### SAR result with Head TSL

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | condition          |                                                  |
|-------------------------------------------------------------|--------------------|--------------------------------------------------|
| SAR measured                                                | 250 mW input power | 10.1 mW / g                                      |
| SAR normalized                                              | normalized to 1W   | 40.4 mW / g                                      |
| SAR for nominal Head TSL parameters <sup>1</sup>            | normalized to 1W   | <b>39.5 mW / g <math>\pm</math> 17.0 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | Condition          |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| SAR measured                                                  | 250 mW input power | 5.19 mW / g                                      |
| SAR normalized                                                | normalized to 1W   | 20.8 mW / g                                      |
| SAR for nominal Head TSL parameters <sup>1</sup>              | normalized to 1W   | <b>20.6 mW / g <math>\pm</math> 16.5 % (k=2)</b> |

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

**Appendix****Antenna Parameters with Head TSL**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.1 $\Omega$ + 4.8 j $\Omega$ |
| Return Loss                          | - 25.2 dB                      |

**General Antenna Parameters and Design**

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.199 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | March 19, 2004 |

**DASY4 Validation Report for Head TSL**

Date/Time: 22.04.2008 14:09:52

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d057**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

**DASY4 Configuration:**

- Probe: ES3DV2 - SN3025; ConvF(4.9, 4.9, 4.9); Calibrated: 01.03.2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 14.03.2008
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; ;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 172

**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.1 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 18.8 W/kg

**SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.19 mW/g**

Maximum value of SAR (measured) = 12.1 mW/g

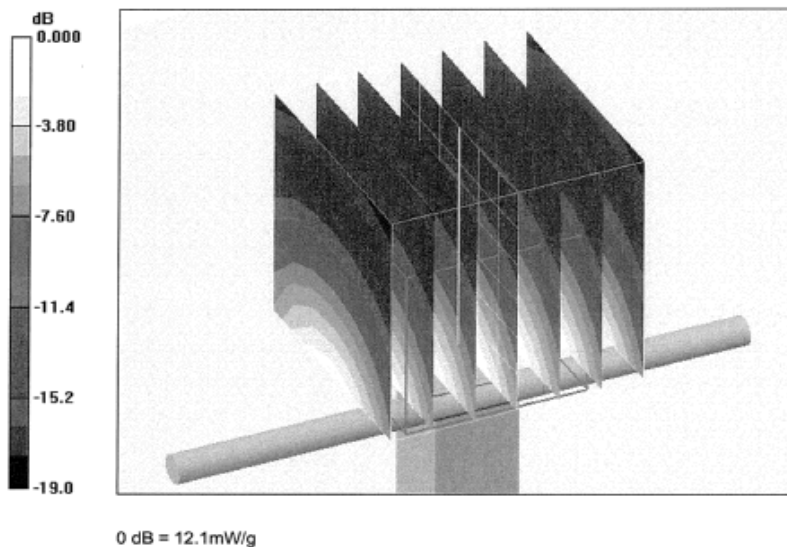

Impedance Measurement Plot for Head TSL

