

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-212-RWD-021

Reception No. : 2101000175

Applicant : LG Electronics USA

Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, 07632, United States

Manufacturer : LG Electronics Inc

Address : 10, Magokjungang 10-ro, Gangseo-gu, Seoul, Republic of Korea

Type of Equipment : NAVIGATION RADIO

FCC ID. : BEJLANR22

Model Name : LANR22

Multiple Model Name : N/A

EUT Part Number : ASRNCNAG1A1

Serial Part Number : Refer to the clause 3.2

Total page of Report : 83 pages (including this page)

Date of Incoming : January 28, 2021

Date of issue : February 08, 2021

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
Hyung-Kwon, Oh / Manager
ONETECH Corp.



Reviewed by
Tae-Ho, Kim / Senior Manager
ONETECH Corp.

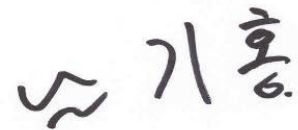

Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

| | PAGE |
|---|-----------|
| 1. VERIFICATION OF COMPLIANCE | 6 |
| 2. TEST SUMMARY | 7 |
| 2.1 TEST ITEMS AND RESULTS | 7 |
| 2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS | 7 |
| 2.3 RELATED SUBMITTAL(S) / GRANT(S) | 7 |
| 2.4 PURPOSE OF THE TEST | 7 |
| 2.5 TEST METHODOLOGY | 7 |
| 2.6 TEST FACILITY | 7 |
| 3. GENERAL INFORMATION | 8 |
| 3.1 PRODUCT DESCRIPTION | 8 |
| 3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT | 10 |
| 4. EUT MODIFICATIONS | 10 |
| 5. SYSTEM TEST CONFIGURATION | 11 |
| 5.1 JUSTIFICATION | 11 |
| 5.2 PERIPHERAL EQUIPMENT | 11 |
| 5.3 MODE OF OPERATION DURING THE TEST | 12 |
| 5.4 CONFIGURATION OF TEST SYSTEM | 15 |
| 5.5 ANTENNA REQUIREMENT | 15 |
| 6. PRELIMINARY TEST | 15 |
| 6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS | 15 |
| 6.2 GENERAL RADIATED EMISSIONS TESTS | 15 |
| 7. MINIMUM 20 DB BANDWIDTH | 16 |
| 7.1 OPERATING ENVIRONMENT | 16 |
| 7.2 TEST SET-UP | 16 |
| 7.3 TEST DATE | 16 |
| 7.4 TEST DATA FOR 1 MBPS | 17 |
| 7.5 TEST DATA FOR 2 MBPS | 19 |
| 7.6 TEST DATA FOR 3 MBPS | 21 |
| 8. HOPPING FREQUENCY SEPARATION | 23 |
| 8.1 OPERATING ENVIRONMENT | 23 |
| 8.2 TEST SET-UP | 23 |

8.3 TEST DATE23

8.4 TEST DATA FOR 1 MBPS24

8.5 TEST DATA FOR 2 MBPS25

8.6 TEST DATA FOR 3 MBPS26

9. NUMBER OF HOPPING CHANNELS27

9.1 OPERATING ENVIRONMENT27

9.2 TEST SET-UP27

9.3 TEST DATE27

9.4 TEST DATA FOR 1 MBPS28

9.5 TEST DATA FOR 2 MBPS31

9.6 TEST DATA FOR 3 MBPS34

10. TIME OF OCCUPANCY37

10.1 OPERATING ENVIRONMENT37

10.2 TEST SET-UP37

10.3 TEST DATE37

10.4 TEST DATA FOR 1 MBPS38

10.5 TEST DATA FOR 2 MBPS40

10.6 TEST DATA FOR 3 MBPS42

11. MAXIMUM PEAK OUTPUT POWER44

11.1 OPERATING ENVIRONMENT44

11.2 TEST SET-UP44

11.3 TEST DATE44

11.4 TEST DATA FOR 1 MBPS45

11.5 TEST DATA FOR 2 MBPS47

11.6 TEST DATA FOR 3 MBPS49

12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....51

12.1 OPERATING ENVIRONMENT51

12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT51

12.3 TEST SET-UP FOR RADIATED MEASUREMENT.....51

12.4 TEST DATE52

12.5 TEST DATA FOR CONDUCTED EMISSION53

 12.5.1 Test data for 1 Mbps53

 12.5.2 Test data for 2 Mbps59

 12.5.3 Test data for 3 Mbps65

12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION71

 12.6.1 Radiated Emission which fall in the Restricted Band.....71

| | |
|---|-----------|
| 12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz..... | 74 |
| 13. RADIATED EMISSION TEST | 77 |
| 13.1 OPERATING ENVIRONMENT | 77 |
| 13.2 TEST SET-UP | 77 |
| 13.3 TEST DATE | 78 |
| 13.4 TEST DATA FOR 30 MHz ~ 1 000 MHz | 79 |
| 13.4.1 Test data for Bluetooth Mode | 79 |
| 13.4.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz) | 80 |
| 13.4.3 Test data for Intermodulation Mode(Bluetooth + WLAN 5 GHz) | 81 |
| 13.5 TEST DATA FOR BELOW 30 MHz | 82 |
| 13.6 TEST DATA FOR ABOVE 1 GHz | 82 |
| 14. LIST OF TEST EQUIPMENT | 83 |

Revision History

| Rev. No. | Issue Report No. | Issued Date | Revisions | Section Affected |
|----------|------------------|-------------------|-----------------|------------------|
| 0 | OT-212-RWD-021 | February 08, 2021 | Initial Release | All |
| | | | | |
| | | | | |

1. VERIFICATION OF COMPLIANCE

Applicant : LG Electronics USA
 Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, 07632, United States
 Contact Person : Dae Woong Kim / Director, Regulatory and Environmental Affairs
 Telephone No. : 201-266-2215
 FCC ID : BEJLANR22
 Model Name : LANR22
 Brand Name : Alliance-RNM
 Serial Number : N/A
 Date : February 08, 2021

| | |
|--|--|
| EQUIPMENT CLASS | DSS – PART 15 SPREAD SPECTRUM TRANSMITTER |
| E.U.T. DESCRIPTION | NAVIGATION RADIO |
| THIS REPORT CONCERNS | Original Grant |
| MEASUREMENT PROCEDURES | ANSI C63.10: 2013 |
| TYPE OF EQUIPMENT TESTED | Pre-Production |
| KIND OF EQUIPMENT AUTHORIZATION REQUESTED | Certification |
| EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S) | FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02 |
| Modifications on the Equipment to Achieve Compliance | None |
| Final Test was Conducted On | 3 m, Semi Anechoic Chamber |

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

| SECTION | TEST ITEMS | RESULTS |
|----------------------|---|------------------------|
| 15.247 (a) (1) | Carrier Frequency Separation | Met the Limit / PASS |
| 15.247 (a) (1) (iii) | Minimum Number of Hopping Channels | Met the Limit / PASS |
| 15.247 (a) (1) (iii) | Average Time of Occupancy | Met the Limit / PASS |
| 15.247 (b) (1) | Maximum Peak Conducted Output Power | Met the Limit / PASS |
| 15.247 (d) | 100 kHz Bandwidth Outside the Frequency Band | Met the Limit / PASS |
| 15.247 (d) | Radiated Emission which fall in the Restricted Band | Met the Limit / PASS |
| 15.209 | Radiated Emission Limits, General Requirement | Met the Limit / PASS |
| 15.207 | Conducted Limits | N/A (See Note) |
| 15.203 | Antenna Requirement | Met requirement / PASS |

Note: This test is not performed because the EUT is operated by DC Power.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Electronics USA, Model LANR22 (referred to as the EUT in this report) is a NAVIGATION RADIO. The product specification described herein was obtained from product data sheet or user’s manual.

| | | |
|-----------------------------|-------------------------------|--|
| DEVICE TYPE | NAVIGATION RADIO | |
| Temperature Range | -40 °C ~ 80 °C | |
| OPERATING FREQUENCY | Bluetooth LE | 2 402 MHz ~ 2 480 MHz |
| | Bluetooth | 2 402 MHz ~ 2 480 MHz |
| | WLAN 2.4 GHz | 2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20)) |
| | 5 150 MHz ~ 5 250 MHz Band | 5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20)) |
| | | 5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40)) |
| | | 5 210 MHz (802.11ac(VHT80)) |
| | 5 725 MHz ~ 5 850 MHz Band | 5 745 MHz ~ 5 805 MHz (802.11a/n(HT20)/ac(VHT20)) |
| | | 5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40)) |
| 5 775 MHz (802.11ac(VHT80)) | | |
| MODULATION TYPE | Bluetooth LE | GFSK for 1 Mbps / 2 Mbps |
| | Bluetooth | GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps |
| | WLAN 2.4 GHz | 802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) |
| | | 802.11g/n(HT20): OFDM Modulation(BPSK/QPSK/16QAM/64QAM) |
| | WLAN 5 GHz | 802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM) |

| | | | |
|---|-------------------------------|---|-----------|
| RF OUTPUT POWER | Bluetooth LE | 1 Mbps | -2.62 dBm |
| | | 2 Mbps | -2.89 dBm |
| | Bluetooth | 1 Mbps | -3.01 dBm |
| | | 2 Mbps | -4.21 dBm |
| | | 3 Mbps | -3.73 dBm |
| | WLAN 2.4 GHz | 16.35 dBm(802.11b) 16.52 dBm(802.11g) 15.47 dBm(802.11n_HT20) | |
| | 5 150 MHz ~ 5 250 MHz Band | 13.44 dBm(802.11a) | |
| | | 9.37 dBm(802.11n_HT20) | |
| | | 8.70 dBm(802.11n_HT40) 6.72 dBm(802.11ac_VHT80) | |
| | 5 725 MHz ~ 5 850 MHz Band | 11.70 dBm(802.11a) | |
| 11.60 dBm(802.11n_HT20) | | | |
| 12.44 dBm(802.11n_HT40) 9.47 dBm(802.11ac_VHT80) | | | |
| ANTENNA TYPE | Bluetooth LE | Chip Antenna | |
| | Bluetooth | Chip Antenna | |
| | WLAN 2.4 GHz | PCB Antenna | |
| | WLAN 5 GHz | Chip Antenna | |
| ANTENNA GAIN | Bluetooth LE | 2.49 dBi | |
| | Bluetooth | 2.49 dBi | |
| | WLAN 2.4 GHz | -2.91 dBi | |
| | 5 150 MHz ~ 5 250 MHz Band | 2.89 dBi | |
| | | 2.53 dBi | |
| List of each Osc. or crystal Freq.(Freq. >= 1 MHz) | | 32.768 kHz, 20 MHz, 25 MHz, 28.636 36 MHz, 38.4 MHz, 55.466 67 MHz | |

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name : LANR22

Tested sample P/N : ASRNCNAG1A1

Variant P/N :

| | | | | | | | | | | |
|----|----|----|----|----|----|----|----|----|----|----|
| A | S | # | # | C | N | A | G | 1 | # | # |
| A1 | A2 | B1 | B2 | C1 | C2 | C3 | C4 | D1 | E1 | F1 |

The # in P/N can be 0 to 9 or A to Z according to below Character or Number table.

| A1/A2 (Platform) | |
|---------------------|---------------|
| AS | AV Silver Box |

| B1/B2 (Customer Code) | |
|--------------------------|----------|
| RN | Renault |
| NS | Nissan |
| RS | Infinity |

| C1/C2/C3/C4 (Product spec.) | |
|--------------------------------|--|
| CNAG | Ext. Display/Radio/RVC/Bluetooth/Wi-fi |

| D1 (Generation) | |
|--------------------|--------------|
| 1 | Generation 1 |

| E1 (Production Year) | |
|-------------------------|------|
| A | 2021 |
| B | 2022 |
| C | 2023 |
| D | 2024 |
| E | 2025 |
| F | 2026 |

| F1 (Country Information) | |
|-----------------------------|-----------|
| 1 | EU/Canada |
| 2 | Mexico |
| 3 | USA |
| 4 | EU |
| 5 | Else |
| 6 | Japan |
| 7 | Korea |

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

| DEVICE TYPE | MANUFACTURER | MODEL/PART NUMBER | FCC ID |
|---------------|--------------------|-------------------|--------|
| Main Board | LG Electronics Inc | N/A | N/A |
| Audio Board | LG Electronics Inc | N/A | N/A |
| Antenna Board | LG Electronics Inc | N/A | N/A |

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

| Model | Manufacturer | Description | Connected to |
|-----------|--------------------|--------------------------------|--------------|
| LANR22 | LG Electronics Inc | NAVIGATION RADIO (EUT) | |
| TC-3000C | TESCOM | BLUETOOTH TESTER | EUT |
| CMW500 | ROHDE & SCHWARZ | WLAN / Bluetooth Signalling | EUT |
| PWS-3003D | Protek | DC Power Supply (DC 30 V 3 A) | |

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 441 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Channel List (Bluetooth)

| Channel | Frequency[MHz] | Channel | Frequency[MHz] | Channel | Frequency[MHz] |
|---------|----------------|---------|----------------|---------|----------------|
| 0 | 2 402.00 | 27 | 2 429.00 | 54 | 2 456.00 |
| 1 | 2 403.00 | 28 | 2 430.00 | 55 | 2 457.00 |
| 2 | 2 404.00 | 29 | 2 431.00 | 56 | 2 458.00 |
| 3 | 2 405.00 | 30 | 2 432.00 | 57 | 2 459.00 |
| 4 | 2 406.00 | 31 | 2 433.00 | 58 | 2 460.00 |
| 5 | 2 407.00 | 32 | 2 434.00 | 59 | 2 461.00 |
| 6 | 2 408.00 | 33 | 2 435.00 | 60 | 2 462.00 |
| 7 | 2 409.00 | 34 | 2 436.00 | 61 | 2 463.00 |
| 8 | 2 410.00 | 35 | 2 437.00 | 62 | 2 464.00 |
| 9 | 2 411.00 | 36 | 2 438.00 | 63 | 2 465.00 |
| 10 | 2 412.00 | 37 | 2 439.00 | 64 | 2 466.00 |
| 11 | 2 413.00 | 38 | 2 440.00 | 65 | 2 467.00 |
| 12 | 2 414.00 | 39 | 2 441.00 | 66 | 2 468.00 |
| 13 | 2 415.00 | 40 | 2 442.00 | 67 | 2 469.00 |
| 14 | 2 416.00 | 41 | 2 443.00 | 68 | 2 470.00 |
| 15 | 2 417.00 | 42 | 2 444.00 | 69 | 2 471.00 |
| 16 | 2 418.00 | 43 | 2 445.00 | 70 | 2 472.00 |
| 17 | 2 419.00 | 44 | 2 446.00 | 71 | 2 473.00 |
| 18 | 2 420.00 | 45 | 2 447.00 | 72 | 2 474.00 |
| 19 | 2 421.00 | 46 | 2 448.00 | 73 | 2 475.00 |
| 20 | 2 422.00 | 47 | 2 449.00 | 74 | 2 476.00 |
| 21 | 2 423.00 | 48 | 2 450.00 | 75 | 2 477.00 |
| 22 | 2 424.00 | 49 | 2 451.00 | 76 | 2 478.00 |
| 23 | 2 425.00 | 50 | 2 452.00 | 77 | 2 479.00 |
| 24 | 2 426.00 | 51 | 2 453.00 | 78 | 2 480.00 |
| 25 | 2 427.00 | 52 | 2 454.00 | | |
| 26 | 2 428.00 | 53 | 2 455.00 | | |


- Duty Cycle

| Mode | Tx On Time [ms] | Tx Off Time [ms] | Duty Cycle [%] | Correction Factor [dB] |
|-------------------------|----------------------|-----------------------|---------------------|-----------------------------|
| Bluetooth [1 Mbps] | 2.88 | 0.88 | 76.60 | 1.16 |
| Bluetooth [2 Mbps] | 2.90 | 0.86 | 77.13 | 1.13 |
| Bluetooth [3 Mbps] | 2.90 | 0.86 | 77.13 | 1.13 |

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

- Test Plot

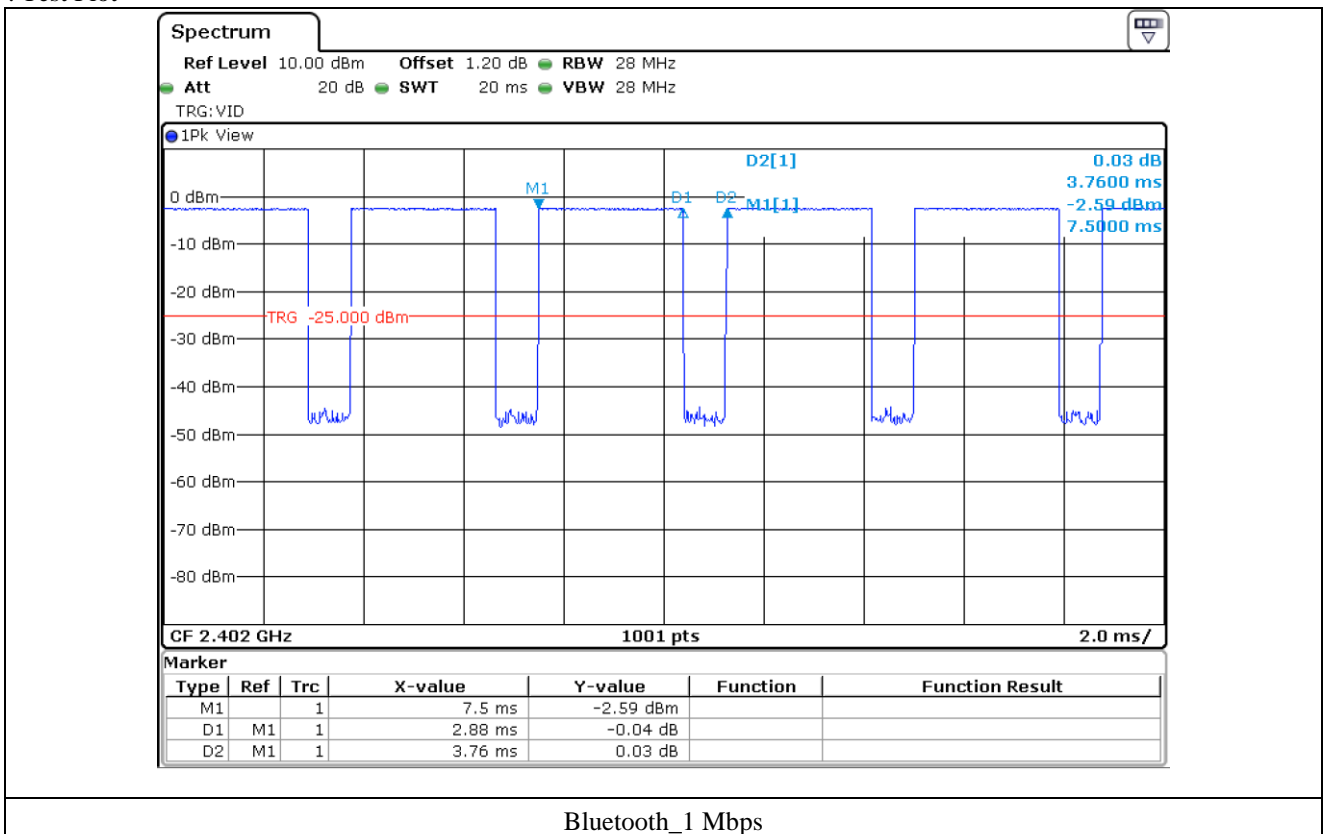

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC Power.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

| Operation Mode | The Worse operating condition (Please check one only) |
|--|---|
| It is not need to test this requirement, because the power of the EUT is supplied by DC Power. | |

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

| Operation Mode | The Worse operating condition (Please check one only) |
|-------------------|---|
| Transmitting Mode | X |


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 1 % to 5 % of the OBW, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

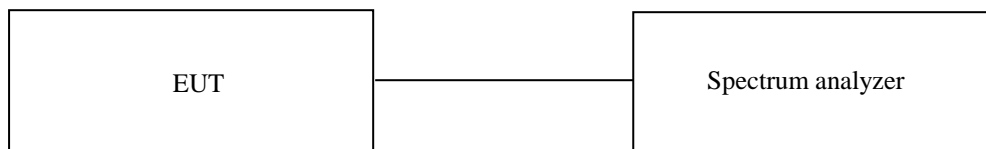



7.3 Test Date

January 28, 2021 ~ February 04, 2021


7.4 Test data for 1 Mbps

| CHANNEL | FREQUENCY (MHz) | 20 dB Bandwidth (kHz) |
|---------|-----------------|-----------------------|
| Low | 2 402.00 | 759.20 |
| Middle | 2 441.00 | 759.20 |
| High | 2 480.00 | 764.20 |

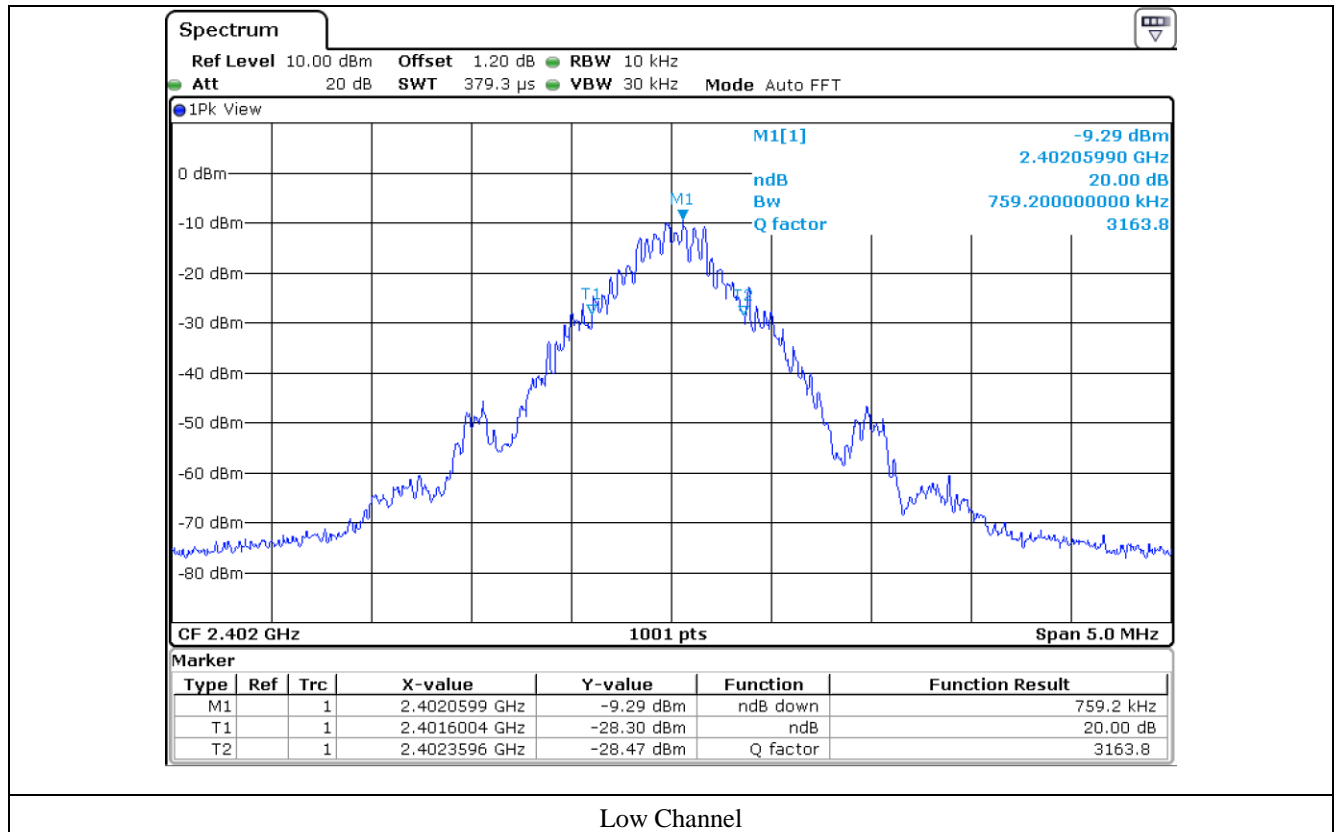

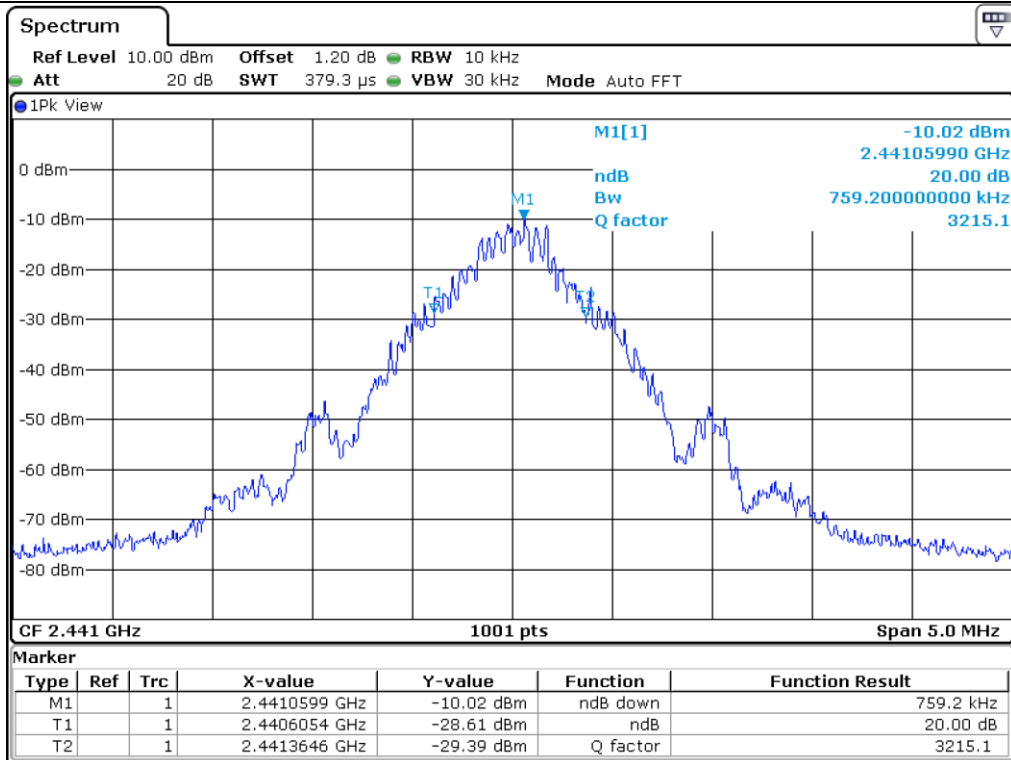


Middle Channel

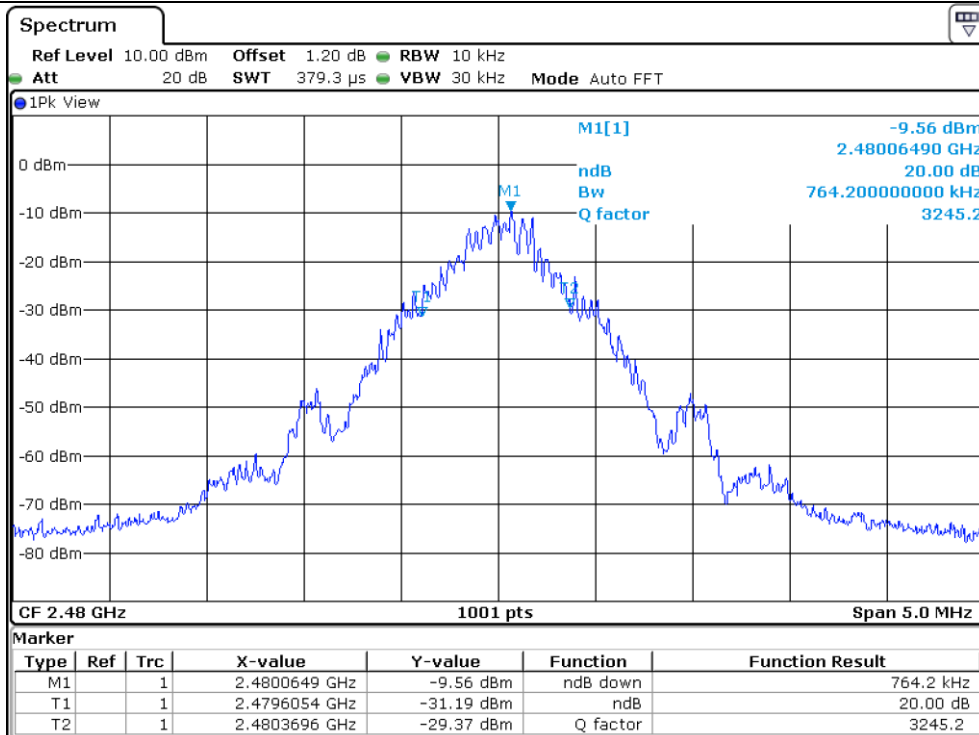


High Channel


7.5 Test data for 2 Mbps

| CHANNEL | FREQUENCY (MHz) | 20 dB Bandwidth (kHz) |
|---------|-----------------|-----------------------|
| Low | 2 402.00 | 1 353.60 |
| Middle | 2 441.00 | 1 348.70 |
| High | 2 480.00 | 1 358.60 |

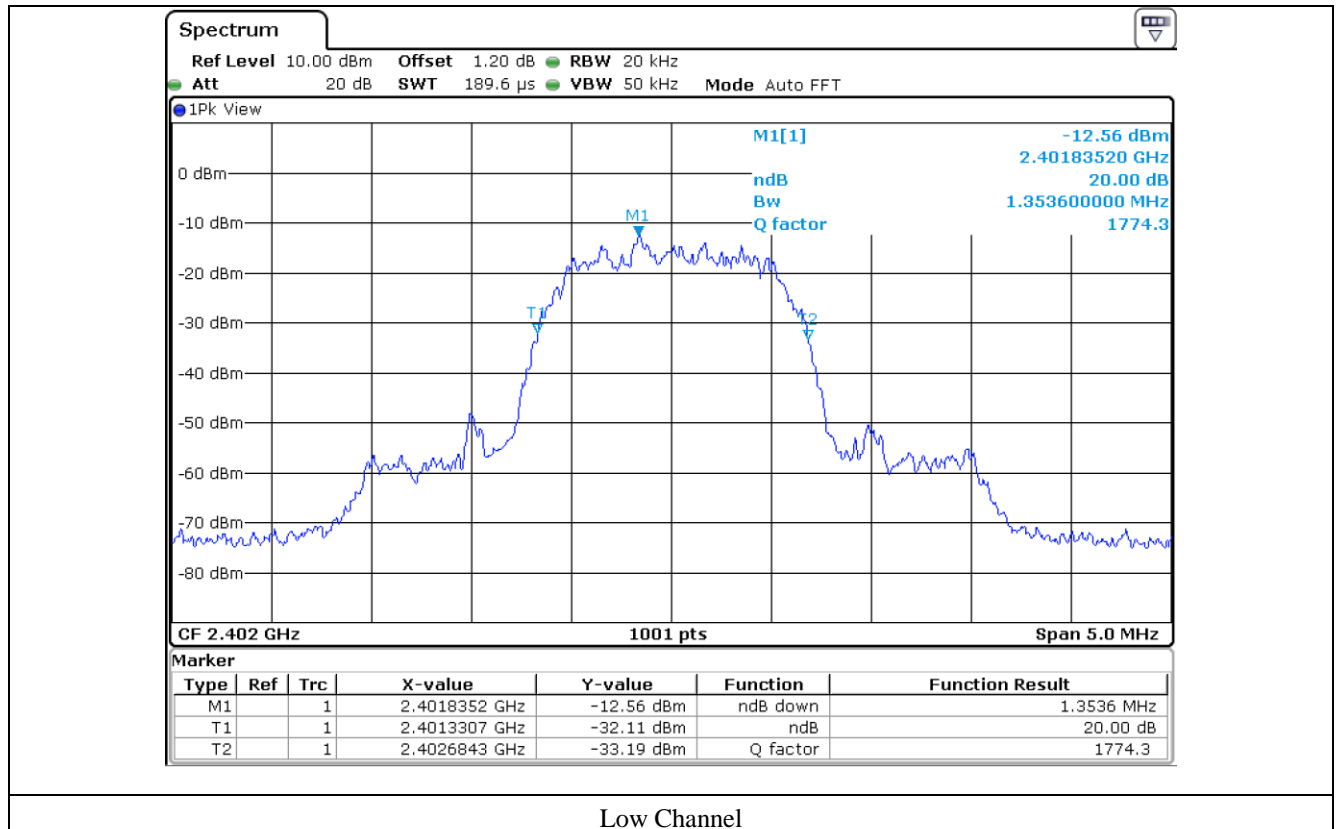

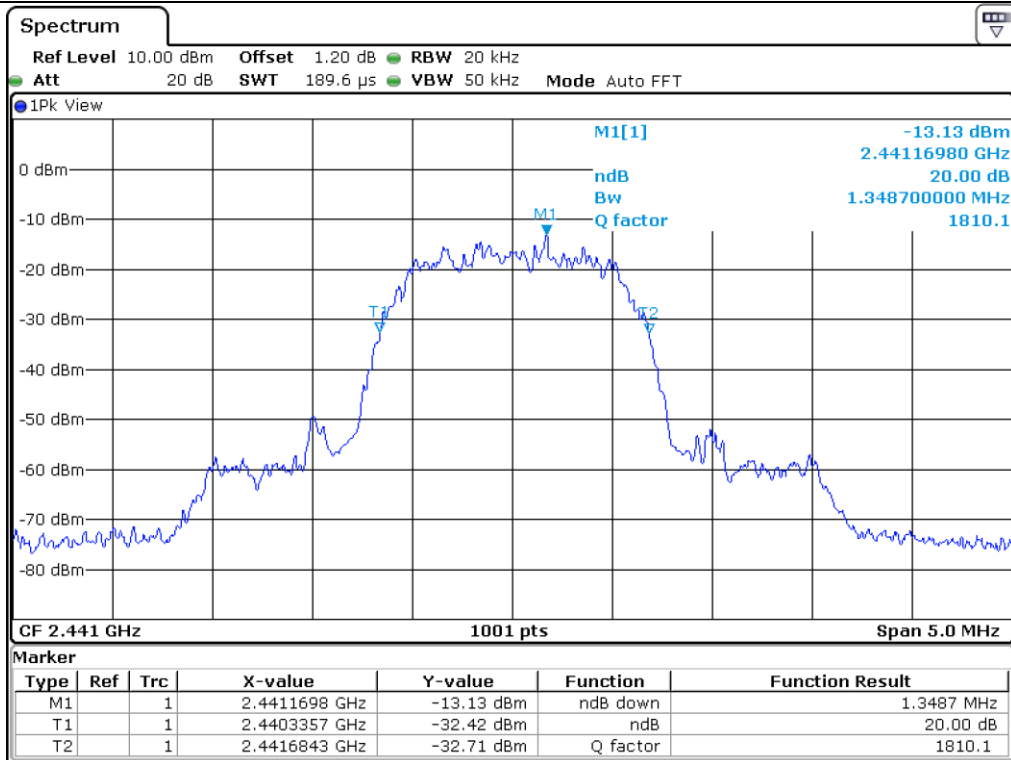


Middle Channel

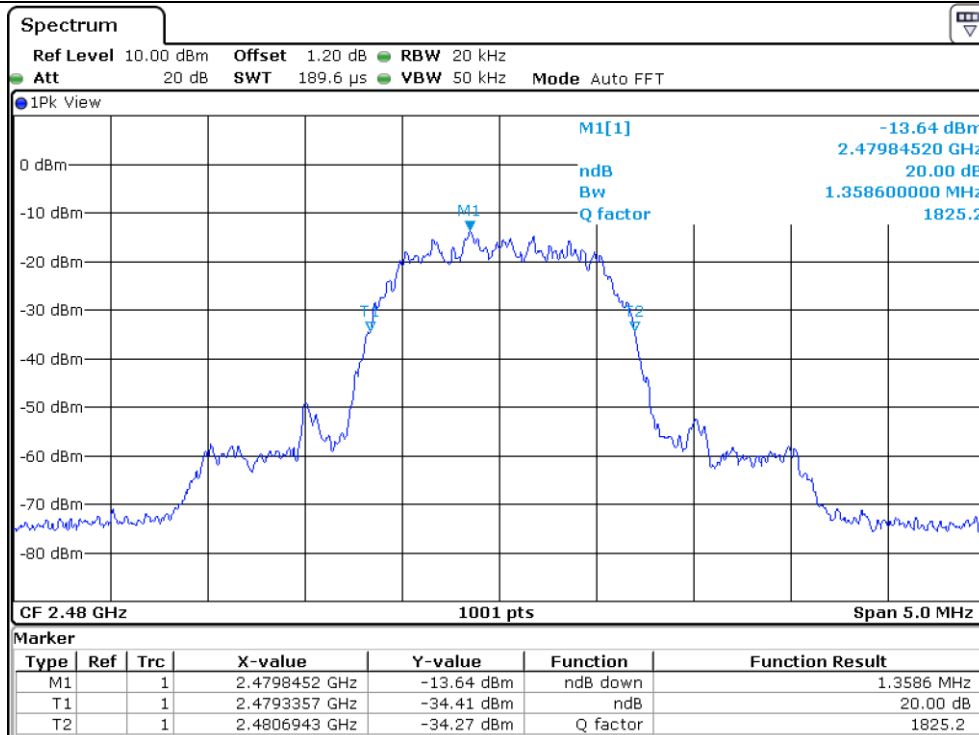


High Channel


7.6 Test data for 3 Mbps

| CHANNEL | FREQUENCY (MHz) | 20 dB Bandwidth (kHz) |
|---------|-----------------|-----------------------|
| Low | 2 402.00 | 1 343.70 |
| Middle | 2 441.00 | 1 343.70 |
| High | 2 480.00 | 1 343.70 |

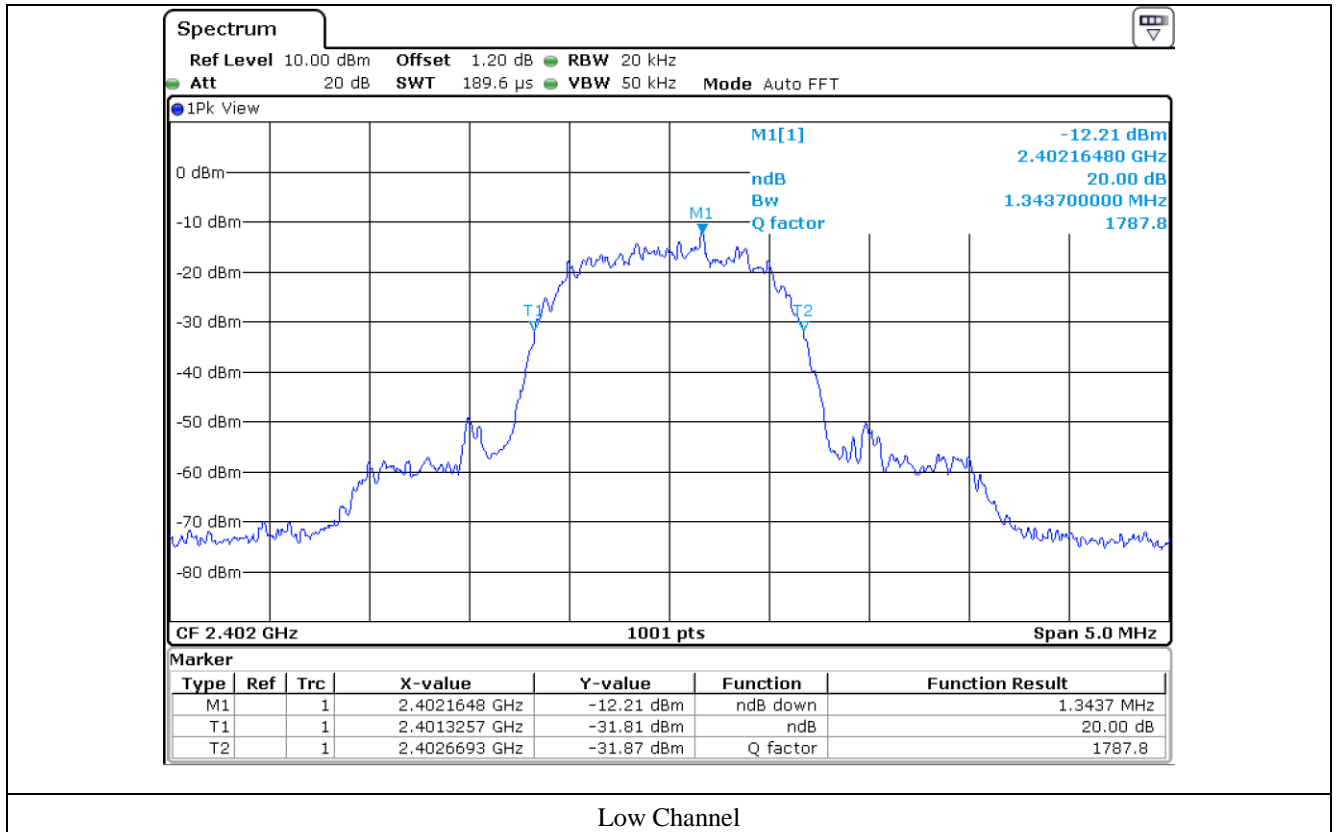

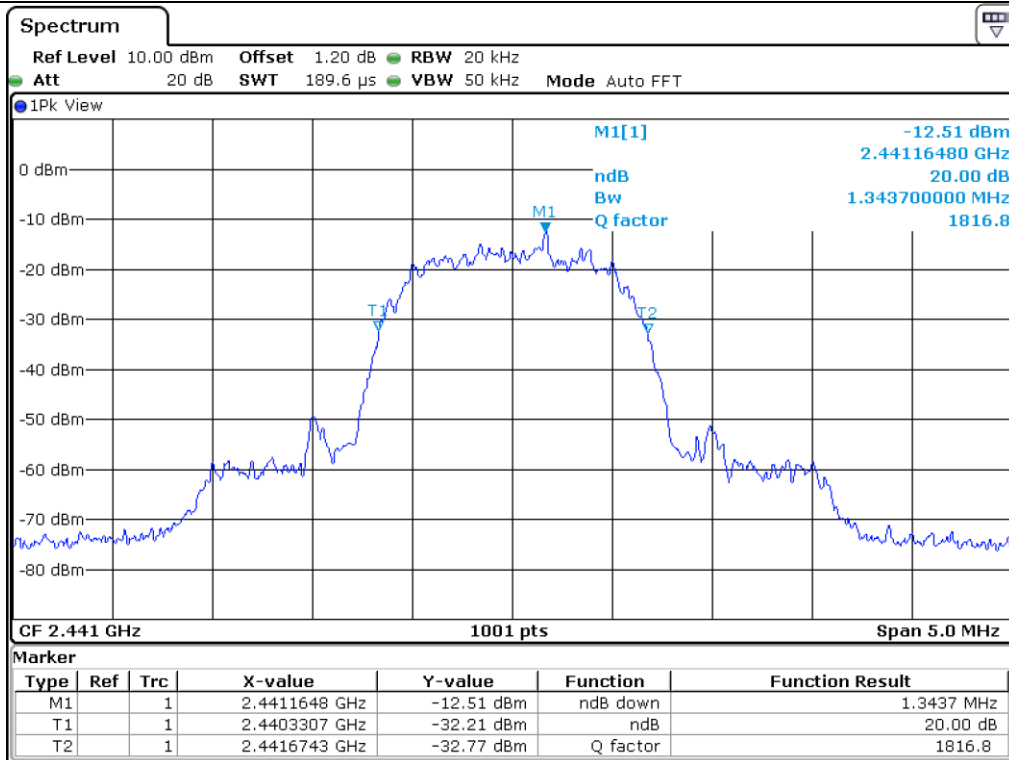

Middle Channel

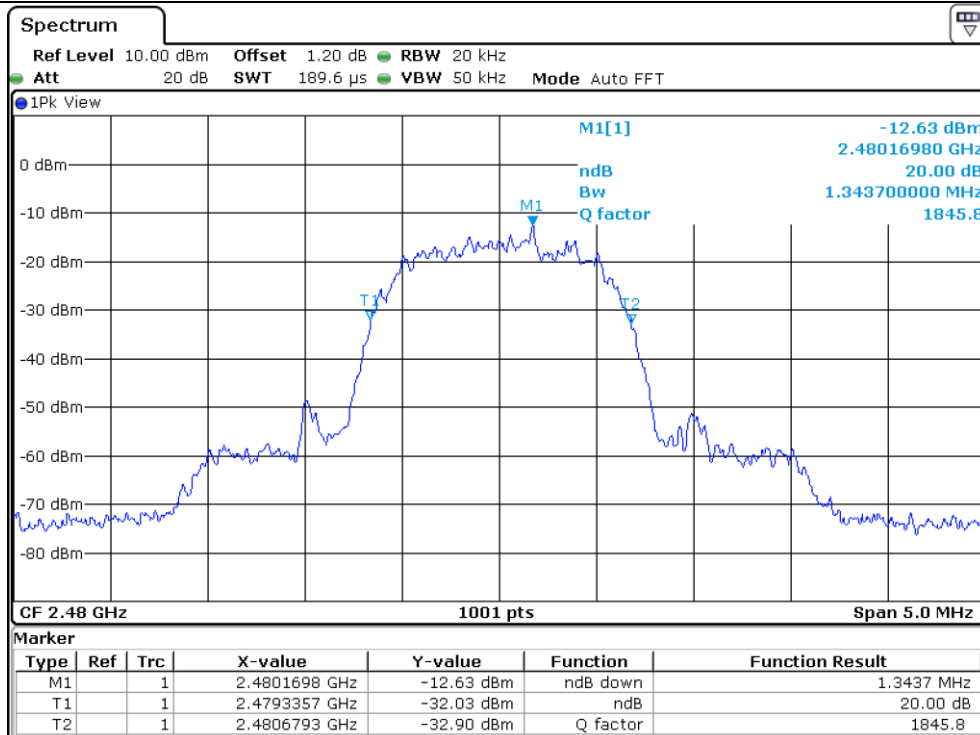

High Channel


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 5 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

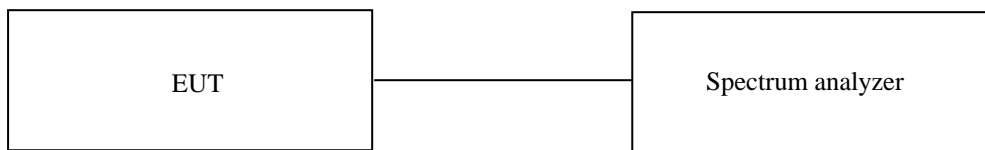


8.3 Test Date

January 28, 2021 ~ February 04, 2021

8.4 Test data for 1 Mbps

-. Test Result : Pass


| MEASURED VLAUE (kHz) | Two-third of 20 dB Bandwidth (kHz) | LIMIT |
|----------------------|------------------------------------|--------------------------------------|
| 999.00 | 506.13 | Separated by a minimum of 506.13 kHz |

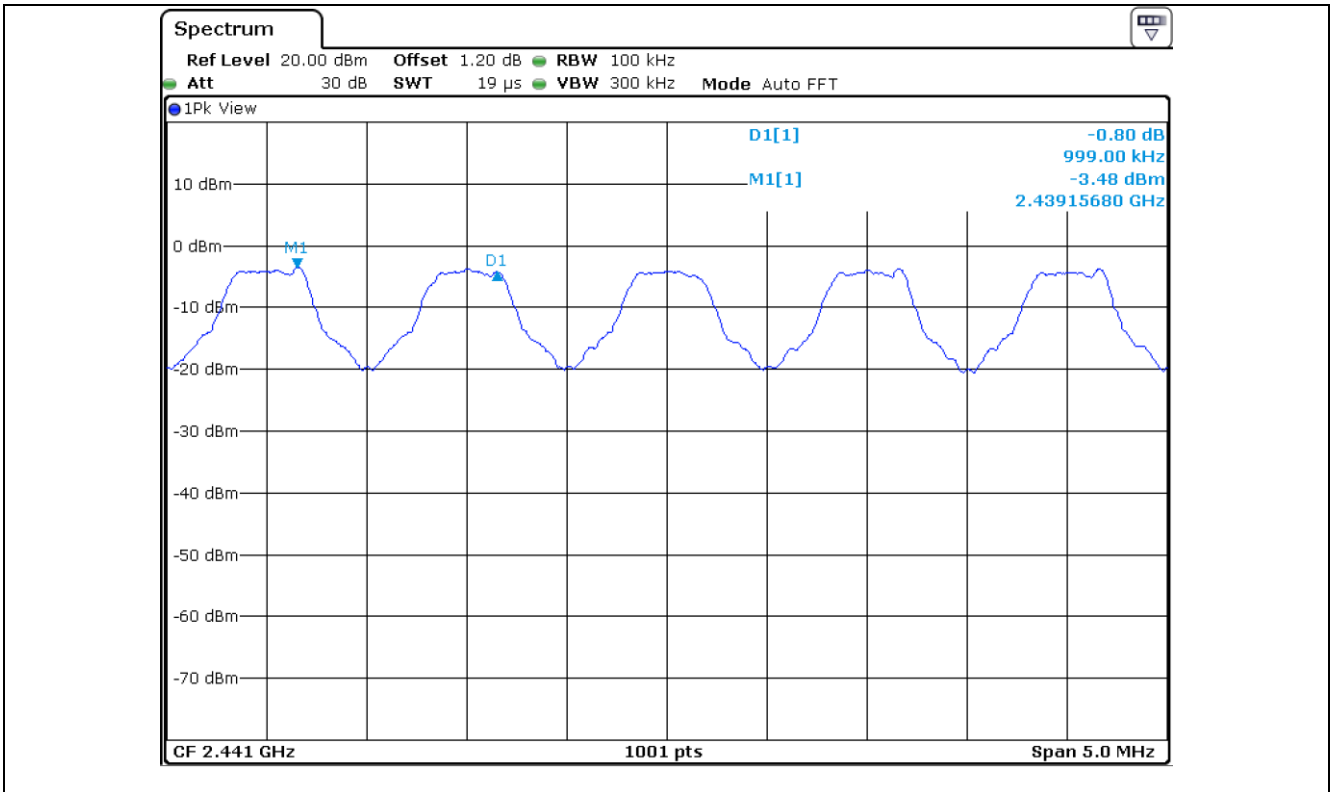

8.5 Test data for 2 Mbps

-. Test Result : Pass


| MEASURED VLAUE (kHz) | Two-third of 20 dB Bandwidth (kHz) | LIMIT |
|----------------------|------------------------------------|--------------------------------------|
| 999.00 | 899.13 | Separated by a minimum of 899.13 kHz |

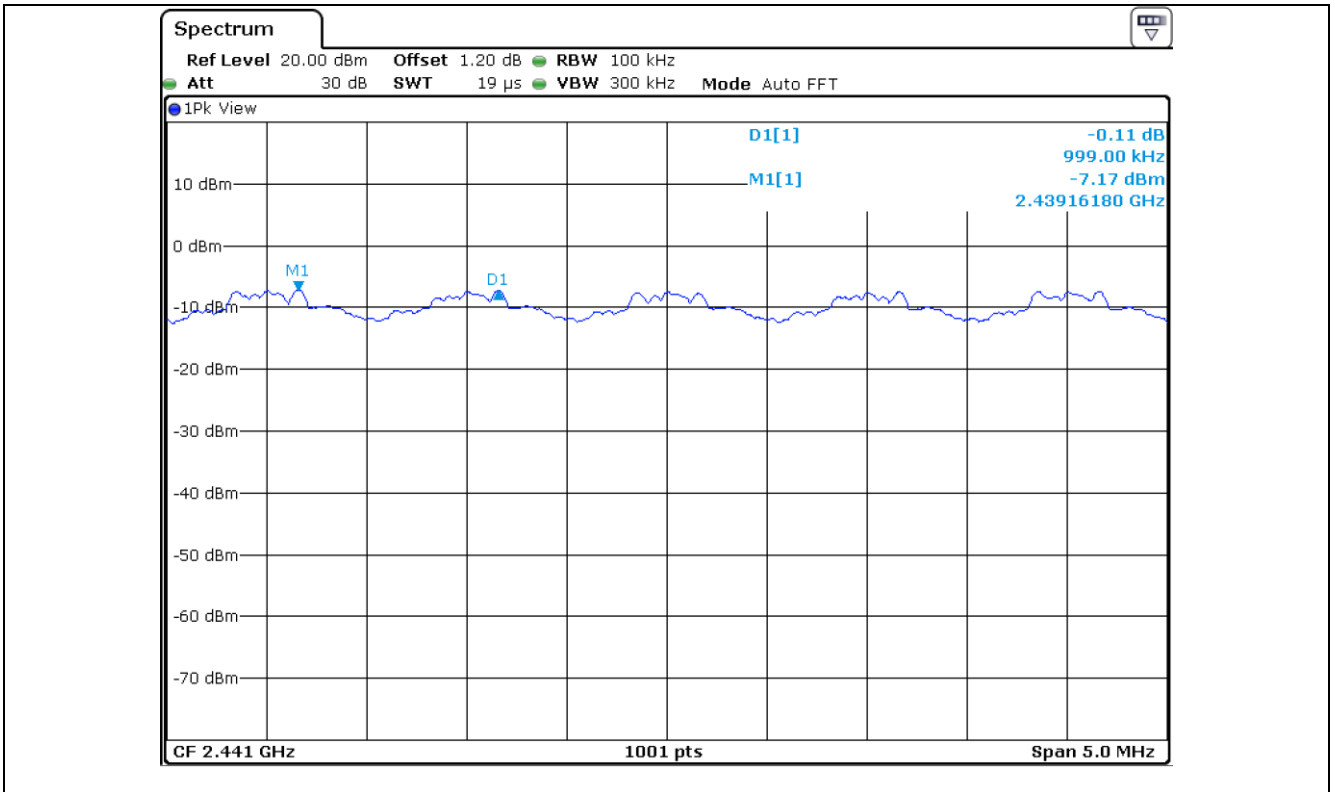

8.6 Test data for 3 Mbps

-. Test Result : Pass

| MEASURED VLAUE (kHz) | Two-third of 20 dB Bandwidth (kHz) | LIMIT |
|----------------------|------------------------------------|--------------------------------------|
| 999.00 | 895.80 | Separated by a minimum of 895.80 kHz |

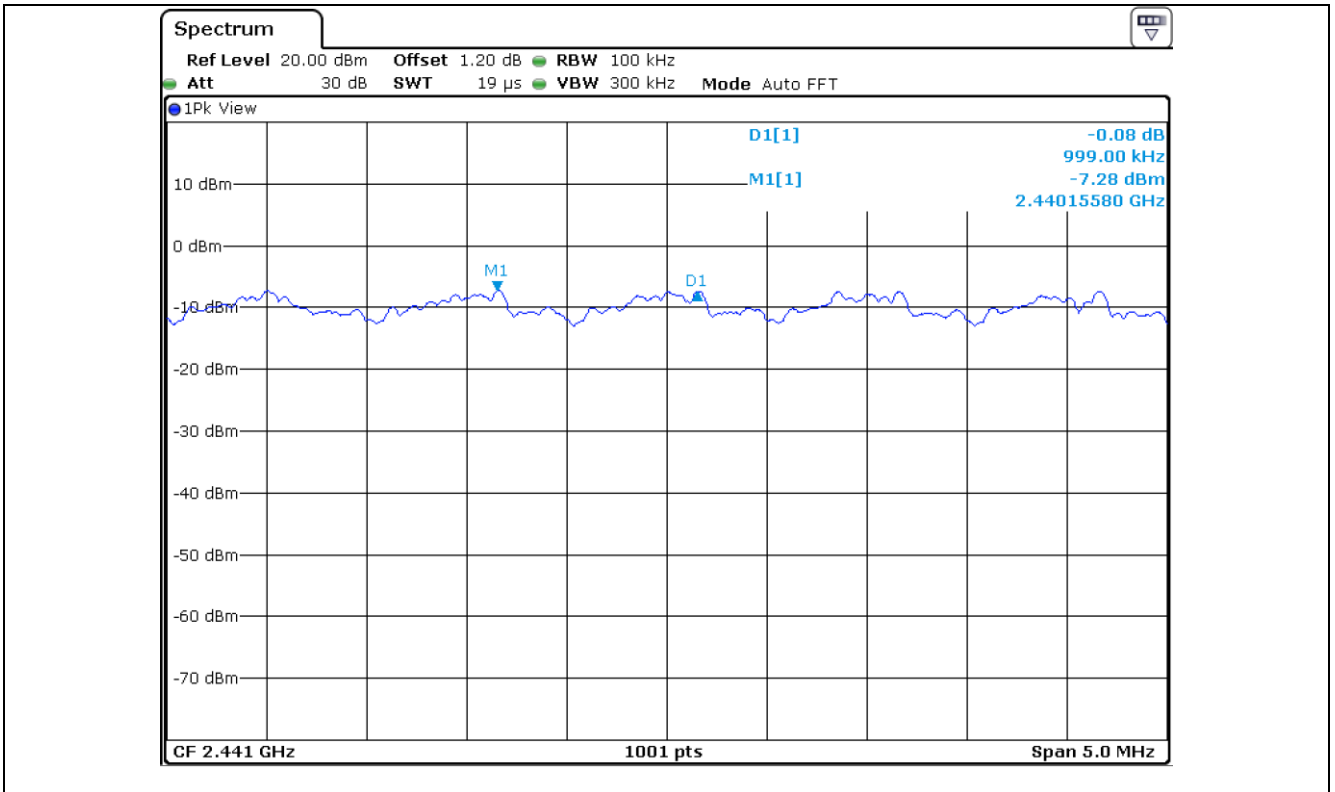


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 kHz and the resolution bandwidth is set to 300 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

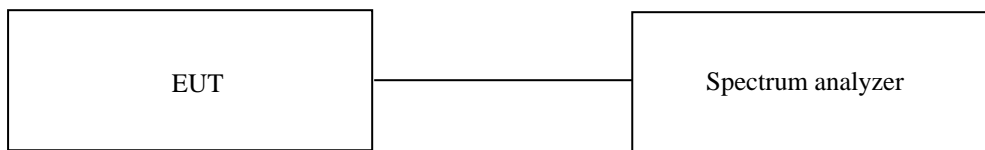


9.3 Test Date


January 28, 2021 ~ February 04, 2021

9.4 Test data for 1 Mbps


-. Test Result : Pass

| Data Transfer Rate | Measured value (Number) | Limit (Number) | Margin (Number) |
|--------------------|-------------------------|----------------|-----------------|
| 1 Mbps | 79 | Minimum of 15 | 64 |

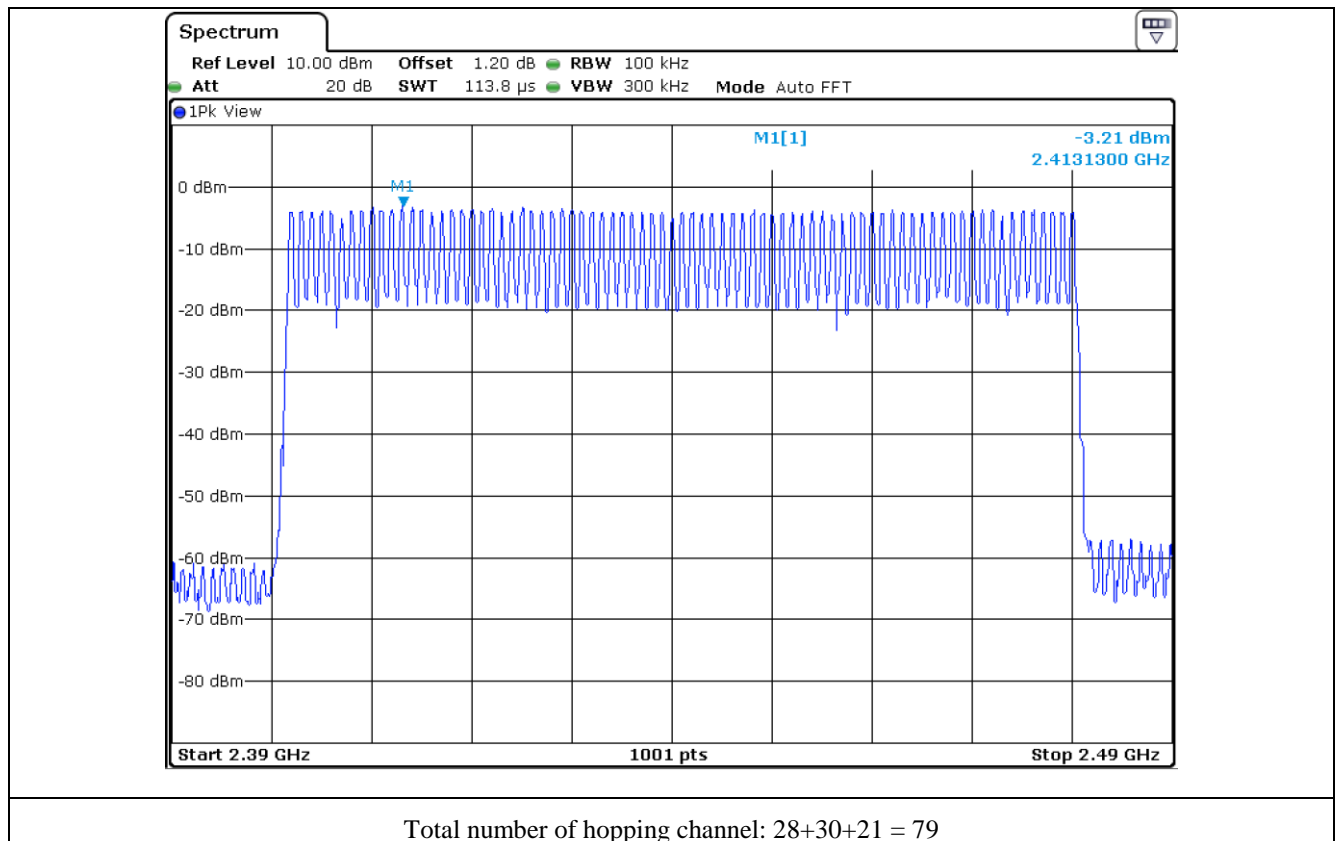


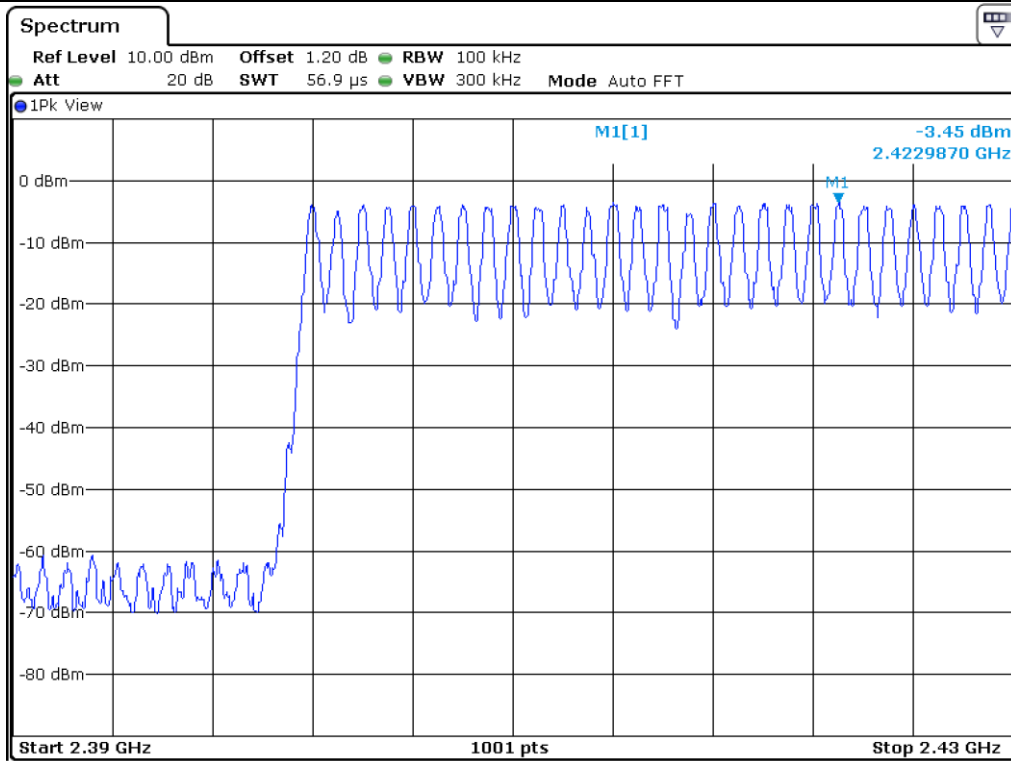

Number of hopping channel: 28

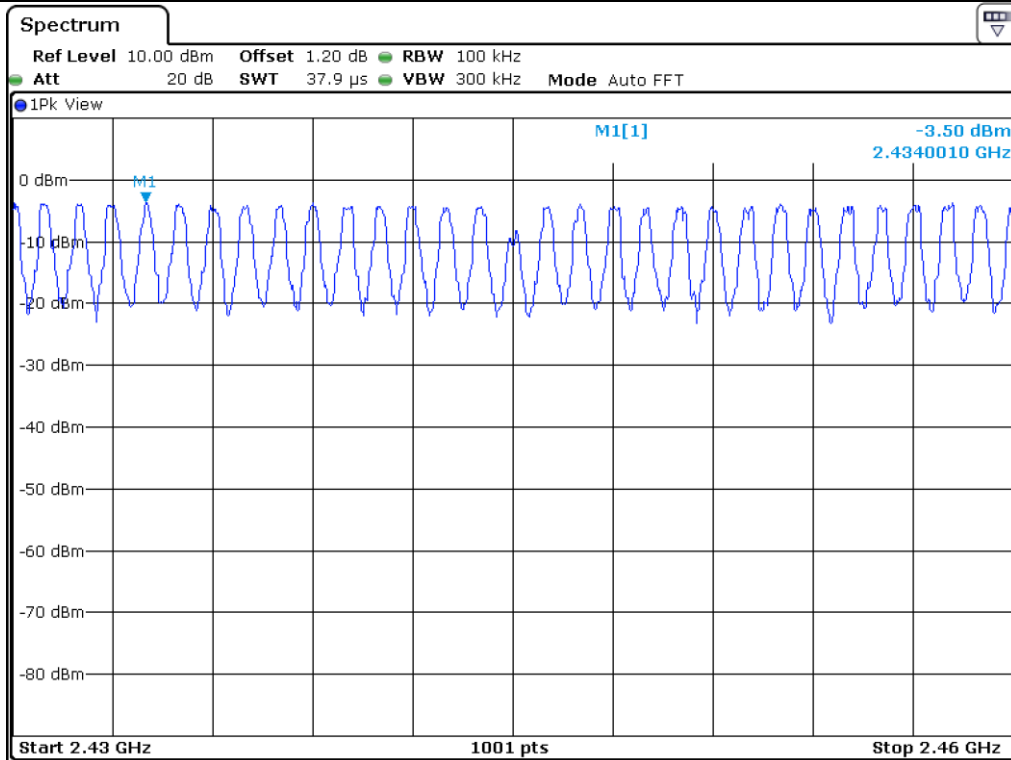


Number of hopping channel: 30

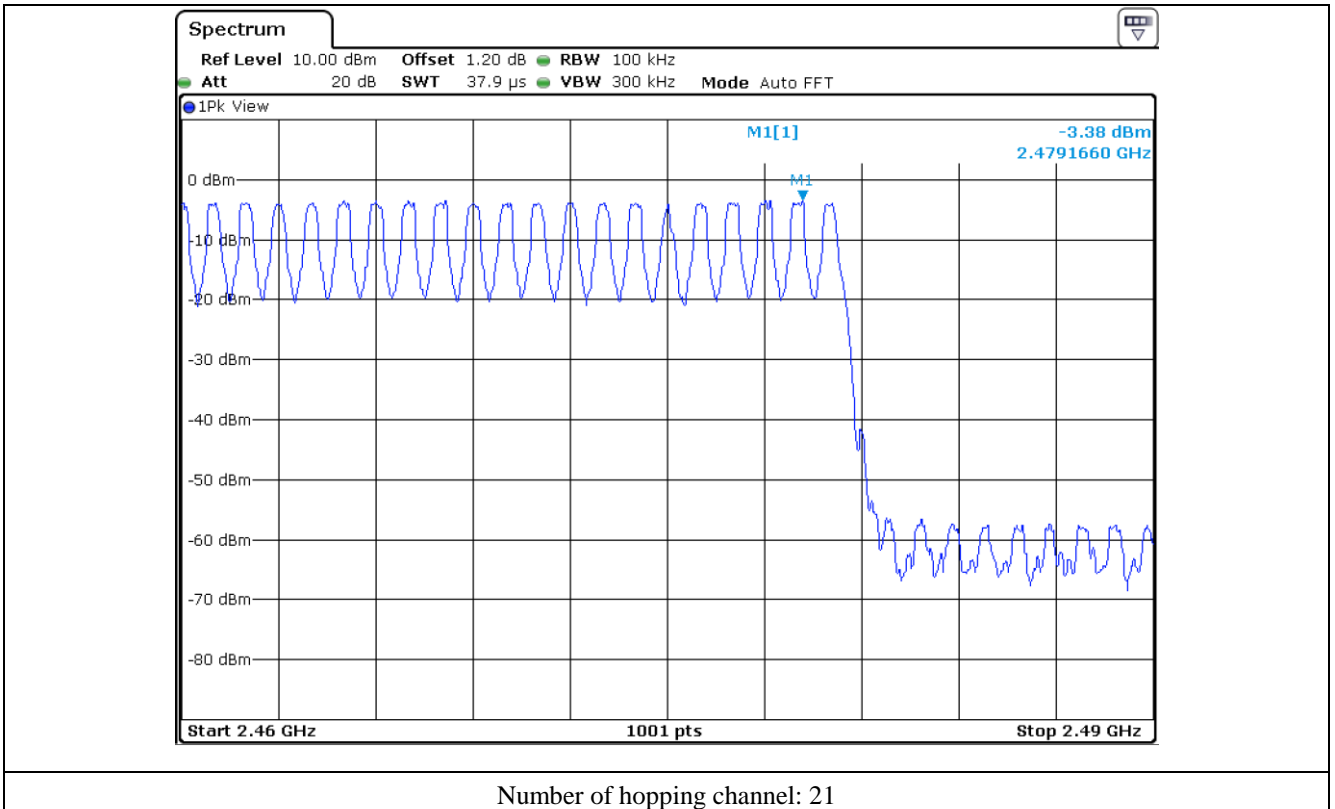


9.5 Test data for 2 Mbps


-. Test Result : Pass

| Data Transfer Rate | Measured value (Number) | Limit (Number) | Margin (Number) |
|--------------------|-------------------------|----------------|-----------------|
| 2 Mbps | 79 | Minimum of 15 | 64 |

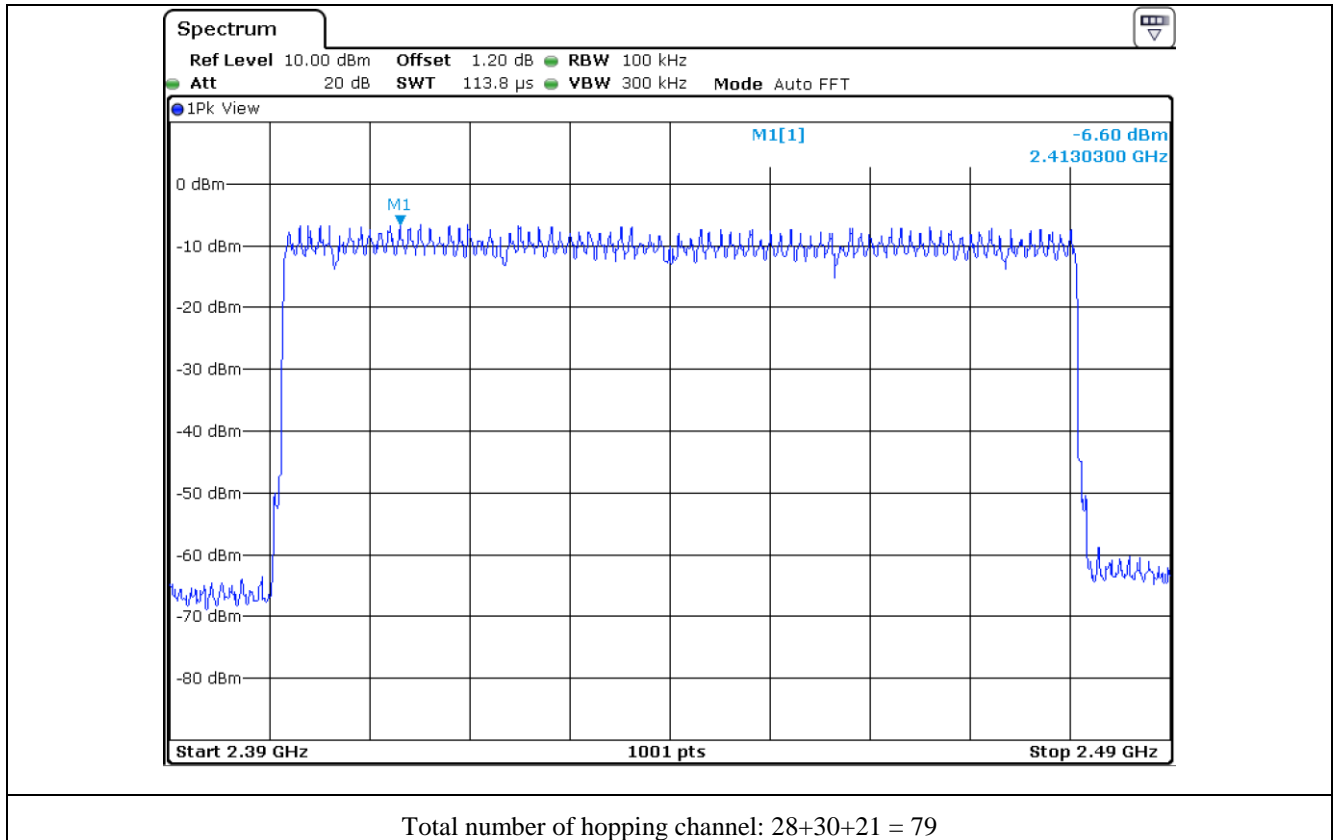


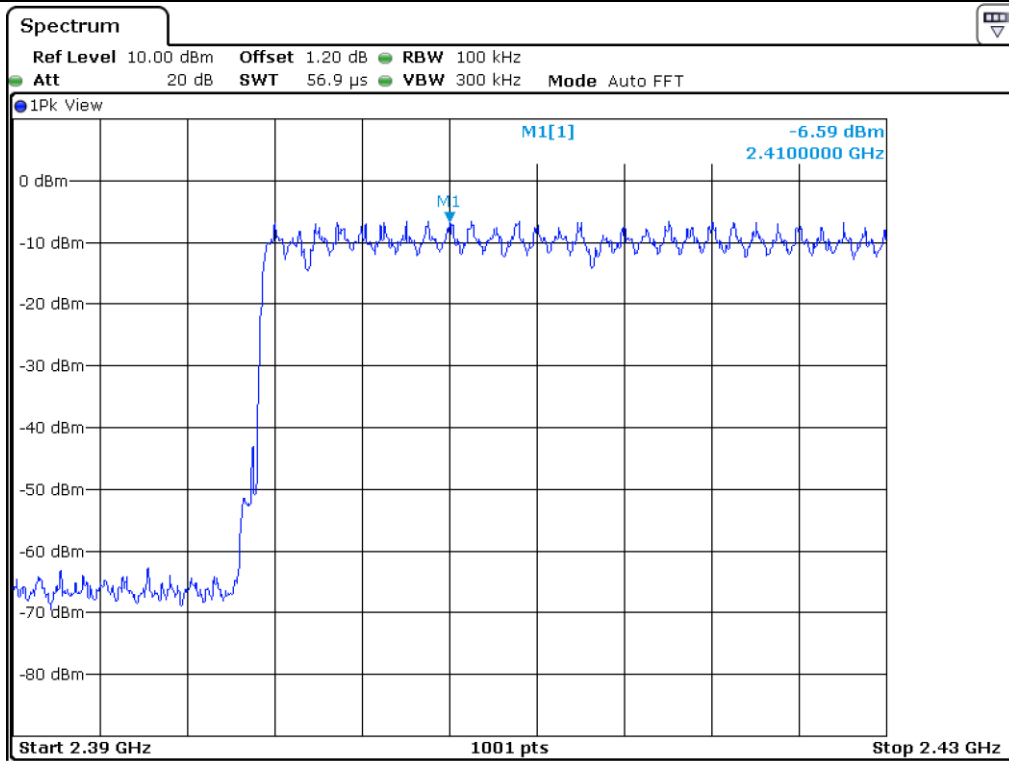

Number of hopping channel: 28

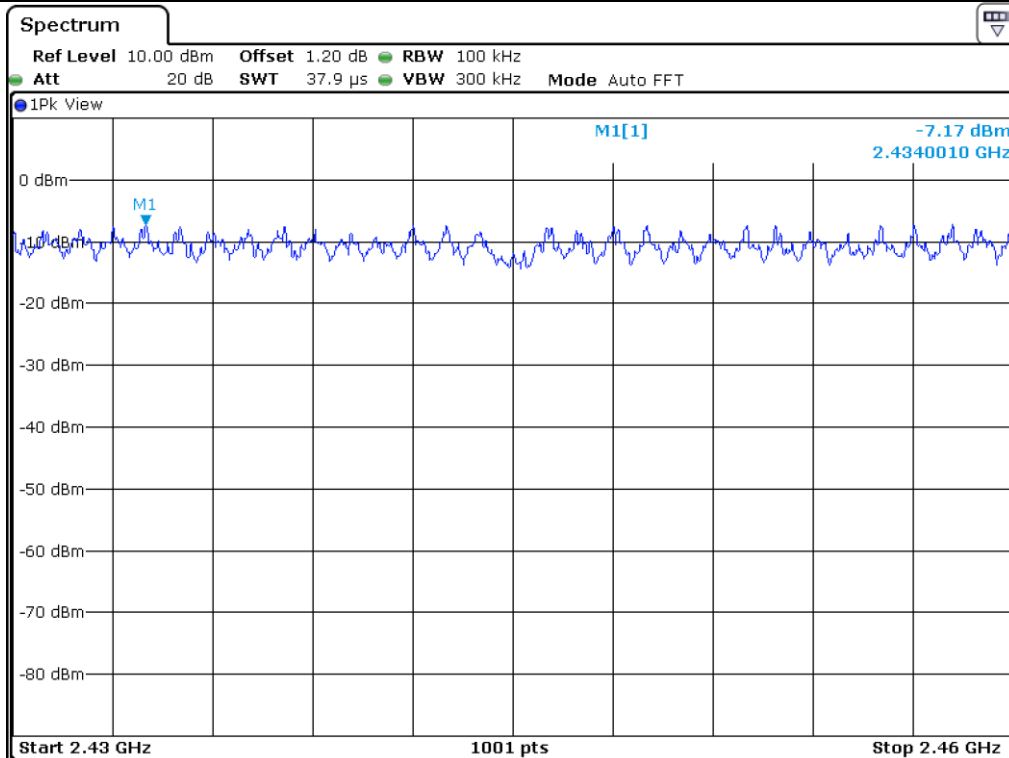


Number of hopping channel: 30

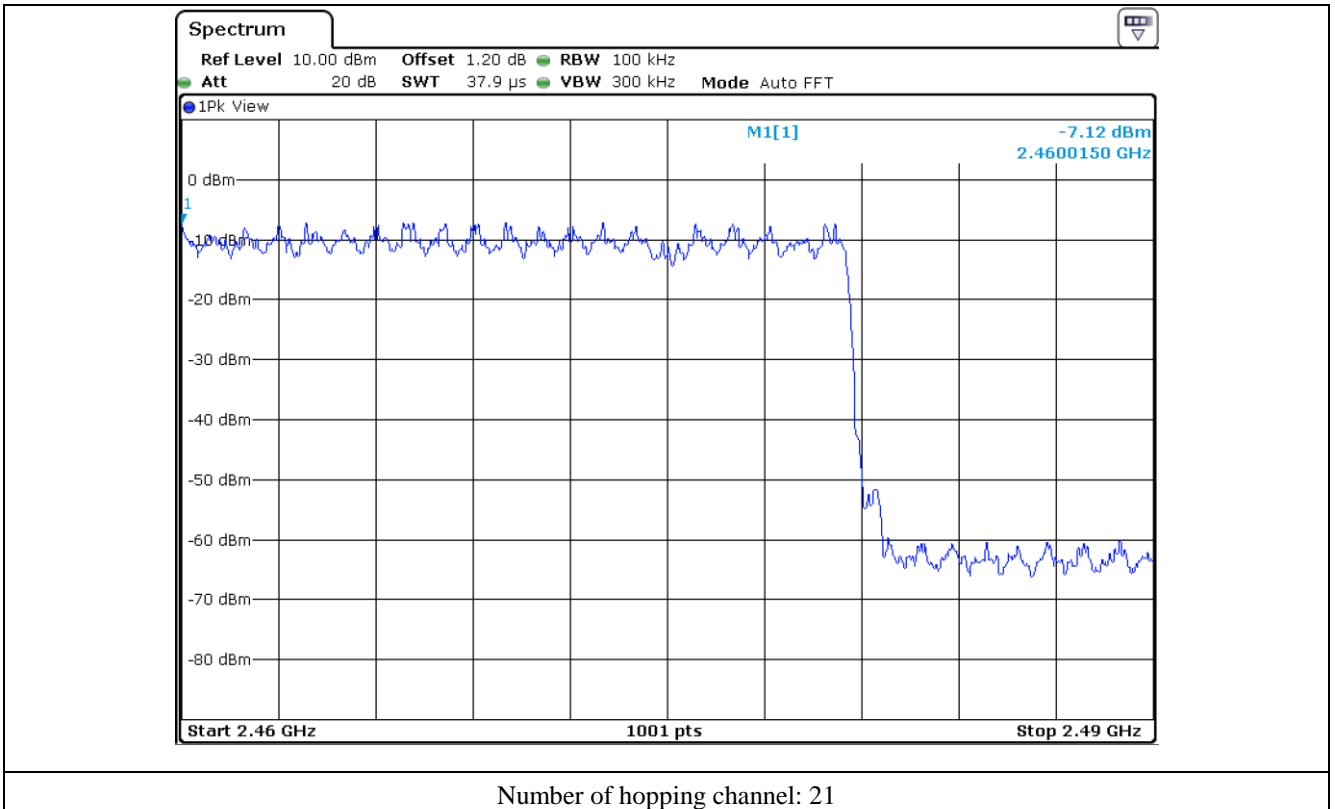


9.6 Test data for 3 Mbps

-. Test Result : Pass


| Data Transfer Rate | Measured value (Number) | Limit (Number) | Margin (Number) |
|--------------------|-------------------------|----------------|-----------------|
| 3 Mbps | 79 | Minimum of 15 | 64 |

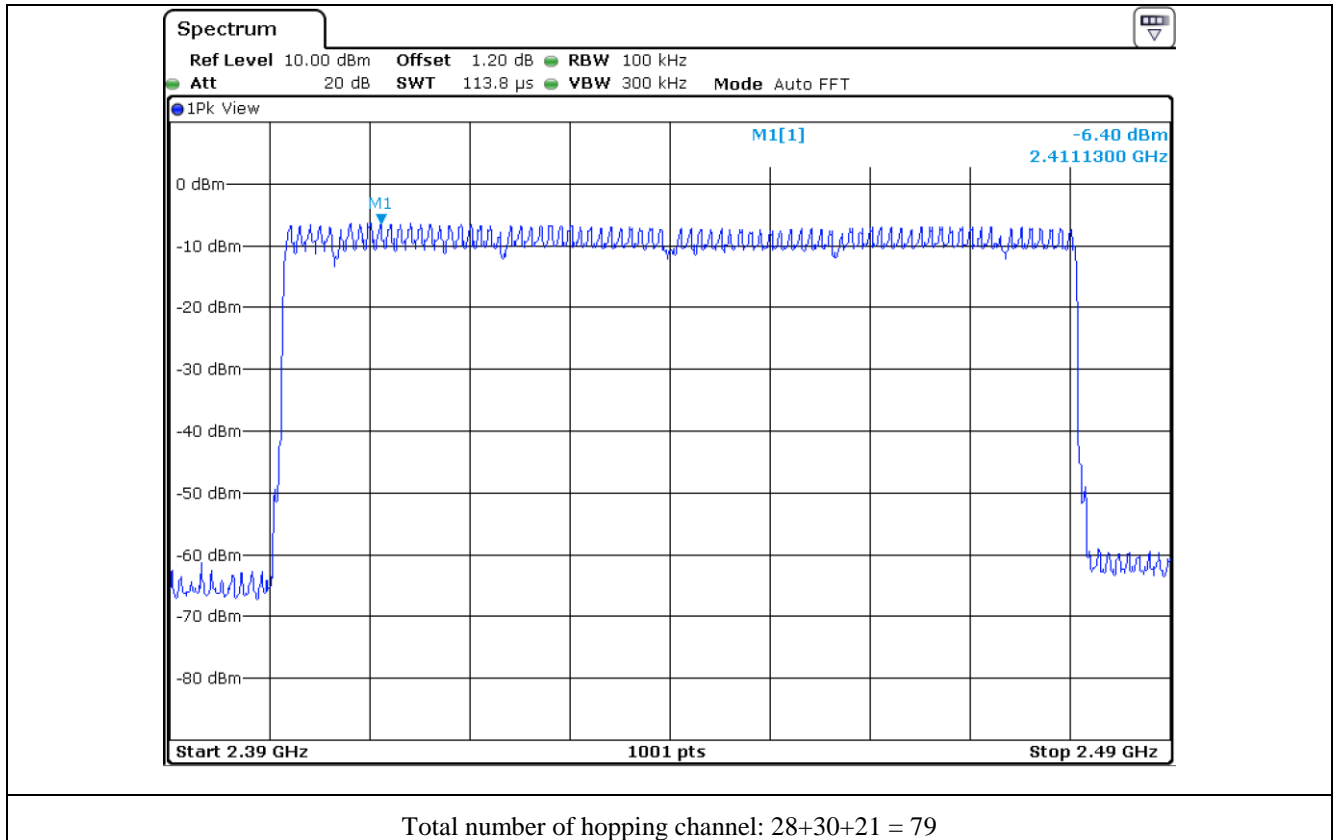


Total number of hopping channel: 28+30+21 = 79

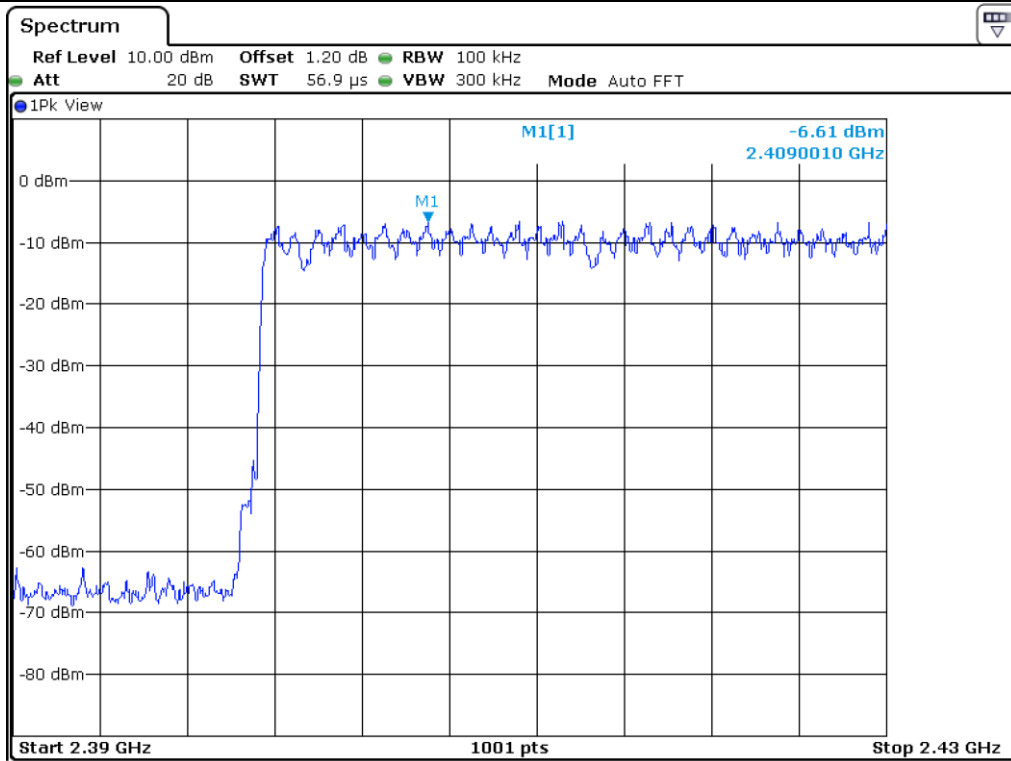

Number of hopping channel: 28

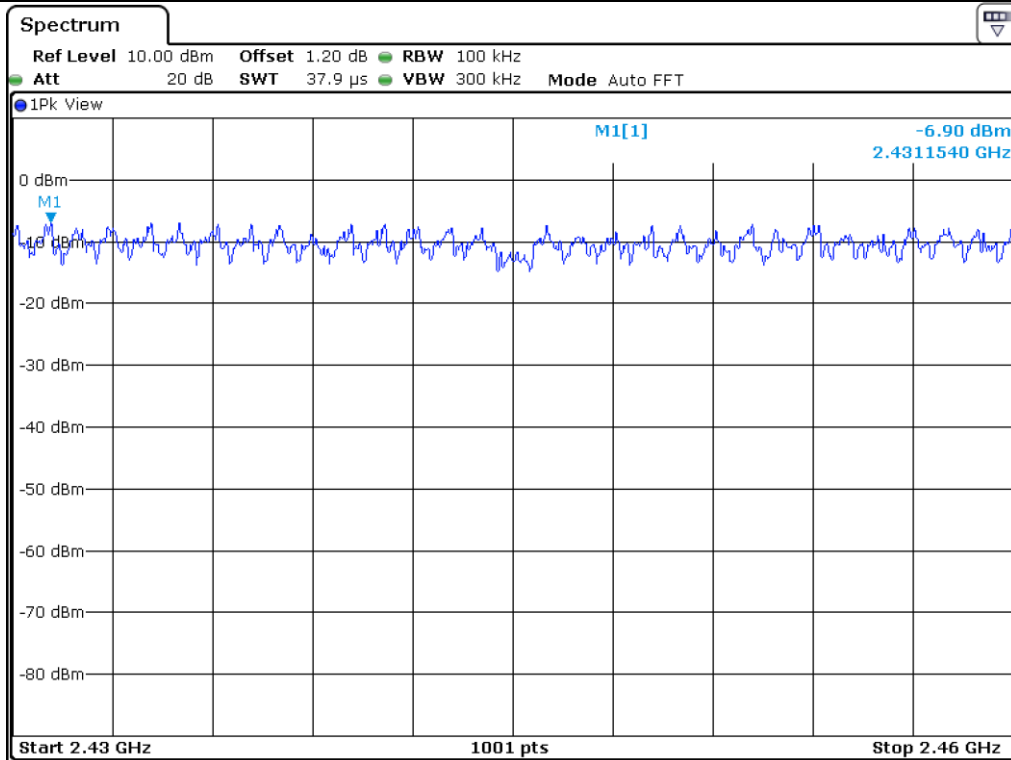

Number of hopping channel: 30

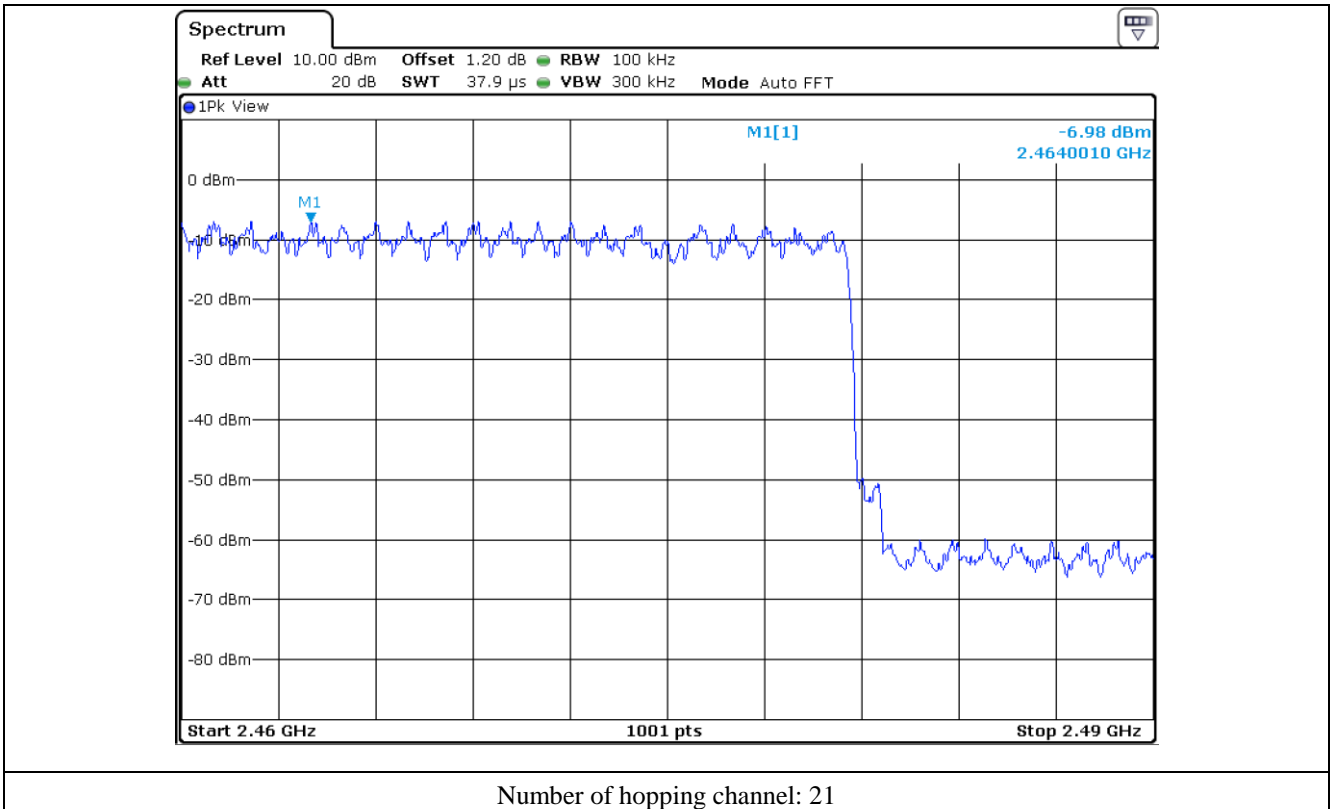


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

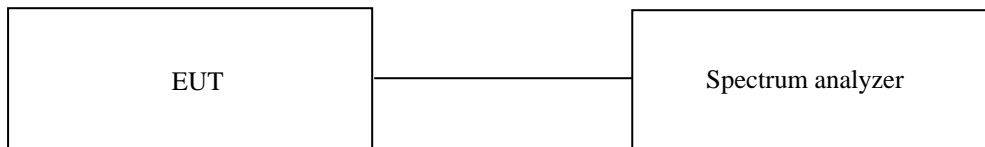

10.3 Test Date

January 28, 2021 ~ February 04, 2021

10.4 Test data for 1 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.


| Packet Type | Pulse Time (ms) | Hops per second with channels | Period Time (ms) | Total Dwell Time (ms) | Limit (ms) | Test Result |
|-------------|-----------------|-------------------------------|------------------|-----------------------|------------|-------------|
| DH1 | 0.380 | 10.13 | 31.60 | 121.64 | 400.00 | PASS |
| DH3 | 1.640 | 5.06 | 31.60 | 262.23 | 400.00 | |
| DH5 | 2.900 | 3.38 | 31.60 | 309.74 | 400.00 | |

Total dwell time is calculated as following.


Total Dwell Time = Pulse time * Hops per second with channels * period time

Remark: See next page for an overview sweep performed with peak detector.

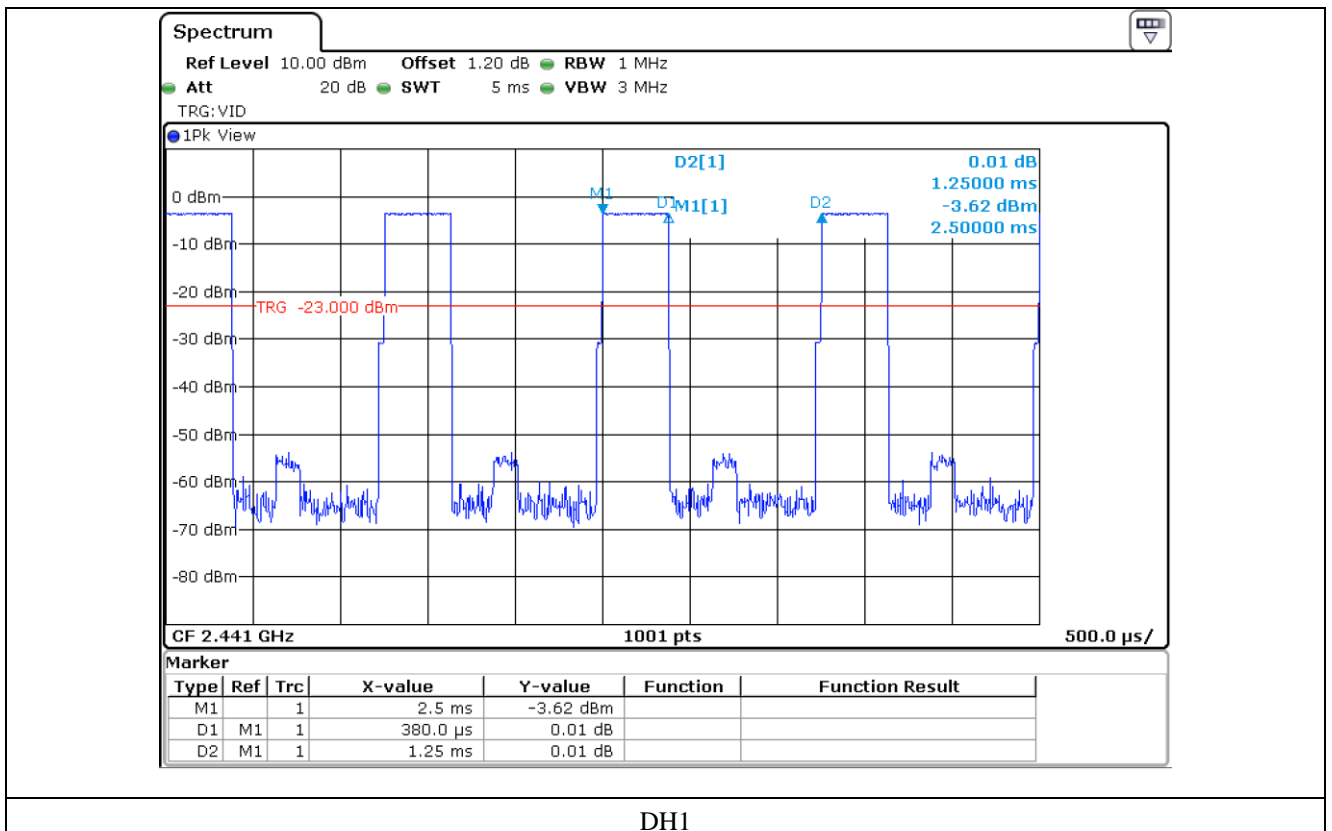

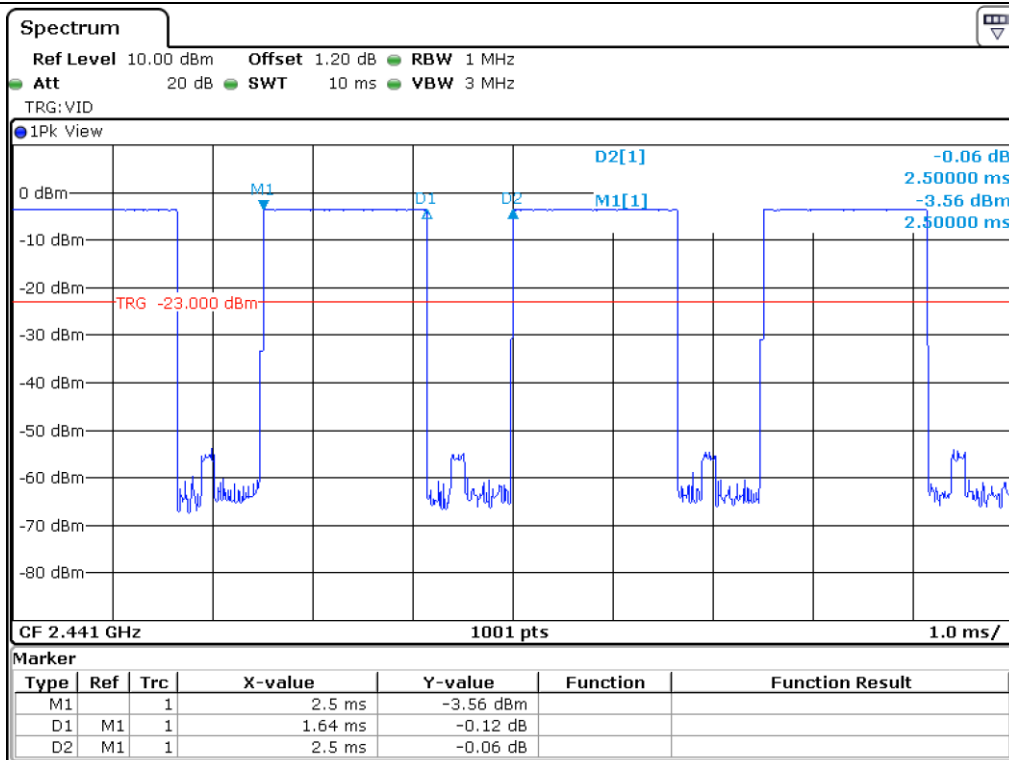

DH3

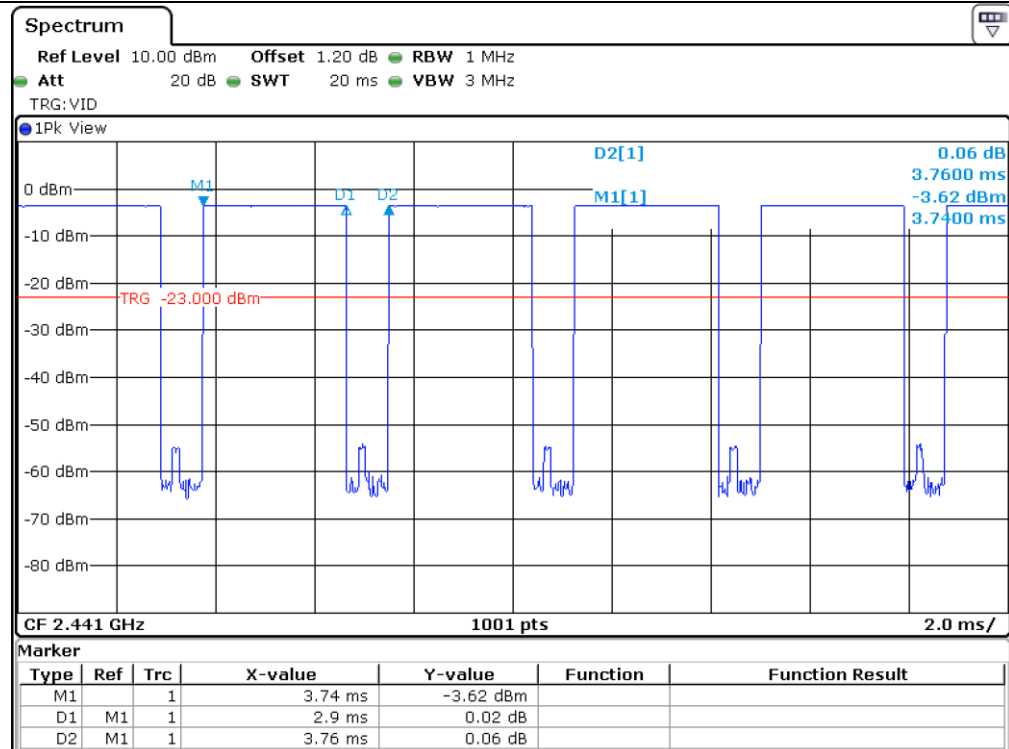

DH5

10.5 Test data for 2 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\ 600/2/79$) for DH1, and 5.06 times ($= 1\ 600/4/79$) for DH3, and 3.38 times ($= 1\ 600/6/79$) for DH5.


| Packet Type | Pulse Time (ms) | Hops per second with channels | Period Time (ms) | Total Dwell Time (ms) | Limit (ms) | Test Result |
|-------------|-----------------|-------------------------------|------------------|-----------------------|------------|-------------|
| DH1 | 0.385 | 10.13 | 31.60 | 123.24 | 400.00 | PASS |
| DH3 | 1.640 | 5.06 | 31.60 | 262.23 | 400.00 | |
| DH5 | 2.900 | 3.38 | 31.60 | 309.74 | 400.00 | |

Total dwell time is calculated as following.


Total Dwell Time = Pulse time * Hops per second with channels * period time

Remark: See next page for an overview sweep performed with peak detector.

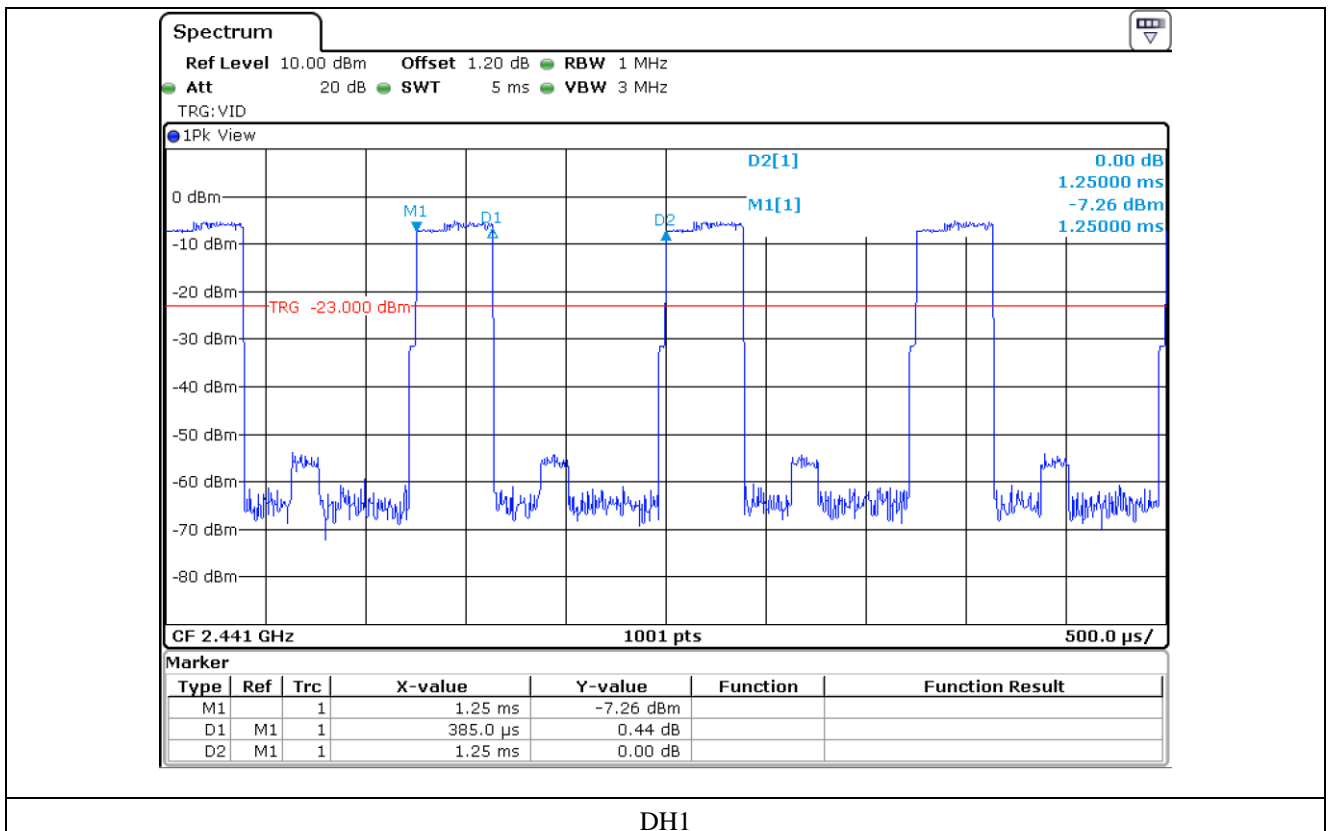

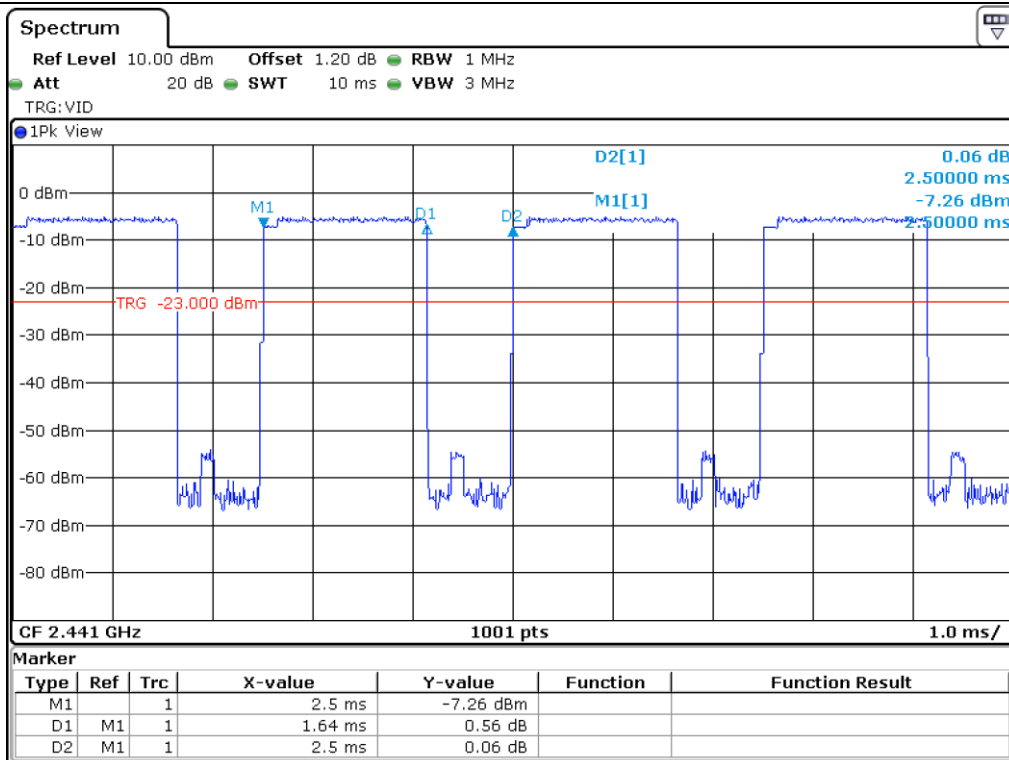

DH3

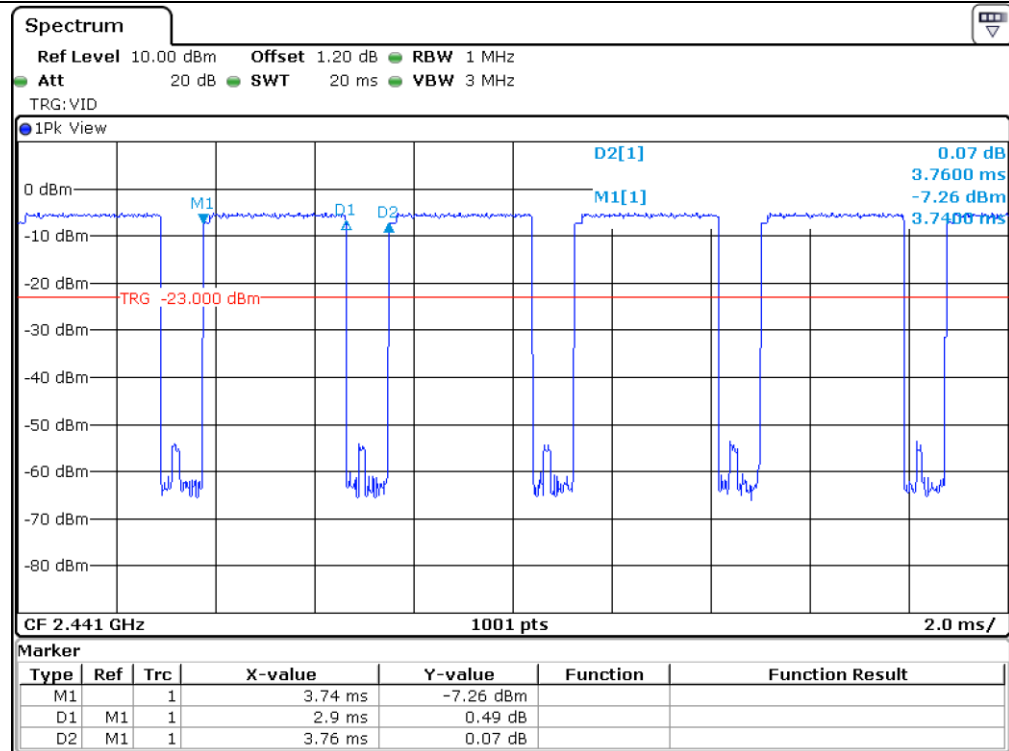

DH5

10.6 Test data for 3 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.


| Packet Type | Pulse Time (ms) | Hops per second with channels | Period Time (ms) | Total Dwell Time (ms) | Limit (ms) | Test Result |
|-------------|-----------------|-------------------------------|------------------|-----------------------|------------|-------------|
| DH1 | 0.385 | 10.13 | 31.60 | 123.24 | 400.00 | PASS |
| DH3 | 1.640 | 5.06 | 31.60 | 262.23 | 400.00 | |
| DH5 | 2.900 | 3.38 | 31.60 | 309.74 | 400.00 | |

Total dwell time is calculated as following.


Total Dwell Time = Pulse time * Hops per second with channels * period time

Remark: See next page for an overview sweep performed with peak detector.

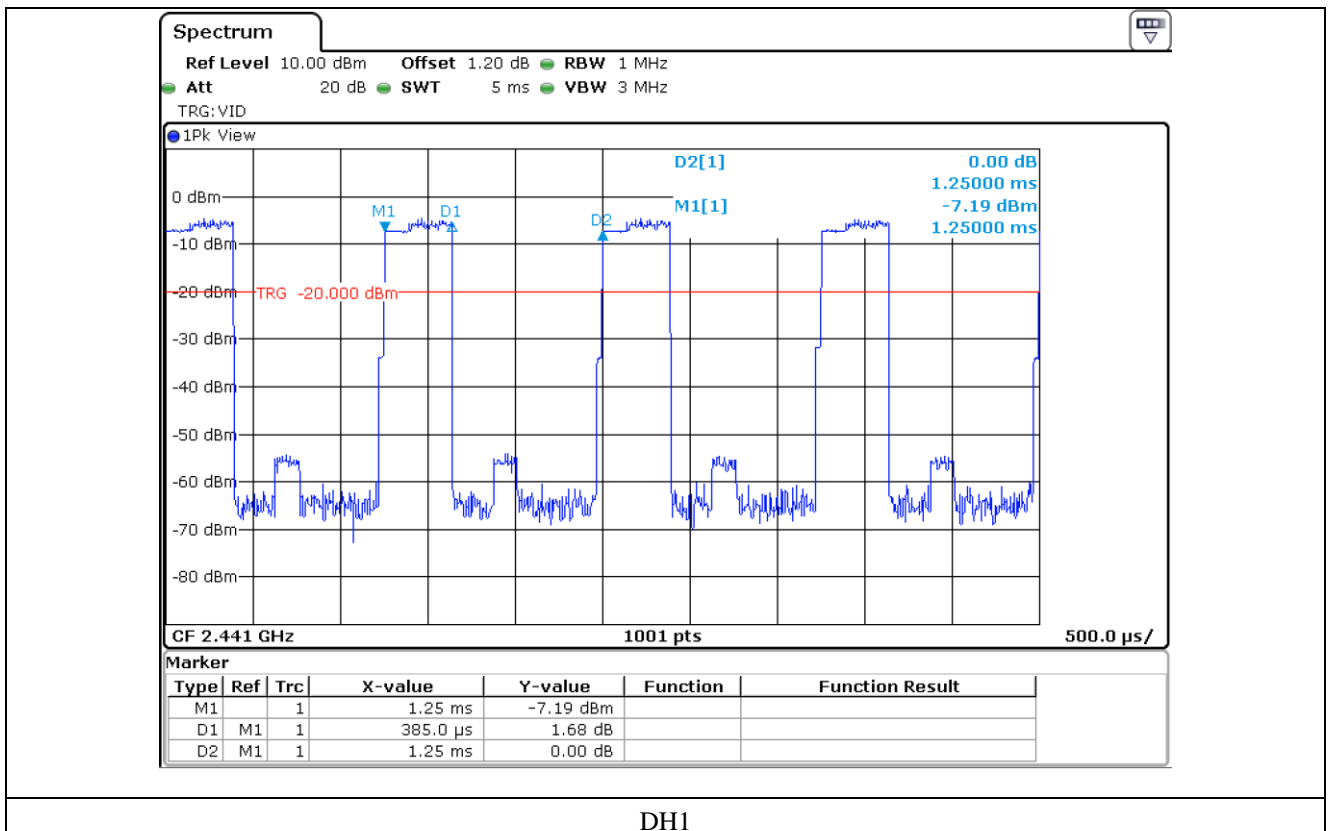

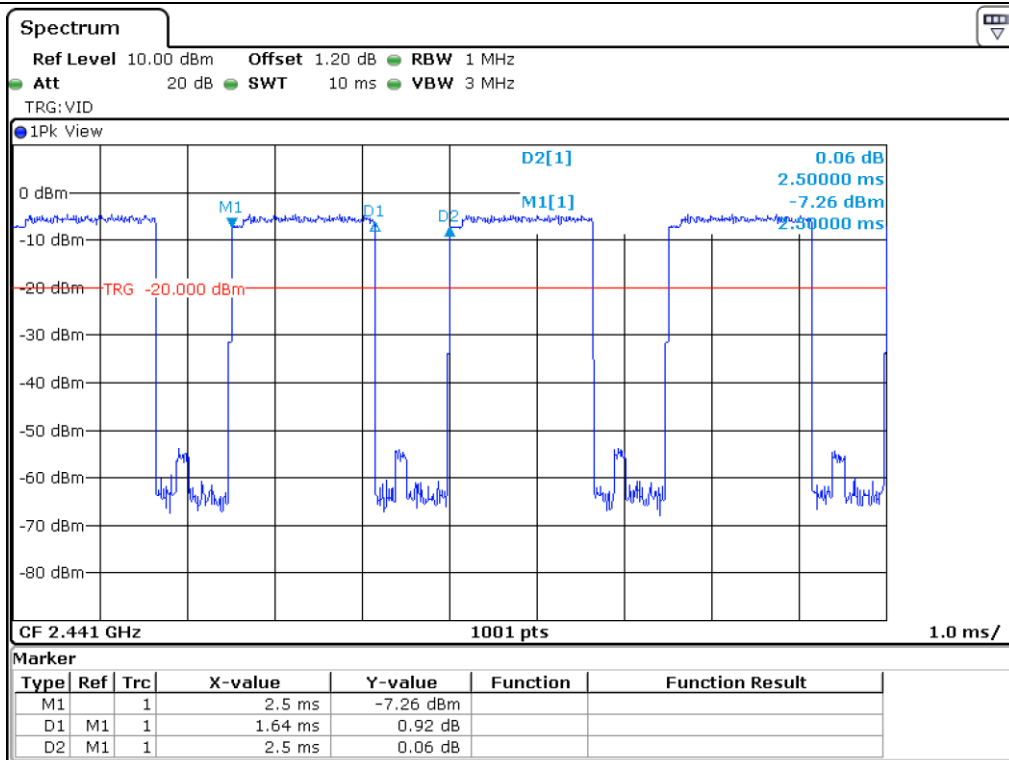

DH3

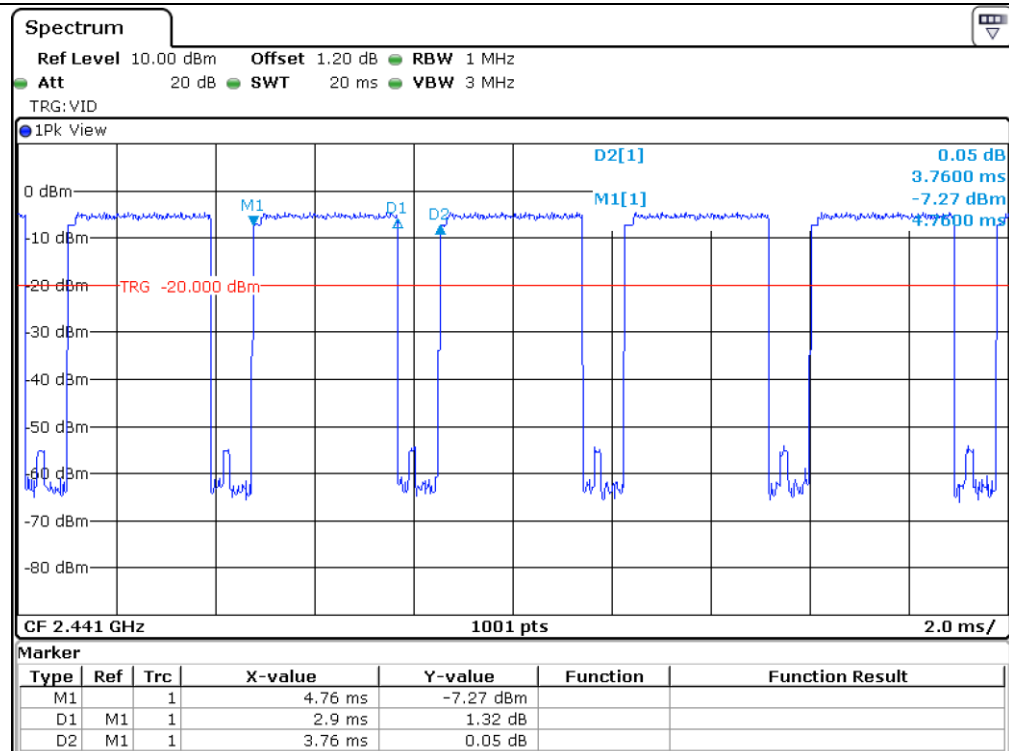

DH5

11. MAXIMUM PEAK OUTPUT POWER


11.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

11.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

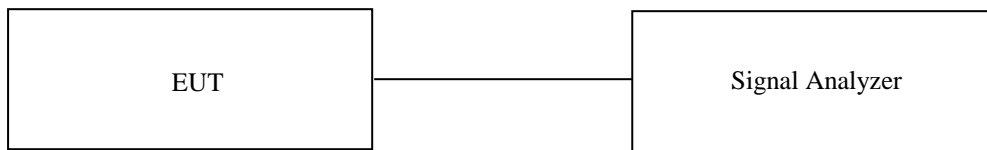

11.3 Test Date


January 28, 2021 ~ February 04, 2021

11.4 Test data for 1 Mbps


-. Test Result : Pass

| CHANNEL | FREQUENCY (MHz) | MEASURED VLAUE (dBm) | LIMIT (dBm) | MARGIN (dB) |
|---------|-----------------|----------------------|-------------|-------------|
| LOW | 2 402.00 | -3.01 | 21.00 | 24.01 |
| MIDDLE | 2 441.00 | -3.44 | 21.00 | 24.44 |
| HIGH | 2 480.00 | -3.42 | 21.00 | 24.42 |


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

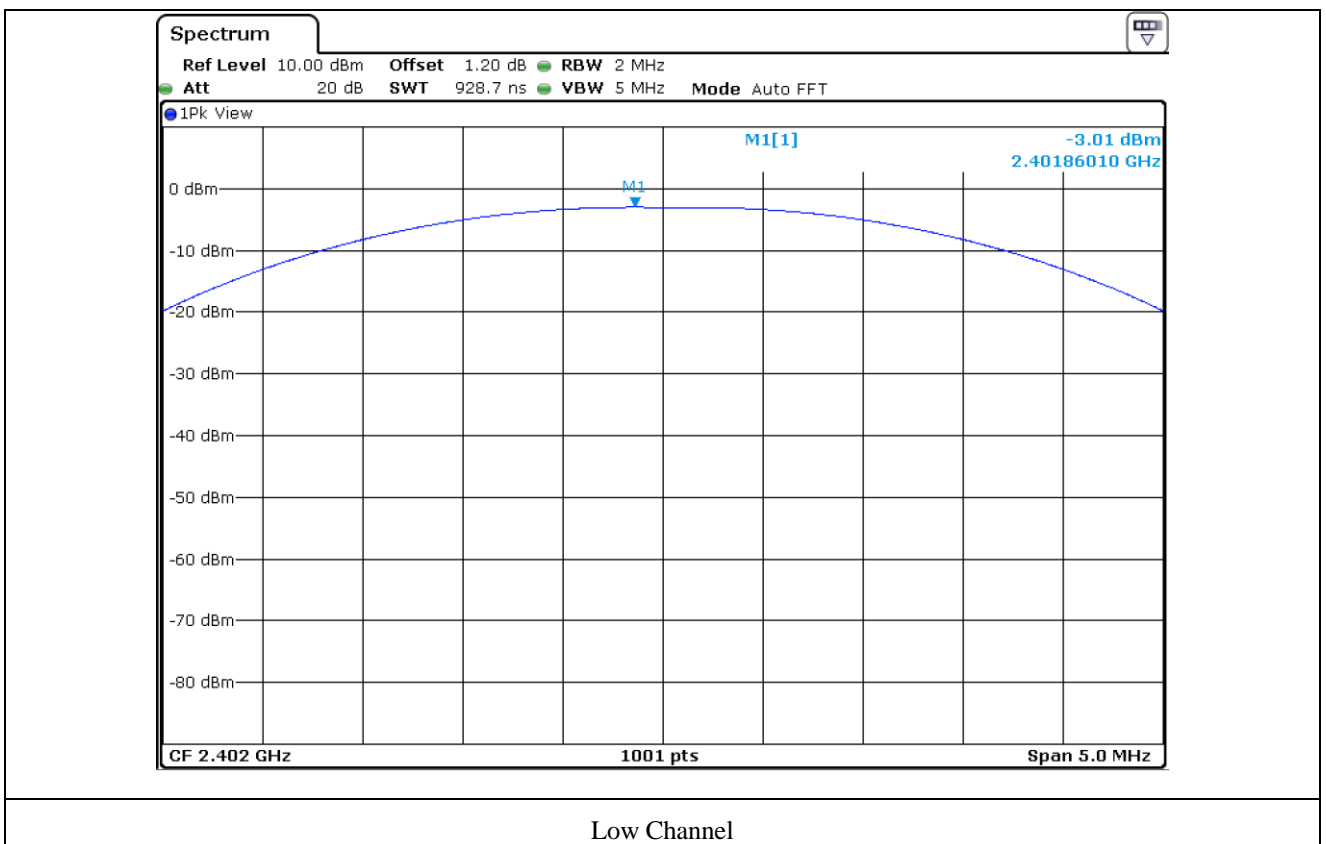

Low Channel

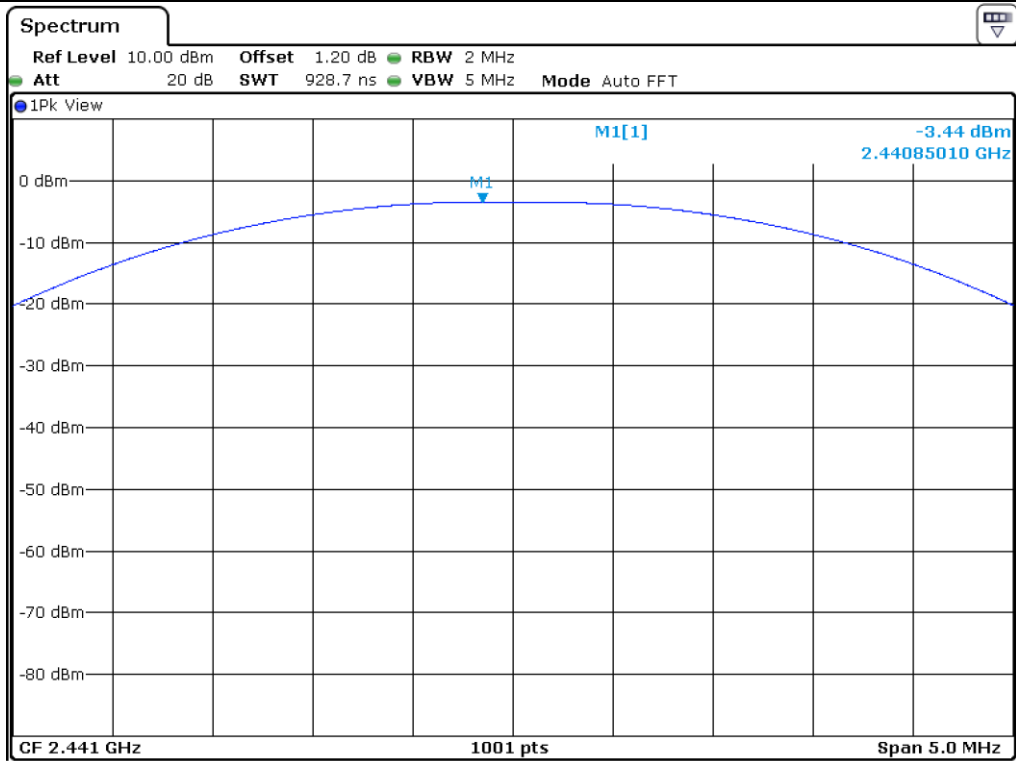

Middle Channel

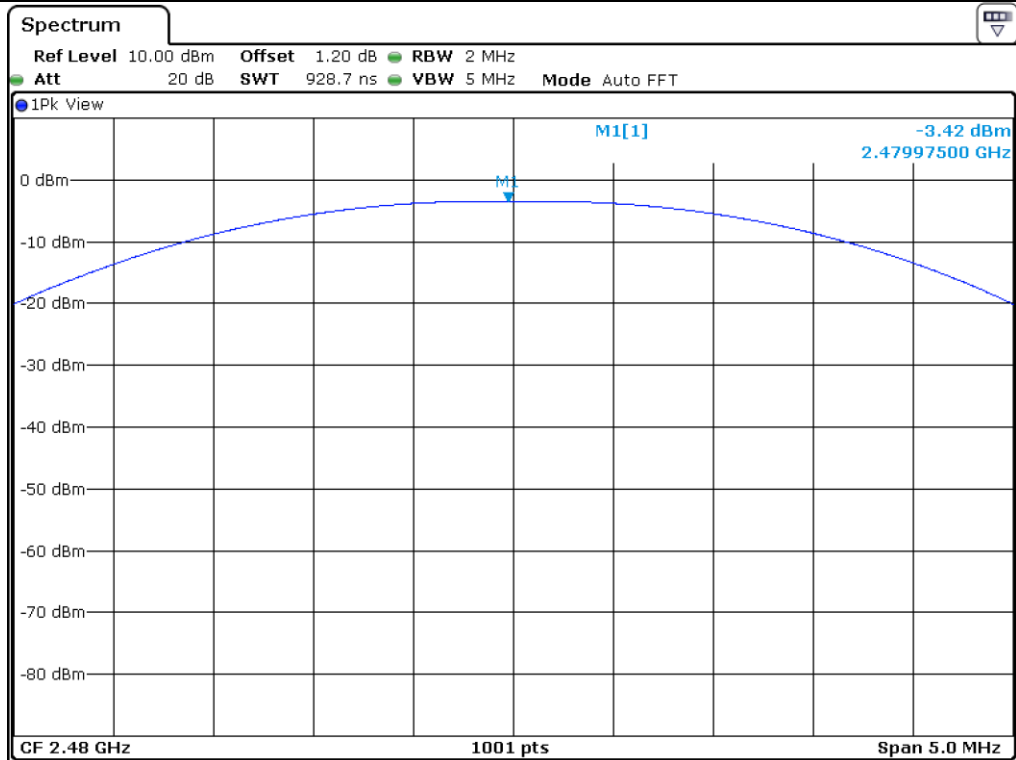


High Channel


11.5 Test data for 2 Mbps

-. Test Result : Pass


| CHANNEL | FREQUENCY (MHz) | MEASURED VLAUE (dBm) | LIMIT (dBm) | MARGIN (dB) |
|---------|-----------------|----------------------|-------------|-------------|
| LOW | 2 402.00 | -4.21 | 21.00 | 25.21 |
| MIDDLE | 2 441.00 | -4.75 | 21.00 | 25.75 |
| HIGH | 2 480.00 | -5.01 | 21.00 | 26.01 |

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

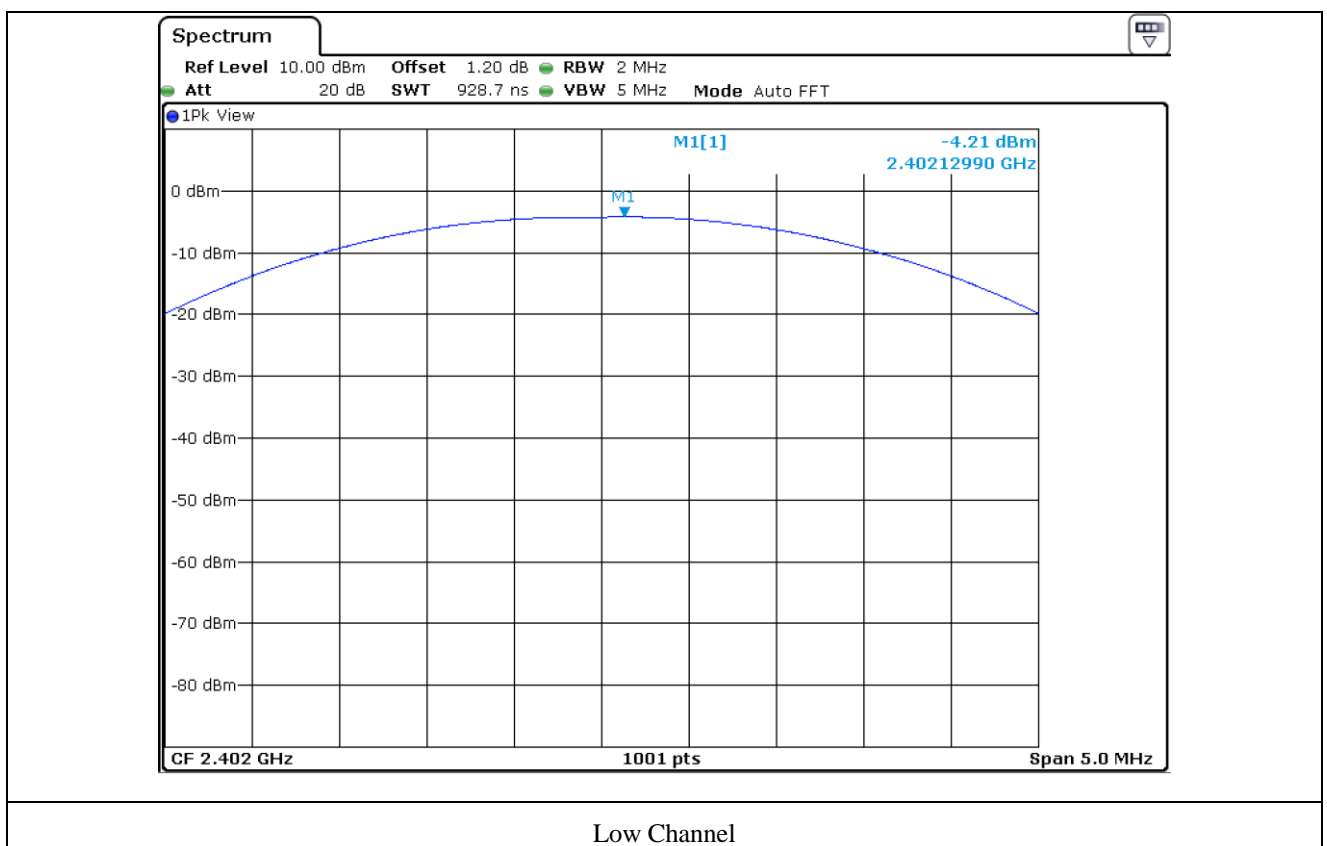

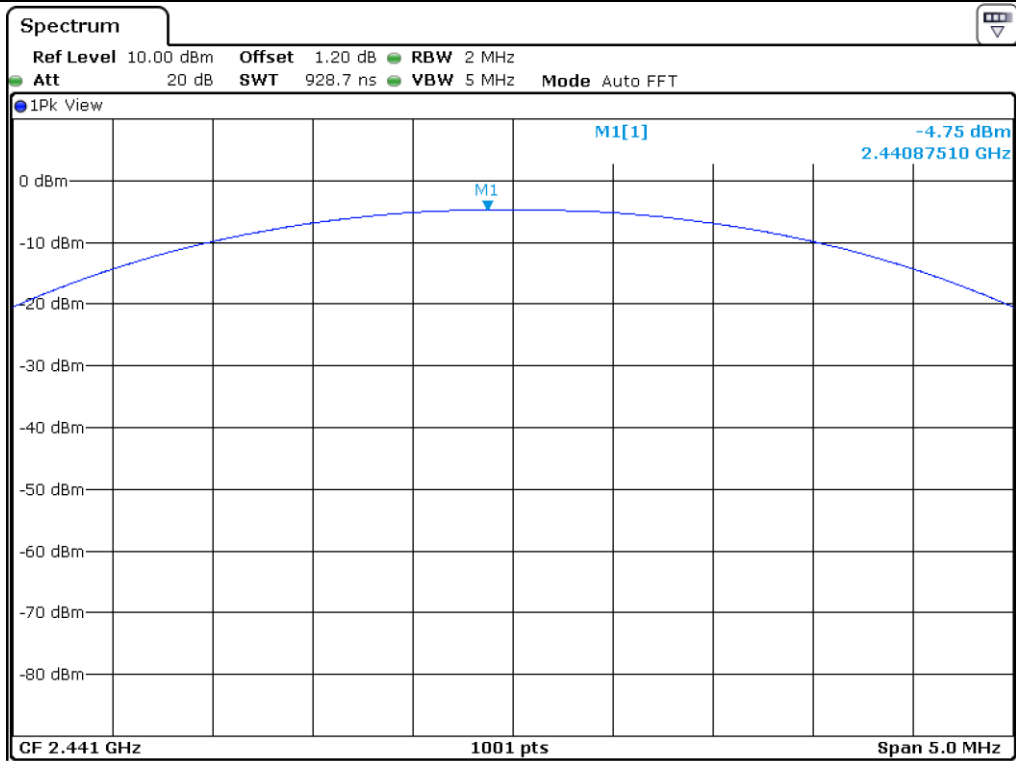

Middle Channel

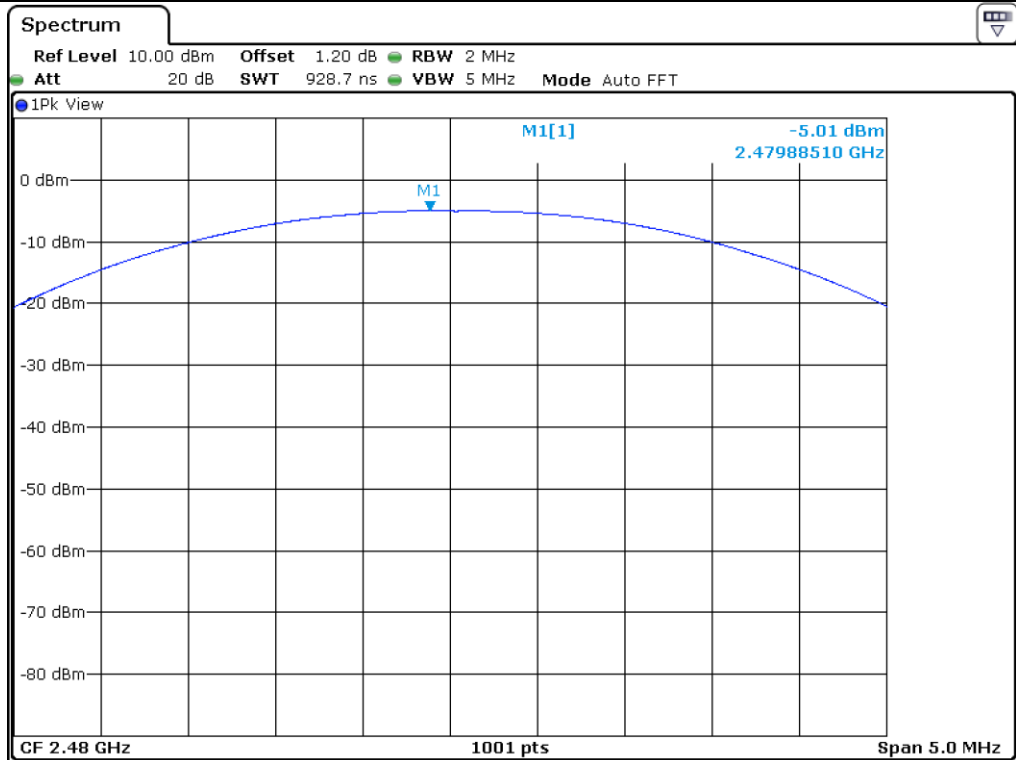


High Channel


11.6 Test data for 3 Mbps

-. Test Result : Pass


| CHANNEL | FREQUENCY (MHz) | MEASURED VLAUE (dBm) | LIMIT (dBm) | MARGIN (dB) |
|---------|-----------------|----------------------|-------------|-------------|
| LOW | 2 402.00 | -3.73 | 21.00 | 24.73 |
| MIDDLE | 2 441.00 | -4.24 | 21.00 | 25.24 |
| HIGH | 2 480.00 | -4.45 | 21.00 | 25.45 |

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

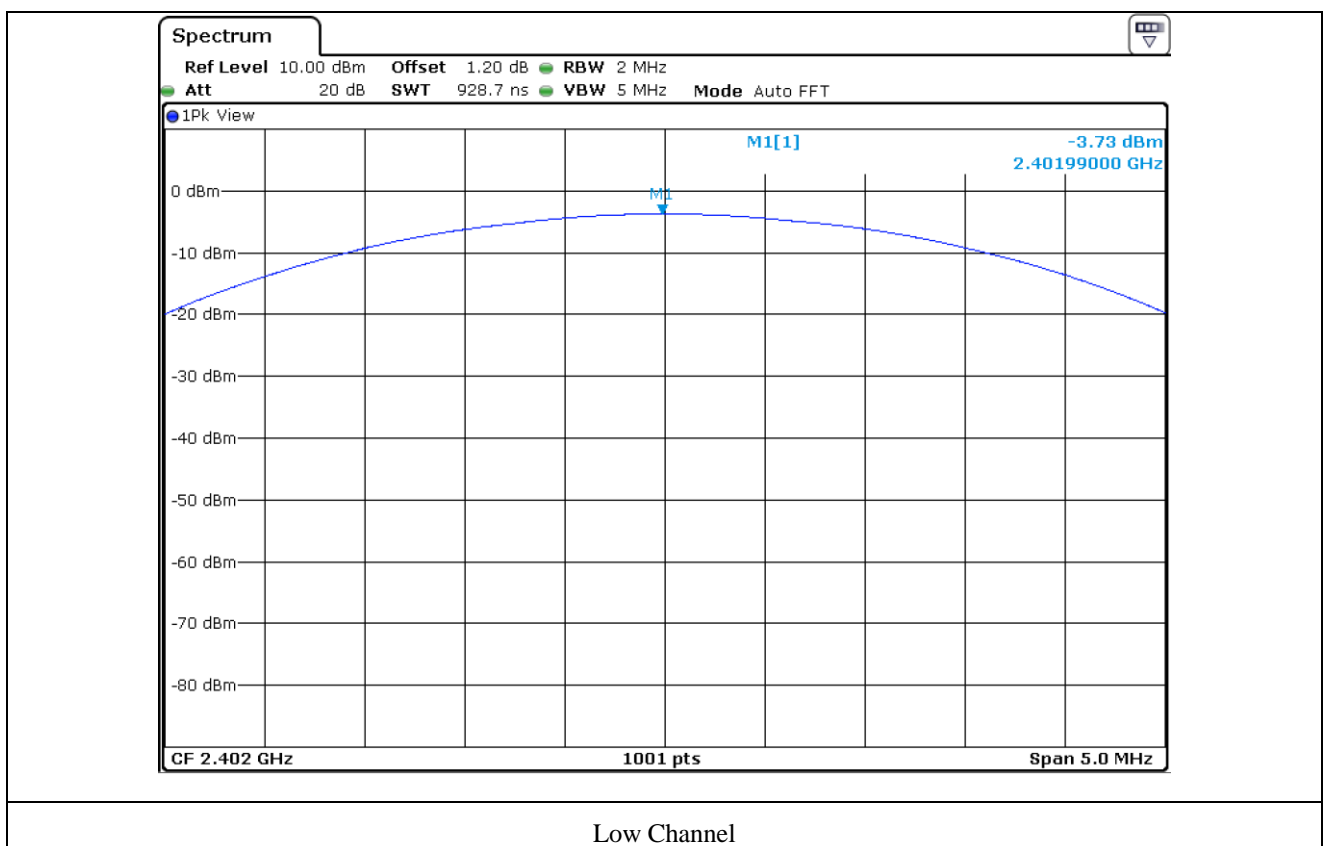

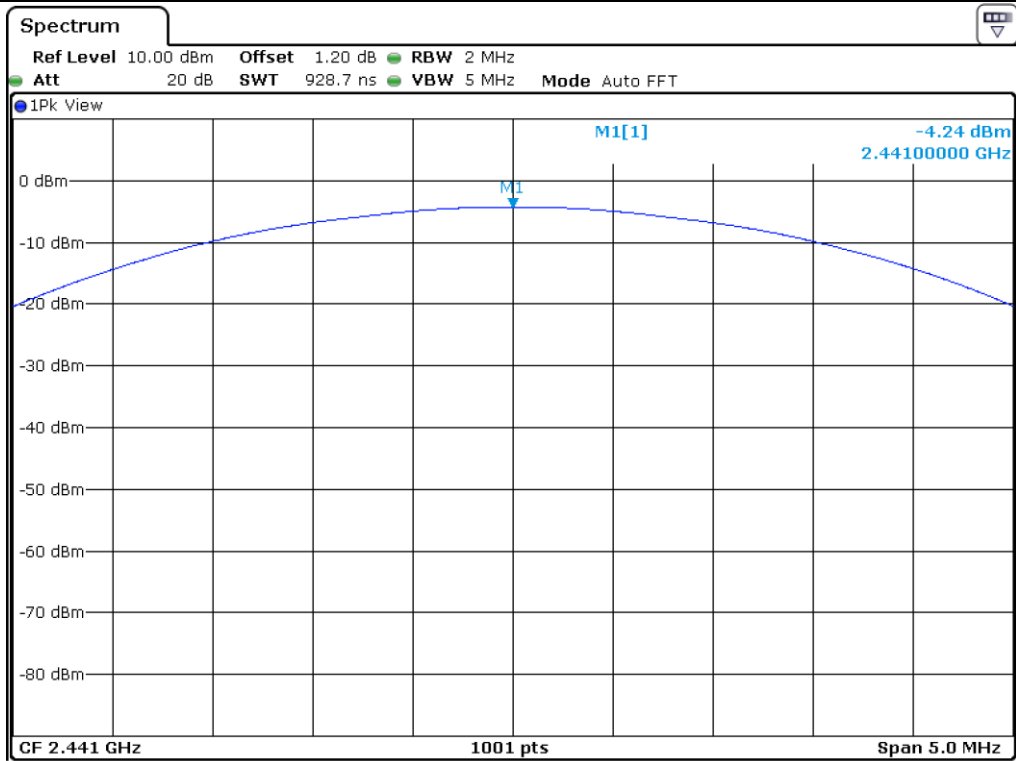

Middle Channel

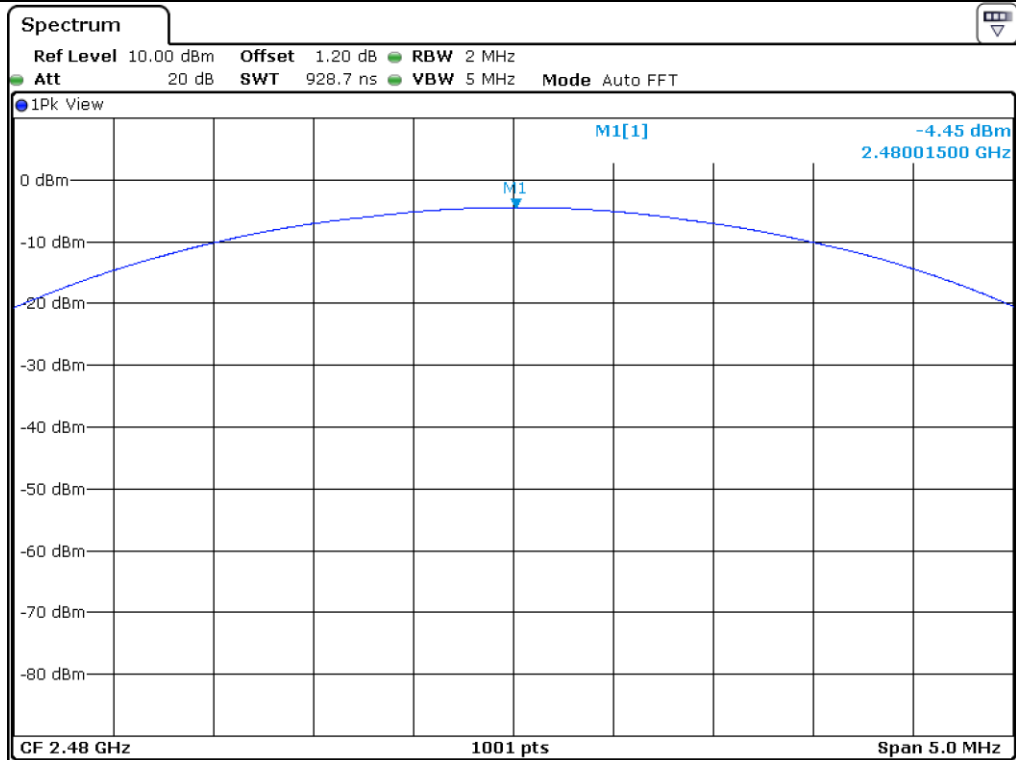

High Channel


12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

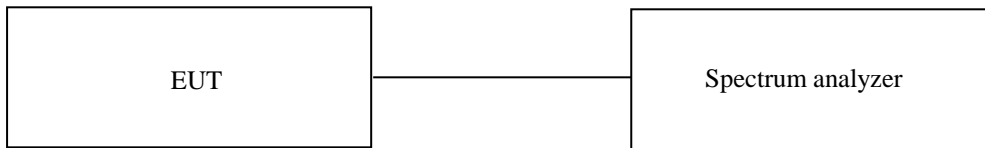


12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

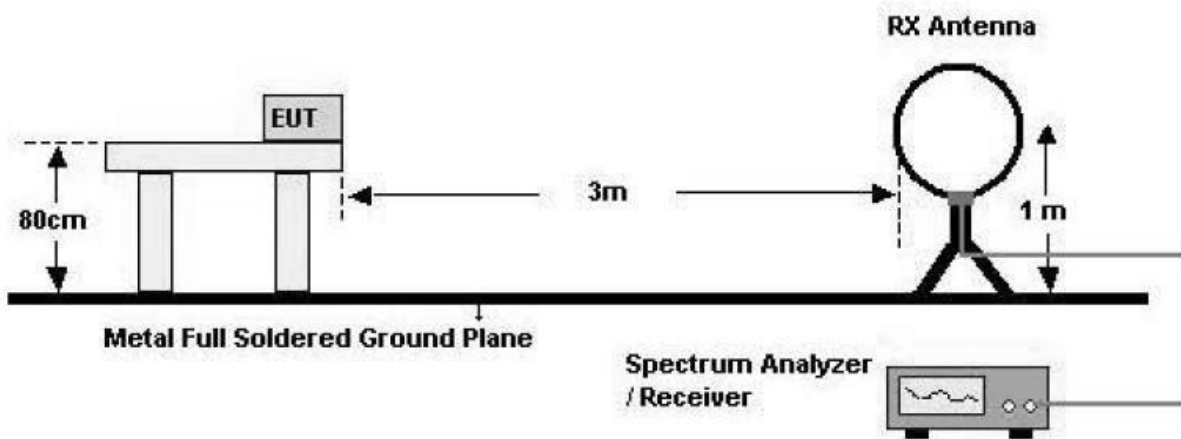

2. 30 MHz - 1 GHz

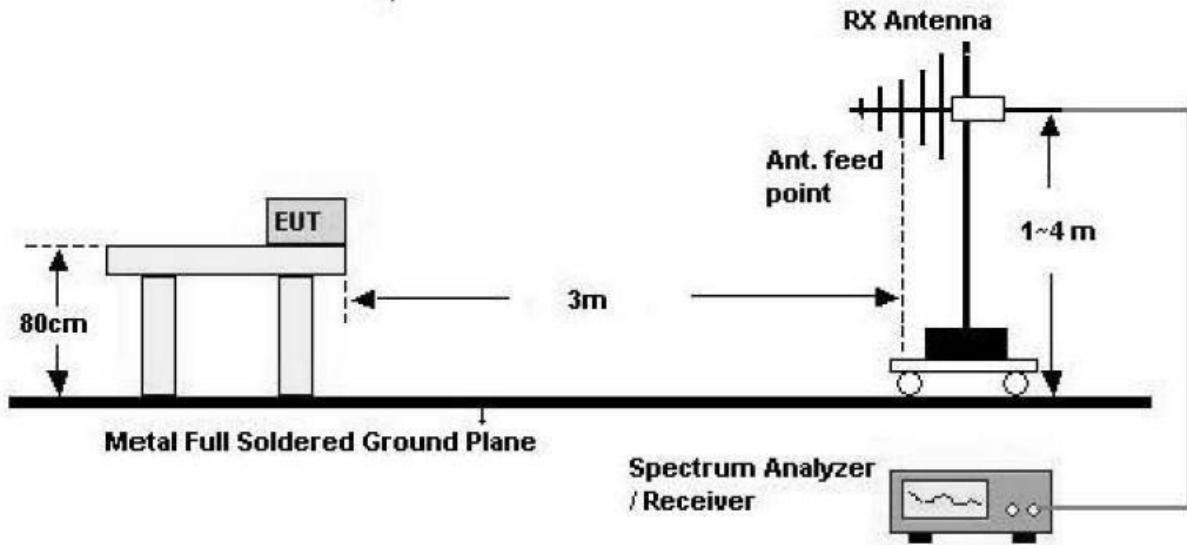

3. Above 1 GHz

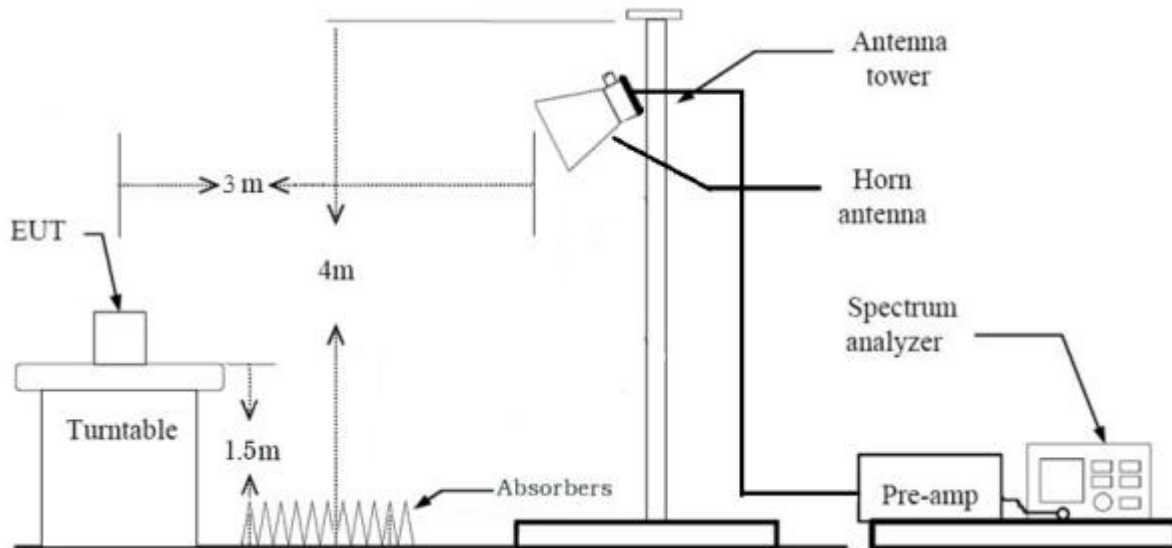


12.4 Test Date


January 28, 2021 ~ February 04, 2021

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

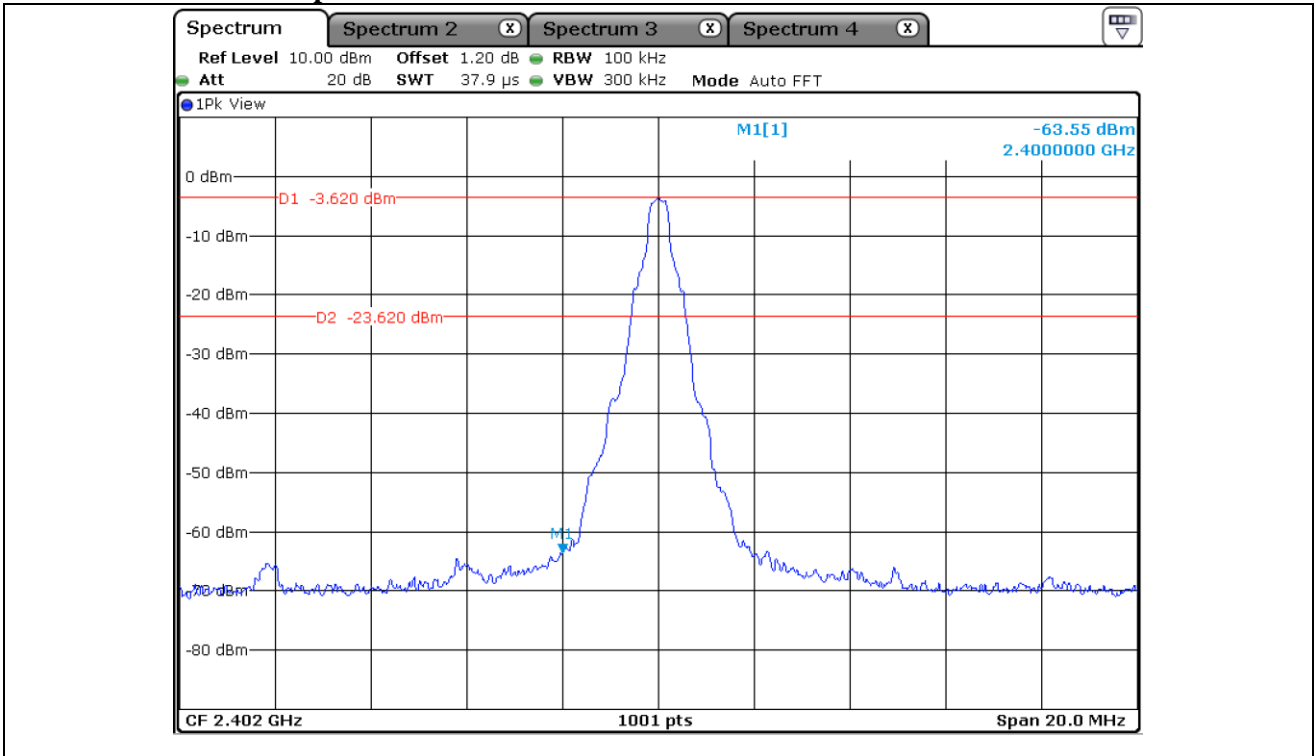


Low Channel

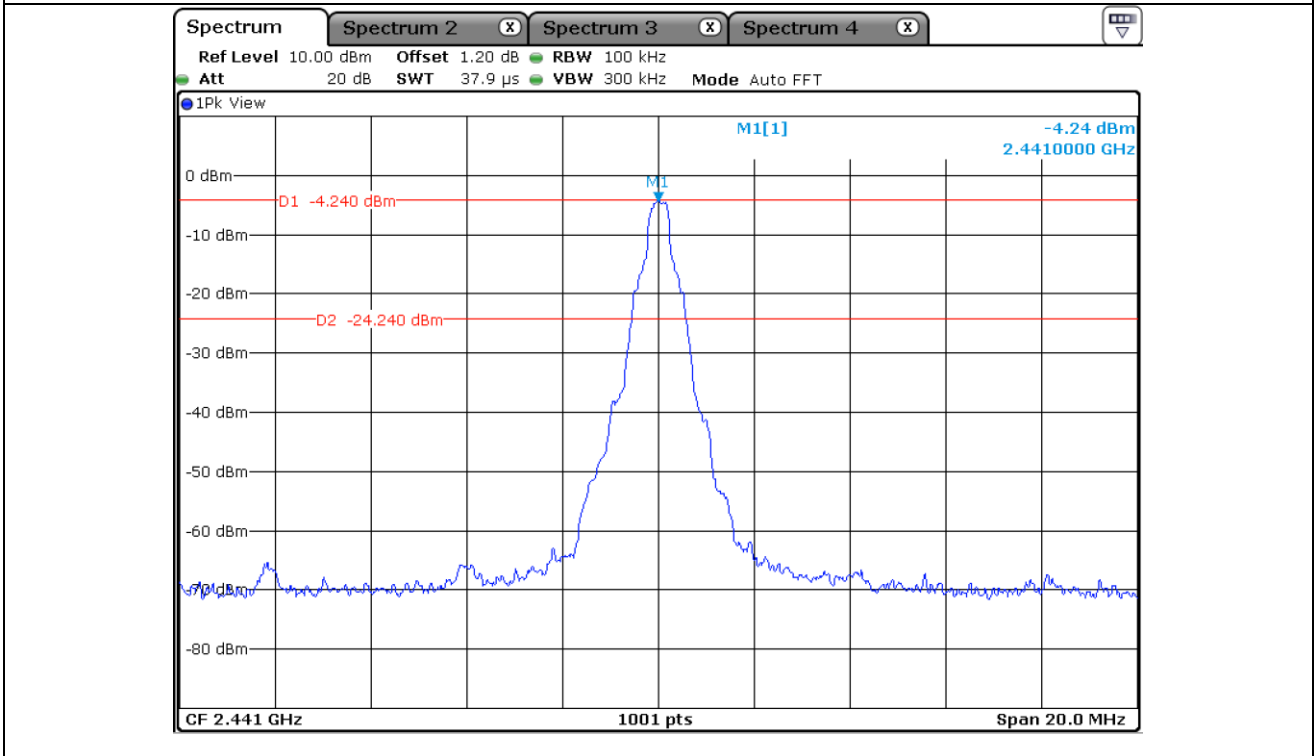


Middle Channel

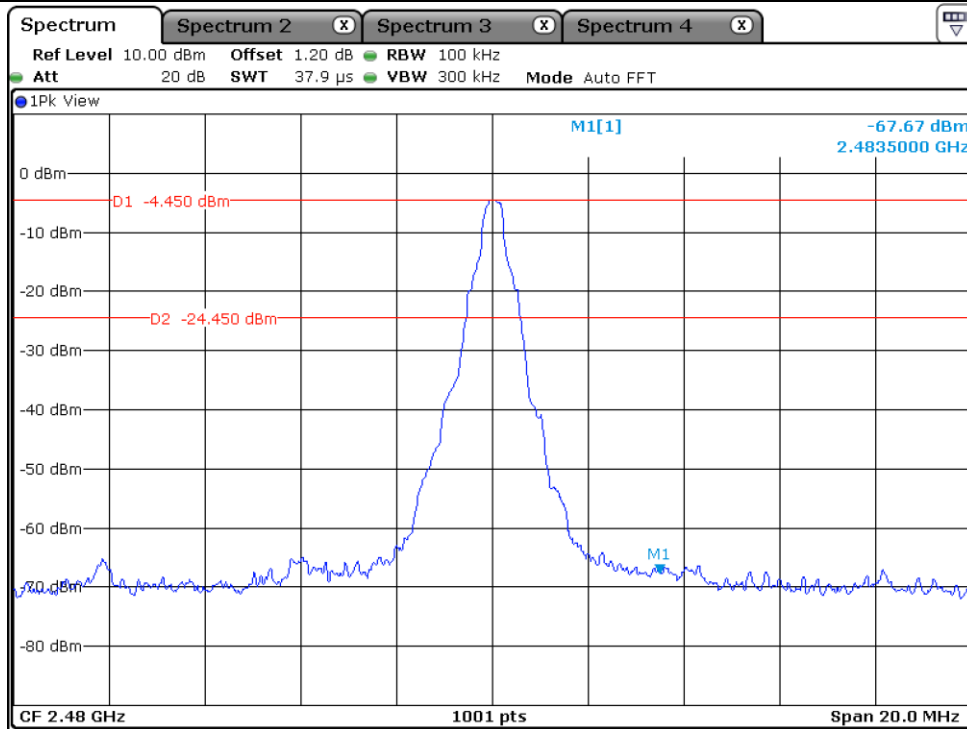


High Channel

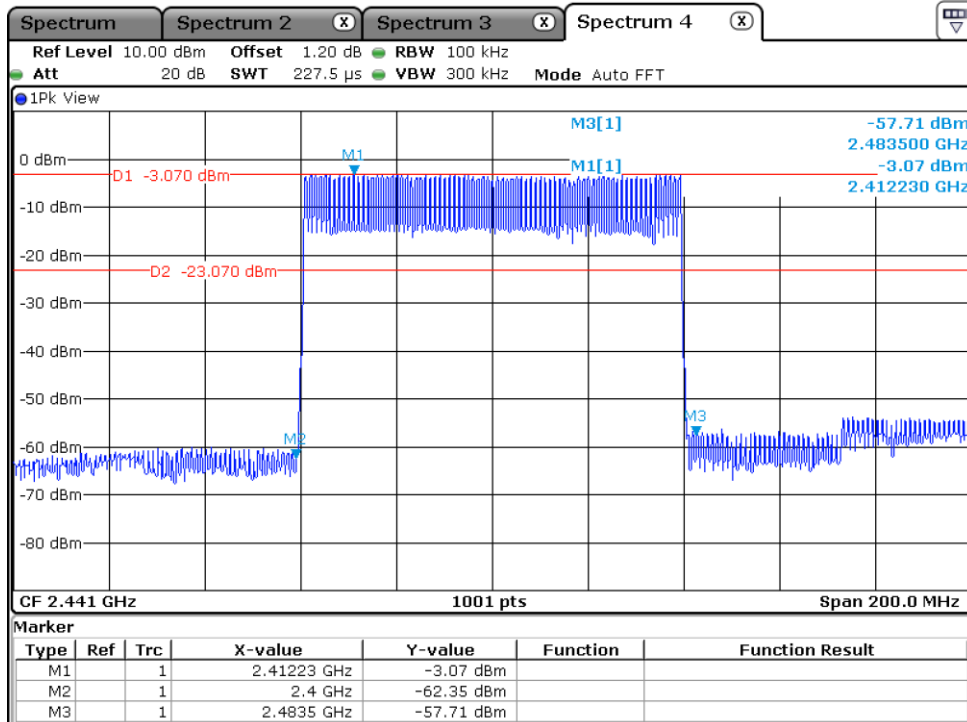


Hopping Mode

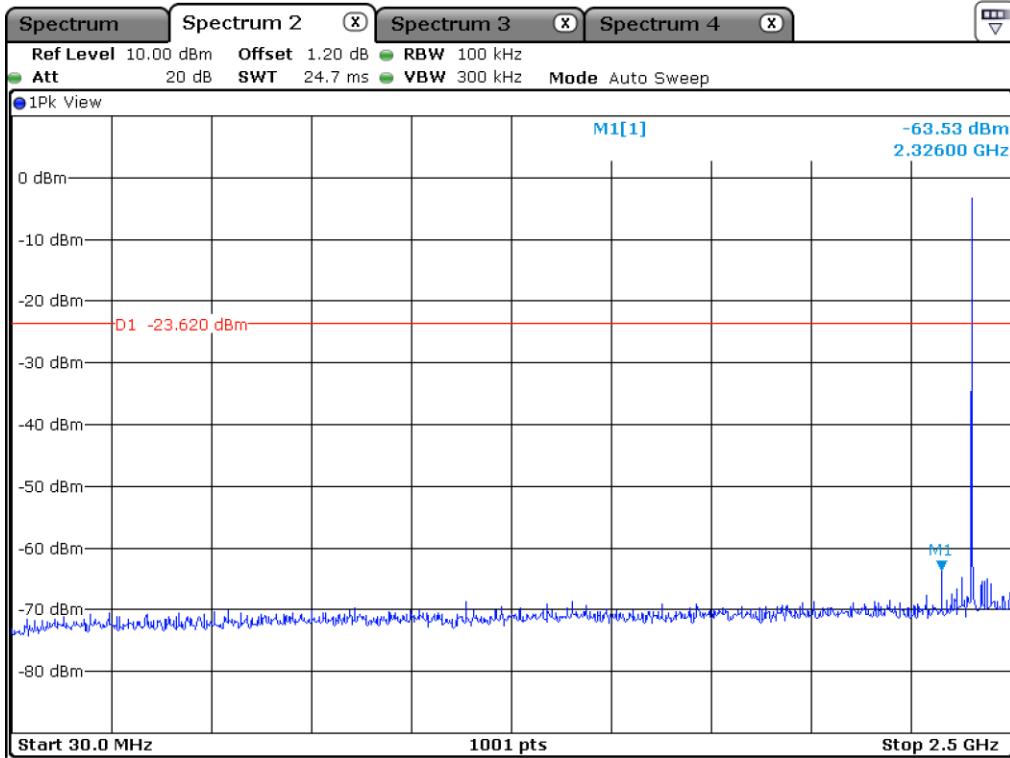


Low Channel

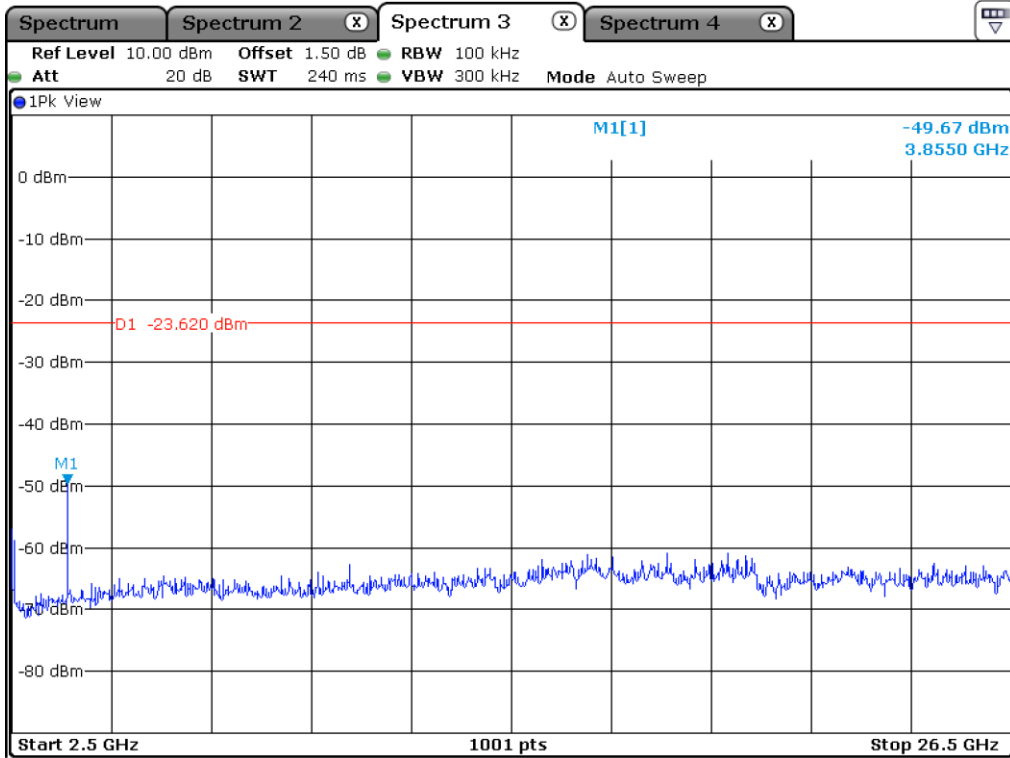


Low Channel

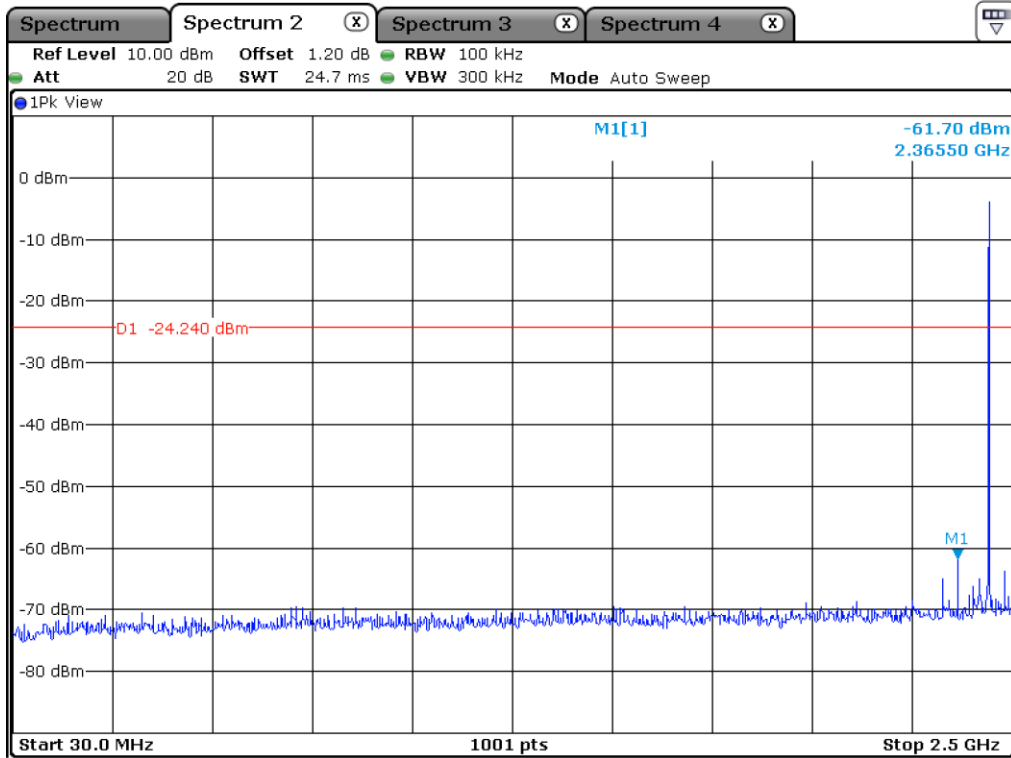


Middle Channel

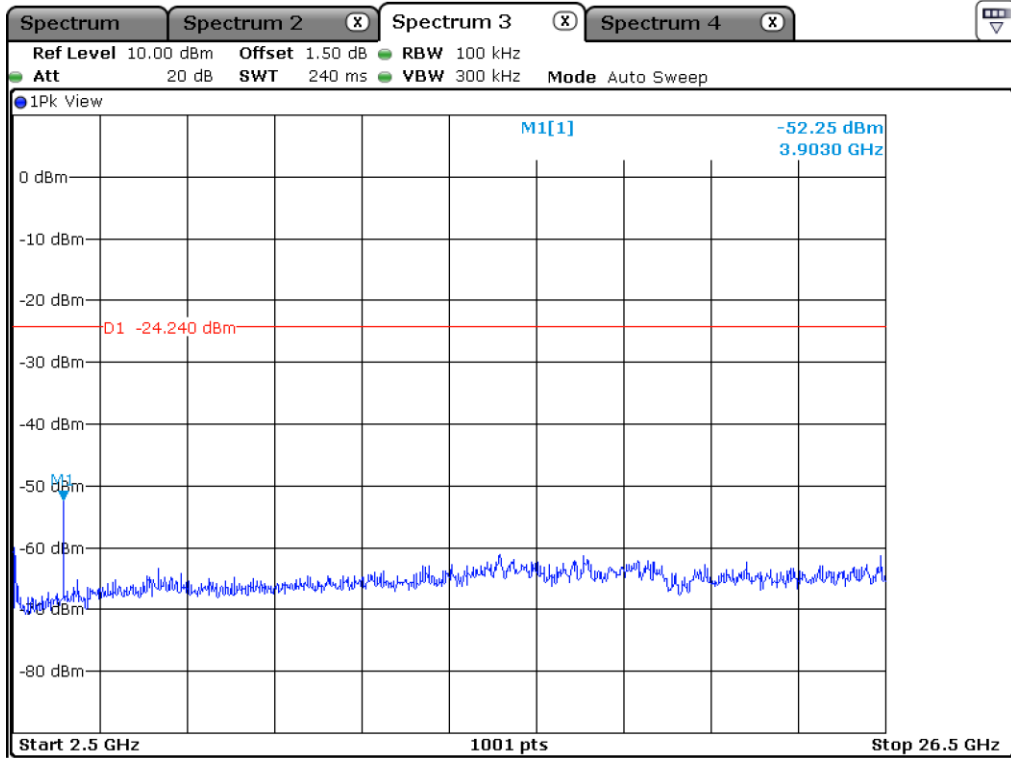


Middle Channel

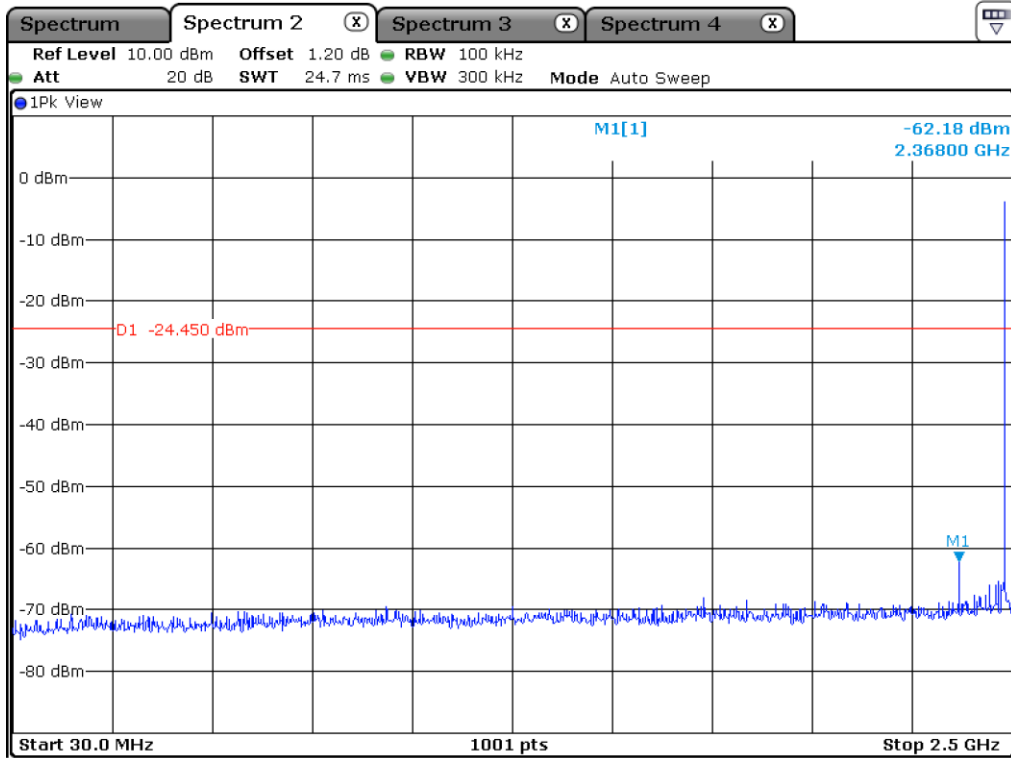


High Channel

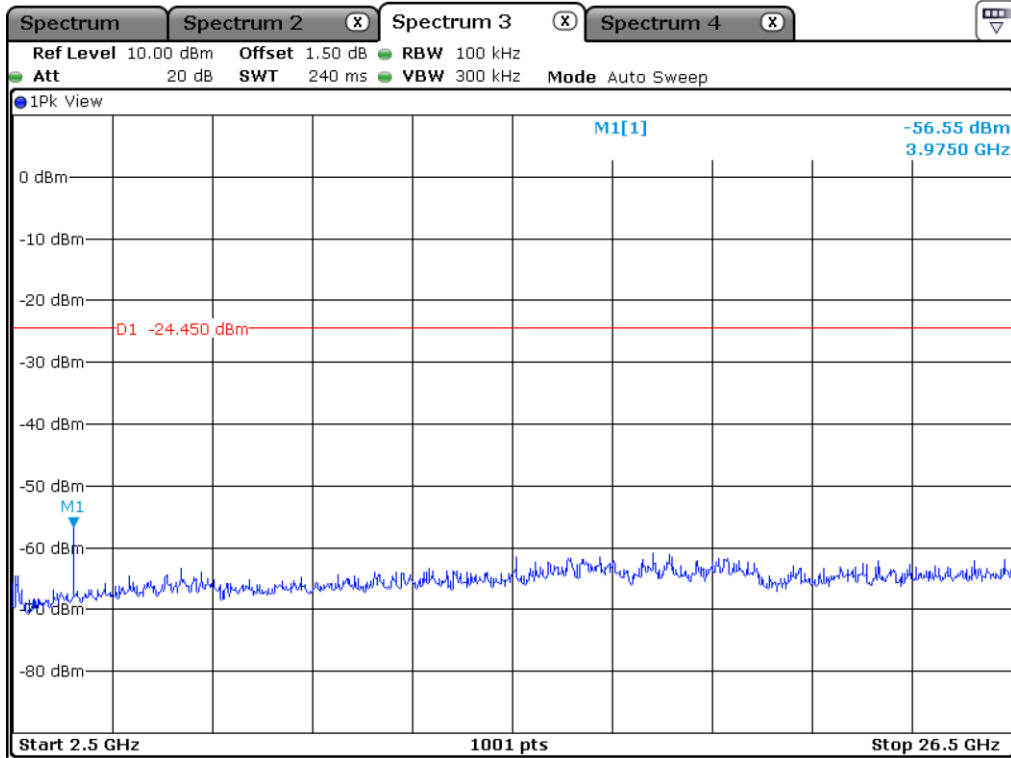

High Channel

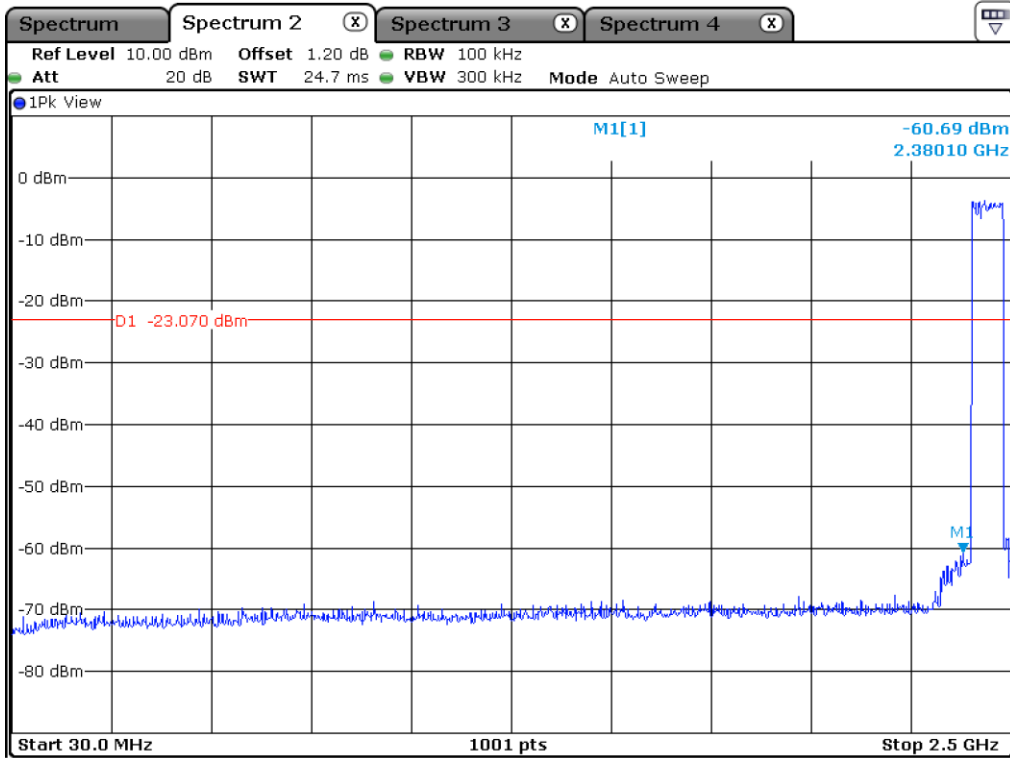


Hopping Mode

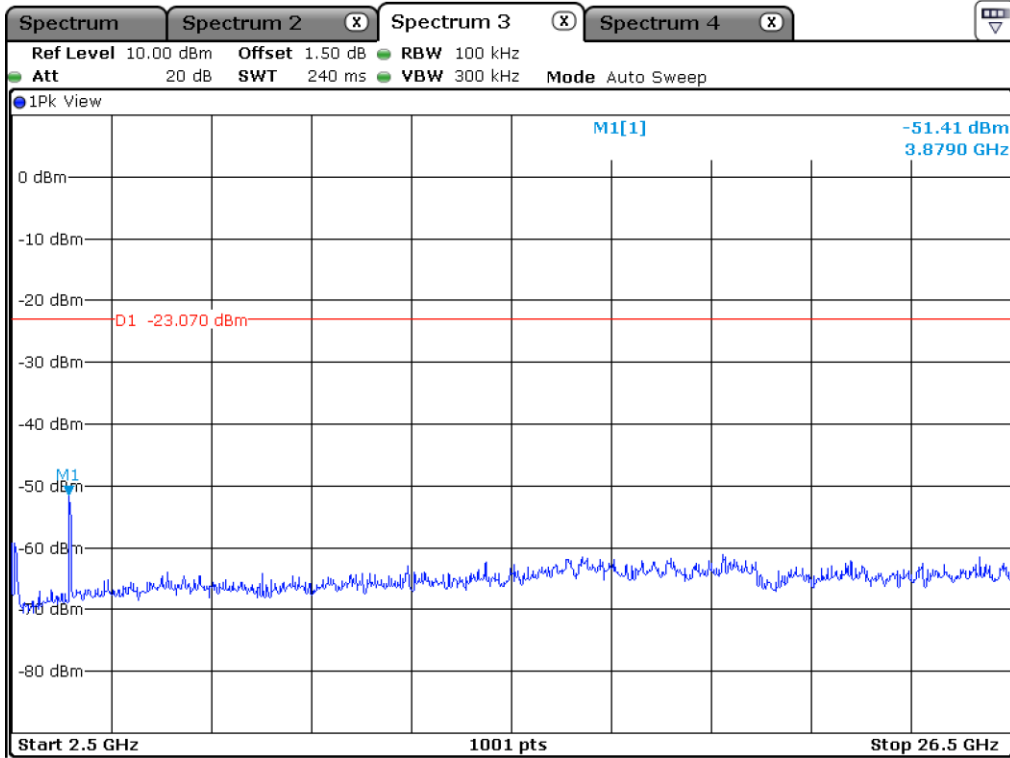


Hopping Mode


12.5.2 Test data for 2 Mbps

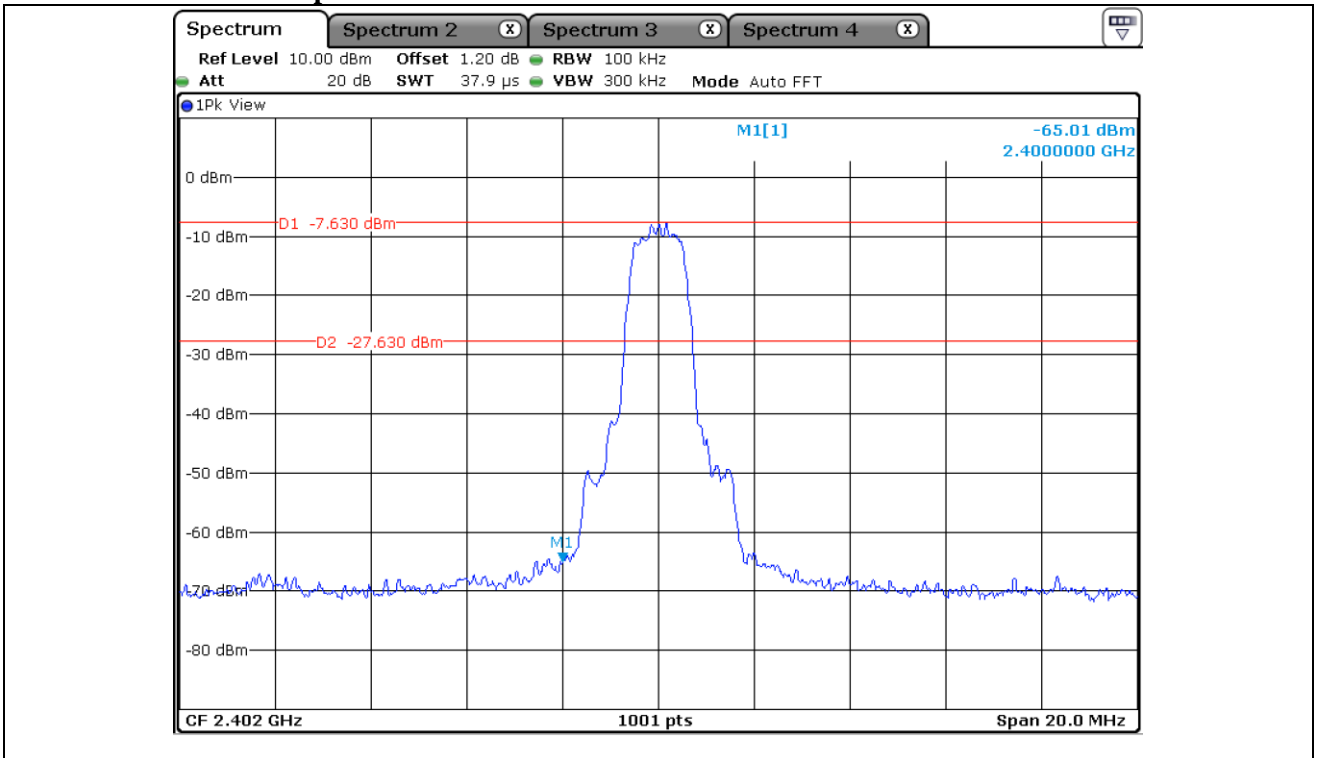


Low Channel

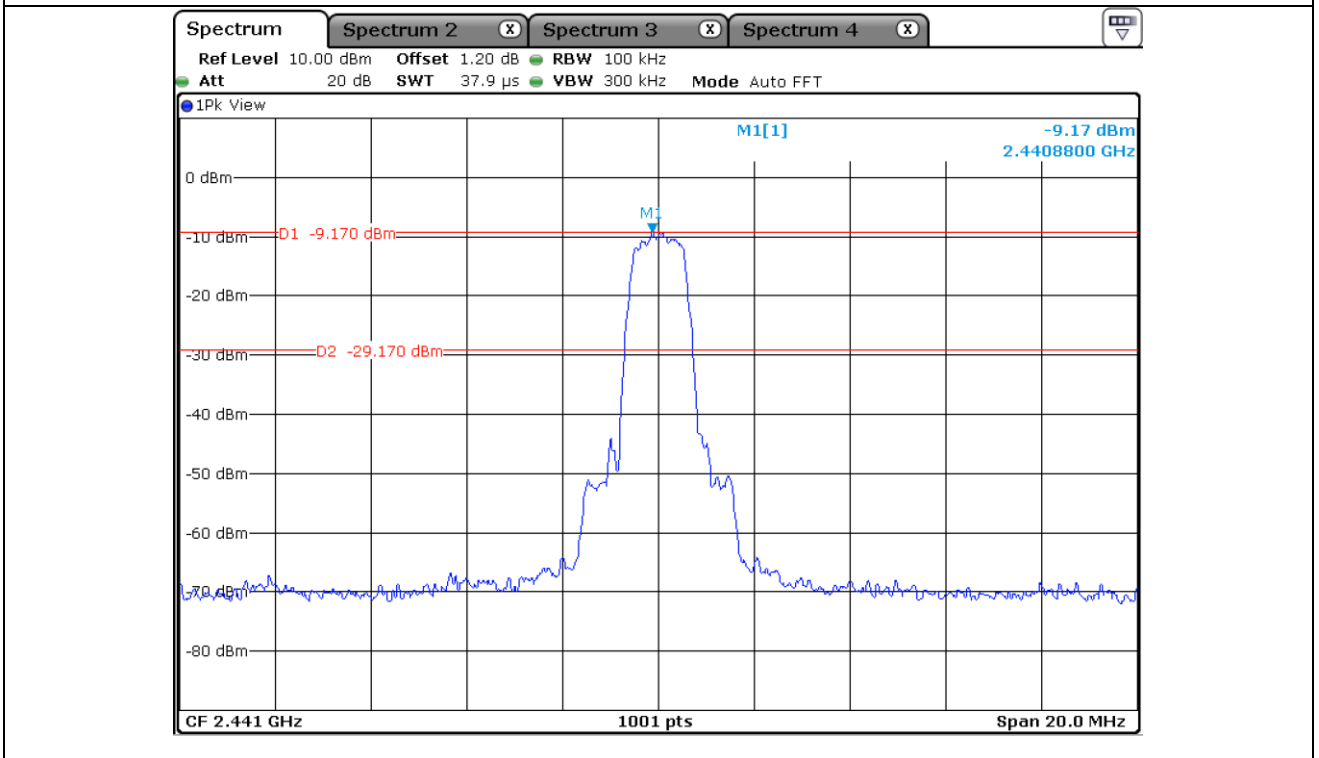


Middle Channel

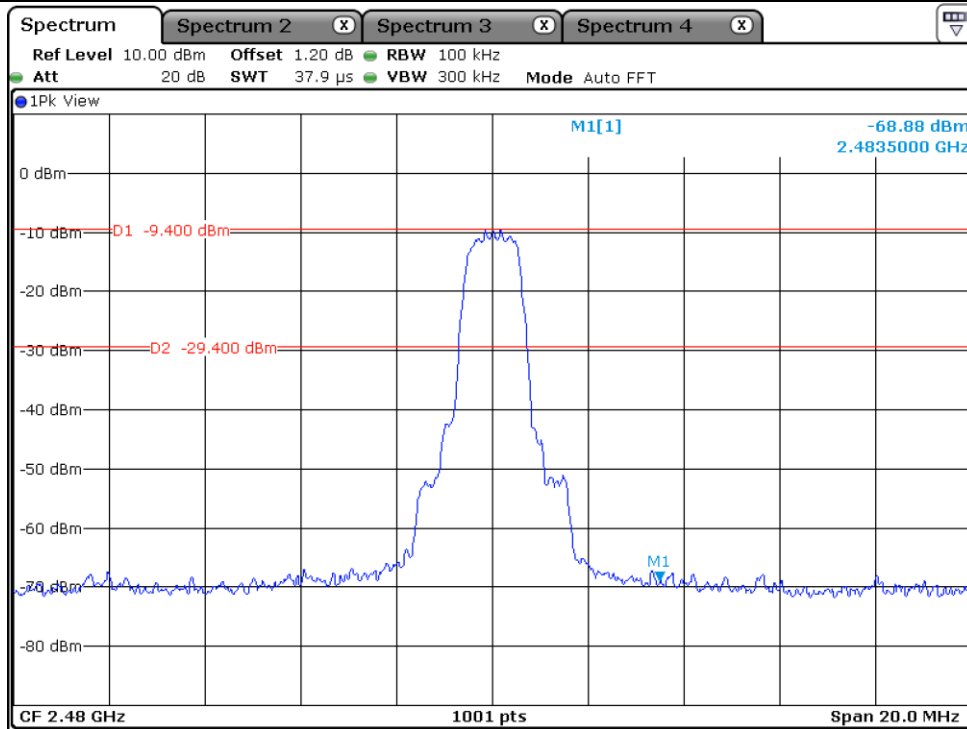


High Channel

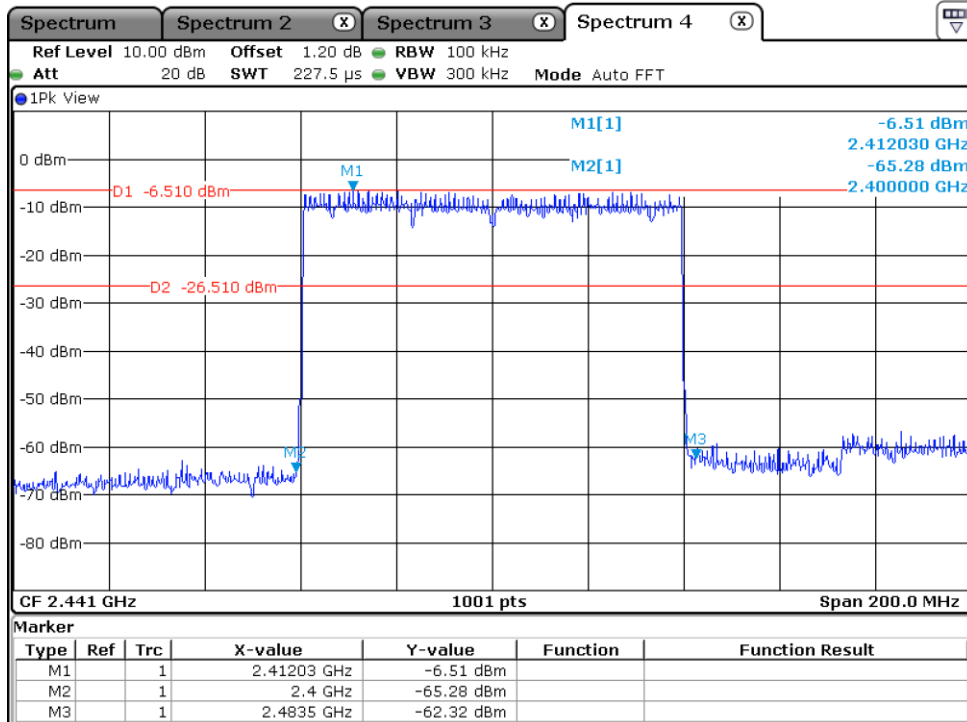


Hopping Mode

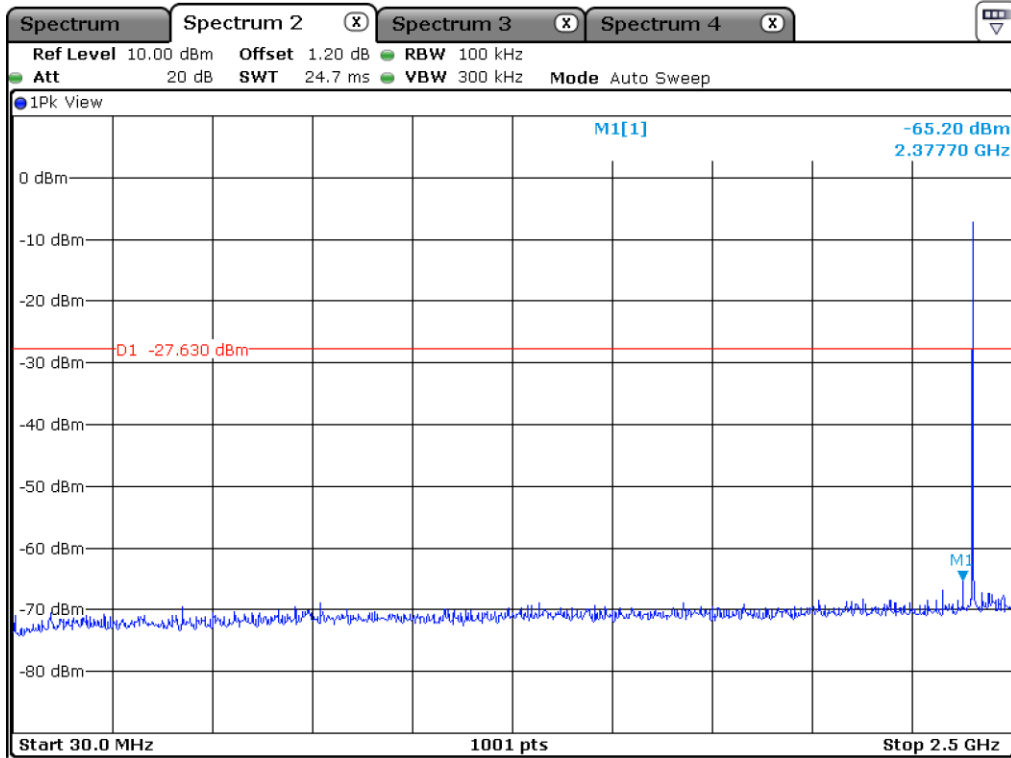


Low Channel

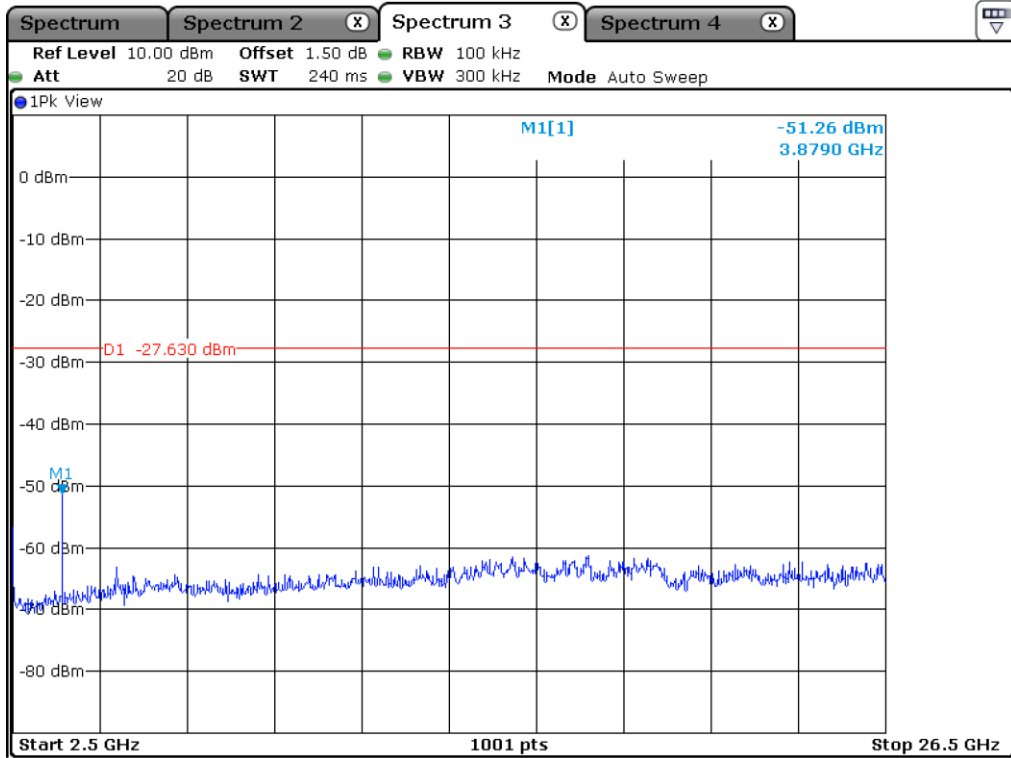


Low Channel

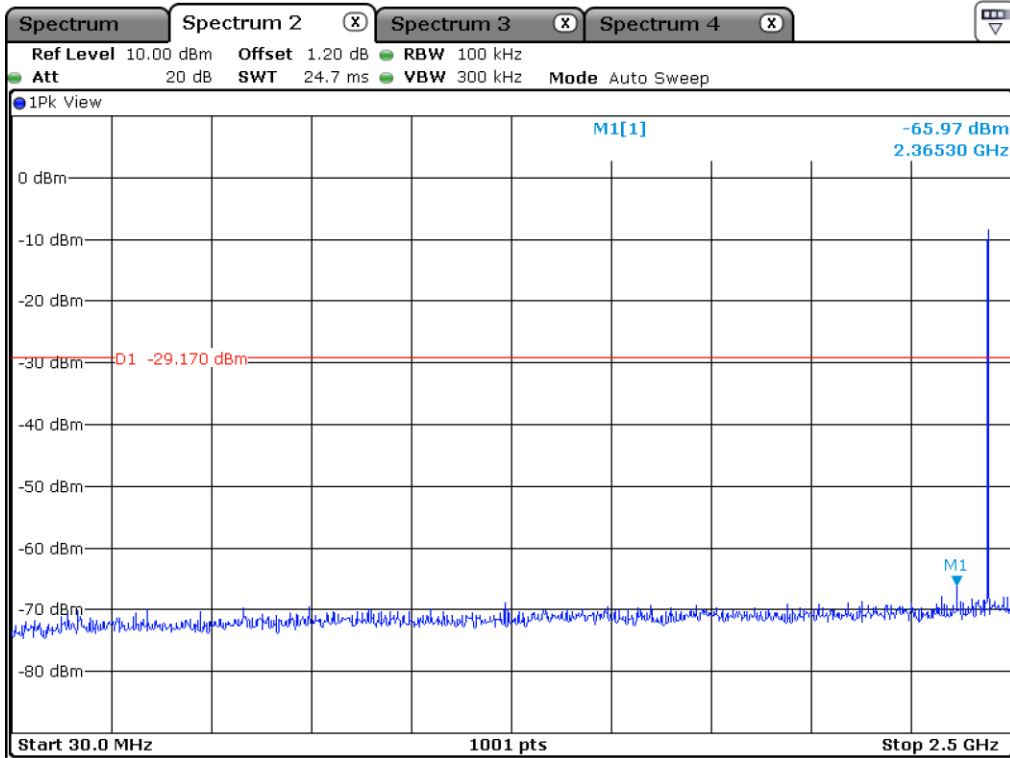


Middle Channel

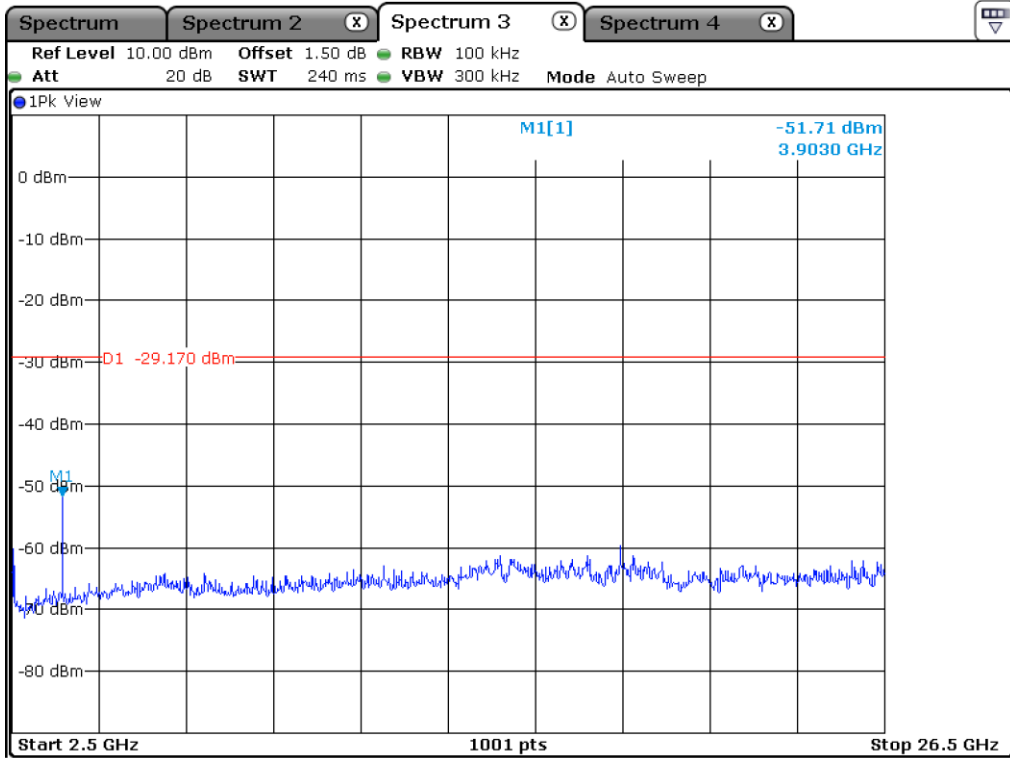


Middle Channel

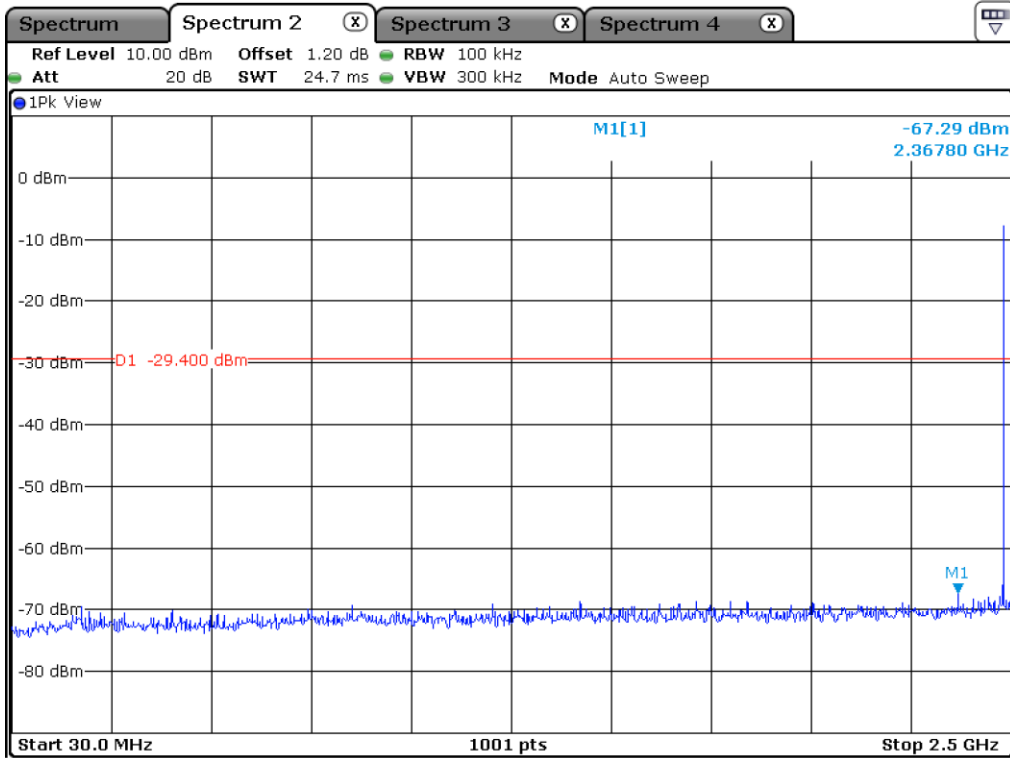


High Channel

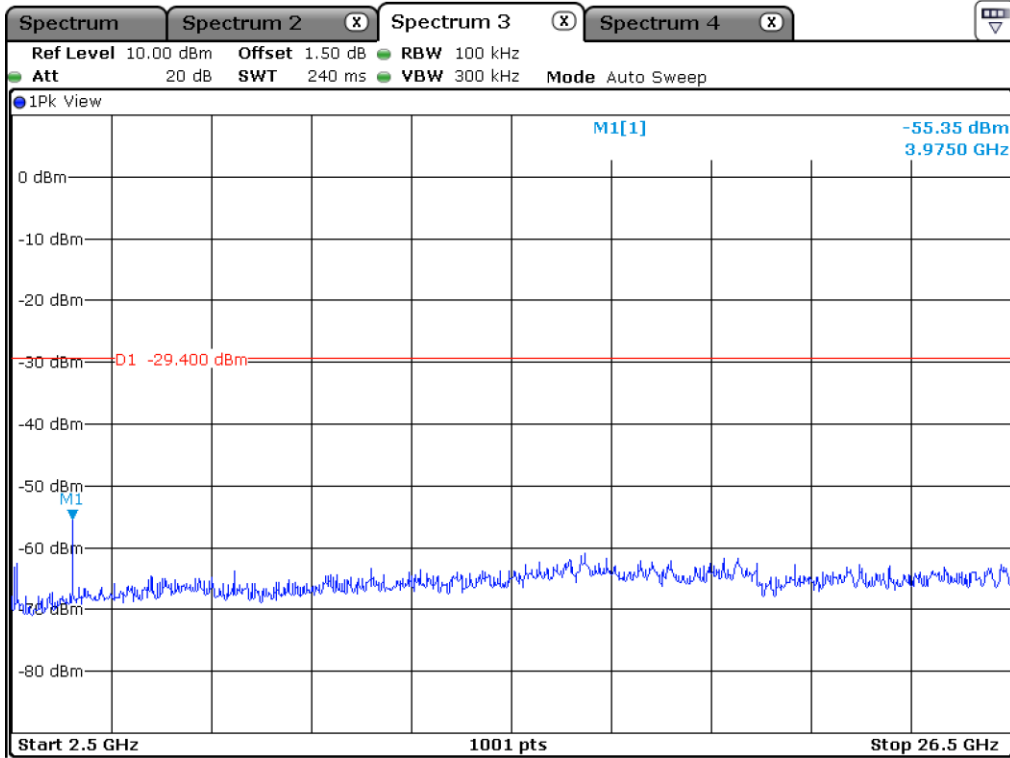

High Channel

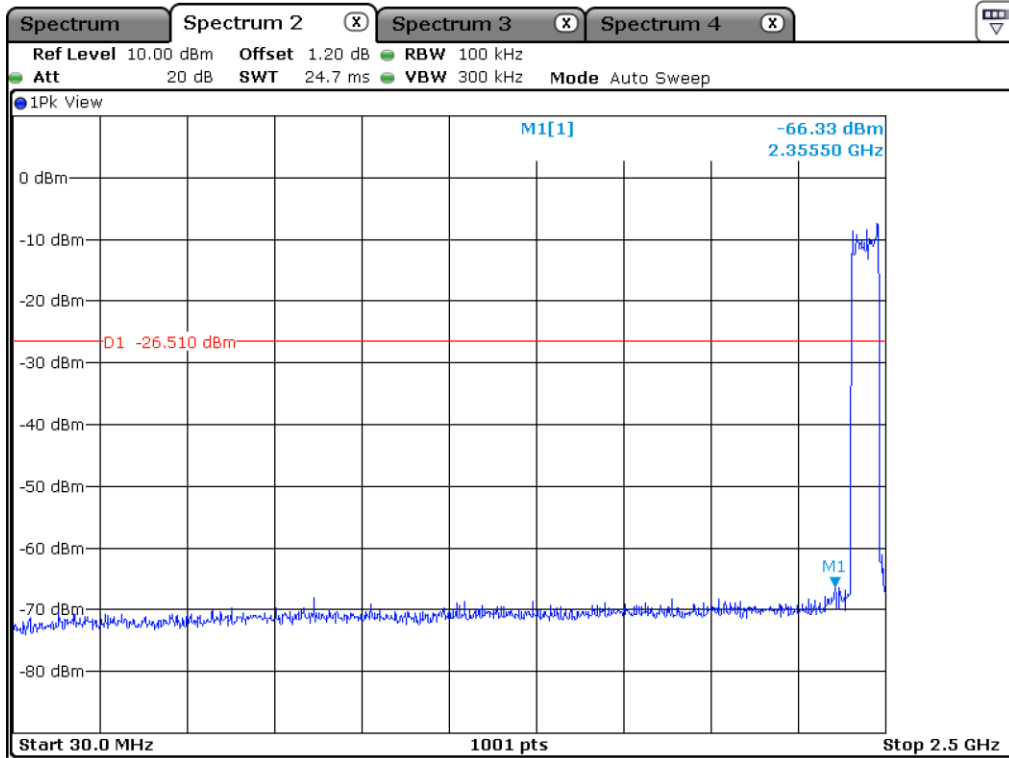


Hopping Mode

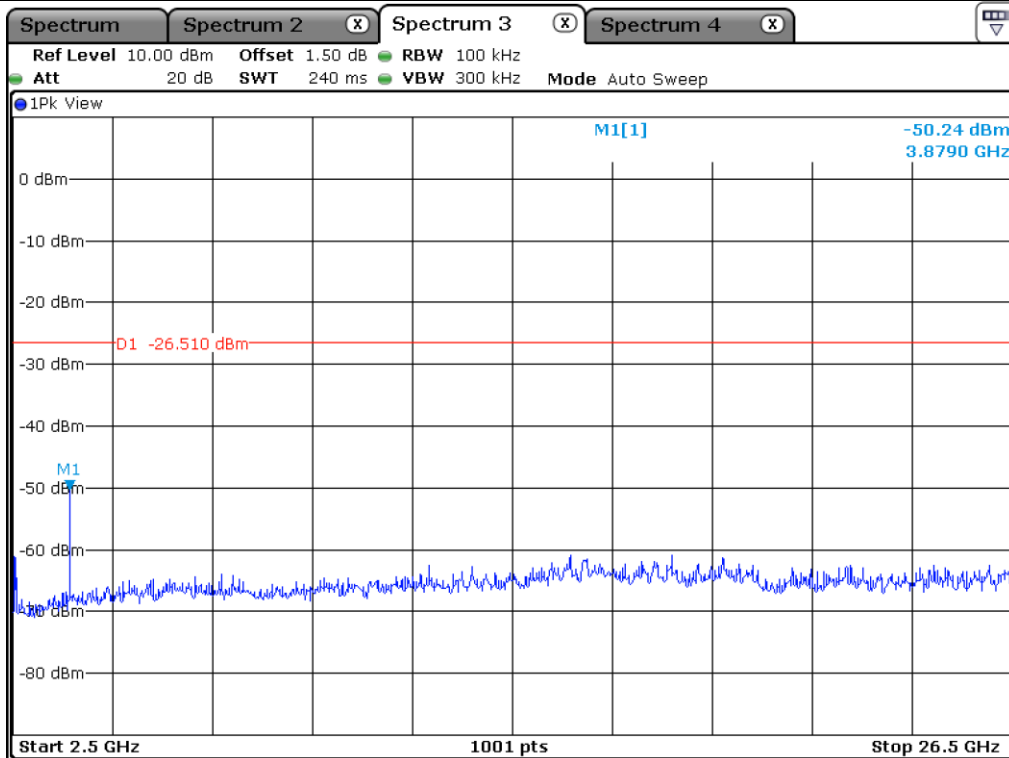


Hopping Mode


12.5.3 Test data for 3 Mbps

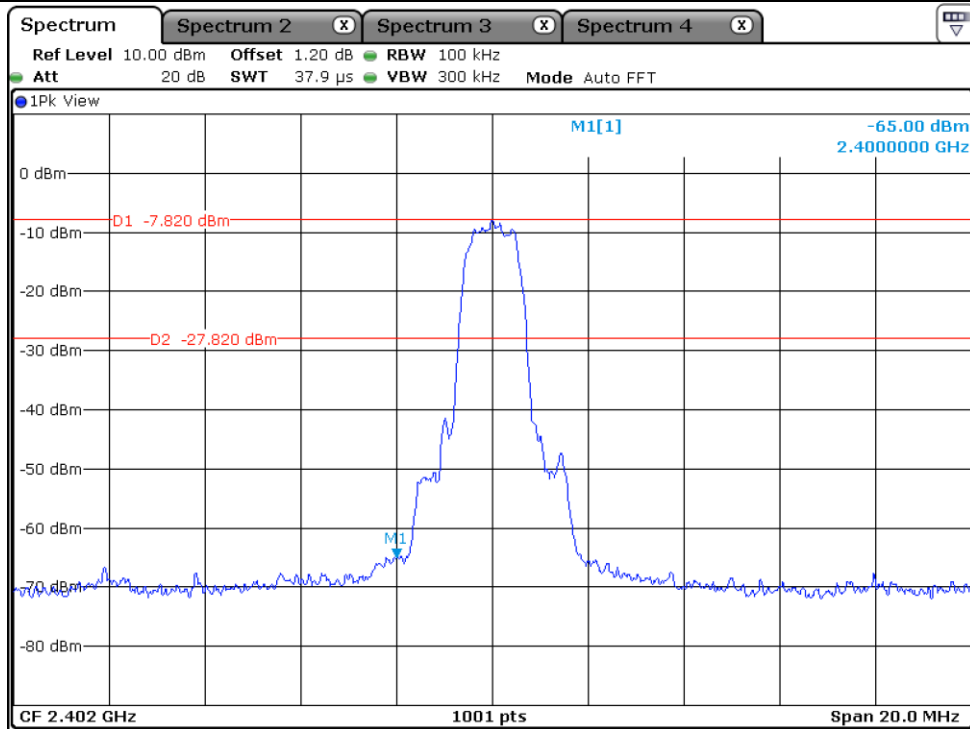


Low Channel

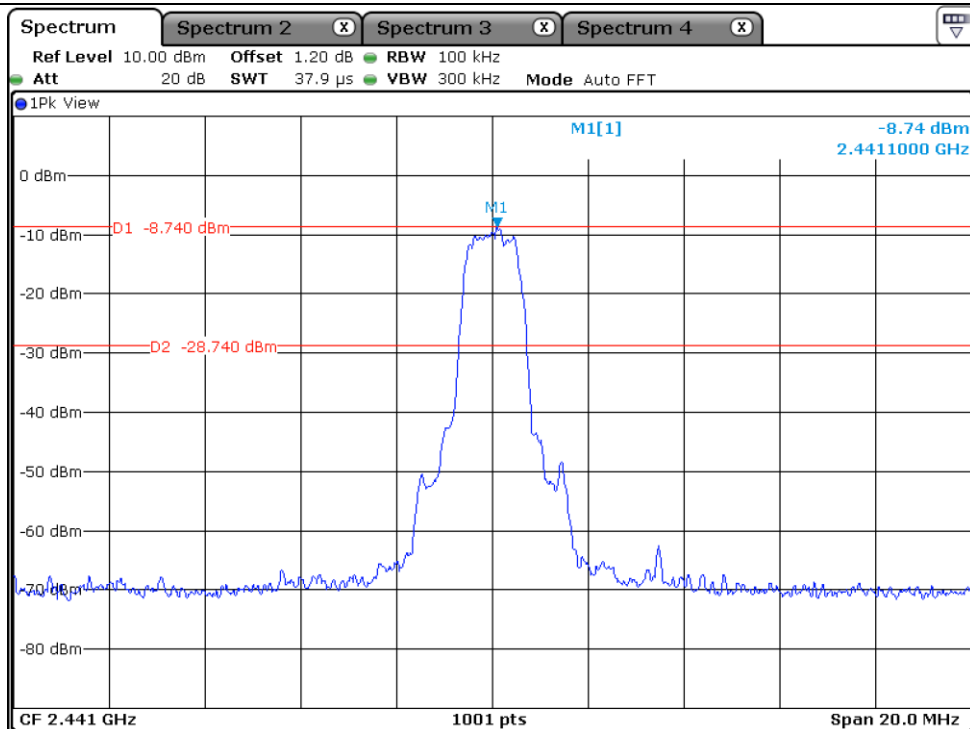


Middle Channel

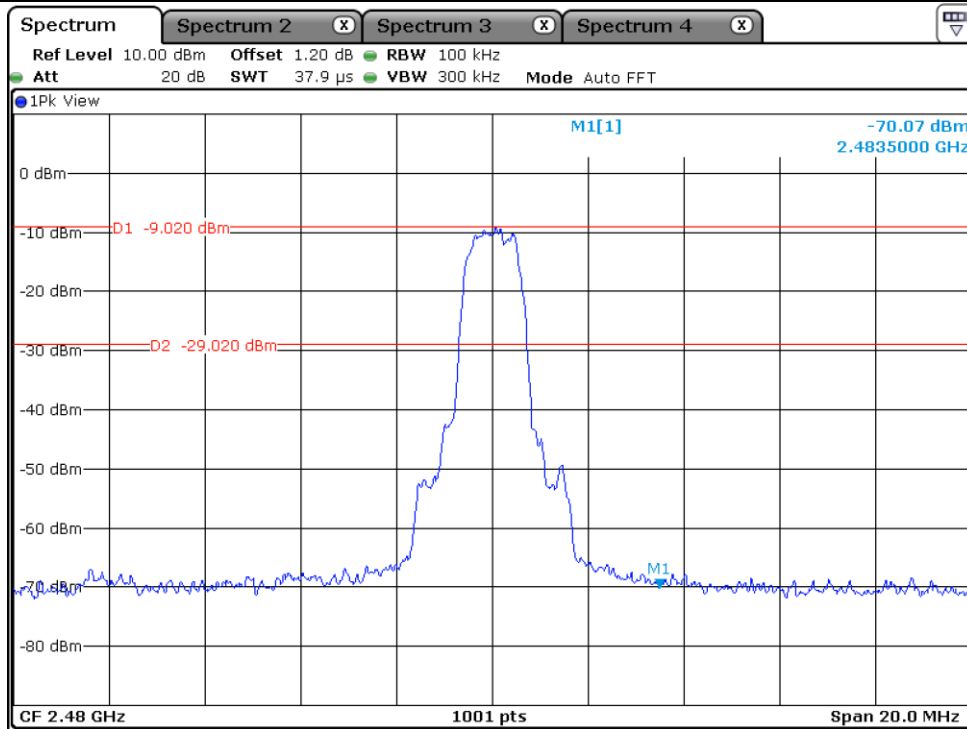


High Channel

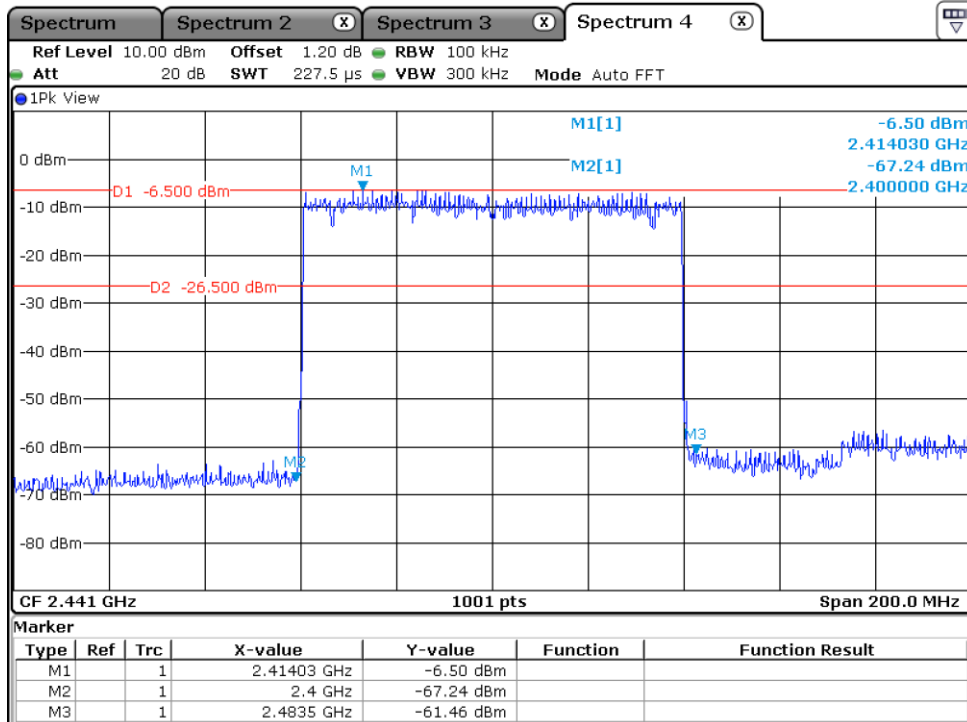


Hopping Mode

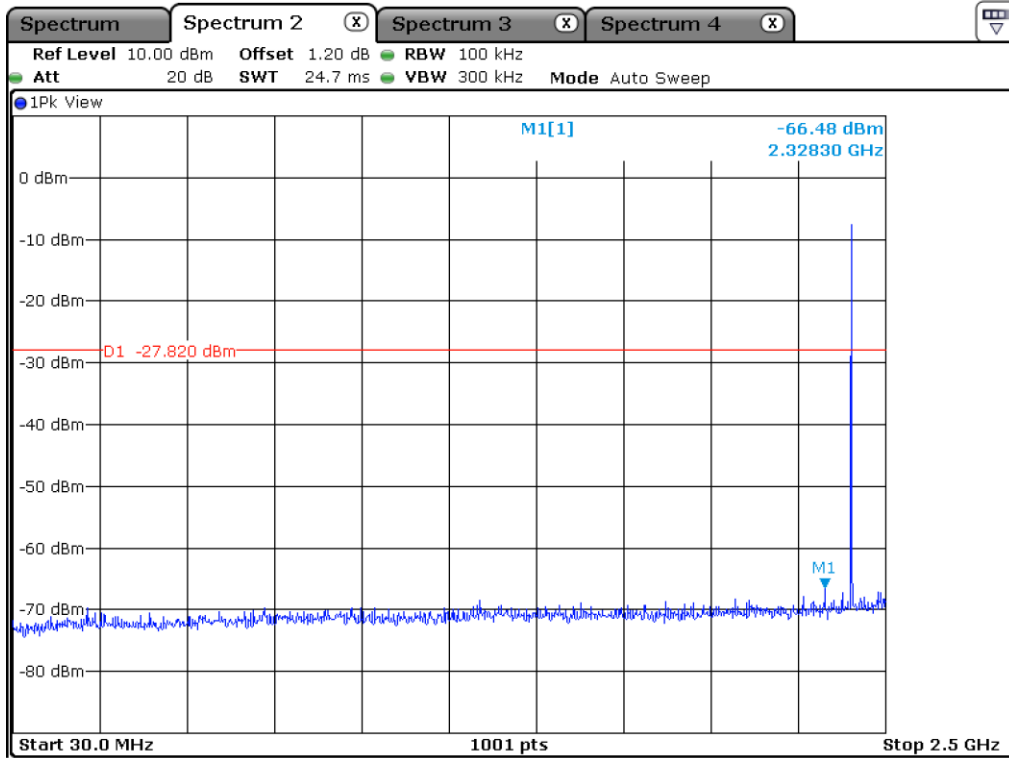


Low Channel

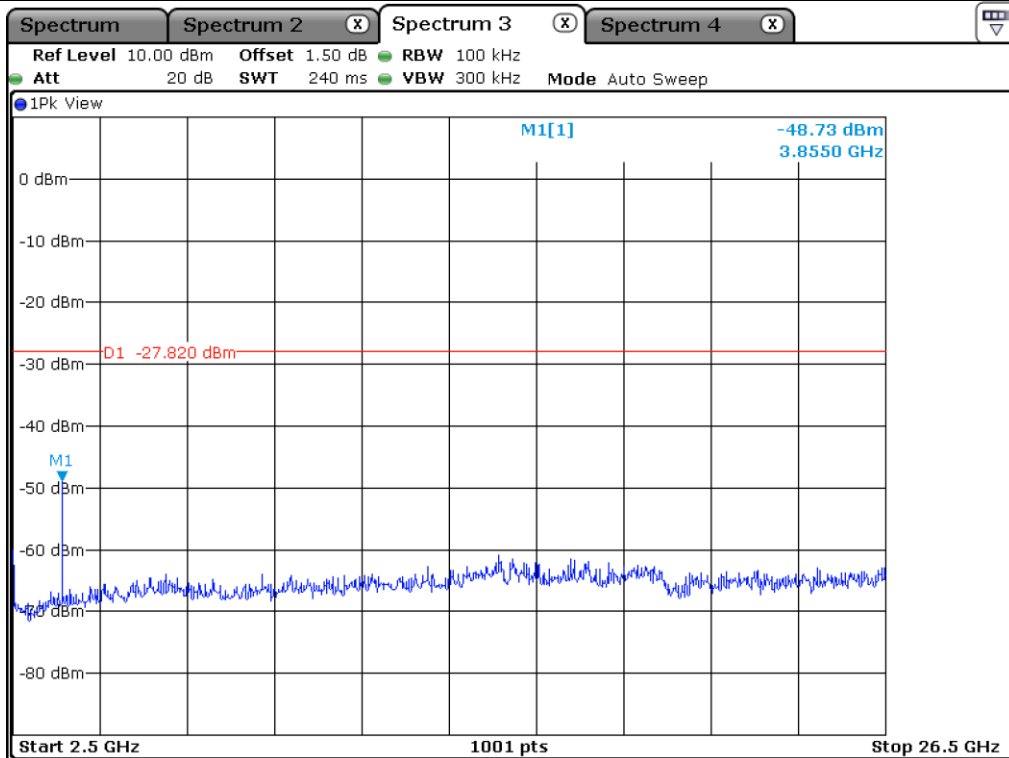


Low Channel

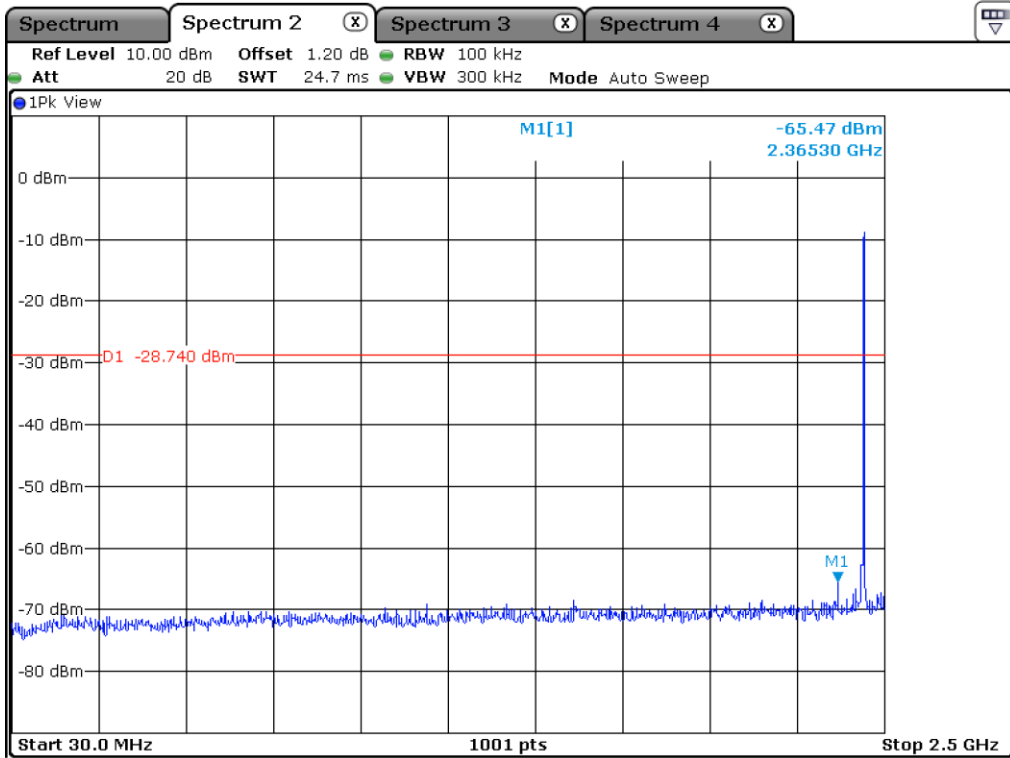


Middle Channel

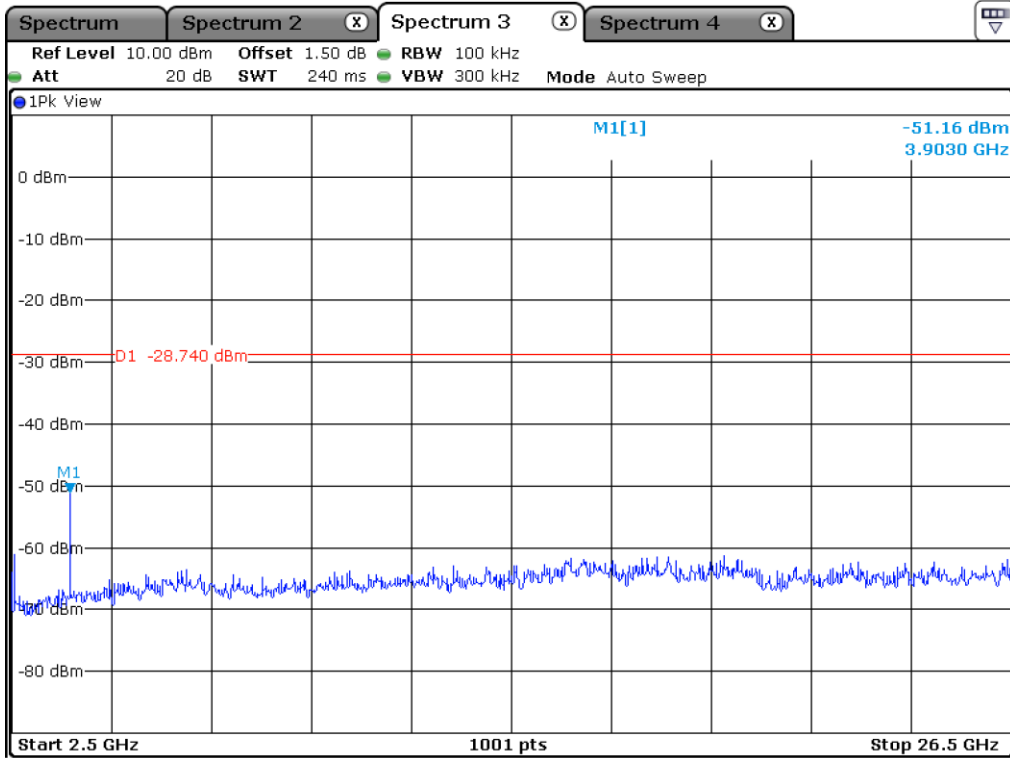


Middle Channel

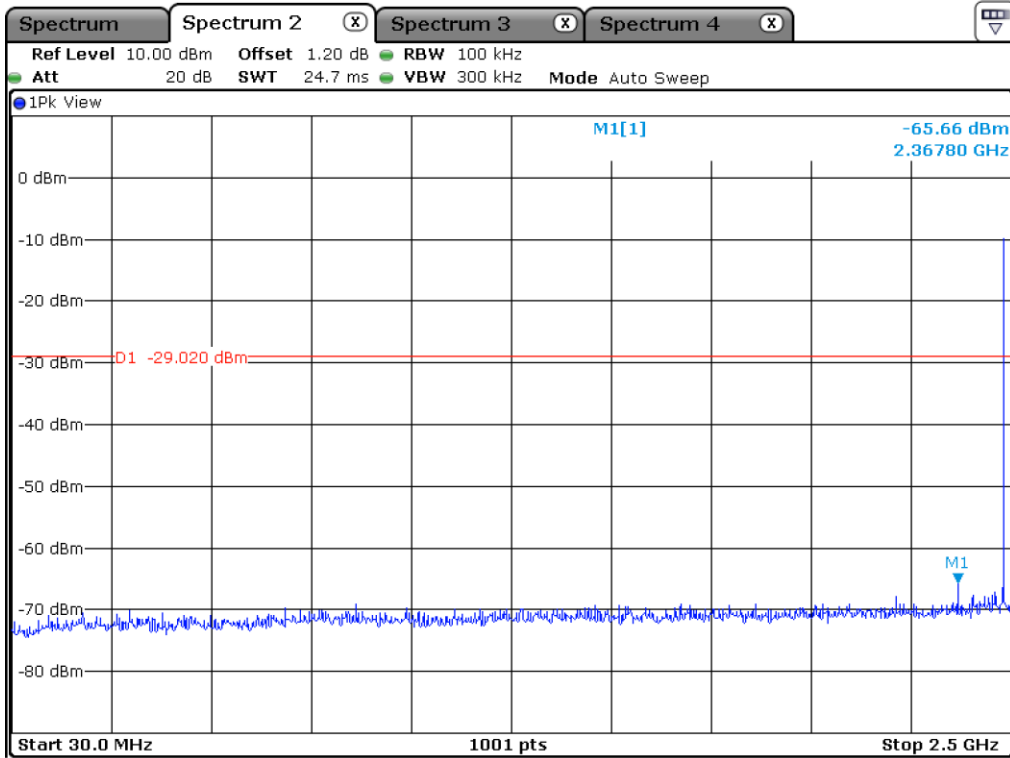


High Channel

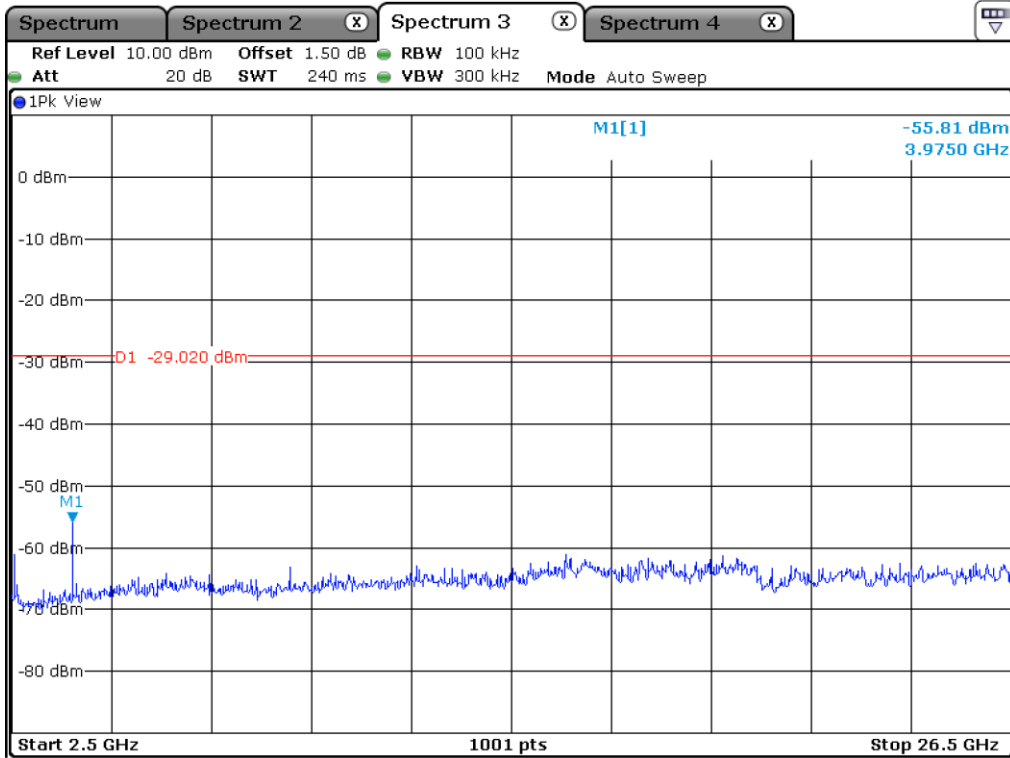

High Channel

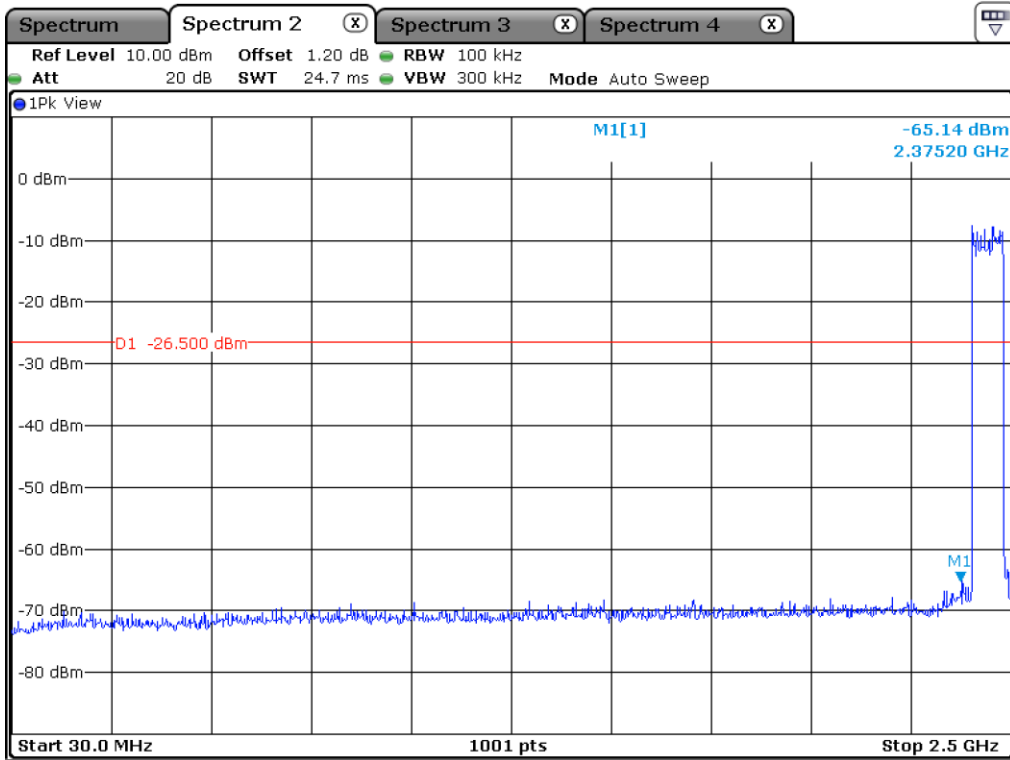

Hopping Mode

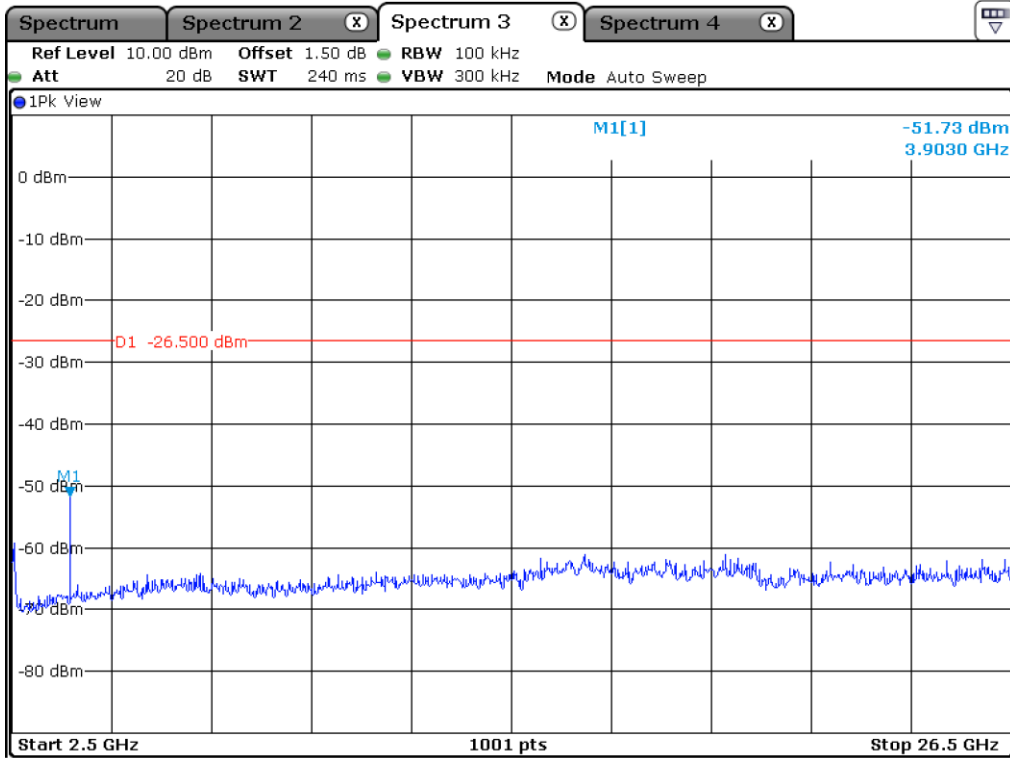

Hopping Mode

12.6 Test data for Transmitting mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band

12.6.1.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 76.60 %
- Result : PASSED

| Frequency (MHz) | Reading (dBμV) | Detector Mode | Ant. Pol. (H/V) | Ant. Factor | Cable Loss | C.F (dB) | Total (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------------|----------------|---------------|-----------------|-------------|------------|----------|----------------|-----------------|-------------|
| Test Data for Low Channel | | | | | | | | | |
| 2 378.448 | 21.16 | Peak | H | 28.30 | 8.20 | - | 57.66 | 74.00 | 16.34 |
| 2 389.960 | 7.15 | Average | H | 28.30 | 8.20 | 1.16 | 44.81 | 54.00 | 9.19 |
| 2 378.550 | 20.02 | Peak | V | 28.30 | 8.20 | - | 56.52 | 74.00 | 17.48 |
| 2 349.281 | 6.95 | Average | V | 28.30 | 8.20 | 1.16 | 44.61 | 54.00 | 9.39 |
| Test Data for High Channel | | | | | | | | | |
| 2 488.356 | 19.11 | Peak | H | 28.70 | 8.23 | - | 56.04 | 74.00 | 17.96 |
| 2 484.532 | 7.36 | Average | H | 28.70 | 8.23 | 1.16 | 45.45 | 54.00 | 8.55 |
| 2 490.375 | 18.14 | Peak | V | 28.70 | 8.23 | - | 55.07 | 74.00 | 18.93 |
| 2 486.312 | 6.75 | Average | V | 28.70 | 8.23 | 1.16 | 44.84 | 54.00 | 9.16 |

Remark: “H”: Horizontal, “V”: Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Correction Factor

12.6.1.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.13 %
- Result : PASSED

| Frequency (MHz) | Reading (dBμV) | Detector Mode | Ant. Pol. (H/V) | Ant. Factor | Cable Loss | C.F (dB) | Total (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------------|----------------|---------------|-----------------|-------------|------------|----------|----------------|-----------------|-------------|
| Test Data for Low Channel | | | | | | | | | |
| 2 378.290 | 20.02 | Peak | H | 28.30 | 8.20 | - | 56.52 | 74.00 | 17.48 |
| 2 345.664 | 6.82 | Average | H | 28.30 | 8.20 | 1.13 | 44.45 | 54.00 | 9.55 |
| 2 375.605 | 19.31 | Peak | V | 28.30 | 8.20 | - | 55.81 | 74.00 | 18.19 |
| 2 322.120 | 7.08 | Average | V | 28.30 | 8.20 | 1.13 | 44.71 | 54.00 | 9.29 |
| Test Data for High Channel | | | | | | | | | |
| 2 488.764 | 18.73 | Peak | H | 28.70 | 8.23 | - | 55.66 | 74.00 | 18.34 |
| 2 484.235 | 6.31 | Average | H | 28.70 | 8.23 | 1.13 | 44.37 | 54.00 | 9.63 |
| 2 490.334 | 18.75 | Peak | V | 28.70 | 8.23 | - | 55.68 | 74.00 | 18.32 |
| 2 499.917 | 6.17 | Average | V | 28.70 | 8.23 | 1.13 | 44.23 | 54.00 | 9.77 |

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

12.6.1.3 Test data for 3 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.13 %
- Result : PASSED

| Frequency (MHz) | Reading (dBμV) | Detector Mode | Ant. Pol. (H/V) | Ant. Factor | Cable Loss | C.F (dB) | Total (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-----------------------------------|----------------|---------------|-----------------|-------------|------------|----------|----------------|-----------------|-------------|
| Test Data for Low Channel | | | | | | | | | |
| 2 375.112 | 19.03 | Peak | H | 28.30 | 8.20 | - | 55.53 | 74.00 | 18.47 |
| 2 347.053 | 7.49 | Average | H | 28.30 | 8.20 | 1.13 | 45.12 | 54.00 | 8.88 |
| 2 333.156 | 17.86 | Peak | V | 28.30 | 8.20 | - | 54.36 | 74.00 | 19.64 |
| 2 343.812 | 6.80 | Average | V | 28.30 | 8.20 | 1.13 | 44.43 | 54.00 | 9.57 |
| Test Data for High Channel | | | | | | | | | |
| 2 496.302 | 18.71 | Peak | H | 28.70 | 8.23 | - | 55.64 | 74.00 | 18.36 |
| 2 483.526 | 6.71 | Average | H | 28.70 | 8.23 | 1.13 | 44.77 | 54.00 | 9.23 |
| 2 499.823 | 18.64 | Peak | V | 28.70 | 8.23 | - | 55.57 | 74.00 | 18.43 |
| 2 497.653 | 6.01 | Average | V | 28.70 | 8.23 | 1.13 | 44.07 | 54.00 | 9.93 |

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

12.6.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 76.60 %
- Result : PASSED

| Frequency (MHz) | Reading (dBμV) | Detector Mode | Ant. Pol. (H/V) | Ant. Factor | Cable Loss | C.F (dB) | Total (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-------------------------------------|----------------|---------------|-----------------|-------------|------------|----------|----------------|-----------------|-------------|
| Test Data for Low Channel | | | | | | | | | |
| 4 804.00 | 14.00 | Peak | H | 33.40 | 11.21 | - | 58.61 | 74.00 | 15.39 |
| 4 804.00 | 2.98 | Average | H | 33.40 | 11.21 | 1.16 | 48.75 | 54.00 | 5.25 |
| 4 804.00 | 13.60 | Peak | V | 33.40 | 11.21 | - | 58.21 | 74.00 | 15.79 |
| 4 804.00 | 3.18 | Average | V | 33.40 | 11.21 | 1.16 | 48.95 | 54.00 | 5.05 |
| Test Data for Middle Channel | | | | | | | | | |
| 4 882.00 | 13.18 | Peak | H | 33.50 | 11.23 | - | 57.91 | 74.00 | 16.09 |
| 4 882.00 | 2.76 | Average | H | 33.50 | 11.23 | 1.16 | 48.65 | 54.00 | 5.35 |
| 4 882.00 | 13.02 | Peak | V | 33.50 | 11.23 | - | 57.75 | 74.00 | 16.25 |
| 4 882.00 | 2.72 | Average | V | 33.50 | 11.23 | 1.16 | 48.61 | 54.00 | 5.39 |
| Test Data for High Channel | | | | | | | | | |
| 4 960.00 | 12.27 | Peak | H | 33.30 | 11.25 | - | 56.82 | 74.00 | 17.18 |
| 4 960.00 | 2.81 | Average | H | 33.30 | 11.25 | 1.16 | 48.52 | 54.00 | 5.48 |
| 4 960.00 | 13.18 | Peak | V | 33.30 | 11.25 | - | 57.73 | 74.00 | 16.27 |
| 4 960.00 | 3.33 | Average | V | 33.30 | 11.25 | 1.16 | 49.04 | 54.00 | 4.96 |

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

12.6.2.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.13 %
- Result : PASSED

| Frequency (MHz) | Reading (dBμV) | Detector Mode | Ant. Pol. (H/V) | Ant. Factor | Cable Loss | C.F (dB) | Total (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-------------------------------------|----------------|---------------|-----------------|-------------|------------|----------|----------------|-----------------|-------------|
| Test Data for Low Channel | | | | | | | | | |
| 4 804.00 | 13.12 | Peak | H | 33.40 | 11.21 | - | 57.73 | 74.00 | 16.27 |
| 4 804.00 | 3.03 | Average | H | 33.40 | 11.21 | 1.13 | 48.77 | 54.00 | 5.23 |
| 4 804.00 | 12.98 | Peak | V | 33.40 | 11.21 | - | 57.59 | 74.00 | 16.41 |
| 4 804.00 | 2.54 | Average | V | 33.40 | 11.21 | 1.13 | 48.28 | 54.00 | 5.72 |
| Test Data for Middle Channel | | | | | | | | | |
| 4 882.00 | 12.96 | Peak | H | 33.50 | 11.23 | - | 57.69 | 74.00 | 16.31 |
| 4 882.00 | 2.42 | Average | H | 33.50 | 11.23 | 1.13 | 48.28 | 54.00 | 5.72 |
| 4 882.00 | 12.20 | Peak | V | 33.50 | 11.23 | - | 56.93 | 74.00 | 17.07 |
| 4 882.00 | 2.76 | Average | V | 33.50 | 11.23 | 1.13 | 48.62 | 54.00 | 5.38 |
| Test Data for High Channel | | | | | | | | | |
| 4 960.00 | 12.76 | Peak | H | 33.30 | 11.25 | - | 57.31 | 74.00 | 16.69 |
| 4 960.00 | 3.17 | Average | H | 33.30 | 11.25 | 1.13 | 48.85 | 54.00 | 5.15 |
| 4 960.00 | 13.43 | Peak | V | 33.30 | 11.25 | - | 57.98 | 74.00 | 16.02 |
| 4 960.00 | 3.35 | Average | V | 33.30 | 11.25 | 1.13 | 49.03 | 54.00 | 4.97 |

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

12.6.2.3 Test data for 3 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.13 %
- Result : PASSED

| Frequency (MHz) | Reading (dBμV) | Detector Mode | Ant. Pol. (H/V) | Ant. Factor | Cable Loss | C.F (dB) | Total (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|-------------------------------------|----------------|---------------|-----------------|-------------|------------|----------|----------------|-----------------|-------------|
| Test Data for Low Channel | | | | | | | | | |
| 4 804.00 | 13.72 | Peak | H | 33.40 | 11.21 | - | 58.33 | 74.00 | 15.67 |
| 4 804.00 | 2.57 | Average | H | 33.40 | 11.21 | 1.13 | 48.31 | 54.00 | 5.69 |
| 4 804.00 | 12.62 | Peak | V | 33.40 | 11.21 | - | 57.23 | 74.00 | 16.77 |
| 4 804.00 | 2.94 | Average | V | 33.40 | 11.21 | 1.13 | 48.68 | 54.00 | 5.32 |
| Test Data for Middle Channel | | | | | | | | | |
| 4 882.00 | 13.09 | Peak | H | 33.50 | 11.23 | - | 57.82 | 74.00 | 16.18 |
| 4 882.00 | 2.88 | Average | H | 33.50 | 11.23 | 1.13 | 48.74 | 54.00 | 5.26 |
| 4 882.00 | 13.10 | Peak | V | 33.50 | 11.23 | - | 57.83 | 74.00 | 16.17 |
| 4 882.00 | 2.86 | Average | V | 33.50 | 11.23 | 1.13 | 48.72 | 54.00 | 5.28 |
| Test Data for High Channel | | | | | | | | | |
| 4 960.00 | 12.89 | Peak | H | 33.30 | 11.25 | - | 57.44 | 74.00 | 16.56 |
| 4 960.00 | 3.55 | Average | H | 33.30 | 11.25 | 1.13 | 49.23 | 54.00 | 4.77 |
| 4 960.00 | 13.90 | Peak | V | 33.30 | 11.25 | - | 58.45 | 74.00 | 15.55 |
| 4 960.00 | 3.41 | Average | V | 33.30 | 11.25 | 1.13 | 49.09 | 54.00 | 4.91 |

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor}$$

13. RADIATED EMISSION TEST

13.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.


13.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

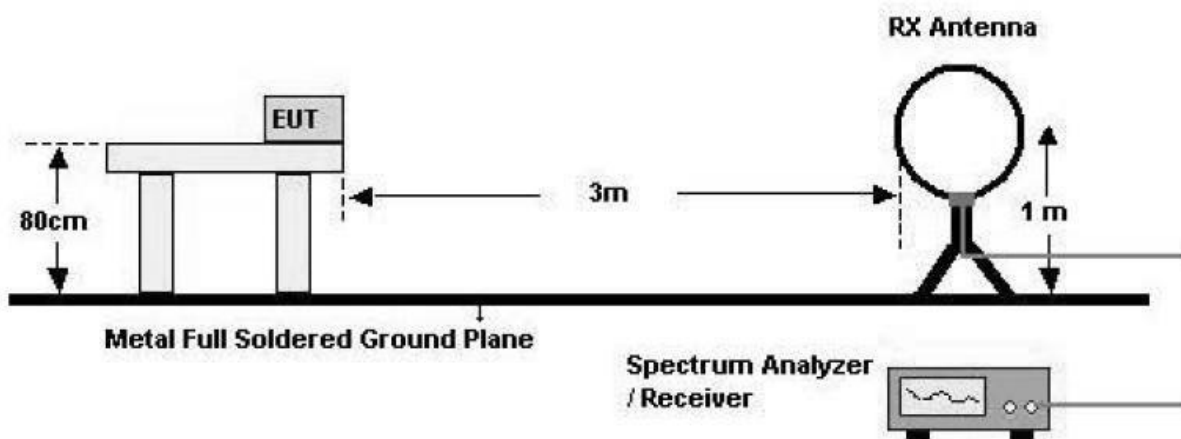

2. 30 MHz - 1 GHz

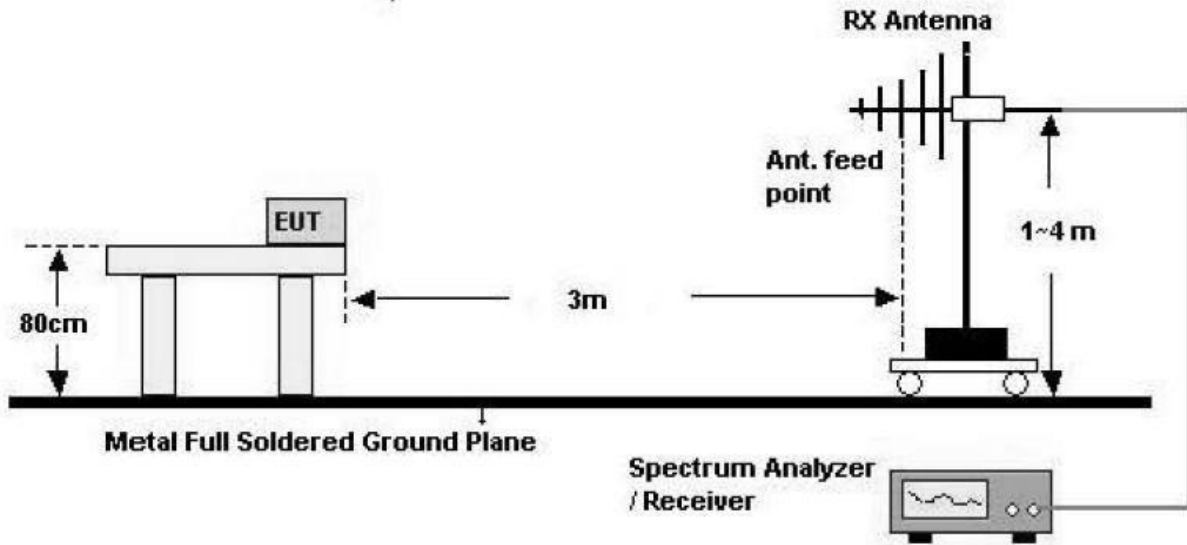

3. Above 1 GHz

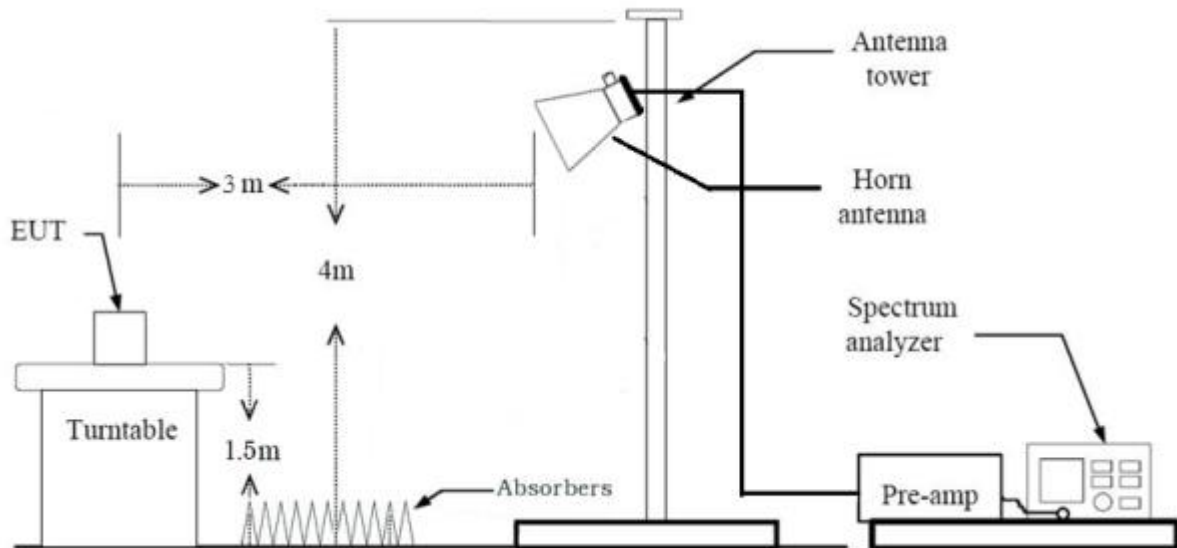


13.3 Test Date

January 28, 2021 ~ February 04, 2021

13.4 Test data for 30 MHz ~ 1 000 MHz

13.4.1 Test data for Bluetooth Mode

- . Resolution bandwidth : 120 kHz
- . Frequency range : 30 MHz ~ 1 000 MHz
- . Measurement distance : 3 m

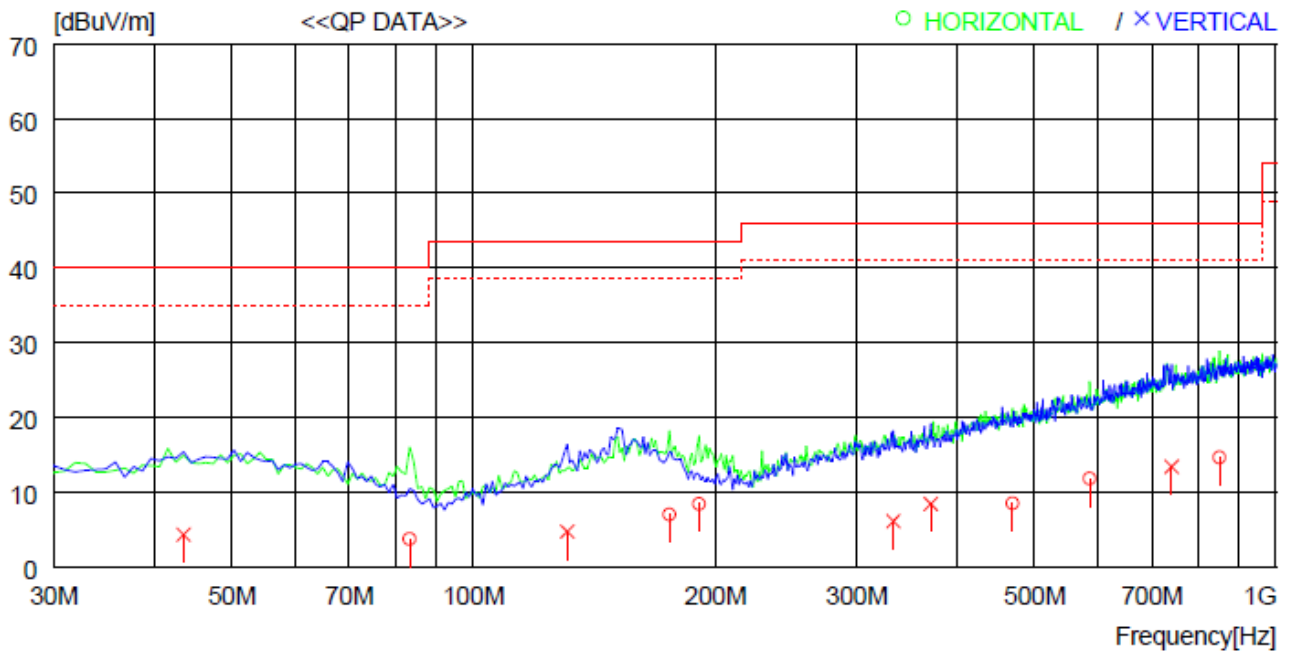

| No. | FREQ [MHz] | READING QP [dBuV] | ANT FACTOR [dB] | LOSS [dB] | GAIN [dB] | RESULT [dBuV/m] | LIMIT [dBuV/m] | MARGIN [dB] | ANTENNA [cm] | TABLE [DEG] |
|------------------------|---------------|-------------------------|-----------------------|--------------|--------------|--------------------|-------------------|----------------|-----------------|----------------|
| ----- Horizontal ----- | | | | | | | | | | |
| 1 | 83.350 | 27.8 | 7.8 | 0.8 | 32.7 | 3.7 | 40.0 | 36.3 | 100 | 234 |
| 2 | 175.500 | 25.3 | 13.0 | 1.3 | 32.6 | 7.0 | 43.5 | 36.5 | 100 | 82 |
| 3 | 191.020 | 26.9 | 12.8 | 1.3 | 32.6 | 8.4 | 43.5 | 35.1 | 100 | 353 |
| 4 | 469.411 | 21.8 | 17.4 | 2.1 | 32.8 | 8.5 | 46.0 | 37.5 | 100 | 290 |
| 5 | 585.808 | 22.9 | 19.5 | 2.4 | 33.0 | 11.8 | 46.0 | 34.2 | 100 | 353 |
| 6 | 849.640 | 21.8 | 22.6 | 2.5 | 32.3 | 14.6 | 46.0 | 31.4 | 100 | 309 |
| ----- Vertical ----- | | | | | | | | | | |
| 7 | 43.580 | 25.9 | 10.5 | 0.6 | 32.7 | 4.3 | 40.0 | 35.7 | 100 | 318 |
| 8 | 83.350 | 22.9 | 7.8 | 0.8 | 32.7 | -1.2 | 40.0 | 41.2 | 100 | 202 |
| 9 | 130.880 | 25.5 | 10.8 | 1.1 | 32.7 | 4.7 | 43.5 | 38.8 | 100 | 4 |
| 10 | 333.610 | 22.5 | 14.5 | 1.8 | 32.7 | 6.1 | 46.0 | 39.9 | 100 | 4 |
| 11 | 371.440 | 23.6 | 15.6 | 1.9 | 32.7 | 8.4 | 46.0 | 37.6 | 100 | 4 |
| 12 | 741.004 | 22.5 | 21.4 | 2.3 | 32.8 | 13.4 | 46.0 | 32.6 | 100 | 318 |


13.4.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz)

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : NAVIGATION RADIO

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

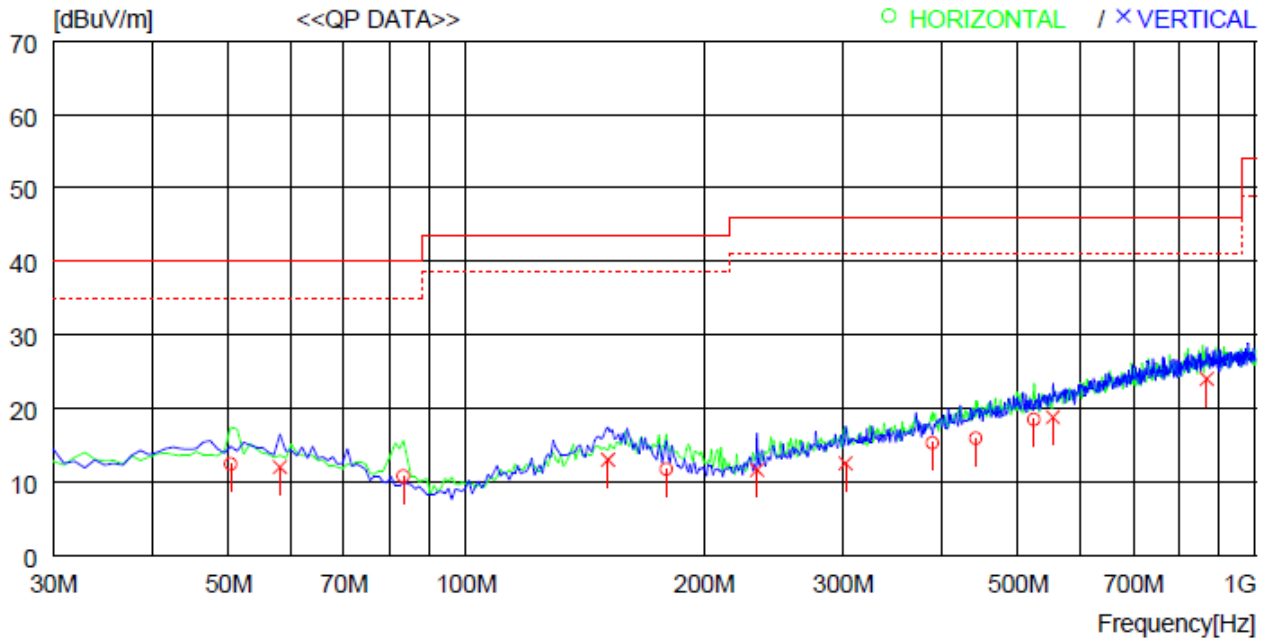

| No. | FREQ [MHz] | READING QP [dBuV] | ANT FACTOR [dB] | LOSS [dB] | GAIN [dB] | RESULT [dBuV/m] | LIMIT [dBuV/m] | MARGIN [dB] | ANTENNA [cm] | TABLE [DEG] |
|------------------------|---------------|-------------------------|-----------------------|--------------|--------------|--------------------|-------------------|----------------|-----------------|----------------|
| ----- Horizontal ----- | | | | | | | | | | |
| 1 | 50.370 | 34.7 | 9.8 | 0.6 | 32.7 | 12.4 | 40.0 | 27.6 | 100 | 162 |
| 2 | 83.350 | 34.9 | 7.8 | 0.8 | 32.7 | 10.8 | 40.0 | 29.2 | 100 | 311 |
| 3 | 179.380 | 29.9 | 13.1 | 1.3 | 32.6 | 11.7 | 43.5 | 31.8 | 100 | 85 |
| 4 | 389.870 | 29.9 | 16.2 | 1.9 | 32.7 | 15.3 | 46.0 | 30.7 | 100 | 354 |
| 5 | 442.251 | 29.7 | 17.0 | 2.0 | 32.8 | 15.9 | 46.0 | 30.1 | 100 | 354 |
| 6 | 523.730 | 30.9 | 18.3 | 2.2 | 32.9 | 18.5 | 46.0 | 27.5 | 100 | 354 |
| ----- Vertical ----- | | | | | | | | | | |
| 7 | 58.130 | 34.6 | 9.4 | 0.7 | 32.7 | 12.0 | 40.0 | 28.0 | 100 | 313 |
| 8 | 151.250 | 32.6 | 11.8 | 1.2 | 32.6 | 13.0 | 43.5 | 30.5 | 100 | 126 |
| 9 | 233.700 | 31.8 | 10.9 | 1.5 | 32.6 | 11.6 | 46.0 | 34.4 | 100 | 151 |
| 10 | 302.570 | 29.8 | 13.7 | 1.7 | 32.7 | 12.5 | 46.0 | 33.5 | 100 | 3 |
| 11 | 553.799 | 30.6 | 18.9 | 2.3 | 33.0 | 18.8 | 46.0 | 27.2 | 100 | 3 |
| 12 | 867.100 | 30.8 | 22.8 | 2.6 | 32.2 | 24.0 | 46.0 | 22.0 | 100 | 352 |


13.4.3 Test data for Intermodulation Mode(Bluetooth + WLAN 5 GHz)

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : NAVIGATION RADIO

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

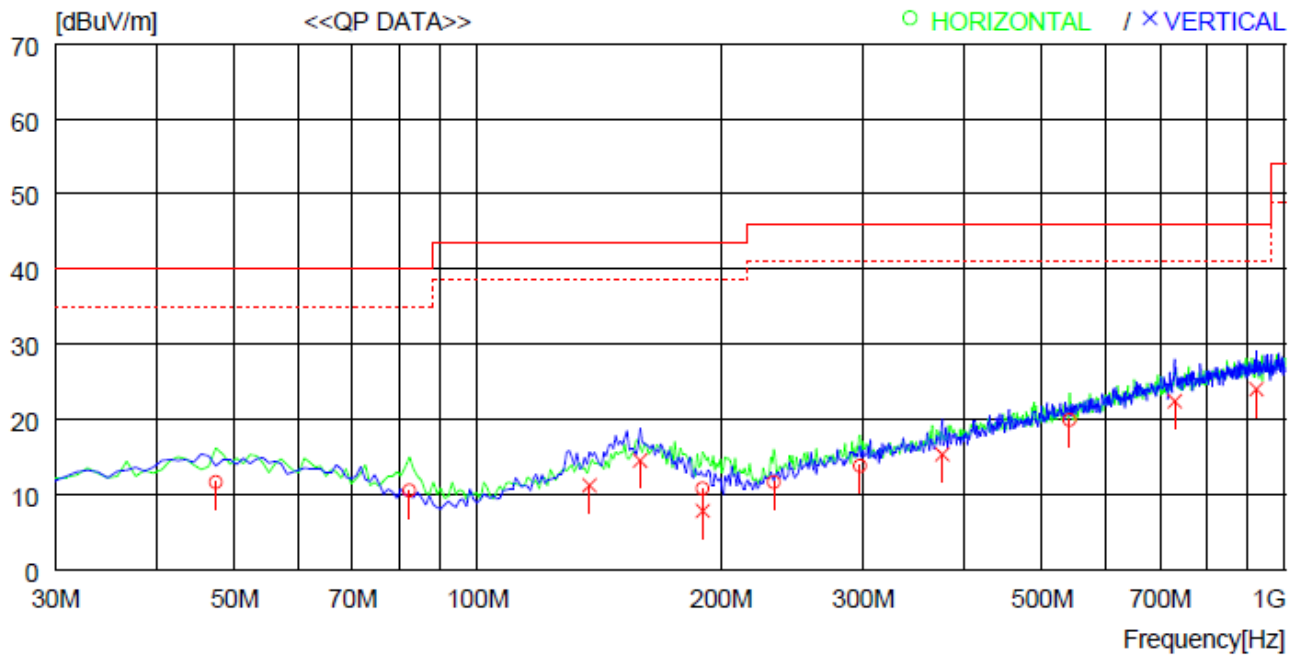

| No. | FREQ [MHz] | READING QP [dBuV] | ANT FACTOR [dB] | LOSS [dB] | GAIN [dB] | RESULT [dBuV/m] | LIMIT [dBuV/m] | MARGIN [dB] | ANTENNA [cm] | TABLE [DEG] |
|------------------------|---------------|-------------------------|-----------------------|--------------|--------------|--------------------|-------------------|----------------|-----------------|----------------|
| ----- Horizontal ----- | | | | | | | | | | |
| 1 | 47.460 | 23.6 | 19.6 | 1.1 | 32.7 | 11.6 | 40.0 | 28.4 | 100 | 62 |
| 2 | 82.380 | 26.9 | 14.7 | 1.5 | 32.6 | 10.5 | 40.0 | 29.5 | 100 | 13 |
| 3 | 190.050 | 24.8 | 16.3 | 2.3 | 32.6 | 10.8 | 43.5 | 32.7 | 100 | 242 |
| 4 | 232.730 | 24.8 | 16.7 | 2.6 | 32.5 | 11.6 | 46.0 | 34.4 | 100 | 7 |
| 5 | 297.720 | 23.9 | 19.3 | 3.0 | 32.4 | 13.8 | 46.0 | 32.2 | 100 | 358 |
| 6 | 541.190 | 23.9 | 24.4 | 4.0 | 32.4 | 19.9 | 46.0 | 26.1 | 100 | 358 |
| ----- Vertical ----- | | | | | | | | | | |
| 7 | 137.670 | 23.6 | 18.2 | 2.0 | 32.6 | 11.2 | 43.5 | 32.3 | 100 | 309 |
| 8 | 159.010 | 25.9 | 19.1 | 2.1 | 32.6 | 14.5 | 43.5 | 29.0 | 100 | 4 |
| 9 | 190.050 | 21.8 | 16.3 | 2.3 | 32.6 | 7.8 | 43.5 | 35.7 | 100 | 4 |
| 10 | 376.290 | 23.4 | 21.0 | 3.3 | 32.4 | 15.3 | 46.0 | 30.7 | 100 | 4 |
| 11 | 730.334 | 22.9 | 27.2 | 4.7 | 32.4 | 22.4 | 46.0 | 23.6 | 100 | 208 |
| 12 | 921.418 | 21.5 | 29.2 | 5.3 | 32.0 | 24.0 | 46.0 | 22.0 | 100 | 4 |

13.5 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m

| Frequency (MHz) | Reading (dBμV) | Ant. Pol. (H/V) | Ant. Factor (dB/m) | Cable Loss | Amp Gain | Emission Level(dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|--|----------------|-----------------|--------------------|------------|----------|------------------------|-----------------|-------------|
| Emission from the EUT more than 20 dB below the limit in each frequency range. | | | | | | | | |

13.6 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m

| Frequency (MHz) | Reading (dBμV) | Ant. Pol. (H/V) | Ant. Factor (dB/m) | Cable Loss | Amp Gain | Emission Level(dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|--|----------------|-----------------|--------------------|------------|----------|------------------------|-----------------|-------------|
| Emission from the EUT more than 20 dB below the limit in each frequency range. | | | | | | | | |

14. LIST OF TEST EQUIPMENT

| Model Number | Manufacturer | Description | Serial Number | Last Cal.(Interval) |
|---------------------|---------------------|--------------------|----------------------|----------------------------|
| FSV40-N | Rohde & Schwarz | Signal Analyzer | 102177 | Apr. 20, 2020 (1Y) |
| FSW43 | Rohde & Schwarz | Signal Analyzer | 104544 | Jul. 15, 2020 (1Y) |
| ESW | Rohde & Schwarz | EMI Test Receiver | 101851 | Mar. 27, 2020 (1Y) |
| 310N | Sonoma Instrument | Pre-Amplifier | 392756 | Oct. 16, 2020 (1Y) |
| PAM-118A | Com-Power | Pre-Amplifier | 18040081 | Oct. 12, 2020 (1Y) |
| PAM-840A | Com-Power | Pre-Amplifier | 461339 | Oct. 16, 2020 (1Y) |
| DT3000-3t | Innco System | Turn Table | DT3000/093 | N/A |
| MA-4000XPET | Innco System | Antenna Master | MA4000/509 | N/A |
| FMZB 1513 | Schwarzbeck | Loop Antenna | 1513-235 | Mar. 24, 2020 (2Y) |
| HLP-2008 | TDK | Hybrid Antenna | 131316 | Feb. 27, 2020 (2Y) |
| AH-118 | Com-Power | Horn Antenna | 10050061 | Oct. 15, 2020 (1Y) |
| BBHA9170 | Schwarzbeck | Horn Antenna | BBHA9170178 | Jan. 07, 2020(1Y) |
| ESR | Rohde & Schwarz | EMI TEST RECEIVER | 102602 | Mar. 17, 2020 (1Y) |