

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1704-0059
2. Customer
 - Name : LG Electronics USA
 - Address : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : RADIO ASM-RECEIVER / LC10S-R
FCC ID : BEJLC10S-R
5. Test Method Used : KDB 789033, ANSI C63.10-2013
Test Specification : FCC Part 15.407 Subpart E
6. Date of Test : 2017.03.13 ~ 2017.03.23
7. Testing Environment : See appended test report.
8. Test Result : Refer to the attached test result.

Affirmation	Tested by		Technical Manager	
	Name : JaeHyeok Bang	(Signature)	Name : WonJung Lee	(Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2017 . 04 . 21 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRTFCC1704-0059	Apr. 21, 2017	Initial issue

CONTENTS

1. GENERAL INFORMATION	4
1.1 Testing Laboratory	4
1.2 Tested environment	4
1.3 Measurement Uncertainty	4
1.4 Details of Applicant.....	5
1.5 Description of EUT	5
2. Information about test items	6
2.1 Test mode.....	6
2.2 Tested Channel Information.....	6
2.3 Auxiliary equipment	6
2.4 EMI Suppression Device(s)/Modifications	6
2. SUMMARY OF TESTS	7
4. TEST METHODOLOGY	8
4.1 EUT configuration	8
4.2 EUT exercise.....	8
4.3 General test procedures	8
4.4 Description of test modes	8
5. INSTRUMENT CALIBRATION	8
6. ANTENNA REQUIREMENTS.....	9
7. TEST RESULT	10
7.1 Emission Bandwidth (26 dB Bandwidth)	10
7.2 Minimum Emission Bandwidth (6 dB Bandwidth).....	11
7.3 Maximum Conducted Output Power.....	16
7.4 Maximum Power Spectral Density.....	18
7.5 Frequency Stability	25
7.6 Radiated Spurious Emission Measurements	26
7.7 AC Conducted Emission.....	31
7.8 Occupied Bandwidth	32
8. LIST OF TEST EQUIPMENT.....	33
APPENDIX I	34
APPENDIX II	35
APPENDIX III	37

1. GENERAL INFORMATION

1.1 Testing Laboratory

DT&C Co., Ltd.		
Standard	Site number	Address
FCC	<input checked="" type="checkbox"/> 165783	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	<input type="checkbox"/> 804488	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	<input type="checkbox"/> 596748	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	<input type="checkbox"/> 678747	683-3, Yubang-dong, Cheoin-gu, Yongin-si, Kyeonggi-do, Korea, 449-080
IC	<input checked="" type="checkbox"/> 5740A-3	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	<input type="checkbox"/> 5740A-2	683-3, Yubang-dong, Cheoin-gu, Yongin-si, Kyeonggi-do, Korea, 449-080
www.dtn.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.2 Tested environment

Ambient Condition	
▪ Temperature	+21 ~ +25 °C
▪ Relative Humidity	40 % ~ 42 %

1.3 Measurement Uncertainty

Test items	Measurement uncertainty
Transmitter Output Power	0.70 dB (The confidence level is about 95 %, k = 2)
Radiated spurious emission (1 GHz Below)	5.1 dB (The confidence level is about 95 %, k = 2)
Radiated spurious emission (1 GHz ~ 18 GHz)	5.4 dB (The confidence level is about 95 %, k = 2)
Radiated spurious emission (18 GHz Above)	5.3 dB (The confidence level is about 95 %, k = 2)

1.4 Details of Applicant

Applicant : LG Electronics USA
 Address : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey 07632
 Contact person : Kyung-Su Han

1.5 Description of EUT

FCC Equipment Class	Unlicensed National Information Infrastructure (UNII)
EUT	RADIO ASM-RECEIVER
Model Name	LC10S-R
Add Model Name	N/A
Power Supply	DC 12V
Hardware version	C1
Software version	IP22
Frequency Range	U-NII 3(5725 ~ 5850MHz) ▪ 802.11a/n(HT20): 5745 ~ 5825 MHz
Max. RF Output Power (Average)	U-NII 3 ▪ 802.11a:15.73 dBm ▪ 802.11n(HT20): 15.59 dBm
Modulation type	OFDM
Antenna Specification	Antenna type: Internal Antenna Antenna gain ▪ U-NII-3: 2.900 dBi

2. Information about test items

2.1 Test mode

5GHz Band	Mode	Data Rate
U-NII 3	802.11a	6Mbps
	802.11n(HT20)	MCS 0

Note 1: The worst case data rate is determined as above test mode according to the power measurements.
And all test items were performed at the worst case data rate.

2.2 Tested Channel Information

5GHz Band	802.11a/n(HT20)	
	Channel	Frequency [MHz]
U-NII 3	149	5745
	157	5785
	165	5825

2.3 Auxiliary equipment

Equipment	Manufacturer	Model No.	Serial No.	Note
Display	LG	LC10S-L	701099789	-
-	-	-	-	-

2.4 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing
→ None

3. SUMMARY OF TESTS

FCC Part Section(s)	Parameter	Limit	Test Condition	Status Note 1
I. Transmitter Mode (TX)				
15.407(a)	Emission Bandwidth (26 dB Bandwidth)	N/A	Conducted	NA Note 5
15.407(e)	Minimum Emission Bandwidth (6 dB Bandwidth)	> 500 kHz (5725 ~ 5850 MHz)		C
15.407(a)	Maximum Conducted Output Power	5150 ~ 5250 MHz : < 30 dBm or < 23.97 dBm 5250 ~ 5350 & 5470 ~ 5725 MHz : <250 mW or < 11 + 10 log ₁₀ (B) dBm, whichever power is less. 5725 ~ 5850 MHz : < 30 dBm Note: B is the 26dB BW.		C Note 2
15.407(a)	Maximum Power Spectral Density	5150 ~ 5250 MHz : 11 dBm/MHz or 17 dBm/MHz 5250 ~ 5350 & 5470 ~ 5725 MHz: 11 dBm/MHz 5725 ~ 5850 MHz: 30 dBm/500kHz		C Note 3
15.407(g)	Frequency Stability	N/A		C
15.407(b)	Undesirable Emissions	5150 ~ 5250 & 5250 ~ 5350 & 5470 ~ 5725 MHz: < -27 dBm/MHz EIRP 5725 ~ 5850 MHz: < -27 dBm/MHz or < 10 dBm/MHz or 15.6 dBm/MHz or < 27dBm/MHz EIRP	Radiated	C Note 4
15.205 15.209 15.407(b)	General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		C
15.407(h)	Dynamic Frequency Selection	FCC 15.407(h)	Conducted	NA Note 5
15.207	AC Conducted Emissions	FCC 15.207	AC Line Conducted	NA Note 6
15.203	Antenna Requirements	FCC 15.203	-	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: (i) For access point operating in the band 5.15-5.25 GHz: < 30 dBm (ii) For mobile and portable client devices in the 5.15-5.25 GHz band: < 23.97 dBm Note 3: (i) For access point operating in the band 5.15-5.25 GHz: < 17 dBm/MHz (ii) For mobile and portable client devices in the 5.15-5.25 GHz band: < 11 dBm/MHz Note 4: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Note 5: This device supports the band 5725~5850MHz only. Note 6: This device is installed in a car. Therefore the power source is a battery of car.				

4. TEST METHODOLOGY

Generally the tests were performed according to the KDB789033 D02 v01r03. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing

4.1 EUT configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT exercise

The EUT was operated in the test mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart C.

4.3 General test procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB789033 D02. So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB789033 D02. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10-2013 as stated on KDB789033 D02.

The EUT is placed on a non-conductive table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 1 or 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axis.

4.4 Description of test modes

A test program is used to control the EUT for staying in continuous transmitting mode with maximum fixed duty cycle.

5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

6. ANTENNA REQUIREMENTS

6.1 According to FCC 47 CFR §15.203:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The antenna is permanently attached on PCB. (Refer to Internal photo file.)
Therefore this E.U.T Complies with the requirement of §15.203**

7. TEST RESULT

7.1 Emission Bandwidth (26 dB Bandwidth)

■ Test Requirements

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The 26 dB bandwidth is used to determine the conducted output power limit.

■ Test Configuration

Refer to the APPENDIX I.

■ Test Procedure

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02**.

1. Set resolution bandwidth (RBW) = approximately **1 %** of the EBW.
2. Set the video bandwidth (**VBW**) > **RBW**.
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

■ Test Results

NA

7.2 Minimum Emission Bandwidth (6 dB Bandwidth)

■ Test Requirements

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

■ Test Configuration

Refer to the APPENDIX I.

■ Test Procedure

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02**.

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth $\geq 3 \times \text{RBW}$.
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


■ Test Results: **Comply**

Mode	Band	Channel	Frequency [MHz]	Test Result [MHz]
802.11a	U-NII 3	149	5745	15.31
		157	5785	15.16
		165	5825	15.18
802.11n (HT20)	U-NII 3	149	5785	16.09
		157	5825	16.13
		165	5755	15.17

RESULT PLOTS


6 dB Bandwidth

Test Mode: 802.11a & Ch.149

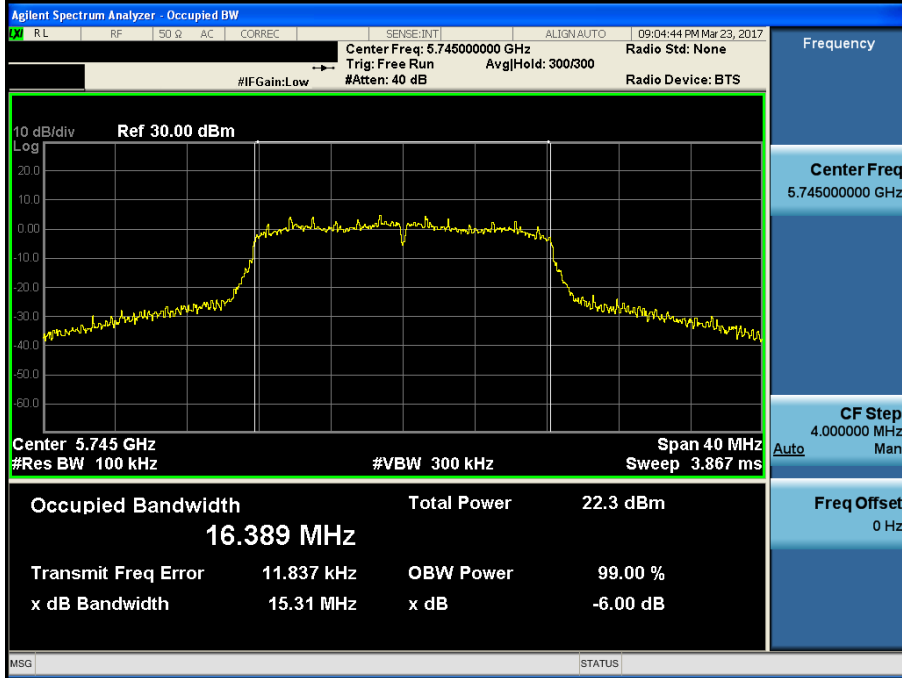


6 dB Bandwidth

Test Mode: 802.11a & Ch.157

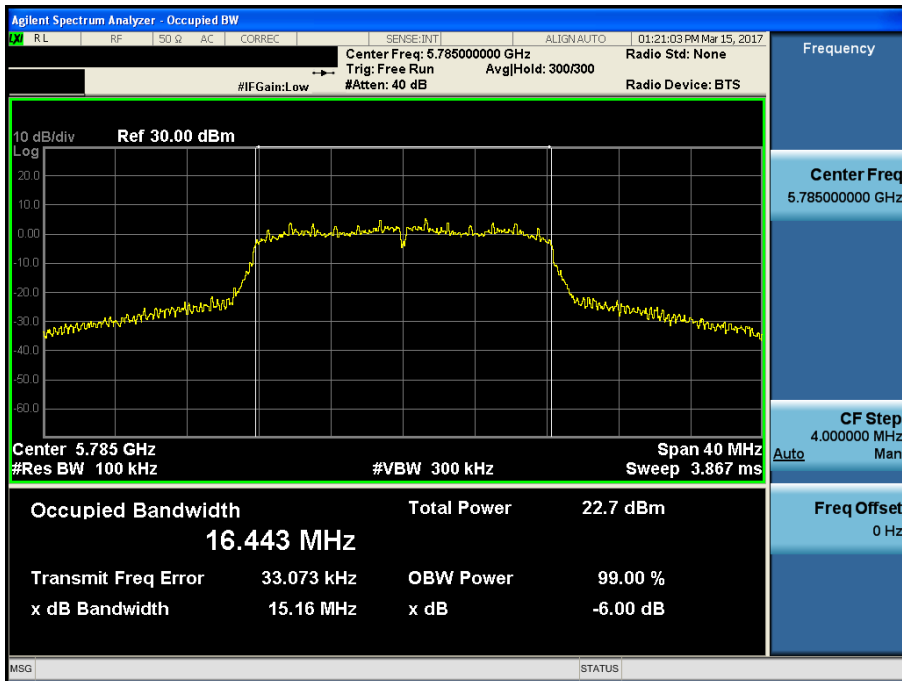


6 dB Bandwidth

Test Mode: 802.11a & Ch.165

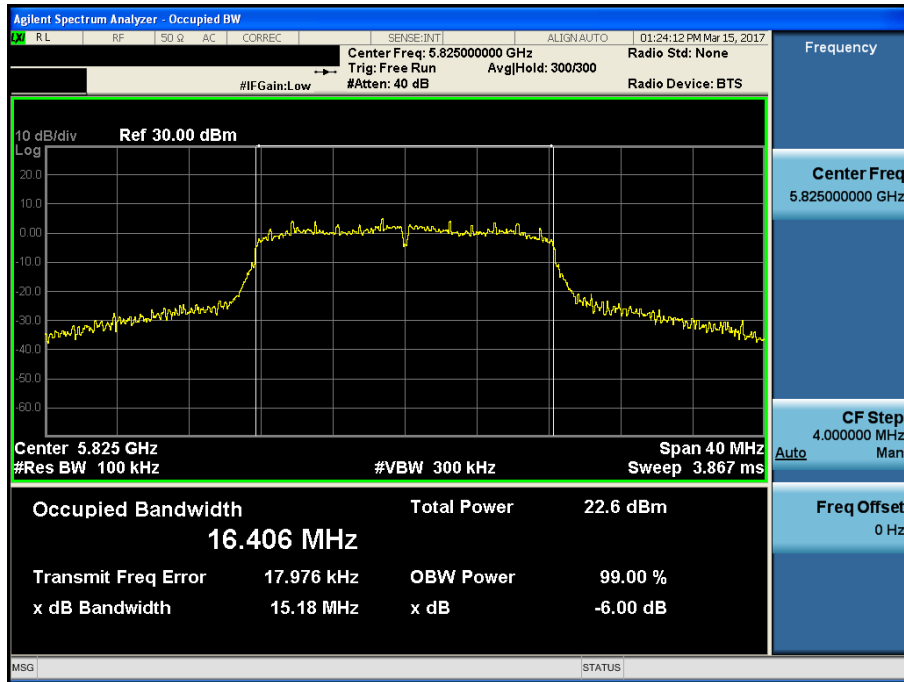


6 dB Bandwidth

Test Mode: 802.11n(HT20) & Ch.149

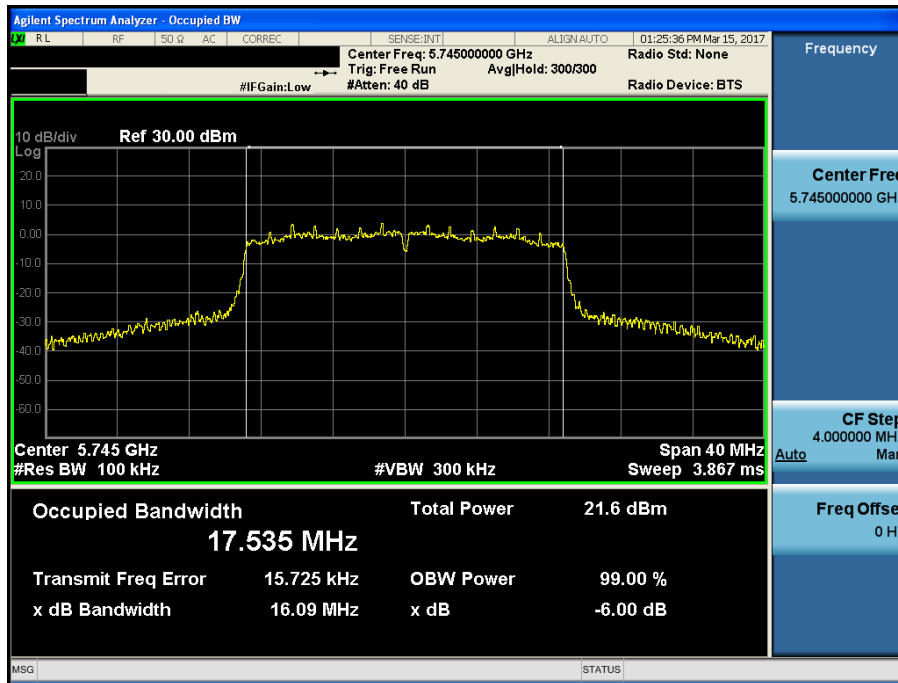


6 dB Bandwidth

Test Mode: 802.11n(HT20) & Ch.157

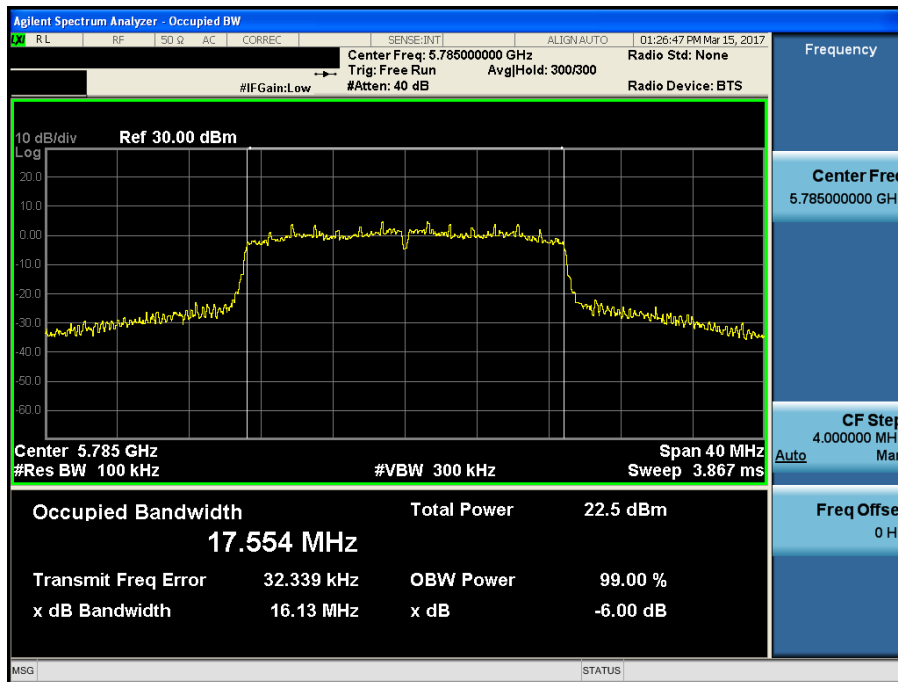

6 dB Bandwidth

Test Mode: 802.11n(HT20) & Ch.165

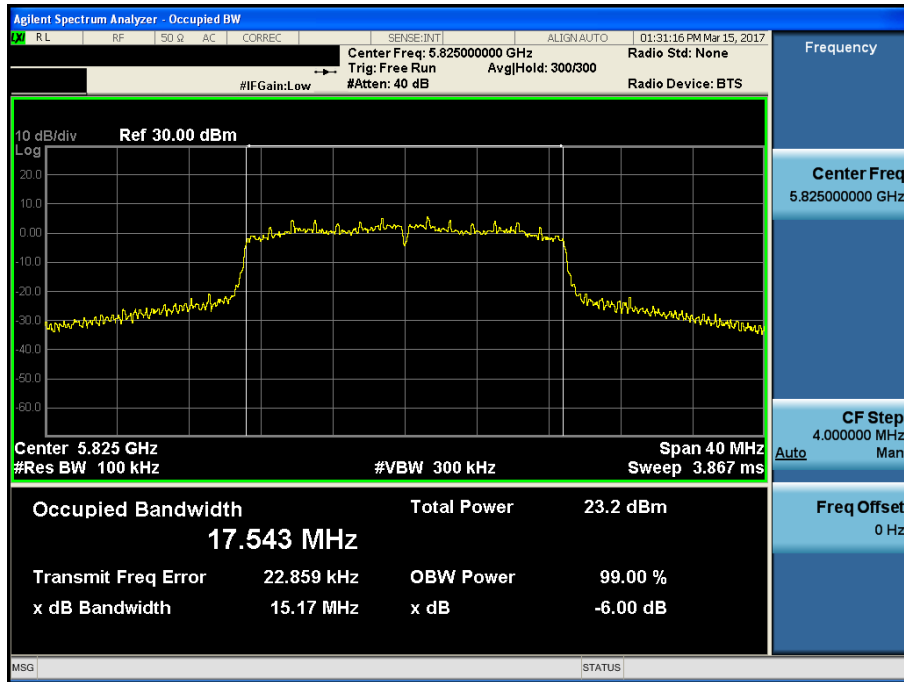

7.3 Maximum Conducted Output Power

■ Test Requirements

Part. 15.407(a)

(1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725 - 5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

- Output power Limit Calculation(FCC)

Band	Mode	Power Limit [mW]	Calculated Limit [dBm]	Antenna Gain [dBi]	Determined Limit [dBm]
U-NII 3	802.11a	1000	30.00	2.900	30.00
	802.11n(HT20)				

■ Test Configuration


Method PM-G

■ Test Procedure
Method PM-G of KDB789033 D02

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

■ Test Results: Comply

Mode	Band	Channel	Frequency [MHz]	Test Result [dBm]
802.11a	U-NII 3	149	5745	15.25
		157	5785	15.66
		165	5825	15.73
802.11n (HT20)	U-NII 3	149	5745	14.41
		157	5785	15.49
		165	5825	15.59

7.4 Maximum Power Spectral Density

■ Test Requirements

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1MHz band. ^{note1}

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1MHz band. ^{note1}

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1MHz band. ^{note1}

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. ^{note1}

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. ^{note1,note2}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

- Peak Power Spectral Density Limit Calculation

Band	Limit [dBm]	Antenna Gain [dBi]	Determined Limit [dBm]
U-NII 3	30	2.900	30

■ Test Configuration

Refer to the APPENDIX I.

■ Test Procedure

Maximum Power Spectral Density is measured using Measurement Procedure of **KDB789033 D02**

- 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- 2) Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- 3) Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) **If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.**
 - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- 4) The result is the Maximum PSD over 1 MHz reference bandwidth.
- 5) For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in §15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a). (Refer to Appendix II)
 - b) Set $VBW \geq 3 RBW$.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 kHz is available on nearly all spectrum analyzers.

■ Test result: **Comply**

Mode	Band	Channel	Frequency [MHz]	Reading [dBm]	T.F ^{Note 1} [dB]	Test Result [dBm]
802.11a	U-NII 3	149	5745	-3.58	7.22	3.64
		157	5785	-3.49		3.73
		165	5825	-3.10		4.12
802.11n (HT20)	U-NII 3	149	5745	-4.56	7.22	2.66
		157	5785	-3.82		3.40
		165	5825	-3.32		3.90

Note 1: "U-NII 1, 2A, 2C [T.F] = 10*LOG(1MHz/100kHz) + DCCF"


"U-NII 3 [T.F] = 10*LOG(500kHz/100kHz) + DCCF"

For DCCF(Duty Cycle Correction Factor) please refer to appendix II.

Note 2: Test Result = Measurement Data + T.F


Maximum Power Spectral Density

Test Mode: 802.11n(HT20) & Ch.149

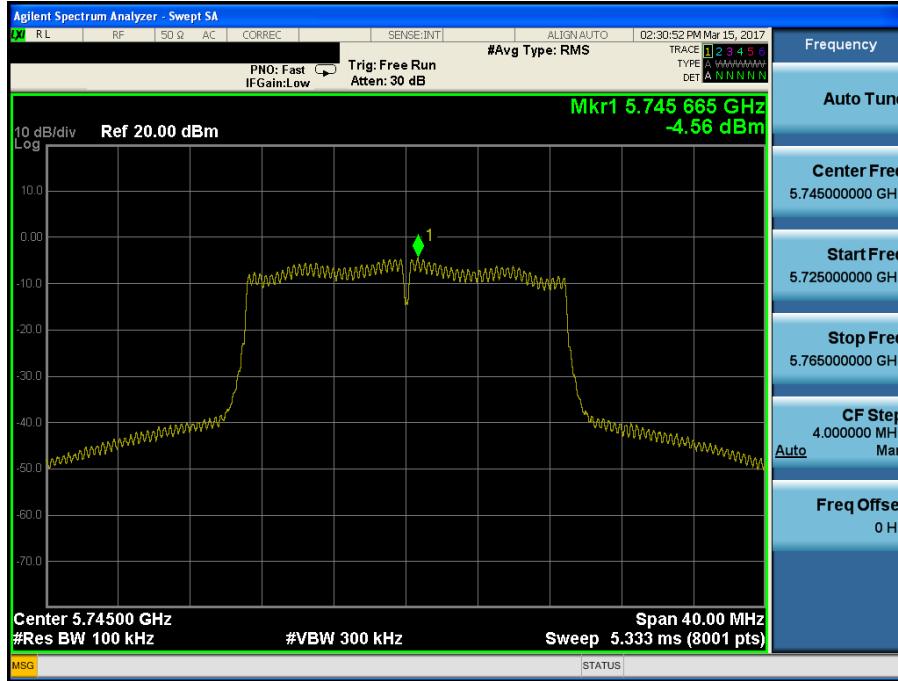


Maximum Power Spectral Density

Test Mode: 802.11n(HT20) & Ch.157

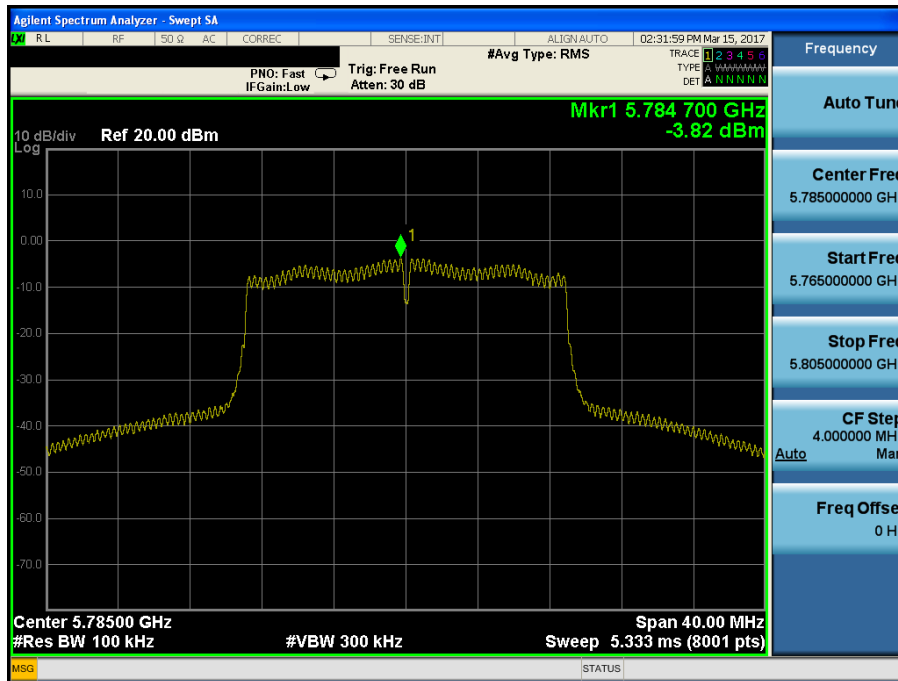

Maximum Power Spectral Density

Test Mode: 802.11n(HT20) & Ch.165

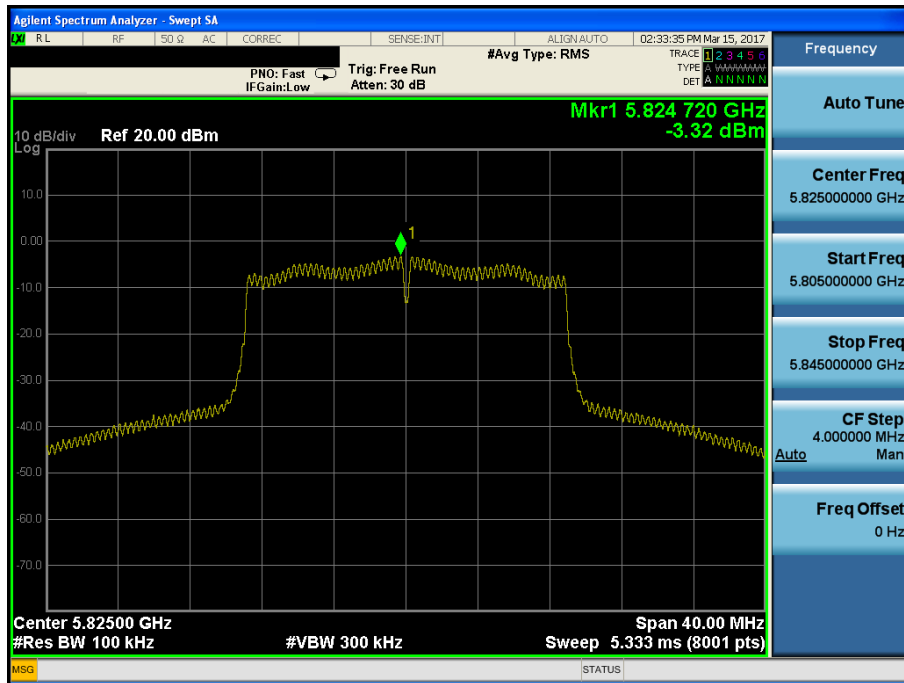

7.5 Frequency Stability

■ Test requirements

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

■ Test Procedure

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -20°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. And the edge point of EBW(26dB or 6dB bandwidth) was reported.

■ Test Result : **Comply**

U-NII 3: (5725 MHz ~ 5850 MHz)

Supply Voltage (V DC)	TEMP (°C)	Operating Frequency	
		5745 MHz	5825 MHz
		6dBc low edge (Hz)	6dBc High edge(Hz)
12.00	+20(Ref)	5,736,300,000	5,833,685,000
	+50	5,736,310,000	5,833,695,000
	+40	5,736,320,000	5,833,655,000
	+30	5,736,310,000	5,833,680,000
	+20	5,736,300,000	5,833,705,000
	+10	5,736,320,000	5,833,650,000
	0	5,736,310,000	5,833,655,000
	-10	5,736,360,000	5,833,700,000
	-20	5,736,415,000	5,833,655,000
10.20	+20	5,736,290,000	5,833,680,000
13.80	+20	5,736,320,000	5,833,615,000

7.6 Radiated Spurious Emission Measurements

■ Test Requirements

• FCC Part 15.209 (a)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• **FCC Part 15.209 (b):** In the emission table above the tighter limit applies at the band edge.

• **FCC Part 15.205 (a):** Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	160.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	160.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	160.7 ~ 160.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240	3600 ~ 4000		
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

• **FCC Part 15.205 (b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

• **FCC Part 15.407 (b):** Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the **5.15-5.25 GHz band**: all emissions outside of the **5.15-5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (2) For transmitters operating in the **5.25-5.35 GHz band**: all emissions outside of the **5.15-5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (3) For transmitters operating in the **5.47-5.725 GHz band**: all emissions outside of the **5.47-5.725 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (4) For transmitters operating in the **5.725-5.85 GHz band**: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions **below 1 GHz** must comply with the general field strength limits set forth in **Section 15.209**. Further, any U-NII devices using an **AC power line** are required to comply also with the conducted limits set forth in **Section 15.207**.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

■ Test Configuration

Refer to the APPENDIX I.

■ Test Procedure

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turn table shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 1 or 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Radiated spurious emission measured using following Measurement Procedure of **KDB789033 D02**

► General Requirements for Unwanted Emissions Measurements

The following requirements apply to all unwanted emissions measurements, both in and outside of the restricted bands:

■ EUT Duty Cycle

- (1) The EUT shall be configured or modified to **transmit continuously** except as stated in (ii), below. The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (**to no lower than 98 percent**) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.
- (2) If **continuous transmission (or at least 98 percent duty cycle) cannot be achieved** due to hardware limitations of the EUT (e.g., overheating), the following additions to the measurement and reporting procedures are required:
 - The EUT shall be configured to operate at the maximum achievable duty cycle.
 - Measure the duty cycle, x, of the transmitter output signal.
 - Adjustments to measurement procedures (e.g., increasing test time and number of traces averaged) shall be performed as described in the procedures below.
 - The test report shall include the following additional information:
 - The reason for the duty cycle limitation.
 - The duty cycle achieved for testing and the associated transmit duration and interval between transmissions.
 - The sweep time and the amount of time used for trace stabilization during max-hold measurements for peak emission measurements.
- (3) **Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.**

► Measurements below 1000 MHz

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Compliance shall be demonstrated using **CISPR quasi-peak detection**; however, **peak detection** is permitted as an alternative to quasi-peak detection.

► **Measurements Above 1000 MHz (Peak)**

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Maximum emission levels are measured by setting the analyzer as follows:
 - (i) **RBW = 1 MHz.**
 - (ii) **VBW ≥ 3 MHz.**
 - (iii) **Detector = Peak.**
 - (iv) Sweep time = auto.
 - (v) Trace mode = max hold.
 - (vi) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

► **Measurements Above 1000 MHz(Method AD)**

- (i) **RBW = 1 MHz.**
- (ii) **VBW ≥ 3 MHz.**
- (iii) **Detector = RMS**, if $\text{span}/(\# \text{ of points in sweep}) \leq \text{RBW}/2$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
- (iv) Averaging type = power (i.e., RMS)
 - As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- (v) Sweep time = auto.
- (vi) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of $1/x$, where x is the duty cycle. For example, with 50 percent duty cycle, at least 200 traces shall be averaged.
- (vii) If tests are performed with the EUT transmitting at a duty cycle less than 98 percent, a correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - **If power averaging (RMS) mode was used in step (iv) above, the correction factor is $10 \log(1/x)$, where x is the duty cycle.** For example, if the transmit duty cycle was 50 percent, then 3 dB must be added to the measured emission levels.
 - If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log(1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50 percent, then 6 dB must be added to the measured emission levels.
 - If a specific emission is demonstrated to be continuous (100 percent duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

Please refer to Appendix II for the duty cycle correction factor

Measurement Data:
Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : 802.11a

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 3	149 (5745 MHz)	1064.74	H	X	PK	60.43	-6.96	N/A	N/A	53.47	74.00	20.53
		1063.00	H	X	AV	49.38	-6.96	N/A	N/A	42.42	54.00	11.58
		5714.40	H	X	PK	52.71	8.98	N/A	N/A	61.69	68.23	6.54
		5724.57	H	X	PK	63.49	8.98	N/A	N/A	72.47	78.23	5.76
		11493.18	H	X	PK	42.22	15.44	N/A	-9.54	48.12	74.00	25.88
		11492.88	H	X	AV	31.20	15.44	0.23	-9.54	37.33	54.00	16.67
	157 (5785 MHz)	1029.94	H	X	PK	60.46	-7.10	N/A	N/A	53.36	74.00	20.64
		1031.36	H	X	AV	48.45	-7.10	N/A	N/A	41.35	54.00	12.65
		11564.72	H	X	PK	40.45	15.58	N/A	-9.54	46.49	74.00	27.51
		11565.70	H	X	AV	29.55	15.58	0.23	-9.54	35.82	54.00	18.18
	165 (5825 MHz)	1066.20	H	X	PK	60.15	-6.94	N/A	N/A	53.21	74.00	20.79
		1067.72	H	X	AV	48.13	-6.94	N/A	N/A	41.19	54.00	12.81
		5850.42	H	X	PK	54.52	9.42	N/A	N/A	63.94	78.23	14.29
		5860.47	H	X	PK	50.49	9.49	N/A	N/A	59.98	68.23	8.25
		11655.66	H	X	PK	40.65	15.76	N/A	-9.54	46.87	74.00	27.13
		11655.60	H	X	AV	29.70	15.76	0.23	-9.54	36.15	54.00	17.85

Note.

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 Therefore Distance Correction Factor(DCF) : $-9.54 \text{ dB} = 20 \cdot \log(1\text{m}/3\text{m})$
- The limit is converted to field strength.
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$
- The measured data for U-NII 3 band is satisfied with the emissions mask in 15.407(b)(4)(i), too.
 The old rule 15.407(b)(4) is more tight than the new rule 15.407(b)(4)(i).

Measurement Data:
Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : 802.11n(HT20)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 3	149 (5745 MHz)	1052.46	H	X	PK	58.76	-7.01	N/A	N/A	51.75	74.00	22.25
		1052.68	H	X	AV	47.42	-7.01	N/A	N/A	40.41	54.00	13.59
		5714.44	H	X	PK	51.77	8.98	N/A	N/A	60.75	68.23	7.48
		5724.17	H	X	PK	65.51	8.98	N/A	N/A	74.49	78.23	3.74
		11494.50	V	Y	PK	40.24	15.44	N/A	-9.54	46.14	74.00	27.86
		11494.22	V	Y	AV	29.60	15.44	0.23	-9.54	35.73	54.00	18.27
	157 (5785 MHz)	1071.63	H	X	PK	58.94	-6.98	N/A	N/A	51.96	74.00	22.04
		1072.81	H	X	AV	46.90	-6.97	N/A	N/A	39.93	54.00	14.07
		11574.50	V	Y	PK	41.22	15.60	N/A	-9.54	47.28	74.00	26.72
		11573.88	V	Y	AV	29.78	15.60	0.23	-9.54	36.07	54.00	17.93
	165 (5825 MHz)	1070.98	H	X	PK	59.19	-6.93	N/A	N/A	52.26	74.00	21.74
		1070.92	H	X	AV	47.56	-6.93	N/A	N/A	40.63	54.00	13.37
		5850.12	H	X	PK	56.52	9.43	N/A	N/A	65.95	78.23	12.28
		5860.99	H	X	PK	50.78	9.47	N/A	N/A	60.25	68.23	7.98
		11645.72	V	Y	PK	40.56	15.74	N/A	-9.54	46.76	74.00	27.24
		11646.10	V	Y	AV	29.72	15.74	0.23	-9.54	36.15	54.00	17.85

Note.

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.
 $\text{Margin} = \text{Limit} - \text{Result}$ / $\text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF}$ / $\text{T.F} = \text{AF} + \text{CL} - \text{AG}$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 Therefore Distance Correction Factor(DCF) : - 9.54 dB = $20 \cdot \log(1\text{m}/3\text{m})$
- The limit is converted to field strength.
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$
- The measured data for U-NII 3 band is satisfied with the emissions mask in 15.407(b)(4)(i), too.
 The old rule 15.407(b)(4) is more tight than the new rule 15.407(b)(4)(i).

7.7 AC Conducted Emission

■ Test Requirements

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

■ Test Configuration

NA

■ Test Procedure

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m \times 3.5 m \times 3.5 m (L \times W \times H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) \times 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

■ Measurement Data:

NA

7.8 Occupied Bandwidth

■ Test Requirements

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

■ Test Configuration

Refer to the APPENDIX I.

■ Test Procedure

RSS-Gen Issue 4

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

■ Test Result

NA


8. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	17/01/11	18/01/11	MY50200828
Spectrum Analyzer	Agilent Technologies	N9020A	16/10/11	17/10/11	MY46471251
DC Power Supply	Agilent Technologies	66332A	16/09/08	17/09/08	GB42110550
Thermohyrometer	HCT	HCT-1	16/09/09	17/09/09	NONE
Signal Generator	Rohde Schwarz	SMF100A	16/06/23	17/06/23	102341
Signal Generator	Rohde Schwarz	SMBV100A	17/01/04	18/01/04	255571
Multimeter	FLUKE	17B	16/04/21	17/04/21	26030065WS
Loop Antenna	Schwarzbeck	FMZB1513	16/04/22	18/04/22	1513-128
Bilog Antenna	Schwarzbeck	VULB 9160	16/05/13	18/05/13	3358
Horn Antenna	ETS-LINDGREN	3117	16/05/03	18/05/03	00140394
Horn Antenna	A.H.Systems Inc.	SAS-574	15/04/30	17/04/30	154
Highpass Filter	Wainwright Instruments	WHKX12- 2580-3000- 18000-80SS	16/09/09	17/09/09	3
Highpass Filter	Wainwright Instruments	WHNX6-6320- 8000-26500- 40CC	16/09/13	17/09/13	1
PreAmplifier	Agilent	8449B	17/01/11	18/01/11	3008A00370
PreAmplifier	TSJ	MLA-010K01- B01-27	17/03/06	18/03/06	1844539
PreAmplifier	A.H.Systems Inc.	PAM-1840VH	16/12/04	17/12/04	163
Spectrum Analyzer	Agilent Technologies	N9030A	16/10/18	17/10/18	MY53310140
EMI Test Receiver	Rohde Schwarz	ESR7	17/02/16	18/02/16	101061
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2495A MA2490A	16/10/19	17/10/19	1338003 1249304
DC Power Supply	SM techno	SDP30-5D	16/09/08	17/09/08	305DMG304
Attenuator	SMAJK	SMAJK-50-30	16/09/08	17/09/08	15081906


APPENDIX I

Test set up diagrams

- Radiated Measurement

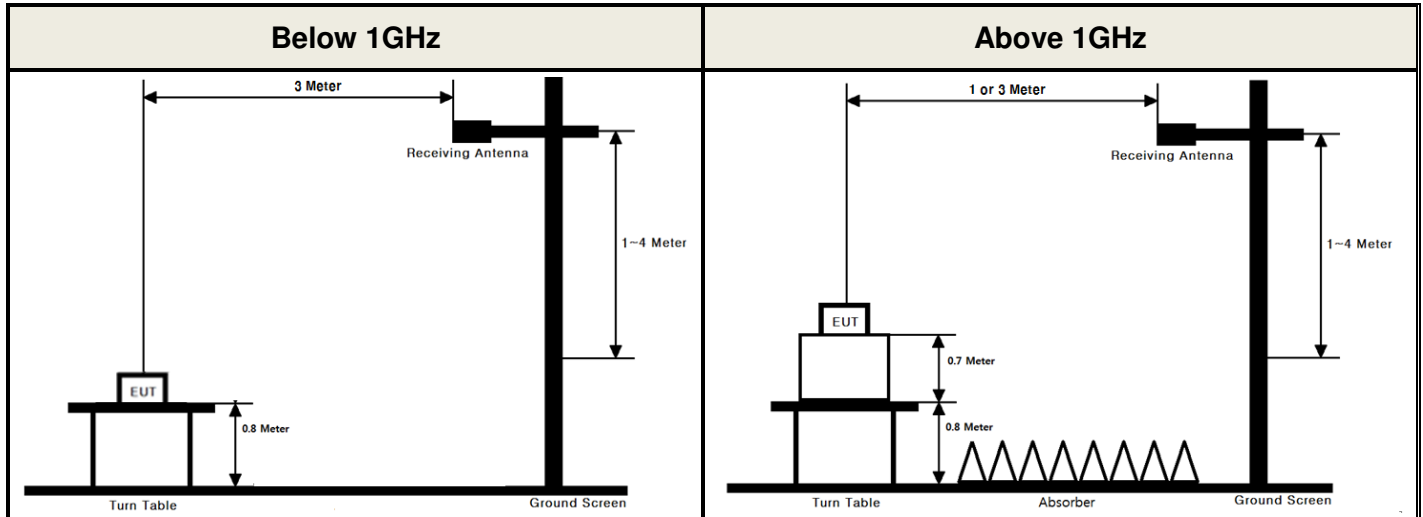

- Conducted Measurement

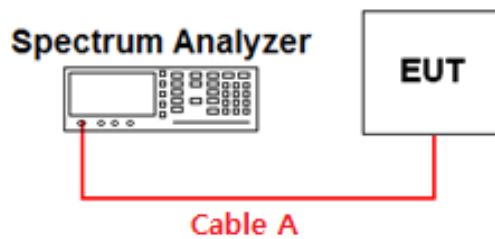

APPENDIX II

Duty Cycle Information

■ Test Procedure

Duty Cycle [X = On Time / (On + Off time)] is measured using Measurement Procedure of **KDB789033 D02 V01**

1. Set the center frequency of the spectrum analyzer to the center frequency of the transmission.
2. Set RBW \geq EBW if possible; otherwise, set RBW to the largest available value.
3. Set VBW \geq RBW. Set detector = peak.
4. Note : The zero-span measurement method shall not be used unless both **RBW and VBW are $> 50/T$** , where T is defined in section II.B.1.a), and **the number of sweep points across duration T exceeds 100**. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

T : The minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


($T =$ **On time** of the above table since the EUT operates with above fixed Duty Cycle and it is the minimum On time)

■ Test Results:

Mode	Channel	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]	1/T [Hz]
			On Time [ms]	On+OffTime [ms]	x		
802.11a	157	5785	2.062	2.165	0.95	0.23	484.97
802.11n (HT20)	157	5785	1.919	2.020	0.95	0.23	521.11


Duty Cycle

Test Mode: 802.11a & Ch.157

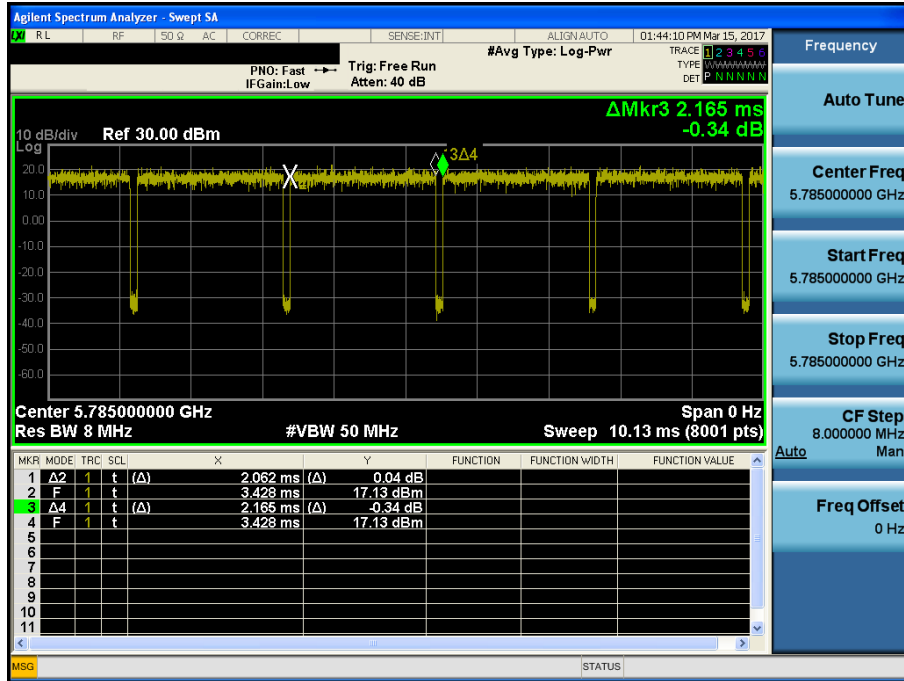

Duty Cycle

Test Mode: 802.11n(HT20) & Ch.157

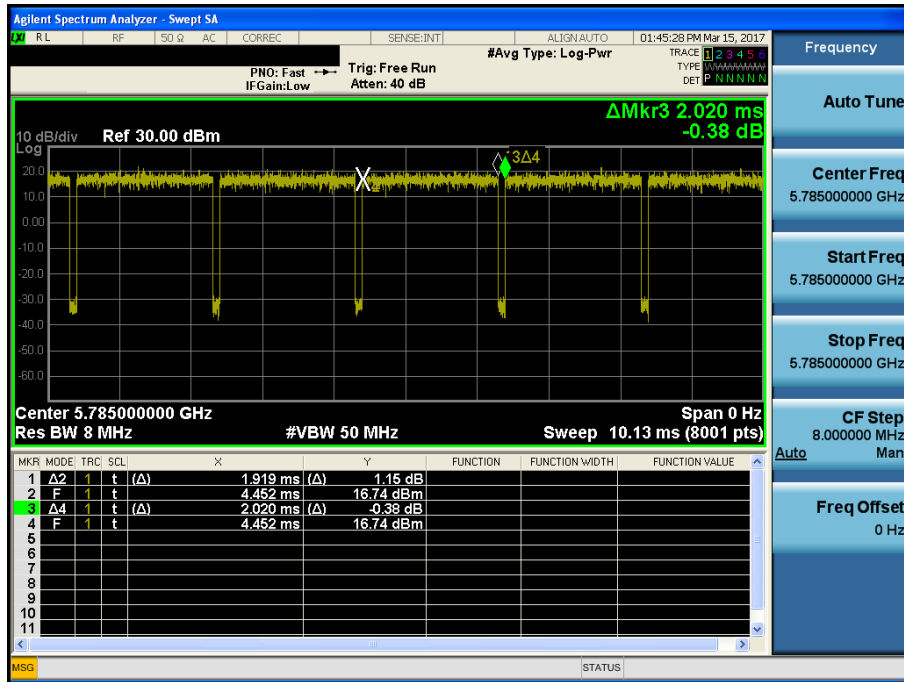


APPENDIX III

Unwanted Emissions (Radiated) Test Plot


802.11a & U-NII 3 & Ch.149 & X axis & Hor

Detector Mode : PK

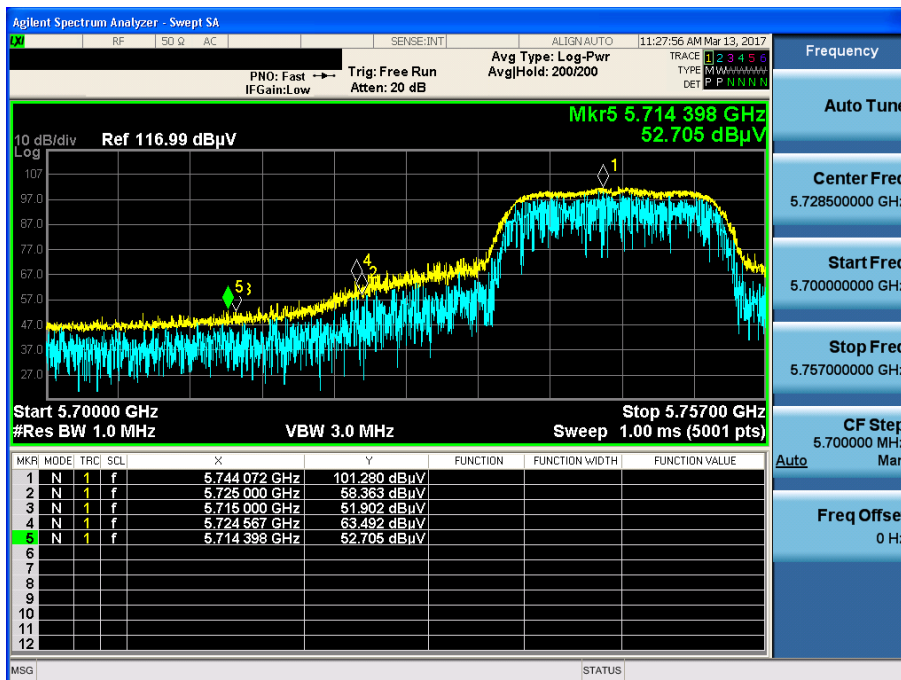

802.11a & U-NII 3 & Ch.165 & X axis & Hor

Detector Mode : PK

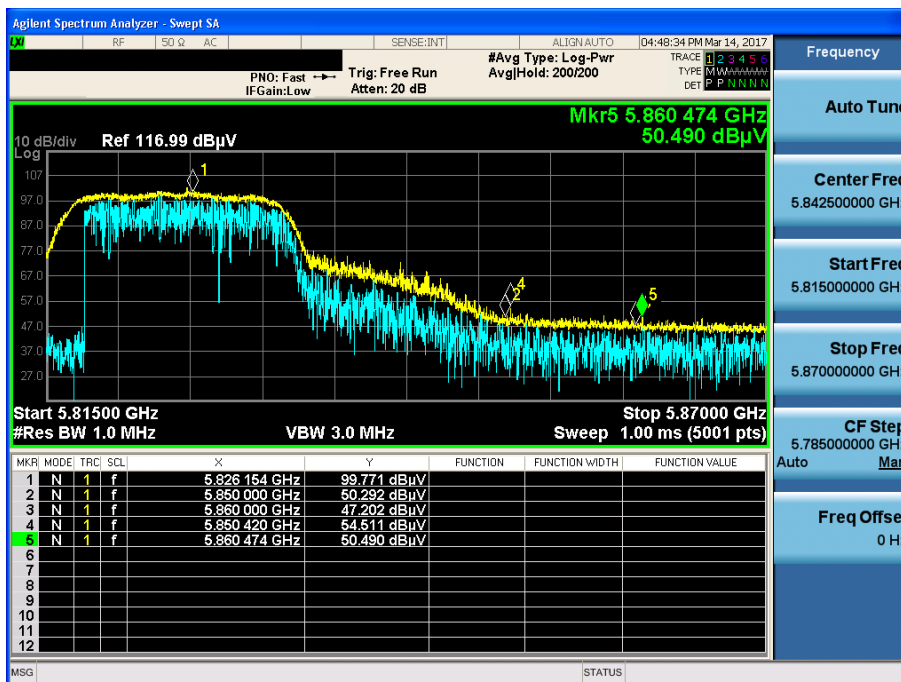


802.11a & U-NII 3 & Ch.149 & X axis & Hor

Detector Mode : AV




802.11n(HT20) & U-NII 3 & Ch.149 & X axis & Hor

Detector Mode : PK

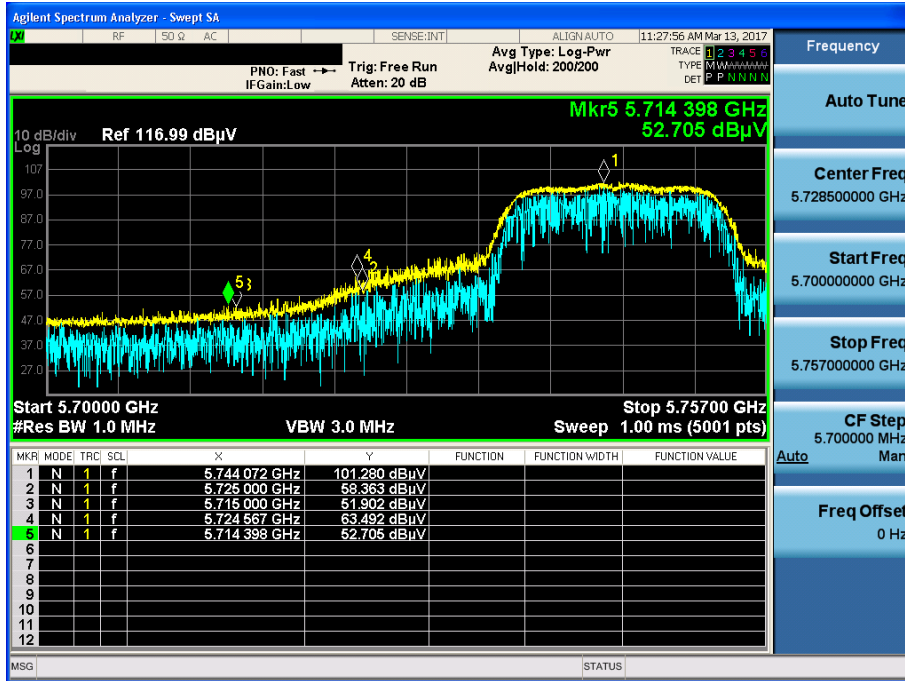

802.11n(HT20) & U-NII 3 & Ch.165 & X axis & Hor

Detector Mode : PK

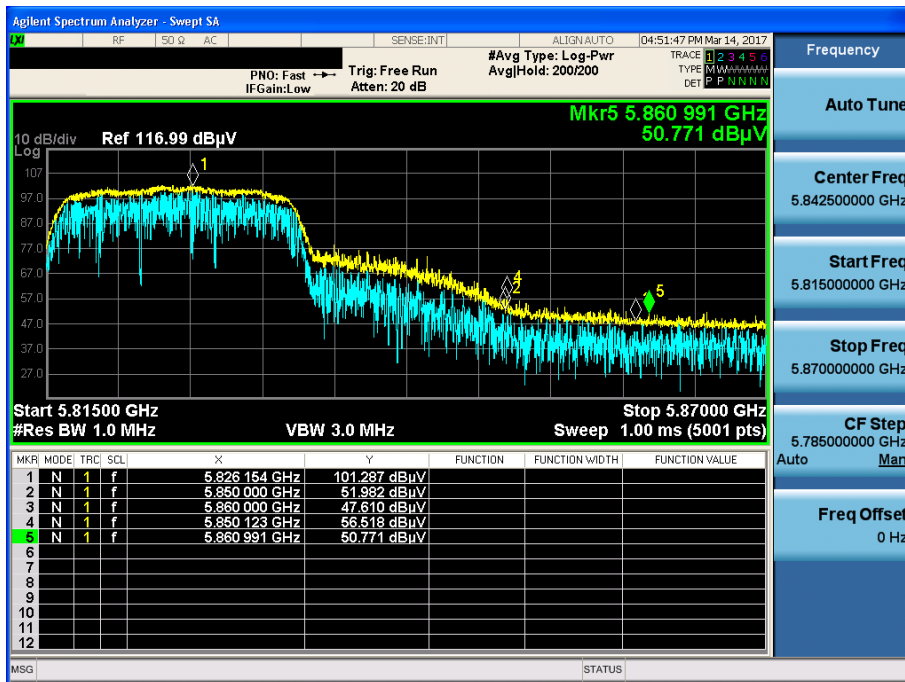

802.11n(HT20) & U-NII 3 & Ch.165 & X axis & Hor

Detector Mode : AV

