

**HCT CO., LTD.**



PRODUCT COMPLIANCE DIVISION  
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA  
TEL : +82 31 639 8539 FAX : +82 31 639 8525 [www.hct.co.kr](http://www.hct.co.kr)

## EMI CERTIFICATION REPORT

**Applicant:**

**LG Electronics Inc.**

**60-39, Gasan-dong, Gumchon-gu, Seoul  
153-023, Korea**

**Date of Issue: September 14, 2010**

**Test Report No.: HCTE1009FE15**

**Test Site: HCT CO., LTD.**

**HCT FRN: 0005-8664-21**

**FCC ID:**

**BEJLG500G**

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B

Equipment Type : Cellular/PCS GSM Phone with Bluetooth

Model(s) Name : LG500G, LG500g

Port / Connector(s) : USB Data Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.

**Report prepared by  
: Dong Sup Kim  
Test Engineer of EMC Tech. Part**

**Approved by  
: Nam Wook Kang  
Manager of EMC Tech. Part**

---

## TABLE OF CONTENTS

---

	<b>PAGE</b>
<b>1. GENERAL INFORMATION</b>	
1.1 Product description	<u>3</u>
1.2 Related submittal(s)/Grant(s)	<u>3</u>
1.3 Tested system details	<u>4</u>
1.4 Cable description	<u>5</u>
1.5 Noise suppression parts on cable. (I/O cable)	<u>5</u>
1.6 Test methodology	<u>6</u>
1.7 Test facility	<u>6</u>
1.8 Frequency Range of Radiated Measurements	<u>6</u>
<b>2. SYSTEM TEST CONFIGURATION</b>	
2.1 Configuration of tested system	<u>7</u>
<b>3. PRELIMINARY TEST</b>	
3.1 Conducted Emission test	<u>8</u>
3.2 Radiated Emission test	<u>8</u>
<b>4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY</b>	
4.1 Conducted Emission test	<u>9</u>
4.2 Radiated Emission test	<u>14</u>
<b>5. FIELD STRENGTH CALCULATION</b>	<u>15</u>
<b>6. TEST EQUIPMENT</b>	<u>16</u>
<b>7. CONCLUSION</b>	<u>17</u>

**ATTACHMENT: TEST SETUP PHOTOGRAPHS**

## 1. GENERAL INFORMATION

---

### 1.1 Product Description

Equipment Under Test (E.U.T) is **Cellular/PCS GSM Phone with Bluetooth, Model: LG500G, LG500g** manufactured by **LG Electronics Inc.** Its basic purpose is used for communications.

<b>Model (s)</b>	LG500G, LG500g
<b>FCC ID</b>	BEJLG500G
<b>E.U.T Type</b>	Cellular/PCS GSM Phone with Bluetooth
<b>TX Frequency</b>	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900)
<b>RX Frequency</b>	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900)

### 1.2 Related Submittal(s) / Grant(s)

Original submittal only.

### 1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number/ Part Number	FCC ID / DoC	Connected To
Cellular/PCS GSM Phone with Bluetooth	LG	LG500G	BEJLG500G	Notebook PC
Notebook PC	SAMSUNG	NT-R519	DoC	E.U.T
Notebook PC adaptor	DELTA	ADP-60ZH D AD-6019R	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
USB Cable	-	-	-	Notebook PC E.U.T
Headset	-	-	-	E.U.T

## 1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
Cellular/PCS GSM Phone with Bluetooth	Headset jack	-	N	(D)1.0
	USB data	Y	Y	(P,D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

\* The marked "(D)" means the data cable and "(P)" means the power cable.

## 1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS GSM Phone with Bluetooth	Headset jack	N	-	Y	E.U.T End
	USB data	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

## 1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

## 1.7 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Ichon-si, Kyoungki-do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009. (Registration Number: 90661)

## 1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower


## 2. SYSTEM TEST CONFIGURATION

### 2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN via Notebook PC adaptor.  
Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of Tested System]

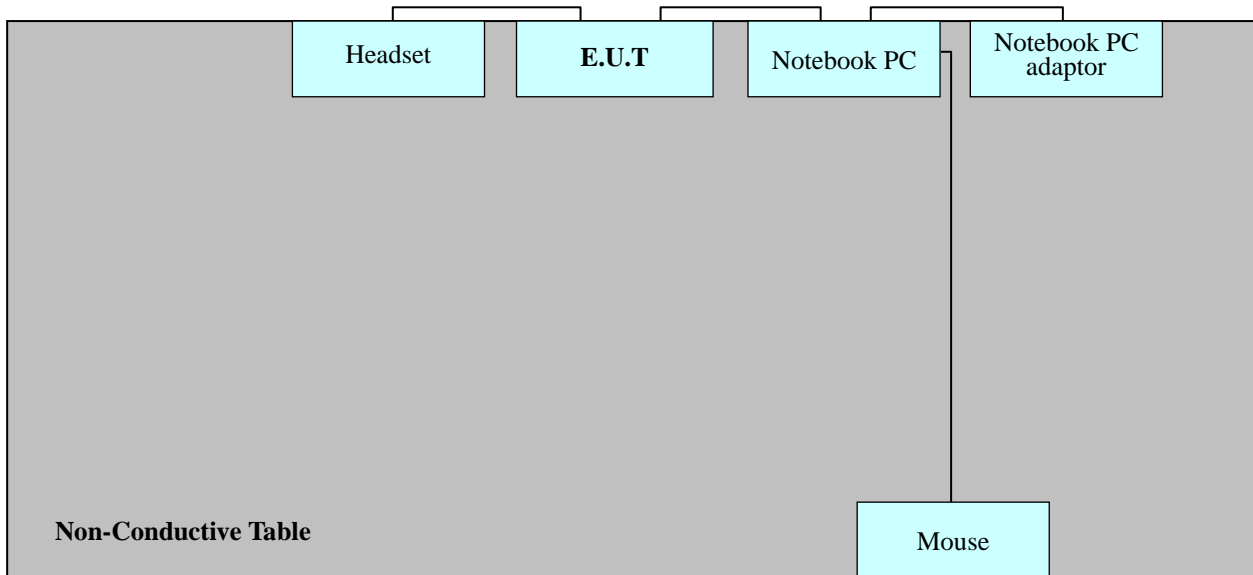

Power Line: 110 VAC

### **3. PRELIMINARY TEST**

---

#### **3.1 Conducted Emission Test**

- Test E.U.T with Data Communication mode, after connecting all peripheral devices.

During preliminary tests, the following operating mode was investigated:

<b>Operation Mode</b>	<b>The Worst Operating Condition</b>
Data Communication	<input type="radio"/>

#### **3. 2 Radiated Emission Test**

- Test E.U.T with Data Communication mode, after connecting all peripheral devices.

During preliminary tests, the following operating mode was investigated:

<b>Operation Mode</b>	<b>The Worst Operating Condition</b>
Data Communication	<input type="radio"/>

## 4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 13.2 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 25.7 °C
Humidity level	: 47.1 %
Test date	: September 09, 2010

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB $\mu$ V)	Conductor	Detector	Limit (dB $\mu$ V)	Margin (dB)
0.1900	50.9	NEUTRAL	Quasi-Peak	64.0	13.2
0.2060	37.1	NEUTRAL	Average	53.0	16.3
3.9720	26.8	HOT	Average	46.0	19.2
4.0600	38.3	HOT	Quasi-Peak	56.0	17.7

※ **NOTE:** Refer to page 10 to page 13 for details.


**HCT**

**EMC**

EUT: LG500G  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: DS-KIM  
 Test Specification: CISPR22 CLASS B  
 Comment: H

**SCAN TABLE: "CISPR22 CLASS B"**

Short Description:						
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

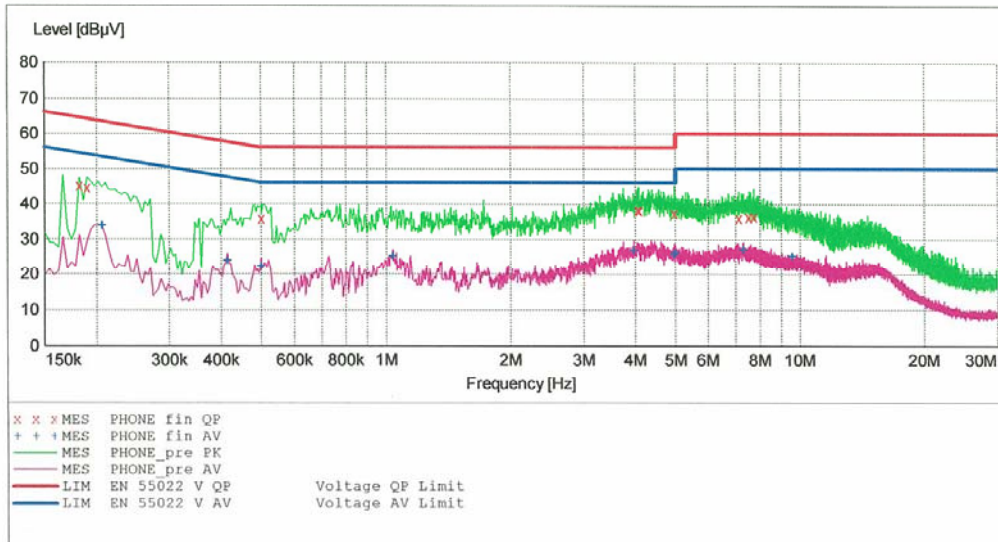

**MEASUREMENT RESULT: "PHONE\_fin\_QP"**

9/9/2010 10:15AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.182000	45.10	10.1	64	19.3	---	---
0.190000	44.50	10.1	64	19.6	---	---
0.500000	35.80	10.1	56	20.2	---	---
4.060000	38.30	10.4	56	17.7	---	---
4.084000	38.10	10.4	56	17.9	---	---
4.984000	37.20	10.5	56	18.8	---	---
7.132000	36.00	10.6	60	24.0	---	---
7.540000	36.20	10.6	60	23.8	---	---
7.736000	36.40	10.6	60	23.6	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

9/9/2010 10:15AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.206000	33.80	10.1	53	19.5	---	---
0.414000	23.90	10.1	48	23.6	---	---
0.500000	22.20	10.1	46	23.8	---	---
1.040000	25.10	10.2	46	20.9	---	---
3.972000	26.80	10.4	46	19.2	---	---
4.984000	25.60	10.5	46	20.4	---	---
5.000000	26.20	10.5	46	19.8	---	---
7.316000	27.00	10.6	50	23.0	---	---
9.584000	25.20	10.7	50	24.8	---	---


**HCT**

**EMC**

EUT: LG500G  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: DS-KIM  
 Test Specification: CISPR22 CLASS B  
 Comment: N

**SCAN TABLE: "CISPR22 CLASS B"**

Short Description:		Step	Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Width				
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

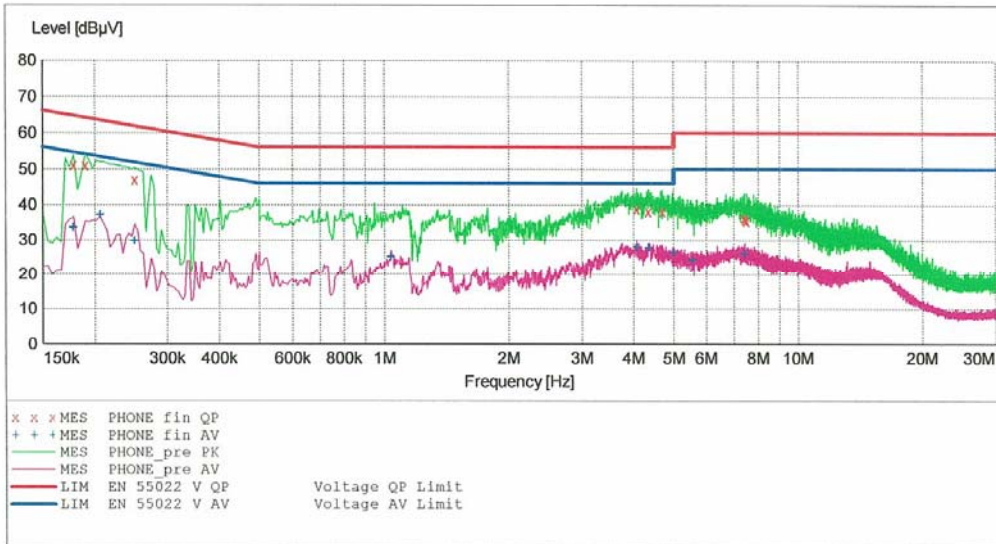

**MEASUREMENT RESULT: "PHONE\_fin QP"**

9/9/2010 10:11AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.178000	51.10	10.1	65	13.5	---	---
0.190000	50.90	10.1	64	13.2	---	---
0.250000	46.90	10.1	62	14.9	---	---
4.076000	38.90	10.4	56	17.1	---	---
4.348000	38.20	10.4	56	17.8	---	---
4.704000	38.10	10.4	56	17.9	---	---
7.408000	36.40	10.6	60	23.6	---	---
7.432000	35.80	10.6	60	24.2	---	---
7.516000	35.60	10.6	60	24.4	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

9/9/2010 10:11AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.178000	33.50	10.1	55	21.0	---	---
0.206000	37.10	10.1	53	16.3	---	---
0.250000	29.70	10.1	52	22.1	---	---
1.040000	25.20	10.2	46	20.8	---	---
4.076000	28.00	10.4	46	18.0	---	---
4.360000	27.90	10.4	46	18.1	---	---
5.000000	26.30	10.5	46	19.7	---	---
5.568000	24.30	10.5	50	25.7	---	---
7.424000	26.20	10.6	50	23.8	---	---

## 4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to : FCC PART 15 Subpart B  
 Result : Passed by 6.5 dB  
 Operating condition : Data Communication mode  
 Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)  
 Temperature : 24.5 °C  
 Humidity level : 55.7 %  
 Test date : September 13, 2010

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB/m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
42.3	20.5	12.3	0.7	V	33.5	40.0	6.5
64.0	20.9	11.3	0.8	V	33.0	40.0	7.0
216.5	22.0	10.4	1.6	H	34.0	46.0	12.0
288.8	19.0	12.7	1.8	H	33.5	46.0	12.5
431.9	15.7	16.1	2.2	H	34.0	46.0	12.0
436.1	13.5	16.3	2.2	V	32.0	46.0	14.0

## 5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB $\mu$ V/m value is mathematically converted to its corresponding level in  $\mu$ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

### [Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	$\mu$ V/m	dB $\mu$ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

## 6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Serial Number</u>	<u>Next CAL Date</u>
<b><u>Conducted Emission</u></b>				
EMI Test Receiver	Rohde & Schwarz	ESCI	100033	2011.02.19
EMI Test Receiver	Rohde & Schwarz	ESU26	100214	2011.04.29
LISN	Rohde & Schwarz	ESH3-Z5	100282	2011.02.05
LISN	Rohde & Schwarz	ENV216	3560.6550.02	2011.04.06
Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.52	2010.10.30
<b><u>Radiated Emission</u></b>				
EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	2010.10.30
EMI Test Receiver	Rohde & Schwarz	ESU26	100214	2011.04.29
Trilog Antenna	Schwarzbeck	VULB9160	9160-3150	2010.12.18
Antenna Master	HD	MA240	240/520/00	-
Turn Table	EMCO	1060	-	-
Communication Antenna	Schwarzbeck	USLP 9142	9142-248	-
Base Station	Rohde & Schwarz	CMU 200	1100000802	2011.02.17
Horn Antenna	Schwarzbeck	BBHA 9120D	-	2012.04.13
RF-Amplifier	MITEQ	AMF-6D-00101800 -35.20P.PS	-	2011.05.20
Bluetooth Base Station	TESCOM	TC-3000A	-	2011.01.07

## **7. CONCLUSION**

---

The data collected shows that the **LG Electronics Inc, Cellular/PCS GSM Phone with Bluetooth, Model: LG500G, LG500g, FCC ID: BEJLG500G** complies with §15.107 and §15.109 of the FCC rules.