


PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road · Columbia, MD 21045 · U.S.A.

TEL (410) 290-6652 · FAX (410) 290-6654

<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE

LG Electronics Inc. – DID DIVISION
642, Jinpyung-dong, Kumi-city,
Kyongsangbuk-do, 730-360 KOREA
Attn: Mr. Yeong Hur, EMC Engineer

Dates of Tests: July 9-10, 2001
Test Report S/N: B.210706381.BEJ
Test Site: PCTEST Lab., MD U.S.A.

FCC ID

BEJLG56AH

APPLICANT

LG ELECTRONICS INC.

Rule Part(s):	FCC Part 15 Subpart B
Equipment Class:	Class B Peripheral Device (JBP)
Standard(s):	EN55022: 1998 (CISPR 22)
EUT Type:	15-inch LCD Monitor
Max. Resolution(s):	1024 x 768 Non-interlaced @ 75Hz
Trade Name(s):	<i>GATEWAY</i>
Model(s):	<i>FPD1510</i>

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992. (Note Codes: 19)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Alfred Cirwithian
Vice President Engineering




NVLAQ[®]
Lab Code 100431-0

TABLE OF CONTENTS

ATTACHMENT A: COVER LETTER(S)	
ATTACHMENT B: ATTESTATION STATEMENT(S)	
ATTACHMENT C: TEST REPORT	
1.1 SCOPE	1
2.1 INTRODUCTION (SITE DESCRIPTION)	2
3.1 PRODUCTION INFORMATION	3
4.1 DESCRIPTION OF TESTS (CONDUCTED)	4
4.3 DESCRIPTION OF TESTS (RADIATED)	5
5.1 LIST OF SUPPORT EQUIPMENT	6
6.1 TEST DATA (CONDUCTED)	7
7.1 TEST DATA (RADIATED)	8
8.1 SAMPLE CALCULATIONS	9
9.1 ACCURACY OF MEASUREMENT	10
10.1 LIST OF TEST EQUIPMENT	11
11.1 TEST SOFTWARE USED	12
12.1 CONCLUSION	13
ATTACHMENT D: TEST PLOTS	
ATTACHMENT E: FCC ID LABEL & LOCATION	
ATTACHMENT F: BLOCK DIAGRAM(S)	
ATTACHMENT G: SCHEMATIC DIAGRAM(S)	
ATTACHMENT H: TEST SETUP PHOTOGRAPHS	
ATTACHMENT I: EXTERNAL PHOTOGRAPHS	
ATTACHMENT J: INTERNAL PHOTOGRAPHS	
ATTACHMENT K: USER'S MANUAL	

MEASUREMENT REPORT



1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

Applicant Name:	LG ELECTRONICS INC.
Address:	642, Jinpyung-dong, Kumi-city, Kyoungsangbuk-do, 730-360 KOREA
Contact Person:	Yeong Hur, EMC Engineer Product Engineering Dept., Safety & EMC Team

- FCC ID: BEJLG56AH
- Equipment Class: B Digital Device / Peripheral (JBP)
- EUT Type: 15-inch LCD Monitor
- Trade Name(s): **GATEWAY**
- Model(s): *FPD1510*
- Max. Resolution: 1024 x 768 Non-interlaced @ 60kHz/75Hz
- Cable(s): Shielded D-Sub Video Cable (with ferrite on both ends)
- Power Cord: Unshielded
- Horizontal Frequency: 48.36kHz-60.2kHz
- Vertical Frequency: 60Hz-75Hz
- Power: DC 12V 3A
- Rule Part(s): FCC Part 15 Subpart B
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Tests: July 9-10, 2001
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: B.210706381.BEJ



2.1 INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. 15-inch LCD Monitor FCC ID: BEJLG56AH**.

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

2.2 PCTEST Location

The map at right shows the location of the PCTEST Lab, its proximity to the FCC Lab, the Columbia vicinity area, the Baltimore-Washington International (BWI) airport, and the city of Baltimore, and the Washington, D.C. area. (see Figure 1).

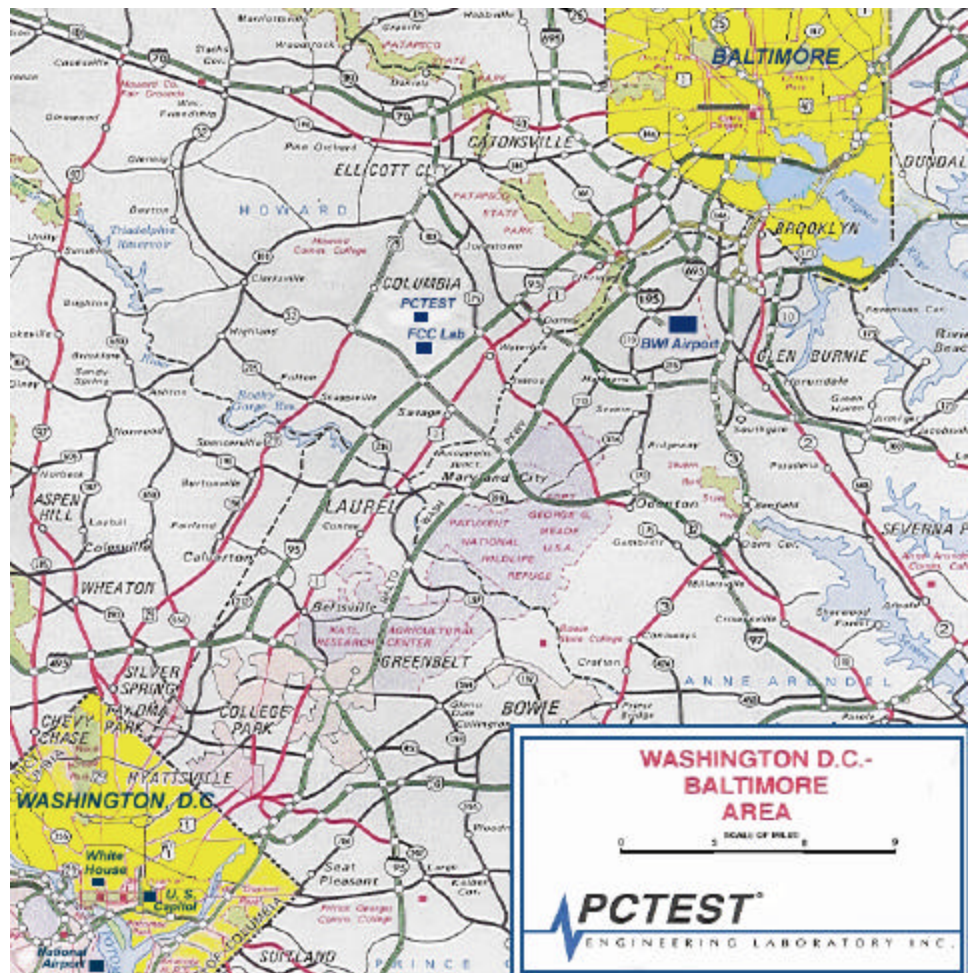


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

3.1 Product Information

3.2 Equipment Description

The Equipment Under Test (EUT) is the **LG Electronics Inc. (GATEWAY Model: FPD1510) 15-inch LCD Monitor FCC ID: BEJLG56AH.**

Maximum Resolution(s):	1024 x 768 Non-interlaced @ 75Hz
Power Cord:	<i>Unshielded</i> AC power cord
Port(s)/Input Connector(s):	15-pin D-Sub type VGA signal connector
Cable(s):	Shielded D-Sub (with ferrite on both ends)
Horizontal Frequency:	48.36kHz-60.2kHz
Vertical Frequency:	60Hz – 75Hz
Power:	DC 12V 3A
Dimensions (W x H x D):	38.74 x 39.05 x 20.32cm

EMI Suppression Devices

~ NONE

4.1 Description of Tests

4.2 Powerline Conducted RFI (150kHz- 30MHz)

The powerline conducted RFI measurements were performed according to CISPR 22. The EUT was placed on a non-conducting 1.0 by 1.5 meter table which is 0.8 meters in height and 0.40 meters away from the vertical wall of the shielded enclosure (see Figure 2). Power to the EUT is provided through a Rohde & Schwarz 50 Ω / 50 uH Line Impedance Stabilization Network (LISN) and the support equipment through a separate Solar 50 Ω / 50 uH Line- Conducted Test Facility LISN. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME. The spectrum was scanned from 150kHz to 30 MHz. Each maximum EME was remeasured using an EMI receiver. The detector function of the receiver was set to CISPR quasi- peak and average mode with the bandwidth set to 9 kHz. Each emission was maximized consistent with the typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum Diagram emission. Excess cable lengths were bundled at the centre with 30- 40cm. in length. The worst-case configuration is noted in the test report and the photographs are attached. Each EME reported was calibrated using the Rohde & Schwarz SMX signal generator and are listed on Table 1.

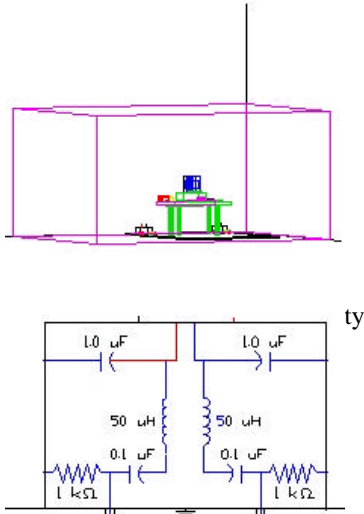


Fig. 3. LISN Schematic Diagram

RFI Conducted	FCC Class B	CISPR 22 Class B	
	Limits dB[uV/m]	Limits dB[uV/m]	
Freq. Range	FCC Class B	CISPR 22	CISPR 22
	Quasi-Peak	Quasi-Peak	Average
150 kHz – 0.5 MHz	48*	66 – 56**	56 – 46**
0.5 MHz – 5 MHz	48	56	46
5 MHz – 30 MHz	48	60	50
* FCC Class B limits starts from 450 kHz.			
** Limit decreases linearly with the logarithm of frequency.			

Table 1. CISPR 22 Class B RFI Conducted Limits

4.1 Description of Tests (continued)

4.3 Radiated Emissions

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The spectrum was scanned from 30 to 200 MHz using biconical antenna, 200 to 1000 MHz using log- spiral antenna, and above 1 GHz using linearly polarized horn antennas. Final measurements were made outdoors at 10-meter test range using Roberts™ Dipole antennas (see Figure 4) and EMI receiver. For frequencies above 1 GHz, horn antennas were used. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The EMI receiver detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120 kHz. The EUT, support equipment, and interconnecting cables were arranged to the configuration that produces the maximum EME emission found during preliminary scan. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission (see Figure 4). Horizontal and vertical antenna polarizations were checked. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/ or support equipment, and powering the monitor the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Appendix A. Each EME reported was calibrated using the Rohde & Schwarz SMX signal generator.

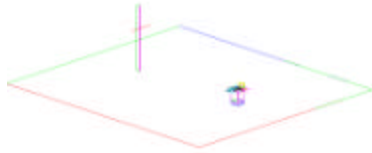


Fig. 4. Radiated Test @ 10-meters




Fig. 5. NSA Theoretical Attenuation Curves (Horiz. Pol.)

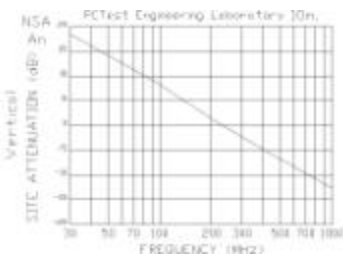


Fig. 6. NSA Theoretical Attenuation Curves (Vert. Pol.)

ITE Radiated Limits			
Frequency (MHz)	FCC Limit @ 3m. Quasi-Peak dB[μV/m]	FCC Limit @ 10m.* Quasi-Peak dB[μV/m]	CISPR Limit @ 10m. Quasi-Peak dB[μV/m]
30-88	40.0	29.5	30.0
88-216	43.5	33.0	30.0
216-230	46.0	35.6	30.0
230-960	46.0	35.6	37.0
960-1000	54.0	43.5	37.0
> 1000	54.0	43.5	No Specified limit
* Limit extrapolated 20 dB/decade			

Table 2. Radiated Class B limits @ 10-meters

5.1 Support Equipment Used

- | | | |
|--------------------------------|--|----------------------|
| 1. LGE GATEWAY 15" LCD Monitor | FCC ID: BEJLG56AH (EUT) | S/N: KUL5002A0000001 |
| | 1.8 m. unshielded AC power cord | |
| | 1.8 m. shielded D-SUB cable w/ ferrite on both ends | |
| | 1.8 m. shielded DVI cable w/ ferrite on both ends | |
| AC GATEWAY Adapter | Model: ADP-36UB | |
| | 1.7 m. shielded DC power cord w/ ferrite on one side | |
| 2. GATEWAY Mid-Tower PC | Model: GP6-450 | S/N: 0011745565 |
| | 1.8 m. unshielded AC power cord | |
| ATI AGP Video Card | Model: RADEON VE/32DDR | |
| 3. H/P Printer | FCC ID: BS46XU2225C | S/N: 2651S40366 |
| | 1.8 m. unshielded AC power cord | |
| | 1.5 m. shielded cable | |
| 4. LOGITECH Mouse | FCC ID: DZL211029 | S/N: LZB02058777 |
| | 1.6 m. shielded cable | |
| 5. GATEWAY Keyboard | FCC ID: D7J2196003-XX | S/N: 03400409 |
| | 1.6 m. shielded cable | |
| 6. ZOOM Modem | FCC ID: BDNV34MINI-EXT | S/N: 3117ZM4X40211 |
| | 1.8 m. unshielded DC power cord | |
| | 1.2 m. shielded cable | |

(See "Attachment G - Test Setup Photographs" for actual system test setup.)

6.1 LINE-CONDUCTED TEST DATA

6.2 Conducted Emissions

(See Data under PLOTS – Attachment D)

NOTES:

1. All modes of operation were investigated and the worst-case emissions are reported.
2. The CISPR RFI conducted limits are listed on Table 1 (Page 4).
3. Line A = Phase Line B = Neutral
4. Deviations to the Specifications: None

* All readings are calibrated by HP8640B signal generator with accuracy traceable to the National Institute of Standards and Technology (formerly NBS).

** Measurements using CISPR quasi-peak mode.

7.1 RADIATED TEST DATA

7.2 Radiated Emissions

FREQ. (MHz)	Level* (dB μ V/m)	AFCL** (dB)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (dB μ V/m)	Margin*** (dB)
70.3	17.56	6.34	H	3.3	135	23.9	- 6.1
105.7	11.53	10.17	V	2.9	90	21.7	- 8.3
175.2	6.29	15.21	V	2.8	110	21.5	- 8.5
228.5	4.39	17.81	H	2.5	225	22.2	- 7.8
317.3	6.51	21.19	V	1.8	280	27.7	- 9.3
386.4	4.88	23.31	H	1.7	215	28.2	- 8.8
456.2	2.75	25.04	H	1.3	165	27.8	- 9.2

Table 3. Radiated Measurements at 10-meters.

1024 x 768 Non-interlaced @ 75Hz

NOTES:

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. The radiated limits are listed on Table 2 (Page 5).

* All readings are calibrated by HP8640B signal generator with accuracy traceable to the National Institute of Standards and Technology (formerly NBS).

** AFCL = Antenna Factor (Roberts dipole) and Cable Loss (30 ft. RG58C/U).

*** Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

8.1 Sample Calculations

$$\text{dBmV} = 20 \log_{10} (\text{mV/m})$$
$$\text{dBmV} = \text{dBm} + 107$$

8.2 Example 1:

@ 20.3 MHz

Class B limit	=	250 μV	=	47.96 dB μV
Reading	=	- 67.8 dBm (calibrated level)		
Convert to dB μV	=	- 67.8 + 107	=	39.2 dB μV
$10^{(39.2/20)}$	=	91.2 μV		
Margin	=	39.2 - 47.96	=	- 8.76
	=		=	8.8 dB below limit

8.3 Example 2:

@ 66.7 MHz

Class B limit	=	100 $\mu\text{V/m}$	=	47.96 dB $\mu\text{V/m}$
Reading	=	- 76.0 dBm (calibrated level)		
Convert to dB $\mu\text{V/m}$	=	- 76.0 + 107	=	31.0 dB $\mu\text{V/m}$
Antenna Factor + Cable Loss	=	5.8 dB		
Total	=	36.8 dB $\mu\text{V/m}$		
Margin	=	36.8 - 40.0	=	- 3.2
	=		=	3.2 dB below limit

9.1 Accuracy of Measurement

9.2 Measurement Uncertainty Calculations:

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Line Conducted)	Probability Distribution	Uncertainty (\pm dB)	
		9kHz-150MHz	150-30MHz
Receiver specification	Rectangular	1.5	1.5
LISN coupling specification	Rectangular	1.5	1.5
Cable and input attenuator calibration	Normal (k=2)	0.3	0.5
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8$ (9kHz) 0.2 (30MHz) Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	0.2	0.35
System repeatability	Std. deviation	0.2	0.05
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	1.26	1.30
Expanded uncertainty	Normal (k=2)	2.5	2.6

Calculations for 150kHz to 30MHz:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{\frac{1.5^2 + 1.5^2}{3} + \left(\frac{0.5}{2}\right)^2 + 0.35} = \pm 1.298\text{dB}$$

$$U = 2U_c(y) = \pm 2.6\text{dB}$$

Contribution (Radiated Emissions)	Probability Distribution	Uncertainties (\pm dB)	
		3 m	10 m
Ambient Signals		-	-
Antenna factor calibration	Normal (k=2)	± 1.0	± 1.0
Cable loss calibration	Normal (k=2)	± 0.5	± 0.5
Receiver specification	Rectangular	± 1.5	± 1.5
Antenna directivity	Rectangular	+ 0.5 / - 0	+ 0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase centre variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67$ (Bi) 0.3 (Lp) Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+ 1.1 - 1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+ 2.19 / - 2.21	+ 1.74 / - 1.72
Expanded uncertainty U	Normal (k=2)	+ 4.38 / - 4.42	+ 3.48 / - 3.44

Calculations for 3m biconical antenna. Coverage factor of k=2 will ensure that the level of confidence will be approximately 95%, therefore:

$$U=2u_c(y) = 2 \times \pm 2.19 = \pm 4.38\text{dB}$$

10.1 Test Equipment

10.2 Type	Model	Cal.	Due Date	S/N
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	12/05/01	3638A08713	
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	04/17/02	2542A11898	
Spectrum Analyzer/Tracking Gen.	HP 8591A (9kHz-1.8GHz)		06/02/02	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)		10/15/01	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)		11/02/01	3051A00187
Signal Generator*	HP 8640B (500Hz-1GHz)	06/02/02	2232A19558	
Signal Generator*	HP 8640B (500Hz-1GHz)	06/02/02	1851A09816	
Signal Generator*	Rohde & Schwarz (0.1-1000MHz)	09/11/01	894215/012	
Alltech/Eaton Receiver	NM 37/57A-SL (30-1000MHz)	04/12/02	0792-03271	
Alltech/Eaton Receiver	NM 37/57A (30-1000MHz)	03/11/02	0805-03334	
Alltech/Eaton Receiver	NM17/27A (0.1-32MHz)	09/17/01	0608-03241	
Quasi-Peak Adapter	HP 85650A	08/09/01	2043A00301	
Alltech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/02	0194-04082	
RG58 Coax Test Cable	No.167		n/a	
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)		3531A00115	
Broadband Amplifier (2)	HP 8447D		1145A00470,1937A03348	
Broadband Amplifier	HP 8447F		2443A03784	
Transient Limiter	HP 11947A (9kHz-200MHz)		2820A00300	
Horn Antenna	EMCO Model 3115 (1-18GHz)		9704-5182	
Horn Antenna	EMCO Model 3115 (1-18GHz)		9205-3874	
Horn Antenna	EMCO Model 3116 (18-40GHz)		9203-2178	
Biconical Antenna (4)	Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design		1295,1332,0355	
Log-Spiral Antenna (3)	Alltech/Eaton 93490-1		0608,1103,1104	
Roberts Dipoles	Compliance Design (1 set) A100		5118	
Alltech Dipoles	DM-105A (1 set)		33448-111	
EMCO LISN (2)	3816/2		1077,1079	
EMCO LISN	3725/2		2009	
Microwave Preamplifier 40dB Gain	HP 83017A (0.5-26.5GHz)		3123A00181	
Microwave Cables	MicroCoax (1.0-26.5GHz)			
Alltech/Eaton Receiver	NM37/57A-SL		0792-03271	
Spectrum Analyzer	HP 8591A		3034A01395	
Modulation Analyzer	HP 8901A		2432A03467	
NTSC Pattern Generator	Leader 408		0377433	
Noise Figure Meter	HP 8970B		3106A02189	
Noise Figure Meter	Alltech 7510		TE31700	
Noise Generator	Alltech 7010		1473	
Microwave Survey Meter	Holiday Model 1501 (2.450GHz)		80931	
Digital Thermometer	Extech Instruments 421305		426966	
Attenuator	HP 8495A (0-70dB) DC-4GHz			
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)			
Shielded Screen Room	RF Lindgren Model 26-2/2-0		6710 (PCT270)	
Shielded Semi-Anechoic Chamber	Ray Proof Model S81		R2437 (PCT278)	
Environmental Chamber	Associated Systems Model 1025 (Temperature/Humidity)		PCT285	

* Calibration traceable to the National Institute of Standards and Technology (NIST).

11.1 Test Software Used

```
10  CLS:COLOR 7,0
20  FOR I = 1 TO 80
30  PRINT H;
40  NEXT I
50  FOR K= 1 TO 25
60  LPRINT H;
70  NEXT K
80  OPEN COM1:1200,N,8,1,CS0,DS0" FOR OUTPUT AS #1
90  PRINT#1,ATDT,0123456789"
100 CLOSE:GOTO 20
```

NOTE: This is a sample of the basic program used during the test. However, during testing, a different software program may be used; whichever determines the worst-case condition. In addition, the program used also depends on the number and type of devices being tested.

Actual program used is the "H" pattern in Notepad under Windows environment. All resolution modes (1024x768, 800x600, 640x480 Non-interlaced) were investigated and tested.

12.1 Conclusion

The data collected shows that the **LG Electronics Inc. 15-inch LCD Monitor FCC ID: BEJLG56AH** complies with §15.107 and §15.109 of the FCC Rules.